

FCC Radio Test Report


FCC ID: 2AXJ4EAP610

The worst case of radiated emissions above 1GHz have been re-evaluated by sample of FCC ID: 2AXJ4EAP610, model name: EAP610. Meanwhile. The other test data were reissue from the FCC ID: 2AXJ4EAP620HDV2, model name: EAP620 HD. The test data of radiated emissions above 1GHz please see the Appendix A. Model difference: EAP610 has single DDR, EAP620 HD has dual DDR.


This report concerns: Original Grant

Project No. : 2102C267B
Equipment : AX1800 Ceiling Mount Wi-Fi 6 Access Point
Brand Name : tp-link
Test Model : EAP610
Series Model : N/A
Applicant : TP-Link Corporation Limited
Address : Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer : TP-Link Corporation Limited
Address : Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong
Date of Receipt : Apr. 28, 2021
Date of Test : May 27, 2021 ~ Jun. 16, 2021
Issued Date : Jul. 27, 2021
Report Version : R01
Test Sample : Engineering Sample No.: DG20210423110
Standard(s) : FCC Part15, Subpart C (15.247)
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Sheldon Ou



Approved by : Ethan Ma



TESTING CERT #5123.02

Add: No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's
Republic of China
Tel: +86-769-8318-3000
Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 TEST SOFTWARE SETTING	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 SUPPORT UNITS	10
3 . RADIATED EMISSIONS TEST	11
3.1 LIMIT	11
3.2 TEST PROCEDURE	11
3.3 DEVIATION FROM TEST STANDARD	12
3.4 TEST SETUP	12
3.5 EUT OPERATION CONDITIONS	12
3.6 TEST RESULTS - ABOVE 1000 MHZ	12
4 . MEASUREMENT INSTRUMENTS LIST	13
5 . EUT TEST PHOTO	14
APPENDIX A - RADIATED EMISSION- ABOVE 1000 MHZ	15

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 12, 2021
R01	Added the test software version.	Jul. 27, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	-----	PASS	Note(3)
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX A	PASS	Note(3)
15.247(a)(2)	Bandwidth	-----	PASS	Note(3)
15.247(b)(3)	Maximum Average Output Power	-----	PASS	Note(3)
15.247(d)	Conducted Spurious Emissions	-----	PASS	Note(3)
15.247(e)	Power Spectral Density	-----	PASS	Note(3)
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) Reissue from the FCC ID: 2AXJ4EAP620HDV2. Report No.: BTL-FCCP-1-2102C267.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 3 Jinshagang 1st Rd. Shixia, Dalang Town, Dongguan City, Guangdong, People's Republic of China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	1GHz ~ 6GHz	-	3.96
		6GHz ~ 18GHz	-	5.24
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
Radiated Emissions-Above 1000 MHz	24°C	60%	AC 120V/60Hz	Jakyri Wen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AX1800 Ceiling Mount Wi-Fi 6 Access Point
Brand Name	tp-link
Test Model	EAP610
Series Model	N/A
Model Difference(s)	N/A
Power Source	1# DC voltage supplied from AC adapter. Model: T120100-2B1 2# PoE supplied. (Supports Unit)
Power Rating	1# I/P: 100-240V ~50/60Hz 0.3A O/P: 12V $\overline{=}$ 1A 2# 802.3at PoE: 42.5-57V $\overline{=}$ 0.6A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 573.6 Mbps

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20), IEEE 802.11ax (HE20) CH03 - CH09 for IEEE 802.11n (HT40), IEEE 802.11ax (HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	tp-link	EAP1800(EU)1.0	PIFA	I-PEX	3
2	tp-link	EAP1800(EU)1.0	PIFA	I-PEX	3

Note:

- This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3 + 10\log(2/1)\text{dBi} = 6.01$.
Then, the power spectral density limit is $8 - (6.01 - 6) = 7.99$.
- Beamforming Gain: 3dB. So Directional gain=3+3=6.
- The antenna gain and beamforming gain are provided by the manufacturer.

4. Table for Antenna Configuration:
For Non Beamforming:

Operating Mode TX Mode	2TX
IEEE 802.11b	V (Ant. 1 + Ant. 2)
IEEE 802.11g	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)	V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)	V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V (Ant. 1 + Ant. 2)

For Beamforming:

Operating Mode TX Mode	2TX
IEEE 802.11ax(HE20)	V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V (Ant. 1 + Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/11
Mode 2	TX G Mode Channel 01
Mode 3	TX N-20 MHz Mode Channel 10
Mode 4	TX N-40 MHz Mode Channel 09
Mode 5	TX AX-20 MHz Mode Channel 01
Mode 6	TX AX-40 MHz Mode Channel 04

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

Radiated emissions test- Above 1GHz_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/11
Mode 2	TX G Mode Channel 01
Mode 3	TX N-20 MHz Mode Channel 10
Mode 4	TX N-40 MHz Mode Channel 09
Mode 5	TX AX-20 MHz Mode Channel 01
Mode 6	TX AX-40 MHz Mode Channel 04

NOTE:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) The measurements for Output Power are tested, the Non Beamforming and Beamforming are recorded in the report. The worst case is Non Beamforming and only the worst case is documented for other test items.
- (5) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.

2.3 TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	QDART-Connectivity1.0-00075.exe
-----------------------	---------------------------------

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

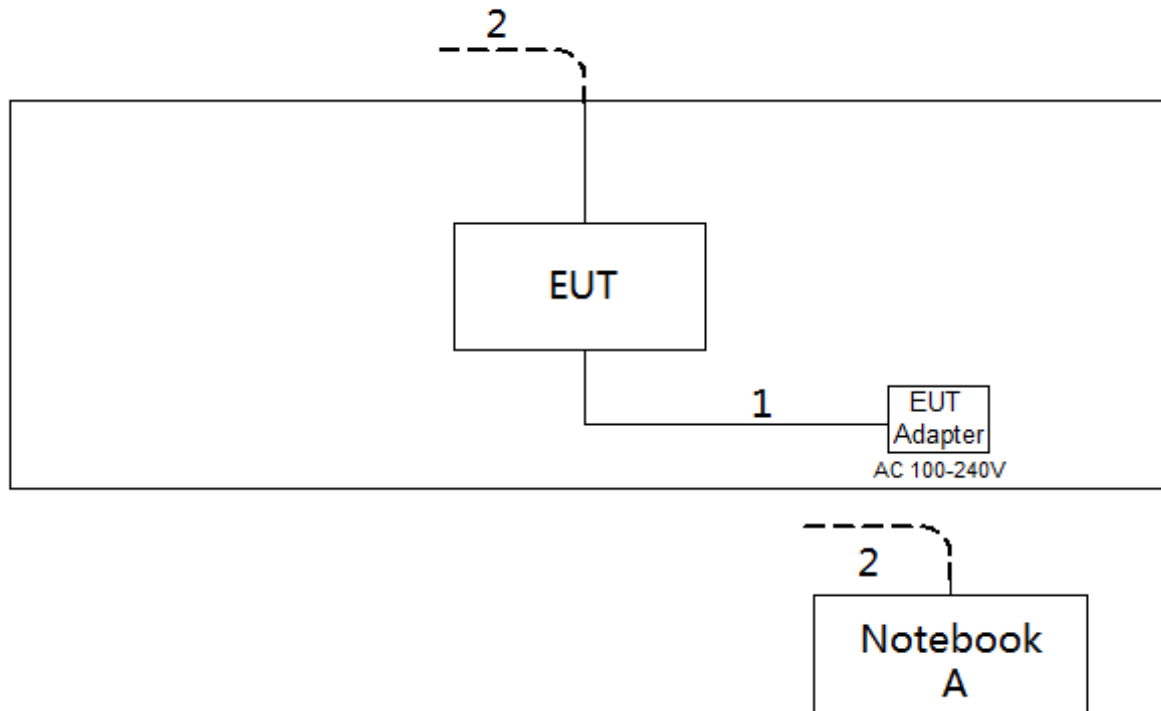

2.5 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. RADIATED EMISSIONS TEST

3.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average


3.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- e. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- g. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

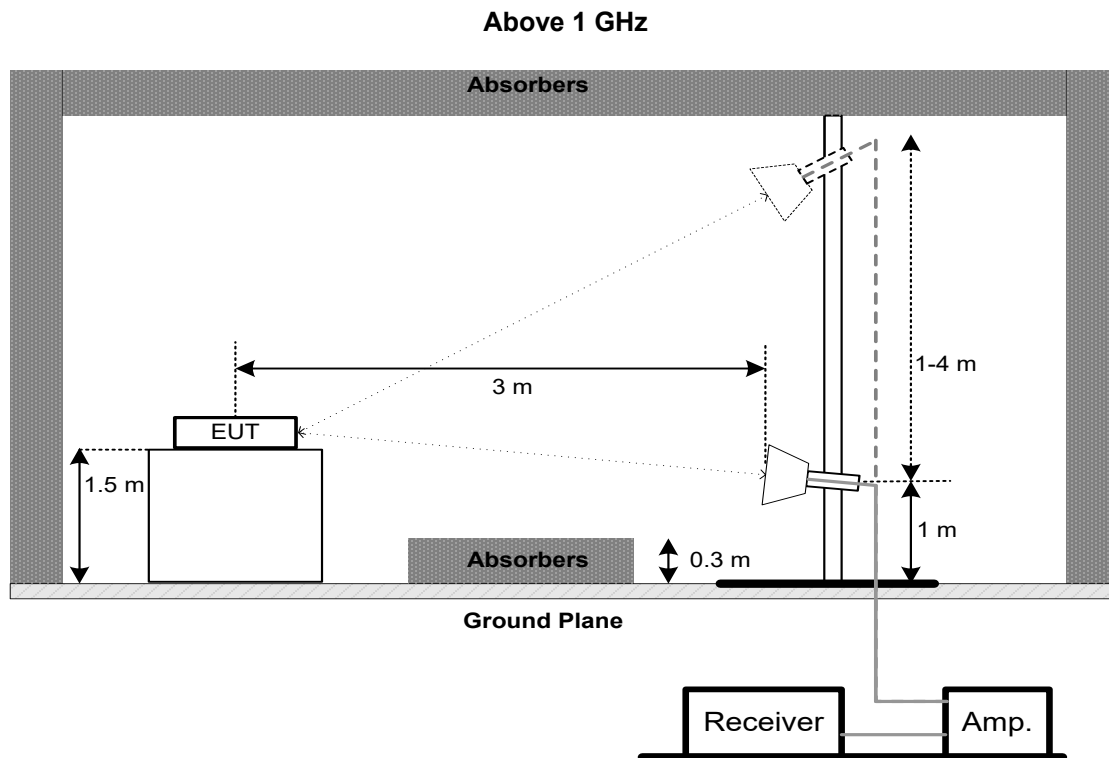

3.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX A.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

4. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 10, 2022
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02584	Jul. 25, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	Oct. 16, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jul. 25, 2021
11	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

5. EUT TEST PHOTO

Radiated Emissions Test Photos


Above 1 GHz

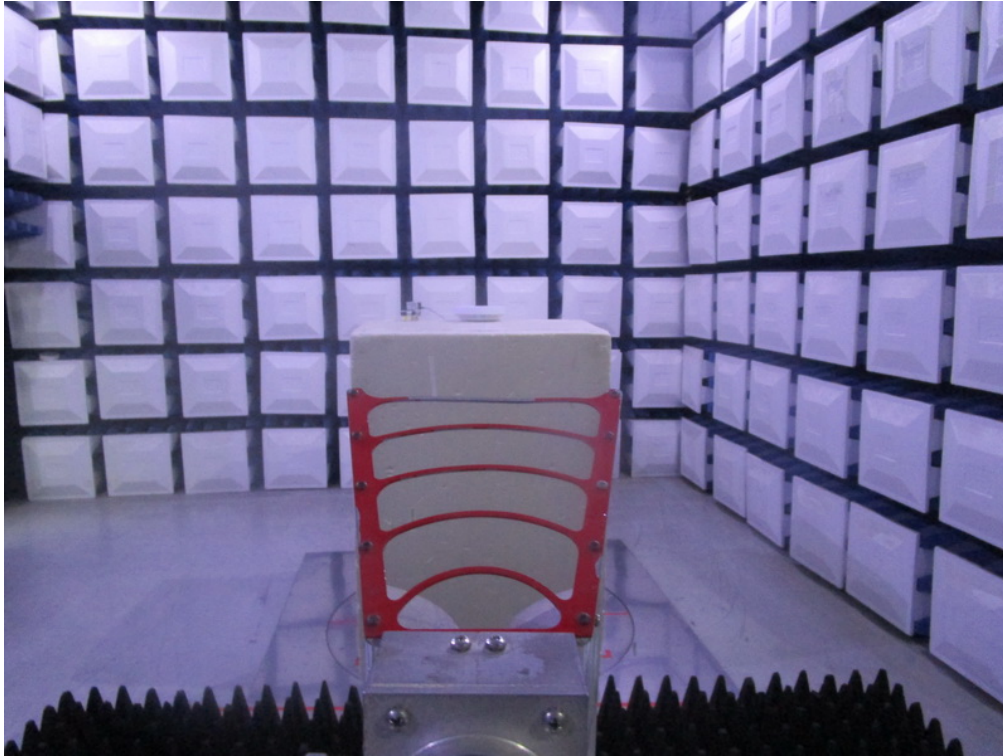

APPENDIX A - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode: TX B Mode 2412 MHz

Vertical

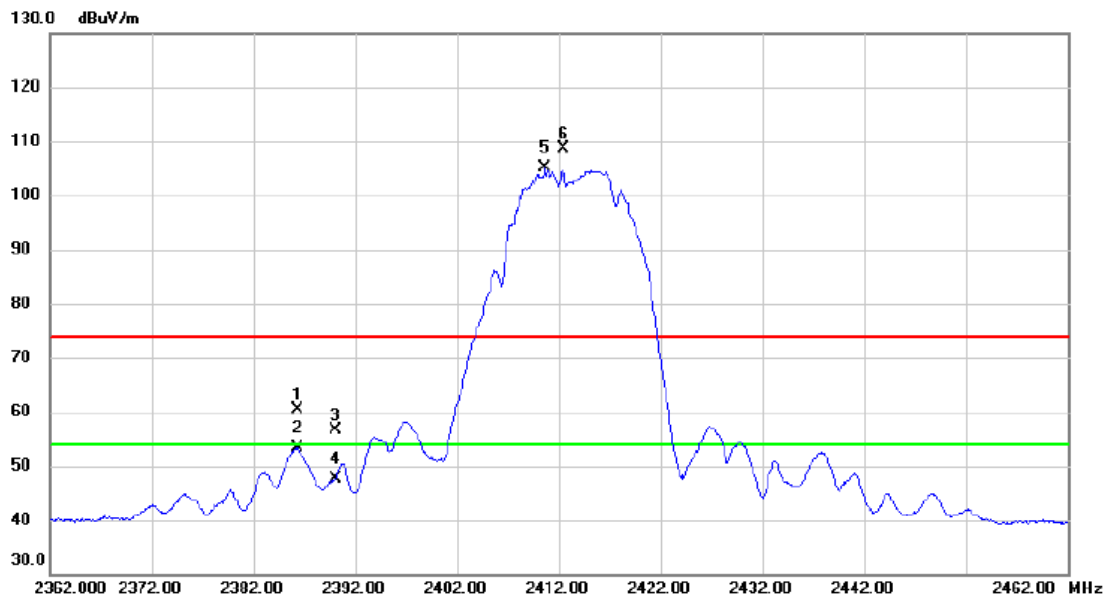


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2386.300	50.50	9.98	60.48	74.00	-13.52	peak	
2		2386.300	43.38	9.98	53.36	54.00	-0.64	AVG	
3		2390.000	46.72	9.98	56.70	74.00	-17.30	peak	
4		2390.000	37.59	9.98	47.57	54.00	-6.43	AVG	
5	*	2410.600	95.13	9.98	105.11	54.00	51.11	AVG	No Limit
6	X	2412.450	98.59	9.99	108.58	74.00	34.58	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2462 MHz
------------	--------------------

Vertical

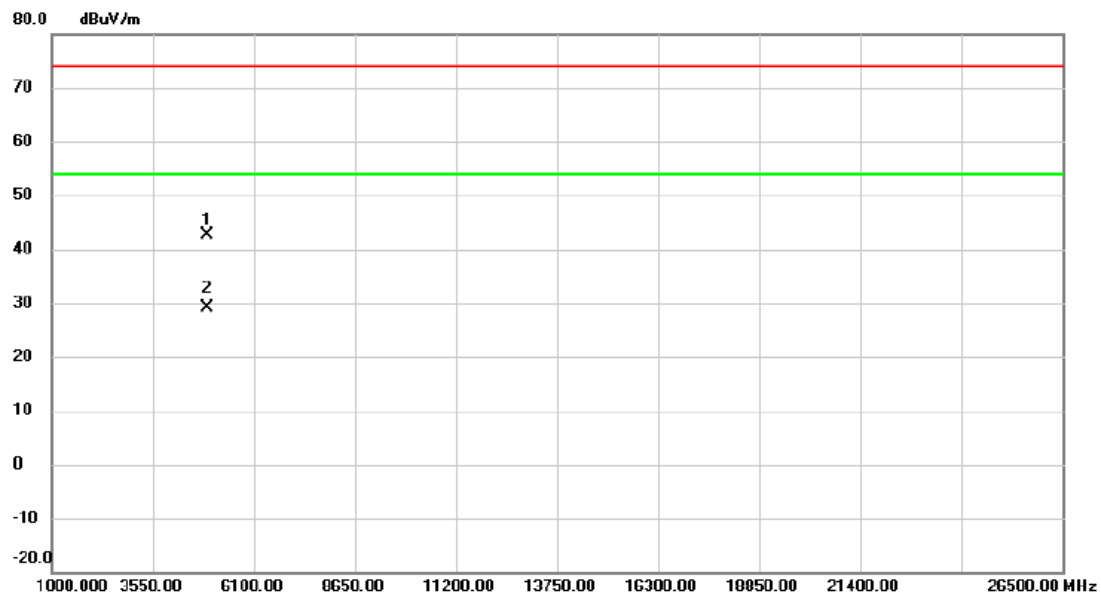

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4923.931	35.92	6.72	42.64	74.00	-31.36	peak	
2	*	4923.931	22.46	6.72	29.18	54.00	-24.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2462 MHz
------------	--------------------

Horizontal

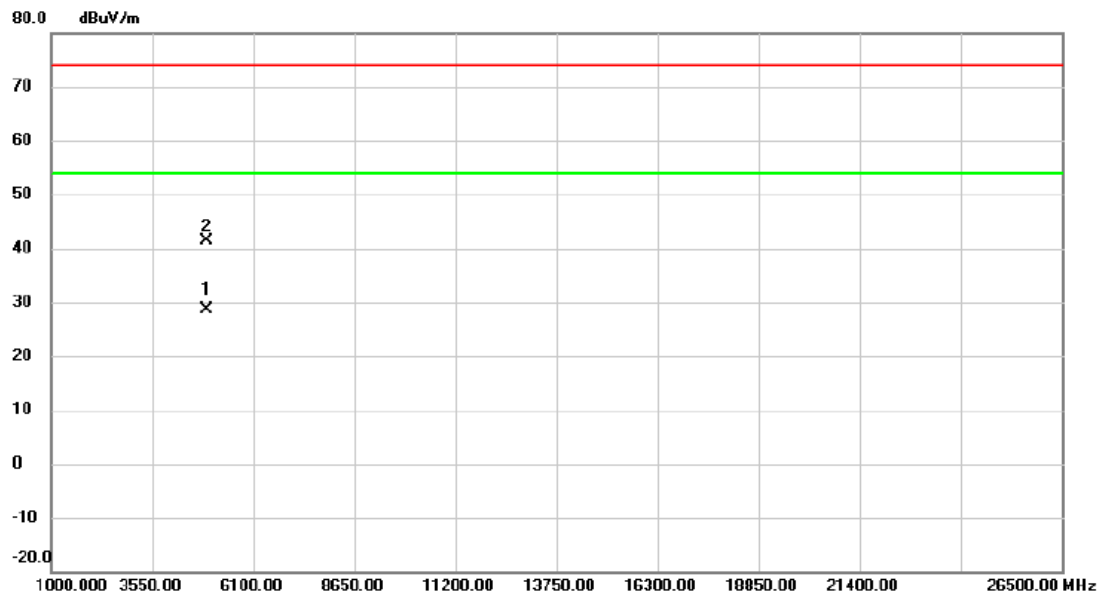


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4923.961	21.98	6.72	28.70	54.00	-25.30	AVG	
2		4924.456	34.55	6.72	41.27	74.00	-32.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

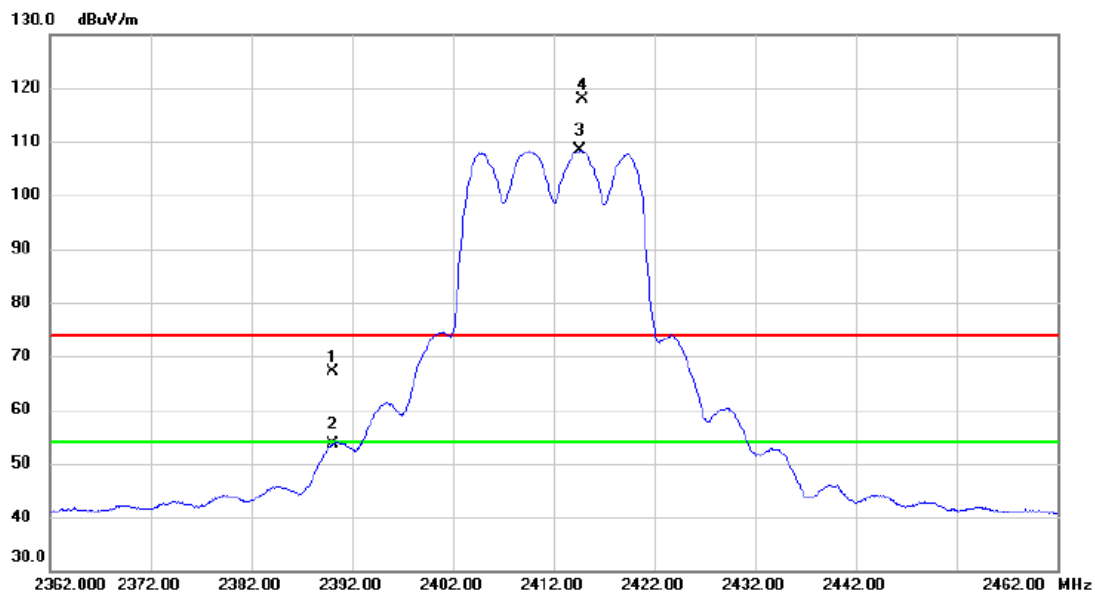

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	57.21	9.98	67.19	74.00	-6.81	peak	
2		2390.000	43.53	9.98	53.51	54.00	-0.49	AVG	
3	*	2414.650	98.46	9.98	108.44	54.00	54.44	AVG	No Limit
4	X	2414.800	108.02	9.98	118.00	74.00	44.00	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2457 MHz

Vertical

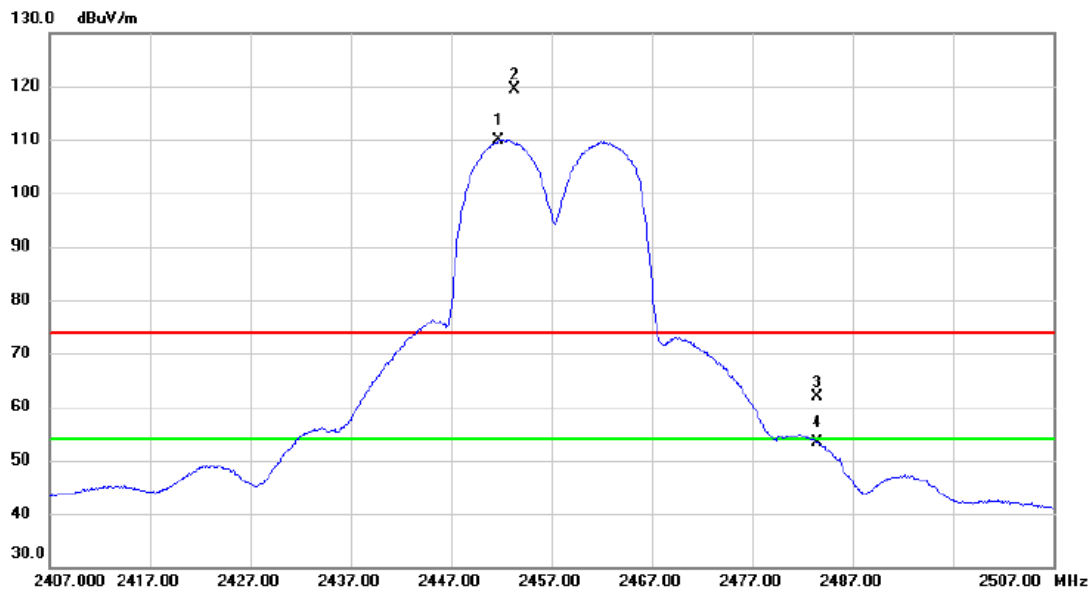


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2451.750	99.91	10.00	109.91	54.00	55.91	AVG	No Limit
2	X	2453.300	109.30	10.00	119.30	74.00	45.30	peak	No Limit
3		2483.500	51.90	10.02	61.92	74.00	-12.08	peak	
4		2483.500	43.37	10.02	53.39	54.00	-0.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

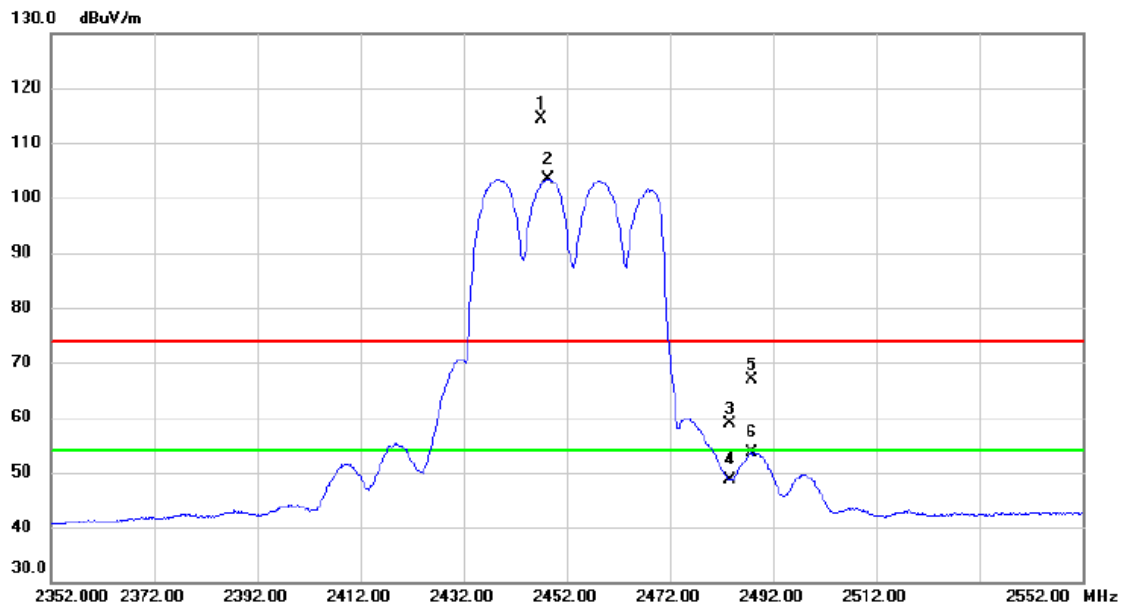

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	2447.100	104.36	10.00	114.36	74.00	40.36	peak	No Limit
2	*	2448.400	93.46	10.00	103.46	54.00	49.46	AVG	No Limit
3		2483.500	48.93	10.02	58.95	74.00	-15.05	peak	
4		2483.500	38.60	10.02	48.62	54.00	-5.38	AVG	
5		2487.900	56.97	10.01	66.98	74.00	-7.02	peak	
6		2487.900	43.54	10.01	53.55	54.00	-0.45	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-20M Mode 2412 MHz

Vertical

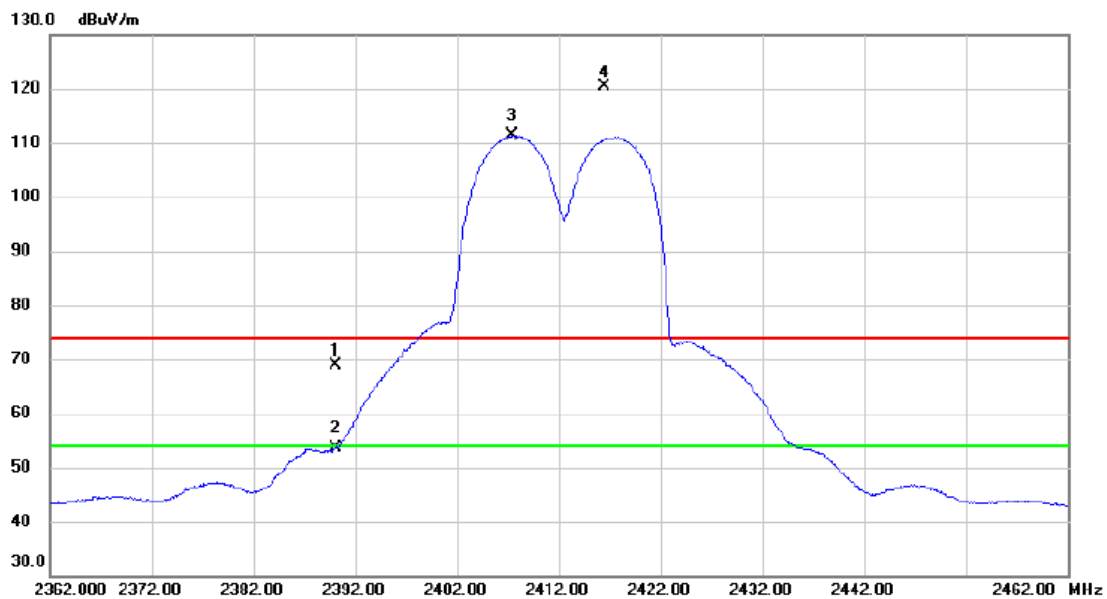

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	2390.000	58.84	9.98	68.82	74.00	-5.18	peak	
2	2390.000	43.62	9.98	53.60	54.00	-0.40	AVG	
3 *	2407.450	101.32	9.99	111.31	54.00	57.31	AVG	No Limit
4 X	2416.400	110.43	9.98	120.41	74.00	46.41	peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AX-40M Mode 2427 MHz

Vertical

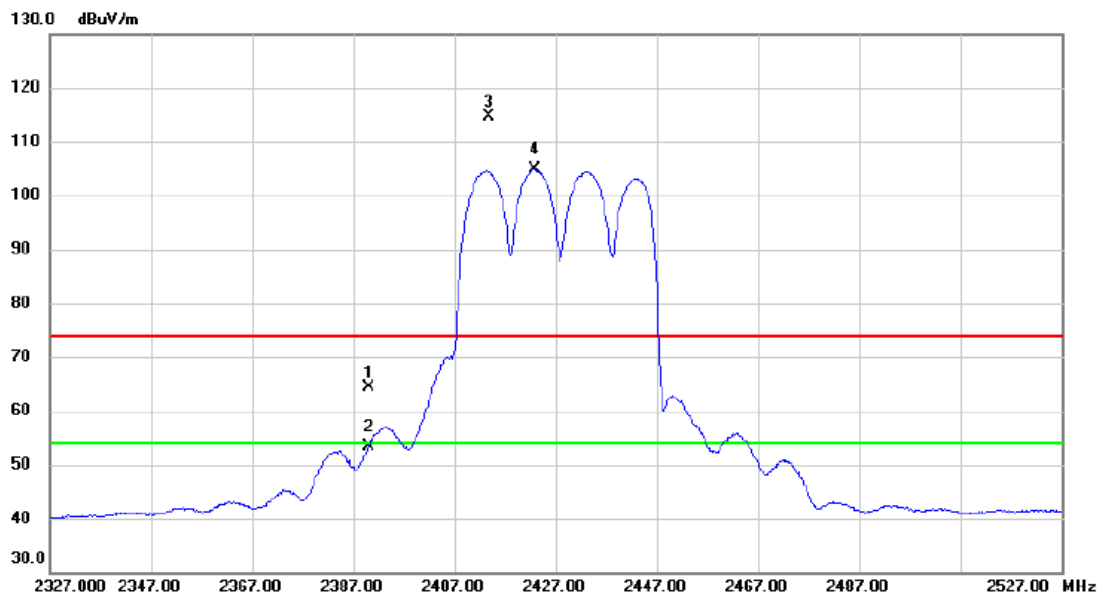

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2390.000	54.49	9.98	64.47	74.00	-9.53	peak	
2		2390.000	43.47	9.98	53.45	54.00	-0.55	AVG	
3	X	2413.900	104.76	9.98	114.74	74.00	40.74	peak	No Limit
4	*	2422.900	94.82	9.99	104.81	54.00	50.81	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

End of Test Report