

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

AX3000 Whole Home Mesh Wi-Fi AP

MODEL NUMBER: HX510

REPORT NUMBER: 4791019221-1-RF-1

ISSUE DATE: November 15, 2023

FCC ID: 2AXJ4HX510V2

IC: 26583-HX510V2

Prepared for

**TP-Link Corporation Limited
Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui,
Kowloon, Hong Kong**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	November 15, 2023	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER.....</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>11</i>
5.6. <i>WORST-CASE CONFIGURATIONS.....</i>	<i>12</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>13</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>14</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	15
7. ANTENNA PORT TEST RESULTS	18
7.1. <i>CONDUCTED OUTPUT POWER.....</i>	<i>18</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>19</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>21</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....</i>	<i>23</i>
7.5. <i>DUTY CYCLE</i>	<i>25</i>
8. RADIATED TEST RESULTS.....	26
8.1. <i>RESTRICTED BANDEDGE</i>	<i>34</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>92</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>102</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>162</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>165</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....</i>	<i>167</i>
9. ANTENNA REQUIREMENT	169
10. AC POWER LINE CONDUCTED EMISSION	170
11. TEST DATA.....	173

Appendix A: Duty Cycle.....	173
Appendix B: Maximum Conducted Output Power	176
Appendix C: -6dB Bandwidth	178
Appendix D: Occupied Channel Bandwidth.....	200
Appendix E: Maximum Power Spectral Density Level.....	222
Appendix F: Band Edge.....	244
Appendix G: Conducted RF Spurious Emission.....	277

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: TP-Link Corporation Limited
 Address: Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

Manufacturer Information


Company Name: TP-Link Corporation Limited
 Address: Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

EUT Information

EUT Name: AX3000 Whole Home Mesh Wi-Fi AP
 Model: HX510
 Brand: tp-link
 Sample Received Date: September 26, 2023
 Sample Status: Normal
 Sample ID: 6489919
 Date of Tested: October 12, 2023 to November 15, 2023


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass

Prepared By:



Fanny Huang
 Engineer Project Associate

Checked By:



Denny Huang
 Senior Project Engineer

Approved By:



Stephen Guo
 Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISED RSS-GEN Issue 5

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name:	AX3000 Whole Home Mesh Wi-Fi AP
Model/PMN:	HX510
HVIN:	HX510V2
FVIN:	V2.0

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)IEEE 802.11ax: OFDMA(1024QAM,64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE802.11b/g/n HT20/n HT40/ n VHT20/n VHT40/ax HE20/ax HE40
Normal Test Voltage:	DC 12 V via adapter

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	27.69	29.69
g	2412 ~ 2462	1-11[11]	27.23	29.23
n HT20	2412 ~ 2462	1-11[11]	27.14	29.14
n HT40	2422 ~ 2452	3-9[7]	25.48	27.48
ax HE20	2412 ~ 2462	1-11[11]	27.03	29.03
ax HE40	2422 ~ 2452	3-9[7]	26.13	29.36

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
g	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
n HT20	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
n HT40	CH 3, CH4, CH 6, CH8, CH 9	2422, 2427, 2437, 2447, 2452
ax HE20	CH 1, CH2, CH 6, CH10, CH 11	2412, 2417, 2437, 2457, 2462
ax HE40	CH 3, CH4, CH 6, CH8, CH 9	2422, 2427, 2437, 2447, 2452

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter for CDD	
Test Software	QSPR

Mode	Freq(MHz)	Tx power level from QSPR(dBm)
802.11b-CDD	2412	23.5
	2417	24
	2437	24
	2457	24
	2462	23.5
802.11g-CDD	2412	22
	2417	24
	2437	24
	2457	24
	2462	22
802.11n 20M	2412	21.5
	2417	24
	2437	24
	2457	22
	2462	19.5
802.11n 40M	2422	18
	2427	22
	2437	22
	2447	19
	2452	18
802.11ax 20M	2412	21
	2417	24
	2437	24
	2457	21.5
	2462	19
802.11ax 40M	2422	18
	2427	21
	2437	23
	2447	19
	2452	18

5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b CDD mode: 1 Mbps
802.11g CDD mode: 6 Mbps
802.11n HT20 CDD mode: MCS0
802.11n HT40 CDD mode: MCS0
802.11n VHT20 CDD mode: MCS0
802.11n VHT40 CDD mode: MCS0
802.11ax HE20 CDD mode: MCS0
802.11ax HE40 CDD mode: MCS0

All modes support CDD mode.

All modes support TX beamforming mode except 802.11b/g.

For 802.11n/ax mode, the EUT support Cyclic Shift Diversity (CDD) and TX Beamforming. The power setting of TX Beamforming mode is reduced 3 by CDD mode. The conducted power of CDD mode is higher than TX Beamforming mode, and the EIRP of CDD is the same as TX Beamforming mode, so we only chose the worst-case mode CDD for final testing.

802.11n HT20/HT40 and 802.11n VHT20/VHT40 were performed on the worst case (802.11n HT20/HT40) mode and only the worst data was recorded in this report.

The EUT has 4 antennas, ANT1, ANT3 support WIFI 2.4G band and AN2, ANT4 support WIFI 5G band.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	PCB	2
3	2412-2462	PCB	2

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5.01 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

For TX Beamforming:

Directional gain= $G_{ANT} + 10 \log(N_{ANT}/N_{SS}) = 5.01 \text{ dBi}$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11n VHT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11n VHT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1 and ANT 3 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	ThinkPad	X230i	/
2	RJ45 dummy load	/	/	/
3	RJ45 dummy load	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	LAN1	RJ45	Unshielded	1.0 m	/
2	LAN1	RJ45	Unshielded	0.1 m	/
3	LAN1	RJ45	Unshielded	0.1 m	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	I.T.E POWER SUPPLY	tp-link	T120150-2B1	Input: AC 100-240 V, 50 / 60 Hz, 0.6A Output: DC 12.0 V, 1.5 A

TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

SETUP DIAGRAM FOR TESTS

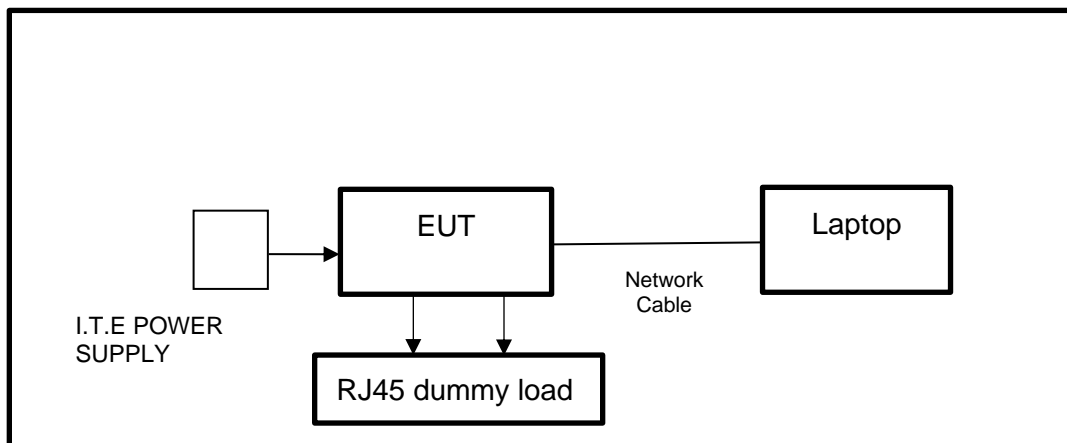

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.31,2023	Mar.30,2024
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	April 18, 2023	April 17, 2024
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Oct.12, 2023	Oct.11, 2024

Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	Oct.12, 2023	Oct.11, 2024
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	Oct.12, 2023	Oct.11, 2024
Highpass Filter	Xingbo	XBLBQ-GTA68	211115-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (5905-6445 MHz)	Xingbo	XBLBQ-DZA175	210922-2-1	Oct.12, 2023	Oct.11, 2024
Notch Filter (6425-6525 MHz)	Xingbo	XBLBQ-DZA176	210922-2-2	Oct.12, 2023	Oct.11, 2024
Notch Filter (6825-7125 MHz)	Xingbo	XBLBQ-DZA177	210922-2-3	Oct.12, 2023	Oct.11, 2024
Notch Filter (6525-6875 MHz)	Xingbo	XBLBQ-DZA178	210922-2-4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	24.7°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 12 V

TEST DATE / ENGINEER

Test Date	October 20, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: ≥3 × RBW For 99 % Occupied Bandwidth: ≥3 × RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

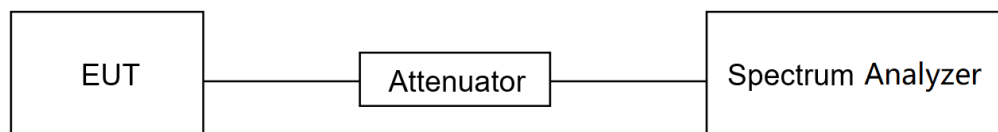

TEST ENVIRONMENT

Temperature	24.7°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 12 V

TEST DATE / ENGINEER

Test Date	October 20, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C&D

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x OBW bandwidth
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

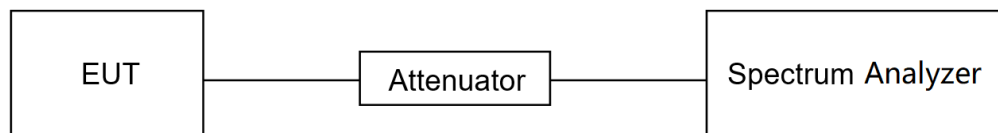

TEST ENVIRONMENT

Temperature	24.7°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 12 V

TEST DATE / ENGINEER

Test Date	October 20, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	24.7°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 12 V

TEST DATE / ENGINEER

Test Date	October 20, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F&G

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

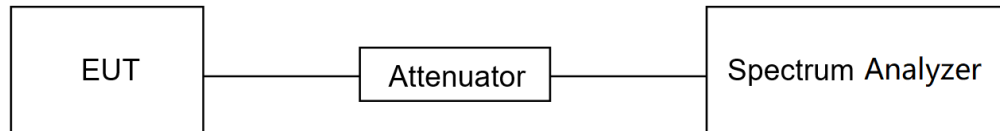

TEST ENVIRONMENT

Temperature	24.7°C	Relative Humidity	61.2%
Atmosphere Pressure	101kPa	Test Voltage	DC 12 V

TEST DATE / ENGINEER

Test Date	October 20, 2023	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (uA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

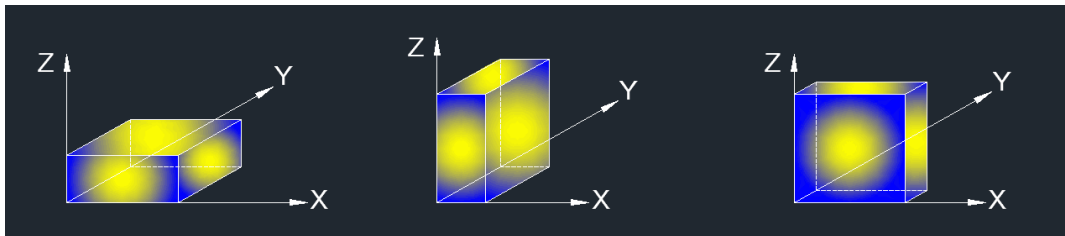

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

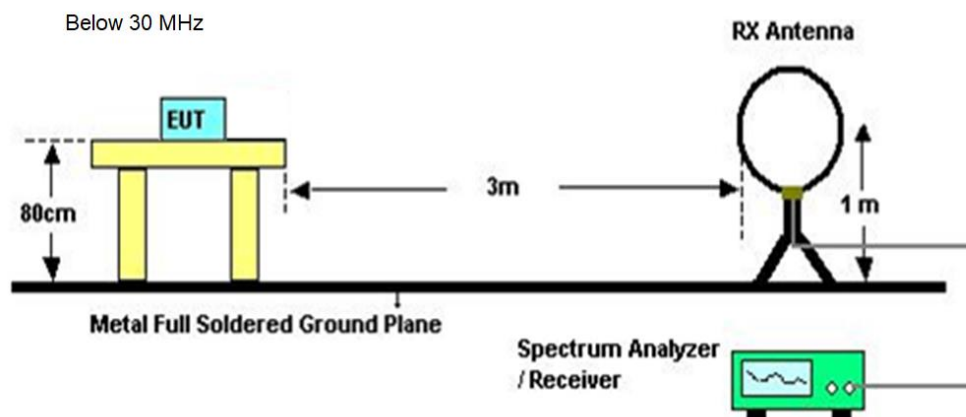

Below 1 GHz and above 30 MHz

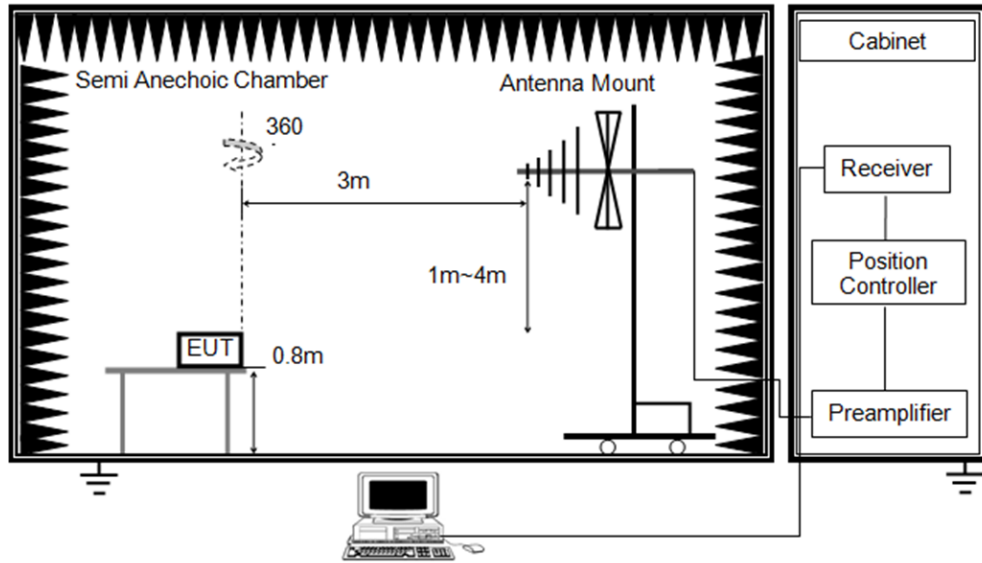

Above 1 GHz

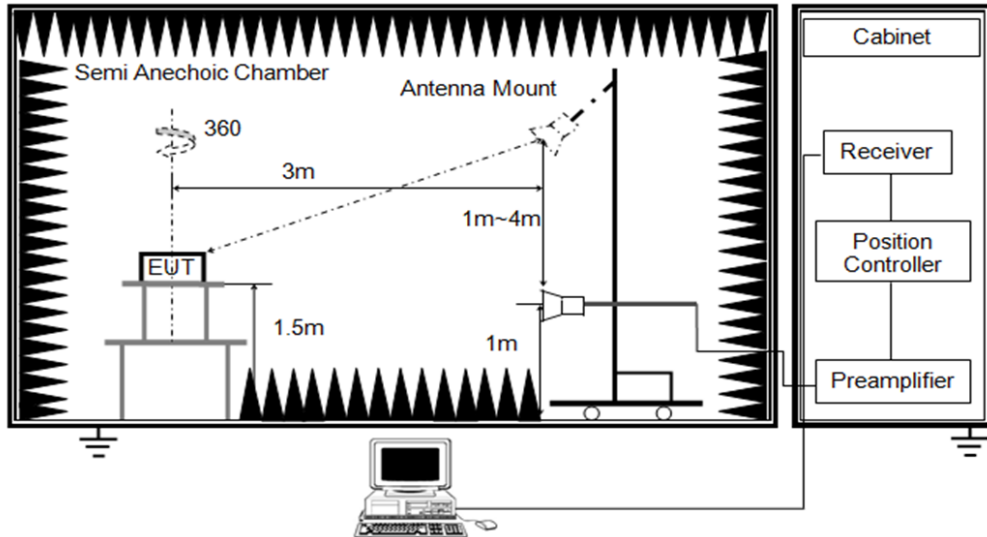

TEST ENVIRONMENT

Temperature	24.8°C	Relative Humidity	59%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	November 15, 2023	Test By	Rex Huang
-----------	-------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

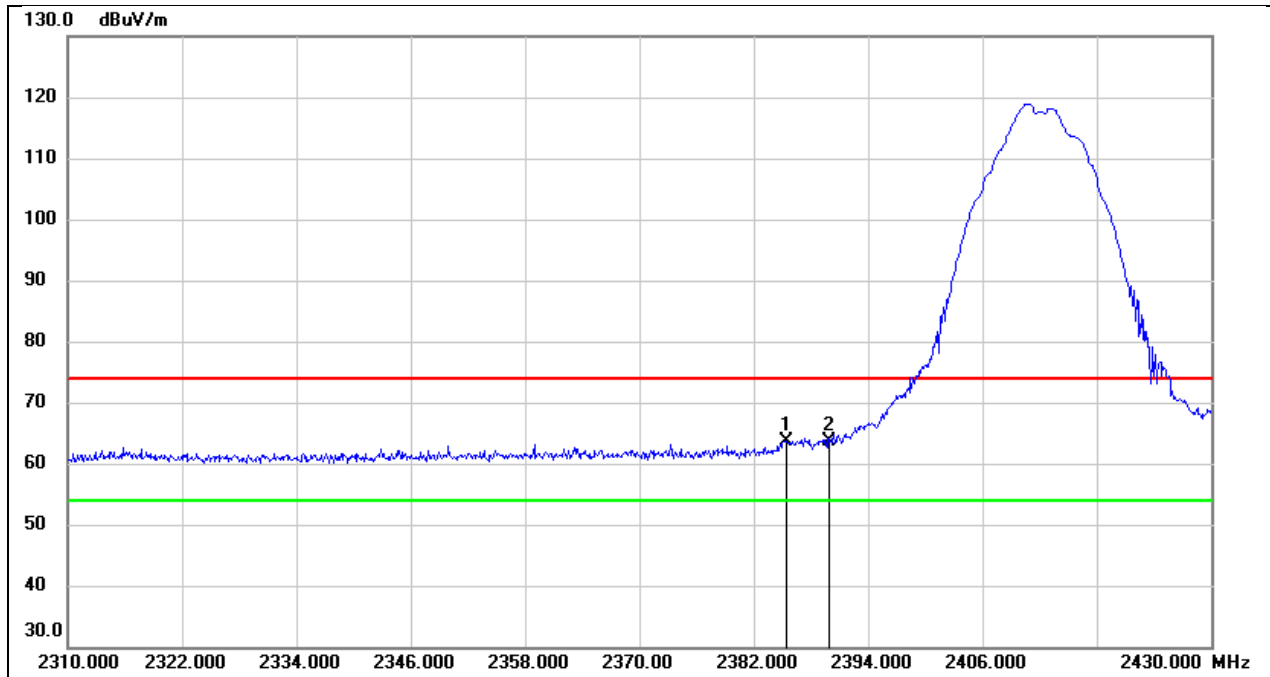


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.360	31.43	32.14	63.57	74.00	-10.43	peak
2	2390.000	31.37	32.16	63.53	74.00	-10.47	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

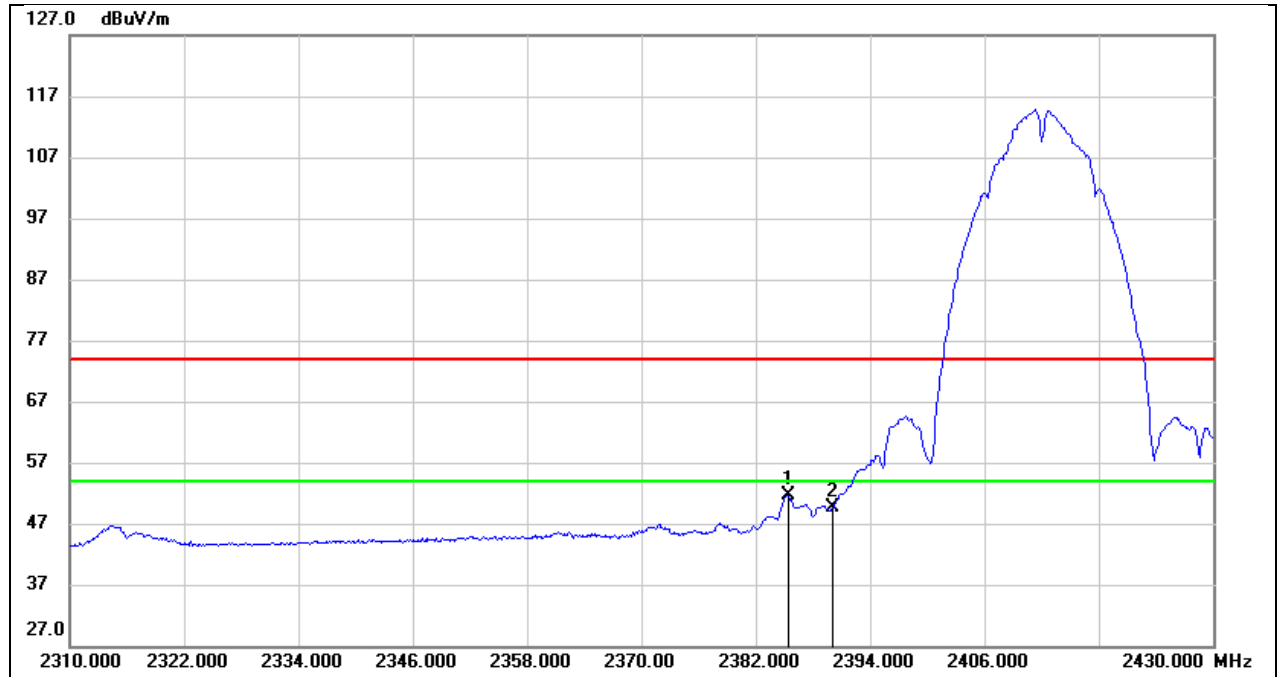


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.360	19.41	32.14	51.55	54.00	-2.45	AVG
2	2390.000	17.46	32.16	49.62	54.00	-4.38	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

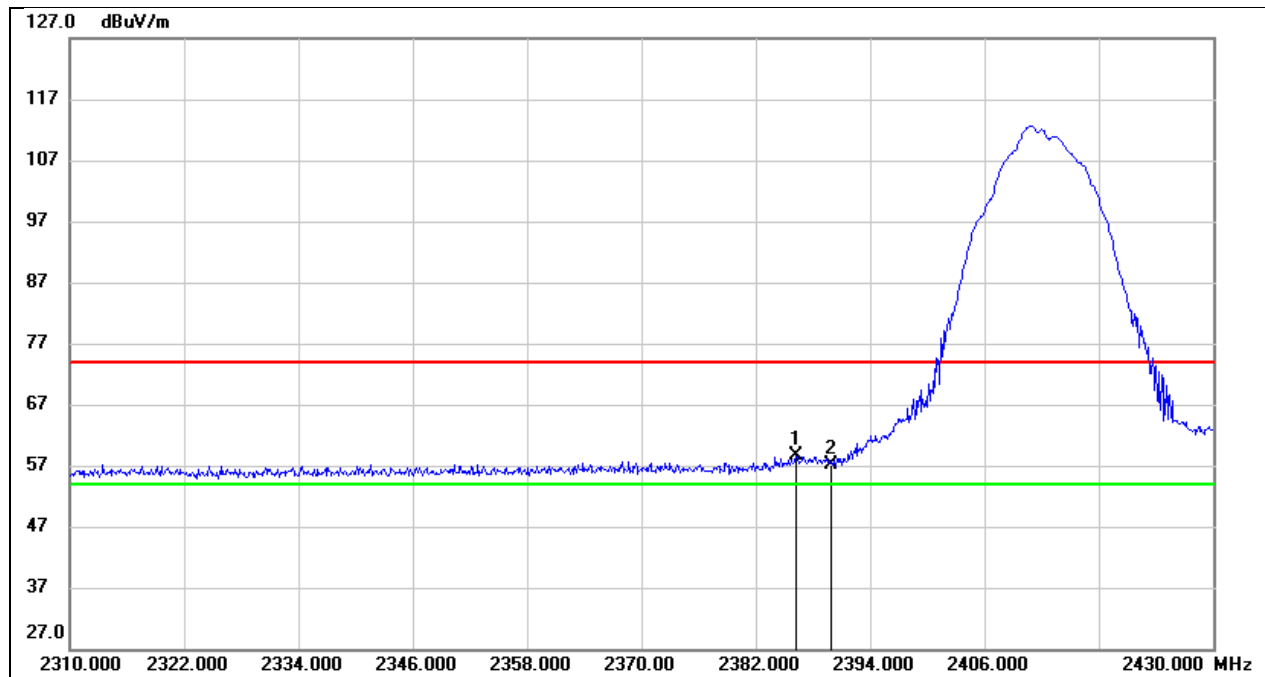


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.200	26.55	32.14	58.69	74.00	-15.31	peak
2	2390.000	25.06	32.16	57.22	74.00	-16.78	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

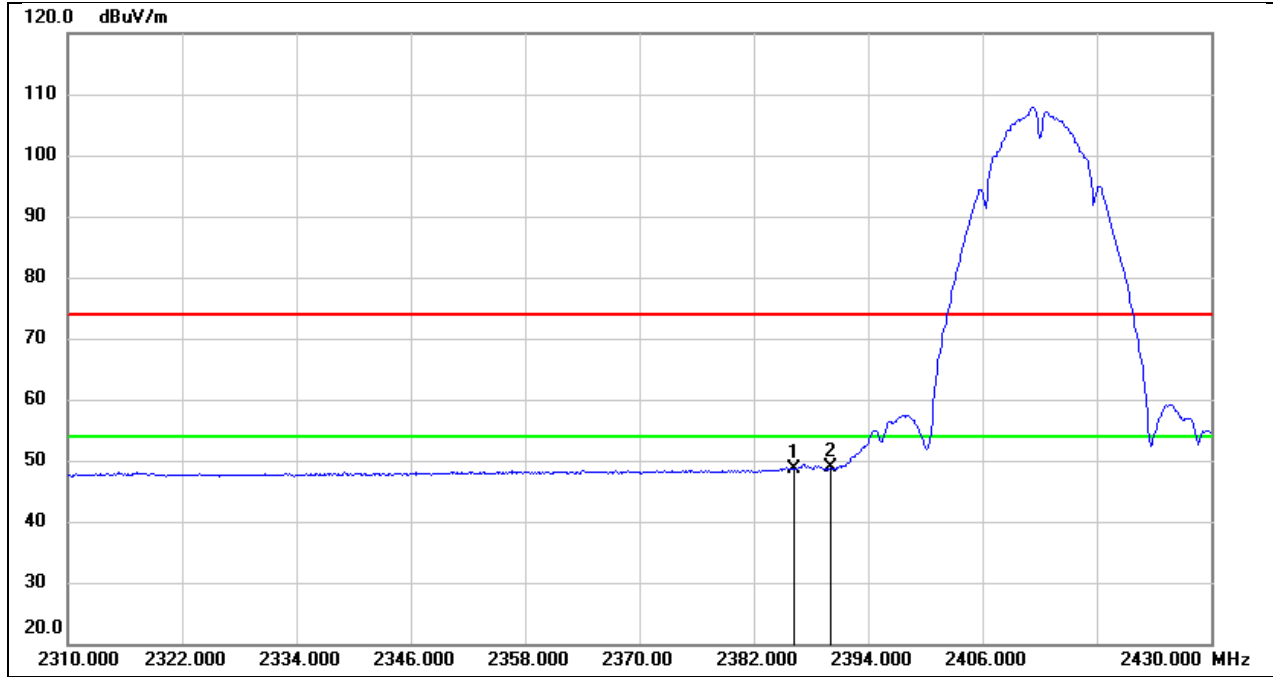


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.200	16.48	32.14	48.62	54.00	-5.38	AVG
2	2390.000	16.61	32.16	48.77	54.00	-5.23	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

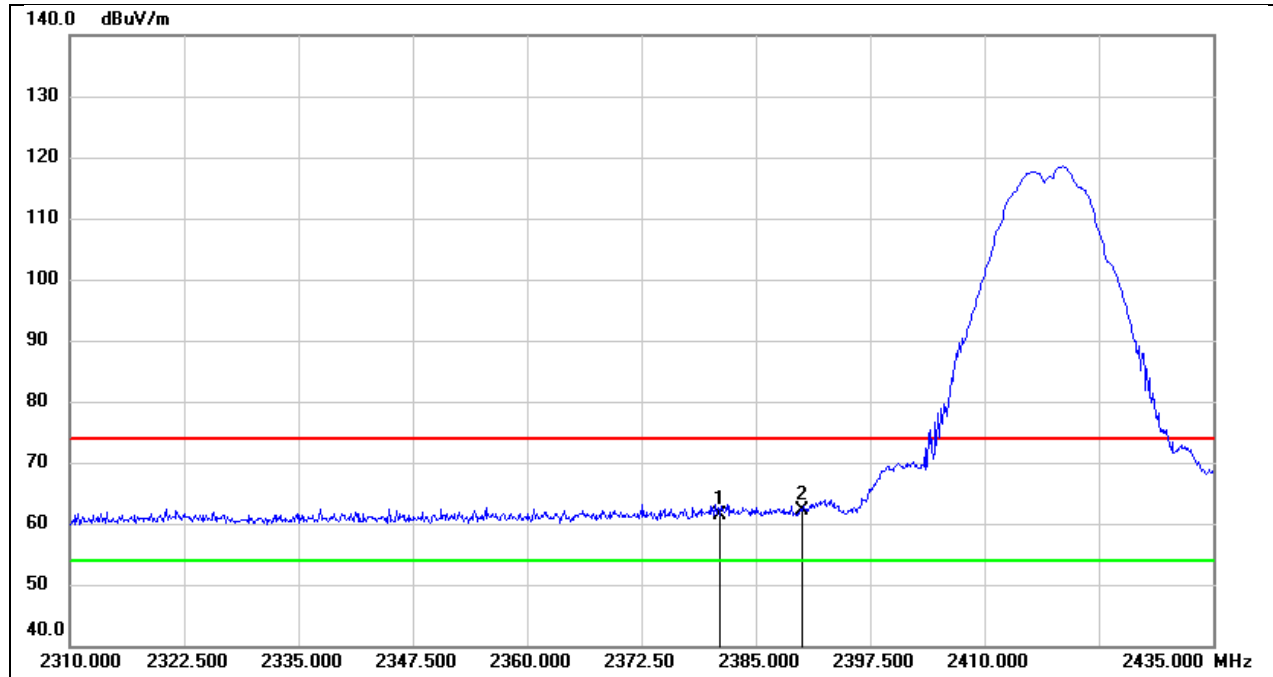


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.125	29.33	32.13	61.46	74.00	-12.54	peak
2	2390.000	29.99	32.16	62.15	74.00	-11.85	peak

Test Mode:	802.11b AV	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

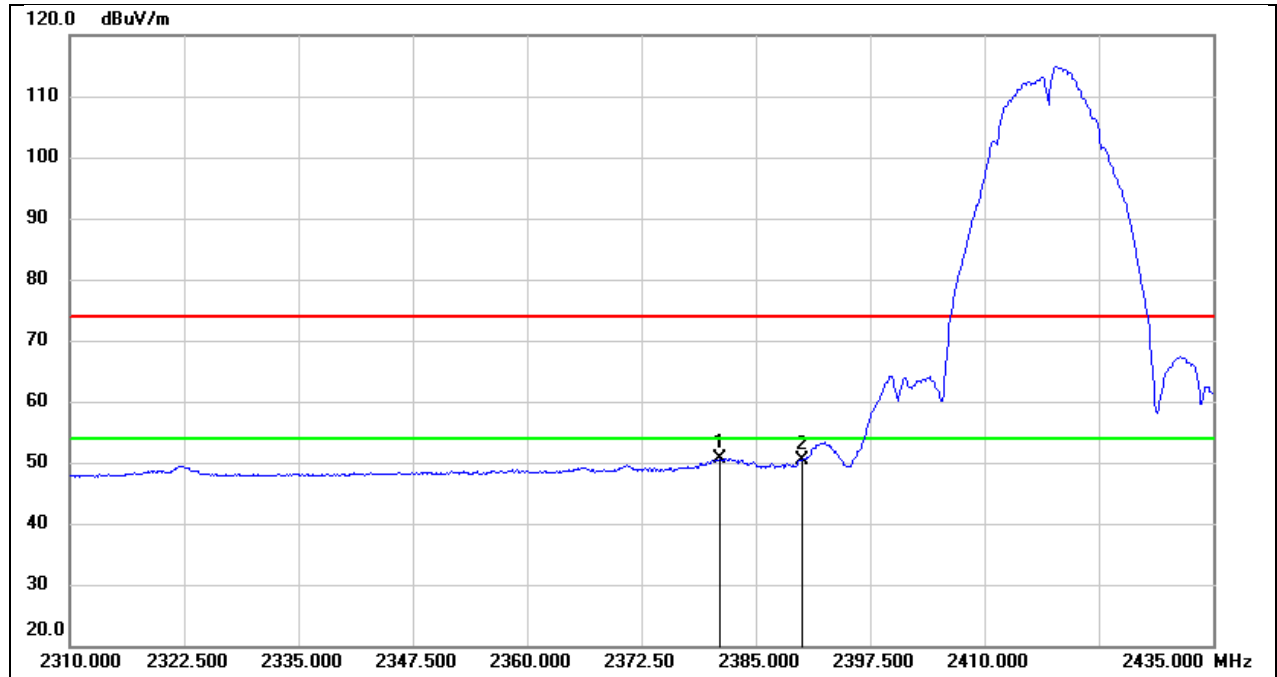


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.125	18.60	32.13	50.73	54.00	-3.27	AVG
2	2390.000	18.22	32.16	50.38	54.00	-3.62	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

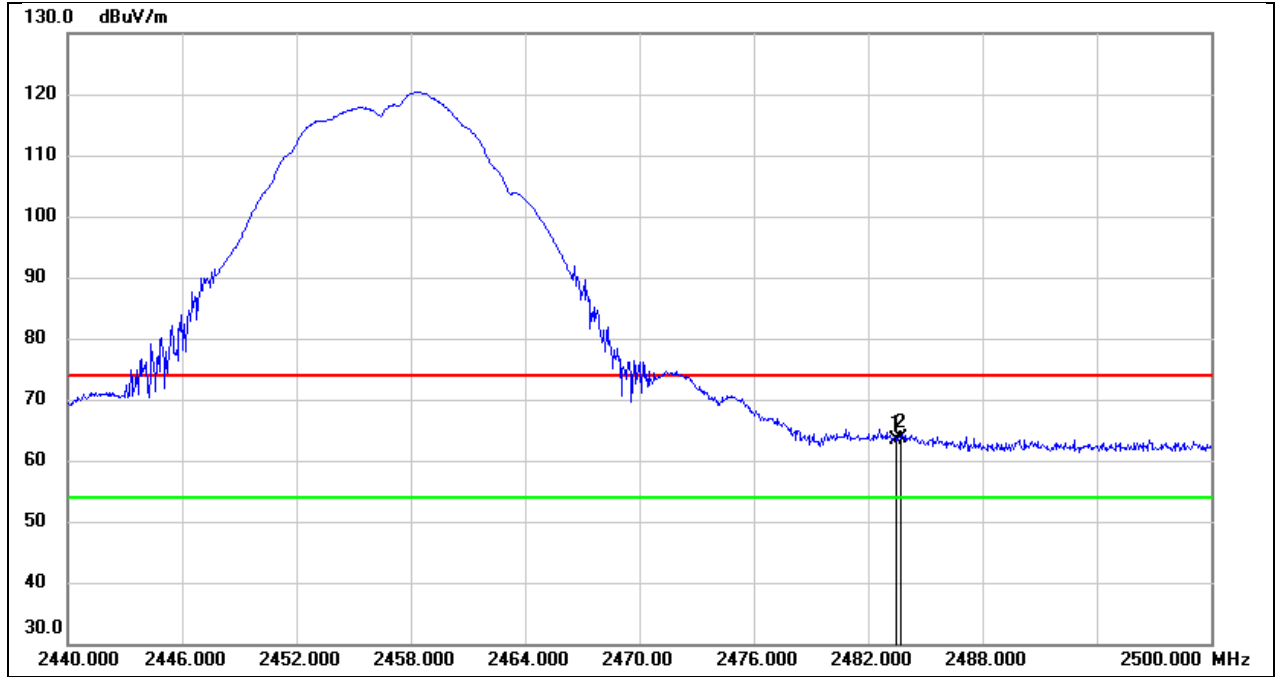


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	30.87	32.44	63.31	74.00	-10.69	peak
2	2483.680	31.18	32.44	63.62	74.00	-10.38	peak

Test Mode:	802.11b AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

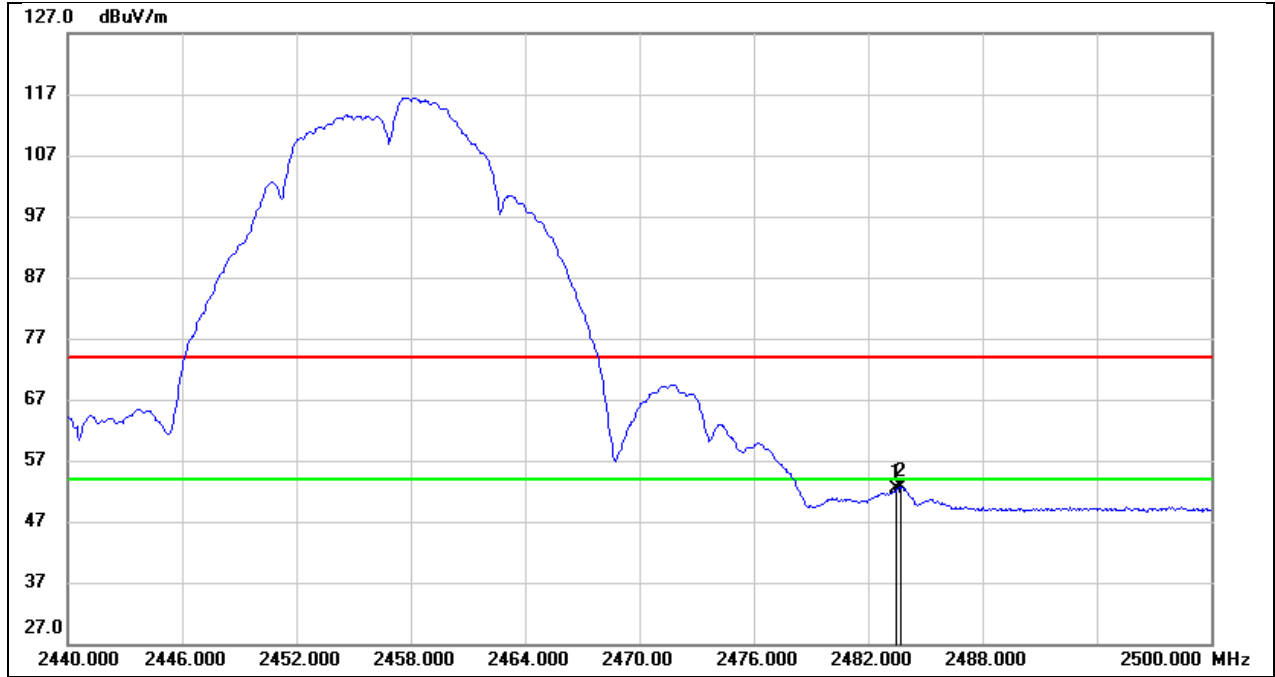


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.88	32.44	52.32	54.00	-1.68	AVG
2	2483.680	20.12	32.44	52.56	54.00	-1.44	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

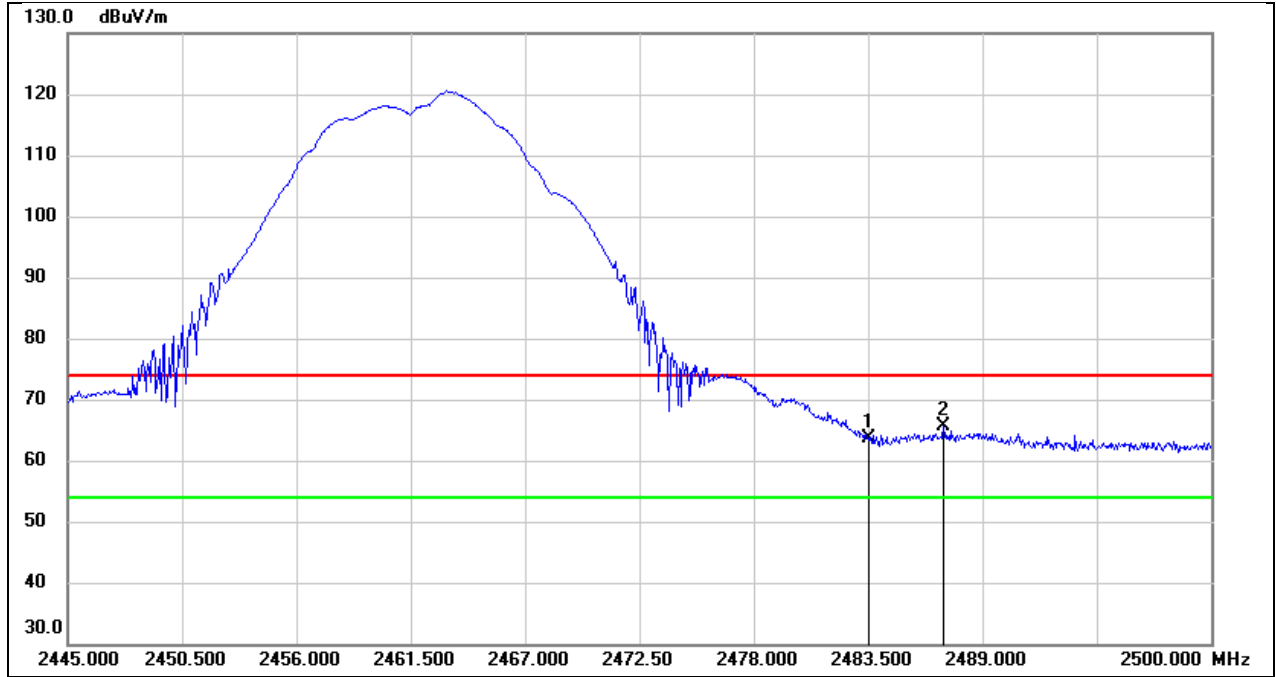


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.27	32.44	63.71	74.00	-10.29	peak
2	2487.130	33.14	32.45	65.59	74.00	-8.41	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

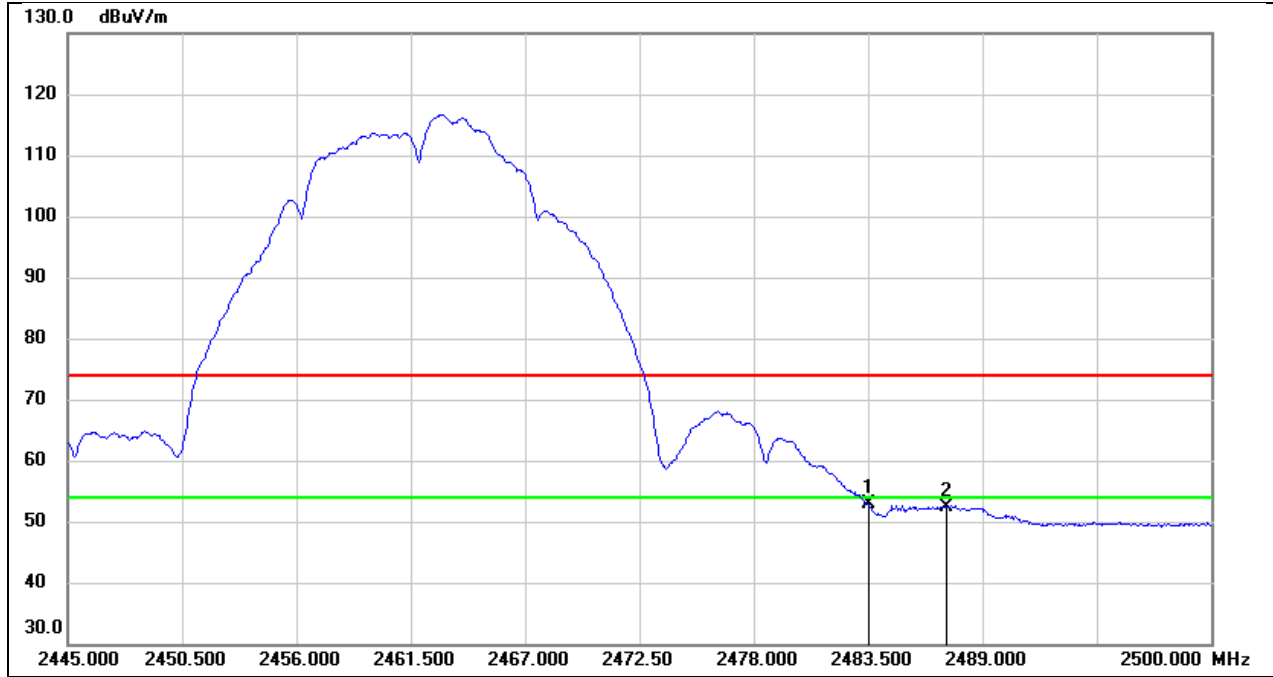


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.50	32.44	52.94	54.00	-1.06	AVG
2	2487.310	20.00	32.45	52.45	54.00	-1.55	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

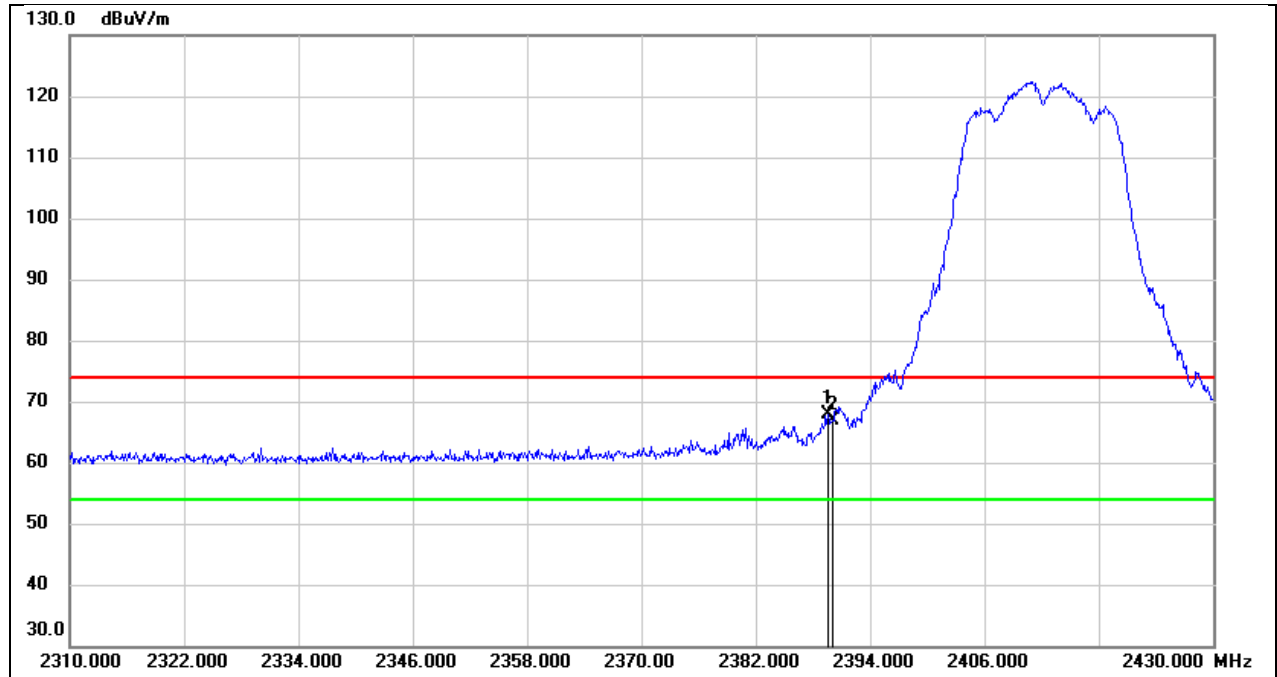


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	35.67	32.16	67.83	74.00	-6.17	peak
2	2390.000	34.64	32.16	66.80	74.00	-7.20	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

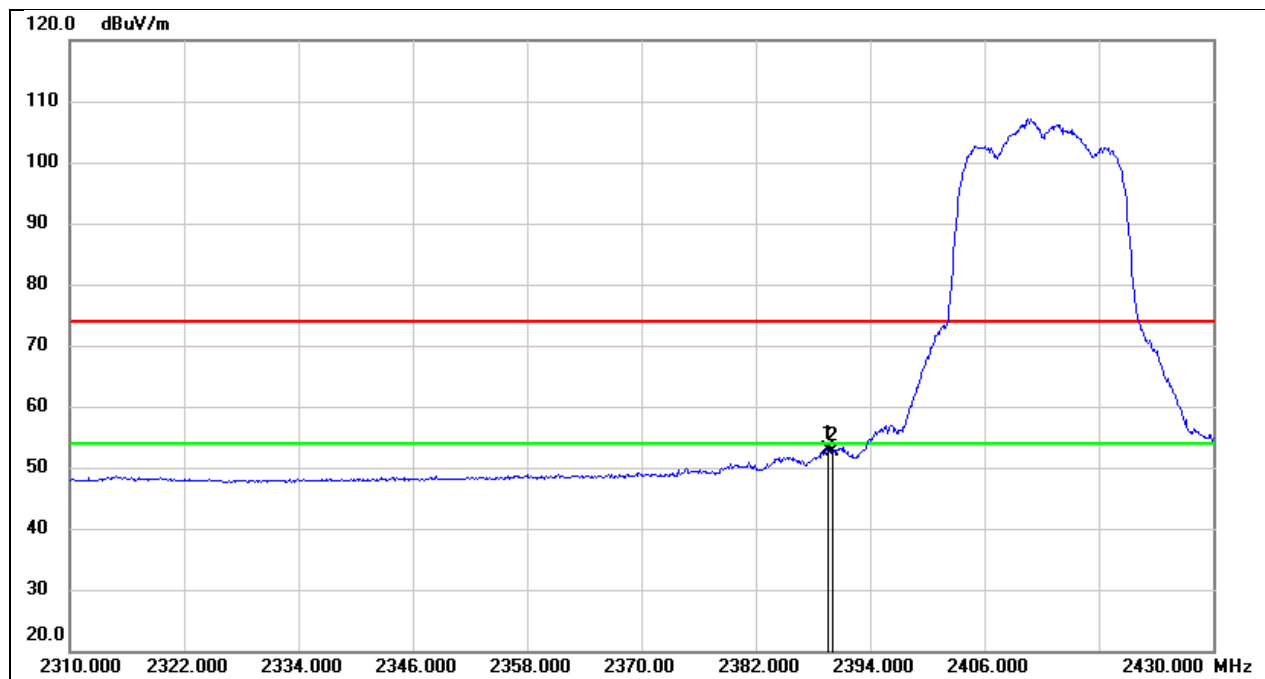


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	20.63	32.16	52.79	54.00	-1.21	AVG
2	2390.000	20.56	32.16	52.72	54.00	-1.28	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

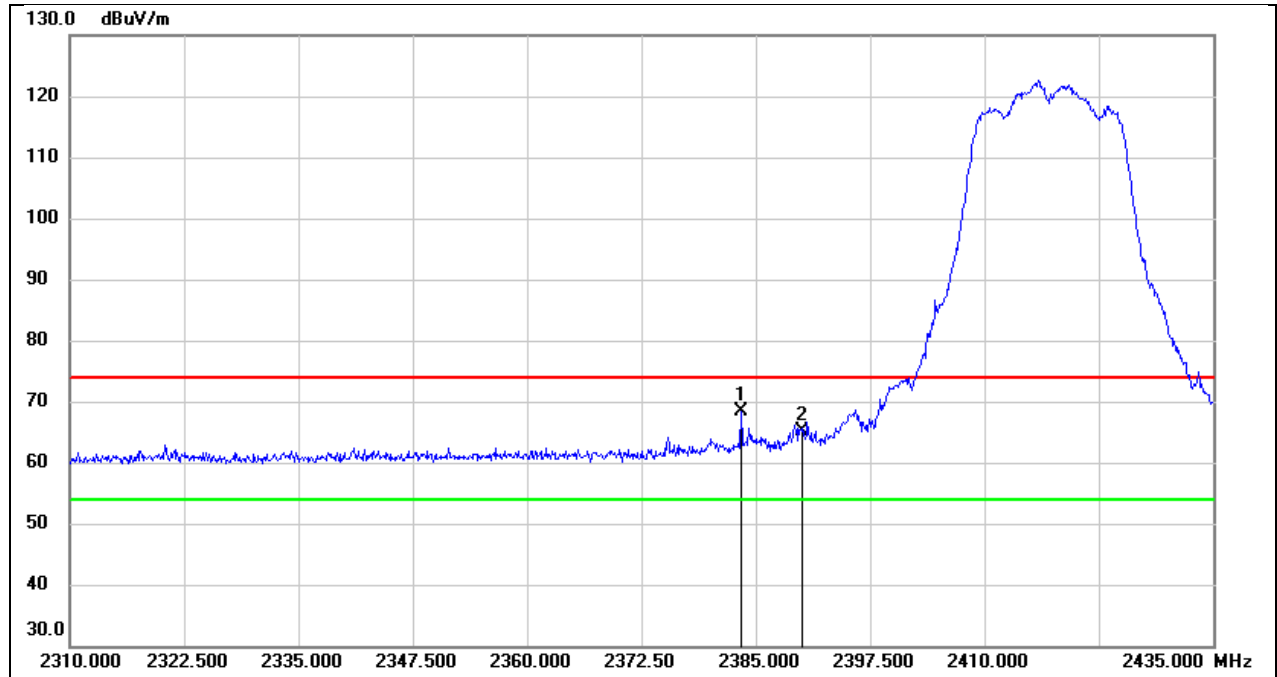


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.375	36.29	32.14	68.43	74.00	-5.57	peak
2	2390.000	32.88	32.16	65.04	74.00	-8.96	peak

Test Mode:	802.11g AV	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

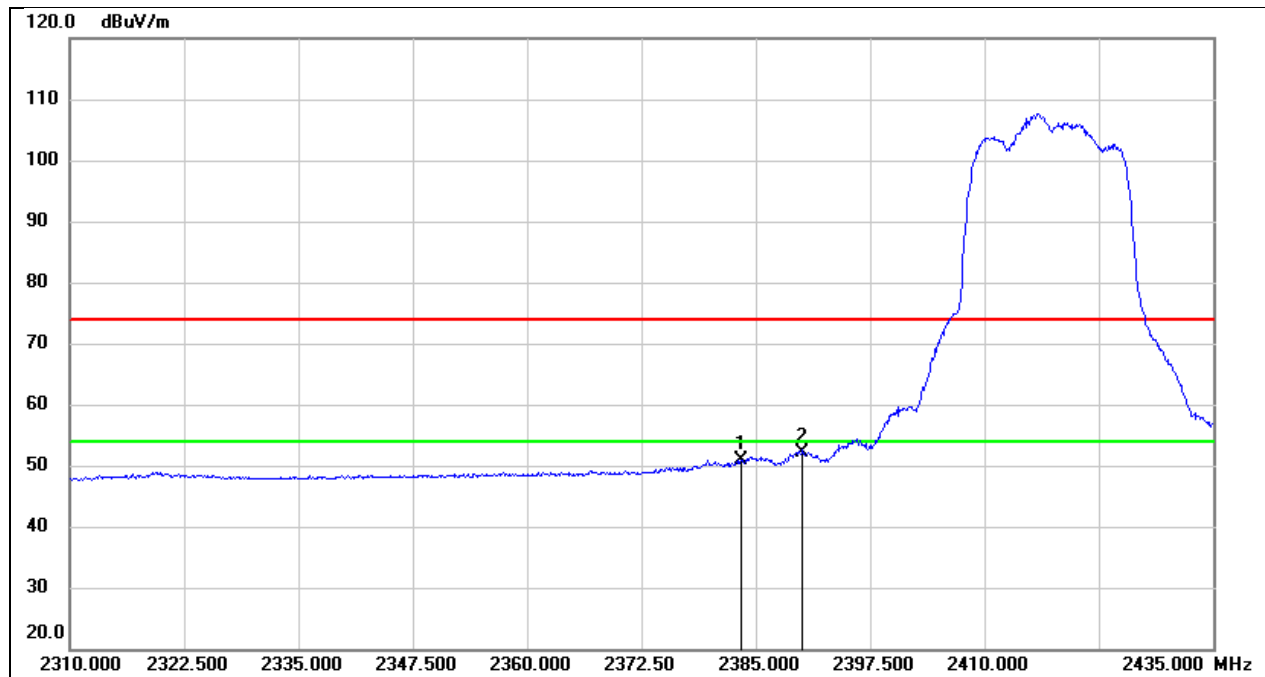


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.375	18.66	32.14	50.80	54.00	-3.20	AVG
2	2390.000	20.06	32.16	52.22	54.00	-1.78	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

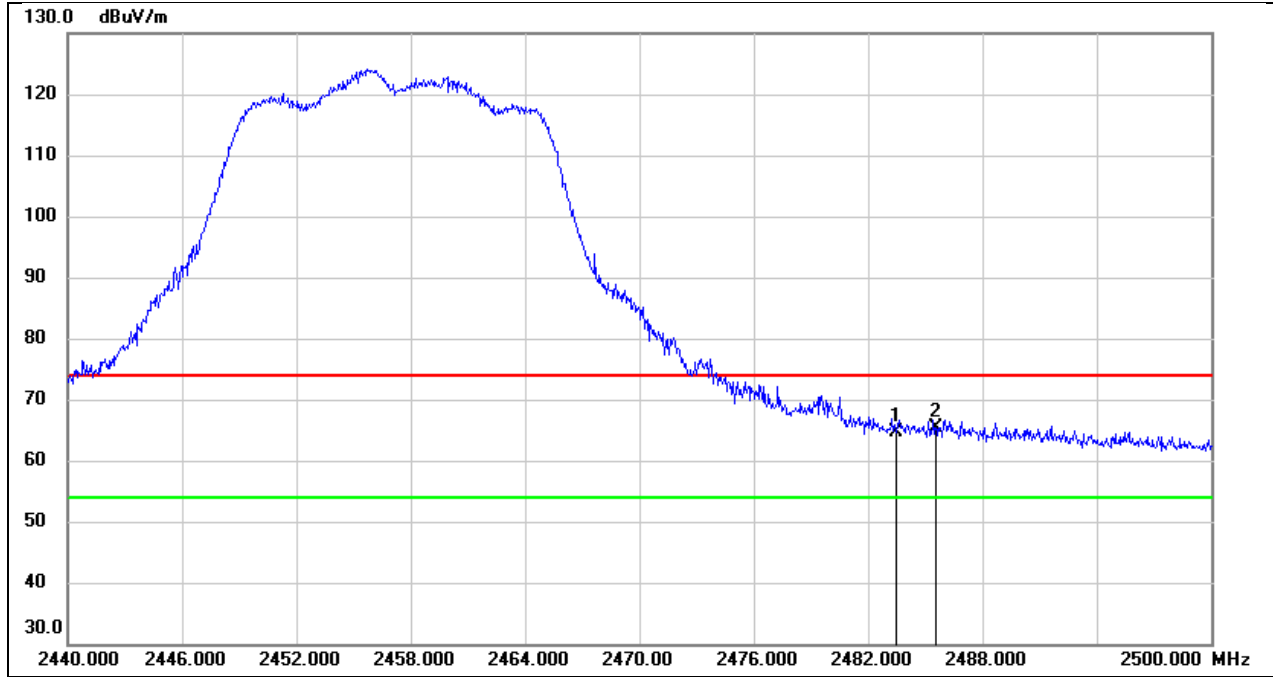


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.23	32.44	64.67	74.00	-9.33	peak
2	2485.540	32.98	32.44	65.42	74.00	-8.58	peak

Test Mode:	802.11g AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

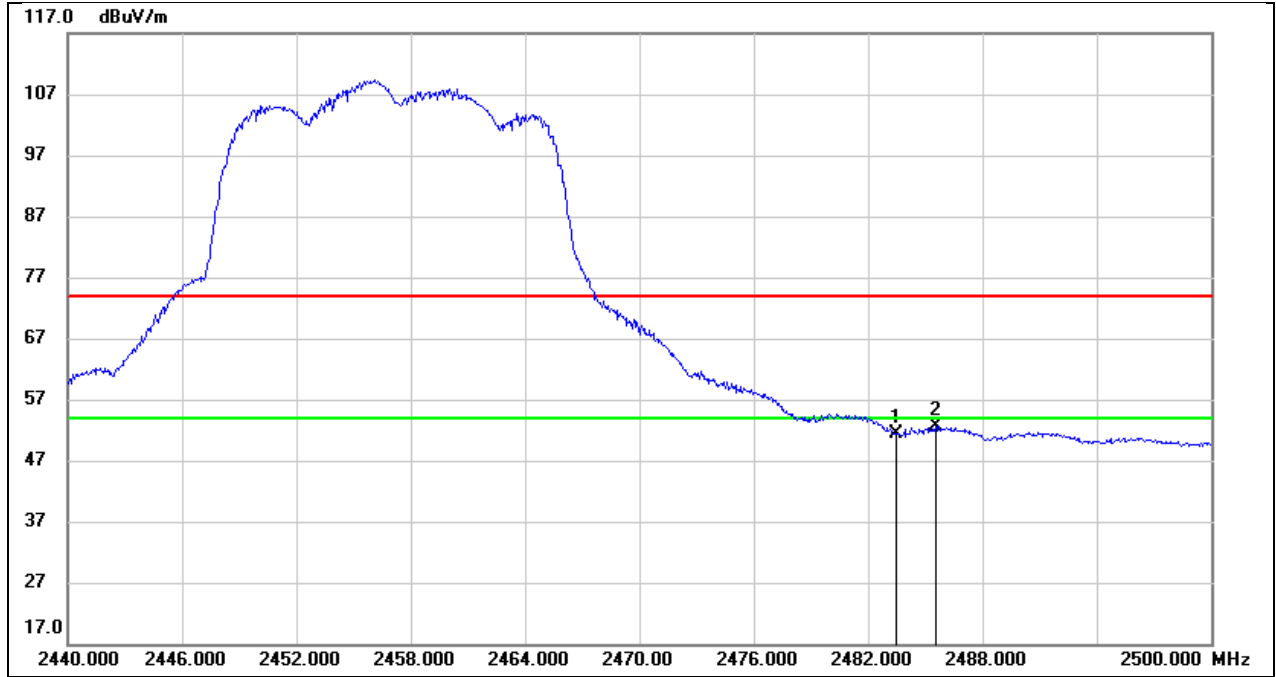


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.92	32.44	51.36	54.00	-2.64	AVG
2	2485.540	20.27	32.44	52.71	54.00	-1.29	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

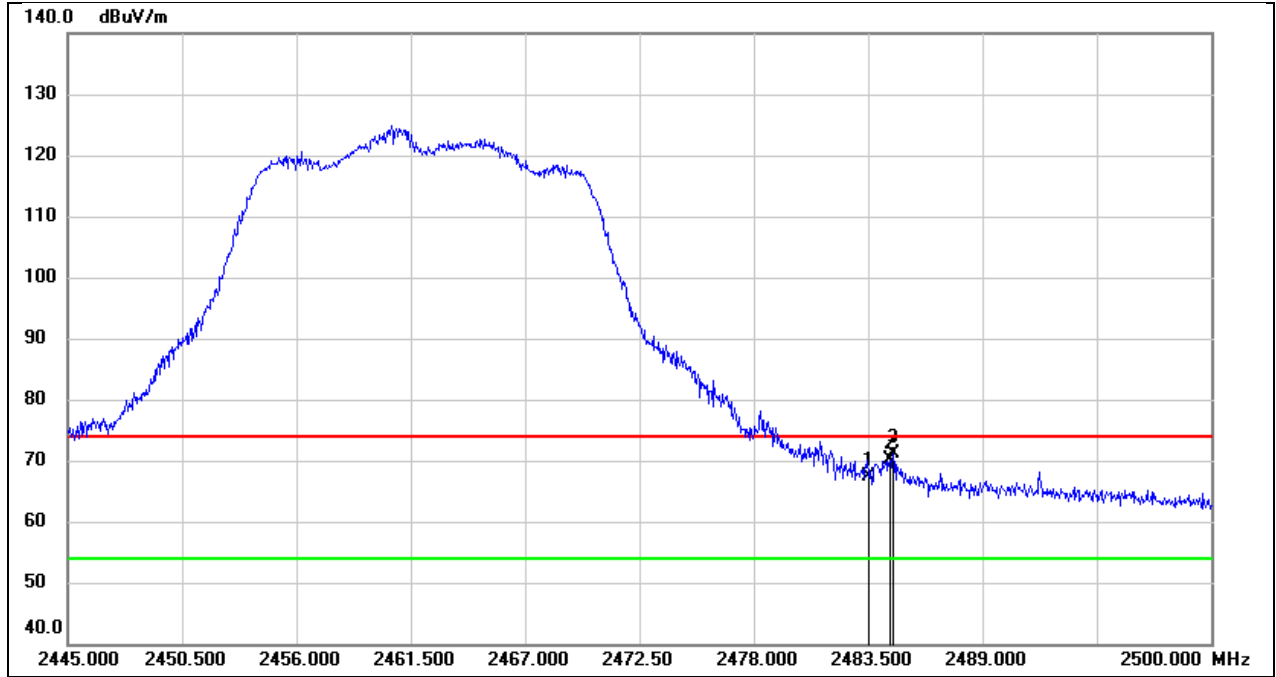


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.90	32.44	67.34	74.00	-6.66	peak
2	2484.545	37.64	32.44	70.08	74.00	-3.92	peak
3	2484.710	38.58	32.44	71.02	74.00	-2.98	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

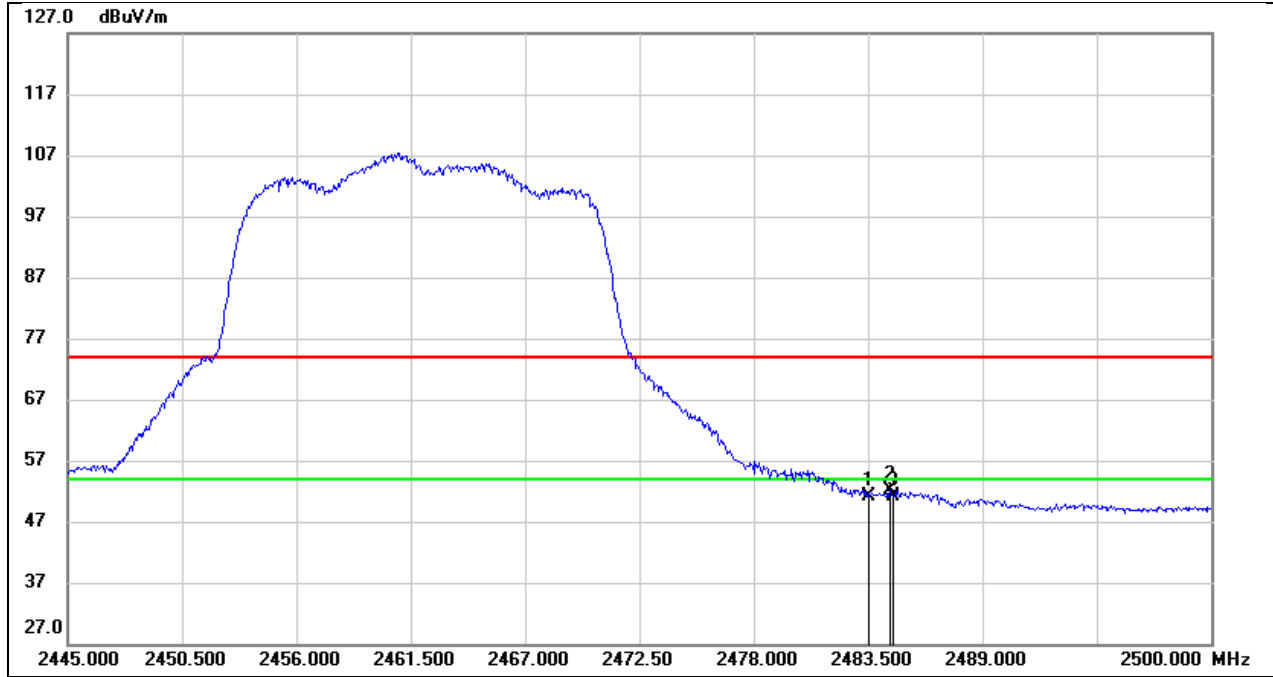


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.80	32.44	51.24	54.00	-2.76	AVG
2	2484.545	19.64	32.44	52.08	54.00	-1.92	AVG
3	2484.710	18.65	32.44	51.09	54.00	-2.91	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

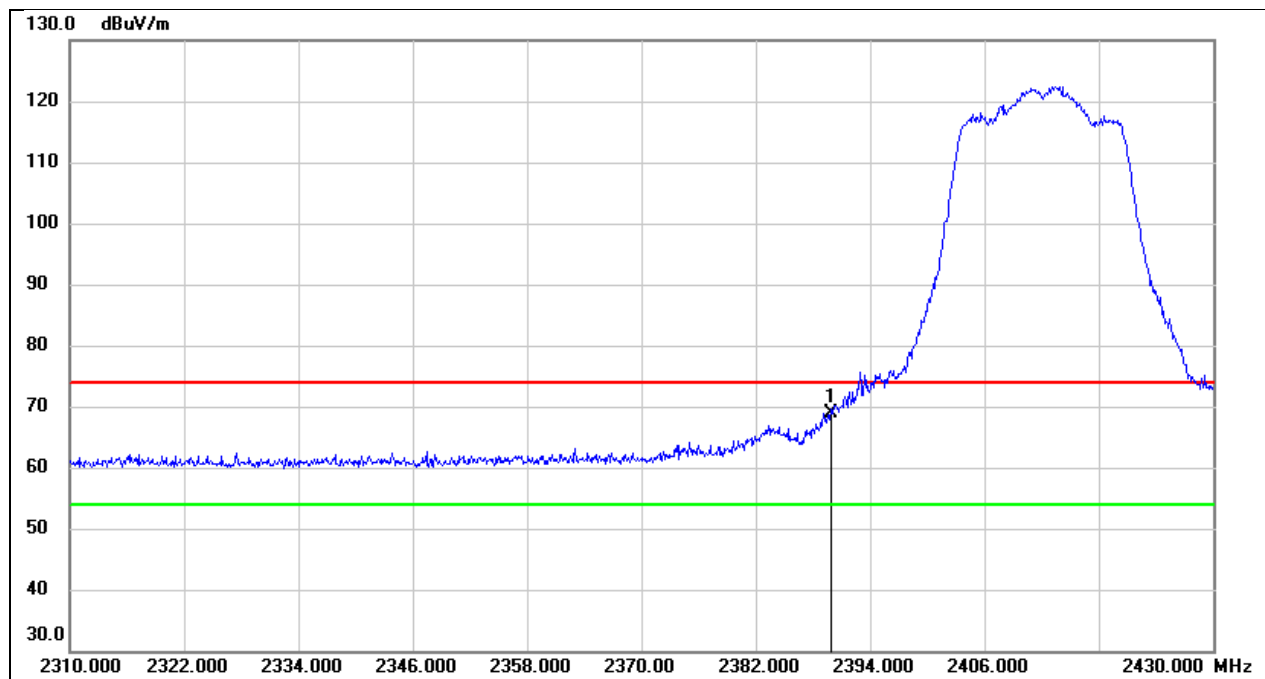


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	36.81	32.16	68.97	74.00	-5.03	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

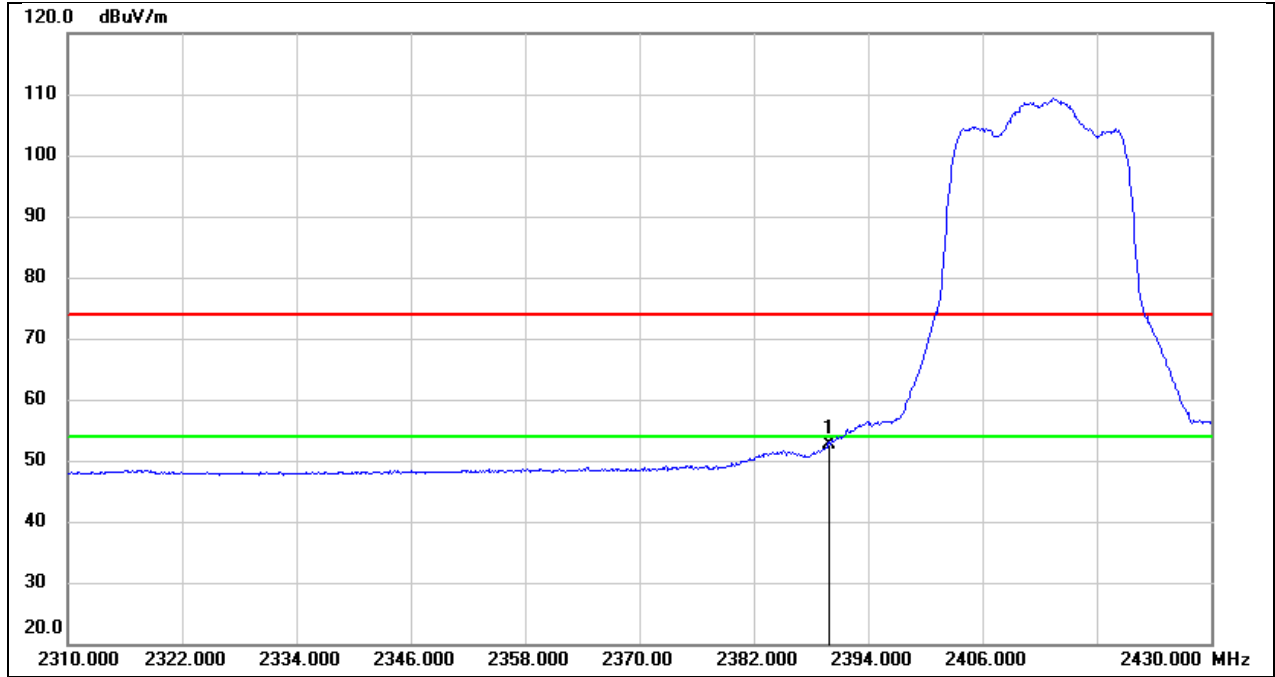


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	20.58	32.16	52.74	54.00	-1.26	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

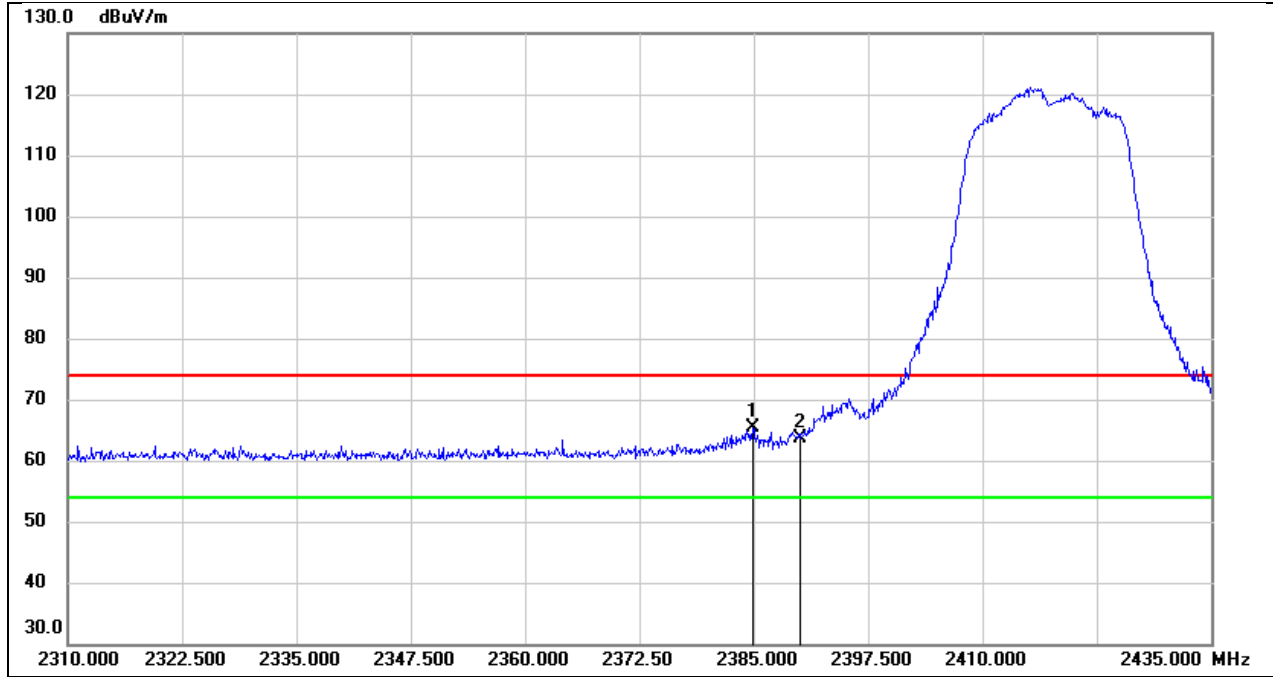


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.875	33.36	32.14	65.50	74.00	-8.50	peak
2	2390.000	31.51	32.16	63.67	74.00	-10.33	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

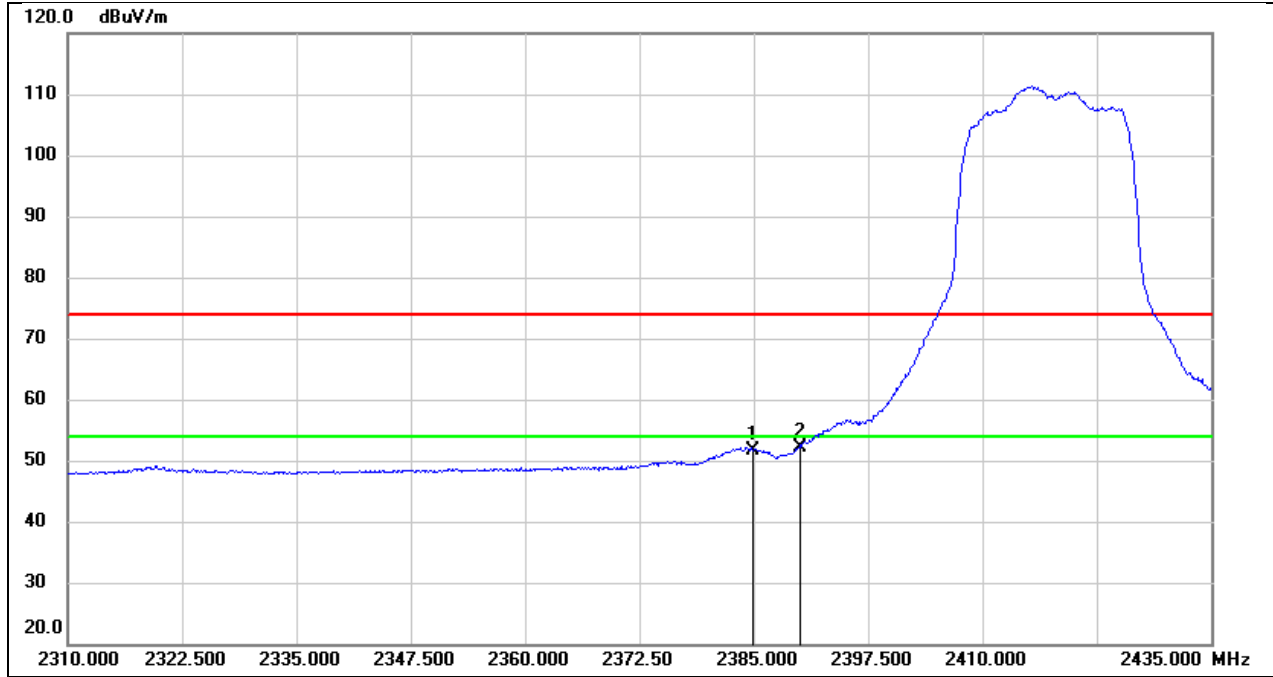


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.875	19.50	32.14	51.64	54.00	-2.36	AVG
2	2390.000	19.85	32.16	52.01	54.00	-1.99	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

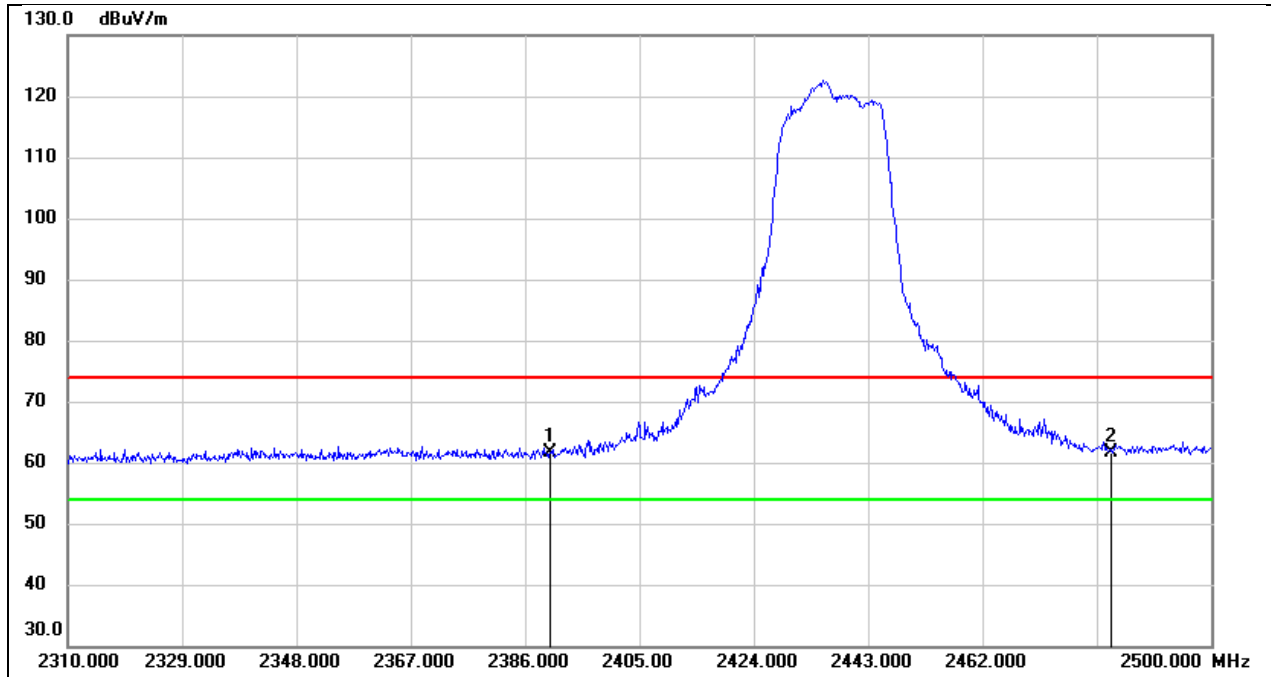


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.46	32.16	61.62	74.00	-12.38	peak
2	2483.500	29.24	32.44	61.68	74.00	-12.32	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

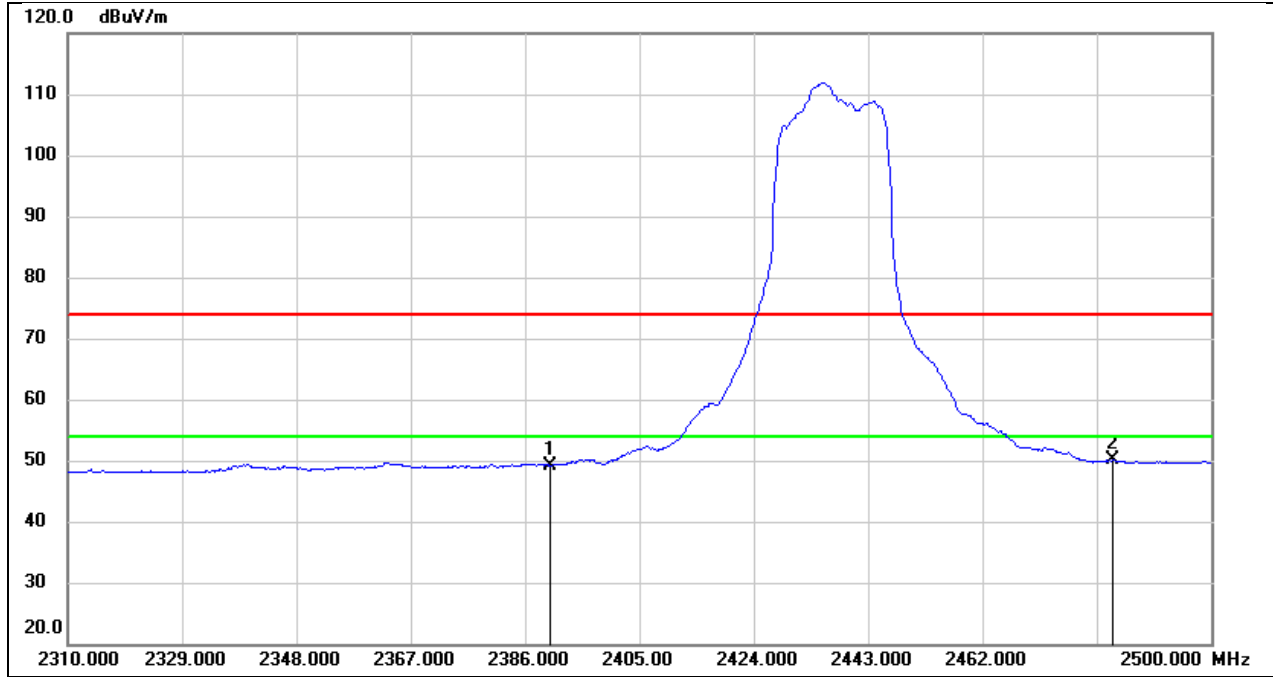


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	17.03	32.16	49.19	54.00	-4.81	AVG
2	2483.500	17.65	32.44	50.09	54.00	-3.91	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

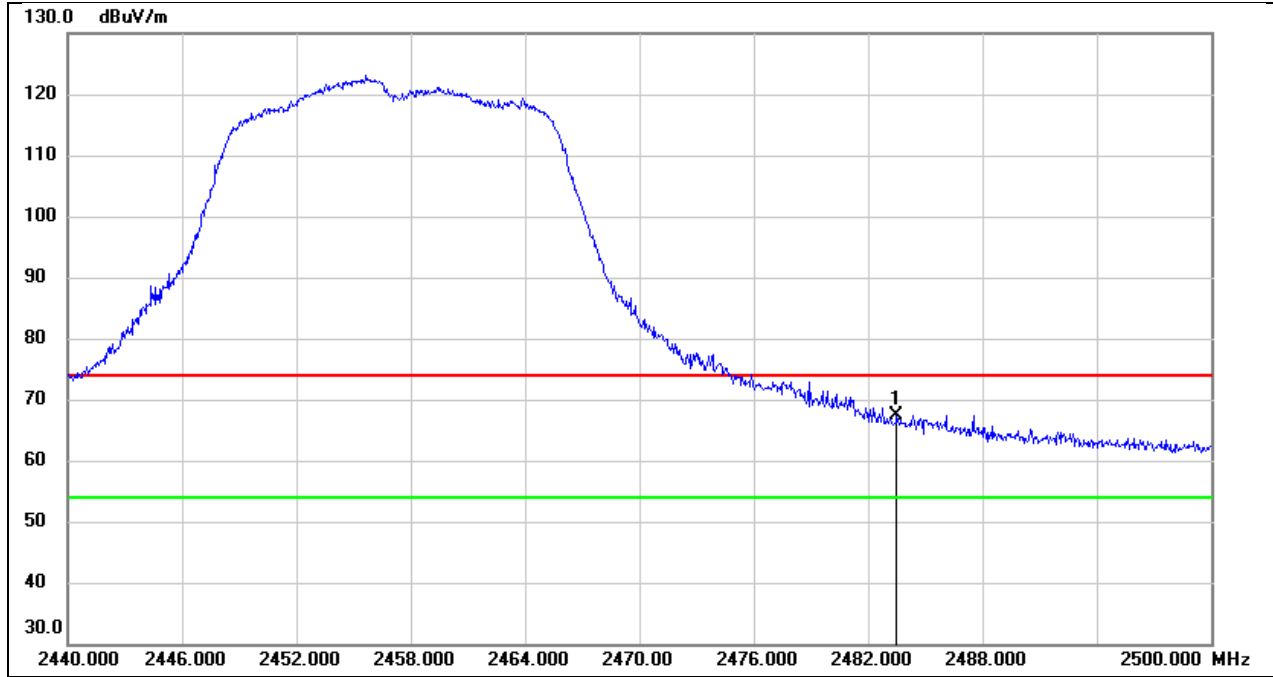


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	34.83	32.44	67.27	74.00	-6.73	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

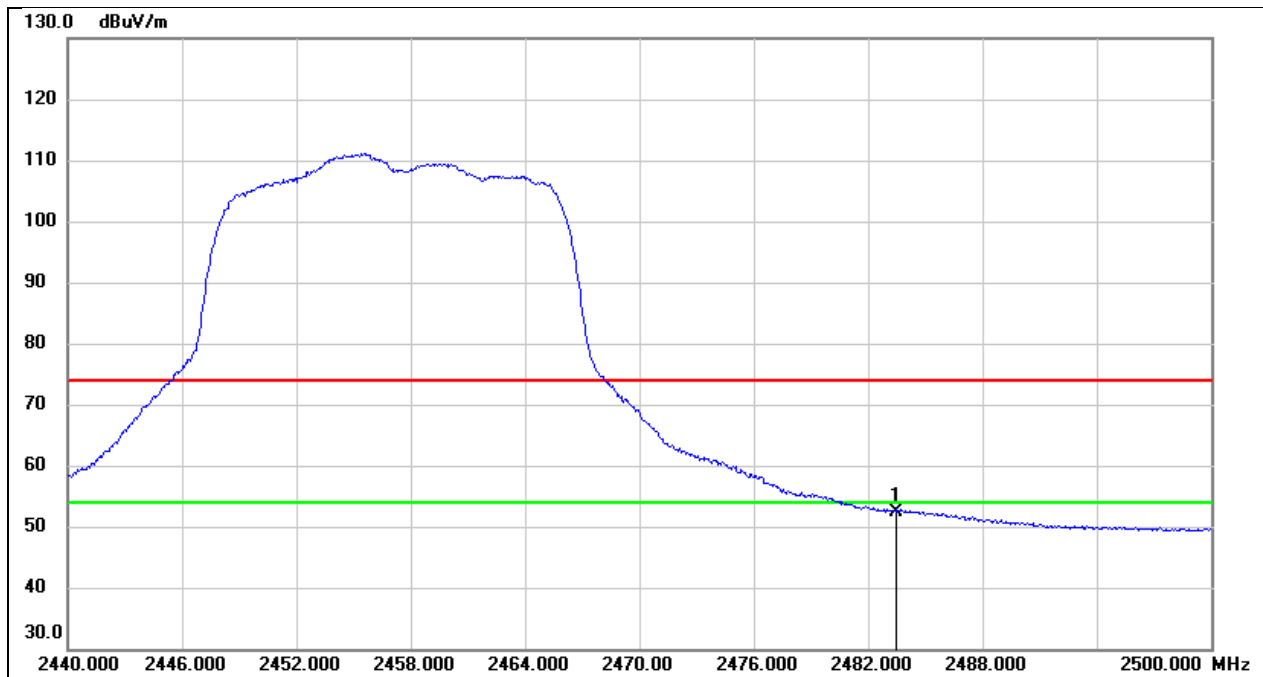


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.04	32.44	52.48	54.00	-1.52	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

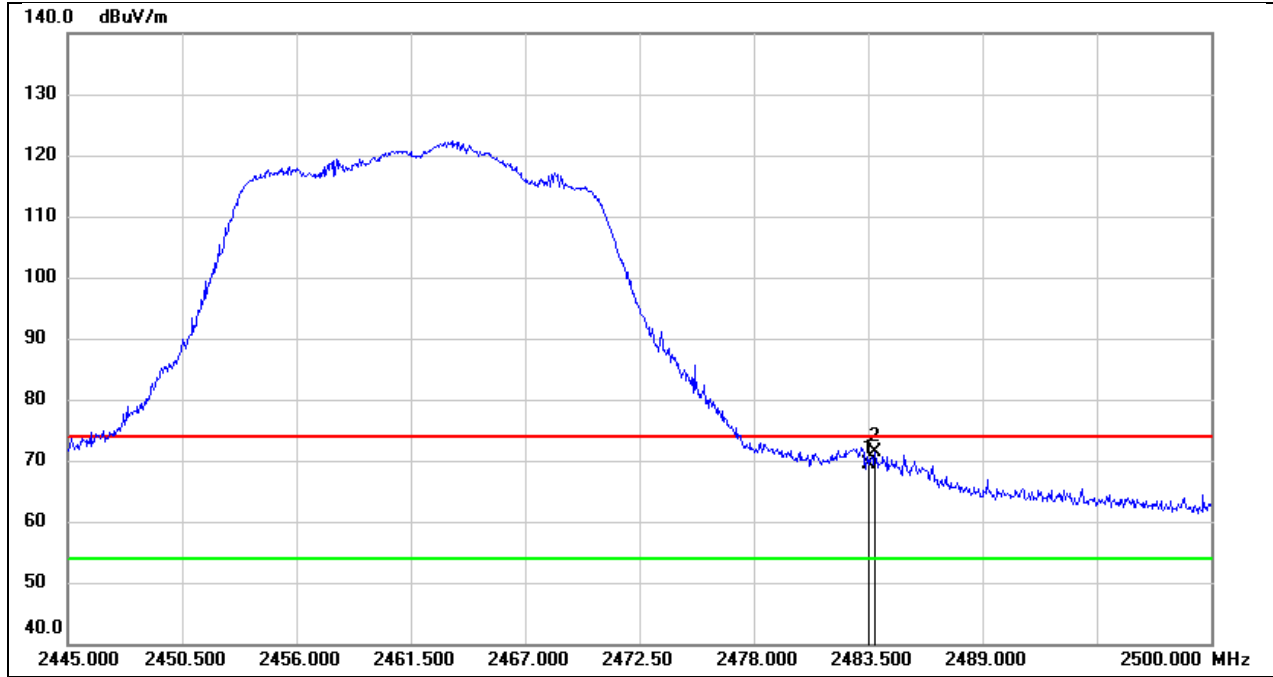


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.84	32.44	69.28	74.00	-4.72	peak
2	2483.830	38.84	32.44	71.28	74.00	-2.72	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

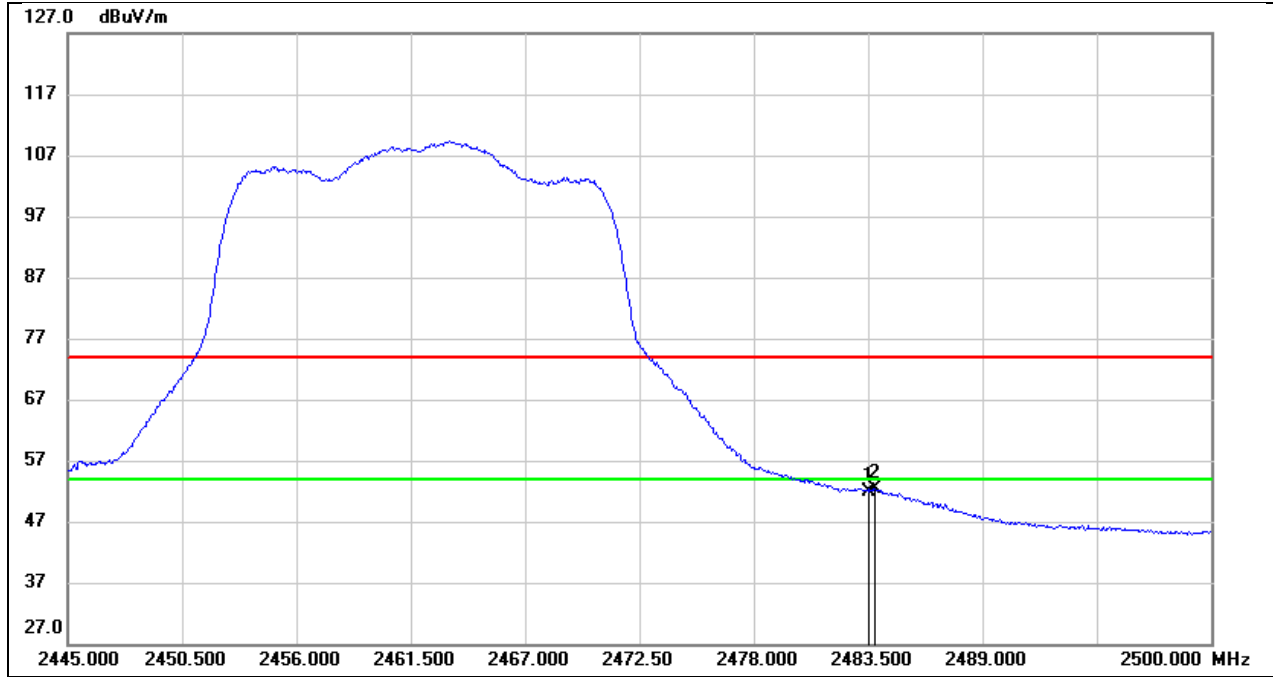


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.54	32.44	51.98	54.00	-2.02	AVG
2	2483.830	20.06	32.44	52.50	54.00	-1.50	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

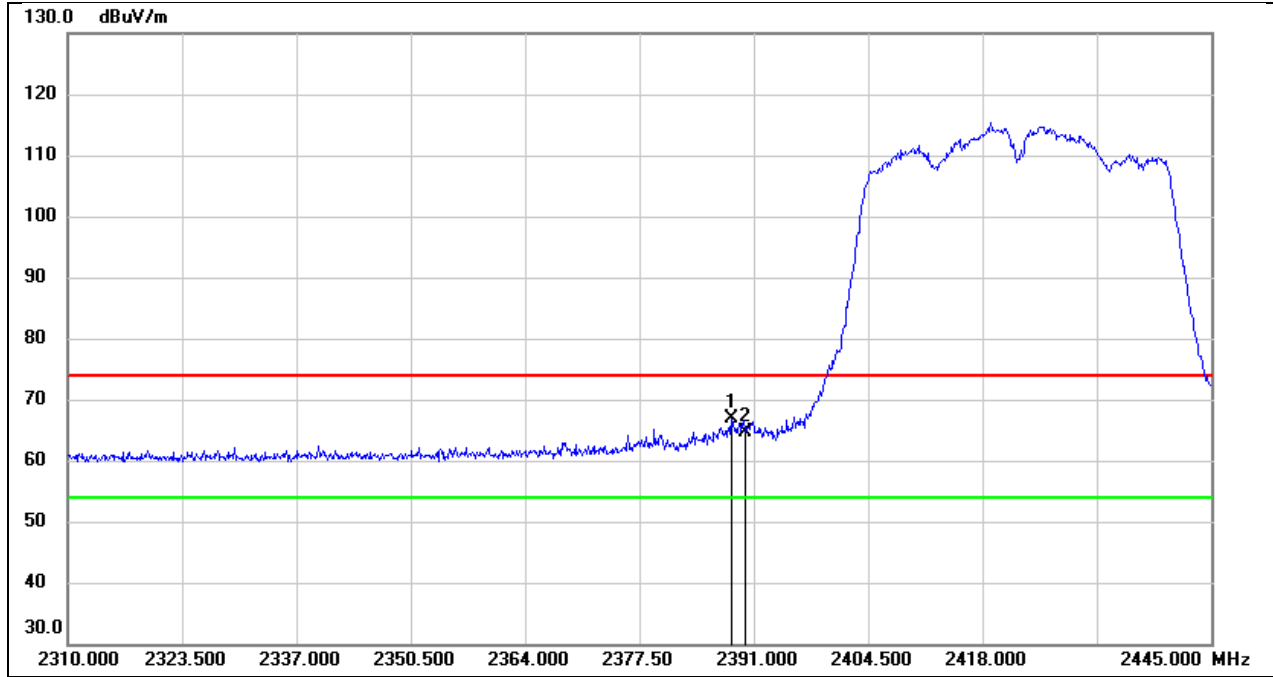


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	34.81	32.16	66.97	74.00	-7.03	peak
2	2390.000	32.59	32.16	64.75	74.00	-9.25	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

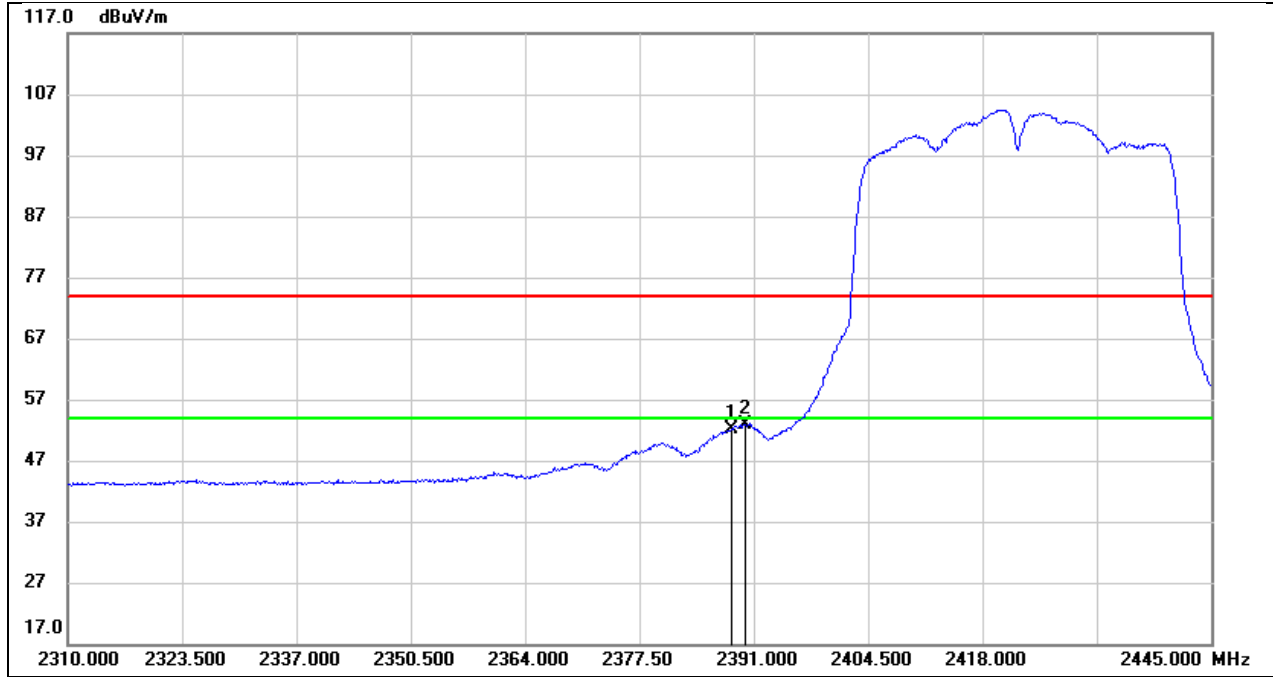


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.300	19.90	32.16	52.06	54.00	-1.94	AVG
2	2390.000	20.67	32.16	52.83	54.00	-1.17	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

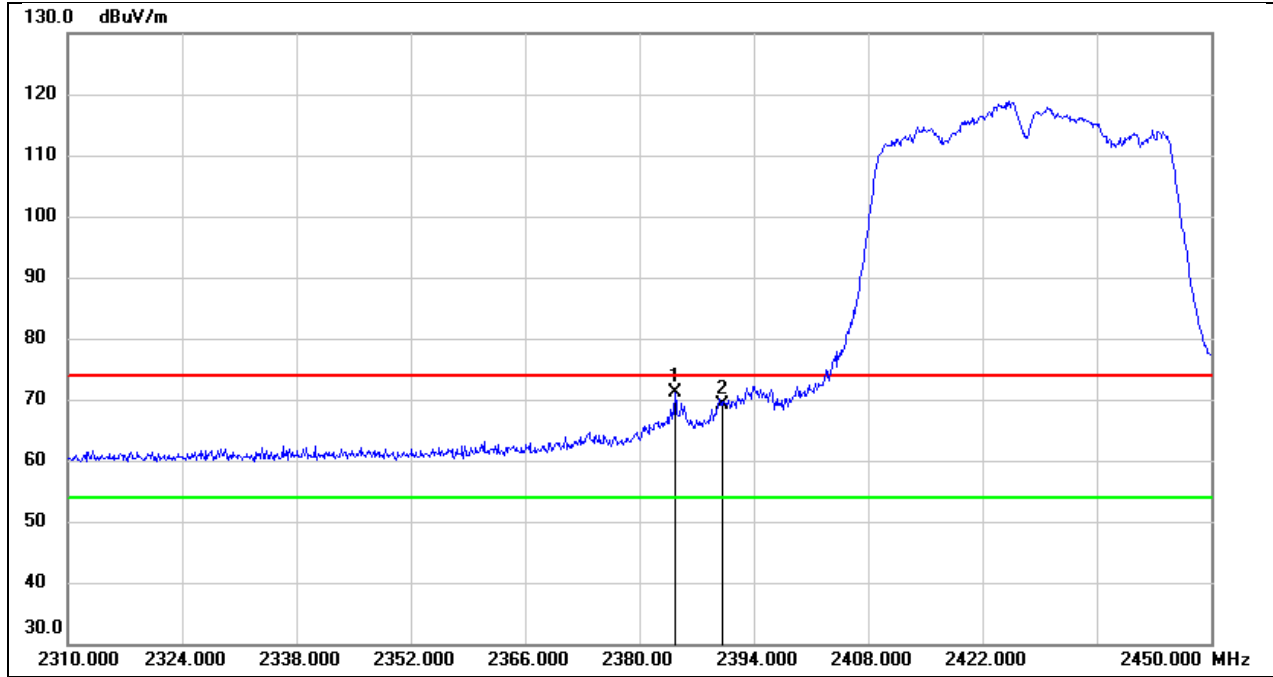


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.340	39.05	32.14	71.19	74.00	-2.81	peak
2	2390.000	37.04	32.16	69.20	74.00	-4.80	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

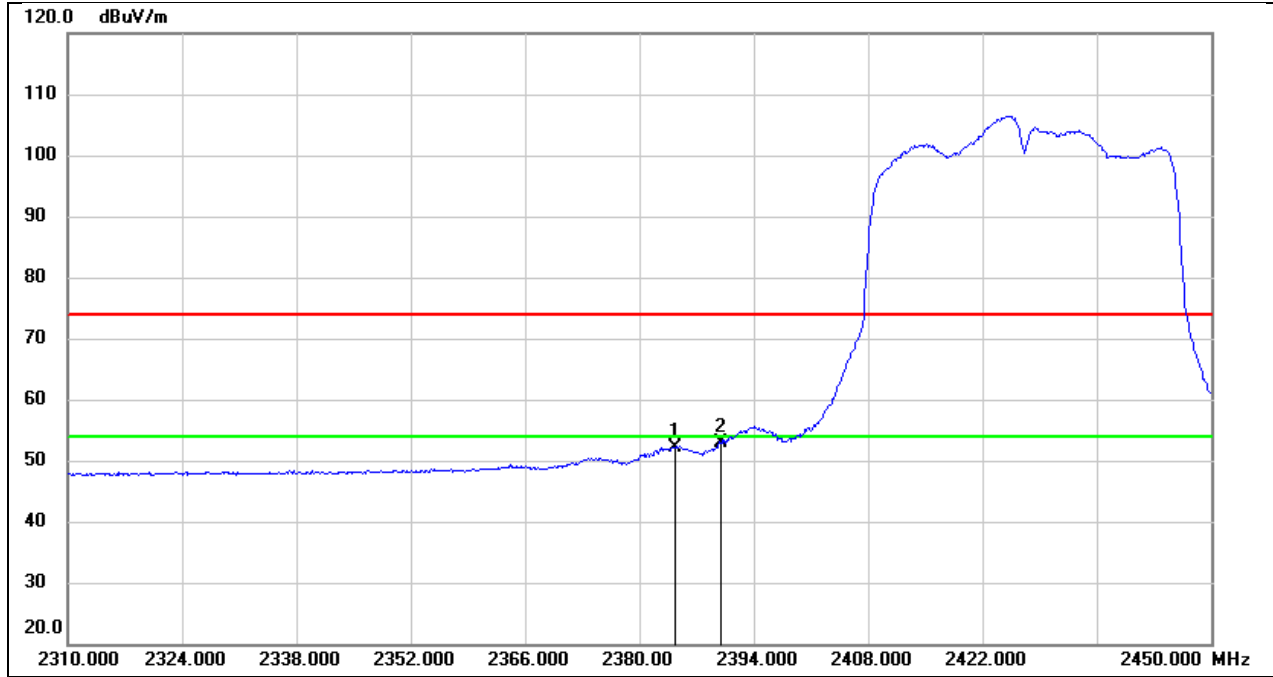


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.340	19.97	32.14	52.11	54.00	-1.89	AVG
2	2390.000	20.79	32.16	52.95	54.00	-1.05	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

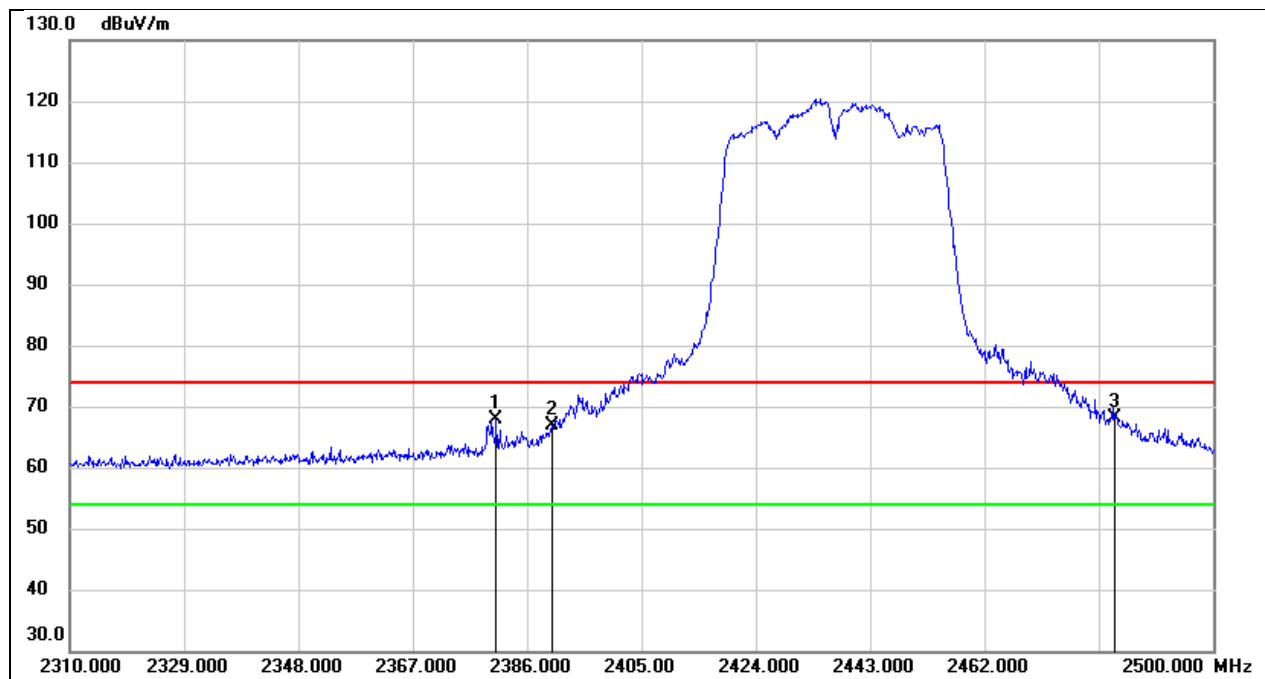


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.870	35.65	32.13	67.78	74.00	-6.22	peak
2	2390.000	34.81	32.16	66.97	74.00	-7.03	peak
3	2483.500	35.59	32.44	68.03	74.00	-5.97	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

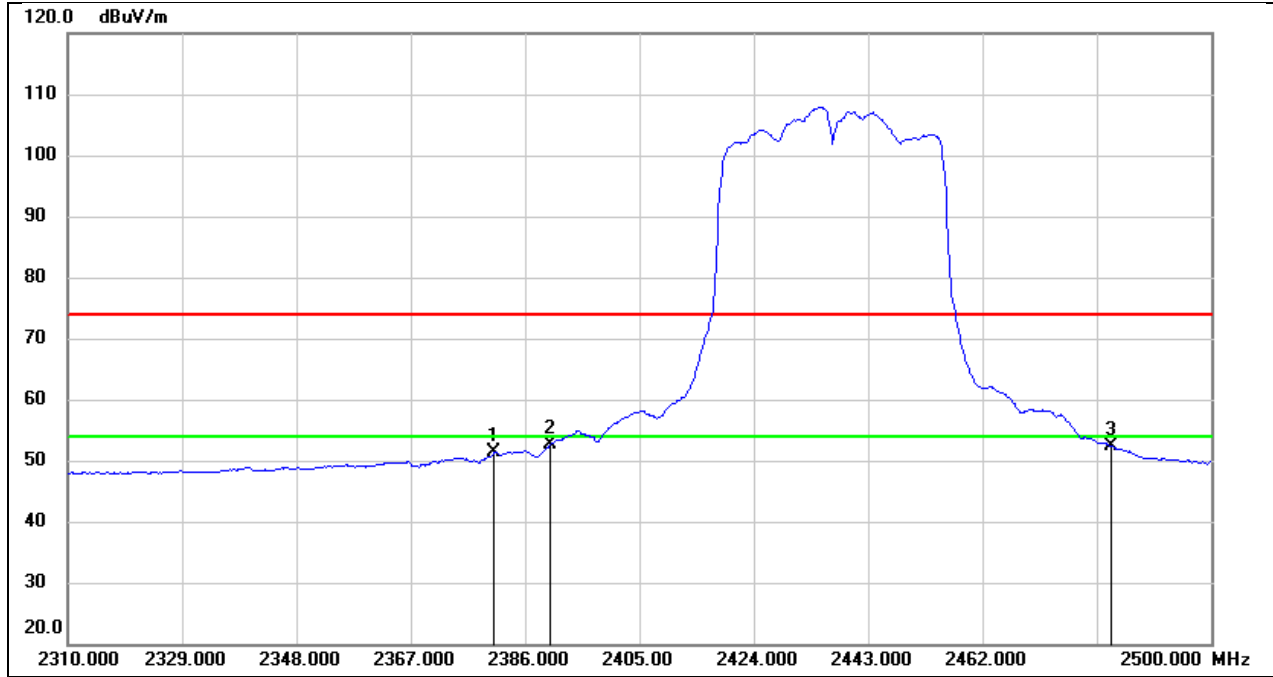


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.870	19.24	32.13	51.37	54.00	-2.63	AVG
2	2390.000	20.39	32.16	52.55	54.00	-1.45	AVG
3	2483.500	19.89	32.44	52.33	54.00	-1.67	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

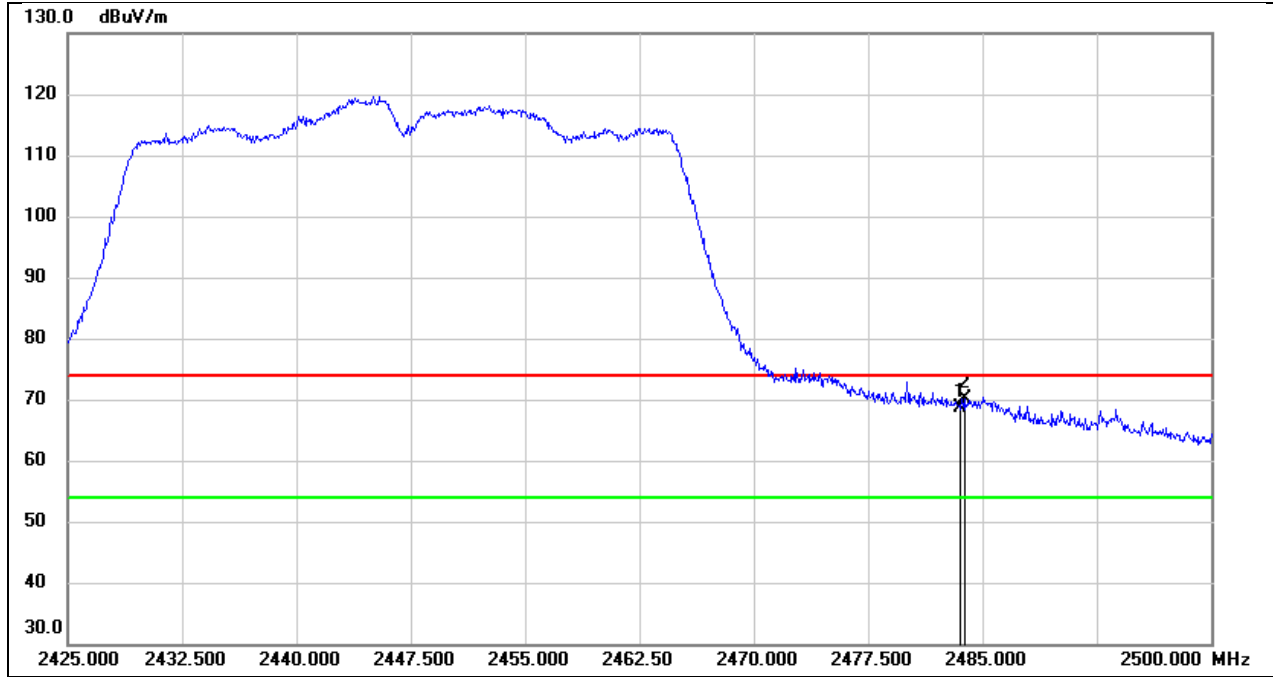


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.09	32.44	68.53	74.00	-5.47	peak
2	2483.800	37.78	32.44	70.22	74.00	-3.78	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

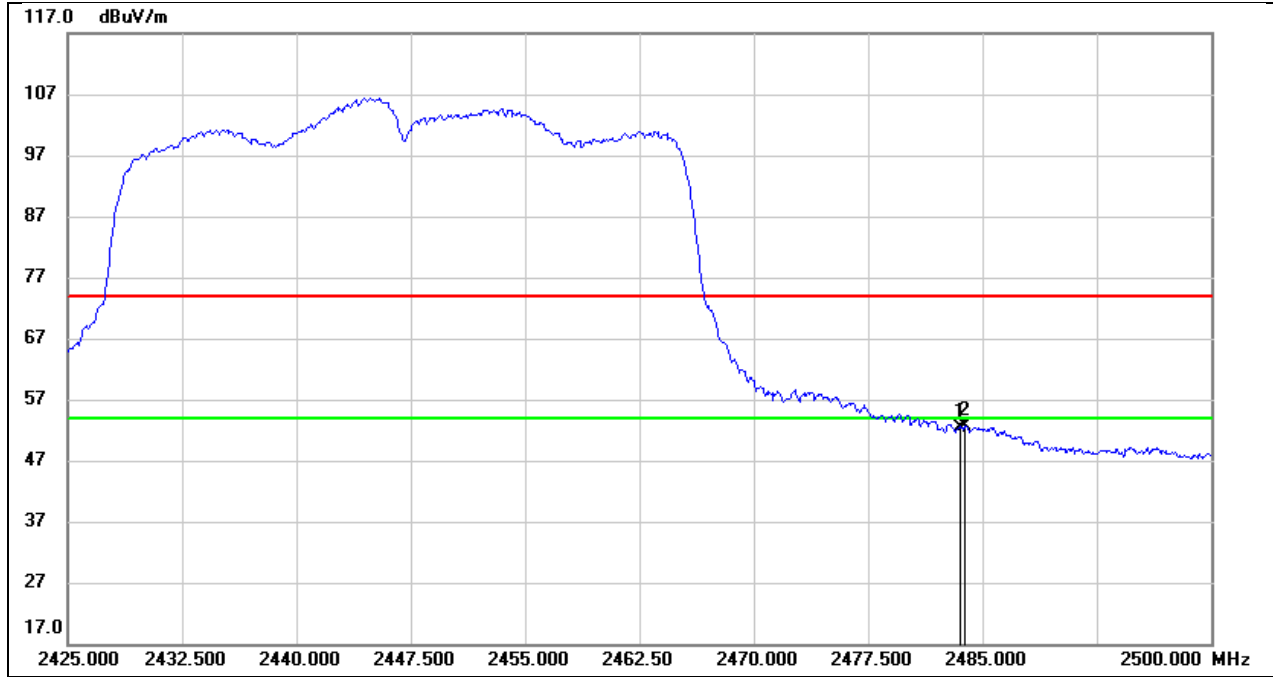


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.90	32.44	52.34	54.00	-1.66	AVG
2	2483.800	20.31	32.44	52.75	54.00	-1.25	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

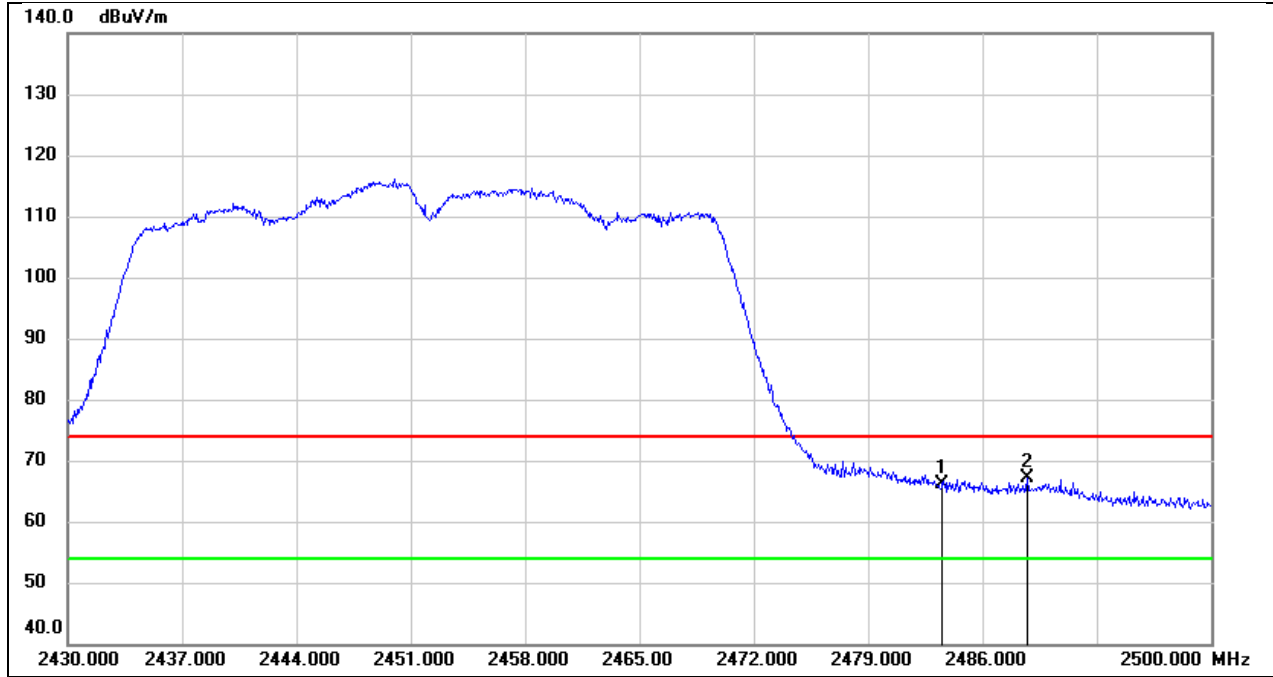


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.62	32.44	66.06	74.00	-7.94	peak
2	2488.730	34.57	32.46	67.03	74.00	-6.97	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

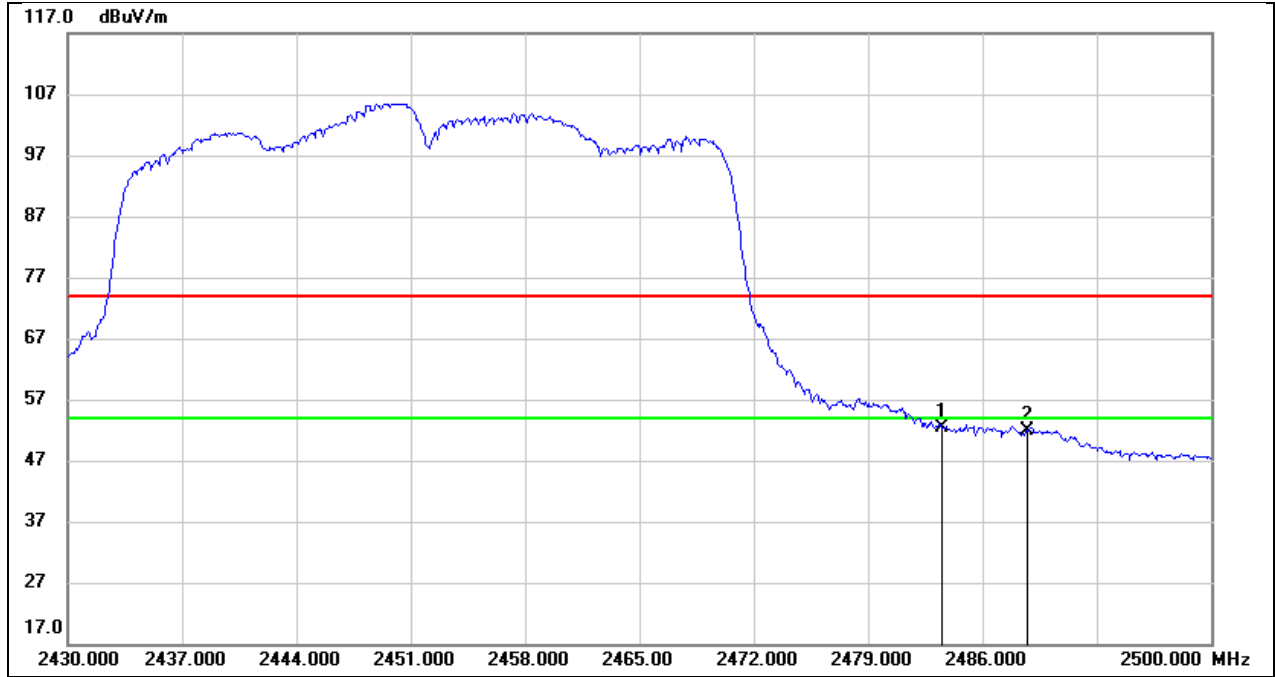


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.84	32.44	52.28	54.00	-1.72	AVG
2	2488.730	19.36	32.46	51.82	54.00	-2.18	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

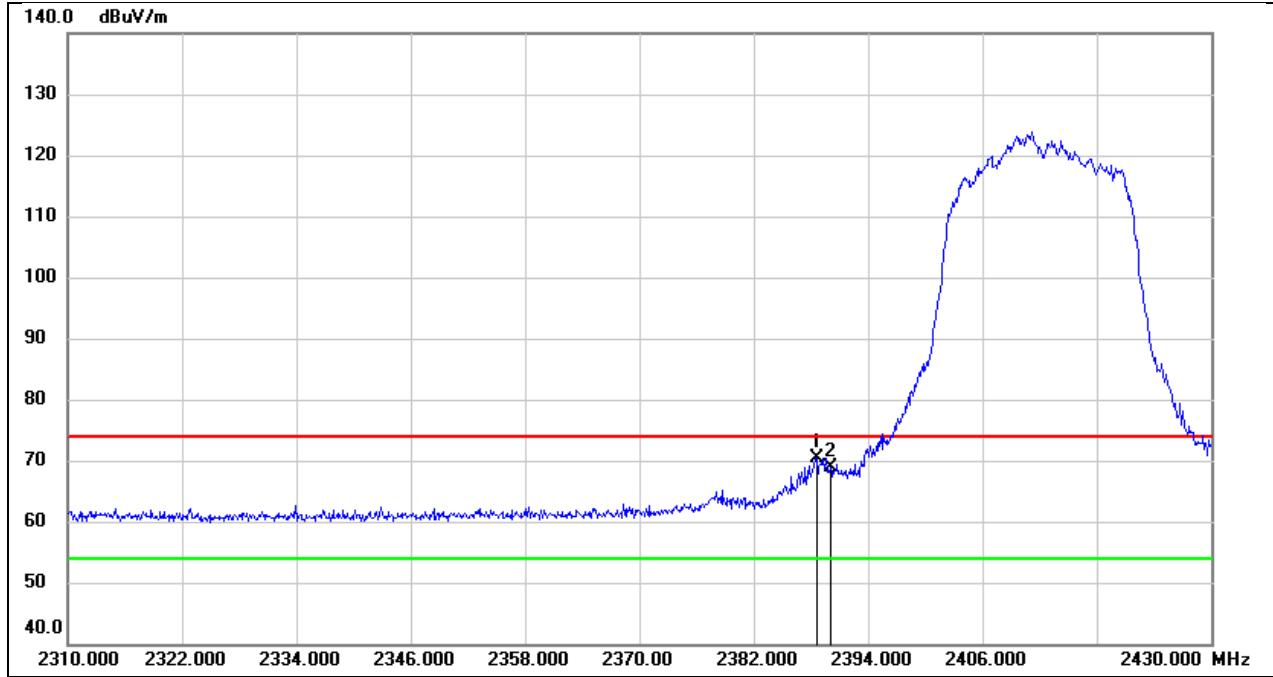


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.600	38.25	32.16	70.41	74.00	-3.59	peak
2	2390.000	36.60	32.16	68.76	74.00	-5.24	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

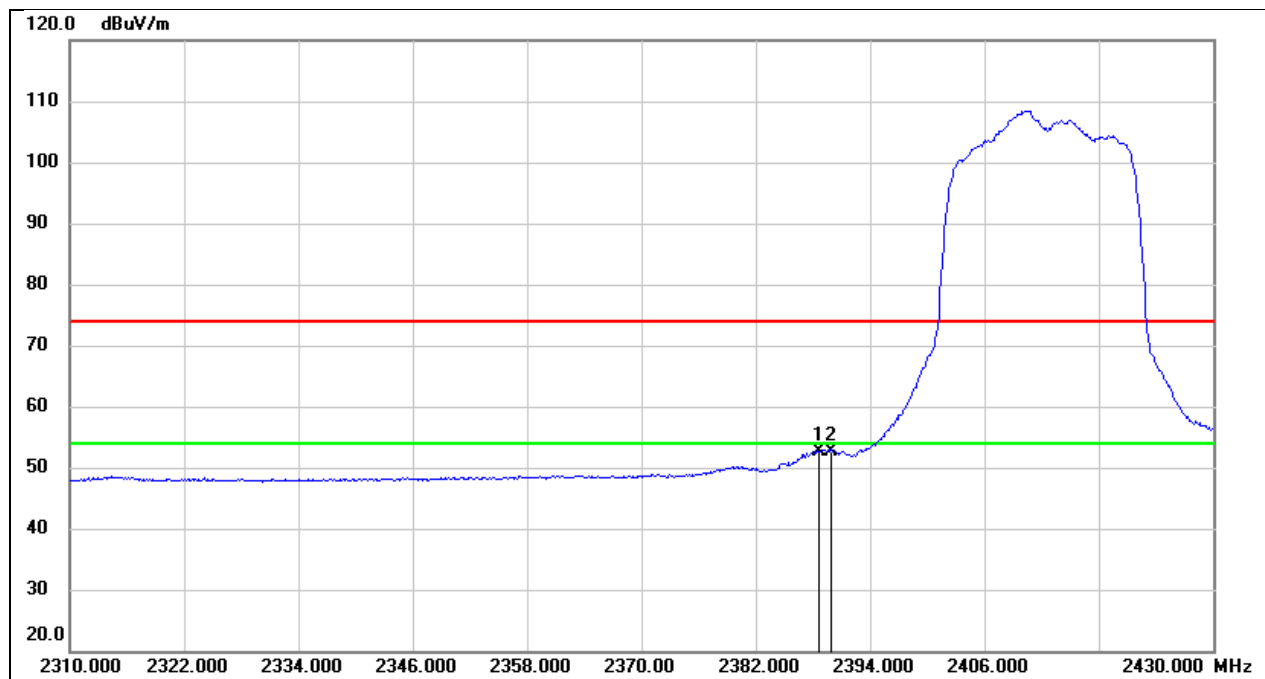


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.600	20.45	32.16	52.61	54.00	-1.39	AVG
2	2390.000	20.42	32.16	52.58	54.00	-1.42	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

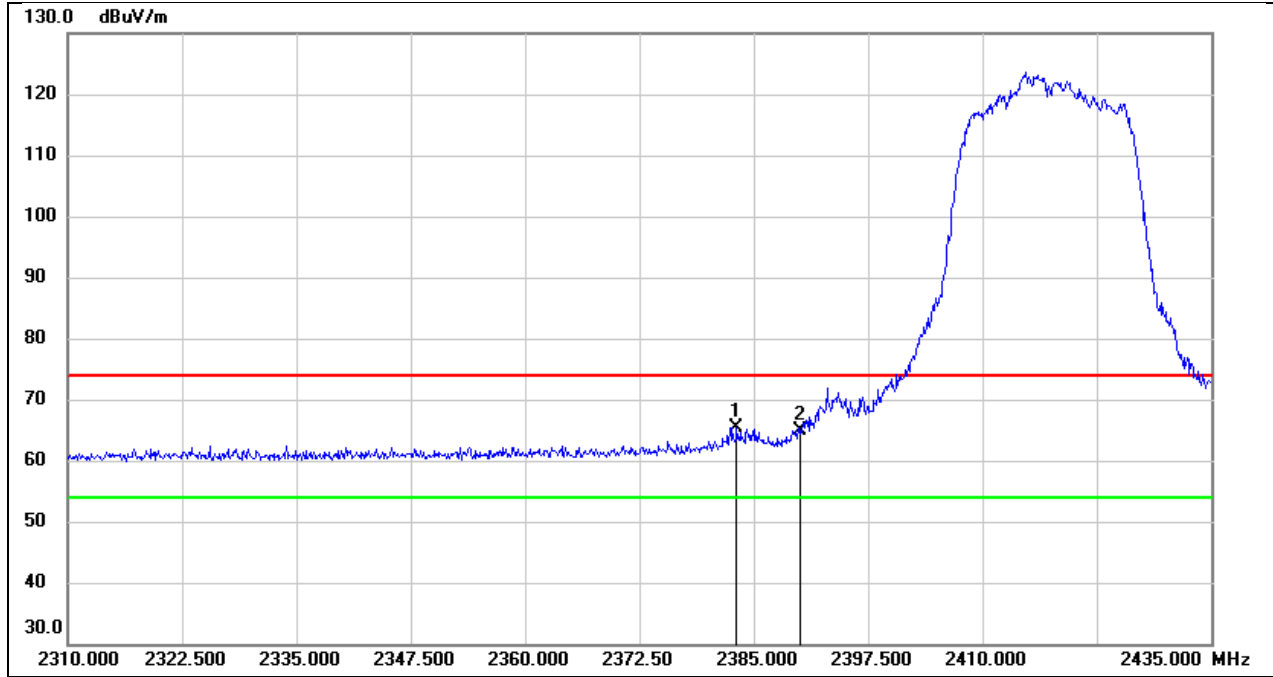


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.125	33.31	32.14	65.45	74.00	-8.55	peak
2	2390.000	32.72	32.16	64.88	74.00	-9.12	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

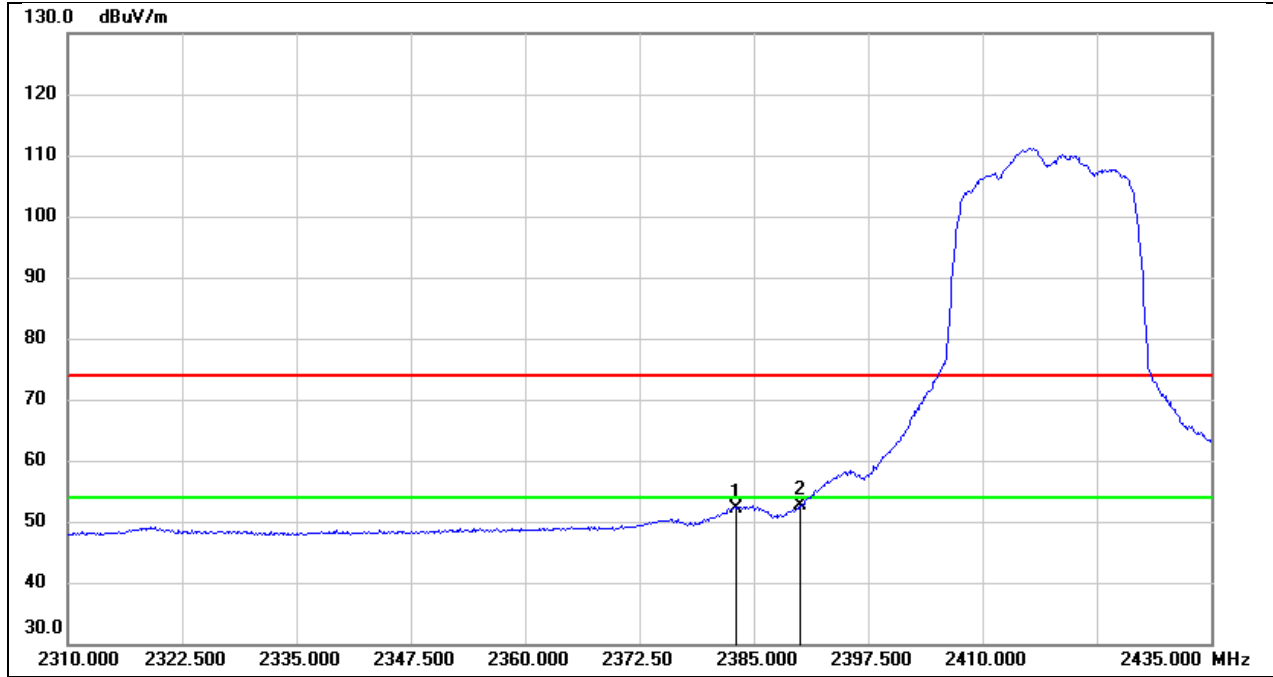


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.125	20.09	32.14	52.23	54.00	-1.77	AVG
2	2390.000	20.38	32.16	52.54	54.00	-1.46	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

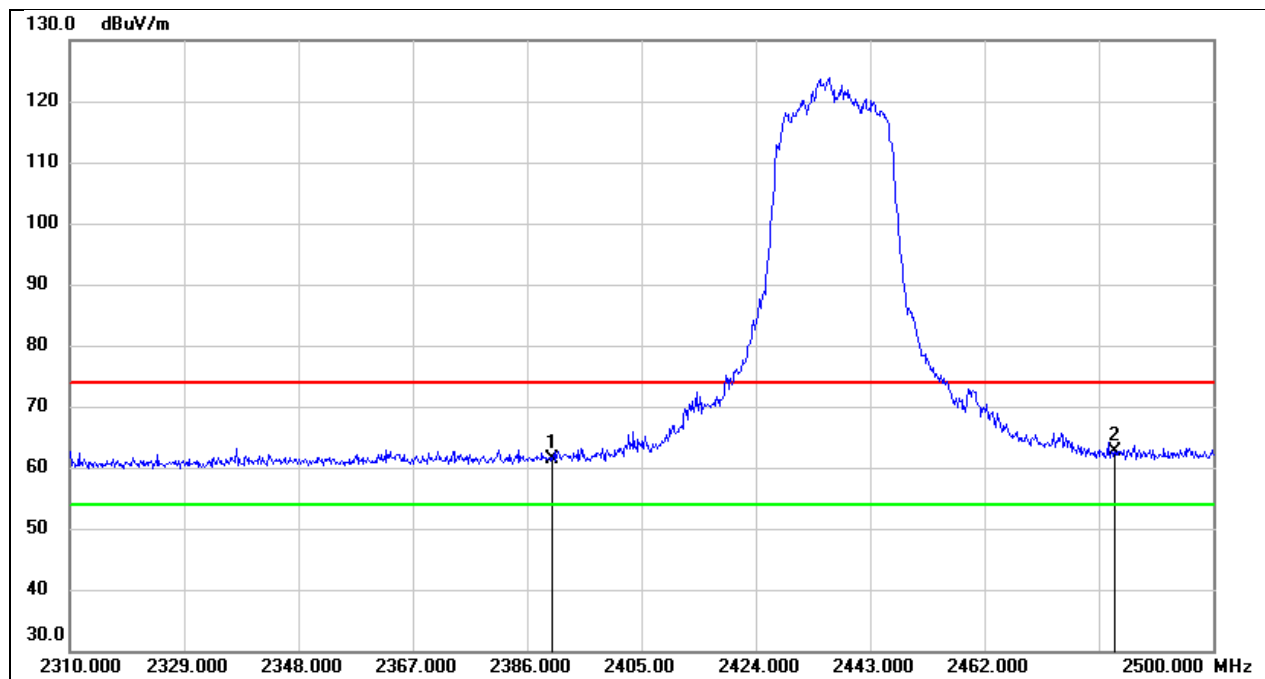


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.33	32.16	61.49	74.00	-12.51	peak
2	2483.500	30.18	32.44	62.62	74.00	-11.38	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

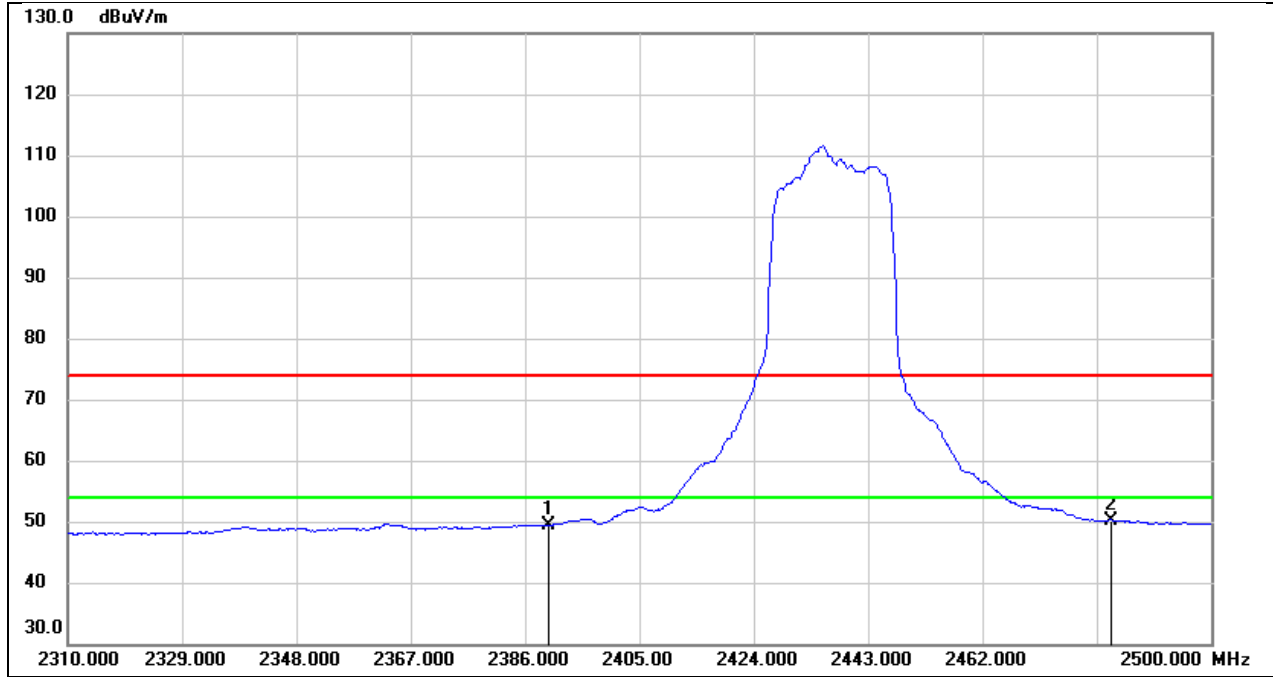


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	17.30	32.16	49.46	54.00	-4.54	AVG
2	2483.500	17.79	32.44	50.23	54.00	-3.77	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

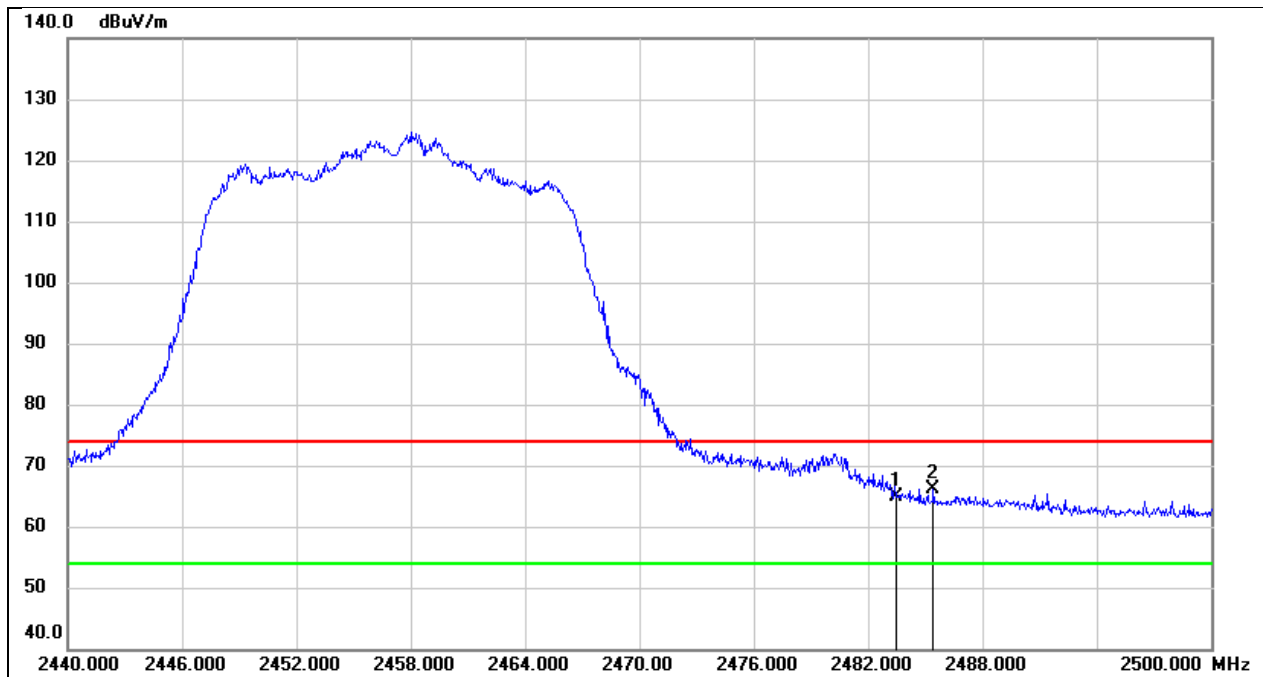


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.33	32.44	64.77	74.00	-9.23	peak
2	2485.420	33.79	32.44	66.23	74.00	-7.77	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

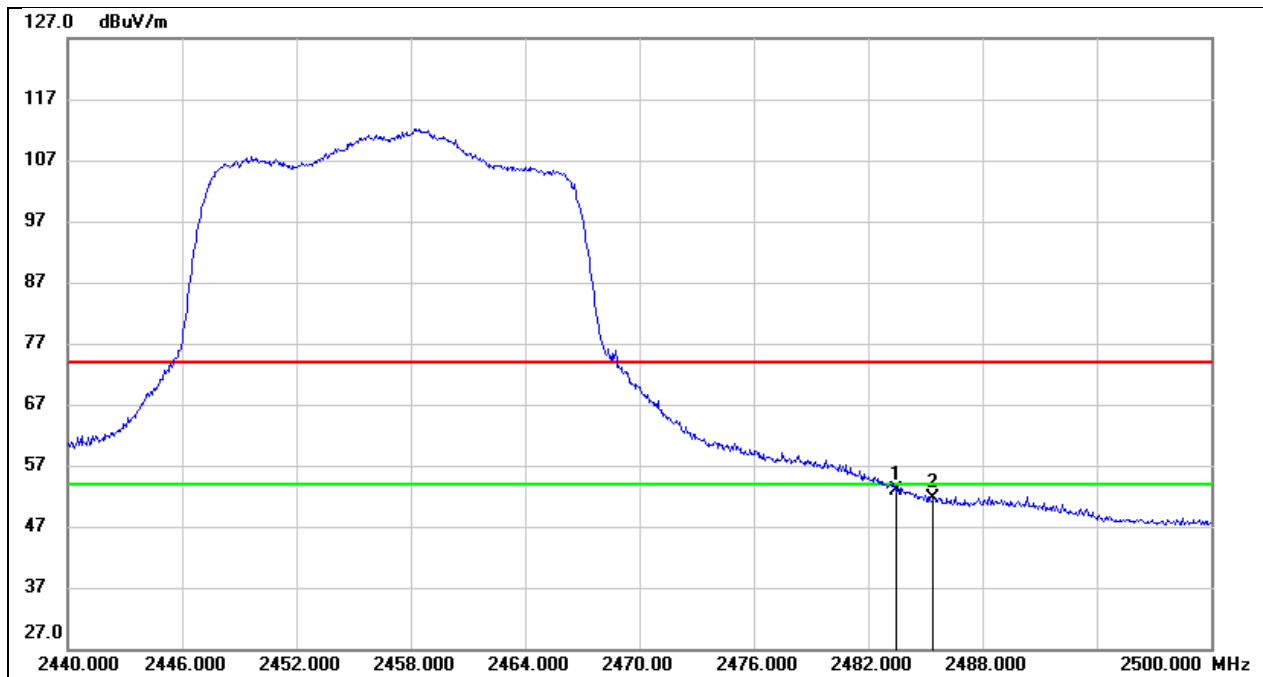


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.51	32.44	52.95	54.00	-1.05	AVG
2	2485.420	19.28	32.44	51.72	54.00	-2.28	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

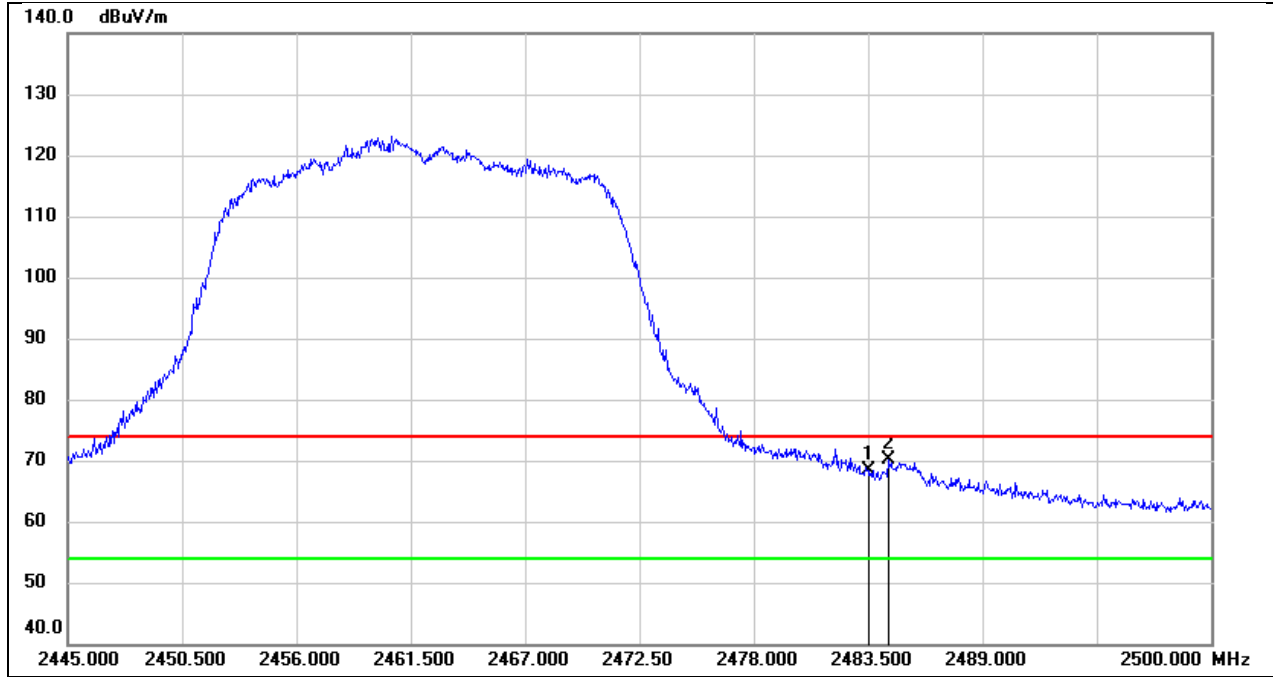


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	35.91	32.44	68.35	74.00	-5.65	peak
2	2484.490	37.66	32.44	70.10	74.00	-3.90	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

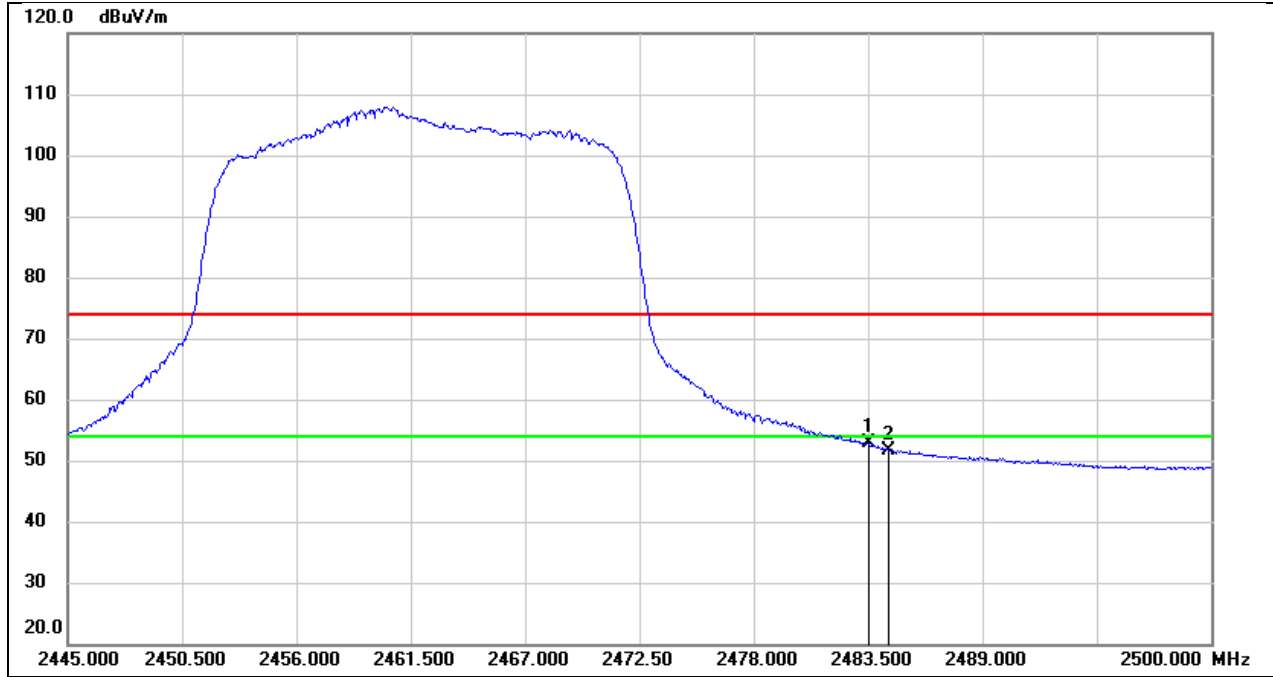


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.35	32.44	52.79	54.00	-1.21	AVG
2	2484.490	19.31	32.44	51.75	54.00	-2.25	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

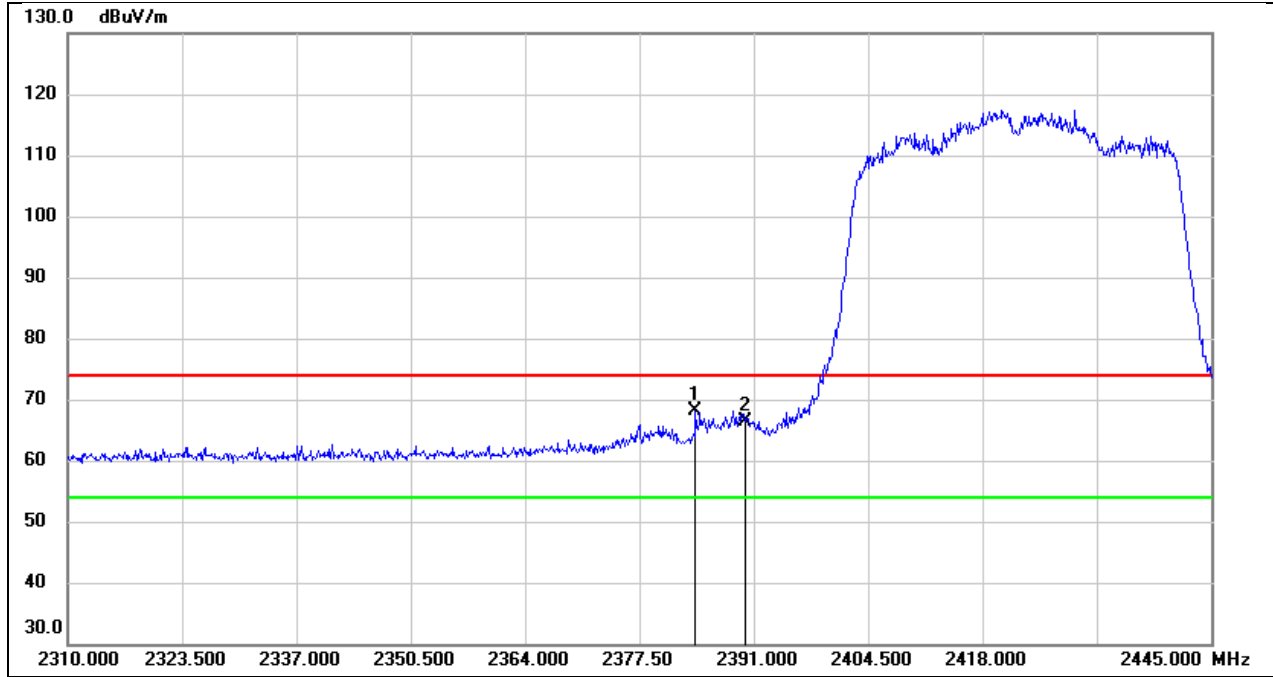


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.115	36.10	32.14	68.24	74.00	-5.76	peak
2	2390.000	34.25	32.16	66.41	74.00	-7.59	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

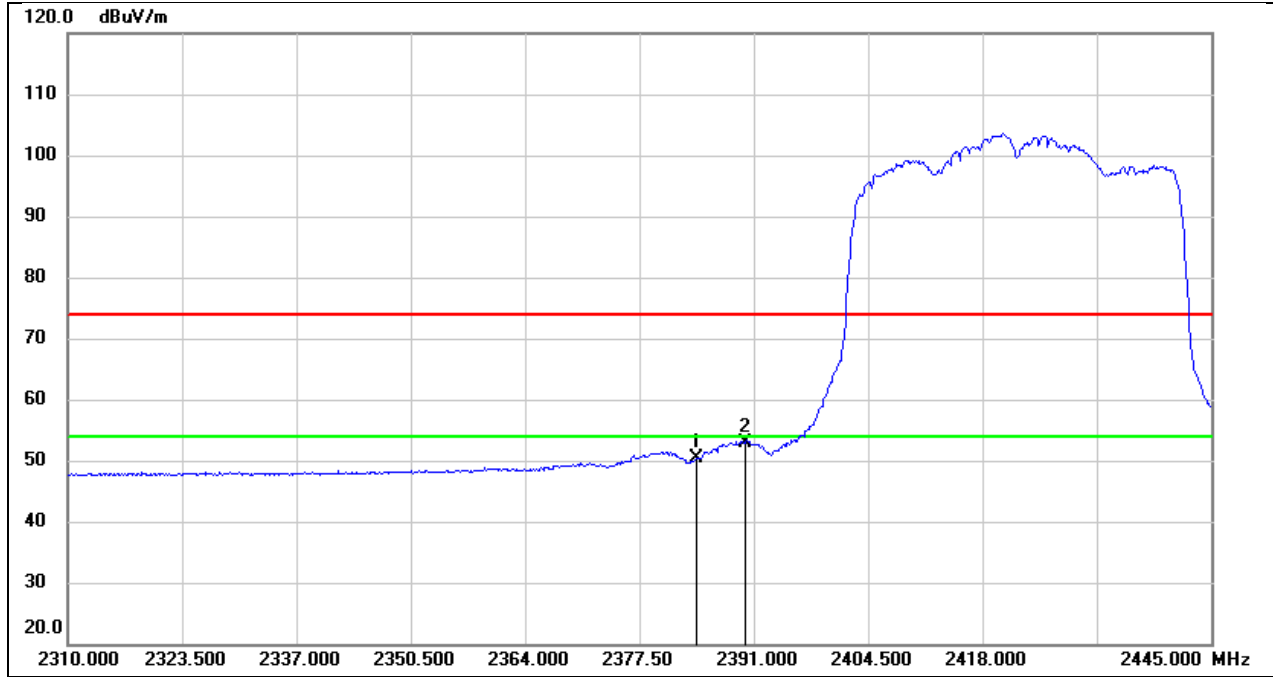


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.115	18.15	32.14	50.29	54.00	-3.71	AVG
2	2390.000	20.77	32.16	52.93	54.00	-1.07	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

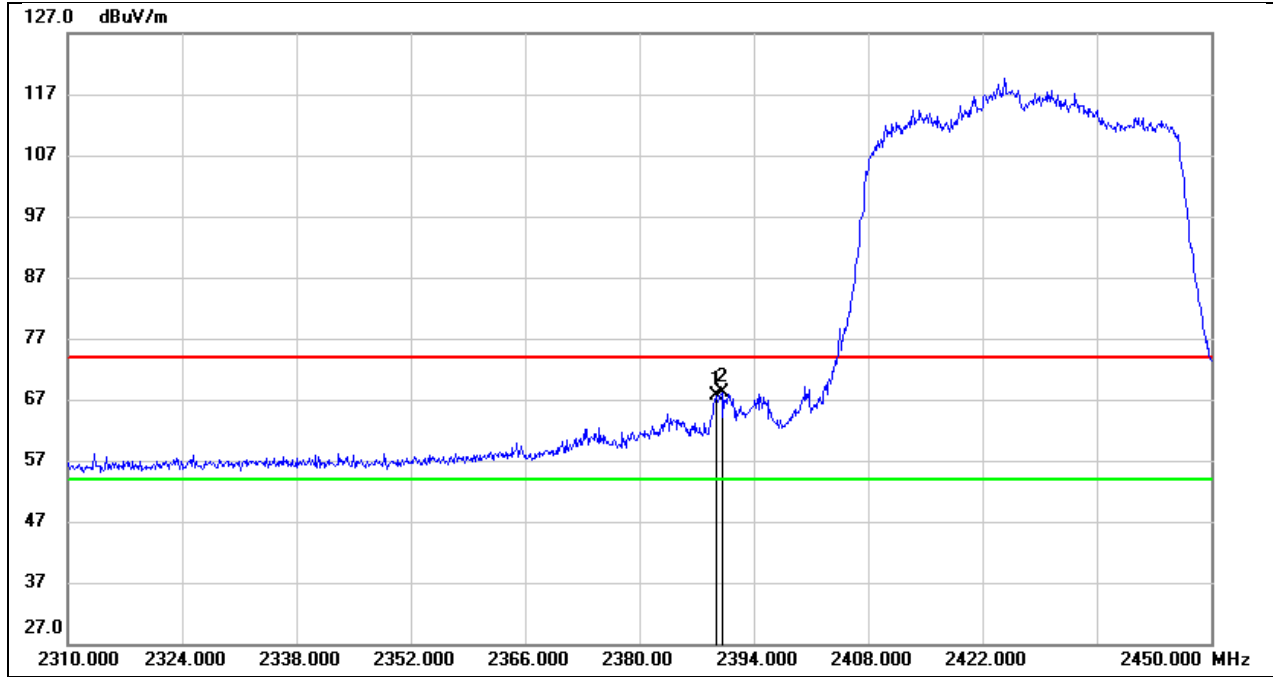


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	35.45	32.16	67.61	74.00	-6.39	peak
2	2390.000	35.89	32.16	68.05	74.00	-5.95	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

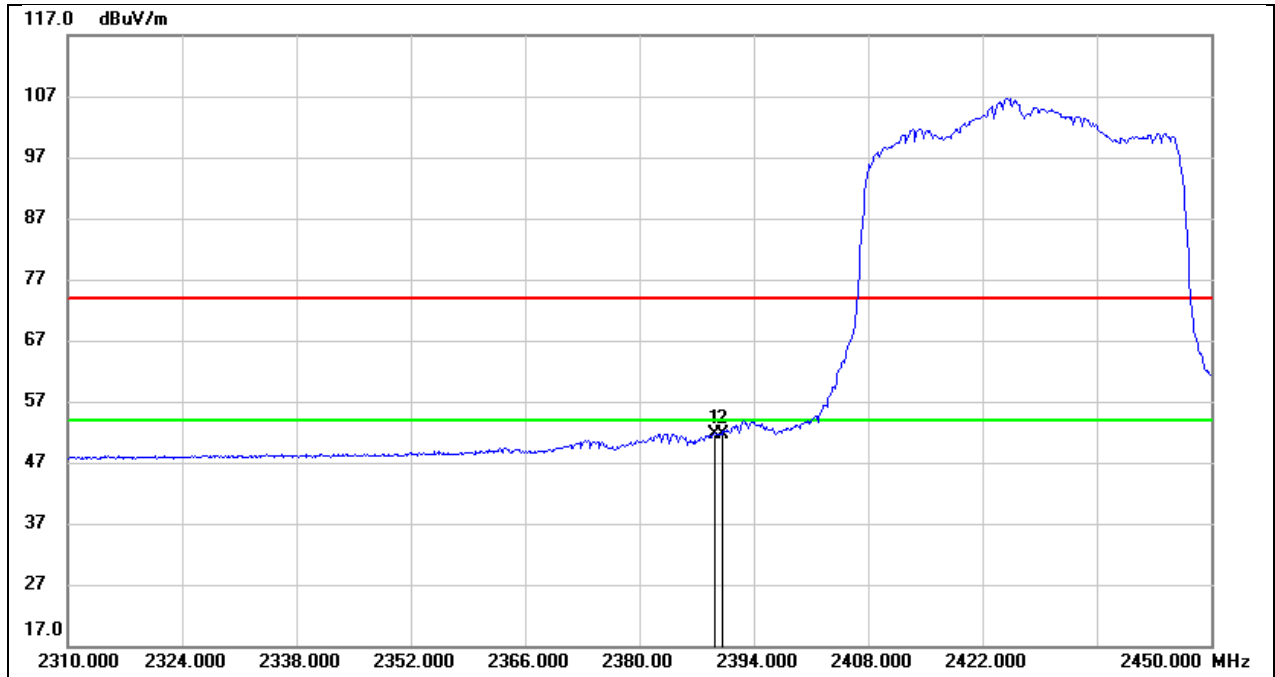


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.380	19.53	32.16	51.69	54.00	-2.31	AVG
2	2390.000	19.58	32.16	51.74	54.00	-2.26	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

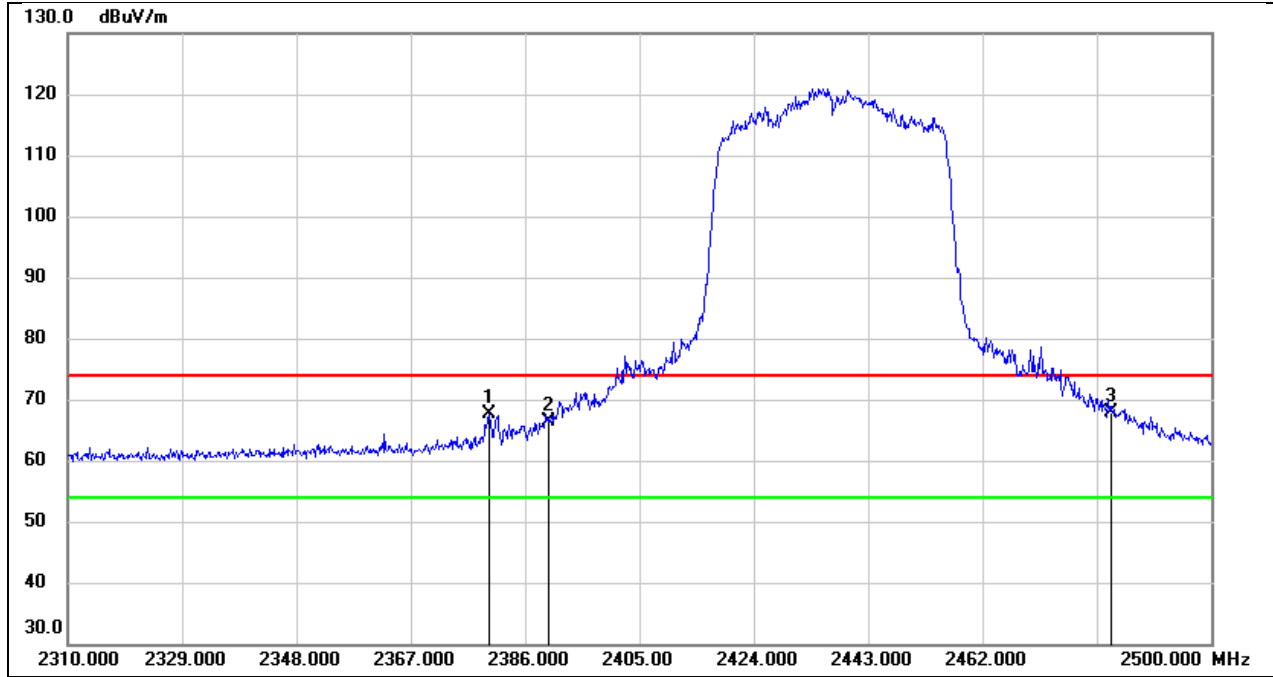


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.920	35.55	32.13	67.68	74.00	-6.32	peak
2	2390.000	34.17	32.16	66.33	74.00	-7.67	peak
3	2483.500	35.49	32.44	67.93	74.00	-6.07	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

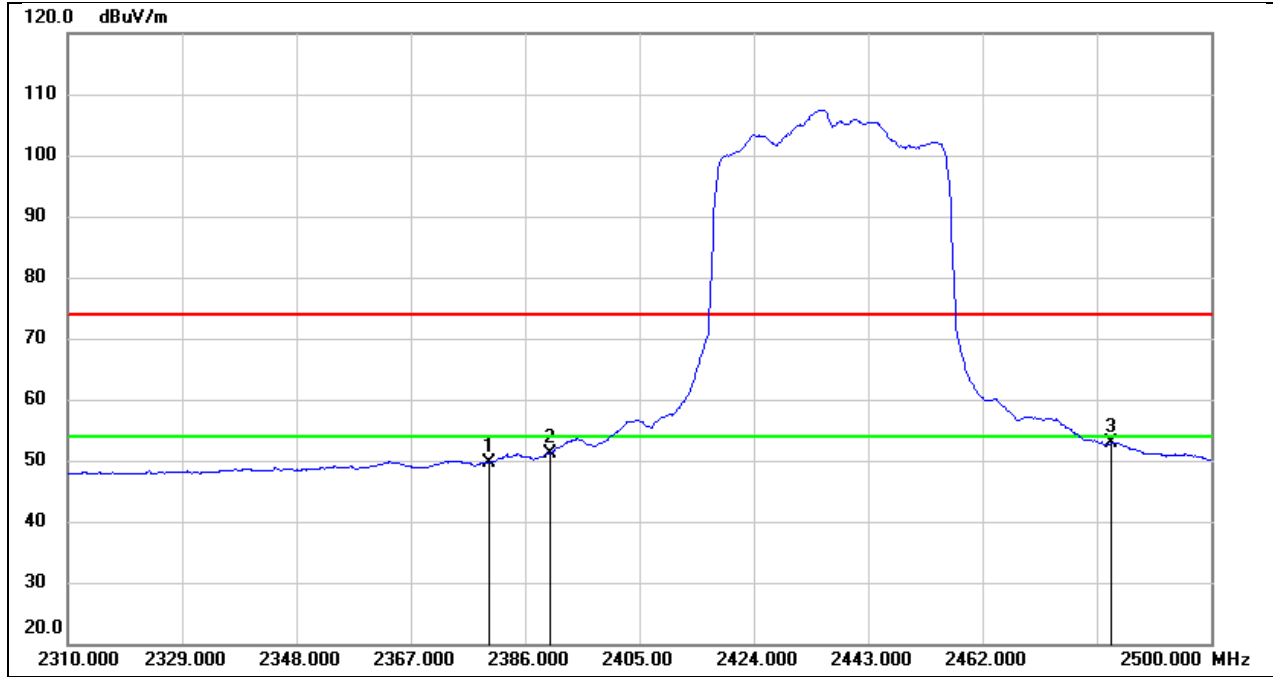


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.920	17.51	32.13	49.64	54.00	-4.36	AVG
2	2390.000	18.99	32.16	51.15	54.00	-2.85	AVG
3	2483.500	20.37	32.44	52.81	54.00	-1.19	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

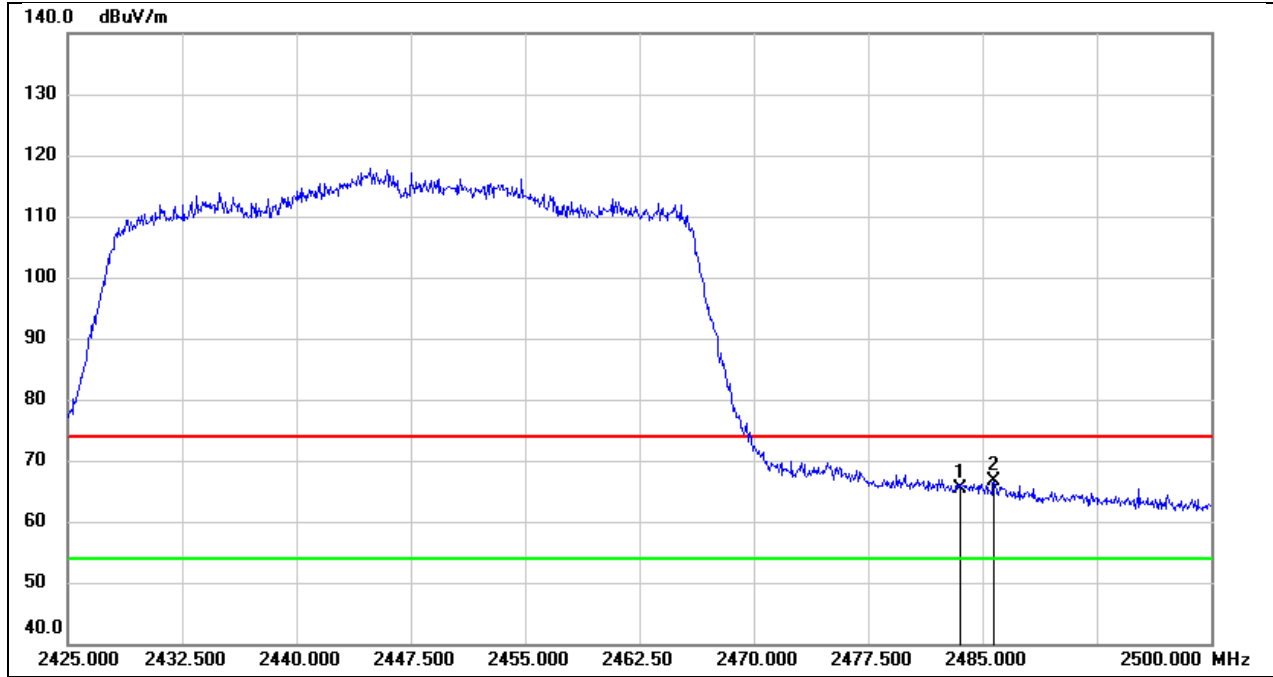


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	33.00	32.44	65.44	74.00	-8.56	peak
2	2485.750	34.23	32.44	66.67	74.00	-7.33	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

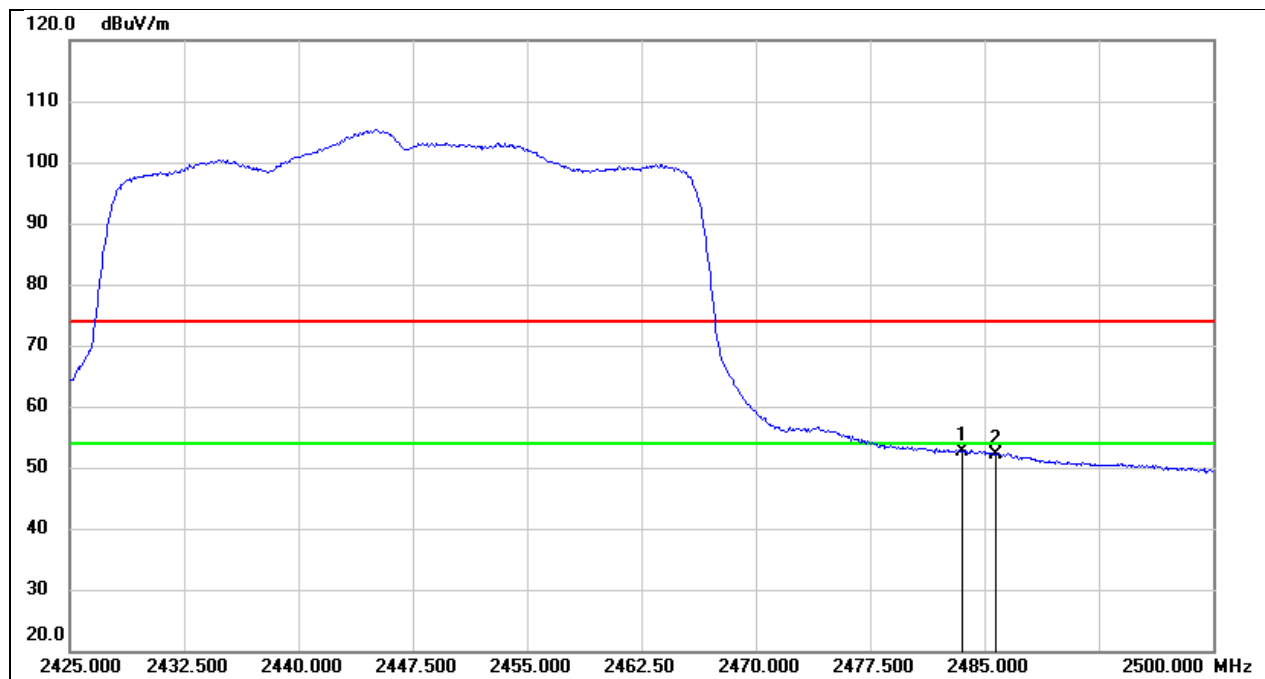


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.14	32.44	52.58	54.00	-1.42	AVG
2	2485.750	19.78	32.44	52.22	54.00	-1.78	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

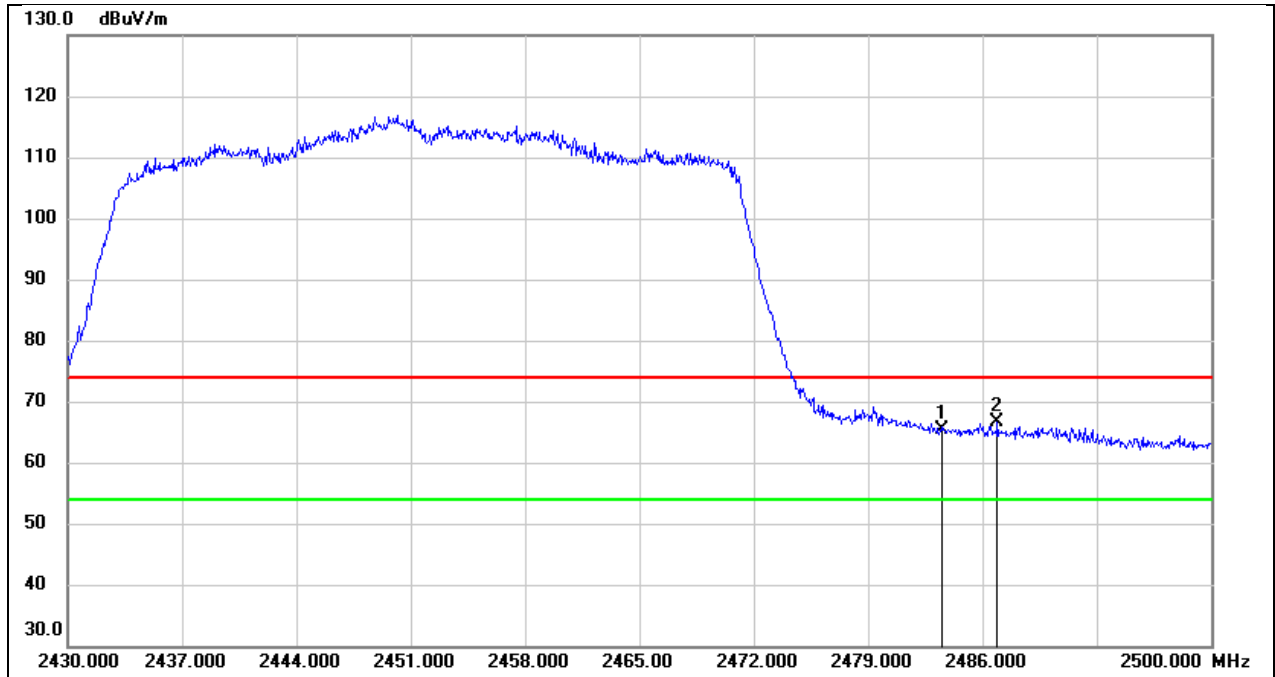

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	32.90	32.44	65.34	74.00	-8.66	peak
2	2486.910	34.11	32.45	66.56	74.00	-7.44	peak


Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

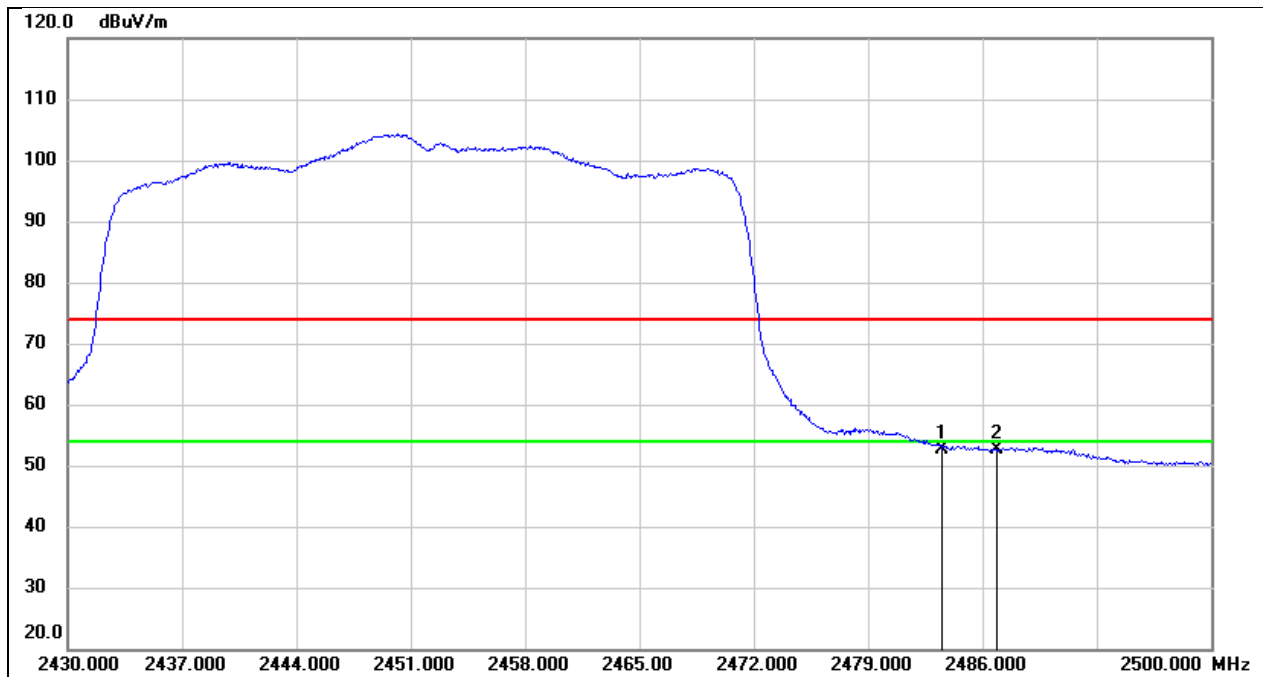

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.30	32.44	52.74	54.00	-1.26	AVG
2	2486.910	20.20	32.45	52.65	54.00	-1.35	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

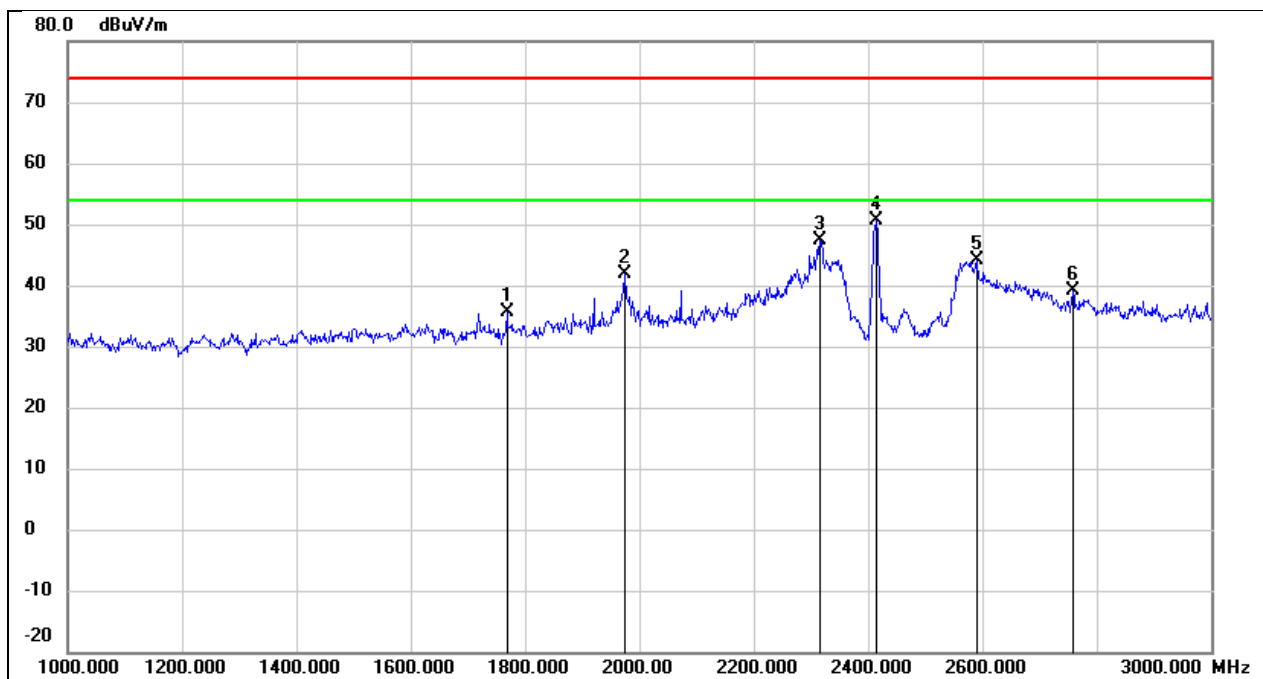


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1768.000	47.42	-11.83	35.59	74.00	-38.41	peak
2	1974.000	53.10	-11.14	41.96	74.00	-32.04	peak
3	2316.000	56.92	-9.44	47.48	74.00	-26.52	peak
4	2414.000	59.45	-8.93	50.52	74.00	-23.48	peak
5	2590.000	52.38	-8.22	44.16	74.00	-29.84	peak
6	2758.000	46.82	-7.72	39.10	74.00	-34.90	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

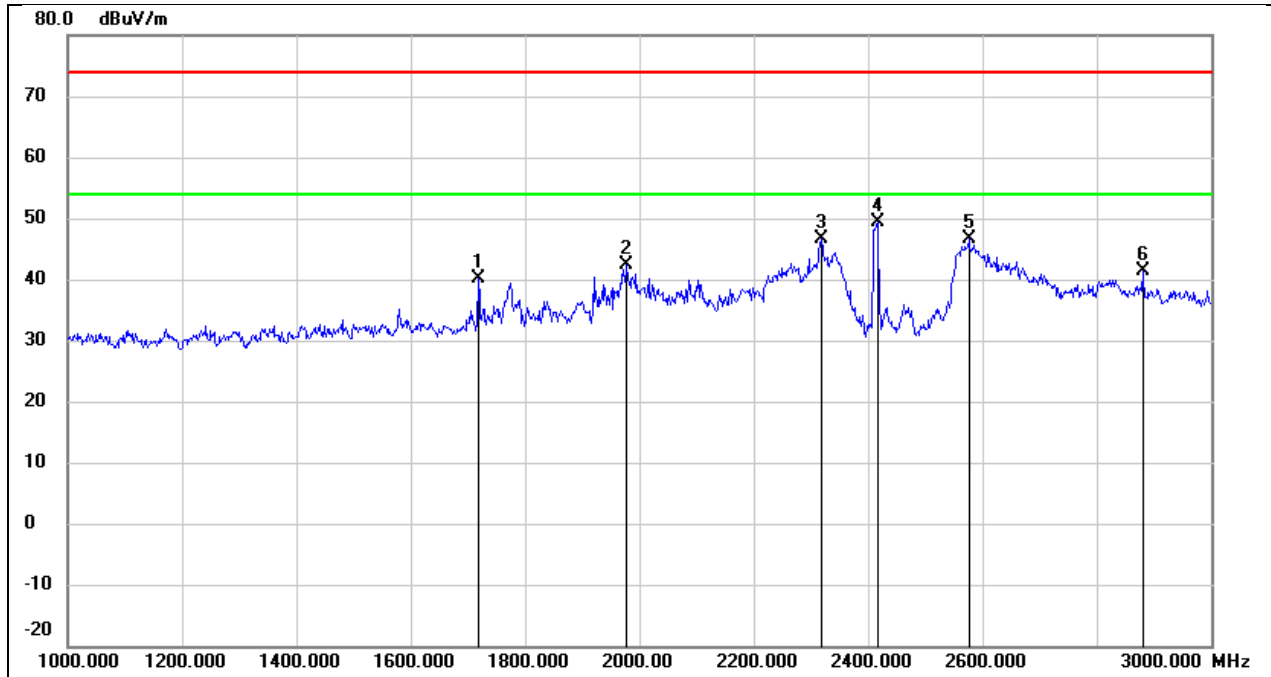


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1718.000	52.01	-11.99	40.02	74.00	-33.98	peak
2	1978.000	53.61	-11.13	42.48	74.00	-31.52	peak
3	2318.000	55.94	-9.42	46.52	74.00	-27.48	peak
4	2416.000	58.33	-8.92	49.41	74.00	-24.59	peak
5	2576.000	54.79	-8.26	46.53	74.00	-27.47	peak
6	2880.000	48.65	-7.34	41.31	74.00	-32.69	peak

Test Mode:	802.11b	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 12 V

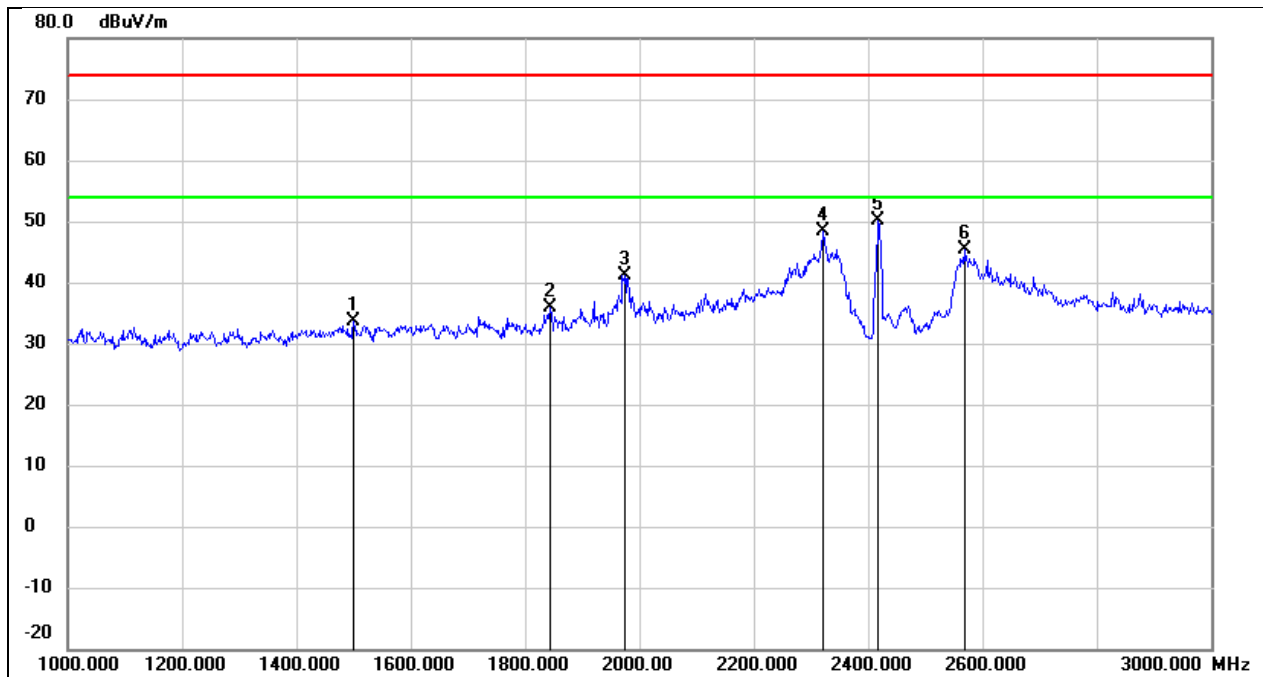


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	46.41	-12.71	33.70	74.00	-40.30	peak
2	1844.000	47.51	-11.57	35.94	74.00	-38.06	peak
3	1974.000	52.38	-11.14	41.24	74.00	-32.76	peak
4	2320.000	57.81	-9.42	48.39	74.00	-25.61	peak
5	2418.000	58.98	-8.91	50.07	74.00	-23.93	peak
6	2568.000	53.75	-8.28	45.47	74.00	-28.53	peak

Test Mode:	802.11b	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

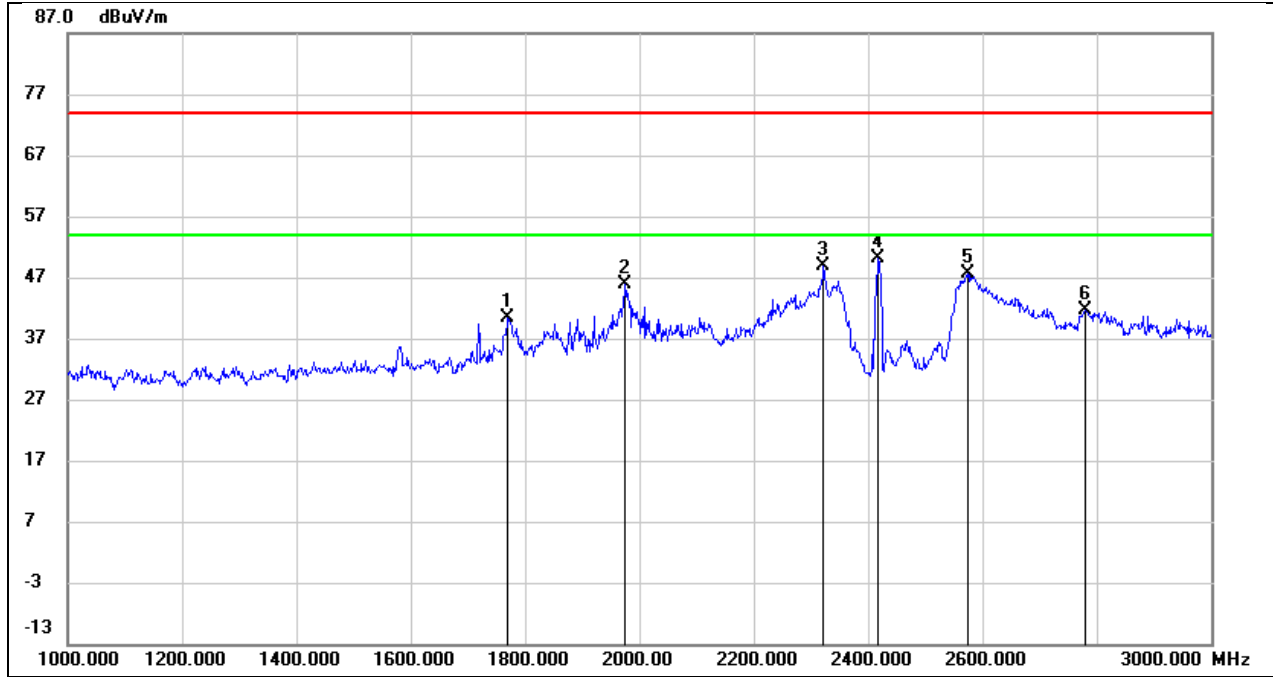


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1770.000	52.22	-11.82	40.40	74.00	-33.60	peak
2	1974.000	56.90	-11.14	45.76	74.00	-28.24	peak
3	2322.000	58.35	-9.40	48.95	74.00	-25.05	peak
4	2418.000	59.12	-8.91	50.21	74.00	-23.79	peak
5	2574.000	55.90	-8.27	47.63	74.00	-26.37	peak
6	2780.000	49.15	-7.64	41.51	74.00	-32.49	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

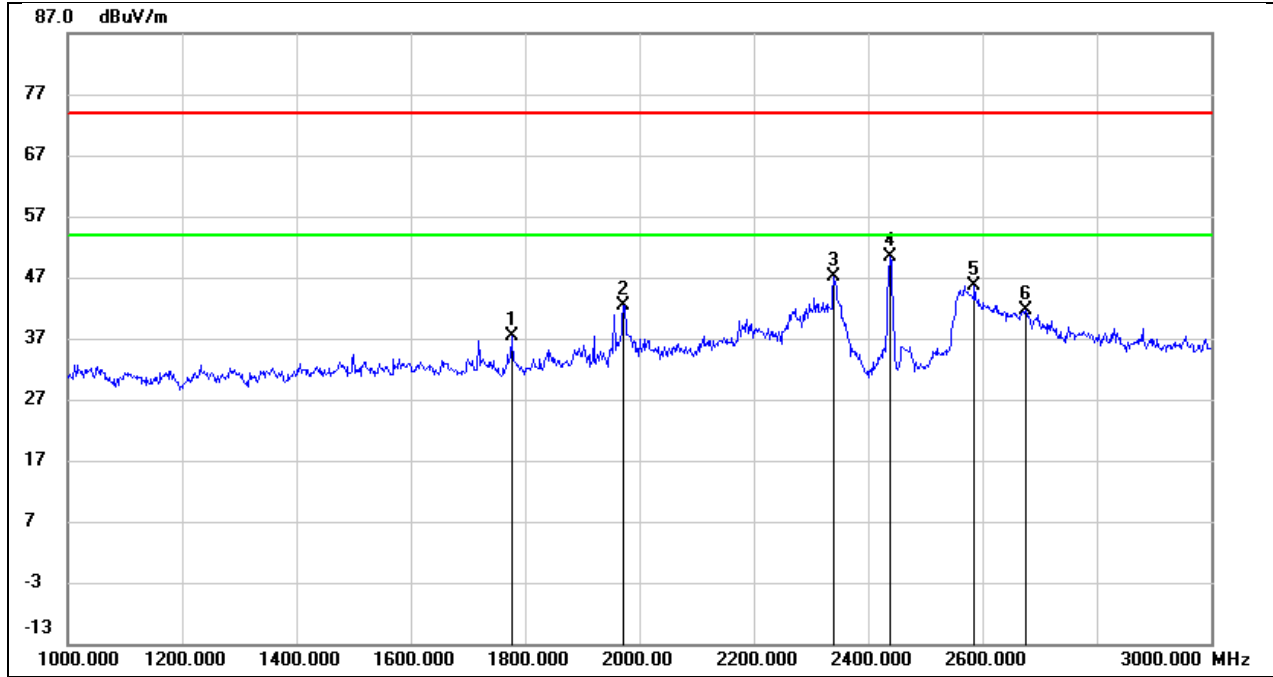


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1776.000	49.24	-11.80	37.44	74.00	-36.56	peak
2	1972.000	53.51	-11.16	42.35	74.00	-31.65	peak
3	2340.000	56.43	-9.31	47.12	74.00	-26.88	peak
4	2438.000	59.11	-8.80	50.31	74.00	-23.69	peak
5	2586.000	53.90	-8.24	45.66	74.00	-28.34	peak
6	2676.000	49.67	-7.96	41.71	74.00	-32.29	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

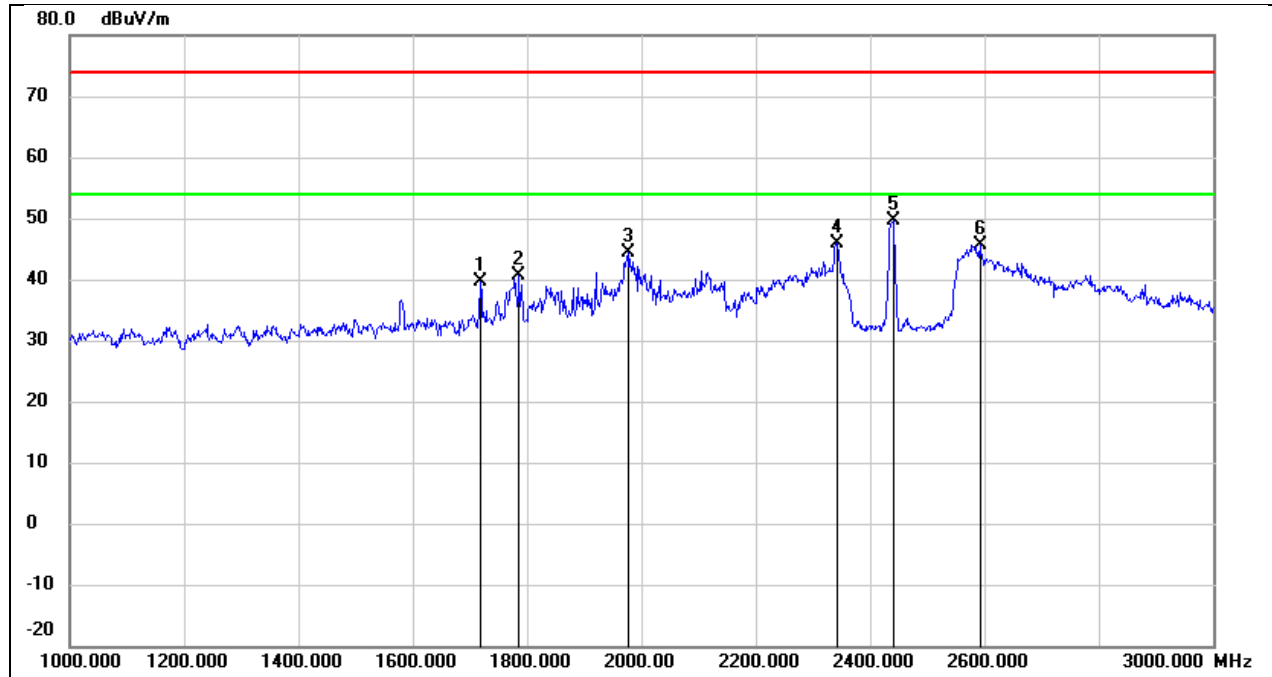


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1718.000	51.50	-11.99	39.51	74.00	-34.49	peak
2	1786.000	52.39	-11.76	40.63	74.00	-33.37	peak
3	1978.000	55.50	-11.13	44.37	74.00	-29.63	peak
4	2342.000	55.16	-9.30	45.86	74.00	-28.14	peak
5	2440.000	58.54	-8.80	49.74	74.00	-24.26	peak
6	2592.000	53.92	-8.21	45.71	74.00	-28.29	peak

Test Mode:	802.11b	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 12 V

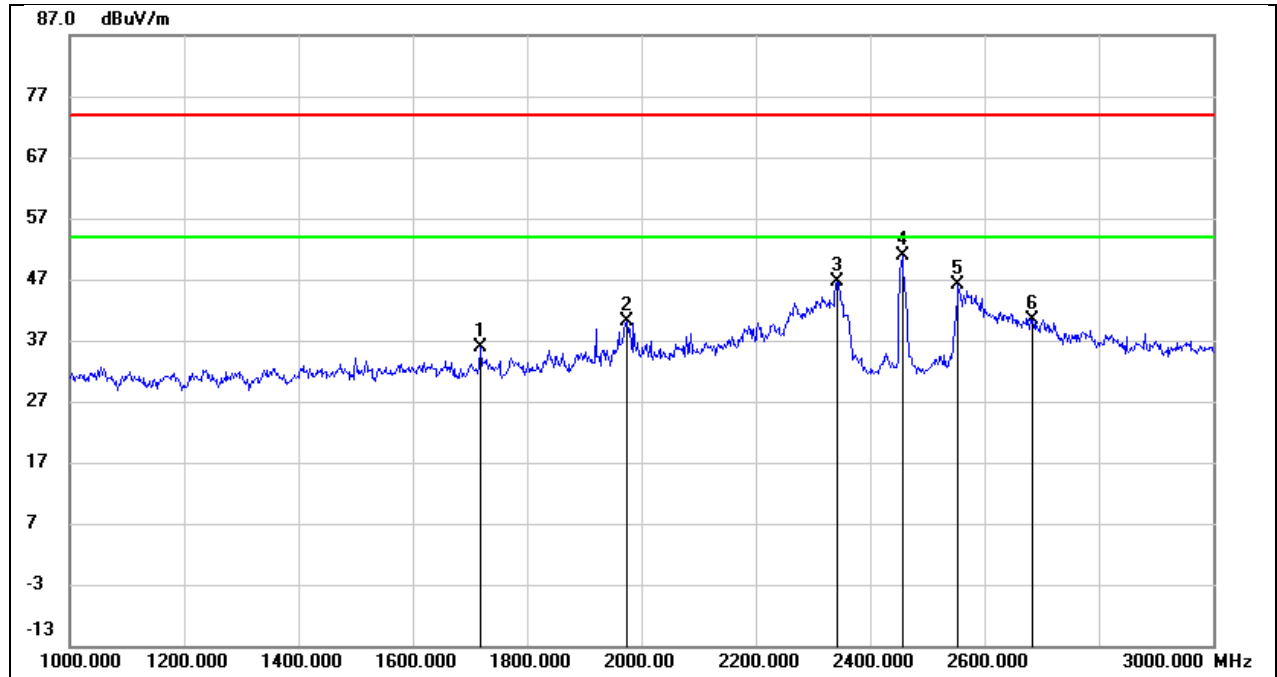


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1718.000	47.86	-11.99	35.87	74.00	-38.13	peak
2	1974.000	51.19	-11.14	40.05	74.00	-33.95	peak
3	2342.000	56.01	-9.30	46.71	74.00	-27.29	peak
4	2456.000	59.67	-8.71	50.96	74.00	-23.04	peak
5	2554.000	54.33	-8.32	46.01	74.00	-27.99	peak
6	2684.000	48.32	-7.93	40.39	74.00	-33.61	peak

Test Mode:	802.11b	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

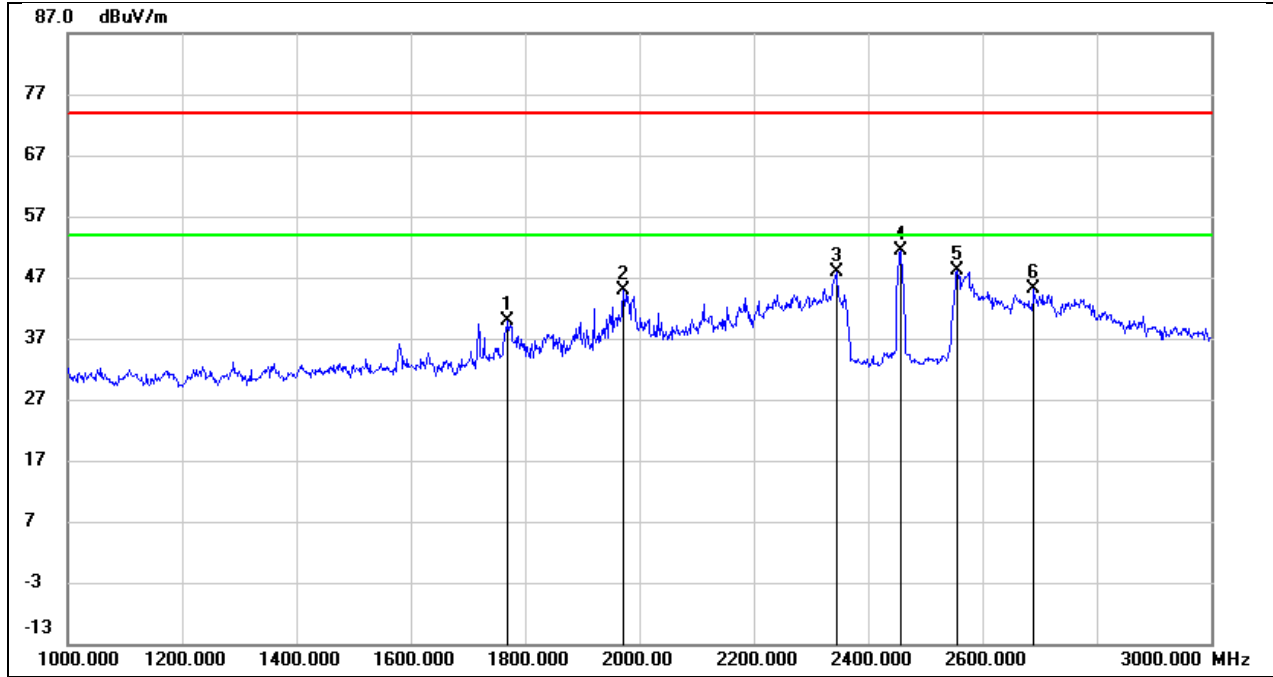


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1770.000	51.81	-11.82	39.99	74.00	-34.01	peak
2	1972.000	56.13	-11.16	44.97	74.00	-29.03	peak
3	2344.000	57.28	-9.30	47.98	74.00	-26.02	peak
4	2456.000	60.12	-8.71	51.41	74.00	-22.59	peak
5	2556.000	56.44	-8.32	48.12	74.00	-25.88	peak
6	2690.000	53.09	-7.92	45.17	74.00	-28.83	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 12 V

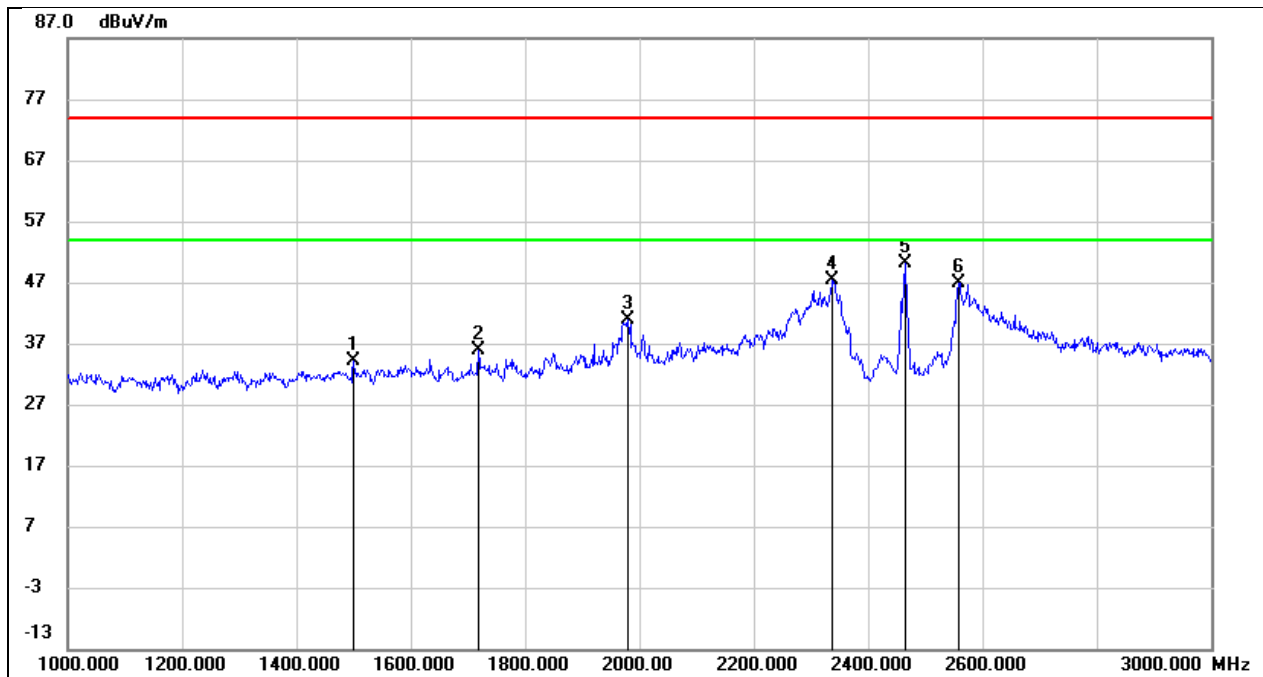

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1500.000	46.74	-12.71	34.03	74.00	-39.97	peak
2	1718.000	47.89	-11.99	35.90	74.00	-38.10	peak
3	1980.000	52.10	-11.13	40.97	74.00	-33.03	peak
4	2338.000	56.73	-9.32	47.41	74.00	-26.59	peak
5	2464.000	58.81	-8.68	50.13	74.00	-23.87	peak
6	2558.000	55.24	-8.32	46.92	74.00	-27.08	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

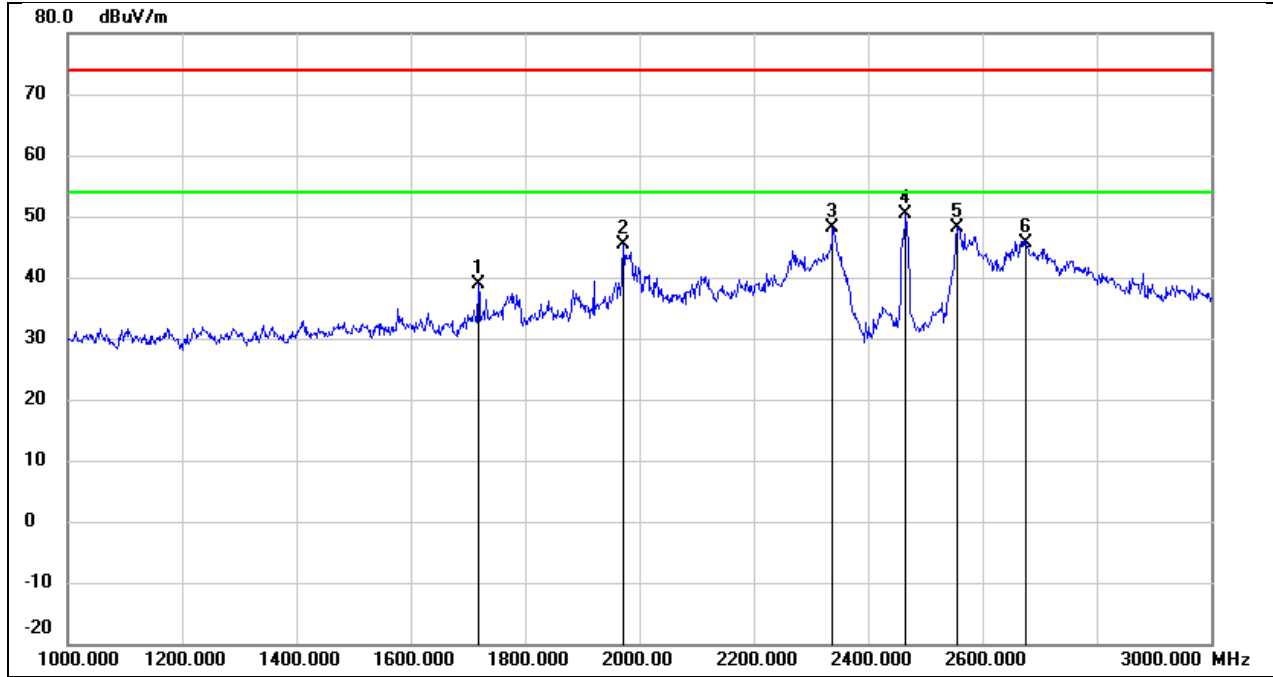

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1718.000	50.78	-11.99	38.79	74.00	-35.21	peak
2	1972.000	56.43	-11.16	45.27	74.00	-28.73	peak
3	2338.000	57.46	-9.32	48.14	74.00	-25.86	peak
4	2466.000	59.10	-8.66	50.44	74.00	-23.56	peak
5	2556.000	56.52	-8.32	48.20	74.00	-25.80	peak
6	2676.000	53.66	-7.96	45.70	74.00	-28.30	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

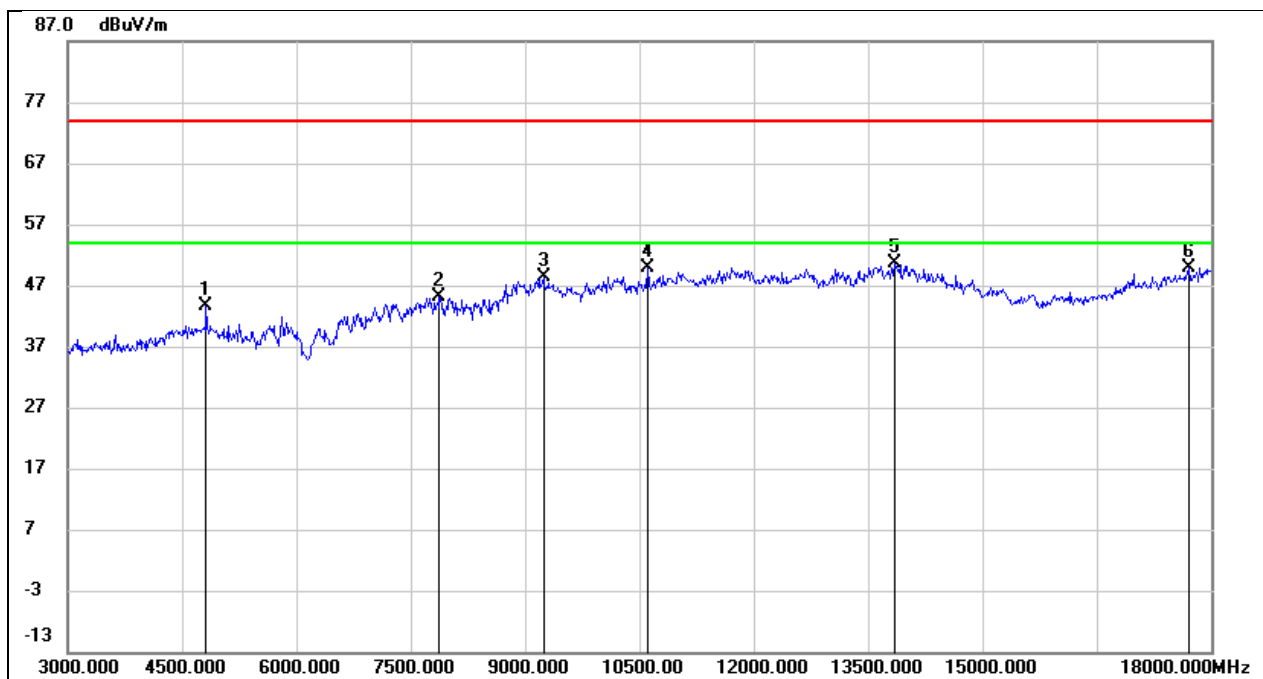


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	43.90	-0.26	43.64	74.00	-30.36	peak
2	7875.000	38.88	6.31	45.19	74.00	-28.81	peak
3	9240.000	37.79	10.58	48.37	74.00	-25.63	peak
4	10605.000	36.55	13.37	49.92	74.00	-24.08	peak
5	13845.000	29.07	21.62	50.69	74.00	-23.31	peak
6	17715.000	25.96	24.00	49.96	74.00	-24.04	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

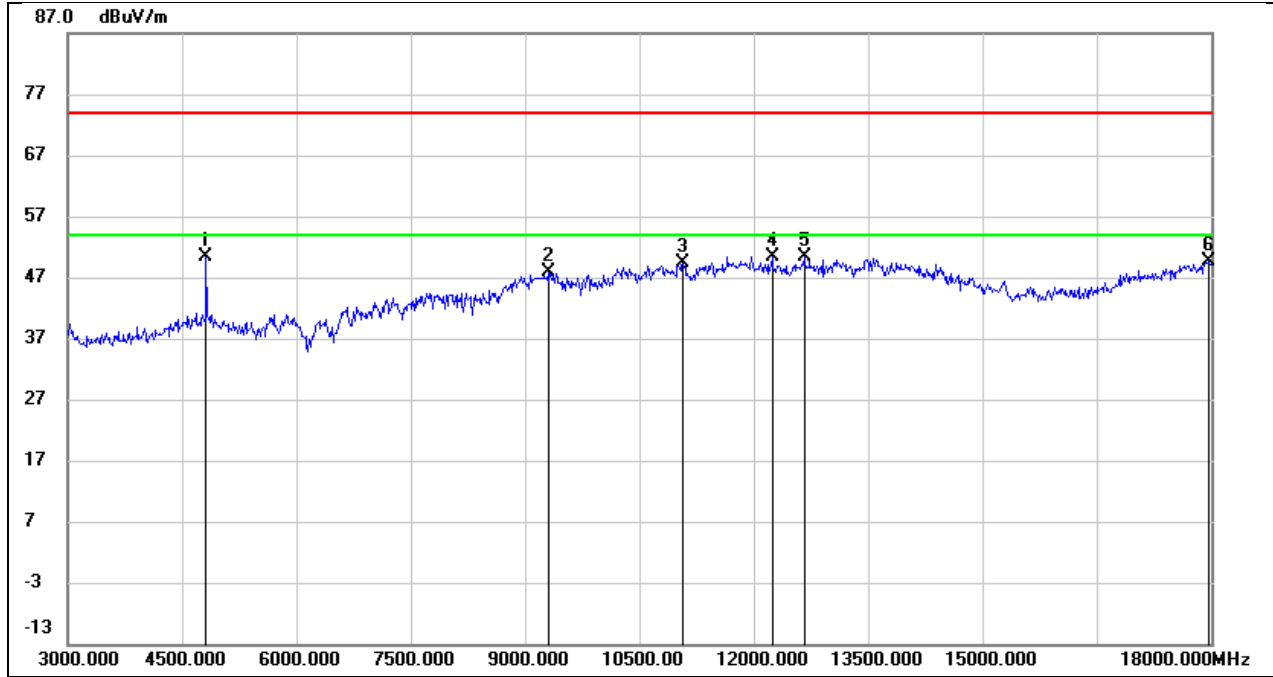


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	50.72	-0.26	50.46	74.00	-23.54	peak
2	9300.000	37.32	10.61	47.93	74.00	-26.07	peak
3	11070.000	34.37	15.03	49.40	74.00	-24.60	peak
4	12240.000	32.60	17.79	50.39	74.00	-23.61	peak
5	12660.000	32.41	17.95	50.36	74.00	-23.64	peak
6	17970.000	24.13	25.51	49.64	74.00	-24.36	peak

Test Mode:	802.11b	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 12 V

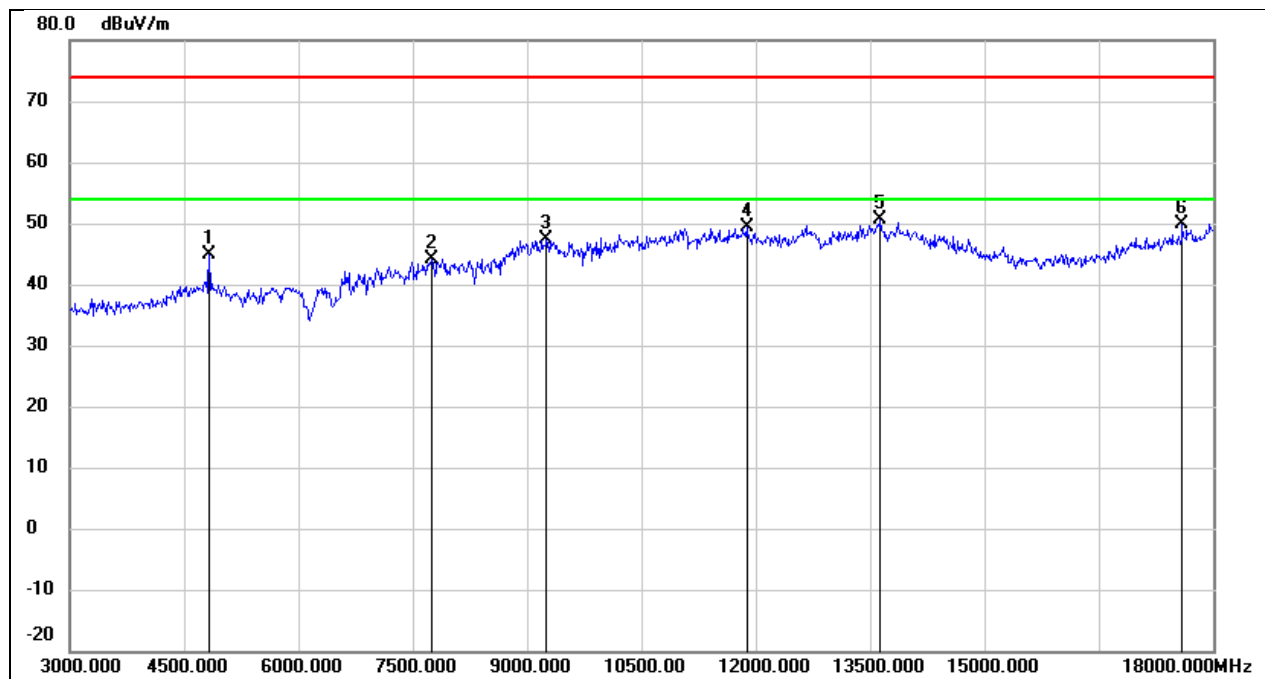


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	45.05	-0.20	44.85	74.00	-29.15	peak
2	7755.000	37.85	6.31	44.16	74.00	-29.84	peak
3	9255.000	36.78	10.59	47.37	74.00	-26.63	peak
4	11880.000	31.70	17.63	49.33	74.00	-24.67	peak
5	13635.000	29.33	21.19	50.52	74.00	-23.48	peak
6	17595.000	26.65	23.29	49.94	74.00	-24.06	peak

Test Mode:	802.11b	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

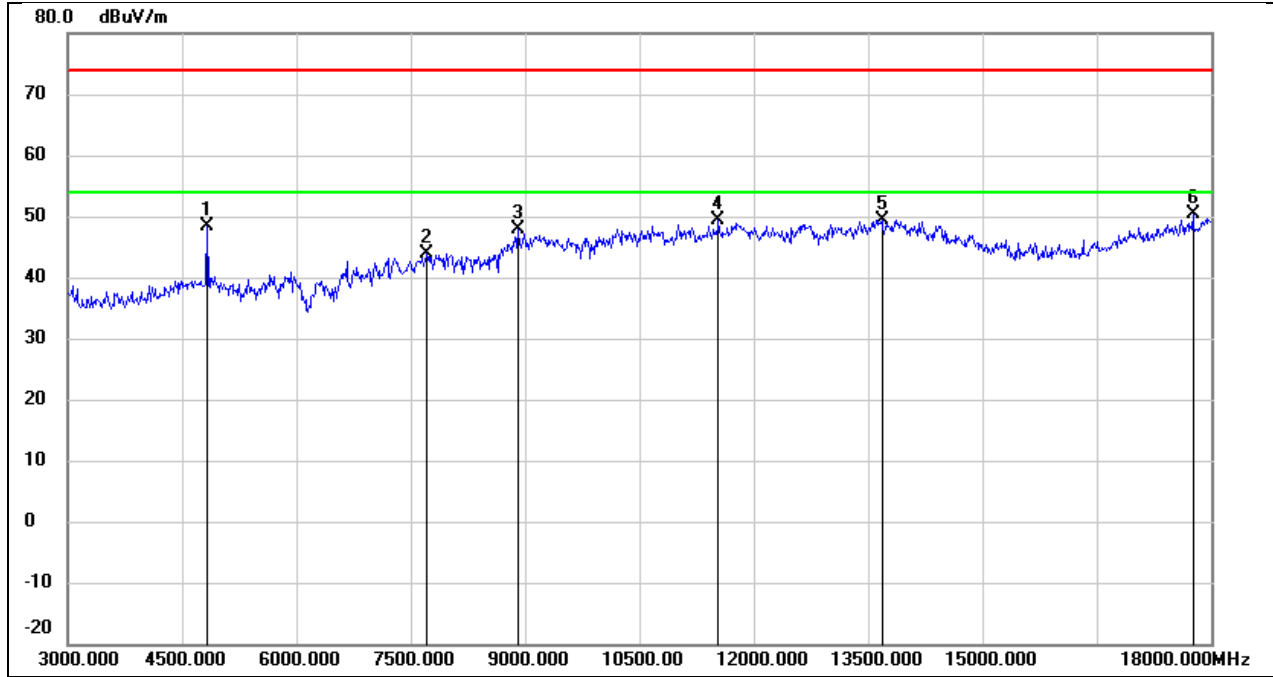


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	48.53	-0.20	48.33	74.00	-25.67	peak
2	7710.000	37.51	6.33	43.84	74.00	-30.16	peak
3	8910.000	38.06	9.82	47.88	74.00	-26.12	peak
4	11535.000	32.58	16.70	49.28	74.00	-24.72	peak
5	13680.000	28.19	21.29	49.48	74.00	-24.52	peak
6	17760.000	26.20	24.27	50.47	74.00	-23.53	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

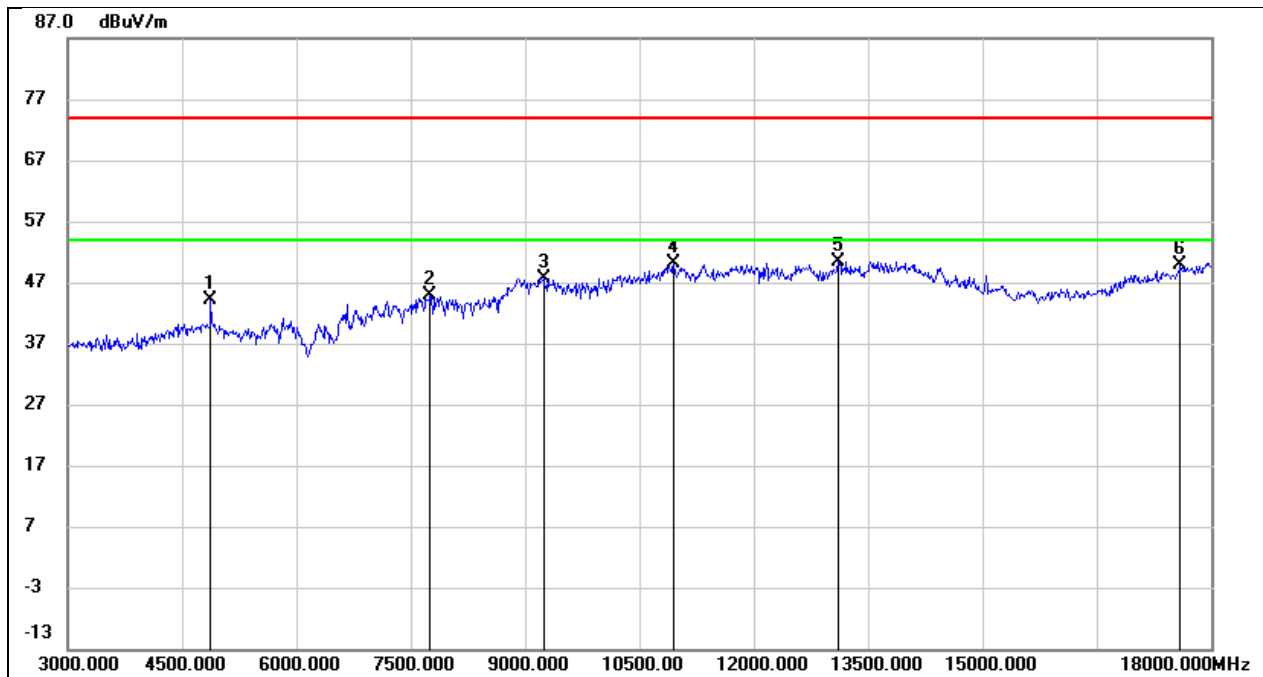


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.12	-0.03	44.09	74.00	-29.91	peak
2	7755.000	38.58	6.31	44.89	74.00	-29.11	peak
3	9240.000	37.16	10.58	47.74	74.00	-26.26	peak
4	10950.000	35.62	14.60	50.22	74.00	-23.78	peak
5	13110.000	31.16	19.20	50.36	74.00	-23.64	peak
6	17595.000	26.68	23.29	49.97	74.00	-24.03	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

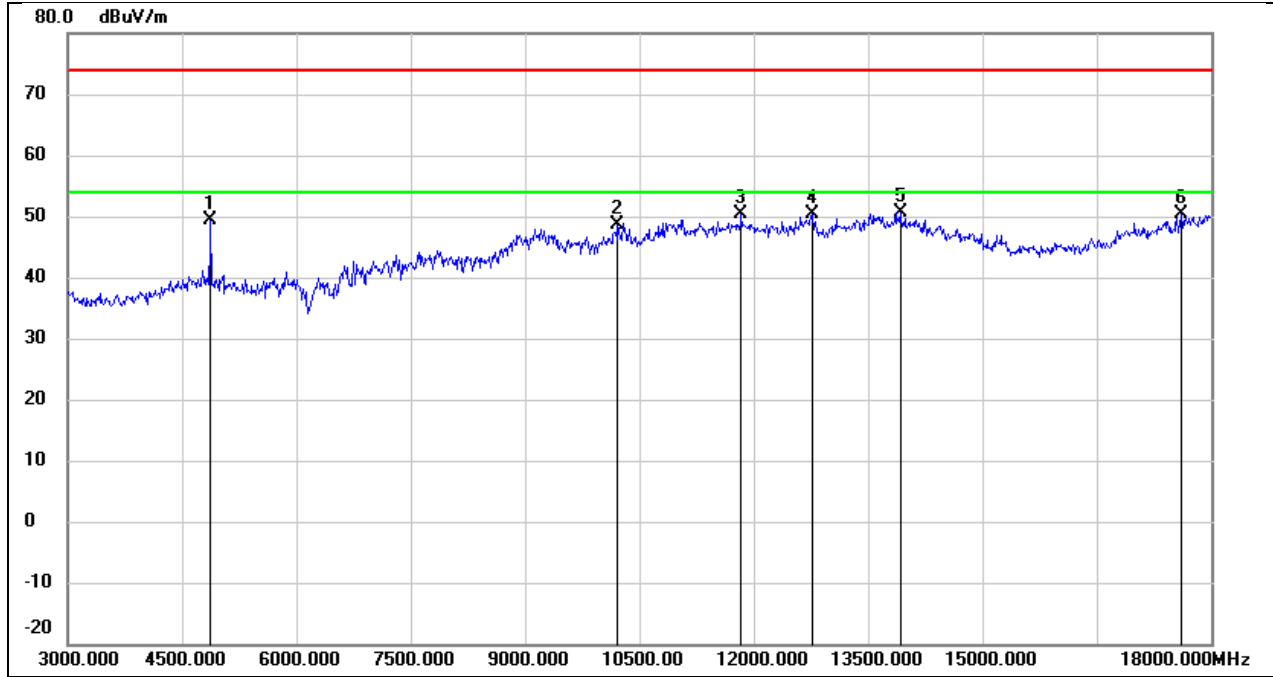


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.44	-0.03	49.41	74.00	-24.59	peak
2	10215.000	36.11	12.43	48.54	74.00	-25.46	peak
3	11835.000	32.94	17.51	50.45	74.00	-23.55	peak
4	12765.000	32.07	18.20	50.27	74.00	-23.73	peak
5	13920.000	28.88	21.79	50.67	74.00	-23.33	peak
6	17610.000	27.05	23.38	50.43	74.00	-23.57	peak

Test Mode:	802.11b	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 12 V

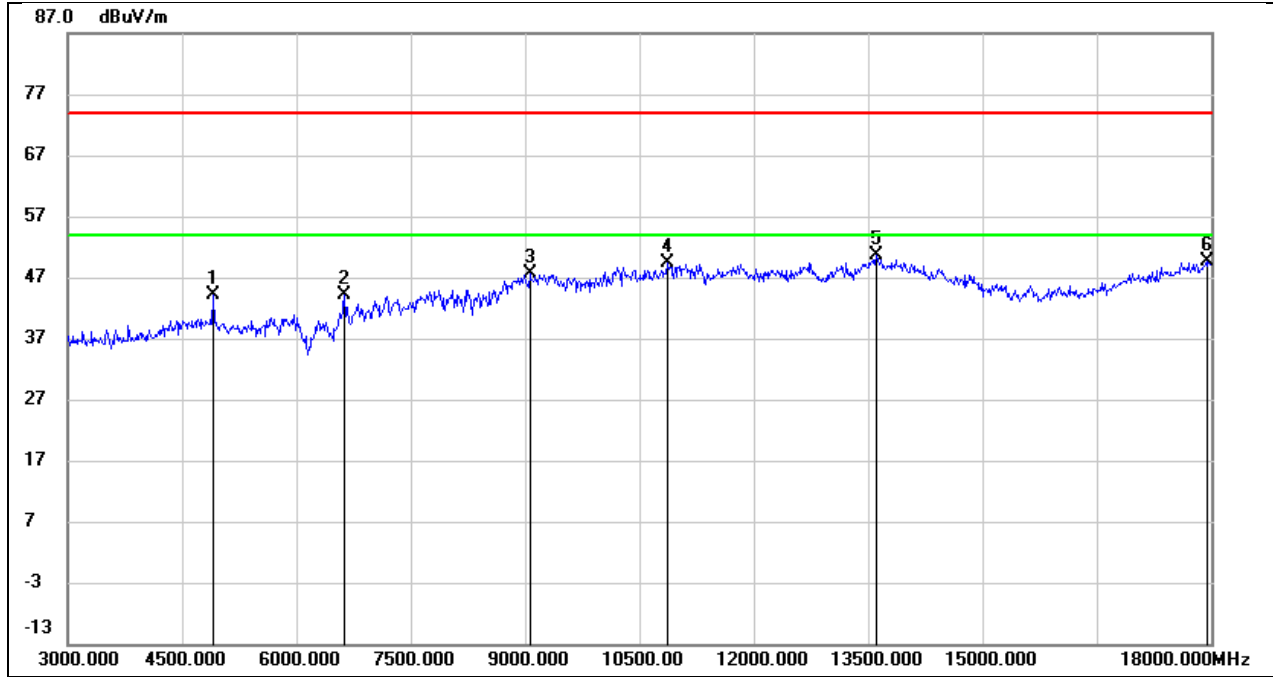


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	43.95	0.09	44.04	74.00	-29.96	peak
2	6630.000	39.16	4.86	44.02	74.00	-29.98	peak
3	9060.000	37.06	10.51	47.57	74.00	-26.43	peak
4	10875.000	35.10	14.32	49.42	74.00	-24.58	peak
5	13605.000	29.55	21.12	50.67	74.00	-23.33	peak
6	17940.000	24.35	25.34	49.69	74.00	-24.31	peak

Test Mode:	802.11b	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

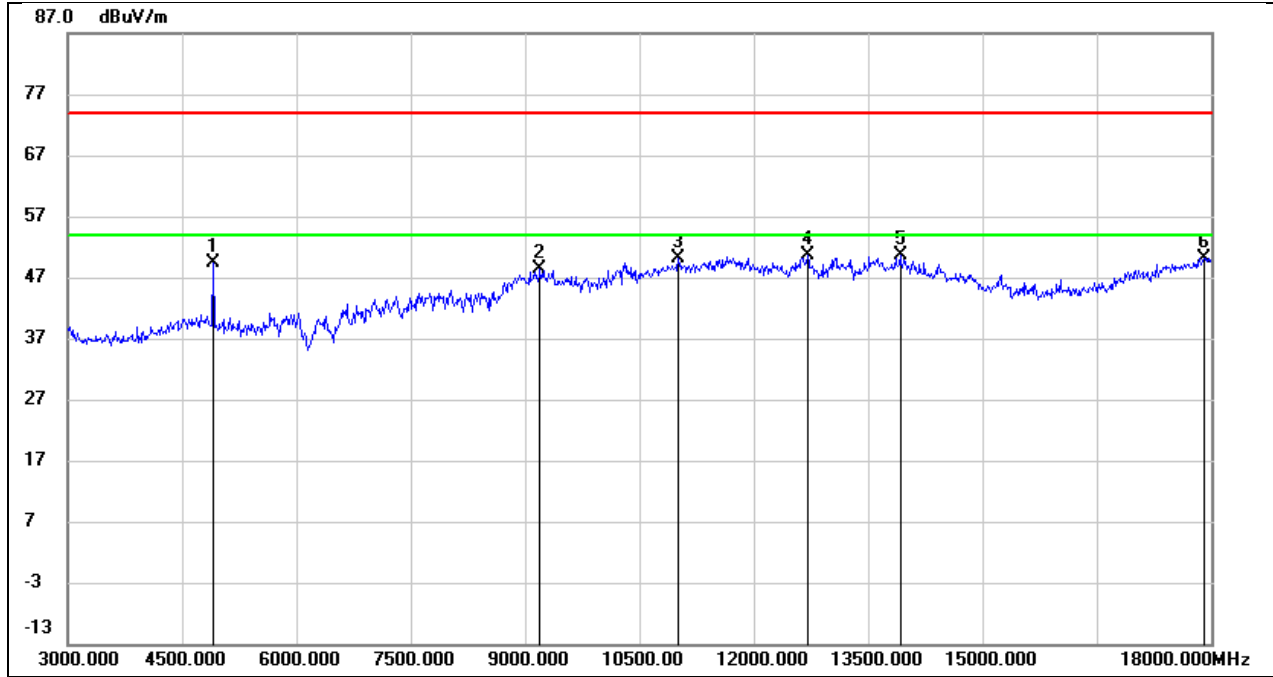


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	49.28	0.09	49.37	74.00	-24.63	peak
2	9195.000	37.85	10.56	48.41	74.00	-25.59	peak
3	11010.000	35.35	14.81	50.16	74.00	-23.84	peak
4	12705.000	32.51	18.06	50.57	74.00	-23.43	peak
5	13920.000	28.81	21.79	50.60	74.00	-23.40	peak
6	17910.000	25.08	25.16	50.24	74.00	-23.76	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 12 V

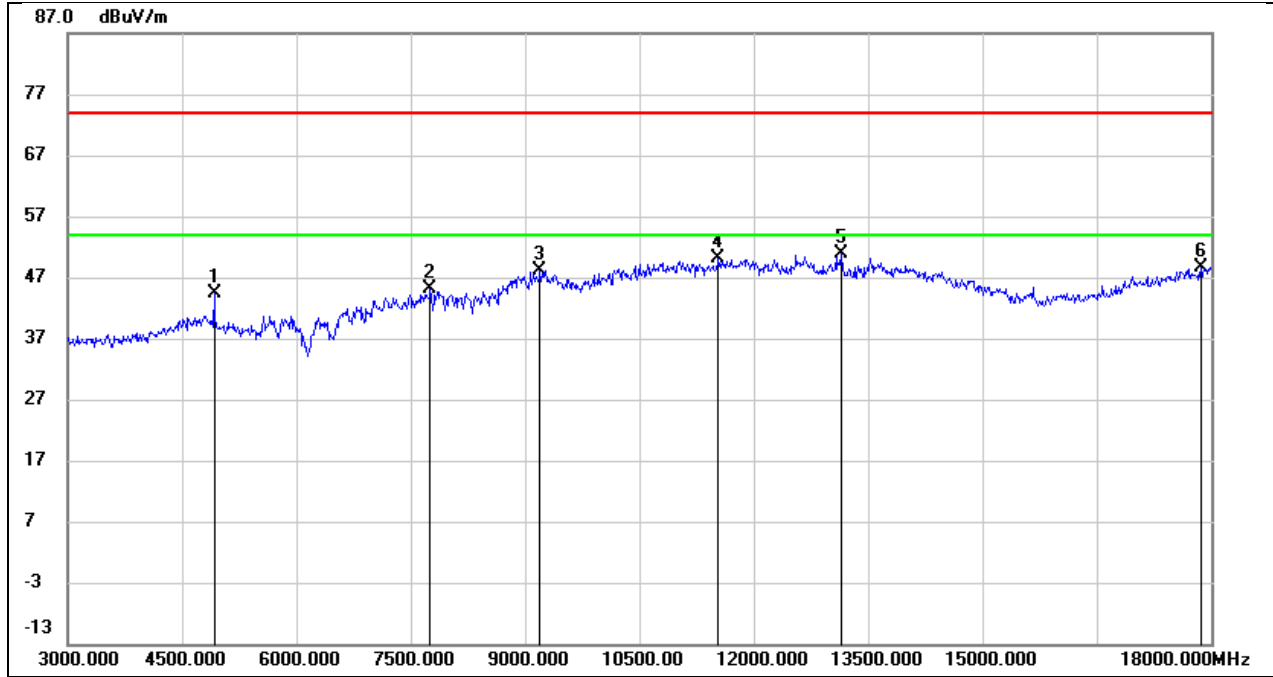


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.20	0.14	44.34	74.00	-29.66	peak
2	7755.000	38.75	6.31	45.06	74.00	-28.94	peak
3	9195.000	37.66	10.56	48.22	74.00	-25.78	peak
4	11535.000	33.42	16.70	50.12	74.00	-23.88	peak
5	13140.000	31.61	19.33	50.94	74.00	-23.06	peak
6	17865.000	23.76	24.89	48.65	74.00	-25.35	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

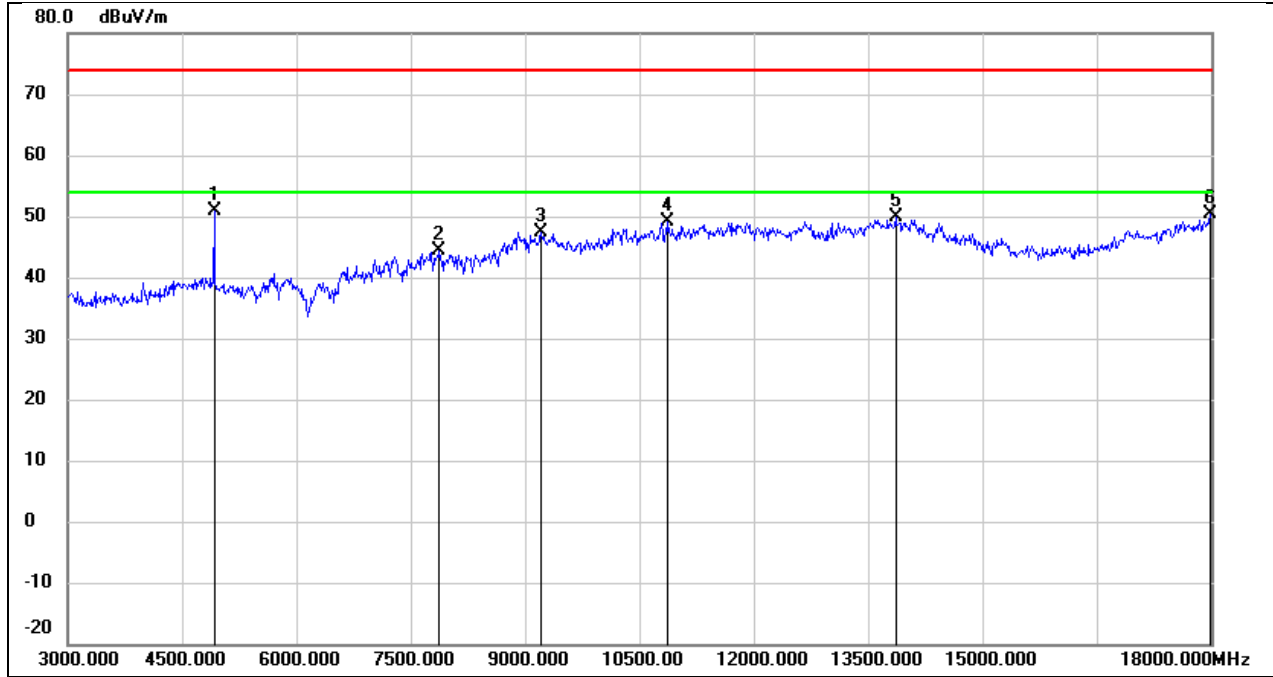


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.73	0.14	50.87	74.00	-23.13	peak
2	7875.000	38.07	6.31	44.38	74.00	-29.62	peak
3	9210.000	36.77	10.57	47.34	74.00	-26.66	peak
4	10875.000	34.71	14.32	49.03	74.00	-24.97	peak
5	13860.000	28.17	21.67	49.84	74.00	-24.16	peak
6	17985.000	24.89	25.60	50.49	74.00	-23.51	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

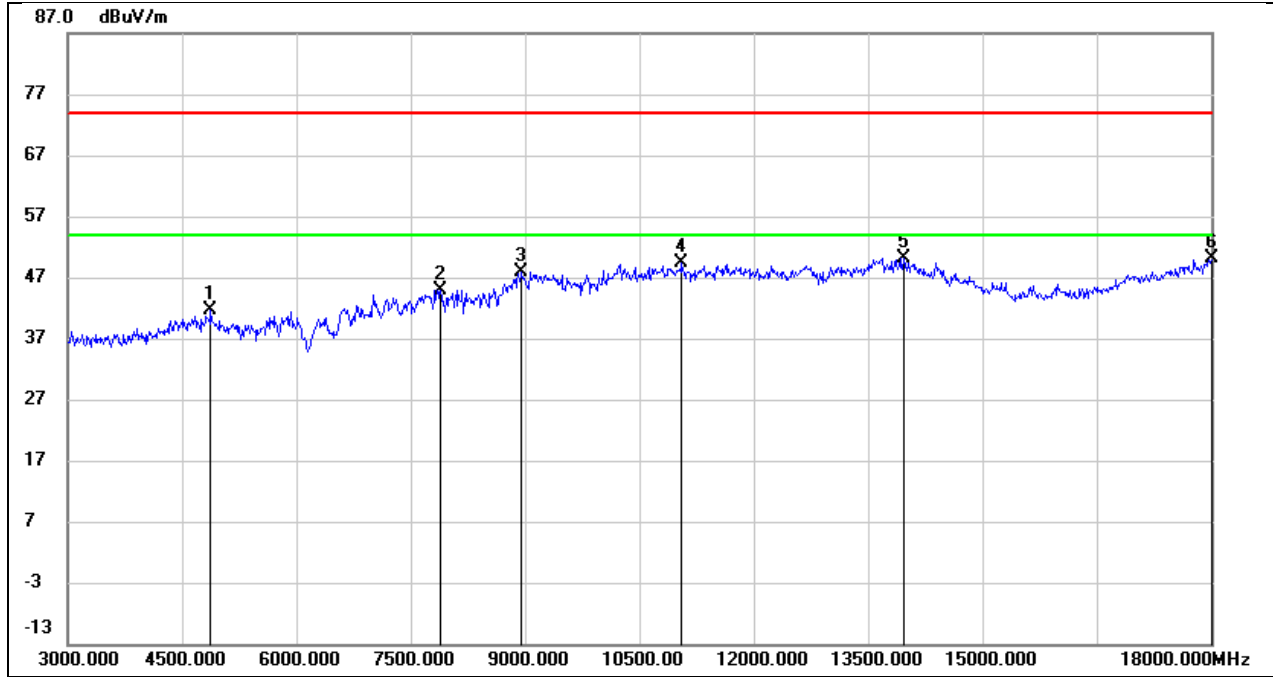


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.61	-0.03	41.58	74.00	-32.42	peak
2	7890.000	38.66	6.31	44.97	74.00	-29.03	peak
3	8955.000	37.66	10.16	47.82	74.00	-26.18	peak
4	11055.000	34.31	14.96	49.27	74.00	-24.73	peak
5	13965.000	28.22	21.89	50.11	74.00	-23.89	peak
6	18000.000	24.32	25.69	50.01	74.00	-23.99	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

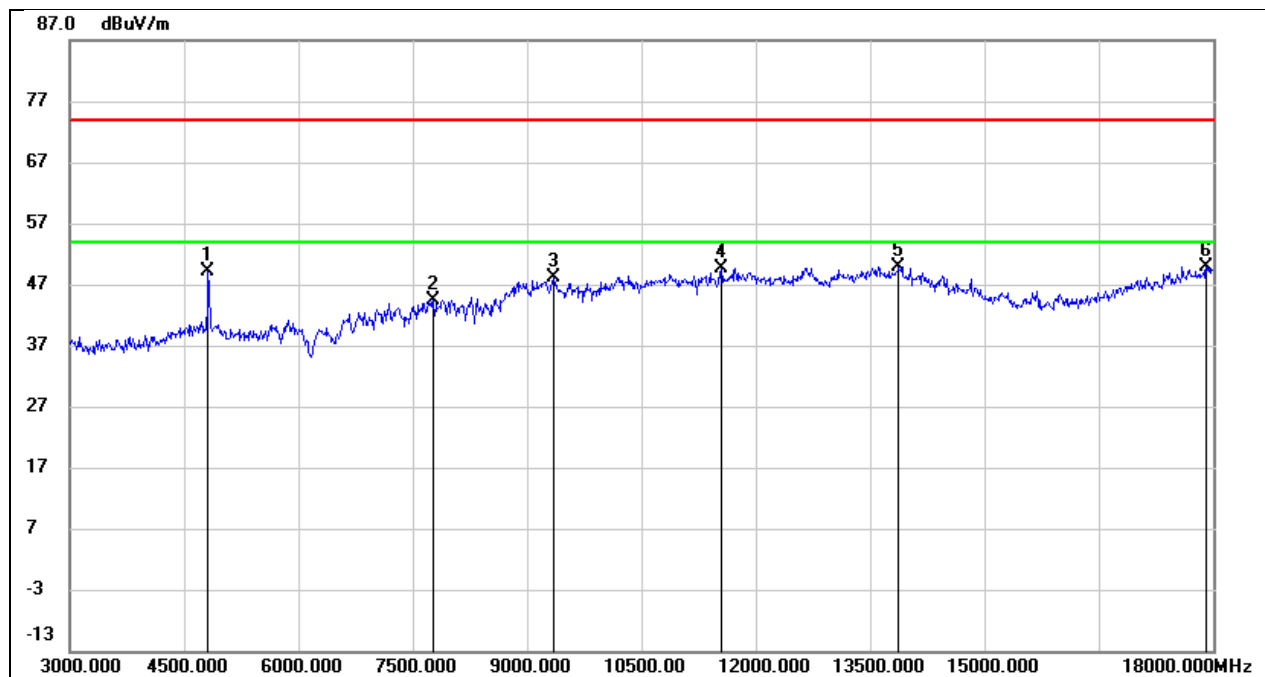


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	49.31	-0.26	49.05	74.00	-24.95	peak
2	7770.000	38.07	6.31	44.38	74.00	-29.62	peak
3	9345.000	37.56	10.63	48.19	74.00	-25.81	peak
4	11550.000	32.87	16.74	49.61	74.00	-24.39	peak
5	13875.000	28.16	21.70	49.86	74.00	-24.14	peak
6	17910.000	24.74	25.16	49.90	74.00	-24.10	peak

Test Mode:	802.11g	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 12 V

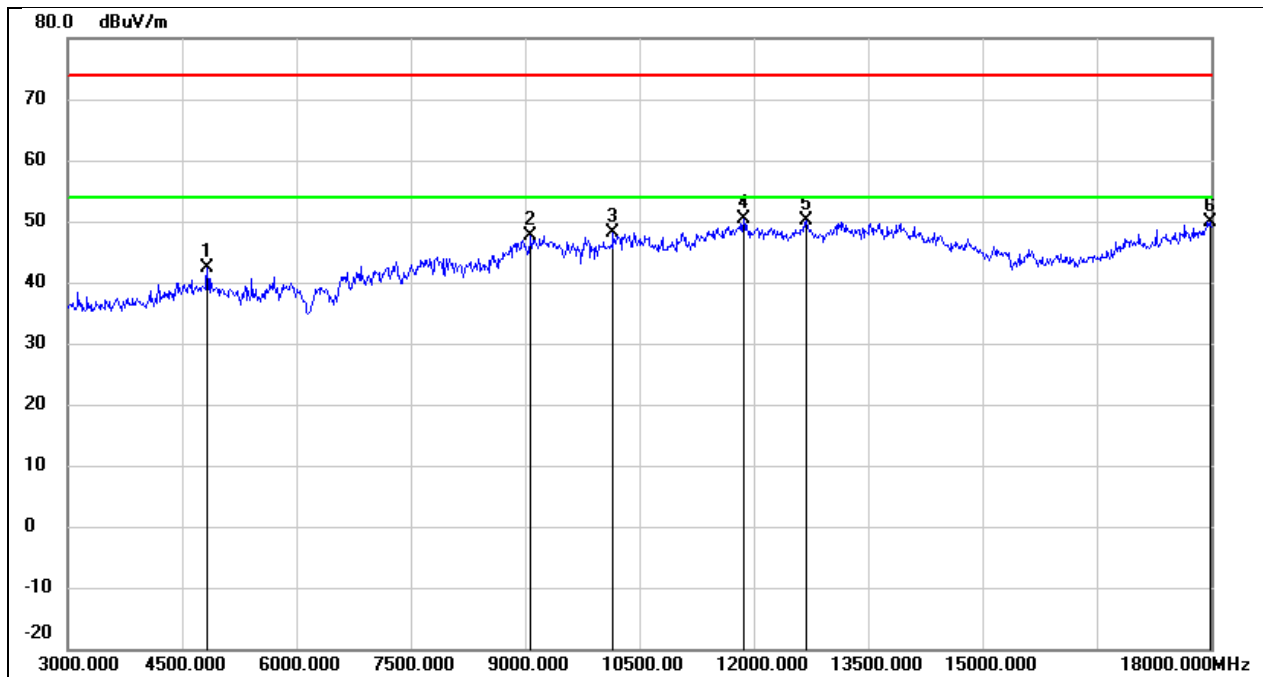


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	42.50	-0.20	42.30	74.00	-31.70	peak
2	9075.000	37.06	10.52	47.58	74.00	-26.42	peak
3	10155.000	35.85	12.32	48.17	74.00	-25.83	peak
4	11865.000	32.72	17.59	50.31	74.00	-23.69	peak
5	12690.000	32.15	18.02	50.17	74.00	-23.83	peak
6	17985.000	24.35	25.60	49.95	74.00	-24.05	peak

Test Mode:	802.11g	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

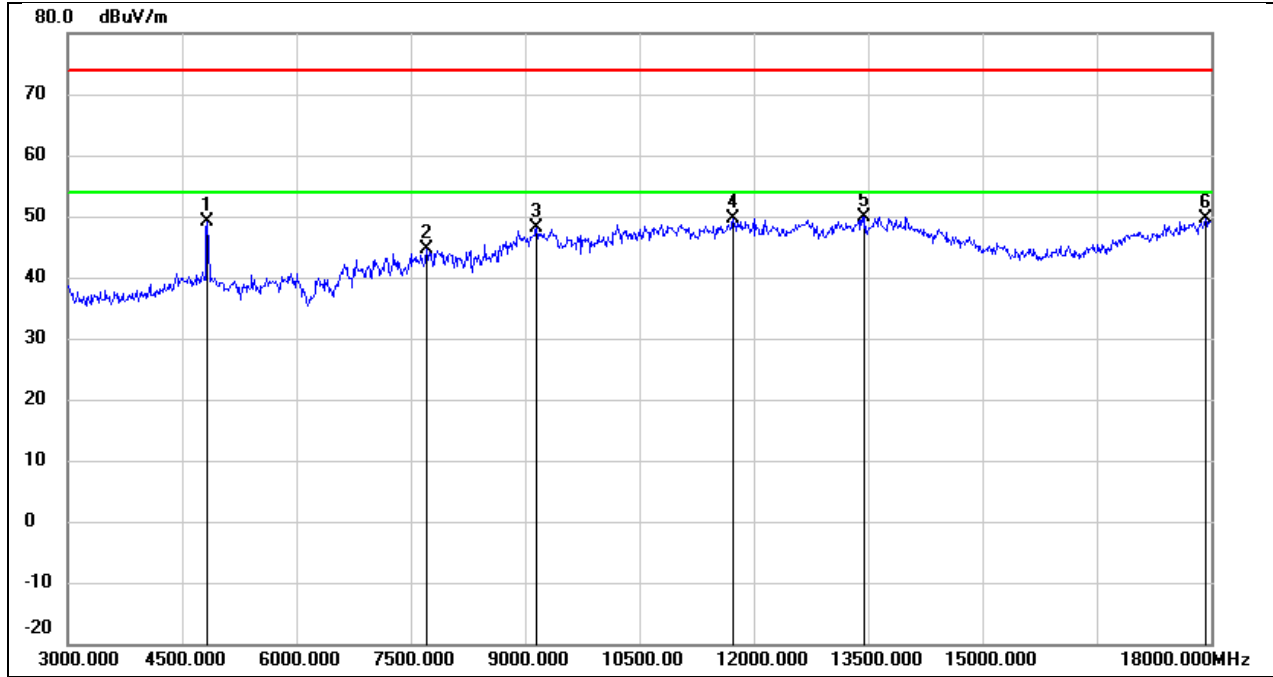


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	49.23	-0.20	49.03	74.00	-24.97	peak
2	7710.000	38.27	6.33	44.60	74.00	-29.40	peak
3	9150.000	37.59	10.54	48.13	74.00	-25.87	peak
4	11730.000	32.36	17.22	49.58	74.00	-24.42	peak
5	13455.000	29.18	20.71	49.89	74.00	-24.11	peak
6	17925.000	24.33	25.25	49.58	74.00	-24.42	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

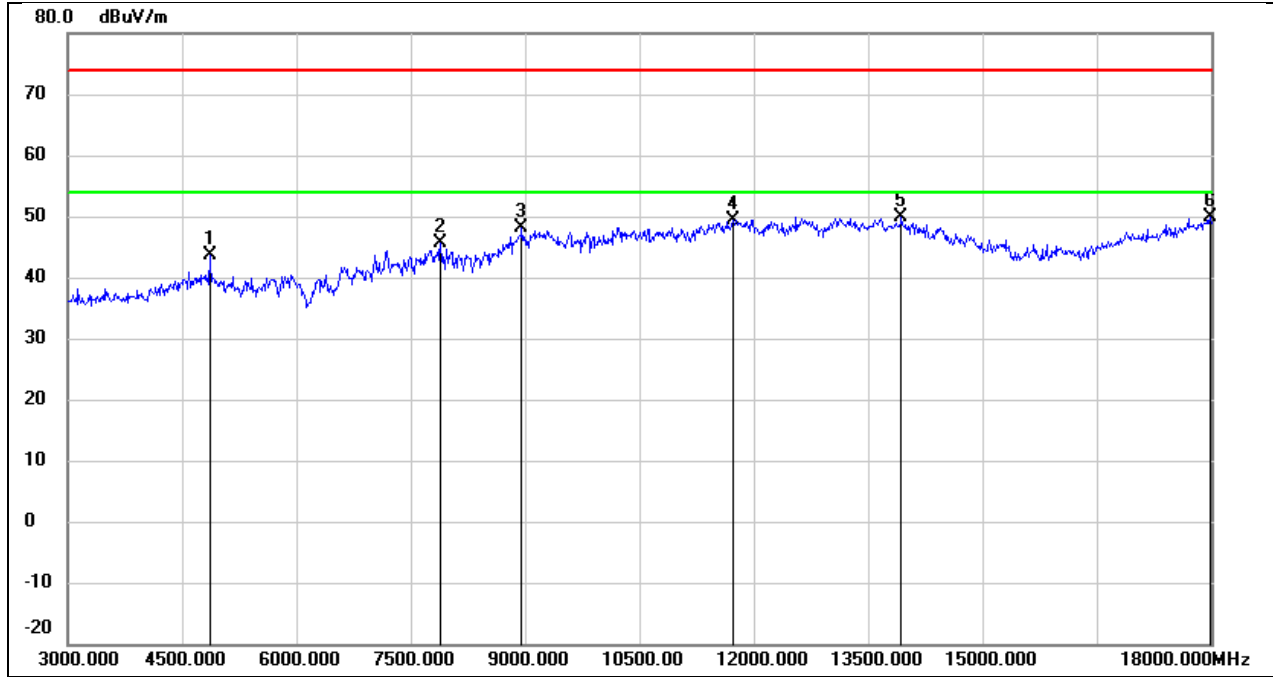


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	43.79	-0.09	43.70	74.00	-30.30	peak
2	7890.000	39.36	6.31	45.67	74.00	-28.33	peak
3	8955.000	37.94	10.16	48.10	74.00	-25.90	peak
4	11730.000	32.20	17.22	49.42	74.00	-24.58	peak
5	13935.000	28.09	21.82	49.91	74.00	-24.09	peak
6	17985.000	24.23	25.60	49.83	74.00	-24.17	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

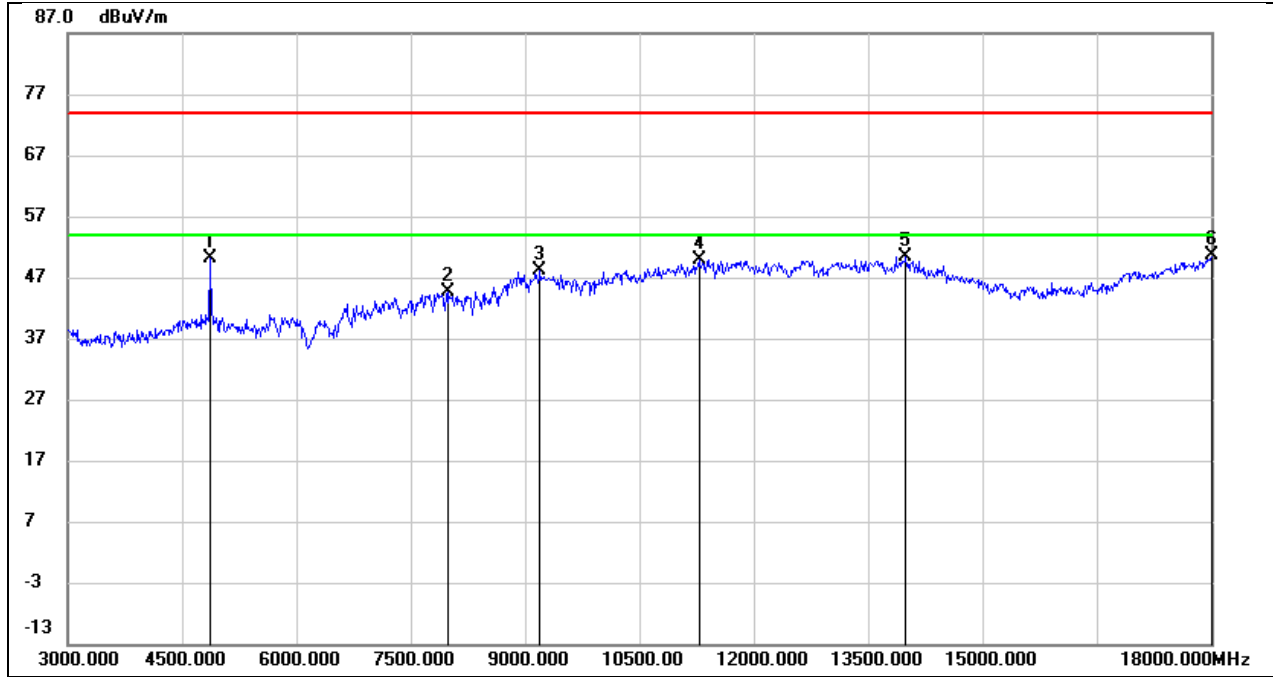


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	50.15	-0.09	50.06	74.00	-23.94	peak
2	7980.000	38.31	6.31	44.62	74.00	-29.38	peak
3	9195.000	37.65	10.56	48.21	74.00	-25.79	peak
4	11280.000	33.97	15.80	49.77	74.00	-24.23	peak
5	13995.000	28.49	21.95	50.44	74.00	-23.56	peak
6	18000.000	24.92	25.69	50.61	74.00	-23.39	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 12 V

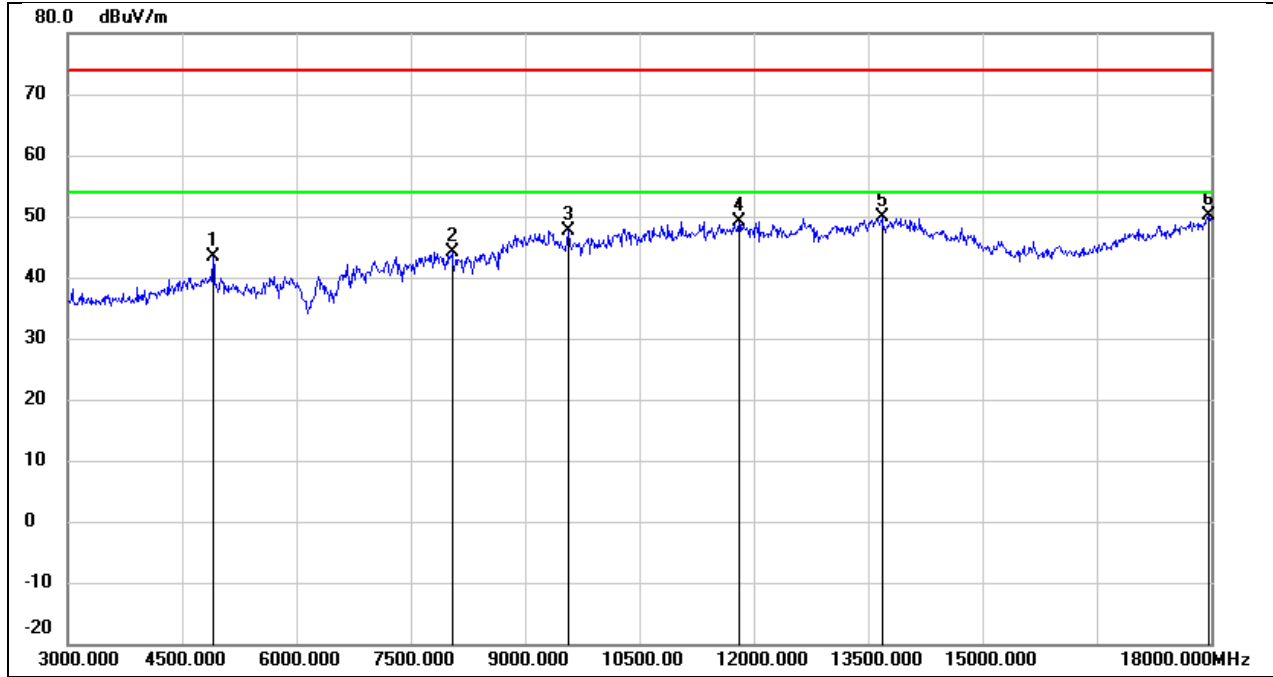


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	43.35	0.09	43.44	74.00	-30.56	peak
2	8040.000	37.91	6.34	44.25	74.00	-29.75	peak
3	9570.000	36.84	10.87	47.71	74.00	-26.29	peak
4	11805.000	31.80	17.43	49.23	74.00	-24.77	peak
5	13680.000	28.50	21.29	49.79	74.00	-24.21	peak
6	17970.000	24.54	25.51	50.05	74.00	-23.95	peak

Test Mode:	802.11g	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

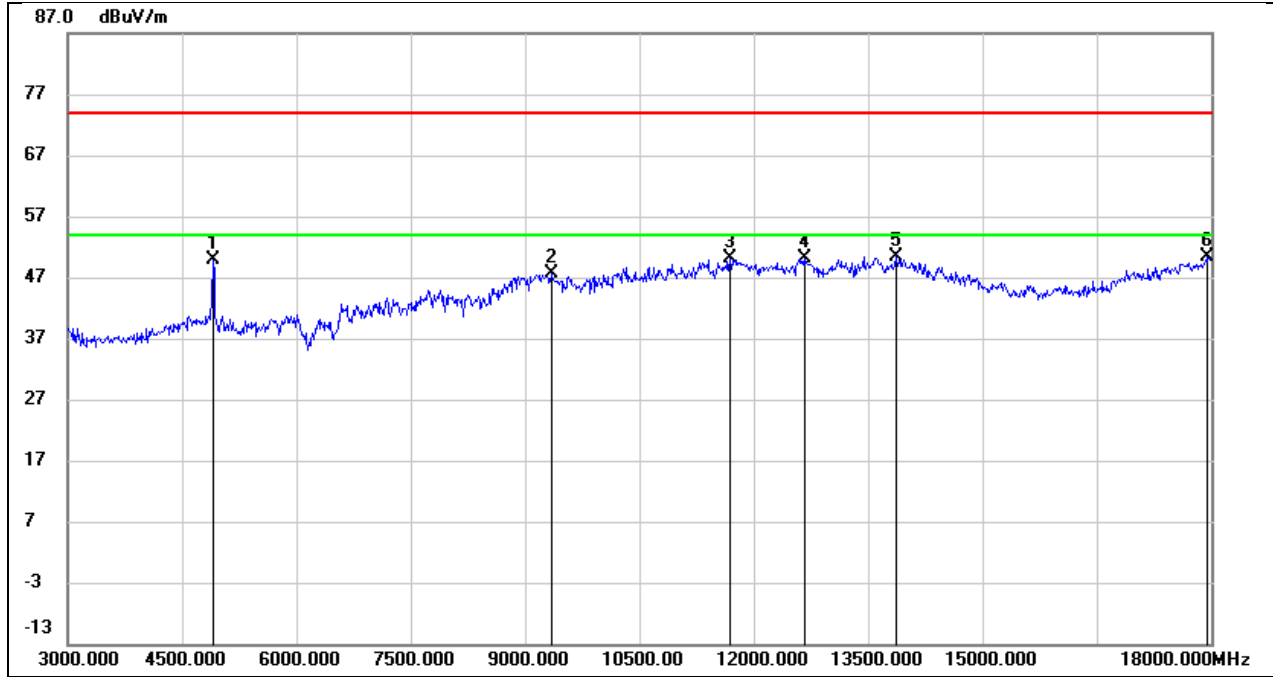


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	49.72	0.09	49.81	74.00	-24.19	peak
2	9345.000	36.91	10.63	47.54	74.00	-26.46	peak
3	11685.000	33.02	17.10	50.12	74.00	-23.88	peak
4	12660.000	32.19	17.95	50.14	74.00	-23.86	peak
5	13860.000	28.83	21.67	50.50	74.00	-23.50	peak
6	17940.000	25.04	25.34	50.38	74.00	-23.62	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 12 V

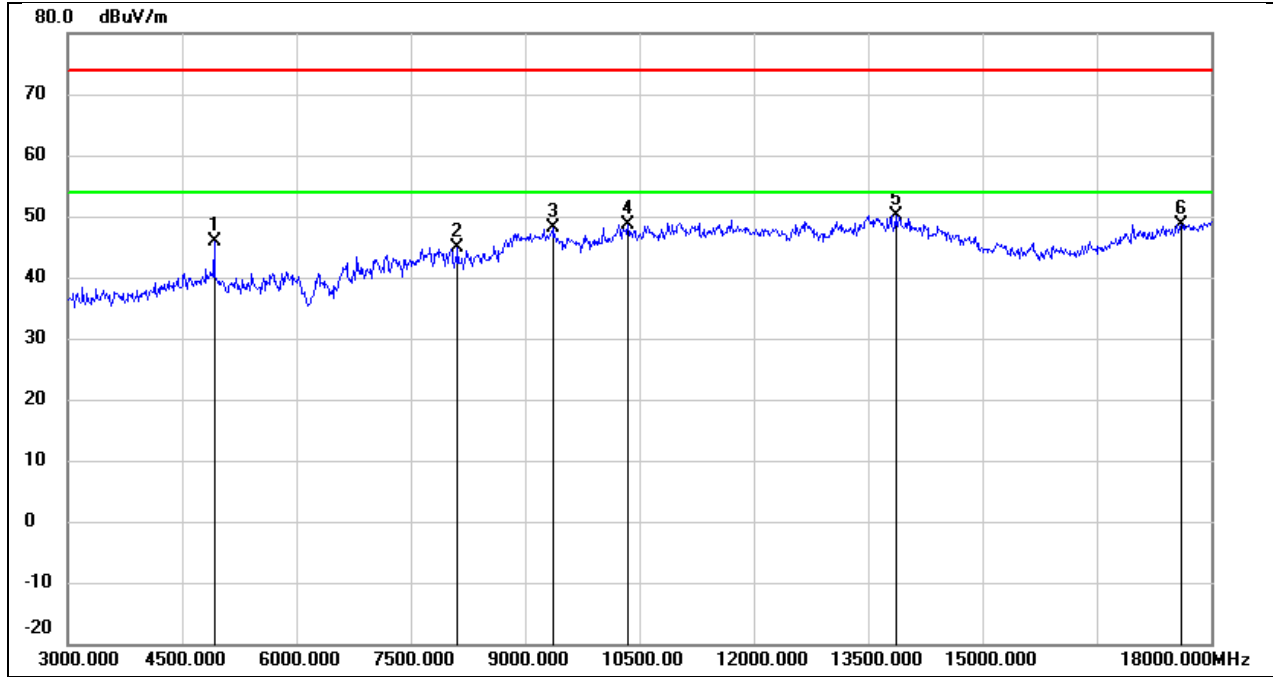


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	45.73	0.14	45.87	74.00	-28.13	peak
2	8115.000	38.37	6.43	44.80	74.00	-29.20	peak
3	9360.000	37.59	10.64	48.23	74.00	-25.77	peak
4	10350.000	35.90	12.70	48.60	74.00	-25.40	peak
5	13860.000	28.45	21.67	50.12	74.00	-23.88	peak
6	17610.000	25.35	23.38	48.73	74.00	-25.27	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

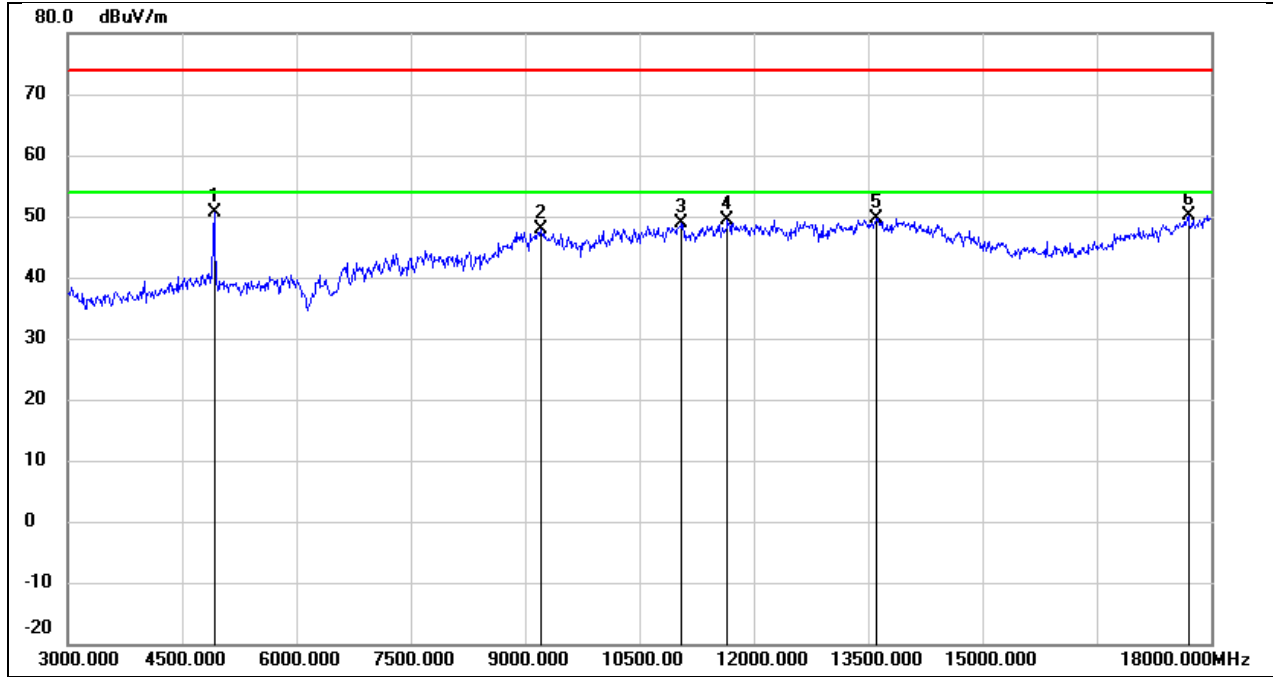


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.44	0.14	50.58	74.00	-23.42	peak
2	9210.000	37.19	10.57	47.76	74.00	-26.24	peak
3	11055.000	33.98	14.96	48.94	74.00	-25.06	peak
4	11655.000	32.25	17.01	49.26	74.00	-24.74	peak
5	13605.000	28.58	21.12	49.70	74.00	-24.30	peak
6	17700.000	26.19	23.91	50.10	74.00	-23.90	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

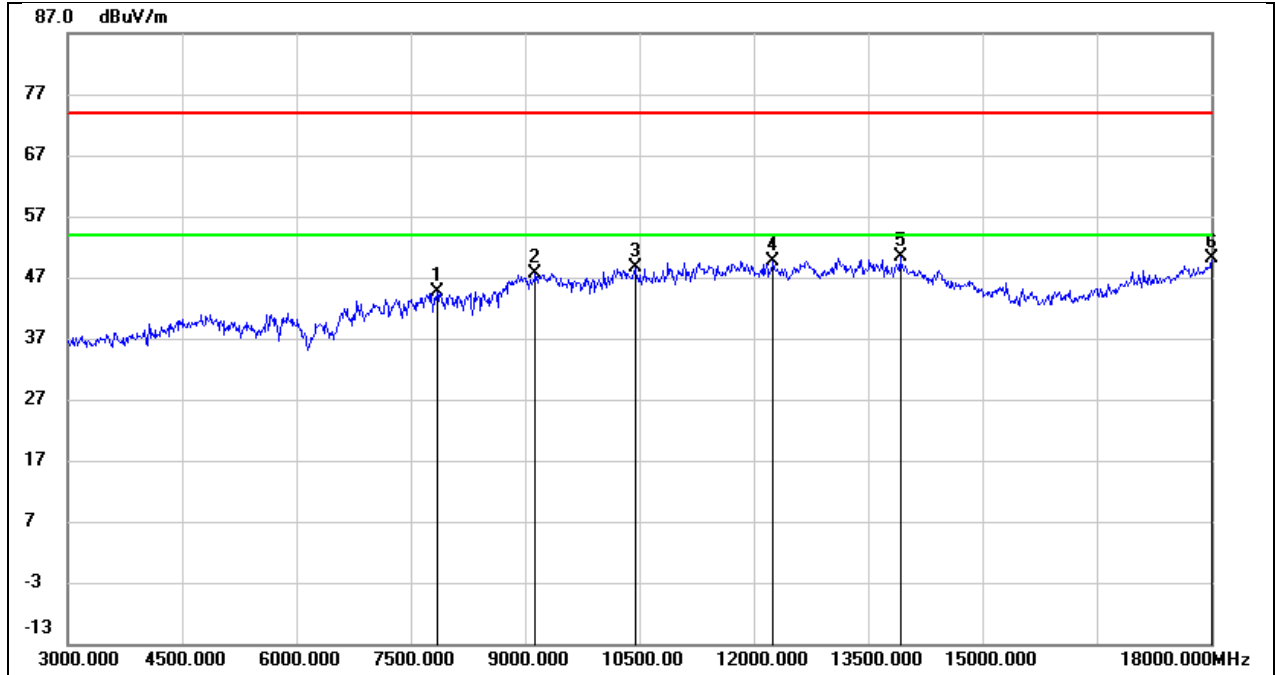


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7845.000	38.22	6.32	44.54	74.00	-29.46	peak
2	9135.000	37.12	10.55	47.67	74.00	-26.33	peak
3	10440.000	35.86	12.87	48.73	74.00	-25.27	peak
4	12255.000	31.91	17.78	49.69	74.00	-24.31	peak
5	13920.000	28.57	21.79	50.36	74.00	-23.64	peak
6	18000.000	24.49	25.69	50.18	74.00	-23.82	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

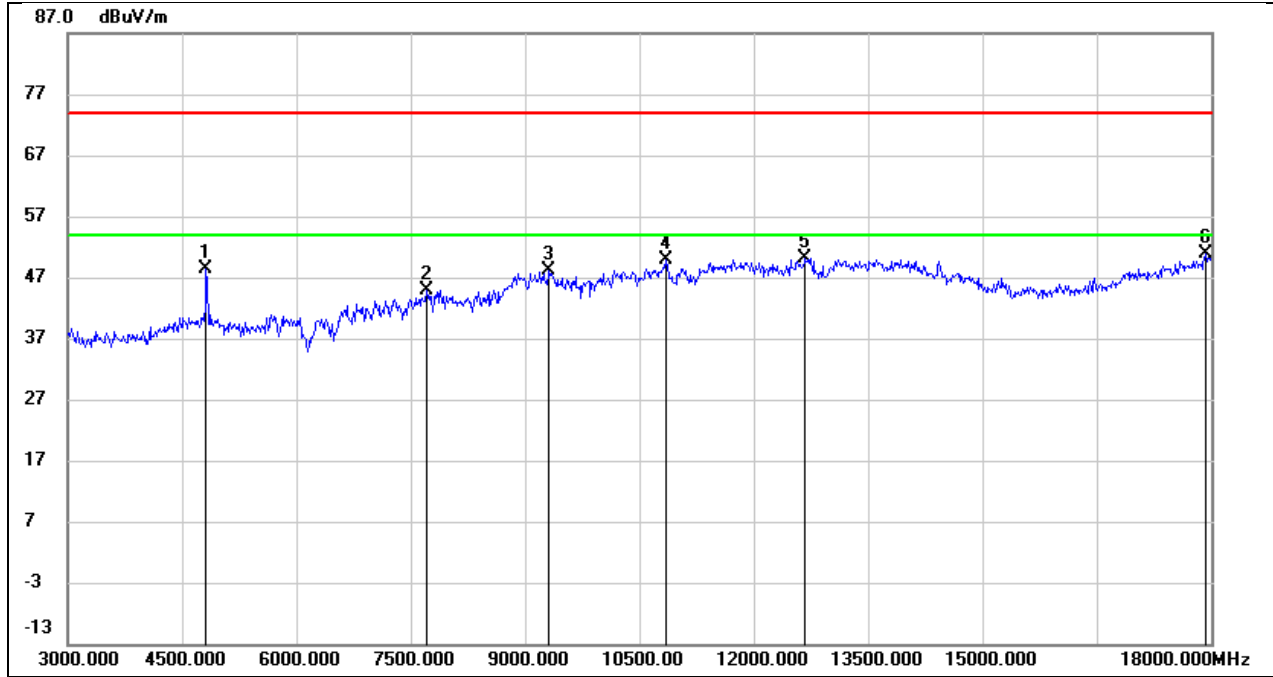


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	48.54	-0.26	48.28	74.00	-25.72	peak
2	7710.000	38.57	6.33	44.90	74.00	-29.10	peak
3	9315.000	37.62	10.61	48.23	74.00	-25.77	peak
4	10845.000	35.57	14.21	49.78	74.00	-24.22	peak
5	12675.000	32.19	17.99	50.18	74.00	-23.82	peak
6	17925.000	25.69	25.25	50.94	74.00	-23.06	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 12 V

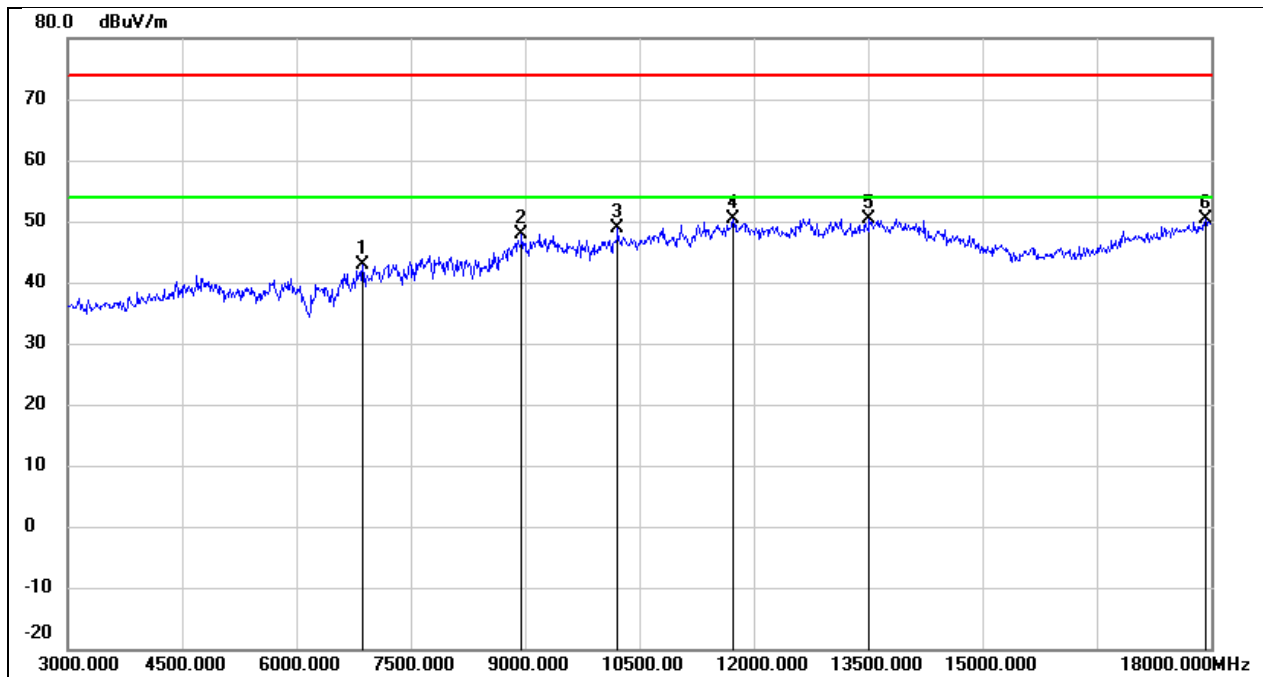


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6870.000	36.83	6.05	42.88	74.00	-31.12	peak
2	8955.000	37.66	10.16	47.82	74.00	-26.18	peak
3	10215.000	36.38	12.43	48.81	74.00	-25.19	peak
4	11730.000	33.21	17.22	50.43	74.00	-23.57	peak
5	13515.000	29.55	20.93	50.48	74.00	-23.52	peak
6	17925.000	25.09	25.25	50.34	74.00	-23.66	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

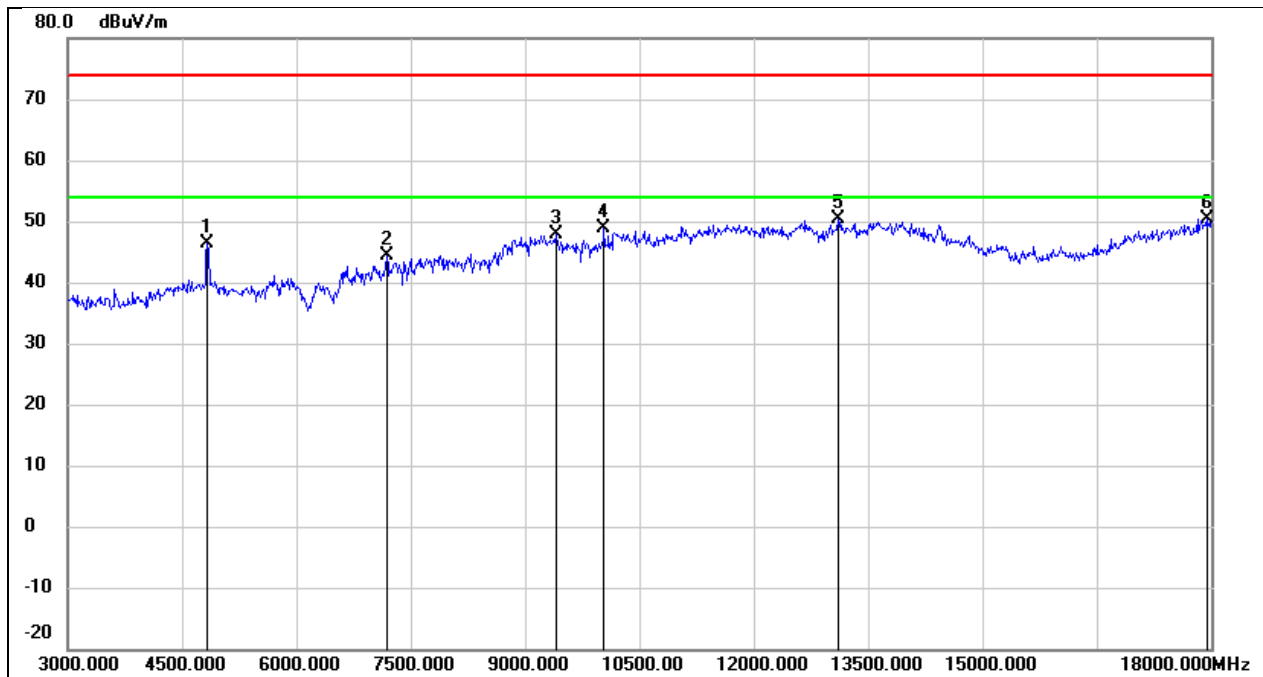


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	46.65	-0.20	46.45	74.00	-27.55	peak
2	7185.000	37.72	6.55	44.27	74.00	-29.73	peak
3	9405.000	37.21	10.66	47.87	74.00	-26.13	peak
4	10035.000	36.68	12.08	48.76	74.00	-25.24	peak
5	13110.000	31.10	19.20	50.30	74.00	-23.70	peak
6	17940.000	25.04	25.34	50.38	74.00	-23.62	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

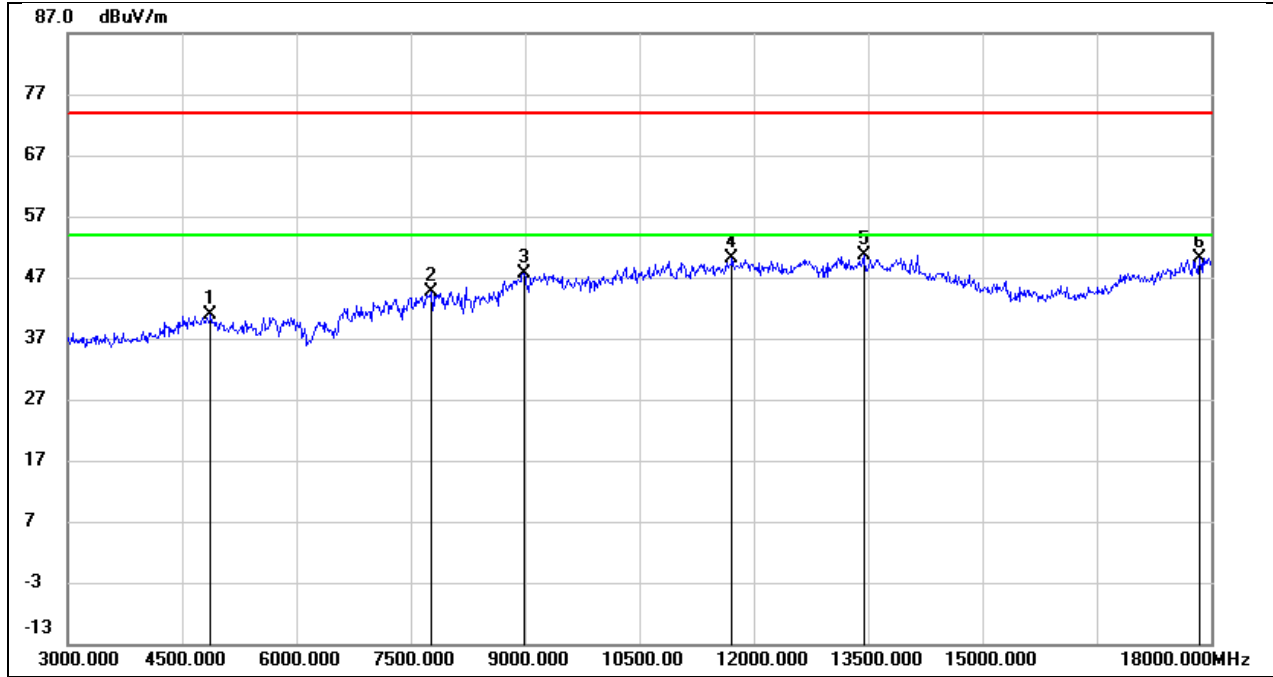


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.01	-0.03	40.98	74.00	-33.02	peak
2	7770.000	38.23	6.31	44.54	74.00	-29.46	peak
3	8985.000	37.30	10.37	47.67	74.00	-26.33	peak
4	11715.000	32.95	17.19	50.14	74.00	-23.86	peak
5	13440.000	30.06	20.64	50.70	74.00	-23.30	peak
6	17850.000	25.24	24.81	50.05	74.00	-23.95	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

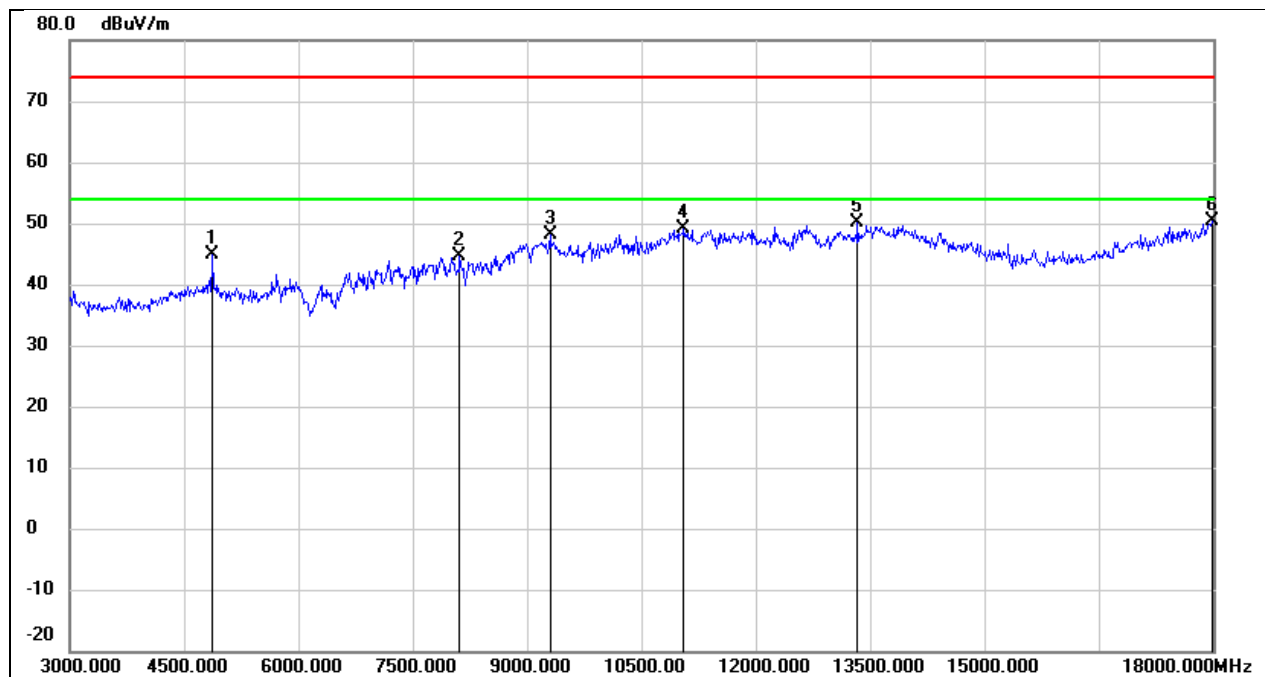


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.85	-0.03	44.82	74.00	-29.18	peak
2	8115.000	38.11	6.43	44.54	74.00	-29.46	peak
3	9300.000	37.53	10.61	48.14	74.00	-25.86	peak
4	11055.000	34.18	14.96	49.14	74.00	-24.86	peak
5	13335.000	29.88	20.18	50.06	74.00	-23.94	peak
6	17985.000	24.68	25.60	50.28	74.00	-23.72	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 12 V

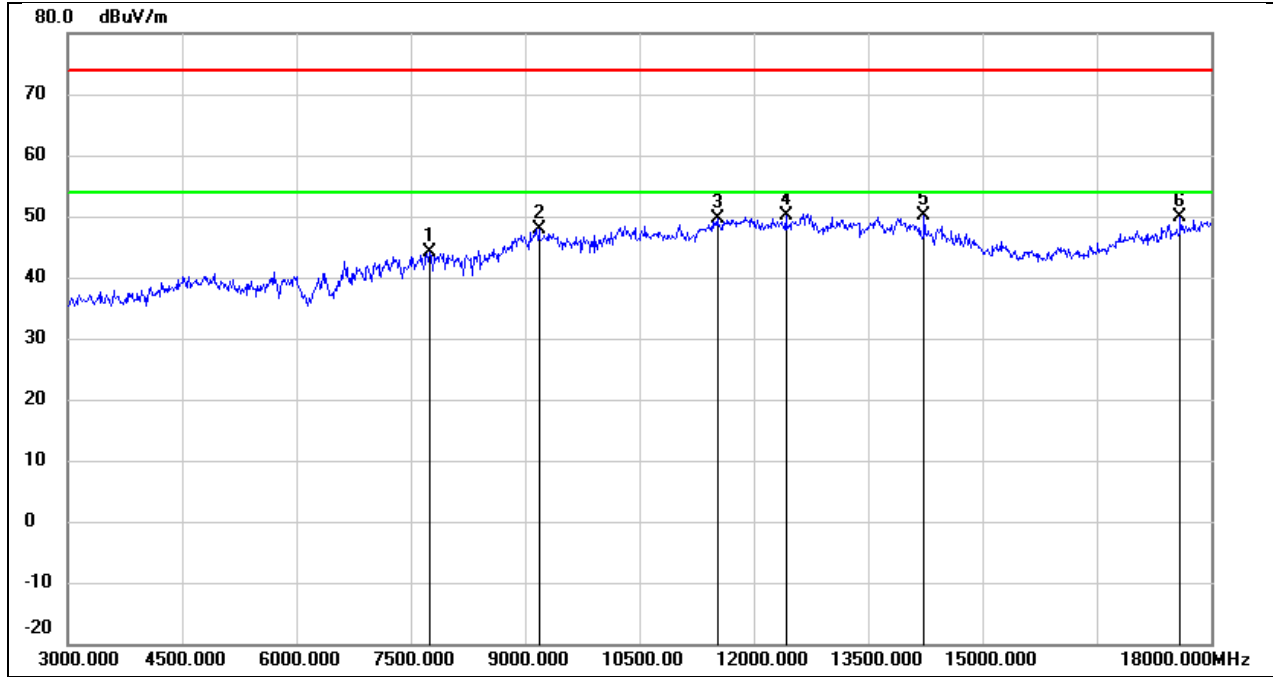


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7740.000	37.86	6.32	44.18	74.00	-29.82	peak
2	9180.000	37.27	10.56	47.83	74.00	-26.17	peak
3	11520.000	33.01	16.65	49.66	74.00	-24.34	peak
4	12420.000	32.54	17.66	50.20	74.00	-23.80	peak
5	14235.000	29.03	20.99	50.02	74.00	-23.98	peak
6	17595.000	26.63	23.29	49.92	74.00	-24.08	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

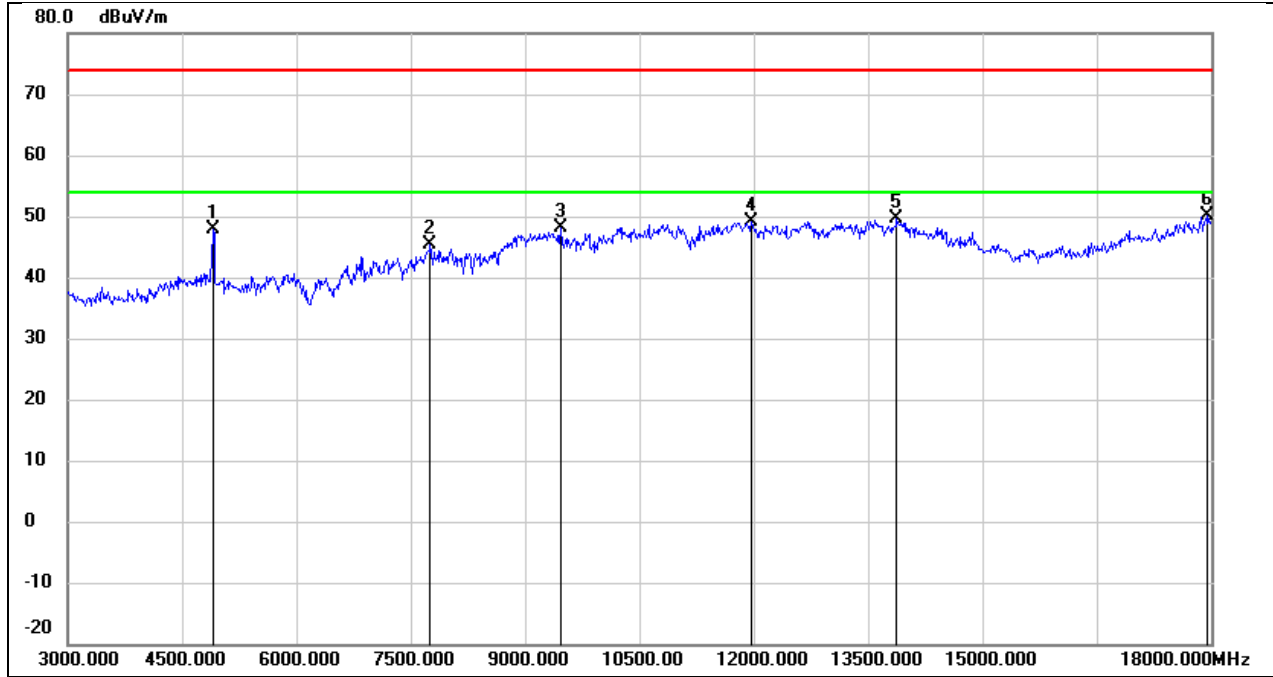


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	47.75	0.09	47.84	74.00	-26.16	peak
2	7755.000	39.07	6.31	45.38	74.00	-28.62	peak
3	9465.000	37.39	10.68	48.07	74.00	-25.93	peak
4	11970.000	31.16	17.88	49.04	74.00	-24.96	peak
5	13875.000	27.94	21.70	49.64	74.00	-24.36	peak
6	17955.000	24.68	25.42	50.10	74.00	-23.90	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 12 V

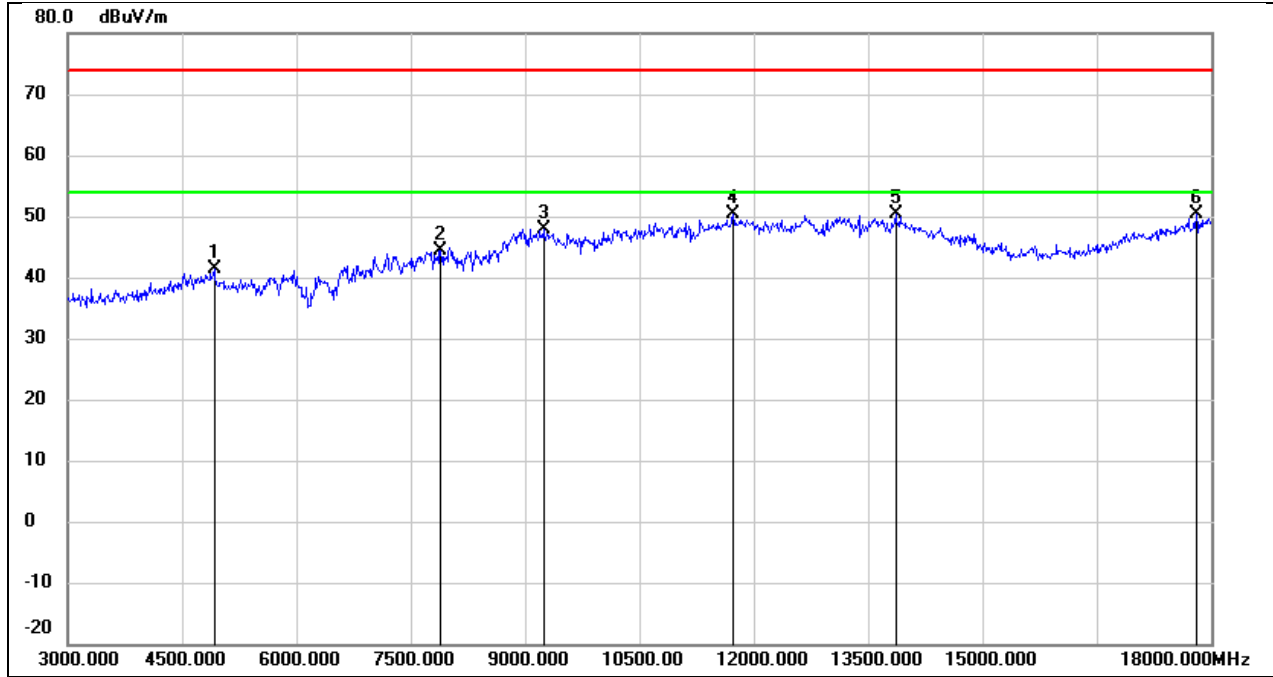


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	41.12	0.14	41.26	74.00	-32.74	peak
2	7890.000	38.18	6.31	44.49	74.00	-29.51	peak
3	9240.000	37.39	10.58	47.97	74.00	-26.03	peak
4	11730.000	33.10	17.22	50.32	74.00	-23.68	peak
5	13860.000	28.62	21.67	50.29	74.00	-23.71	peak
6	17805.000	25.93	24.54	50.47	74.00	-23.53	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

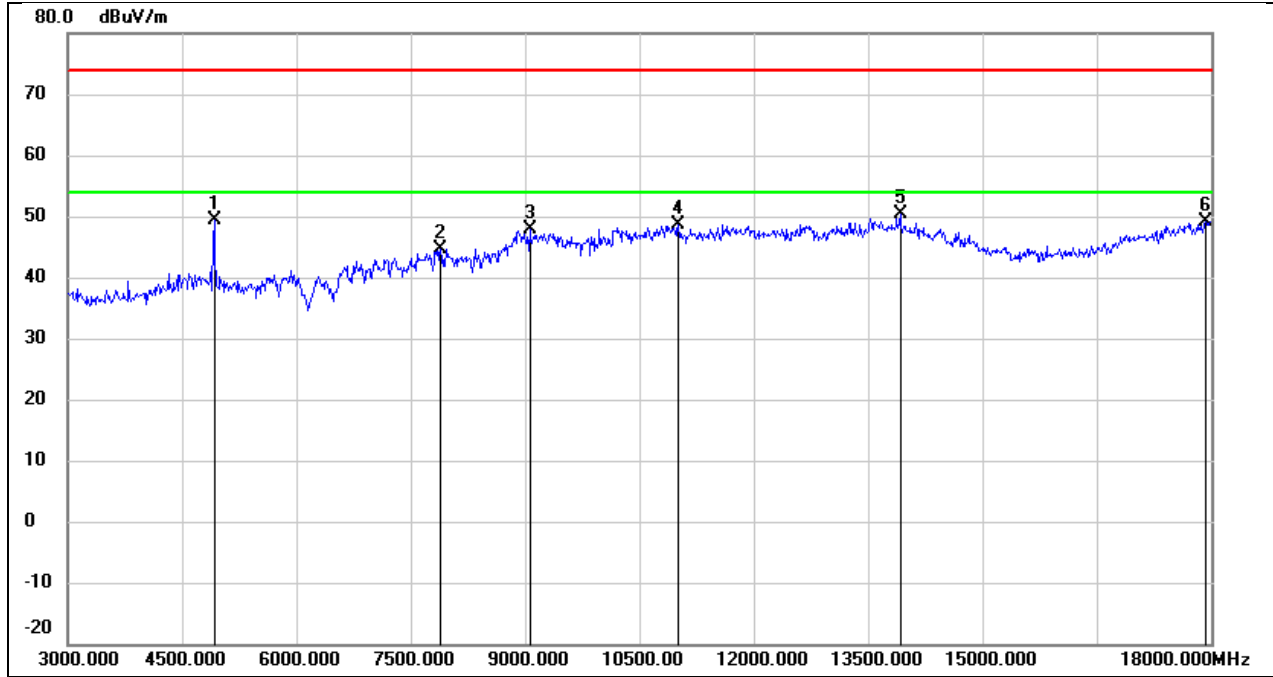


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	49.35	0.14	49.49	74.00	-24.51	peak
2	7890.000	38.26	6.31	44.57	74.00	-29.43	peak
3	9060.000	37.29	10.51	47.80	74.00	-26.20	peak
4	11010.000	33.75	14.81	48.56	74.00	-25.44	peak
5	13920.000	28.63	21.79	50.42	74.00	-23.58	peak
6	17925.000	23.97	25.25	49.22	74.00	-24.78	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 12 V

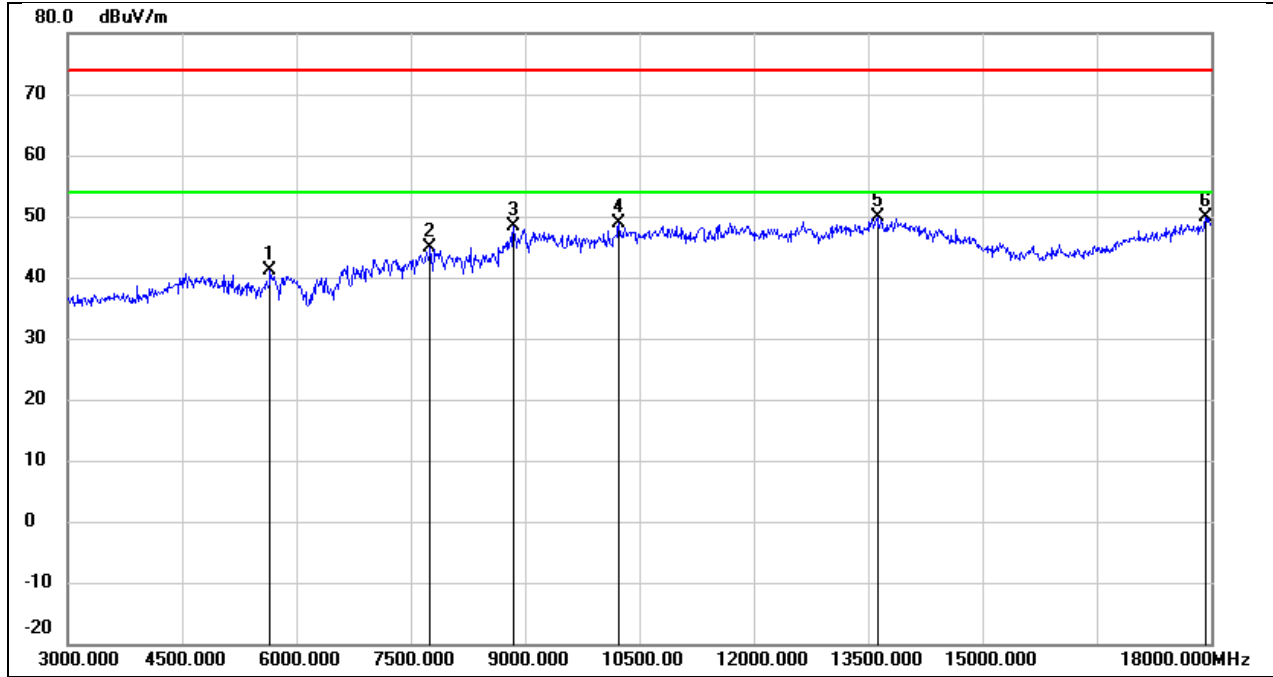


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.81	1.29	41.10	74.00	-32.90	peak
2	7755.000	38.62	6.31	44.93	74.00	-29.07	peak
3	8850.000	38.99	9.39	48.38	74.00	-25.62	peak
4	10230.000	36.52	12.46	48.98	74.00	-25.02	peak
5	13620.000	28.66	21.15	49.81	74.00	-24.19	peak
6	17925.000	24.53	25.25	49.78	74.00	-24.22	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

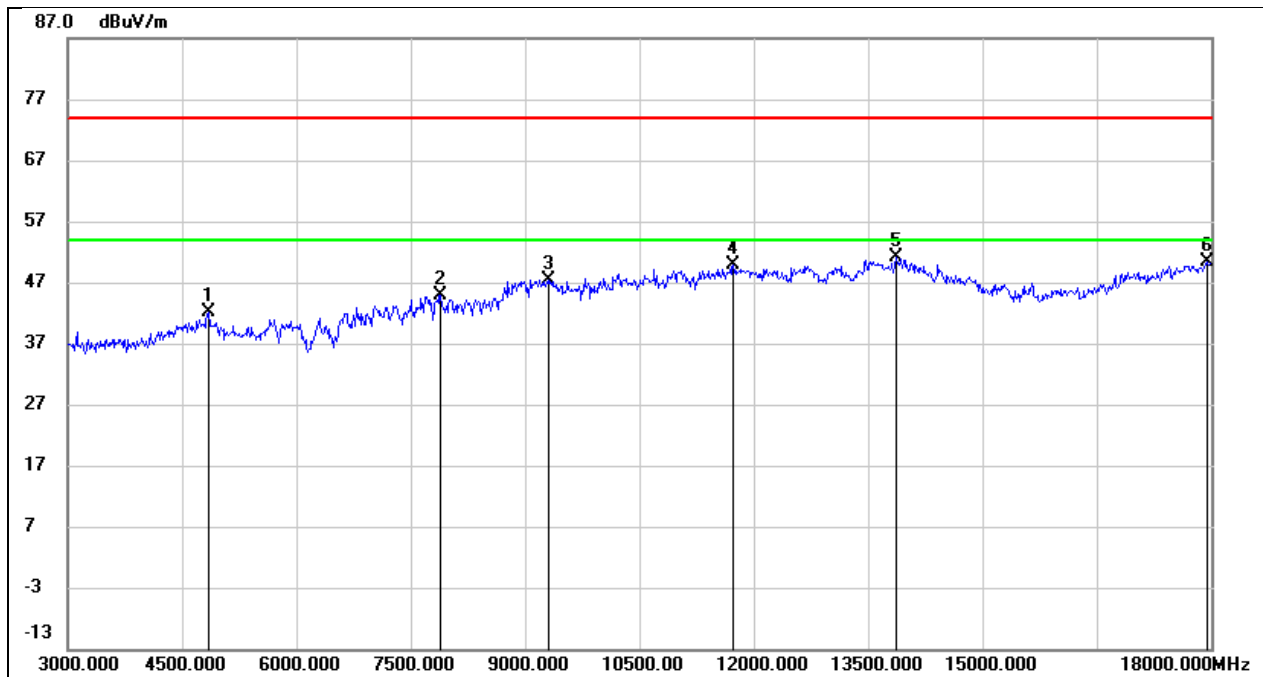


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	42.24	-0.15	42.09	74.00	-31.91	peak
2	7890.000	38.65	6.31	44.96	74.00	-29.04	peak
3	9300.000	36.80	10.61	47.41	74.00	-26.59	peak
4	11730.000	32.75	17.22	49.97	74.00	-24.03	peak
5	13860.000	29.55	21.67	51.22	74.00	-22.78	peak
6	17955.000	24.90	25.42	50.32	74.00	-23.68	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2427
Polarity:	Horizontal	Test Voltage:	DC 12 V

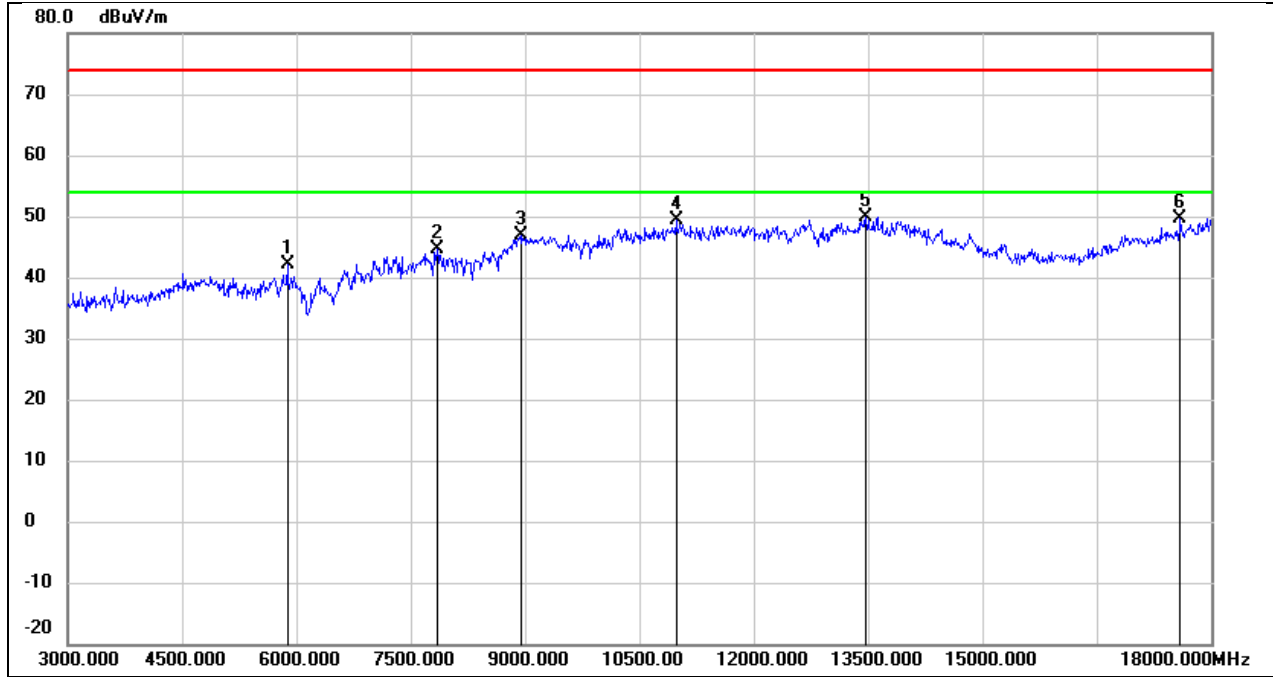


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	40.30	1.92	42.22	74.00	-31.78	peak
2	7845.000	38.30	6.32	44.62	74.00	-29.38	peak
3	8940.000	36.80	10.04	46.84	74.00	-27.16	peak
4	10980.000	34.74	14.69	49.43	74.00	-24.57	peak
5	13470.000	29.08	20.77	49.85	74.00	-24.15	peak
6	17595.000	26.29	23.29	49.58	74.00	-24.42	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

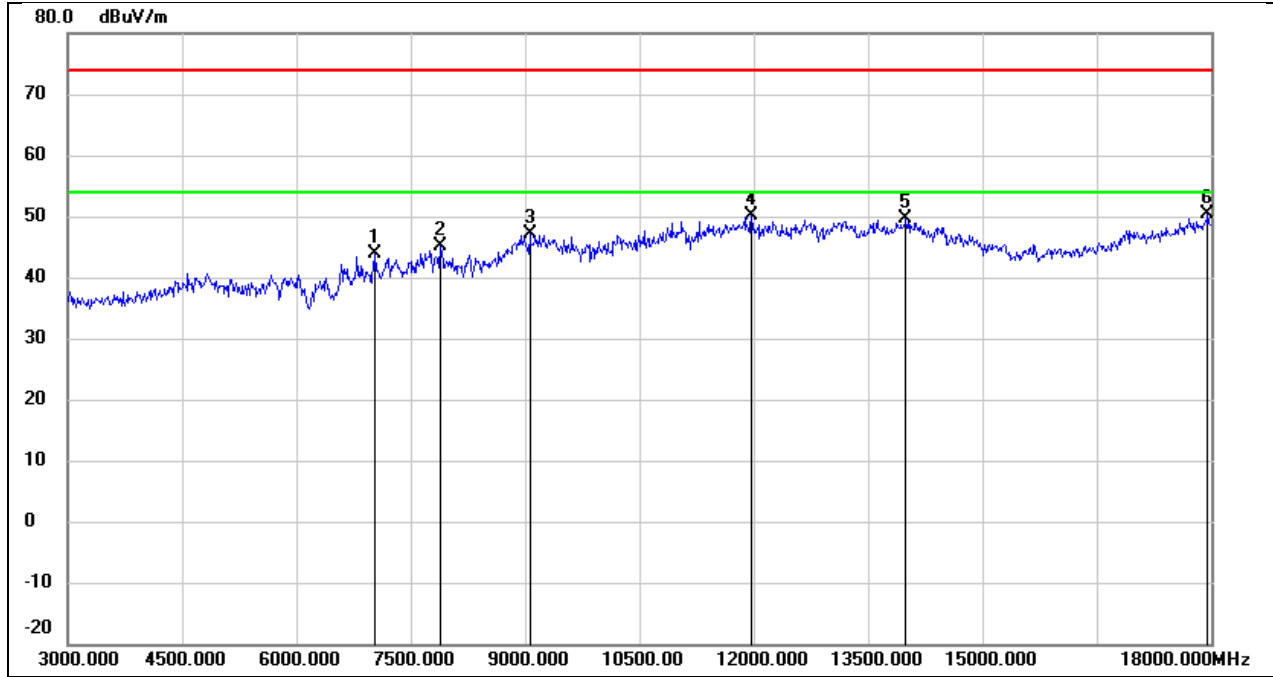


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	37.13	6.67	43.80	74.00	-30.20	peak
2	7890.000	38.87	6.31	45.18	74.00	-28.82	peak
3	9060.000	36.58	10.51	47.09	74.00	-26.91	peak
4	11970.000	32.13	17.88	50.01	74.00	-23.99	peak
5	13995.000	27.57	21.95	49.52	74.00	-24.48	peak
6	17955.000	24.99	25.42	50.41	74.00	-23.59	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

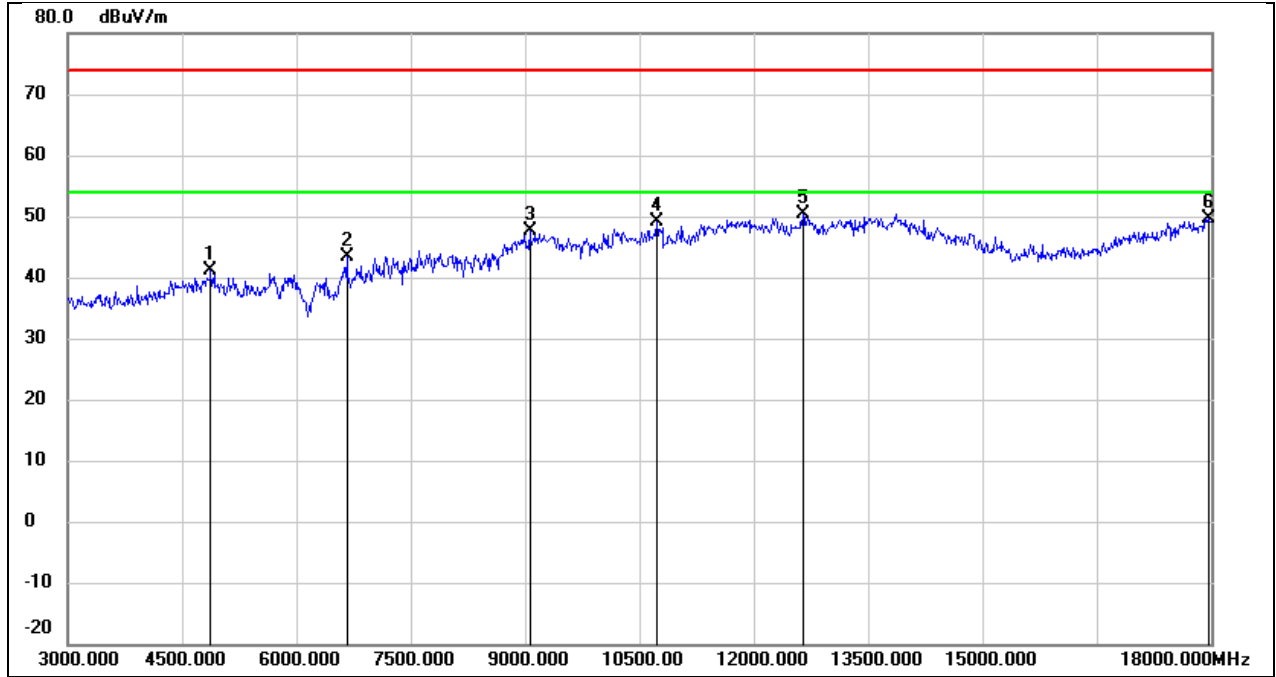


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.11	-0.03	41.08	74.00	-32.92	peak
2	6660.000	38.34	5.02	43.36	74.00	-30.64	peak
3	9060.000	37.08	10.51	47.59	74.00	-26.41	peak
4	10725.000	35.36	13.79	49.15	74.00	-24.85	peak
5	12645.000	32.52	17.92	50.44	74.00	-23.56	peak
6	17970.000	24.23	25.51	49.74	74.00	-24.26	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

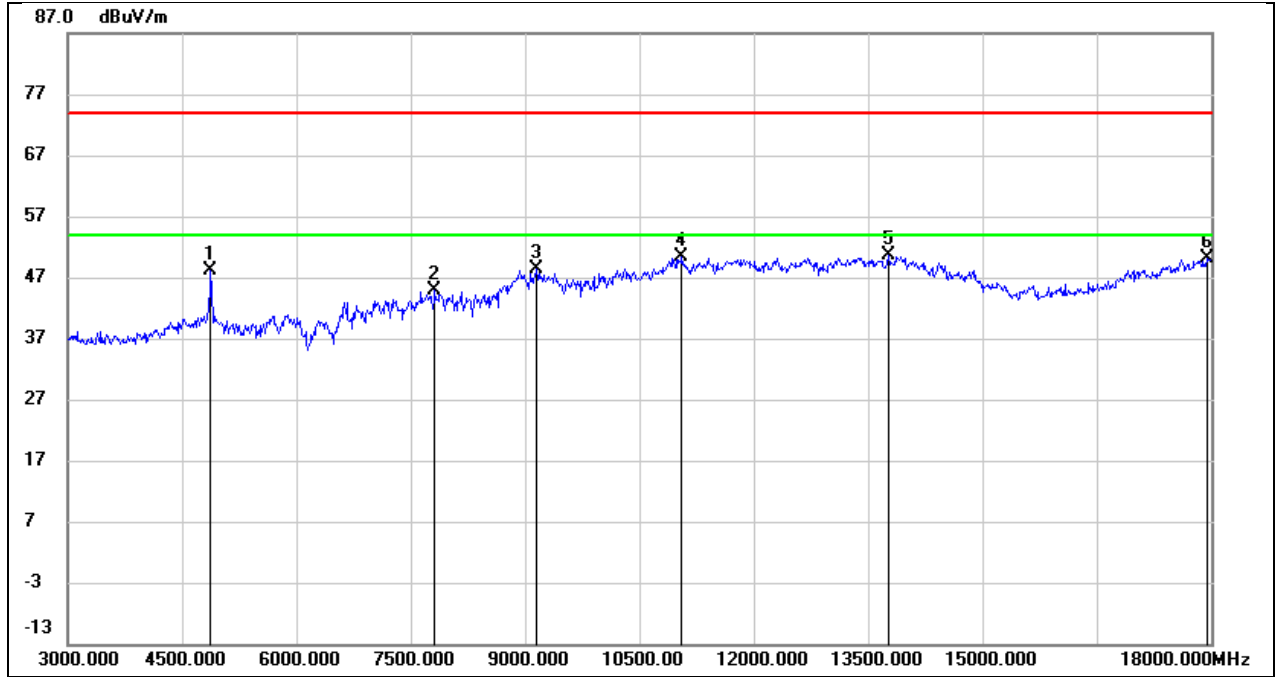


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	48.21	-0.03	48.18	74.00	-25.82	peak
2	7815.000	38.51	6.32	44.83	74.00	-29.17	peak
3	9150.000	37.76	10.54	48.30	74.00	-25.70	peak
4	11055.000	35.38	14.96	50.34	74.00	-23.66	peak
5	13770.000	29.16	21.47	50.63	74.00	-23.37	peak
6	17940.000	24.82	25.34	50.16	74.00	-23.84	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2447
Polarity:	Horizontal	Test Voltage:	DC 12 V

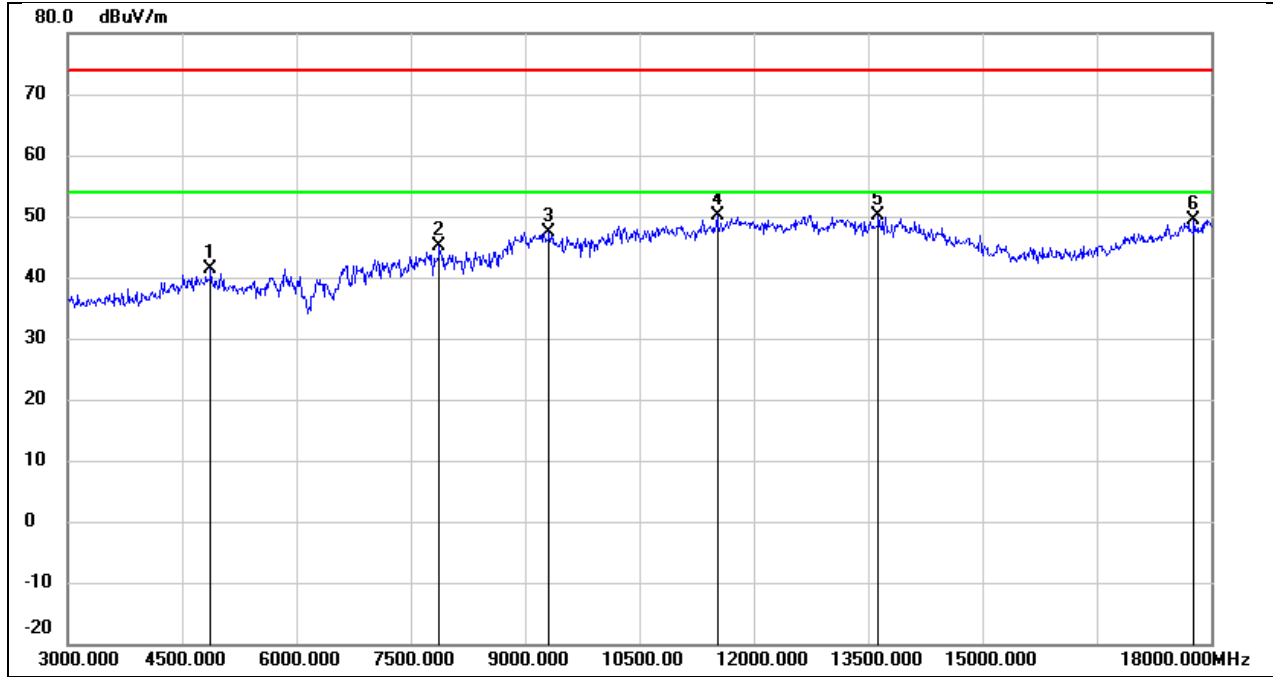


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.34	-0.03	41.31	74.00	-32.69	peak
2	7875.000	38.85	6.31	45.16	74.00	-28.84	peak
3	9315.000	36.78	10.61	47.39	74.00	-26.61	peak
4	11520.000	33.42	16.65	50.07	74.00	-23.93	peak
5	13635.000	28.93	21.19	50.12	74.00	-23.88	peak
6	17775.000	25.11	24.36	49.47	74.00	-24.53	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

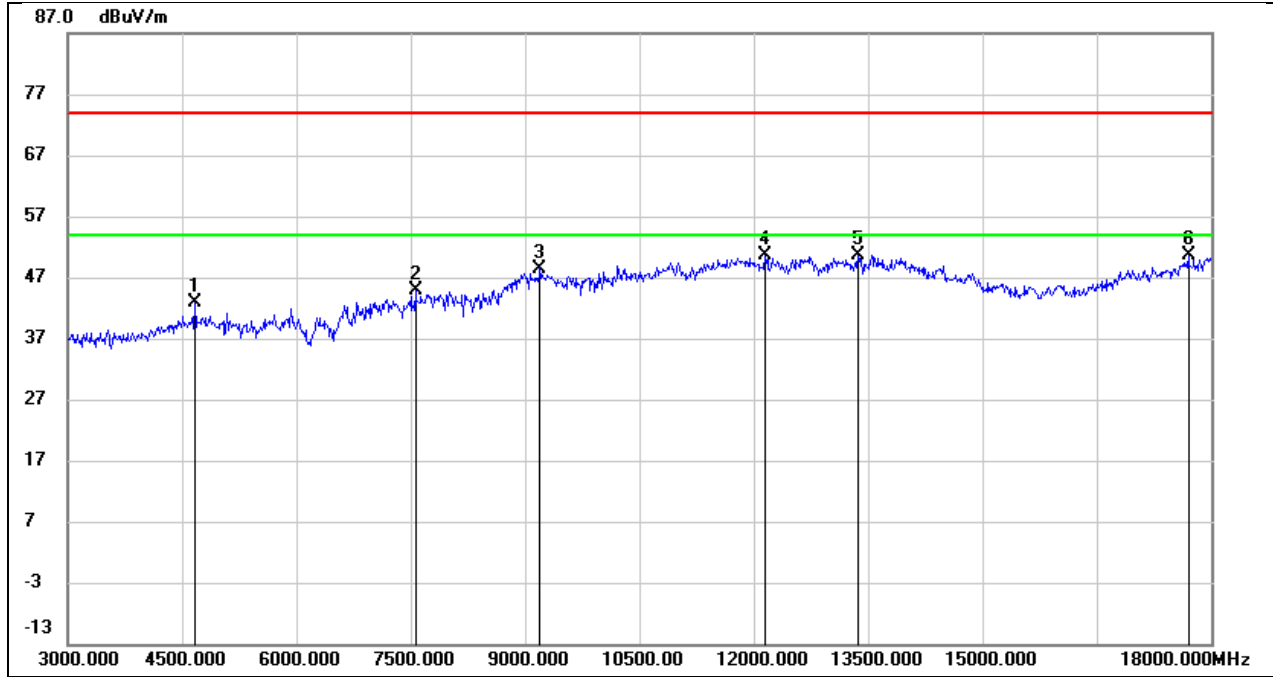


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	43.71	-0.83	42.88	74.00	-31.12	peak
2	7560.000	38.53	6.33	44.86	74.00	-29.14	peak
3	9195.000	37.94	10.56	48.50	74.00	-25.50	peak
4	12150.000	32.71	17.86	50.57	74.00	-23.43	peak
5	13365.000	30.40	20.31	50.71	74.00	-23.29	peak
6	17700.000	26.76	23.91	50.67	74.00	-23.33	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 12 V

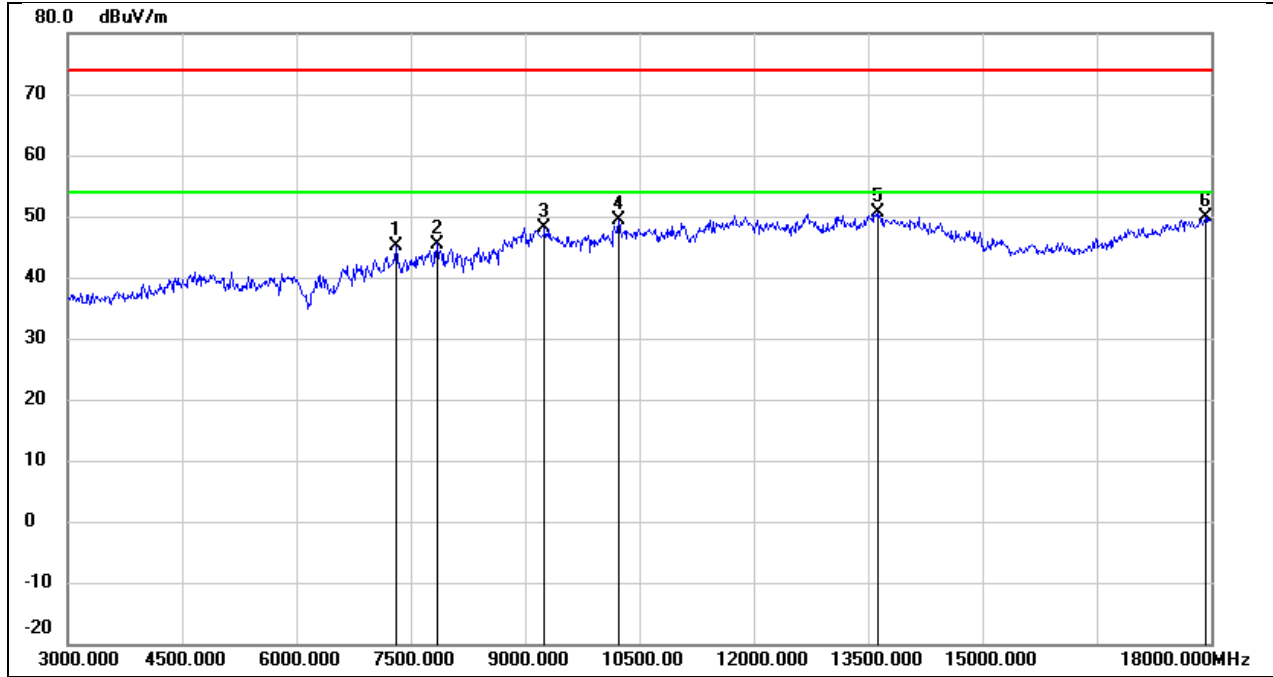


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	38.72	6.47	45.19	74.00	-28.81	peak
2	7845.000	39.18	6.32	45.50	74.00	-28.50	peak
3	9255.000	37.59	10.59	48.18	74.00	-25.82	peak
4	10230.000	36.96	12.46	49.42	74.00	-24.58	peak
5	13635.000	29.56	21.19	50.75	74.00	-23.25	peak
6	17925.000	24.73	25.25	49.98	74.00	-24.02	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

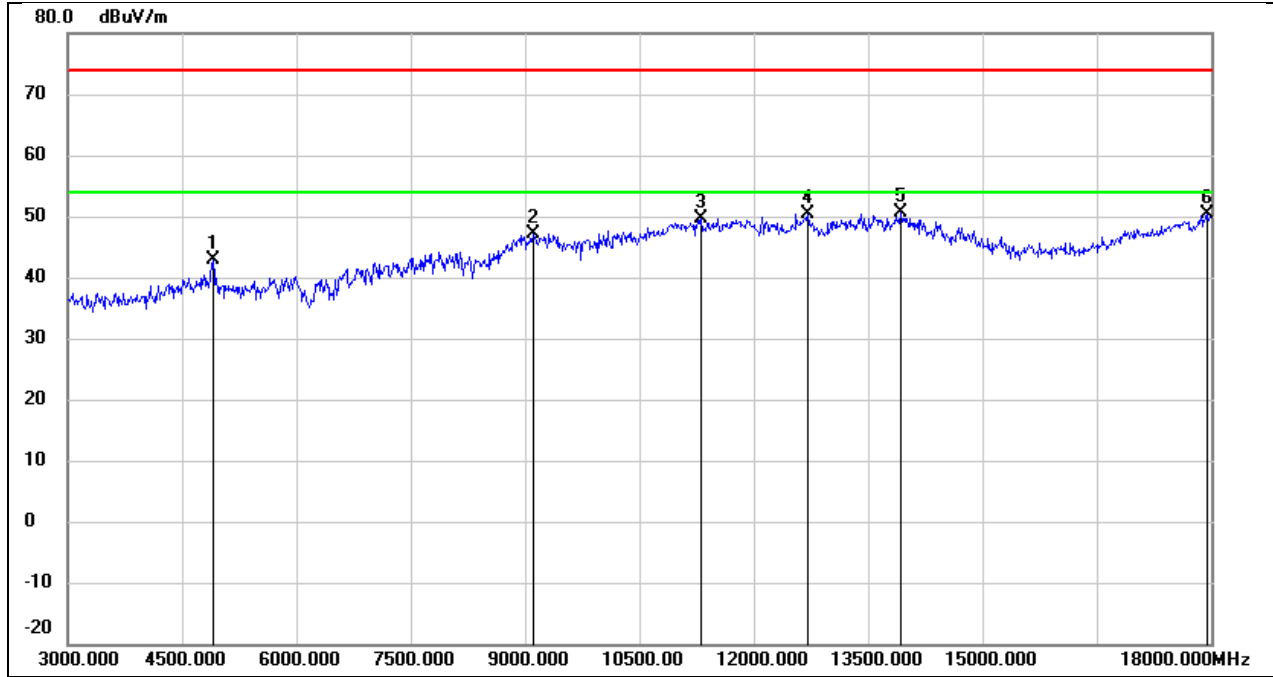


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	42.89	0.09	42.98	74.00	-31.02	peak
2	9105.000	36.69	10.53	47.22	74.00	-26.78	peak
3	11310.000	33.73	15.91	49.64	74.00	-24.36	peak
4	12705.000	32.32	18.06	50.38	74.00	-23.62	peak
5	13920.000	28.78	21.79	50.57	74.00	-23.43	peak
6	17940.000	25.08	25.34	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12 V

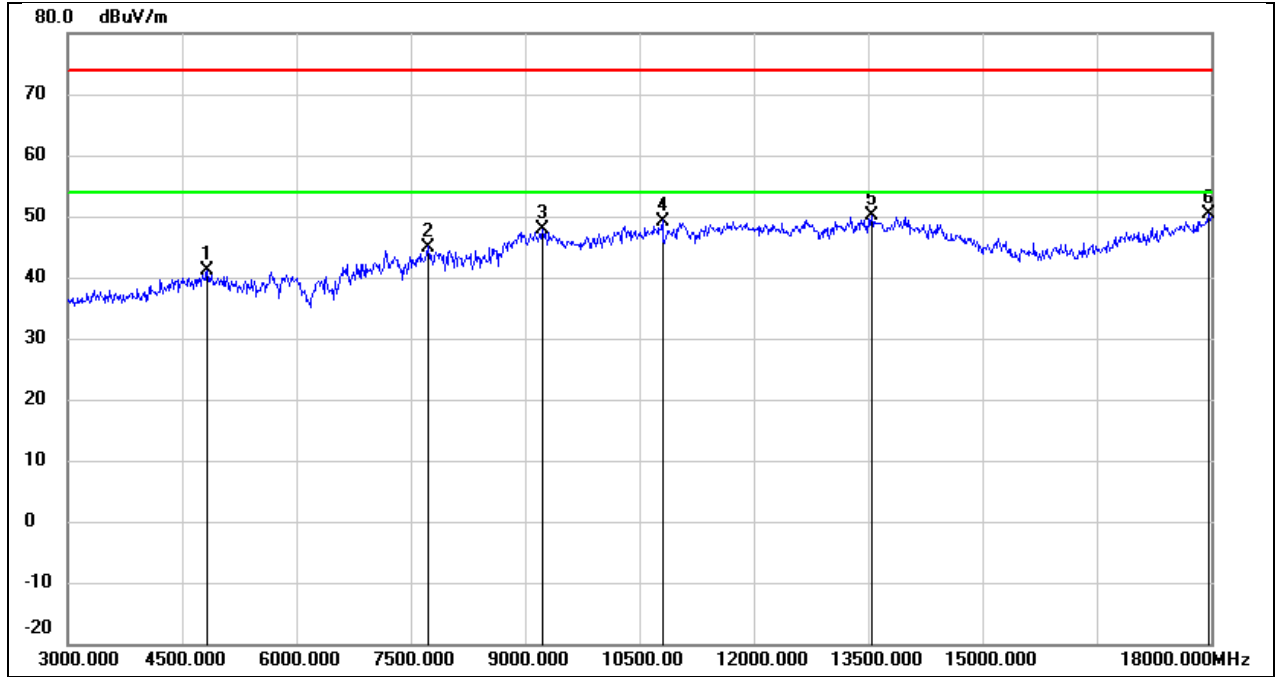


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	41.23	-0.20	41.03	74.00	-32.97	peak
2	7725.000	38.68	6.32	45.00	74.00	-29.00	peak
3	9225.000	37.22	10.58	47.80	74.00	-26.20	peak
4	10800.000	35.19	14.06	49.25	74.00	-24.75	peak
5	13545.000	29.04	20.99	50.03	74.00	-23.97	peak
6	17970.000	24.92	25.51	50.43	74.00	-23.57	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12 V

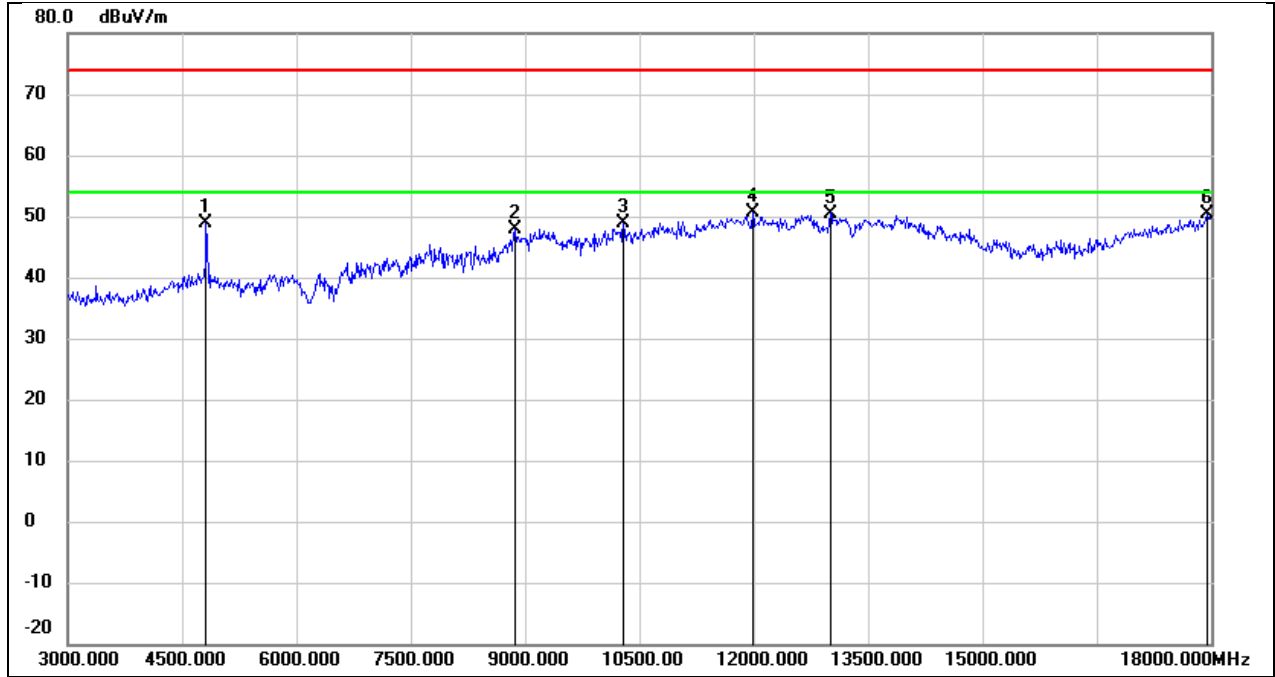


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	49.21	-0.26	48.95	74.00	-25.05	peak
2	8865.000	38.35	9.50	47.85	74.00	-26.15	peak
3	10290.000	36.38	12.59	48.97	74.00	-25.03	peak
4	11985.000	32.79	17.92	50.71	74.00	-23.29	peak
5	13005.000	31.76	18.74	50.50	74.00	-23.50	peak
6	17955.000	24.93	25.42	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2417
Polarity:	Horizontal	Test Voltage:	DC 12 V

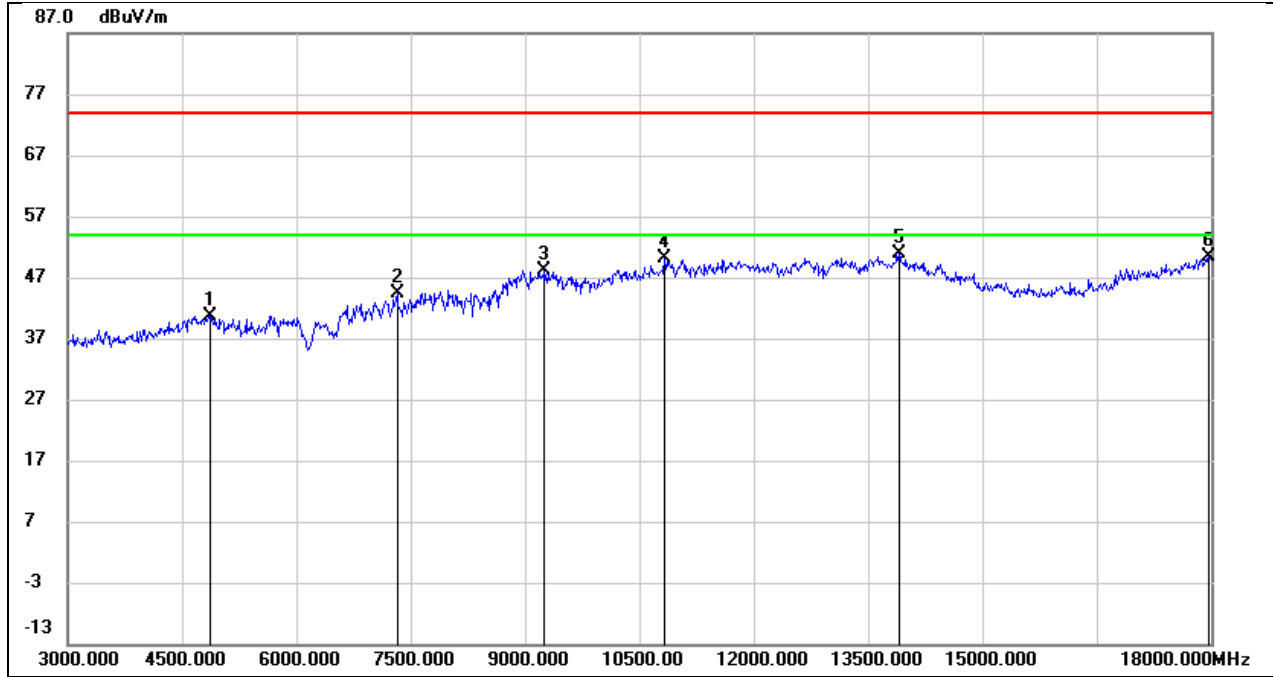


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.79	-0.09	40.70	74.00	-33.30	peak
2	7320.000	37.97	6.46	44.43	74.00	-29.57	peak
3	9255.000	37.54	10.59	48.13	74.00	-25.87	peak
4	10830.000	35.85	14.16	50.01	74.00	-23.99	peak
5	13905.000	29.02	21.76	50.78	74.00	-23.22	peak
6	17970.000	24.97	25.51	50.48	74.00	-23.52	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2417
Polarity:	Vertical	Test Voltage:	DC 12 V

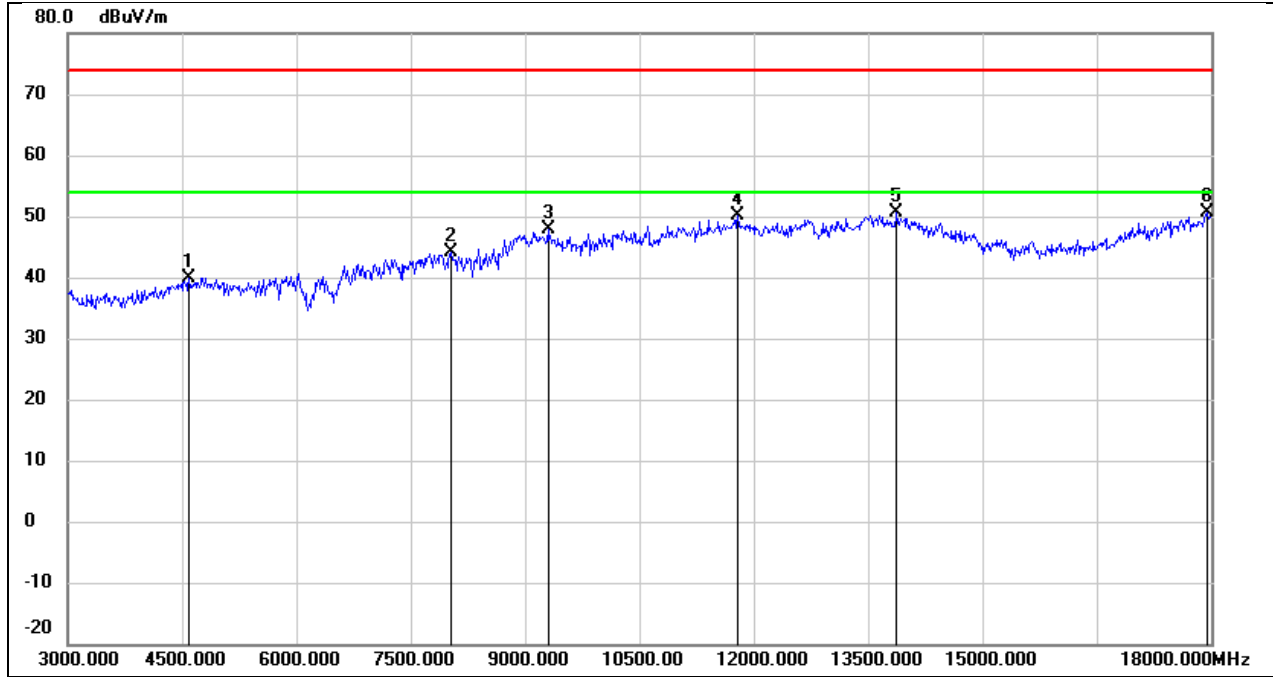


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4590.000	41.06	-1.12	39.94	74.00	-34.06	peak
2	8025.000	37.78	6.34	44.12	74.00	-29.88	peak
3	9300.000	37.29	10.61	47.90	74.00	-26.10	peak
4	11790.000	32.79	17.38	50.17	74.00	-23.83	peak
5	13875.000	28.87	21.70	50.57	74.00	-23.43	peak
6	17940.000	25.30	25.34	50.64	74.00	-23.36	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

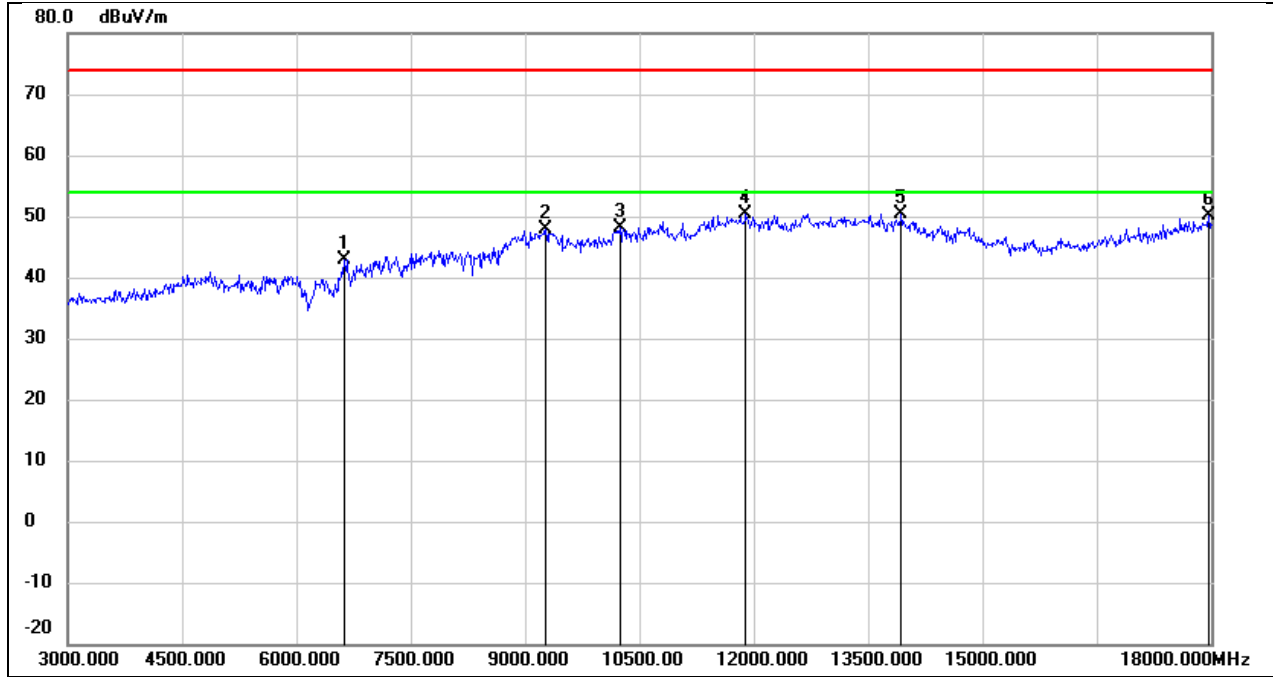


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6630.000	38.07	4.86	42.93	74.00	-31.07	peak
2	9270.000	37.17	10.59	47.76	74.00	-26.24	peak
3	10245.000	35.76	12.48	48.24	74.00	-25.76	peak
4	11895.000	32.70	17.68	50.38	74.00	-23.62	peak
5	13935.000	28.59	21.82	50.41	74.00	-23.59	peak
6	17970.000	24.50	25.51	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

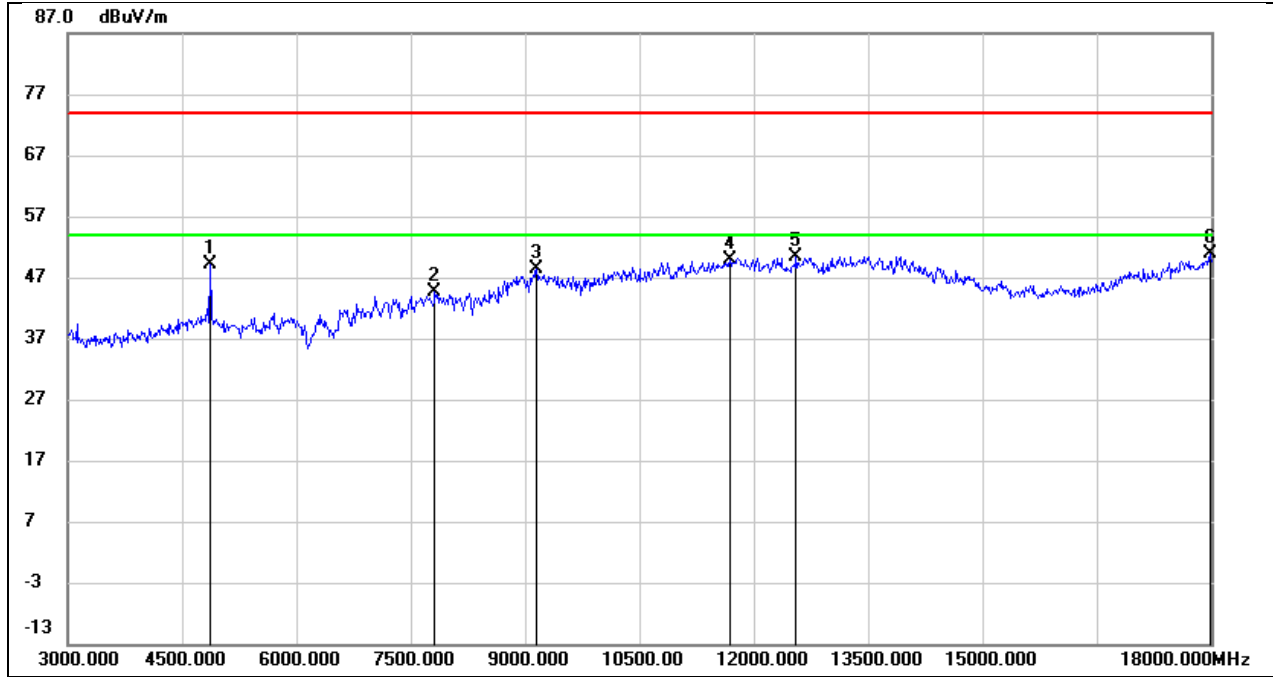


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.12	-0.03	49.09	74.00	-24.91	peak
2	7815.000	38.22	6.32	44.54	74.00	-29.46	peak
3	9150.000	37.74	10.54	48.28	74.00	-25.72	peak
4	11685.000	32.80	17.10	49.90	74.00	-24.10	peak
5	12555.000	32.77	17.72	50.49	74.00	-23.51	peak
6	17985.000	25.24	25.60	50.84	74.00	-23.16	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2457
Polarity:	Horizontal	Test Voltage:	DC 12 V

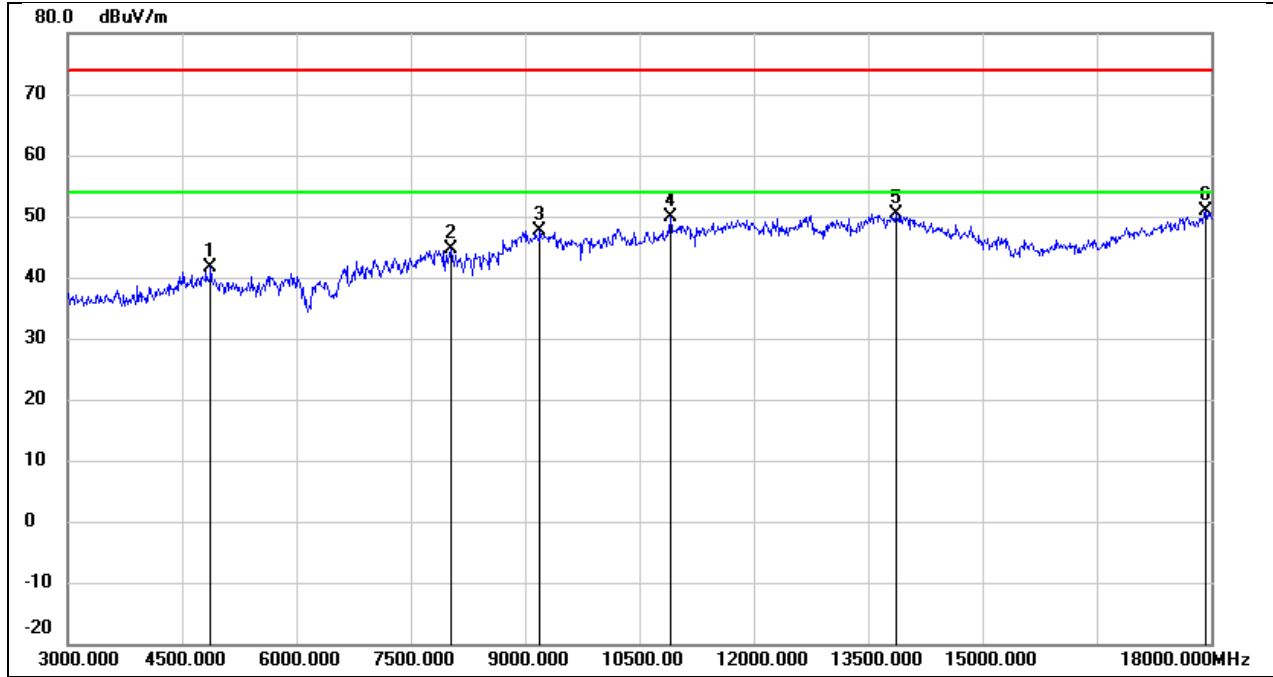


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	41.63	-0.03	41.60	74.00	-32.40	peak
2	8025.000	38.38	6.34	44.72	74.00	-29.28	peak
3	9195.000	37.11	10.56	47.67	74.00	-26.33	peak
4	10905.000	35.53	14.43	49.96	74.00	-24.04	peak
5	13860.000	28.73	21.67	50.40	74.00	-23.60	peak
6	17925.000	25.72	25.25	50.97	74.00	-23.03	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2457
Polarity:	Vertical	Test Voltage:	DC 12 V

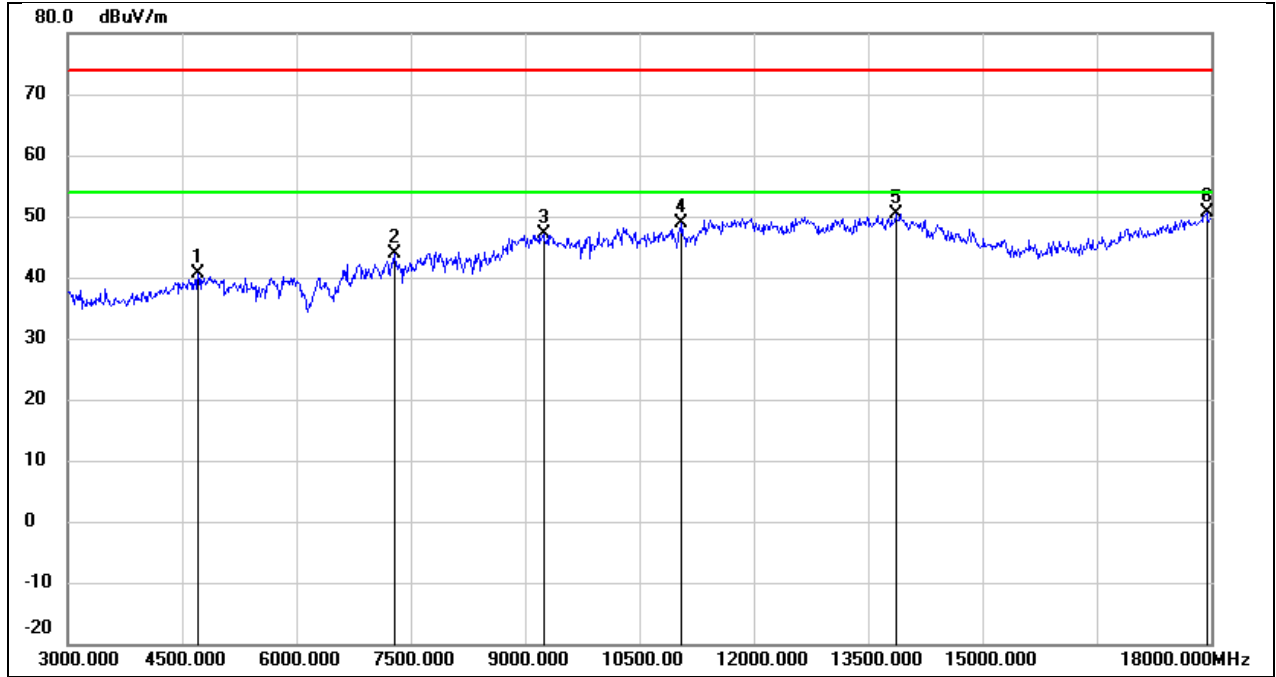


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4710.000	41.40	-0.66	40.74	74.00	-33.26	peak
2	7290.000	37.47	6.48	43.95	74.00	-30.05	peak
3	9240.000	36.58	10.58	47.16	74.00	-26.84	peak
4	11055.000	33.97	14.96	48.93	74.00	-25.07	peak
5	13860.000	28.78	21.67	50.45	74.00	-23.55	peak
6	17940.000	25.19	25.34	50.53	74.00	-23.47	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 12 V

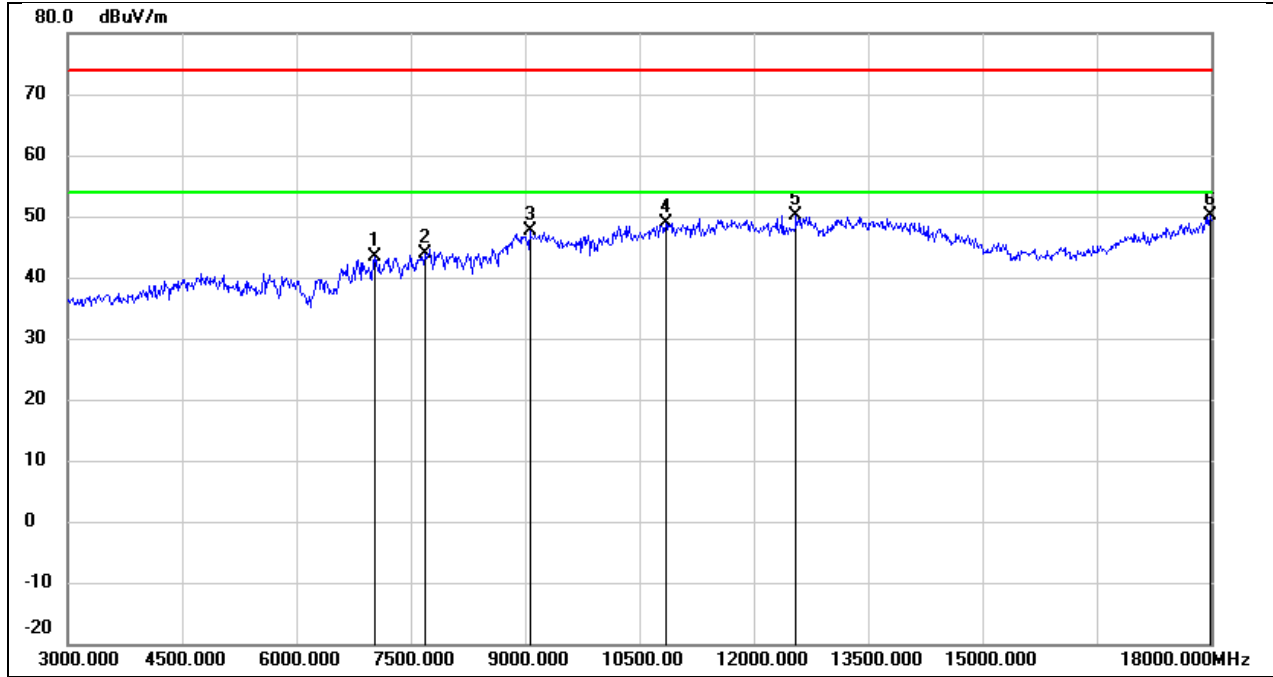


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.000	36.73	6.67	43.40	74.00	-30.60	peak
2	7695.000	37.59	6.32	43.91	74.00	-30.09	peak
3	9060.000	37.18	10.51	47.69	74.00	-26.31	peak
4	10845.000	34.64	14.21	48.85	74.00	-25.15	peak
5	12555.000	32.49	17.72	50.21	74.00	-23.79	peak
6	17985.000	24.51	25.60	50.11	74.00	-23.89	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 12 V

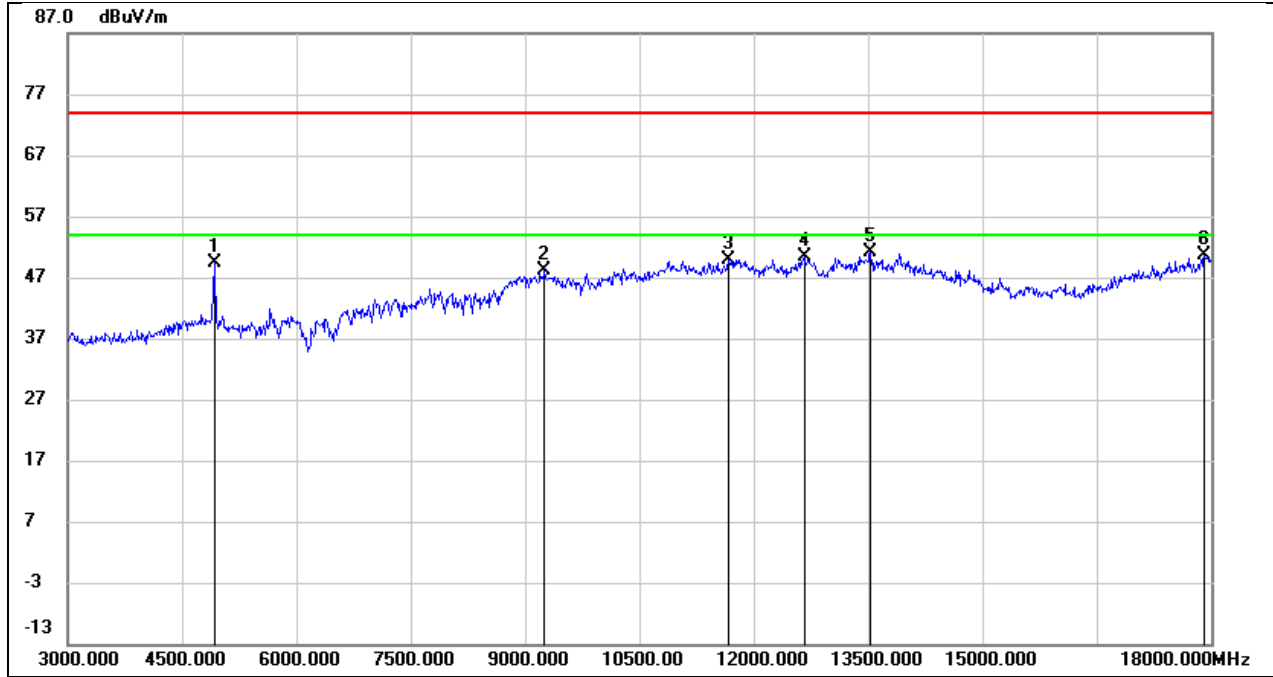


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	49.27	0.14	49.41	74.00	-24.59	peak
2	9255.000	37.46	10.59	48.05	74.00	-25.95	peak
3	11670.000	32.71	17.07	49.78	74.00	-24.22	peak
4	12660.000	32.51	17.95	50.46	74.00	-23.54	peak
5	13530.000	30.10	20.96	51.06	74.00	-22.94	peak
6	17910.000	25.45	25.16	50.61	74.00	-23.39	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 12 V

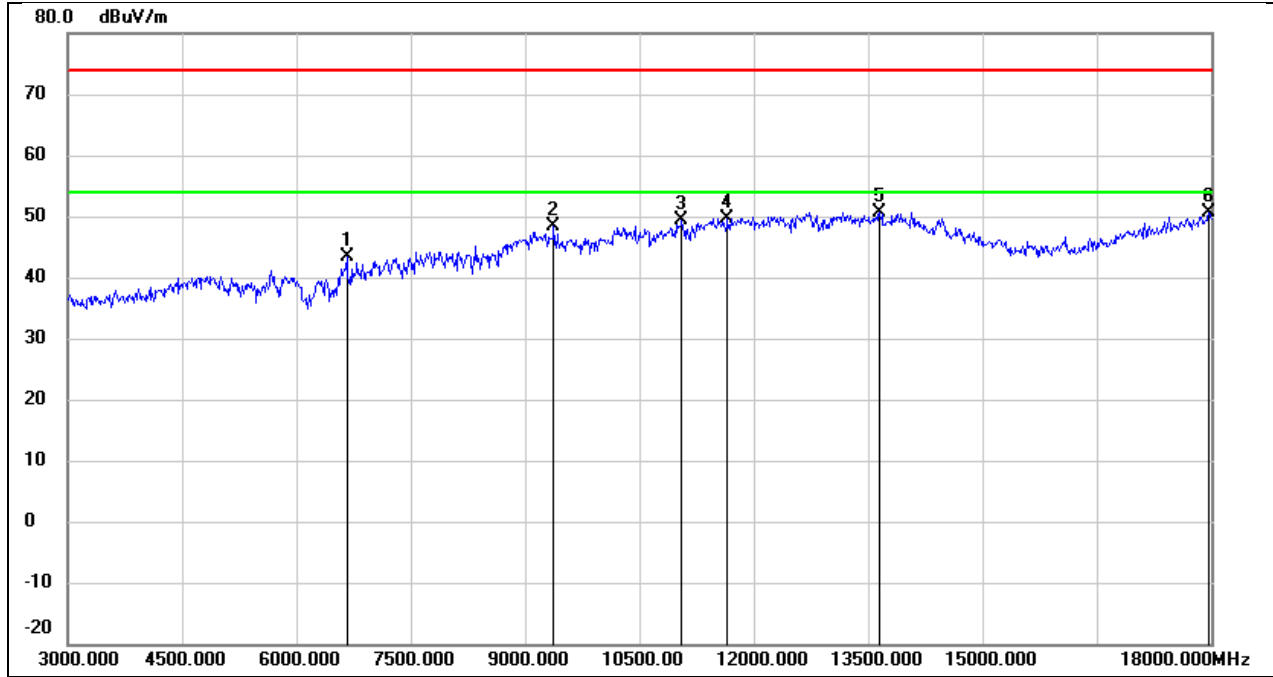


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6660.000	38.40	5.02	43.42	74.00	-30.58	peak
2	9375.000	37.83	10.64	48.47	74.00	-25.53	peak
3	11055.000	34.48	14.96	49.44	74.00	-24.56	peak
4	11655.000	32.67	17.01	49.68	74.00	-24.32	peak
5	13650.000	29.51	21.21	50.72	74.00	-23.28	peak
6	17970.000	25.08	25.51	50.59	74.00	-23.41	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 12 V

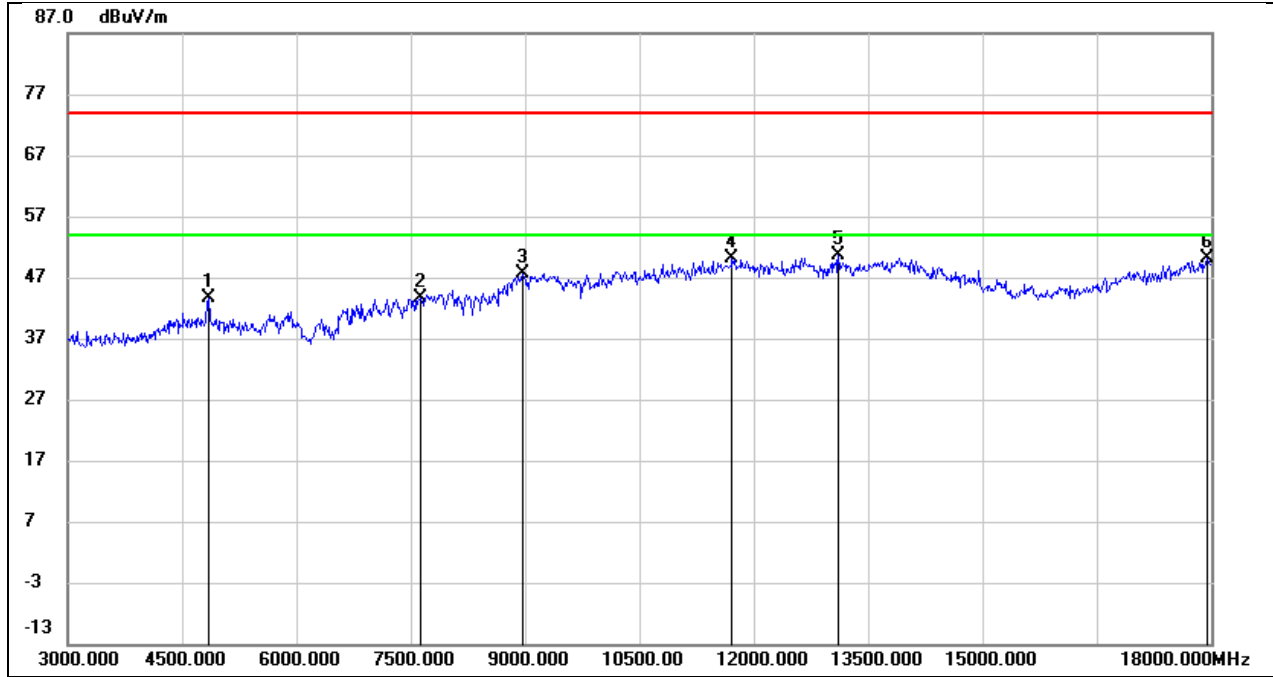


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	43.86	-0.15	43.71	74.00	-30.29	peak
2	7635.000	37.19	6.33	43.52	74.00	-30.48	peak
3	8970.000	37.45	10.26	47.71	74.00	-26.29	peak
4	11715.000	33.05	17.19	50.24	74.00	-23.76	peak
5	13110.000	31.49	19.20	50.69	74.00	-23.31	peak
6	17955.000	24.61	25.42	50.03	74.00	-23.97	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2427
Polarity:	Horizontal	Test Voltage:	DC 12 V

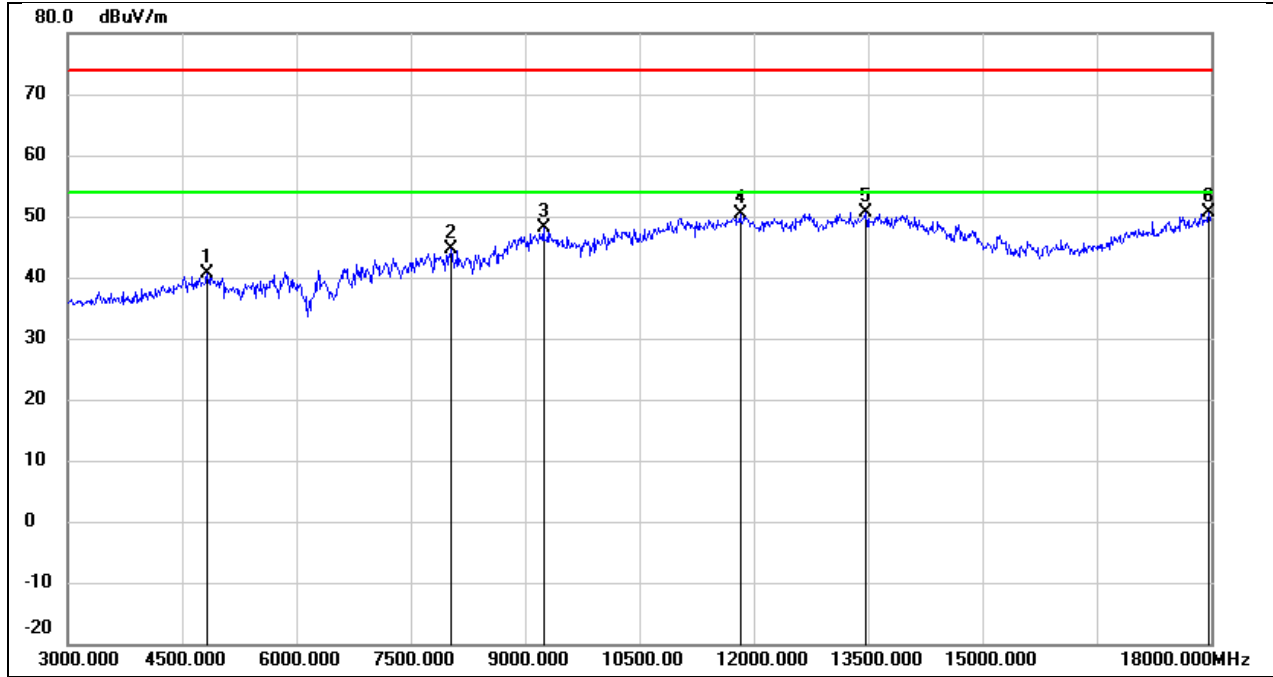


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	40.78	-0.20	40.58	74.00	-33.42	peak
2	8025.000	38.27	6.34	44.61	74.00	-29.39	peak
3	9240.000	37.52	10.58	48.10	74.00	-25.90	peak
4	11820.000	33.02	17.47	50.49	74.00	-23.51	peak
5	13470.000	29.94	20.77	50.71	74.00	-23.29	peak
6	17970.000	25.02	25.51	50.53	74.00	-23.47	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2427
Polarity:	Vertical	Test Voltage:	DC 12 V

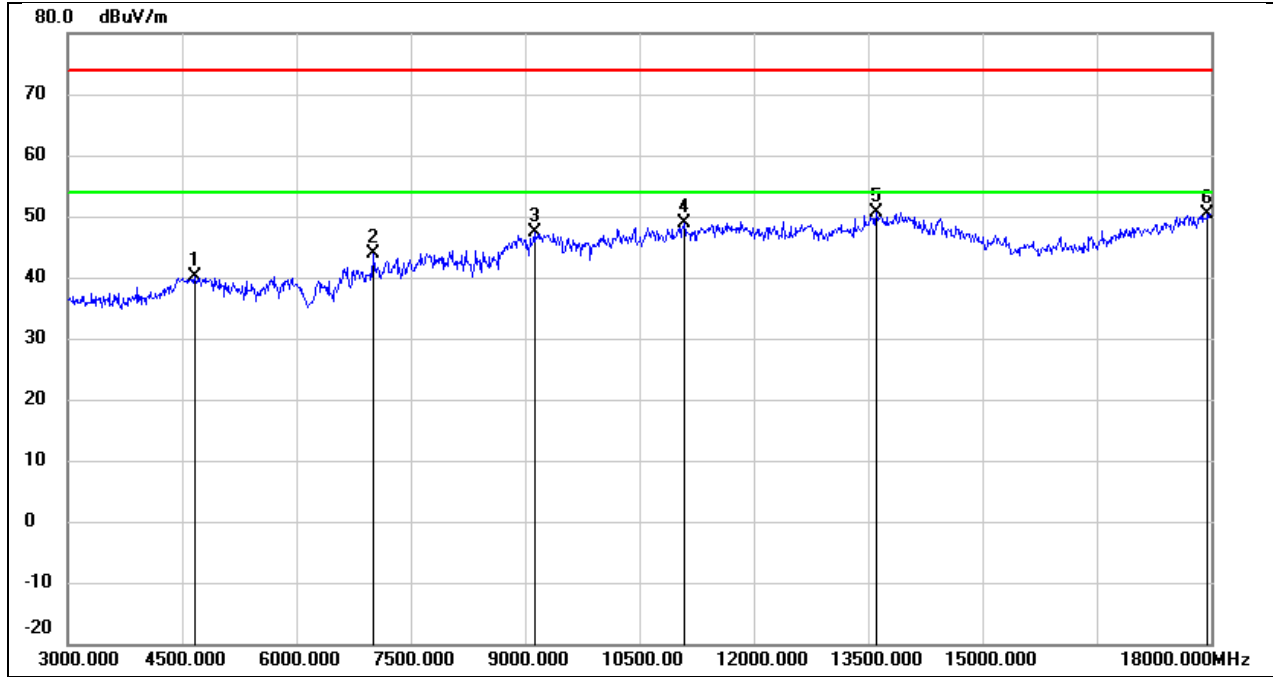


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4665.000	40.93	-0.83	40.10	74.00	-33.90	peak
2	7005.000	37.29	6.69	43.98	74.00	-30.02	peak
3	9120.000	36.76	10.53	47.29	74.00	-26.71	peak
4	11085.000	33.87	15.08	48.95	74.00	-25.05	peak
5	13605.000	29.58	21.12	50.70	74.00	-23.30	peak
6	17955.000	24.90	25.42	50.32	74.00	-23.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 12 V

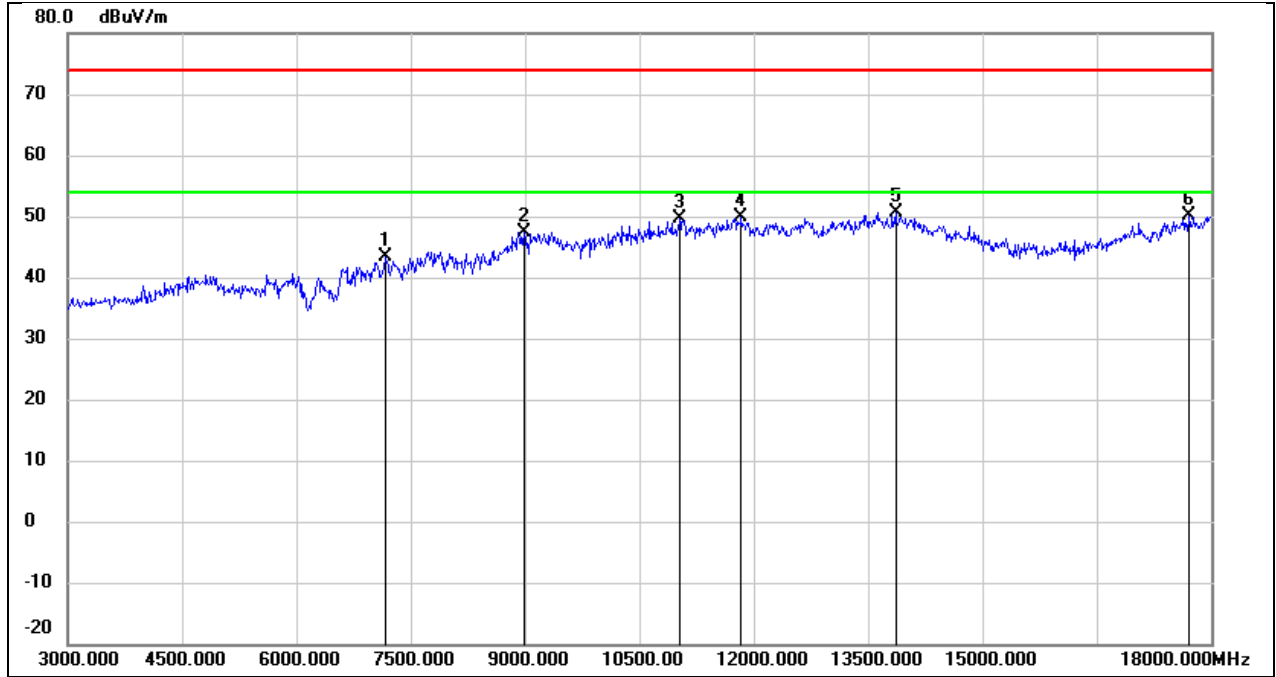


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7170.000	36.93	6.56	43.49	74.00	-30.51	peak
2	8985.000	37.13	10.37	47.50	74.00	-26.50	peak
3	11025.000	34.88	14.85	49.73	74.00	-24.27	peak
4	11835.000	32.49	17.51	50.00	74.00	-24.00	peak
5	13860.000	28.98	21.67	50.65	74.00	-23.35	peak
6	17715.000	26.05	24.00	50.05	74.00	-23.95	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 12 V

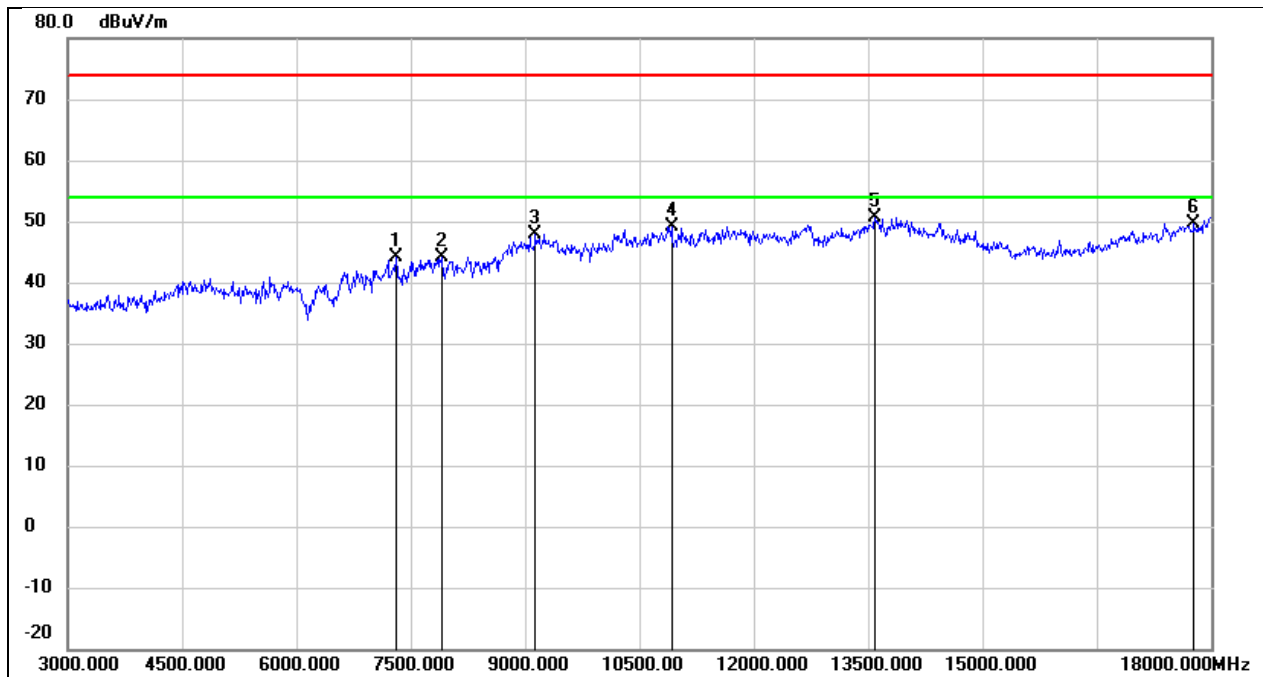


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	37.56	6.47	44.03	74.00	-29.97	peak
2	7905.000	37.87	6.31	44.18	74.00	-29.82	peak
3	9135.000	37.37	10.55	47.92	74.00	-26.08	peak
4	10920.000	34.65	14.49	49.14	74.00	-24.86	peak
5	13590.000	29.47	21.09	50.56	74.00	-23.44	peak
6	17775.000	25.38	24.36	49.74	74.00	-24.26	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2447
Polarity:	Horizontal	Test Voltage:	DC 12 V

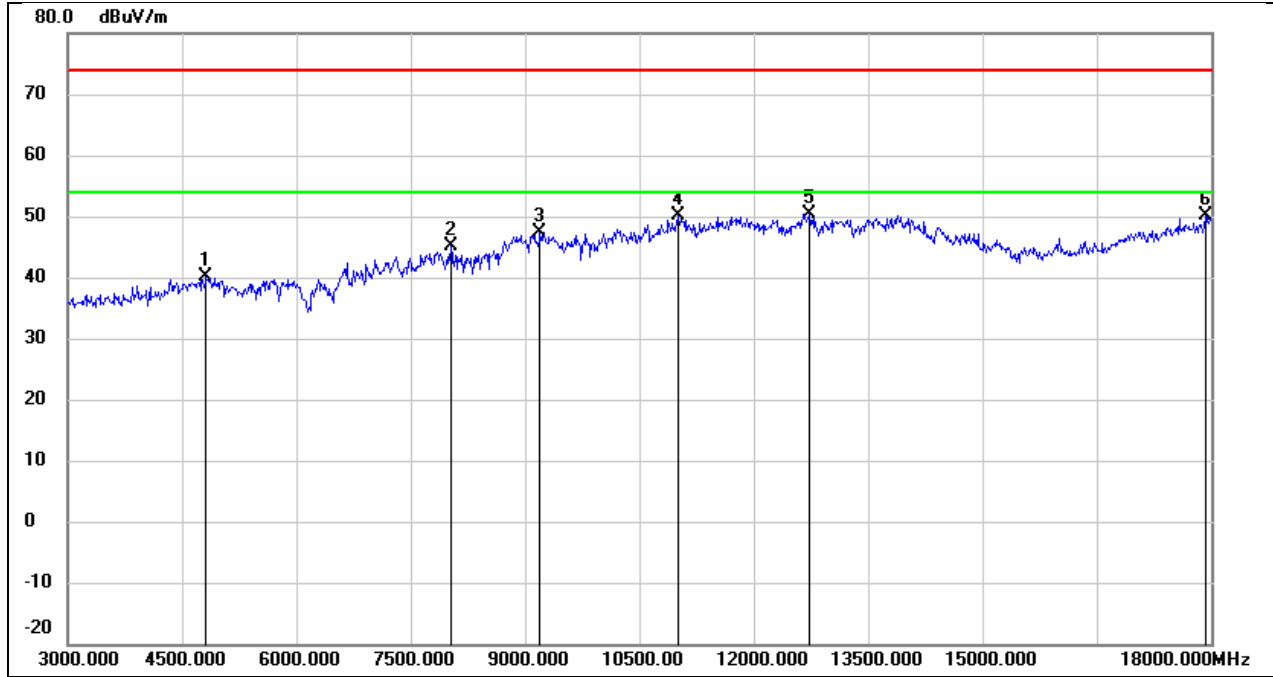


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	40.43	-0.26	40.17	74.00	-33.83	peak
2	8025.000	38.78	6.34	45.12	74.00	-28.88	peak
3	9195.000	36.82	10.56	47.38	74.00	-26.62	peak
4	11010.000	35.44	14.81	50.25	74.00	-23.75	peak
5	12735.000	32.26	18.12	50.38	74.00	-23.62	peak
6	17925.000	24.76	25.25	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2447
Polarity:	Vertical	Test Voltage:	DC 12 V

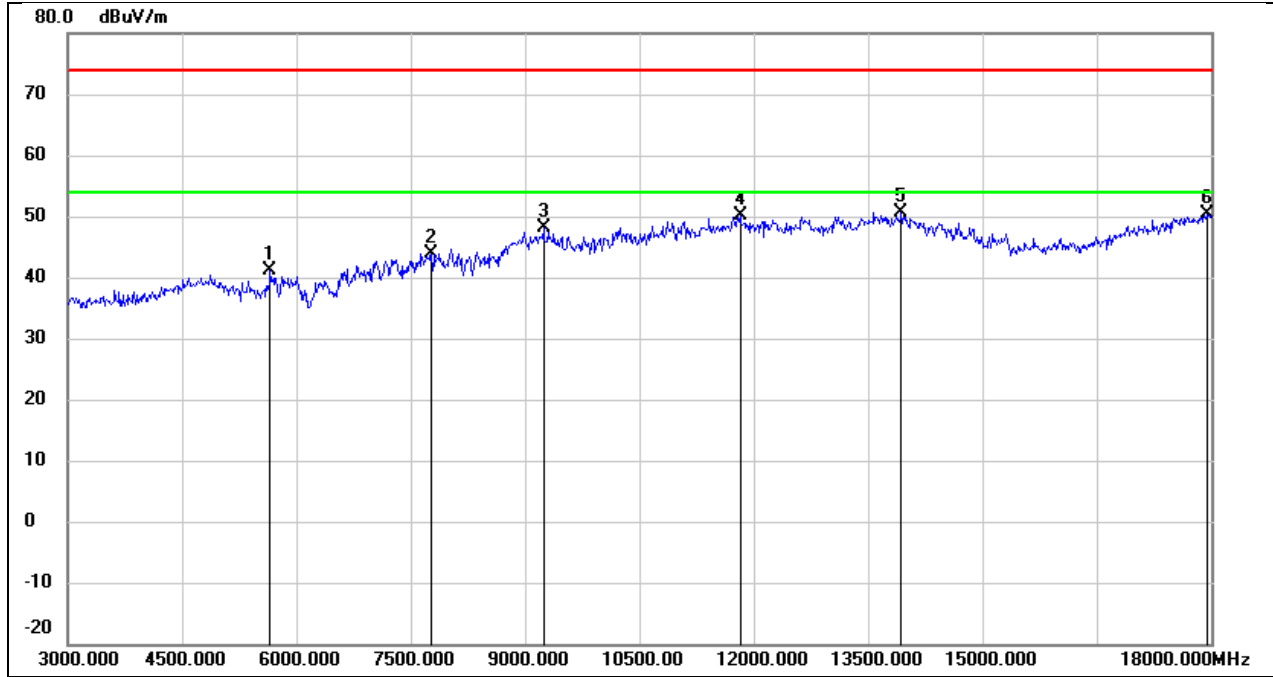


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.77	1.29	41.06	74.00	-32.94	peak
2	7770.000	37.60	6.31	43.91	74.00	-30.09	peak
3	9240.000	37.50	10.58	48.08	74.00	-25.92	peak
4	11820.000	32.55	17.47	50.02	74.00	-23.98	peak
5	13935.000	28.69	21.82	50.51	74.00	-23.49	peak
6	17940.000	25.05	25.34	50.39	74.00	-23.61	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 12 V

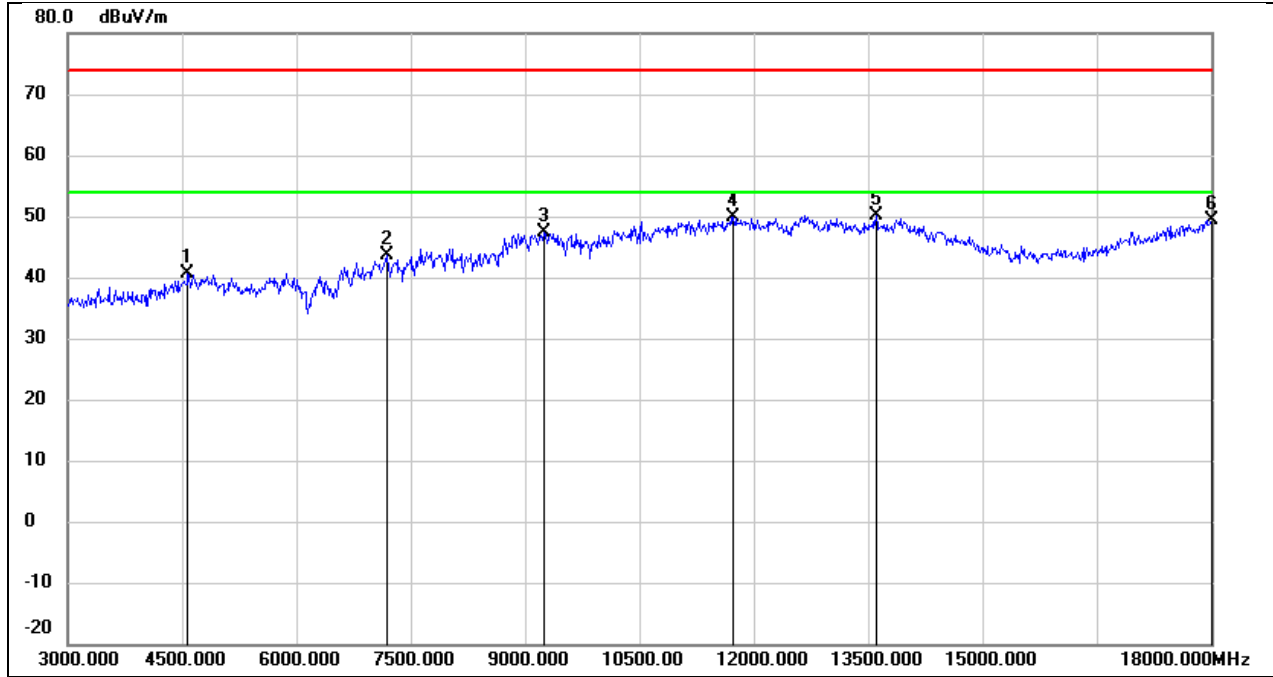

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4575.000	41.87	-1.17	40.70	74.00	-33.30	peak
2	7185.000	36.96	6.55	43.51	74.00	-30.49	peak
3	9255.000	36.86	10.59	47.45	74.00	-26.55	peak
4	11730.000	32.62	17.22	49.84	74.00	-24.16	peak
5	13605.000	28.99	21.12	50.11	74.00	-23.89	peak
6	18000.000	23.80	25.69	49.49	74.00	-24.51	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 12 V

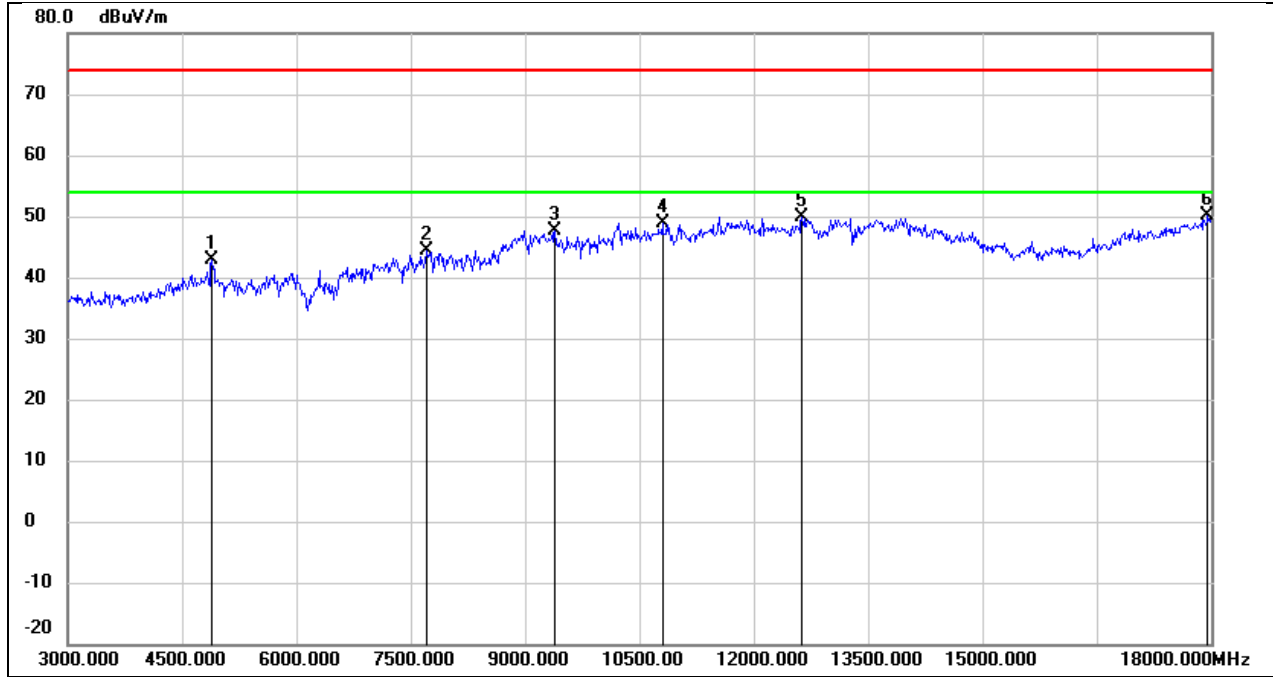

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	42.78	0.03	42.81	74.00	-31.19	peak
2	7710.000	38.16	6.33	44.49	74.00	-29.51	peak
3	9390.000	37.00	10.64	47.64	74.00	-26.36	peak
4	10800.000	34.94	14.06	49.00	74.00	-25.00	peak
5	12630.000	32.01	17.89	49.90	74.00	-24.10	peak
6	17955.000	24.62	25.42	50.04	74.00	-23.96	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12V

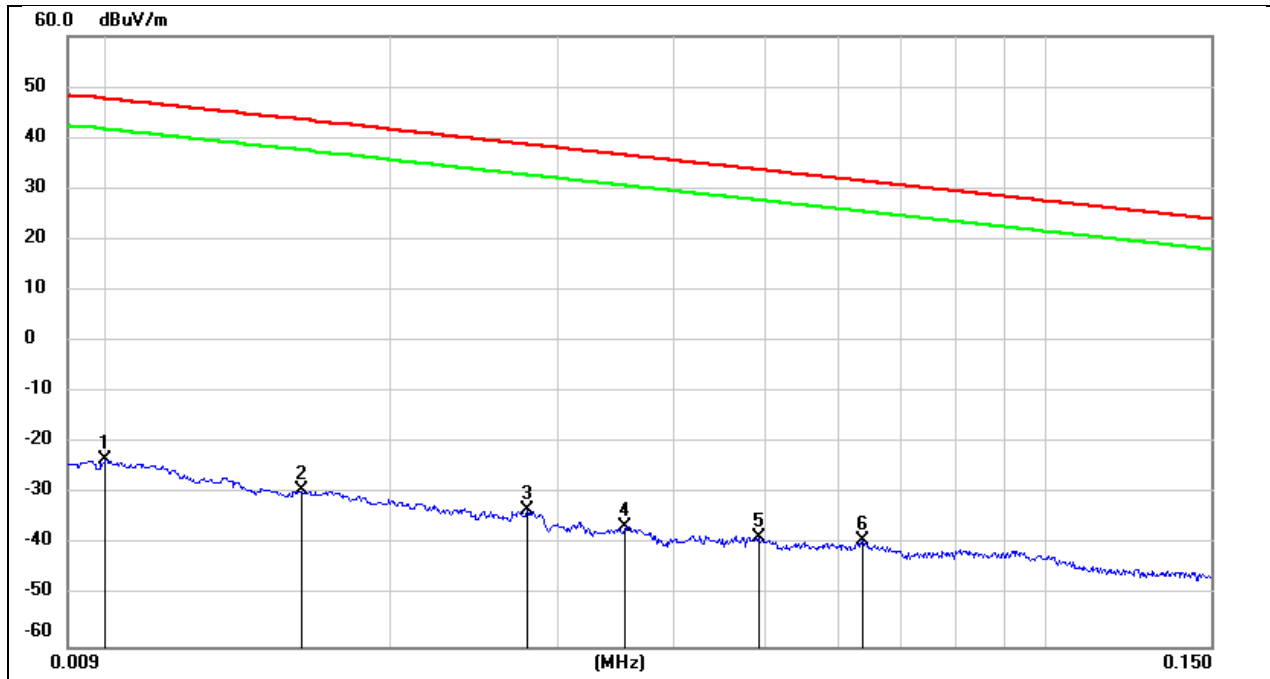


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	78.22	-101.40	-23.18	47.60	-70.78	peak
2	0.0160	71.97	-101.37	-29.40	43.52	-72.92	peak
3	0.0279	68.17	-101.38	-33.21	38.69	-71.90	peak
4	0.0354	64.97	-101.41	-36.44	36.62	-73.06	peak
5	0.0492	63.05	-101.47	-38.42	33.76	-72.18	peak
6	0.0636	62.31	-101.54	-39.23	31.53	-70.76	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12V

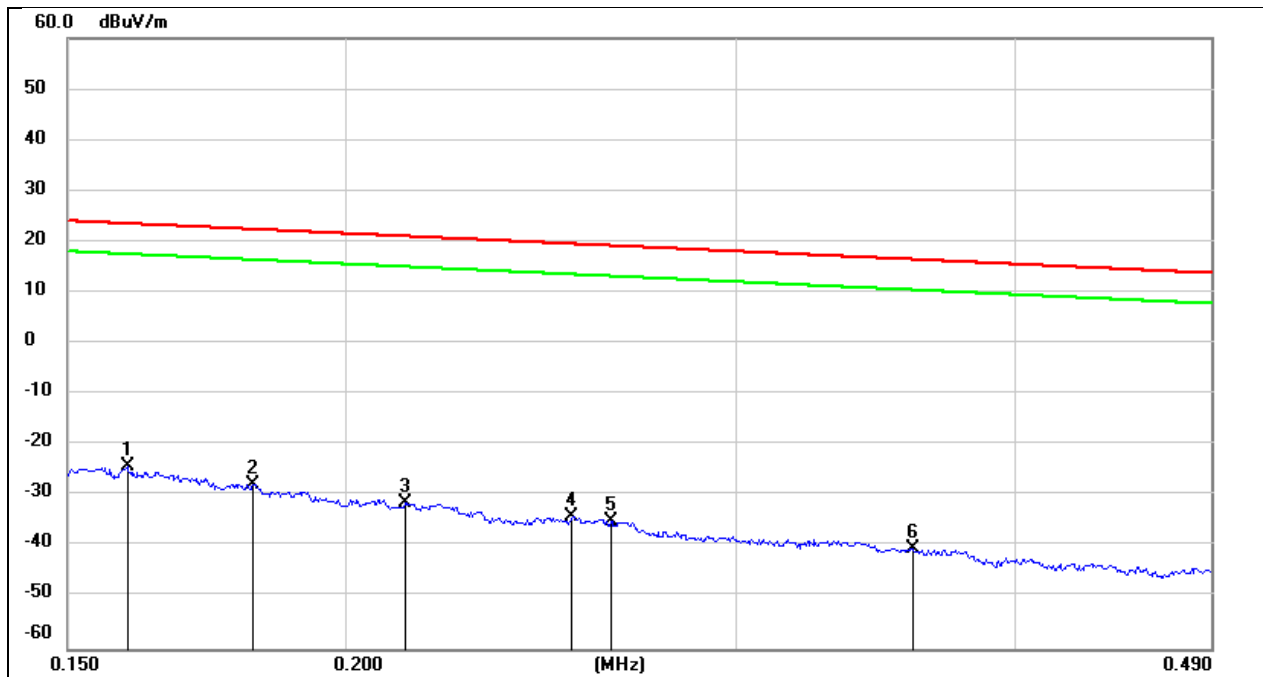

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	77.36	-101.65	-24.29	23.55	-47.84	peak
2	0.1817	74.03	-101.68	-27.65	22.42	-50.07	peak
3	0.2127	70.45	-101.74	-31.29	21.04	-52.33	peak
4	0.2530	67.64	-101.80	-34.16	19.54	-53.70	peak
5	0.2631	66.85	-101.82	-34.97	19.20	-54.17	peak
6	0.3600	61.51	-101.91	-40.40	16.48	-56.88	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12V

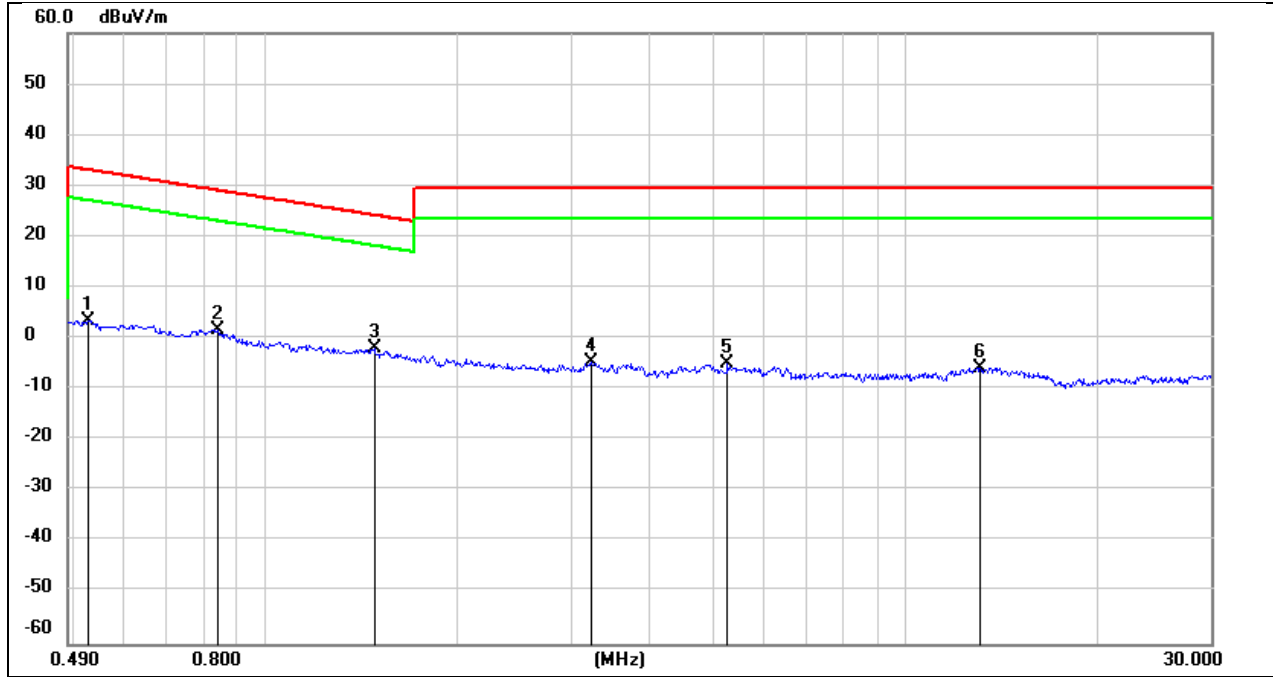

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5272	65.54	-62.07	3.47	33.16	-29.69	peak
2	0.8400	63.71	-62.17	1.54	29.12	-27.58	peak
3	1.4757	60.00	-62.05	-2.05	24.22	-26.27	peak
4	3.2343	56.79	-61.53	-4.74	29.54	-34.28	peak
5	5.2705	56.54	-61.45	-4.91	29.54	-34.45	peak
6	13.0907	55.13	-60.93	-5.80	29.54	-35.34	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12V

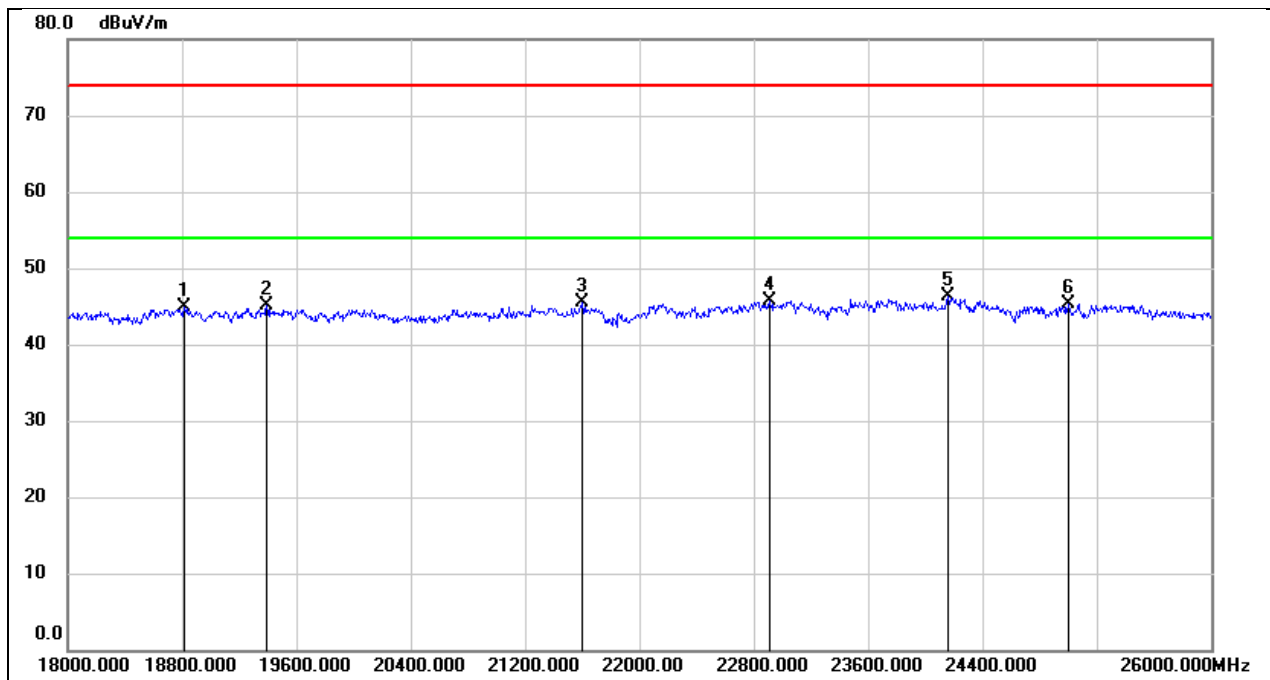

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	50.21	-5.38	44.83	74.00	-29.17	peak
2	19392.000	50.62	-5.57	45.05	74.00	-28.95	peak
3	21600.000	50.02	-4.54	45.48	74.00	-28.52	peak
4	22912.000	49.18	-3.53	45.65	74.00	-28.35	peak
5	24160.000	49.02	-2.80	46.22	74.00	-27.78	peak
6	25000.000	47.36	-2.10	45.26	74.00	-28.74	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12V

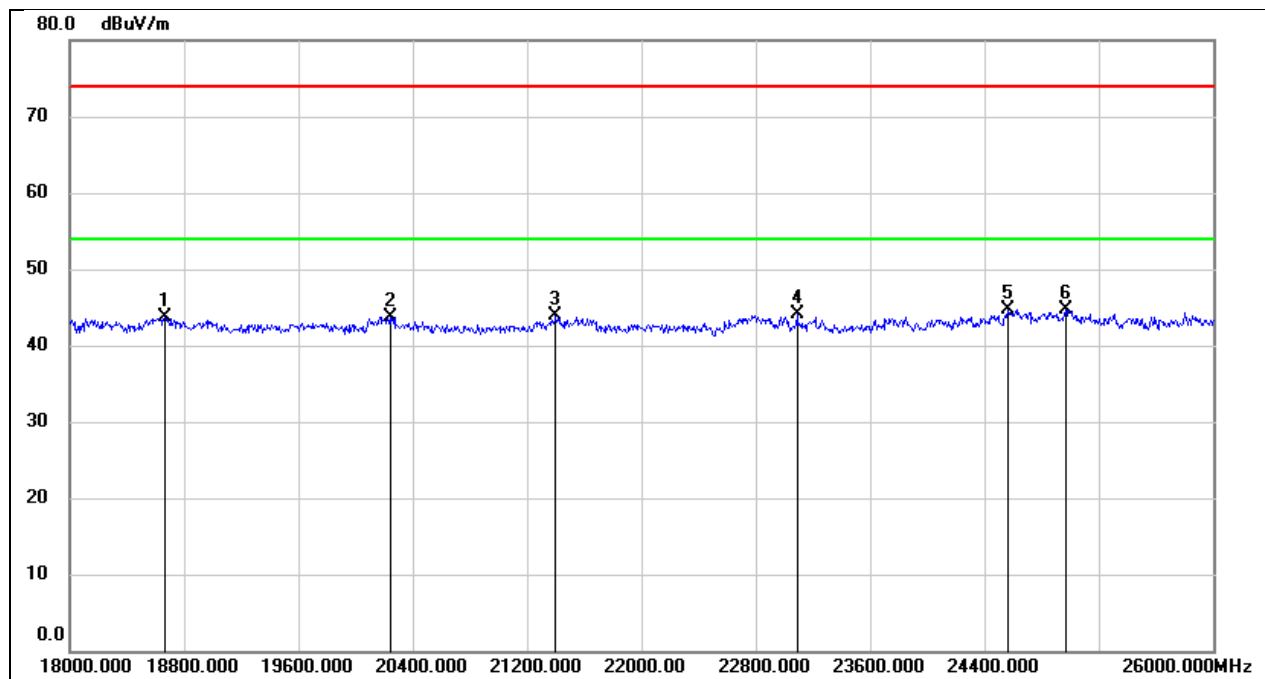

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18664.000	49.05	-5.37	43.68	74.00	-30.32	peak
2	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
3	21400.000	48.54	-4.72	43.82	74.00	-30.18	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak
6	24968.000	46.76	-2.14	44.62	74.00	-29.38	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 12V

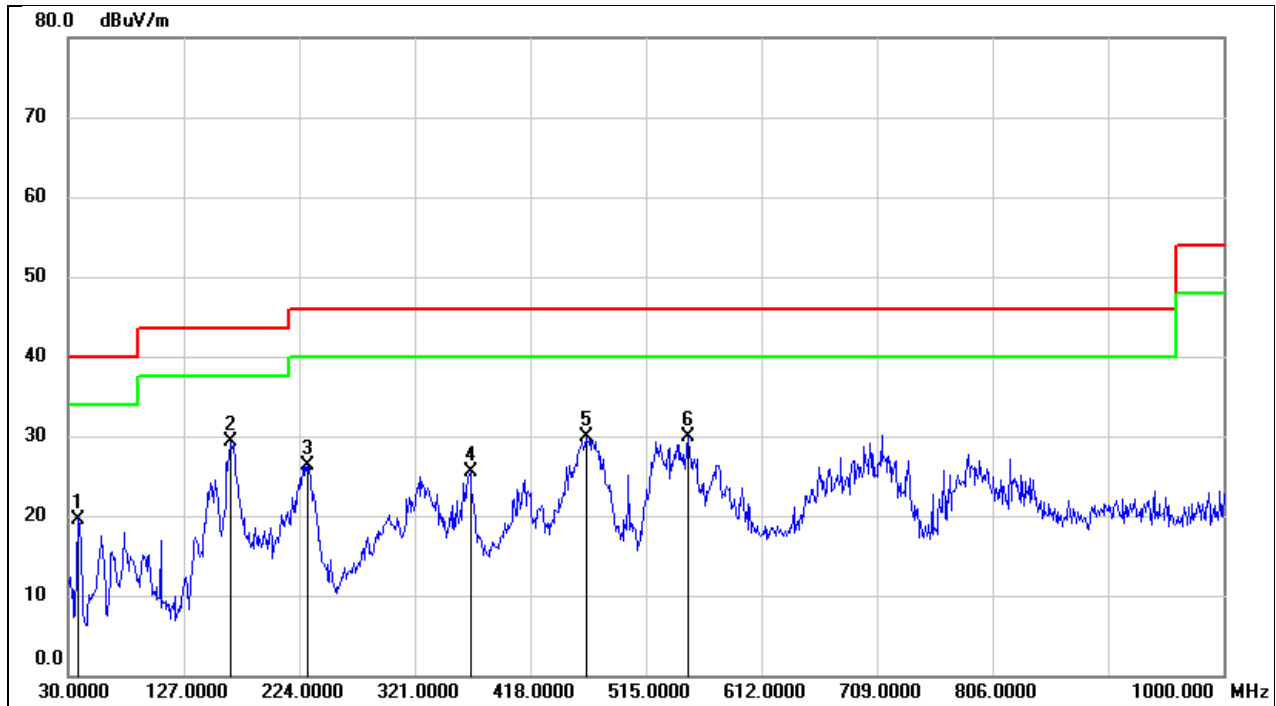

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	37.7599	39.04	-19.44	19.60	40.00	-20.40	QP
2	166.7700	46.43	-17.13	29.30	43.50	-14.20	QP
3	230.7900	44.28	-17.98	26.30	46.00	-19.70	QP
4	367.5600	38.52	-12.98	25.54	46.00	-20.46	QP
5	464.5600	41.23	-11.38	29.85	46.00	-16.15	QP
6	549.9200	40.44	-10.54	29.90	46.00	-16.10	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 12V

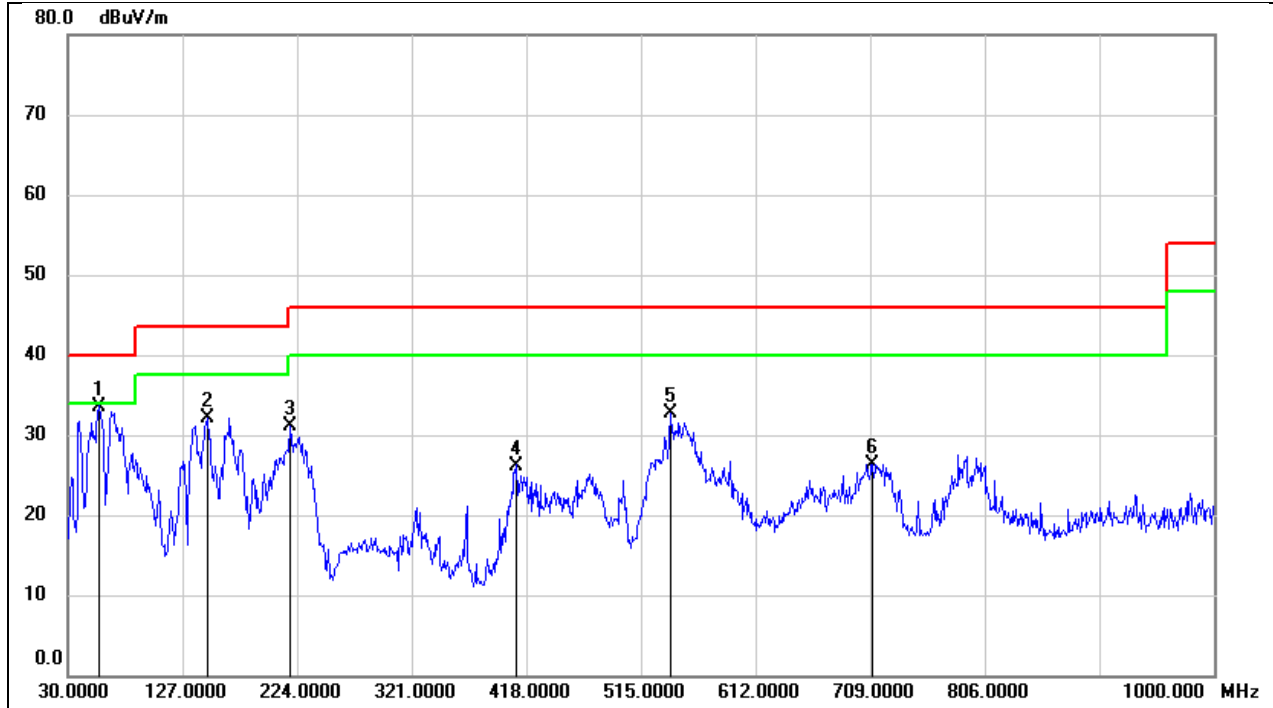

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	56.1900	54.01	-20.41	33.60	40.00	-6.40	QP
2	148.3400	50.63	-18.45	32.18	43.50	-11.32	QP
3	218.1800	48.45	-17.42	31.03	46.00	-14.97	QP
4	409.2700	38.90	-12.70	26.20	46.00	-19.80	QP
5	540.2199	43.12	-10.37	32.75	46.00	-13.25	QP
6	710.9400	34.07	-7.76	26.31	46.00	-19.69	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

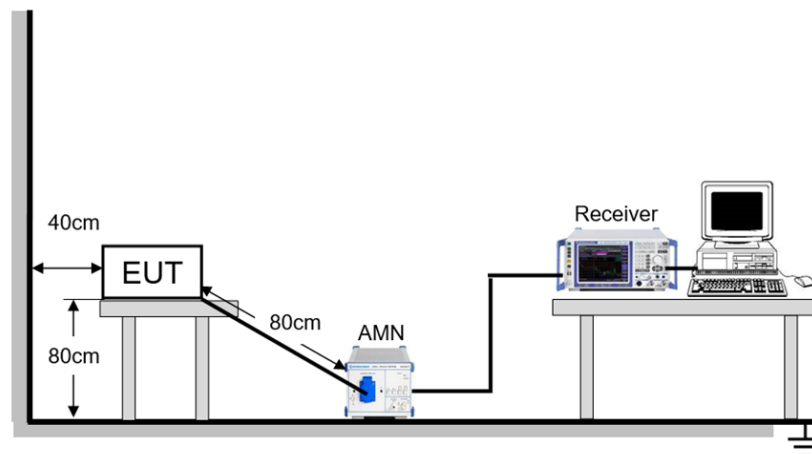

TEST ENVIRONMENT


Temperature	23.6°C	Relative Humidity	50%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	November 15, 2023	Test By	Fanny Huang
-----------	-------------------	---------	-------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

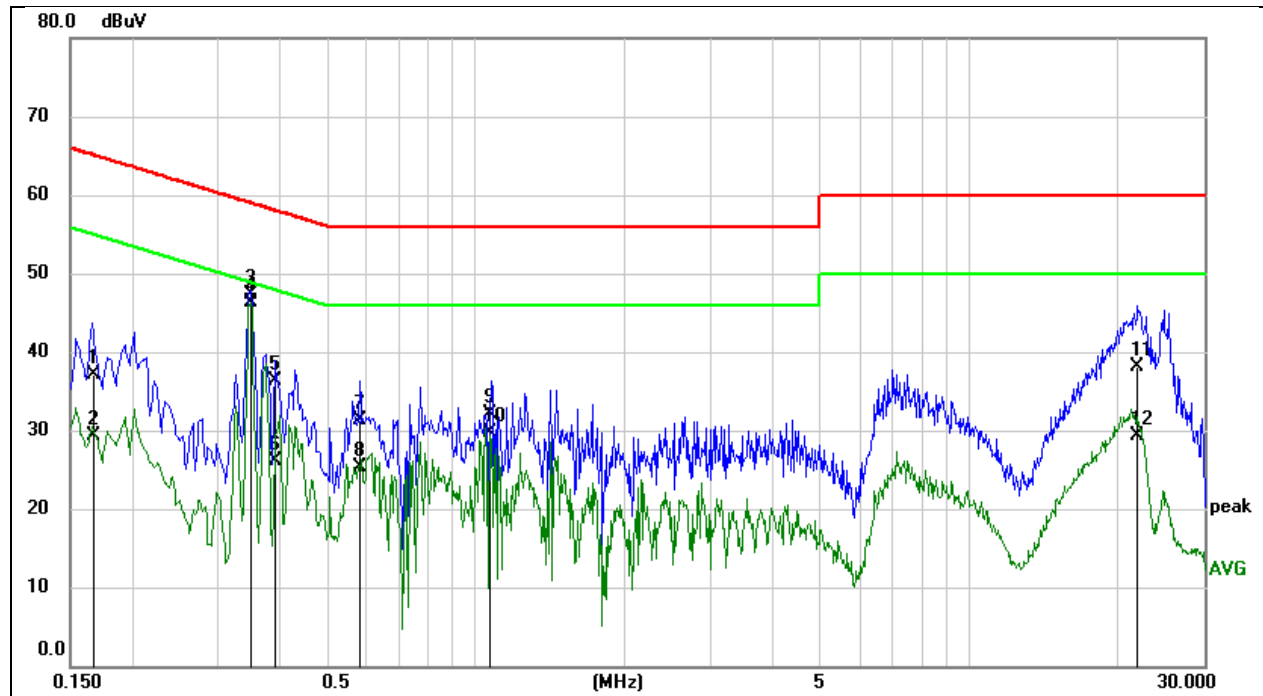


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1674	27.43	9.59	37.02	65.09	-28.07	QP
2	0.1674	19.71	9.59	29.30	55.09	-25.79	AVG
3	0.3486	37.69	9.59	47.28	59.00	-11.72	QP
4	0.3486	36.71	9.59	46.30	49.00	-2.70	AVG
5	0.3892	26.65	9.59	36.24	58.08	-21.84	QP
6	0.3892	16.43	9.59	26.02	48.08	-22.06	AVG
7	0.5806	21.69	9.60	31.29	56.00	-24.71	QP
8	0.5806	15.74	9.60	25.34	46.00	-20.66	AVG
9	1.0689	22.59	9.61	32.20	56.00	-23.80	QP
10	1.0689	20.11	9.61	29.72	46.00	-16.28	AVG
11	21.9243	28.32	9.82	38.14	60.00	-21.86	QP
12	21.9243	19.42	9.82	29.24	50.00	-20.76	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

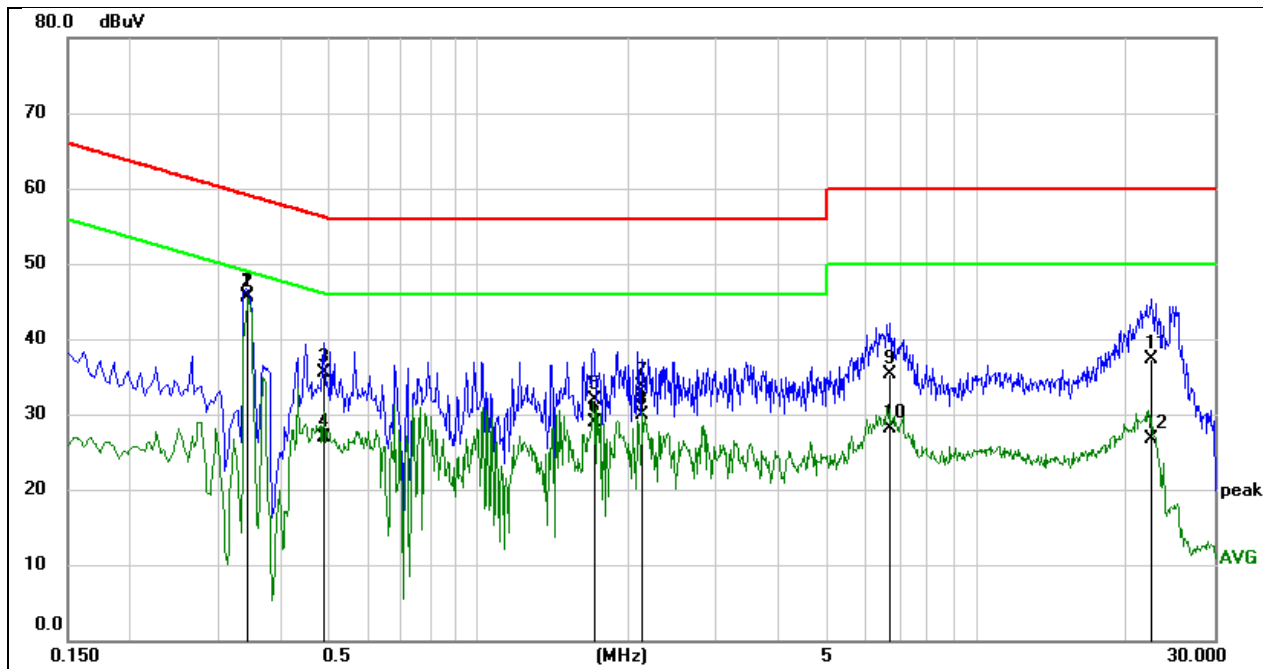

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3460	36.12	9.59	45.71	59.06	-13.35	QP
2	0.3460	35.96	9.59	45.55	49.06	-3.51	AVG
3	0.4879	25.95	9.60	35.55	56.20	-20.65	QP
4	0.4879	17.22	9.60	26.82	46.20	-19.38	AVG
5	1.7174	22.22	9.62	31.84	56.00	-24.16	QP
6	1.7174	19.31	9.62	28.93	46.00	-17.07	AVG
7	2.1319	24.04	9.64	33.68	56.00	-22.32	QP
8	2.1319	20.20	9.64	29.84	46.00	-16.16	AVG
9	6.7163	25.63	9.73	35.36	60.00	-24.64	QP
10	6.7163	18.43	9.73	28.16	50.00	-21.84	AVG
11	22.2908	27.51	9.81	37.32	60.00	-22.68	QP
12	22.2908	16.99	9.81	26.80	50.00	-23.20	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

Appendix A: Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
b	13.12	13.76	0.9535	95.35	0.21	0.08	1
g	1.98	2.08	0.9519	95.19	0.21	0.51	1
n20	5.43	5.89	0.9219	92.19	0.35	0.18	1
n40	5.43	5.88	0.9235	92.35	0.35	0.18	1
ax20	5.45	5.89	0.9253	92.53	0.34	0.18	1
ax40	5.44	5.92	0.9189	91.89	0.37	0.18	1


Note:




Duty Cycle Correction Factor=10log (1/x).

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

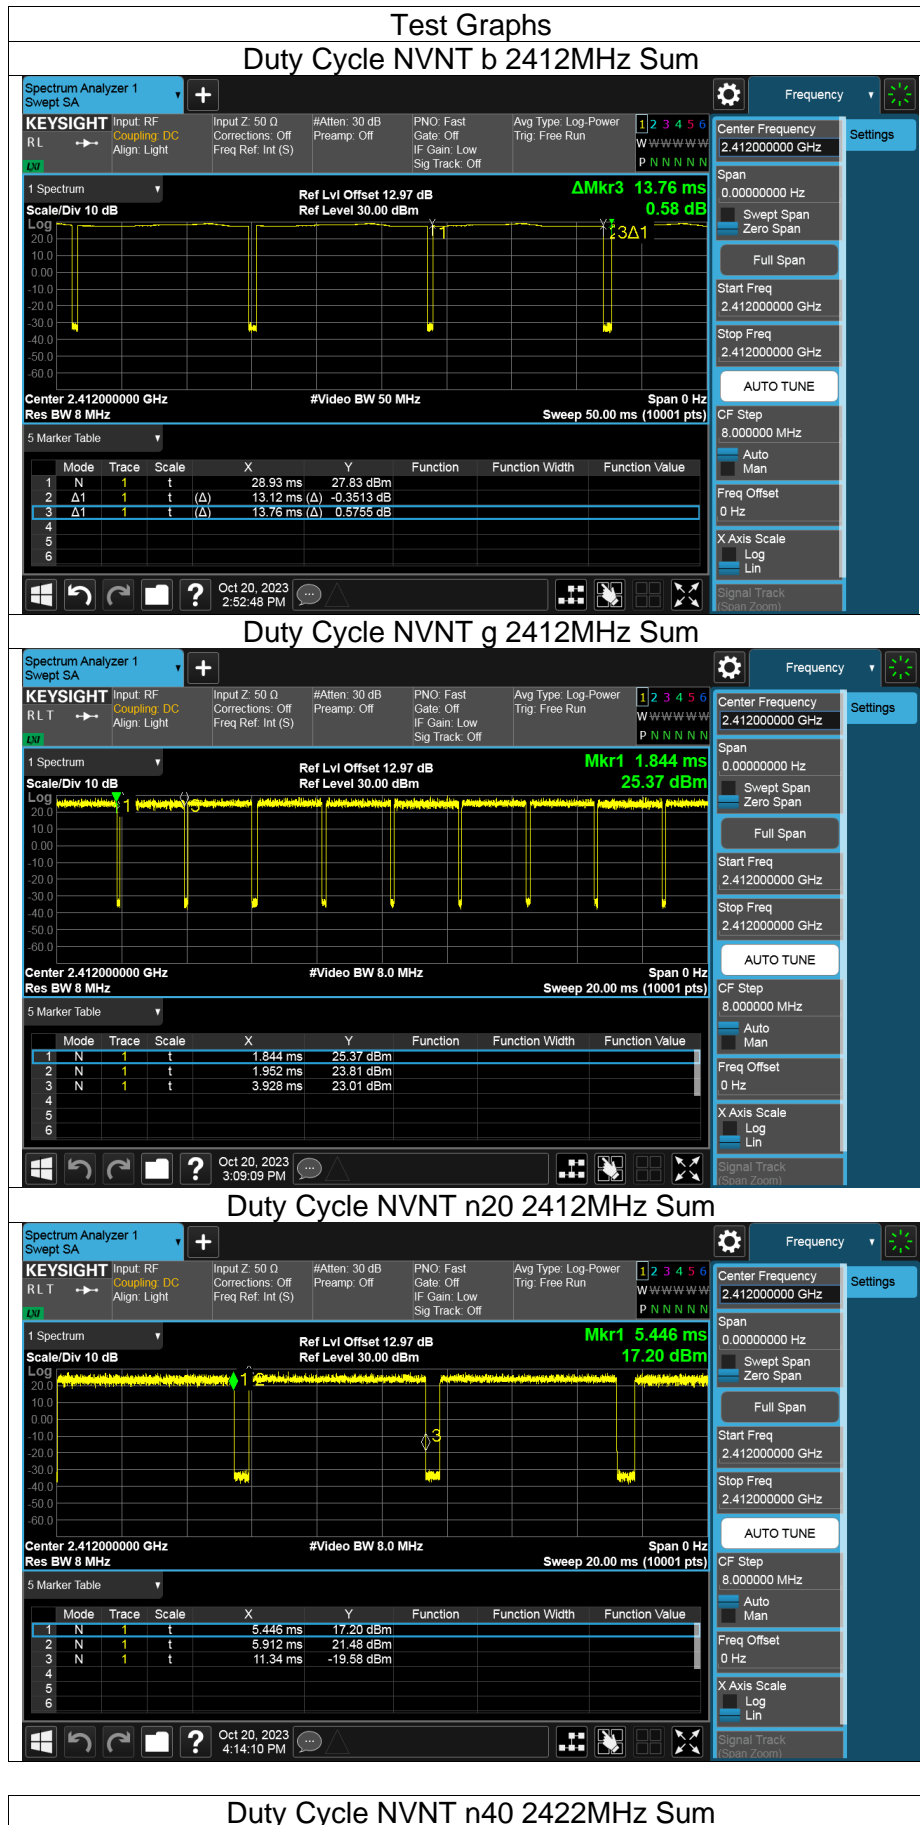

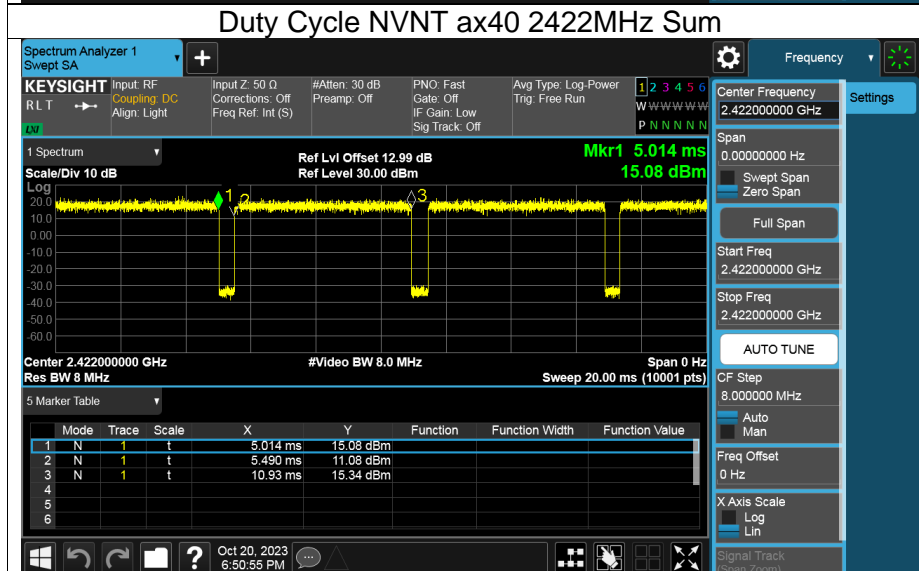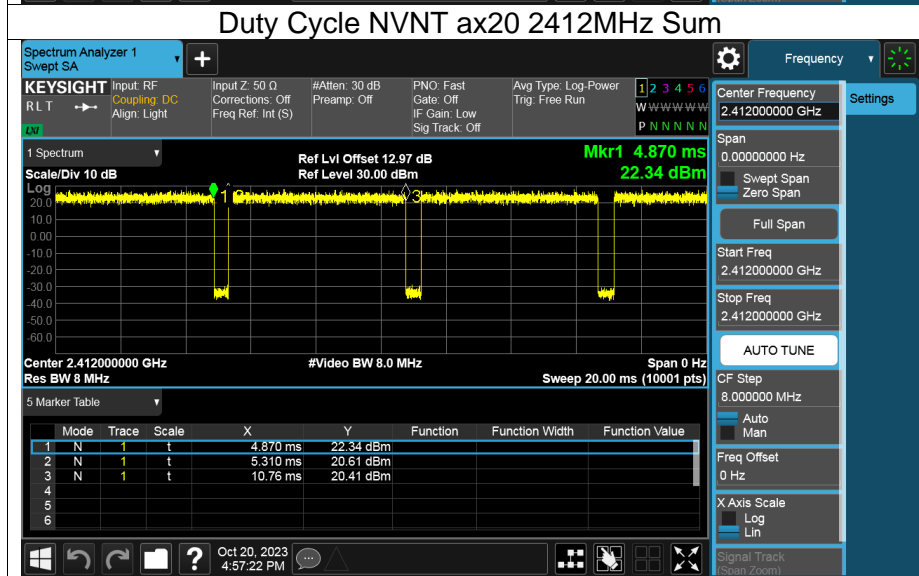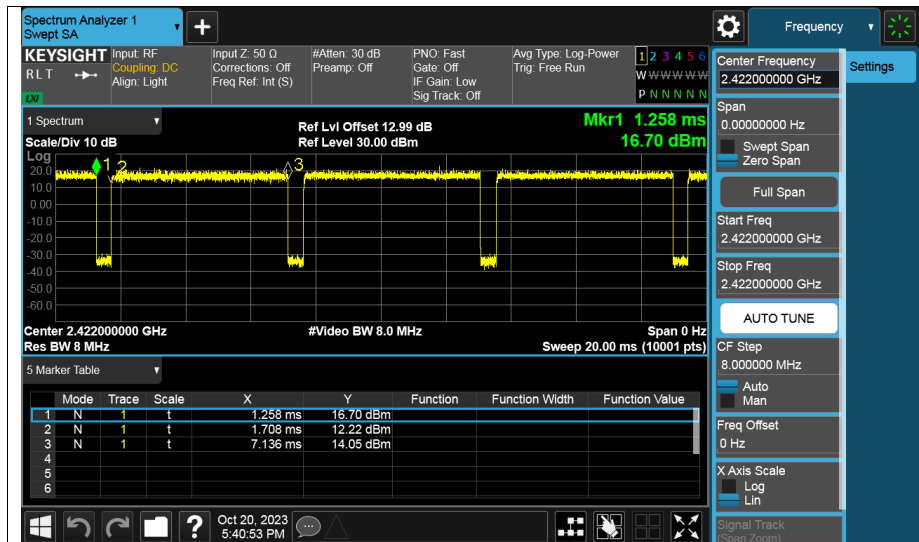

Appendix B: Maximum Conducted Output Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	23.37	≤30	Pass
b	2412	Ant3	23.69	≤30	Pass
b	2412	Sum	26.54	≤30	Pass
b	2417	Ant1	23.82	≤30	Pass
b	2417	Ant3	24.38	≤30	Pass
b	2417	Sum	27.12	≤30	Pass
b	2437	Ant1	24.20	≤30	Pass
b	2437	Ant3	24.27	≤30	Pass
b	2437	Sum	27.25	≤30	Pass
b	2457	Ant1	24.54	≤30	Pass
b	2457	Ant3	24.81	≤30	Pass
b	2457	Sum	27.69	≤30	Pass
b	2462	Ant1	23.82	≤30	Pass
b	2462	Ant3	24.07	≤30	Pass
b	2462	Sum	26.96	≤30	Pass
g	2412	Ant1	22.14	≤30	Pass
g	2412	Ant3	22.03	≤30	Pass
g	2412	Sum	25.10	≤30	Pass
g	2417	Ant1	23.79	≤30	Pass
g	2417	Ant3	24.18	≤30	Pass
g	2417	Sum	27.00	≤30	Pass
g	2437	Ant1	23.82	≤30	Pass
g	2437	Ant3	24.28	≤30	Pass
g	2437	Sum	27.07	≤30	Pass
g	2457	Ant1	24.02	≤30	Pass
g	2457	Ant3	24.42	≤30	Pass
g	2457	Sum	27.23	≤30	Pass
g	2462	Ant1	22.30	≤30	Pass
g	2462	Ant3	22.57	≤30	Pass
g	2462	Sum	25.45	≤30	Pass
n20	2412	Ant1	21.70	≤30	Pass
n20	2412	Ant3	21.82	≤30	Pass
n20	2412	Sum	24.77	≤30	Pass
n20	2417	Ant1	23.74	≤30	Pass
n20	2417	Ant3	24.09	≤30	Pass
n20	2417	Sum	26.93	≤30	Pass
n20	2437	Ant1	24.00	≤30	Pass
n20	2437	Ant3	24.26	≤30	Pass
n20	2437	Sum	27.14	≤30	Pass
n20	2457	Ant1	22.15	≤30	Pass
n20	2457	Ant3	22.38	≤30	Pass
n20	2457	Sum	25.28	≤30	Pass
n20	2462	Ant1	19.75	≤30	Pass
n20	2462	Ant3	20.18	≤30	Pass
n20	2462	Sum	22.98	≤30	Pass
n40	2422	Ant1	18.29	≤30	Pass
n40	2422	Ant3	18.85	≤30	Pass
n40	2422	Sum	21.59	≤30	Pass
n40	2427	Ant1	22.38	≤30	Pass
n40	2427	Ant3	22.56	≤30	Pass

n40	2427	Sum	25.48	≤30	Pass
n40	2437	Ant1	22.28	≤30	Pass
n40	2437	Ant3	22.40	≤30	Pass
n40	2437	Sum	25.35	≤30	Pass
n40	2447	Ant1	19.55	≤30	Pass
n40	2447	Ant3	19.84	≤30	Pass
n40	2447	Sum	22.71	≤30	Pass
n40	2452	Ant1	18.50	≤30	Pass
n40	2452	Ant3	18.94	≤30	Pass
n40	2452	Sum	21.74	≤30	Pass
ax20	2412	Ant1	21.03	≤30	Pass
ax20	2412	Ant3	21.40	≤30	Pass
ax20	2412	Sum	24.23	≤30	Pass
ax20	2417	Ant1	23.64	≤30	Pass
ax20	2417	Ant3	23.88	≤30	Pass
ax20	2417	Sum	26.77	≤30	Pass
ax20	2437	Ant1	23.89	≤30	Pass
ax20	2437	Ant3	24.15	≤30	Pass
ax20	2437	Sum	27.03	≤30	Pass
ax20	2457	Ant1	21.79	≤30	Pass
ax20	2457	Ant3	21.86	≤30	Pass
ax20	2457	Sum	24.84	≤30	Pass
ax20	2462	Ant1	19.56	≤30	Pass
ax20	2462	Ant3	19.63	≤30	Pass
ax20	2462	Sum	22.61	≤30	Pass
ax40	2422	Ant1	18.52	≤30	Pass
ax40	2422	Ant3	18.78	≤30	Pass
ax40	2422	Sum	21.66	≤30	Pass
ax40	2427	Ant1	21.30	≤30	Pass
ax40	2427	Ant3	21.61	≤30	Pass
ax40	2427	Sum	24.47	≤30	Pass
ax40	2437	Ant1	23.18	≤30	Pass
ax40	2437	Ant3	23.05	≤30	Pass
ax40	2437	Sum	26.13	≤30	Pass
ax40	2447	Ant1	19.81	≤30	Pass
ax40	2447	Ant3	19.71	≤30	Pass
ax40	2447	Sum	22.77	≤30	Pass
ax40	2452	Ant1	18.92	≤30	Pass
ax40	2452	Ant3	19.06	≤30	Pass
ax40	2452	Sum	22.00	≤30	Pass

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

Appendix C: -6dB Bandwidth

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict	
b	2412	Ant1	7.102	≥0.5	Pass	
		Ant3	7.128	≥0.5	Pass	
	2417	Ant1	7.079	≥0.5	Pass	
		Ant3	7.132	≥0.5	Pass	
	2437	Ant1	8.222	≥0.5	Pass	
		Ant3	8.061	≥0.5	Pass	
	2457	Ant1	8.105	≥0.5	Pass	
		Ant3	7.131	≥0.5	Pass	
	2462	Ant1	8.07	≥0.5	Pass	
		Ant3	8.056	≥0.5	Pass	
	g	2412	Ant1	16.015	≥0.5	Pass
			Ant3	16.369	≥0.5	Pass
2417		Ant1	16.353	≥0.5	Pass	
		Ant3	16.311	≥0.5	Pass	
2437		Ant1	15.789	≥0.5	Pass	
		Ant3	16.336	≥0.5	Pass	
2457		Ant1	16.321	≥0.5	Pass	
		Ant3	16.301	≥0.5	Pass	
2462		Ant1	16.306	≥0.5	Pass	
		Ant3	16.351	≥0.5	Pass	
n20		2412	Ant1	17.608	≥0.5	Pass
			Ant3	17.603	≥0.5	Pass
	2417	Ant1	17.64		≥0.5	Pass
		Ant3		≥0.5	Pass	
	2437	Ant1	17.243	≥0.5	Pass	
		Ant3	17.516	≥0.5	Pass	
	2457	Ant1	17.551	≥0.5	Pass	
		Ant3	17.623	≥0.5	Pass	
	2462	Ant1	17.611	≥0.5	Pass	
		Ant3	17.563	≥0.5	Pass	
	n40	2422	Ant1	36.311	≥0.5	Pass
			Ant3	36.343	≥0.5	Pass
2427		Ant1	36.314	≥0.5	Pass	
		Ant3	36.319	≥0.5	Pass	
2437		Ant1	36.387	≥0.5	Pass	
		Ant3	36.328	≥0.5	Pass	
2447		Ant1	36.394	≥0.5	Pass	
		Ant3	36.31	≥0.5	Pass	
2452		Ant1	36.319	≥0.5	Pass	
		Ant3	36.321	≥0.5	Pass	
ax20		2412	Ant1	18.749	≥0.5	Pass
			Ant3	18.859	≥0.5	Pass
	2417	Ant1	18.642	≥0.5	Pass	
		Ant3	19.008	≥0.5	Pass	
	2437	Ant1	18.915	≥0.5	Pass	
		Ant3	18.826	≥0.5	Pass	
	2457	Ant1	19.016	≥0.5	Pass	
		Ant3	18.578	≥0.5	Pass	
	2462	Ant1	18.958	≥0.5	Pass	
		Ant3	18.883	≥0.5	Pass	

ax40	2422	Ant1	38.108	≥ 0.5	Pass
		Ant3	37.589	≥ 0.5	Pass
	2427	Ant1	37.838	≥ 0.5	Pass
		Ant3	37.711	≥ 0.5	Pass
	2437	Ant1	37.571	≥ 0.5	Pass
		Ant3	37.951	≥ 0.5	Pass
	2447	Ant1	38.139	≥ 0.5	Pass
		Ant3	37.73	≥ 0.5	Pass
	2452	Ant1	37.791	≥ 0.5	Pass
		Ant3	38.027	≥ 0.5	Pass



