

RF TEST REPORT

For

Shenzhen Weihejia Electronic Technology Co.,LTD

Product Name: BHWW Laptop

Model(s): BaseBook

Report Reference No. : POCE230811002URW

FCC ID : 2AXKI-WH156B

Applicant's Name : Shenzhen Weihejia Electronic Technology Co.,LTD

Address : Block 102, Building 9, Xihu Industrial park, Xikeng community, Yuanshan street, Longgang district, Shenzhen, China

Testing Laboratory : Shenzhen POCE Technology Co., Ltd.

Address : 102 Building H1 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : **47 CFR Part 15.247**
ANSI C63.10-2013 & KDB 558074 D01 Meas Guidance v05r02

Date of Receipt : August 15, 2023

Date of Test : August 15, 2023 to September 11, 2023

Data of Issue : September 11, 2023

Result : **Pass**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen POCE Technology Co., Ltd. This document may be altered or revised by Shenzhen POCE Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample


Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	POCE230811002URW	September 11, 2023

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:




Amy Zhu / File administrators

Supervised by:



Stone Yin / Technique principal

Approved by:



Michael Mo / Manager

CONTENTS

1	TEST SUMMARY	5
1.1	TEST STANDARDS	5
1.2	SUMMARY OF TEST RESULT	5
2	GENERAL INFORMATION	6
2.1	CLIENT INFORMATION	6
2.2	DESCRIPTION OF DEVICE (EUT)	6
2.3	DESCRIPTION OF TEST MODES	7
2.4	DESCRIPTION OF SUPPORT UNITS	8
2.5	EQUIPMENTS USED DURING THE TEST	8
2.6	STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
2.7	AUTHORIZATIONS	9
2.8	ANNOUNCEMENT	9
3	EVALUATION RESULTS (EVALUATION)	10
3.1	ANTENNA REQUIREMENT	10
3.1.1	Conclusion:	10
4	RADIO SPECTRUM MATTER TEST RESULTS (RF)	11
4.1	CONDUCTED EMISSION AT AC POWER LINE	11
4.1.1	E.U.T. Operation:	11
4.1.2	Test Setup Diagram:	11
4.1.3	Test Data:	12
4.2	OCCUPIED BANDWIDTH	14
4.2.1	E.U.T. Operation:	14
4.2.2	Test Setup Diagram:	14
4.2.3	Test Data:	14
4.3	MAXIMUM CONDUCTED OUTPUT POWER	15
4.3.1	E.U.T. Operation:	15
4.3.2	Test Setup Diagram:	15
4.3.3	Test Data:	15
4.4	POWER SPECTRAL DENSITY	16
4.4.1	E.U.T. Operation:	16
4.4.2	Test Setup Diagram:	16
4.4.3	Test Data:	16
4.5	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	17
4.5.1	E.U.T. Operation:	17
4.5.2	Test Setup Diagram:	17
4.5.3	Test Data:	17
4.6	BAND EDGE EMISSIONS (RADIATED)	18
4.6.1	E.U.T. Operation:	18
4.6.2	Test Setup Diagram:	18
4.6.3	Test Data:	19
4.7	EMISSIONS IN FREQUENCY BANDS (BELOW 1GHZ)	22
4.7.1	E.U.T. Operation:	22
4.7.2	Test Setup Diagram:	22
4.7.3	Test Data:	23
4.8	EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHZ)	26
4.8.1	E.U.T. Operation:	26
4.8.2	Test Setup Diagram:	26
4.8.3	Test Data:	26
5	TEST SETUP PHOTOS	29

6	PHOTOS OF THE EUT	30
	APPENDIX	31
1.	-6dB BANDWIDTH	32
2.	99% OCCUPIED BANDWIDTH	34
3.	BANDEDGE	36
4.	PEAK OUTPUT POWER	38
5.	POWER SPECTRAL DENSITY	40
6.	SPURIOUS EMISSION	42

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2 Summary of Test Result

Item	Method	Requirement	Result
Antenna requirement		47 CFR 15.203	Pass
Conducted Emission at AC power line	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Emissions in frequency bands (below 1GHz)	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass
Emissions in frequency bands (above 1GHz)	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d)	Pass

Note: 1.N/A -this device(EUT) is not applicable to this testing item
2. RF-conducted test results including cable loss.

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Shenzhen Weihejia Electronic Technology Co.,LTD
Address : Block 102, Building 9, Xihu Industrial park, Xikeng community, Yuanshan street, Longgang district, Shenzhen, China

Manufacturer : Shenzhen Weihejia Electronic Technology Co.,LTD
Address : Block 102, Building 9, Xihu Industrial park, Xikeng community, Yuanshan street, Longgang district, Shenzhen, China

2.2 Description of Device (EUT)

Product Name:	BHWW Laptop
Sample number:	230811003
Model/Type reference:	BaseBook
Series Model:	N/A
Model Difference:	N/A
Trade Mark:	BHWW
Product Description:	Laptop
Power Supply:	100-240VAC 50/60Hz 1.0A from adapter ; DC7.7V from battery
Power Adaptor:	INPUT:100-240VAC 50/60Hz 1.0A; OUTPUT:12V 3000mA
Operation Frequency:	2402MHz to 2480MHz
Number of Channels:	40
Modulation Type:	GFSK
Antenna Type:	FPC Antenna
Antenna Gain:	3.97dBi
HW:	REV11
SW:	V7.0.0

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
--------------	-----------------

Lowest channel	2402MHz
Middle channel	2440MHz
Highest channel	2480MHz

2.3 Description of Test Modes


No	Title	Description
TM1	TX mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with GFSK modulation.

Description


Keep the EUT works in continuously transmitting mode (100%duty cycle)with GFSK modulation.

- Special software is used.
- Through engineering command into the engineering mode.
engineering command: ***##3646633##***
- Other method:

Special software:

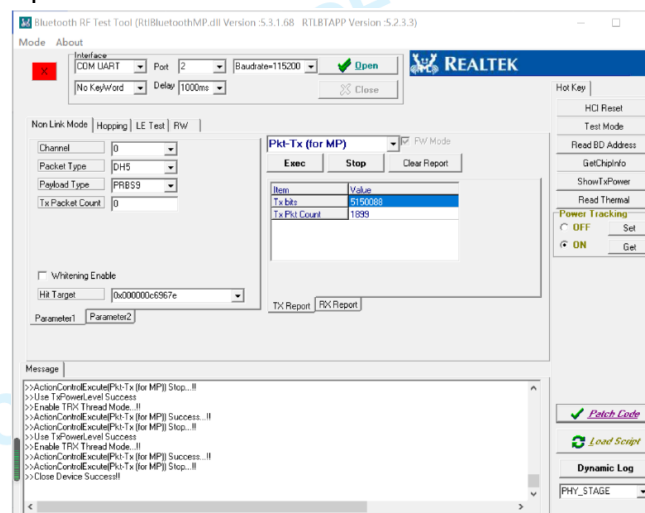

Duty cycle

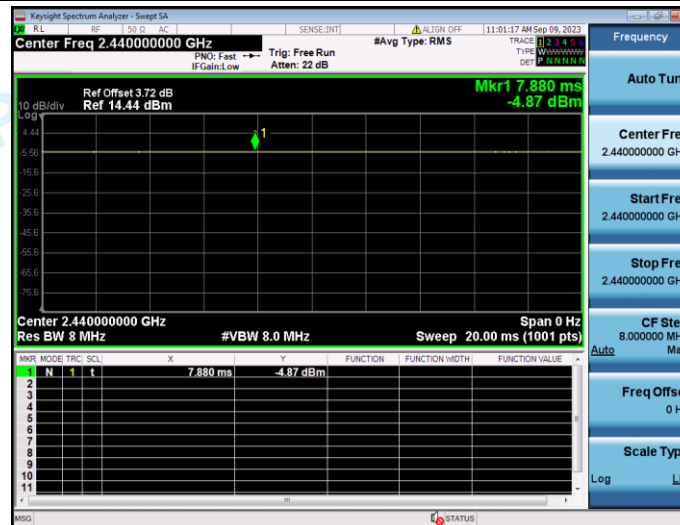

2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Description	Manufacturer	Model No.	Remark	Certification
1	ADAPTER	Weiheng Digital Company Limited	BCT120300-111DZ	Provide by client	SDOC
2					

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal. Due Date
Shielding room	CY	8*4*3	20160102	2023/1/26	2025/1/25
Pulse Limiter	Schwarzbeck	VTSD 9561	561-G071	2023/2/27	2024/2/26
Cable	Schwarzbeck	/	/	2023/2/27	2024/2/26
Test Receiver	Rohde & Schwarz	ESPI	1164.6607K03-102109-MH	2023/6/13	2024/6/12
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2022/12/29	2023/12/28
L.I.S.N	Schwarzbeck	NSLK 8126	NSLK 8126	/	/
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
EMI Testsoftware	Farad	EZ -EMC	V1.1.42	/	/

Emissions in restricted frequency bands and RF					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Test Receiver	R&S	ESCI	102109	2023/6/13	2024/6/12
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2023/6/14	2024/6/13
966 Chamber	CY	9*6*6	20160101	2023/1/26	2025/1/25
Bore-sighting Antenna rack	PBB	1308503	16033	/	/
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2021/7/5	2024/7/4
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2023/5-21	2025/5-20
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023/5/13	2025/5/12
Horn antenna	COM-POWER	AH-1840(40G)	10100008	2023/4/5	2025/4/4
Power APM(LF)	Schwarzbeck	BBV9743	9743-151	2023/6/13	2024/6/12
Power APM(HF)	Schwarzbeck	BBV9718	9718-282	2023/6/13	2024/6/12
Cable(LF)#2	Schwarzbeck	/	/	2023/2/27	2024/2/26
Cable(LF)#1	Schwarzbeck	/	/	2023/2/27	2024/2/26
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2023/2/28	2024/2/27
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2023/2/27	2024/2/26
Power divider	MIDEWEST	PWD-2533	SMA-79	2023/5/11	2026/5/10
signal generator	Keysight	N5181A	MY48180415	2022/12/10	2023/12/9
signal generator	Keysight	N5182A	MY50143455	2022/12/29	2023/12/28
Spectrum Analyzer	Keysight	N9020A	MY53420323	2022/12/29	2023/12/28
RF Sensor Unit	TACHOY	TR1029-2	000001	/	/

RF Control Unit	TACHOY	TR1029-1	000001	/	/
Position Controller	MF	MF-7802	/	/	/
EMI Testsoftware	Farad	EZ -EMC	V1.1.42	/	/
RF TestSoftware	TACHOY	RTS-01	V2.0.0.0	/	/

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
RF conducted power	±0.733dB
RF power density	±0.234%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.7 Authorizations

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by POCE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

3.1.1 Conclusion:

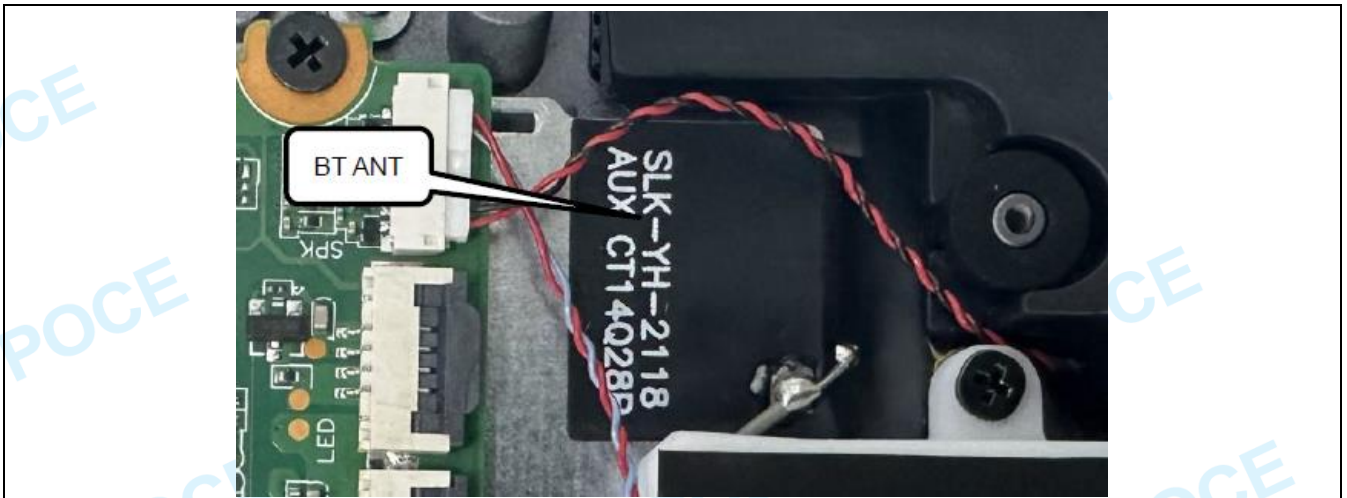

4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

4.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.1.2 Test Setup Diagram:

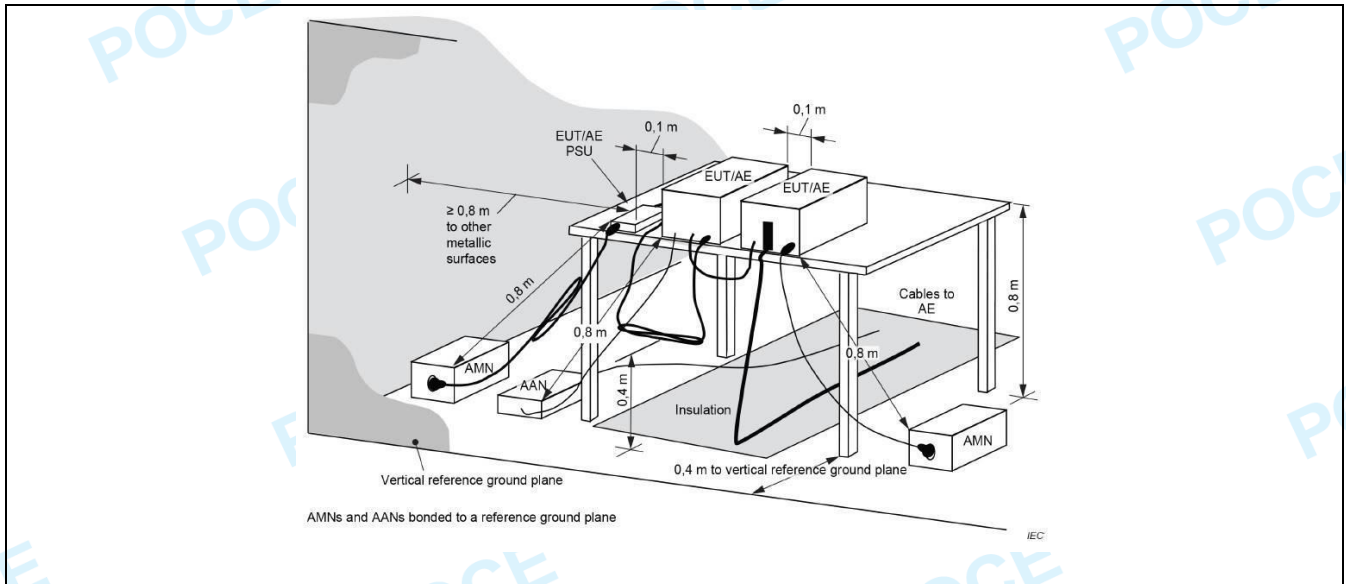


4.1.3 Test Data:

TM1 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: L

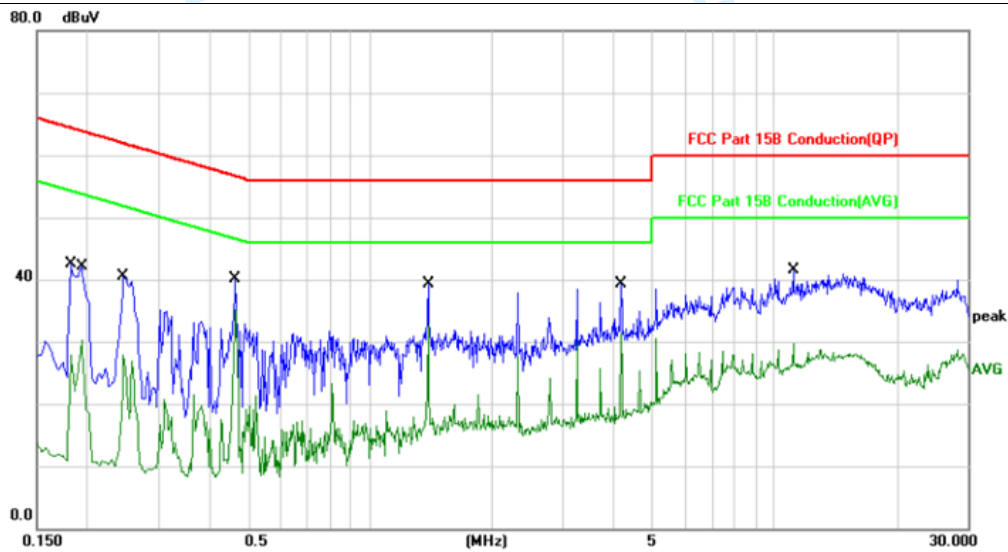

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1819	32.45	9.99	42.44	64.39	-21.95	QP	
2		0.1940	20.26	9.99	30.25	53.86	-23.61	AVG	
3		0.2460	30.43	9.99	40.42	61.89	-21.47	QP	
4		0.2460	17.94	9.99	27.93	51.89	-23.96	AVG	
5		0.4660	30.08	9.94	40.02	56.58	-16.56	QP	
6	*	0.4660	25.16	9.94	35.10	46.58	-11.48	AVG	
7		1.3940	29.45	9.87	39.32	56.00	-16.68	QP	
8		1.3940	22.80	9.87	32.67	46.00	-13.33	AVG	
9		4.1779	29.28	9.99	39.27	56.00	-16.73	QP	
10		4.1779	21.25	9.99	31.24	46.00	-14.76	AVG	
11		11.1380	31.35	10.24	41.59	60.00	-18.41	QP	
12		11.1380	19.53	10.24	29.77	50.00	-20.23	AVG	

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L

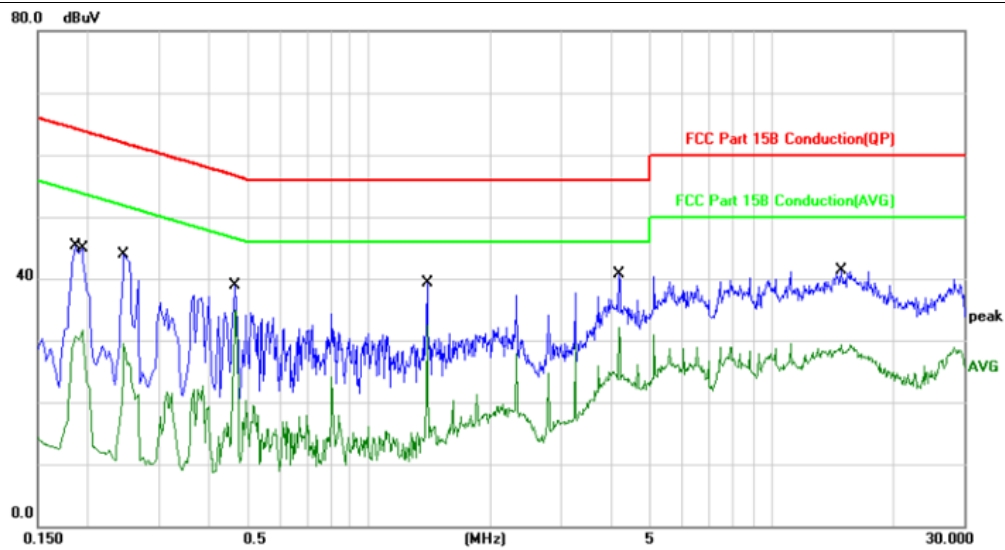

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1860	35.28	9.99	45.27	64.21	-18.94	QP	
2	0.1940	21.65	9.99	31.64	53.86	-22.22	AVG	
3	0.2460	33.98	9.99	43.97	61.89	-17.92	QP	
4	0.2460	19.48	9.99	29.47	51.89	-22.42	AVG	
5	0.4660	28.92	9.94	38.86	56.58	-17.72	QP	
6 *	0.4660	24.87	9.94	34.81	46.58	-11.77	AVG	
7	1.3940	29.52	9.87	39.39	56.00	-16.61	QP	
8	1.3940	22.70	9.87	32.57	46.00	-13.43	AVG	
9	4.1779	30.67	9.99	40.66	56.00	-15.34	QP	
10	4.1779	22.03	9.99	32.02	46.00	-13.98	AVG	
11	14.8580	31.07	10.23	41.30	60.00	-18.70	QP	
12	14.8580	19.16	10.23	29.39	50.00	-20.61	AVG	

NOTE:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor, Over=Limit- Measurement
4. The test results only show the worst mode or worst channel.


4.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	<ul style="list-style-type: none"> a) Set RBW = 100 kHz. b) Set the VBW \geq [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.2.2 Test Setup Diagram:

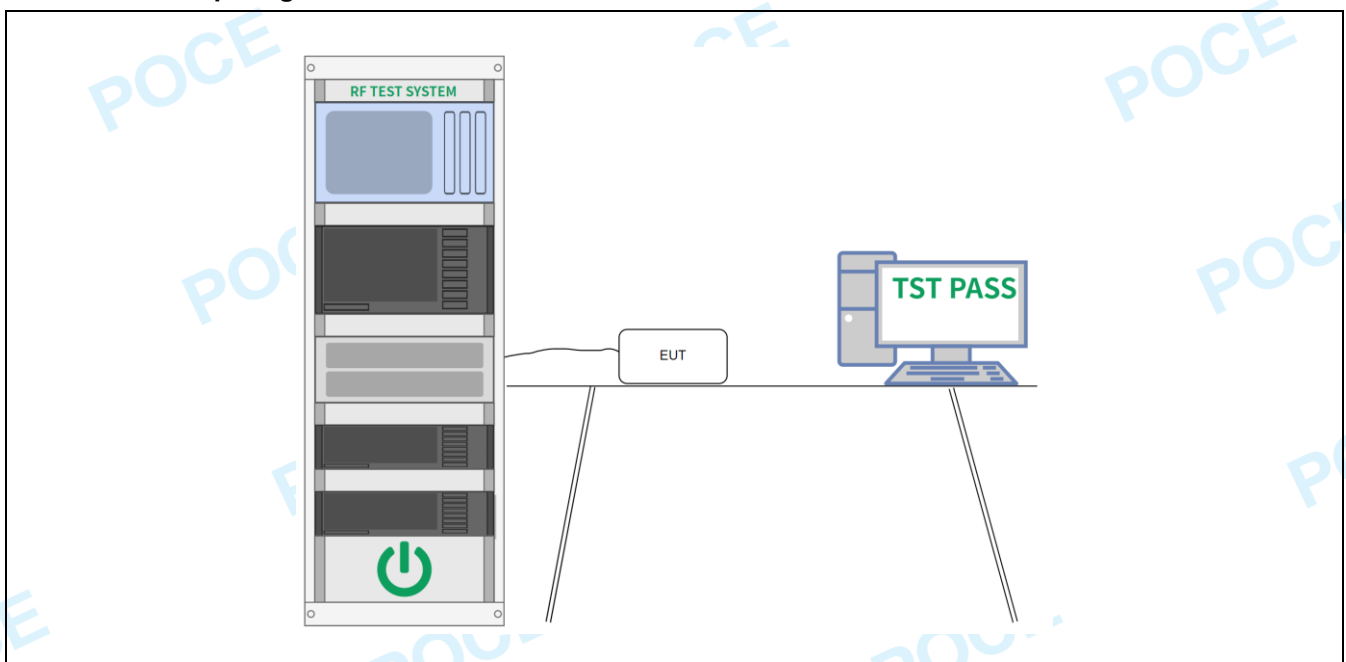

4.2.3 Test Data:

Please Refer to Appendix for Details.


4.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.3.2 Test Setup Diagram:

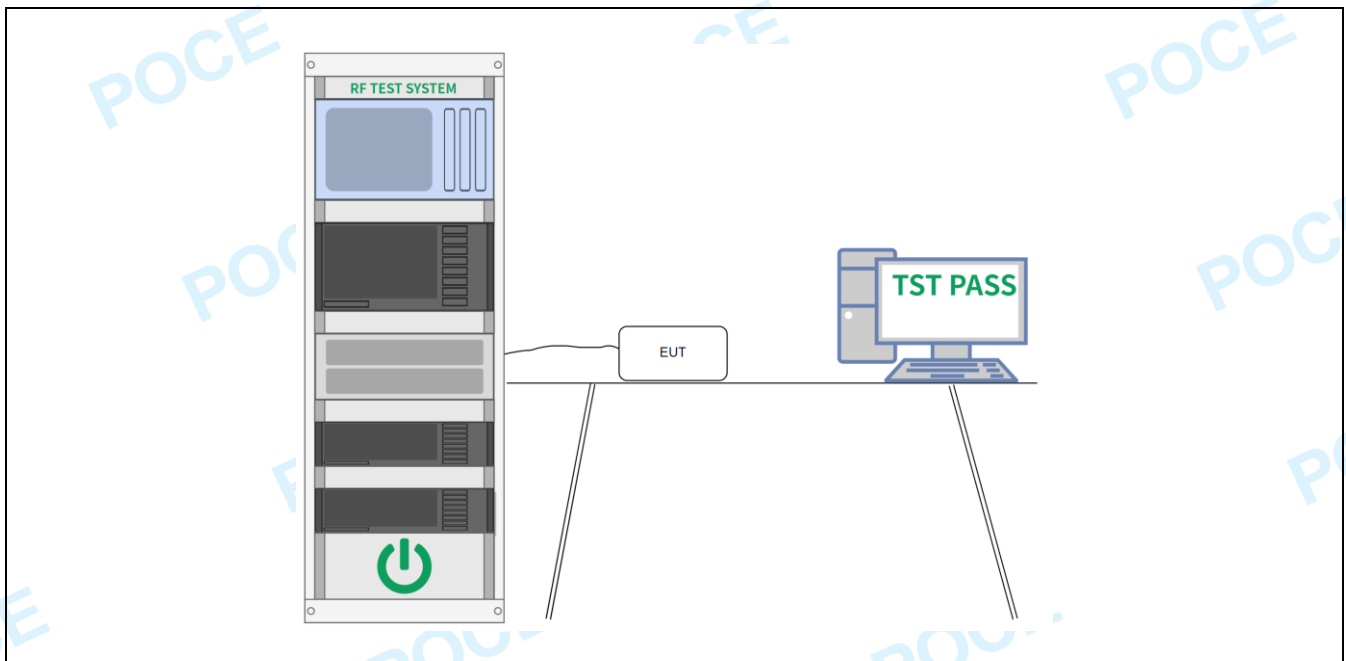

4.3.3 Test Data:

Please Refer to Appendix for Details.


4.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.4.2 Test Setup Diagram:

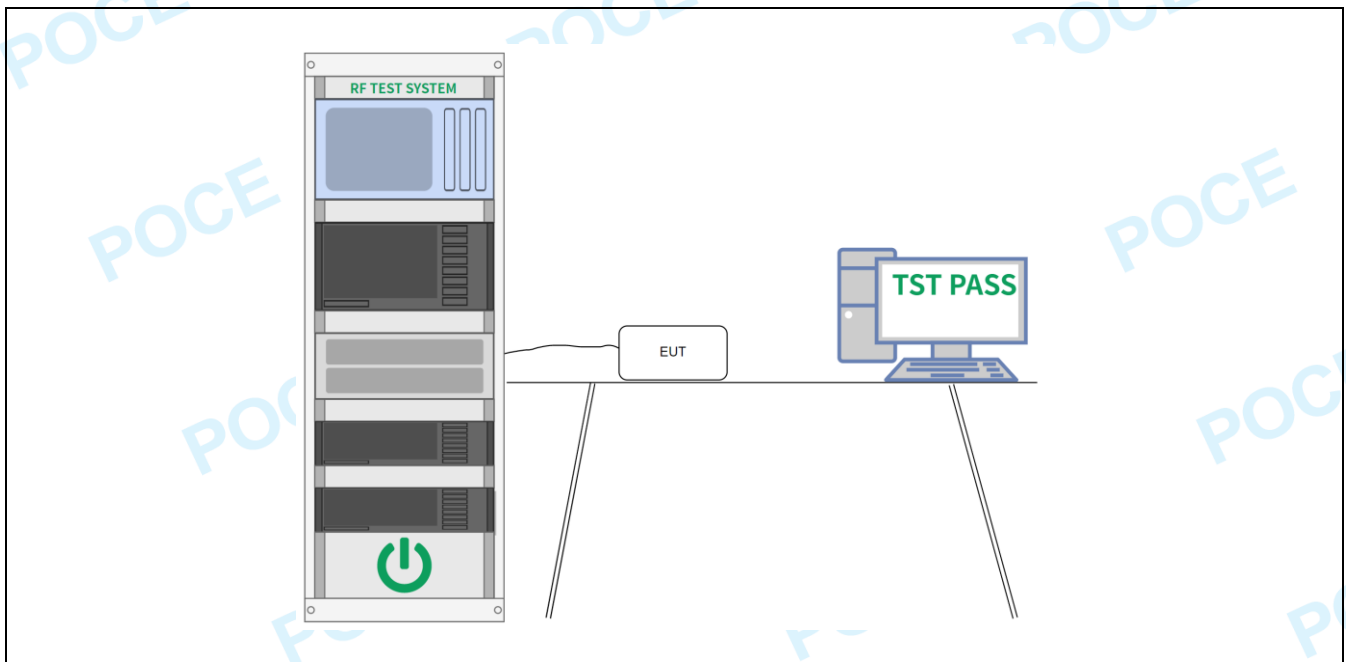

4.4.3 Test Data:

Please Refer to Appendix for Details.


4.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d)
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.5.2 Test Setup Diagram:

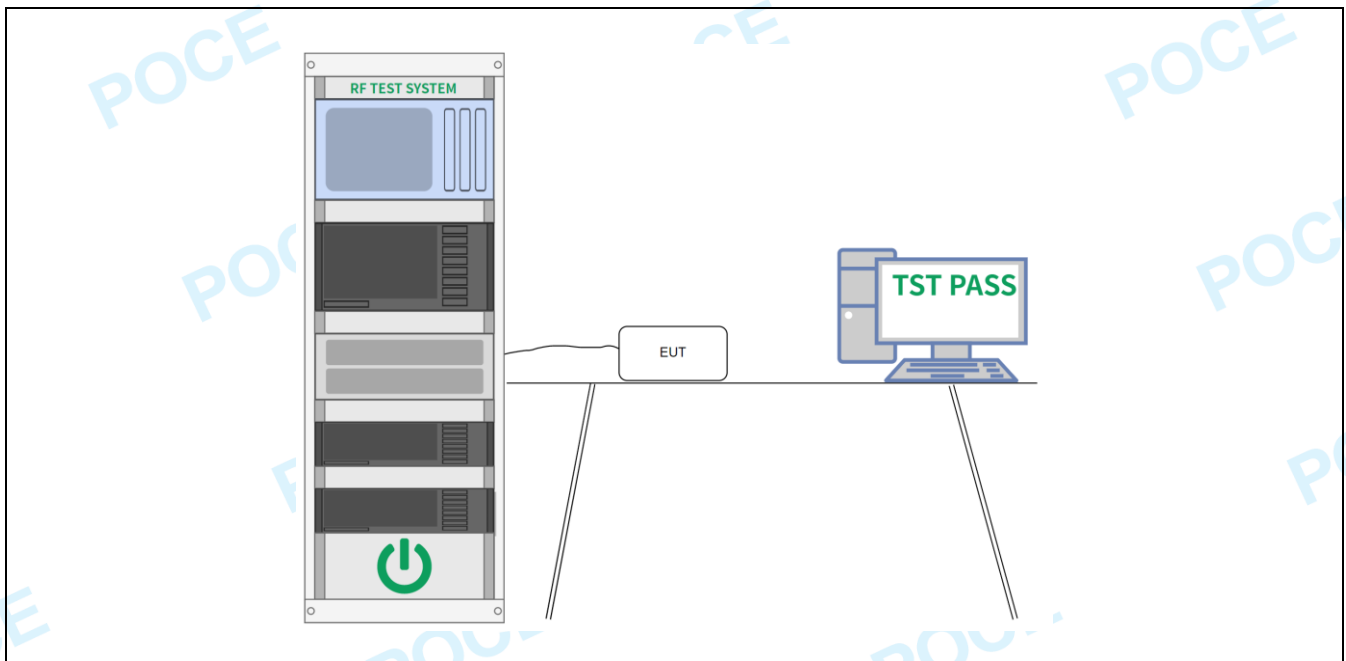

4.5.3 Test Data:

Please Refer to Appendix for Details.


4.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

4.6.1 E.U.T. Operation:


Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.6.2 Test Setup Diagram:

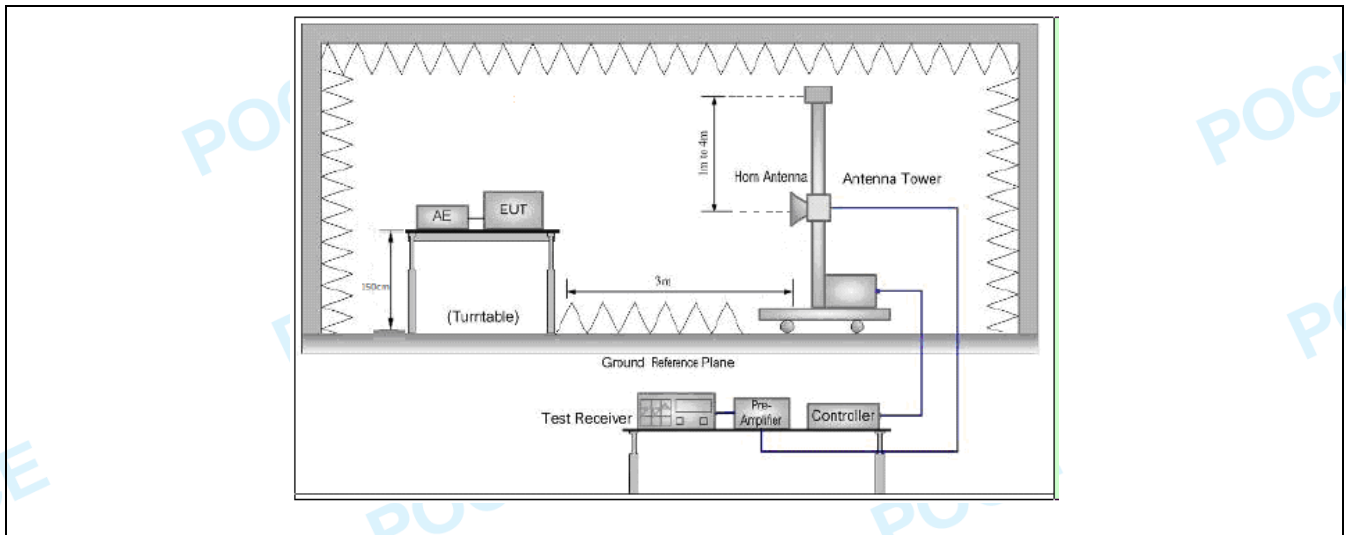


4.6.3 Test Data:

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

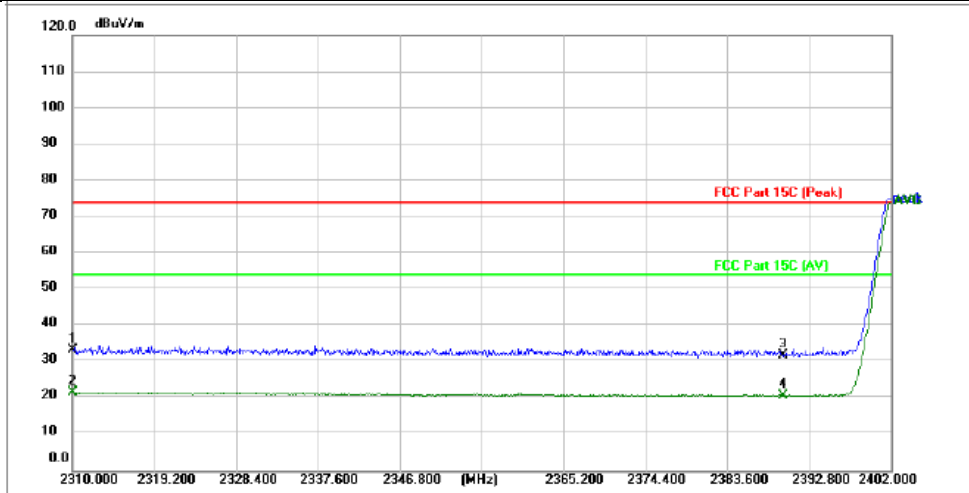


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.37	-6.93	33.44	74.00	-40.56	peak			P	
2 *	2310.000	28.53	-6.93	21.60	54.00	-32.40	AVG			P	
3	2390.000	38.69	-6.72	31.97	74.00	-42.03	peak			P	
4	2390.000	27.59	-6.72	20.87	54.00	-33.13	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

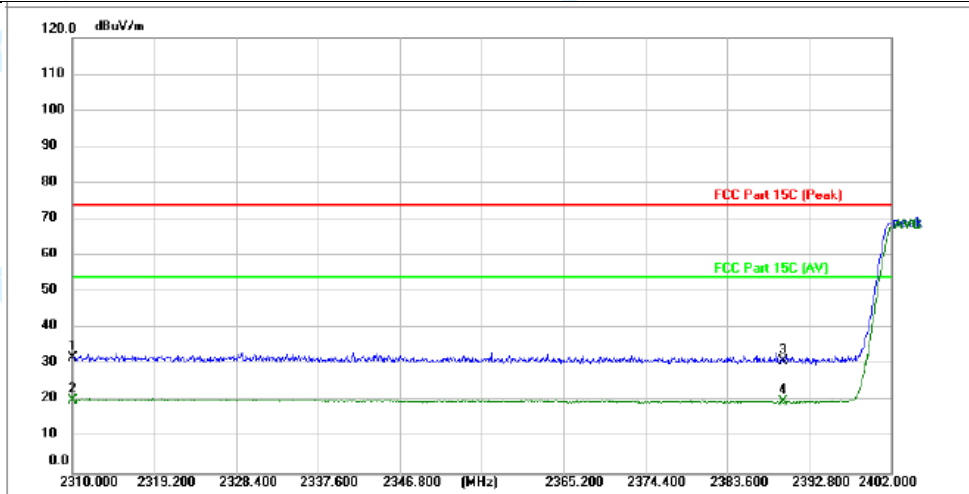


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.31	-8.23	32.08	74.00	-41.92	peak			P	
2 *	2310.000	28.63	-8.23	20.40	54.00	-33.60	AVG			P	
3	2390.000	38.99	-7.91	31.08	74.00	-42.92	peak			P	
4	2390.000	27.94	-7.91	20.03	54.00	-33.97	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

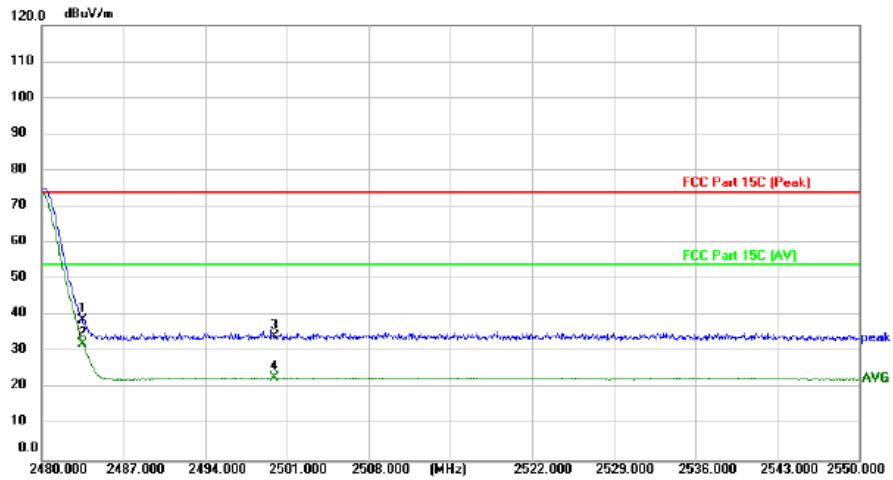

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	45.20	-6.47	38.73	74.00	-35.27	peak			P	
2 *	2483.500	38.78	-6.47	32.31	54.00	-21.69	AVG			P	
3	2500.000	40.86	-6.43	34.43	74.00	-39.57	peak			P	
4	2500.000	29.39	-6.43	22.96	54.00	-31.04	AVG			P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

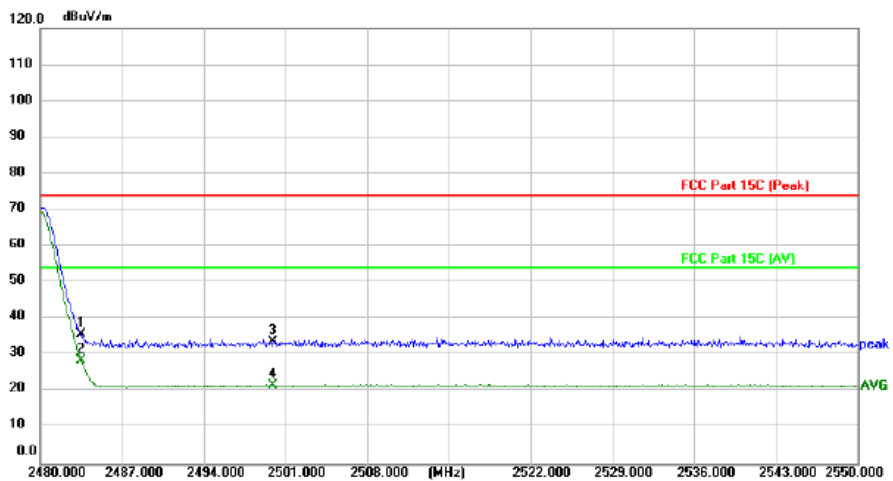

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	43.40	-7.54	35.86	74.00	-38.14	peak			P	
2 *	2483.500	36.15	-7.54	28.61	54.00	-25.39	AVG			P	
3	2500.000	41.08	-7.48	33.60	74.00	-40.40	peak			P	
4	2500.000	29.18	-7.48	21.70	54.00	-32.30	AVG			P	

Note: Peak and Average measurement were performed at the frequencies with maximized peak emission.
 Measurement Level = Reading level + Correct Factor, Over=Limit- Measurement

Note:

Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only have one antenna). The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

For correlated unequal antenna gain

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10G_1/20 + 10G_2/20 + \dots + 10G_N/20}{NANT}\right] \text{ dBi}$$

For completely uncorrelated unequal antenna gain

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10G_1/10 + 10G_2/10 + \dots + 10G_N/10}{NANT}\right] \text{ dBi}$$

Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD

(i is the number of antennas)

$$(\# \text{VALUE! mW} + \text{mW}) = \# \text{VALUE! mW} = \text{dBm}$$

Sample e.i.r.p. Calculation:

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$


4.7 Emissions in frequency bands (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.7.2 Test Setup Diagram:

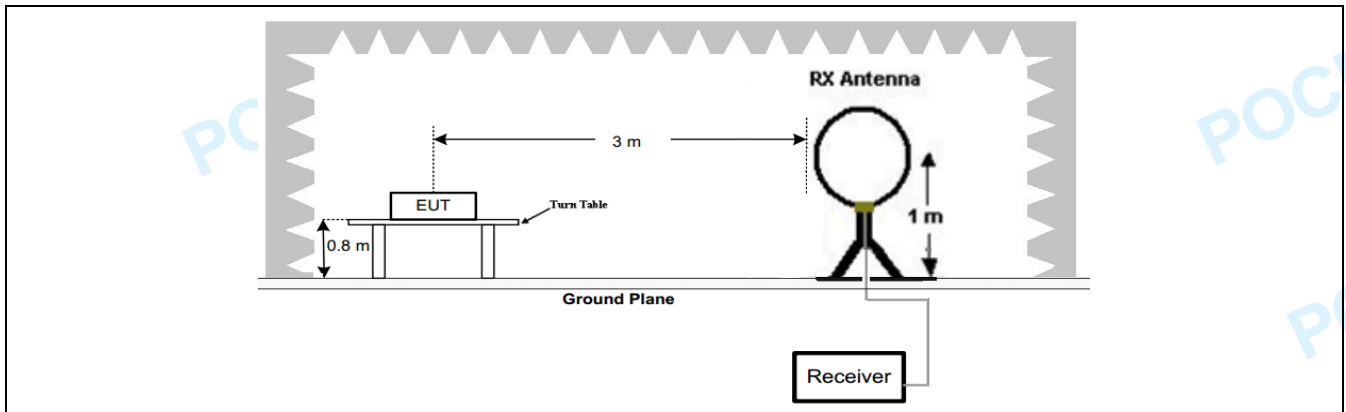

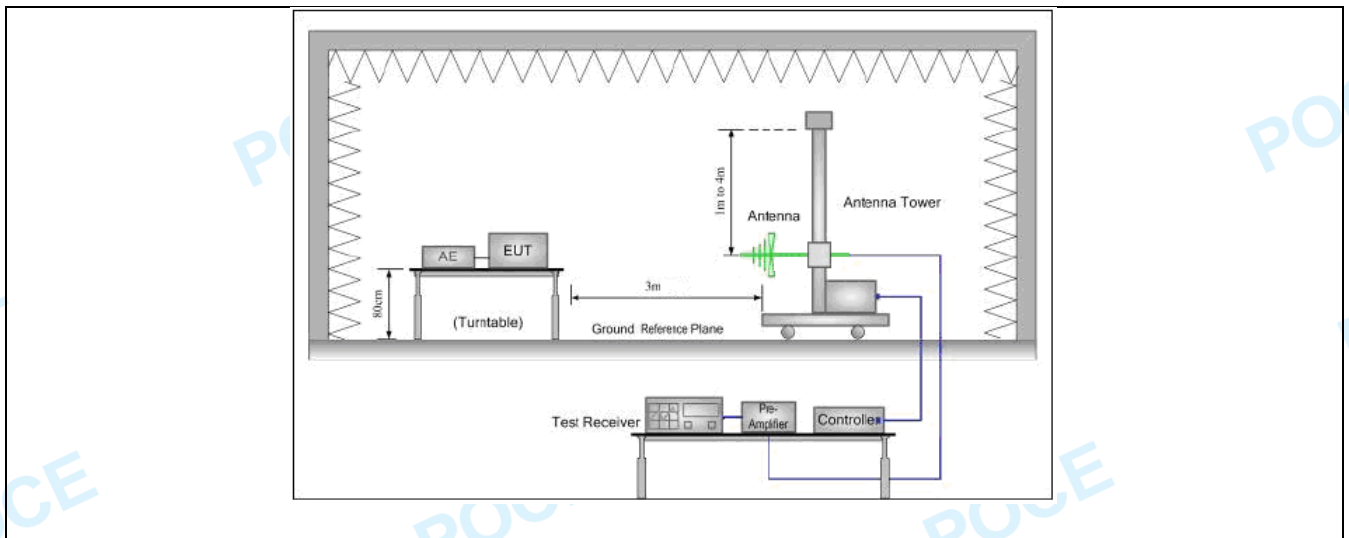

4.7.3 Test Data:


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

NOTE: The test results only show the worst mode or worst channel.


Between 30MHz – 1000MHz

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

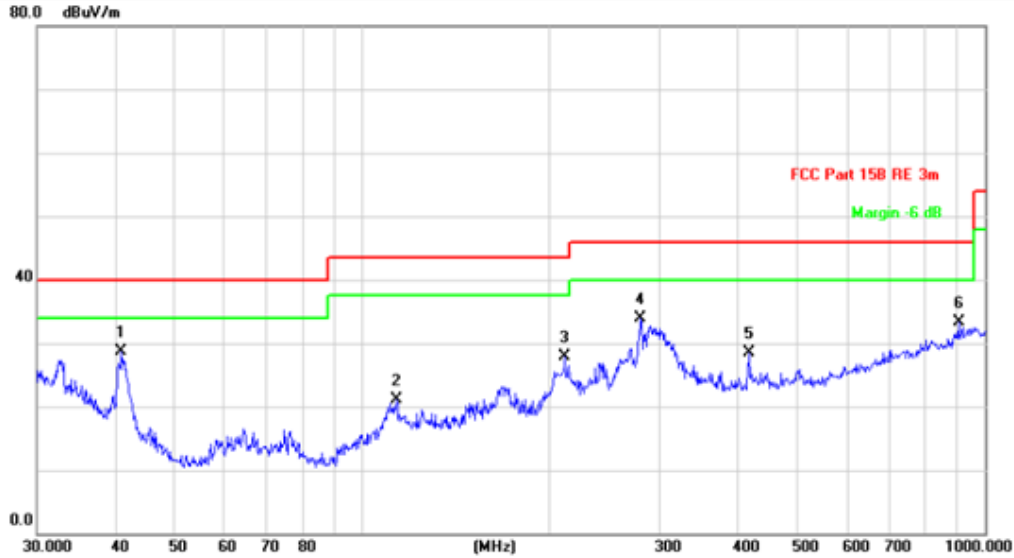

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	40.9881	33.98	-5.23	28.75	40.00	-11.25	QP			
2	113.3163	27.29	-6.21	21.08	43.50	-22.42	QP			
3	211.5265	34.29	-6.43	27.86	43.50	-15.64	QP			
4	280.0237	37.87	-3.95	33.92	46.00	-12.08	QP			
5	417.6411	29.43	-0.91	28.52	46.00	-17.48	QP			
6	906.4824	25.70	7.51	33.21	46.00	-12.79	QP			

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

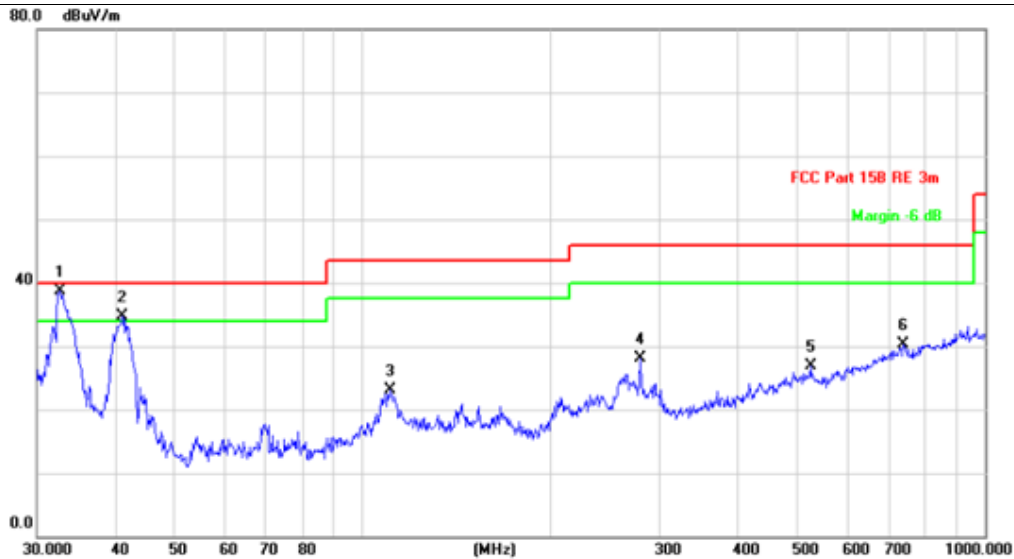

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	32.7486	37.99	0.71	38.70	40.00	-1.30	QP		
2	!	41.1319	40.01	-5.32	34.69	40.00	-5.31	QP		
3		110.5687	29.59	-6.47	23.12	43.50	-20.38	QP		
4		279.0436	32.12	-3.95	28.17	46.00	-17.83	QP		
5		524.5540	26.21	0.60	26.81	46.00	-19.19	QP		
6		739.6604	25.40	4.85	30.25	46.00	-15.75	QP		

Note: Peak and Average measurement were performed at the frequencies with maximized peak emission. Measurement Level = Reading level + Correct Factor, Over=Limit- Measurement

Note:

Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1,..., Core i were first measured separately, as shown in the section above (this product only has one antenna). The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

For correlated unequal antenna gain

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10G_1/20 + 10G_2/20 + \dots + 10G_N/20}{NANT}\right] \text{ dBi}$$

For completely uncorrelated unequal antenna gain

$$\text{Directional gain} = 10 \cdot \log\left[\frac{10G_1/10 + 10G_2/10 + \dots + 10G_N/10}{NANT}\right] \text{ dBi}$$

Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i. = MIMO/CDD

(i is the number of antennas)

$$(\#VALUE! \text{ mW} + \text{mW}) = \#VALUE! \text{ mW} = \text{dBm}$$

Sample e.i.r.p. Calculation:

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$


4.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

4.8.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23.5 °C	Humidity:	56 %	Atmospheric Pressure:	102 kPa
Pre test mode:	TM1				
Final test mode:	TM1				


4.8.2 Test Setup Diagram:

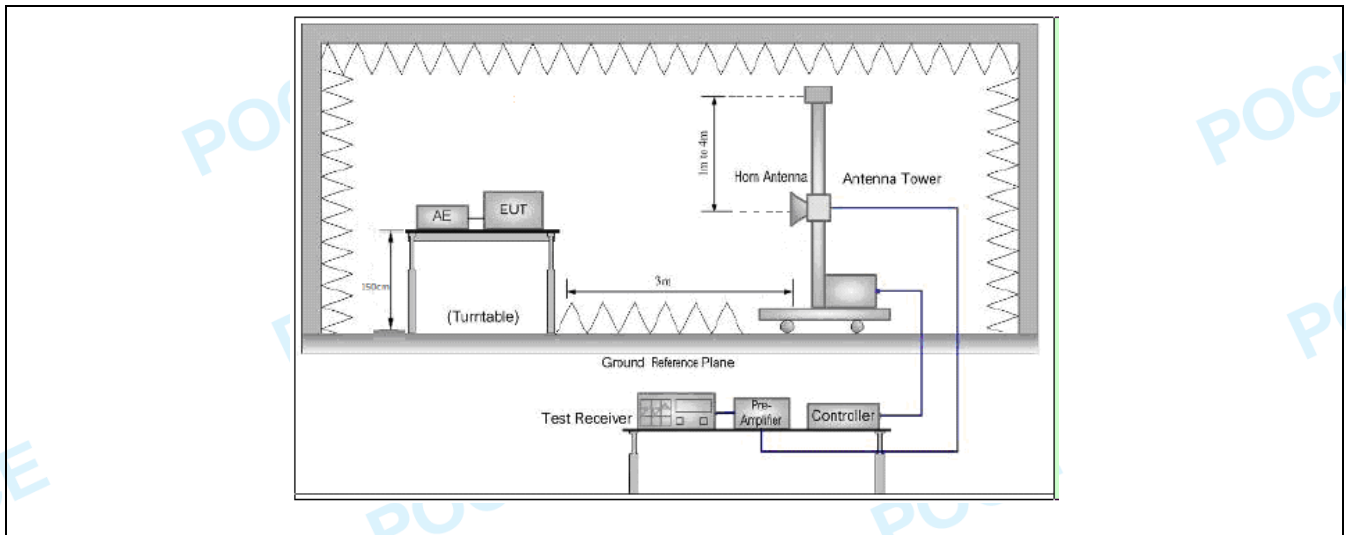


4.8.3 Test Data:

The testing frequency can reach up to 12GHz, but the worst mode and channel are recorded,

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: H

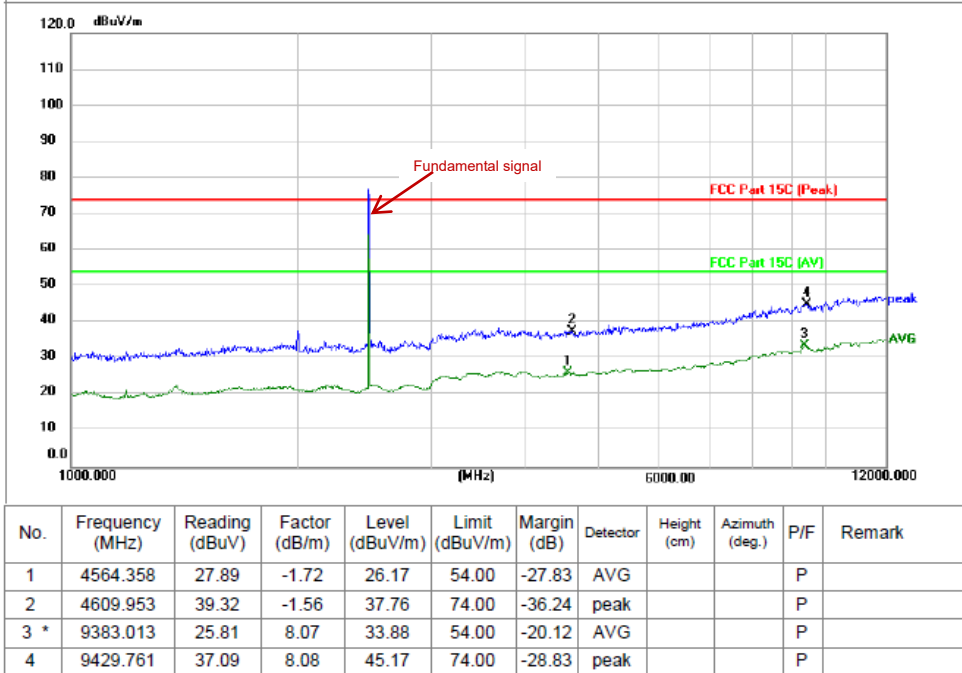

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: H

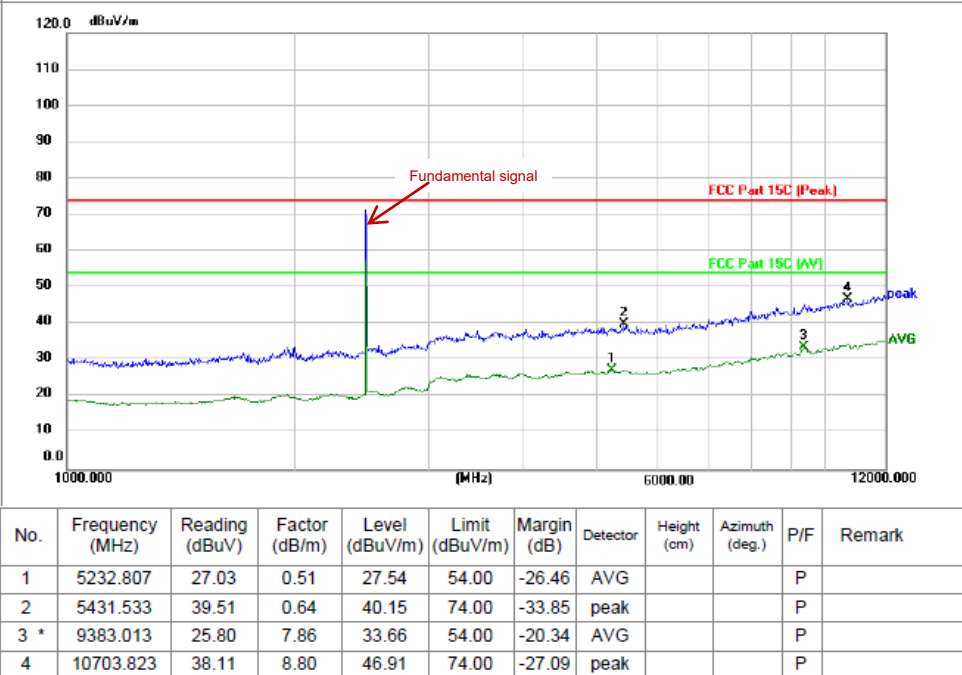

Remark: Margin = Limit – Level
 Correction Factor= Antenna Factor + Cable loss – Pre-amplifier
 Level=Test receiver reading + correction factor

Note:

Per ANSI C63.10-2013, if there are two or more antennas, the conducted powers at Core 0, Core 1, ..., Core i were first measured separately, as shown in the section above (this product only has one antenna). The measured values were then summed in linear power units then converted back to dBm.

Sample Multiple antennas Calculation: Core 0 + Core 1 + ... Core i = MIMO/CDD
(i is the number of antennas)


(#VALUE! mW + XX mW) = #VALUE! mW = XX dBm

Sample e.i.r.p. Calculation:


XX dBm = Conducted Power (dBm) + Ant gain (dBi)

5 TEST SETUP PHOTOS

Emissions in frequency bands (below 1GHz)

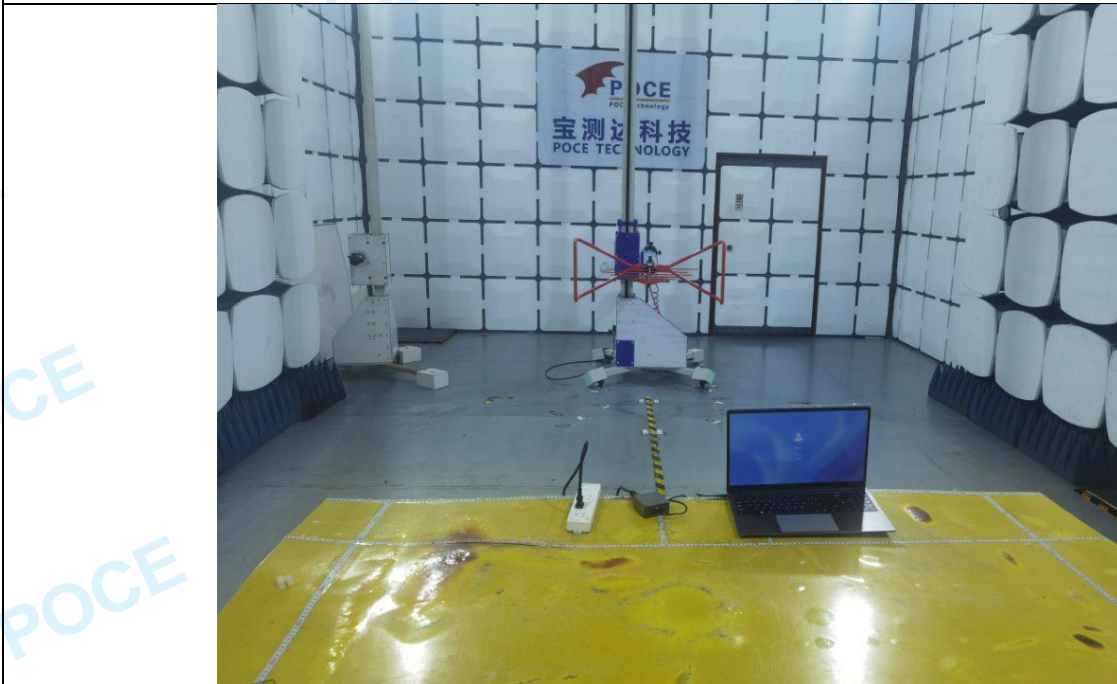

Emissions in frequency bands (above 1GHz)

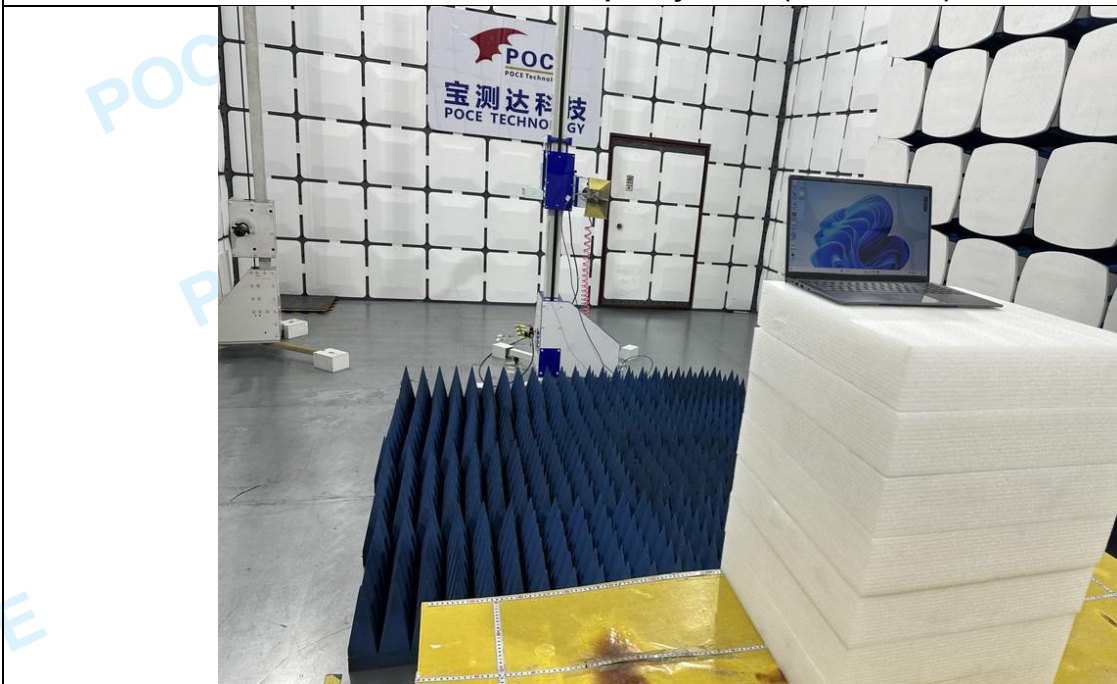

Conducted Emission at AC power line





6 PHOTOS OF THE EUT

Please refer to report No.: POCE230811187TRW for details.


Appendix

1. -6dB Bandwidth

Condition	Antenna	Rate	Frequency (MHz)	-6dB BW(kHz)	limit(kHz)	Result
NVNT	ANT1	1Mbps	2402	731.79	500	Pass
NVNT	ANT1	1Mbps	2440	727.85	500	Pass
NVNT	ANT1	1Mbps	2480	728.76	500	Pass

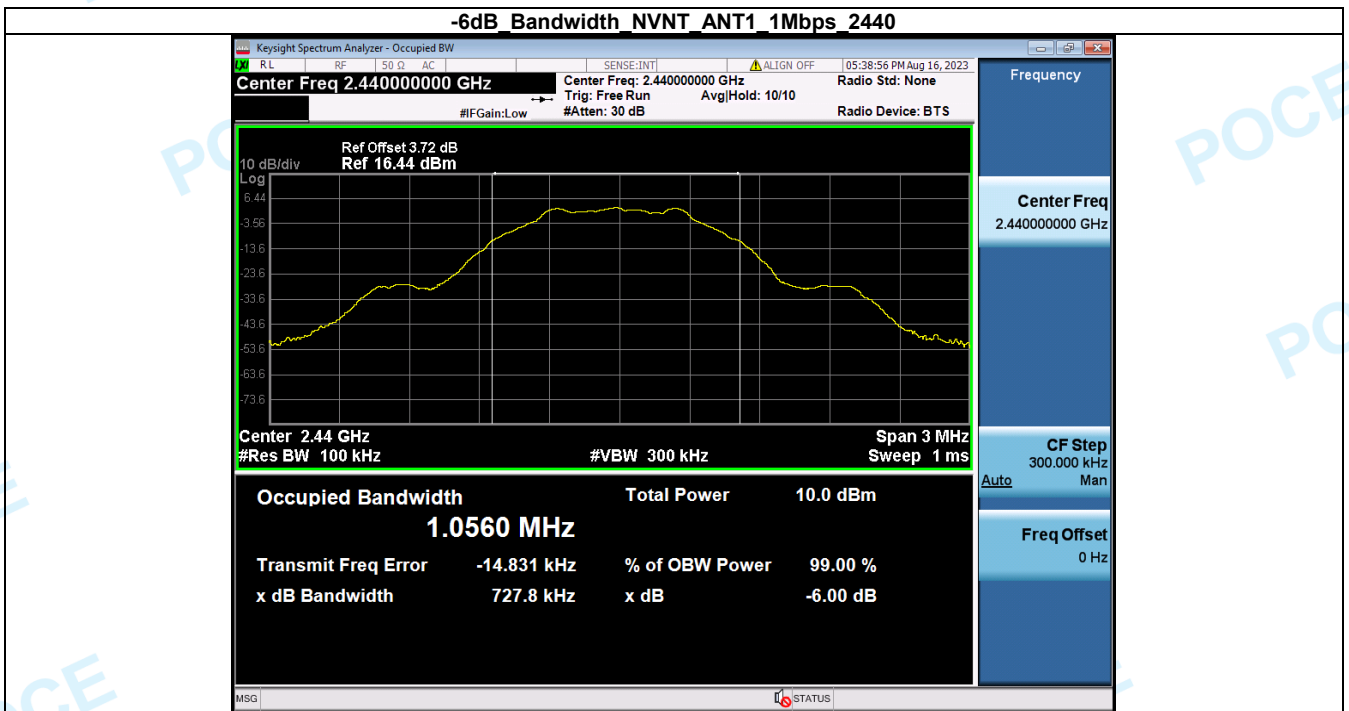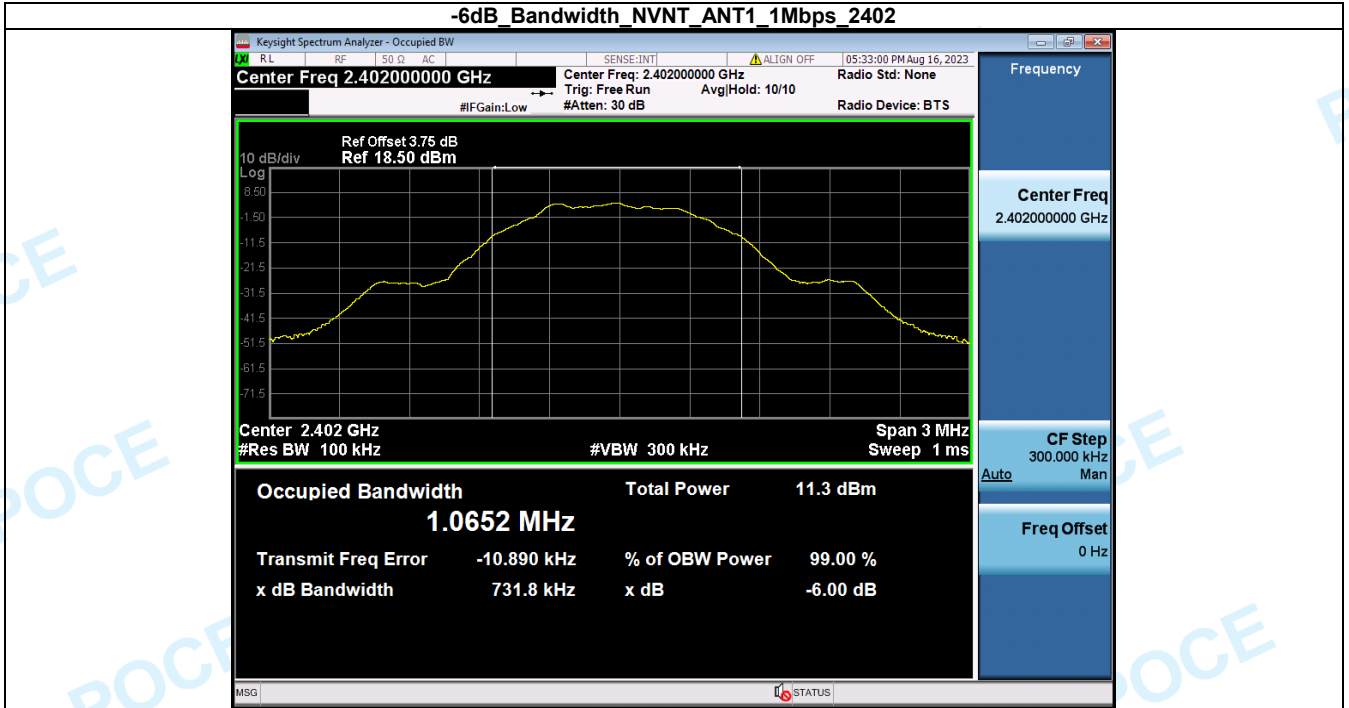


-6dB Bandwidth NVNT_ANT1_1Mbps_2480

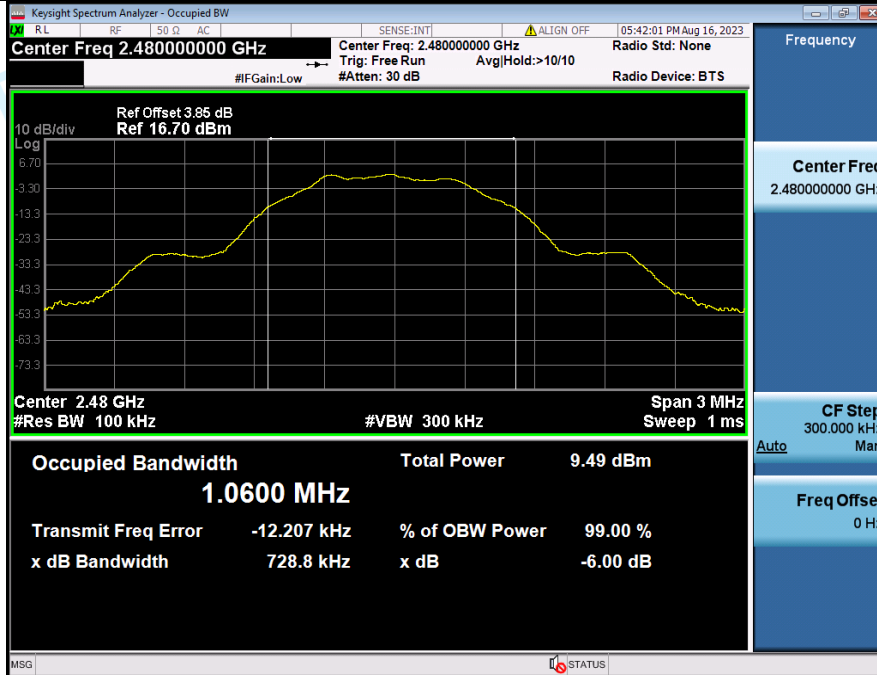


2. 99% Occupied Bandwidth

Condition	Antenna	Rate	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	1Mbps	2402	1.047
NVNT	ANT1	1Mbps	2440	1.051
NVNT	ANT1	1Mbps	2480	1.047


99% Occupied Bandwidth_NVNT_ANT1_1Mbps_2402

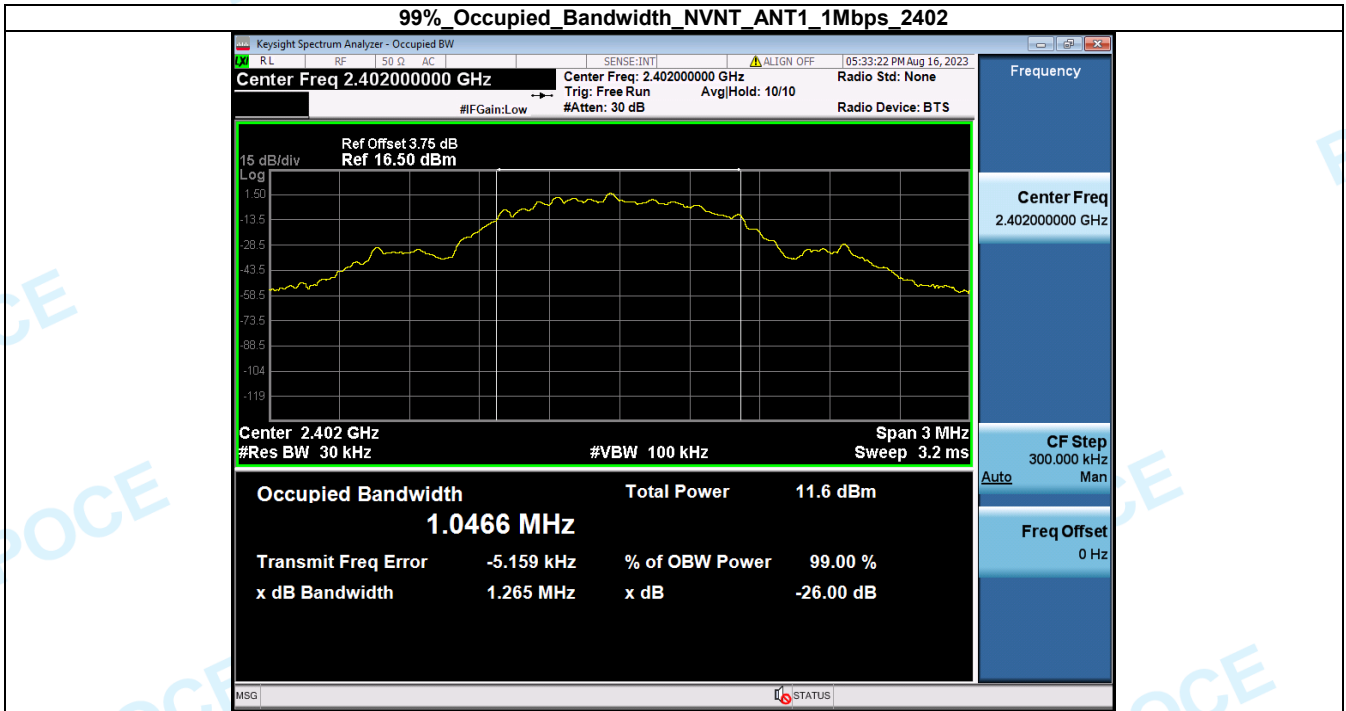

99% Occupied Bandwidth_NVNT_ANT1_1Mbps_2440

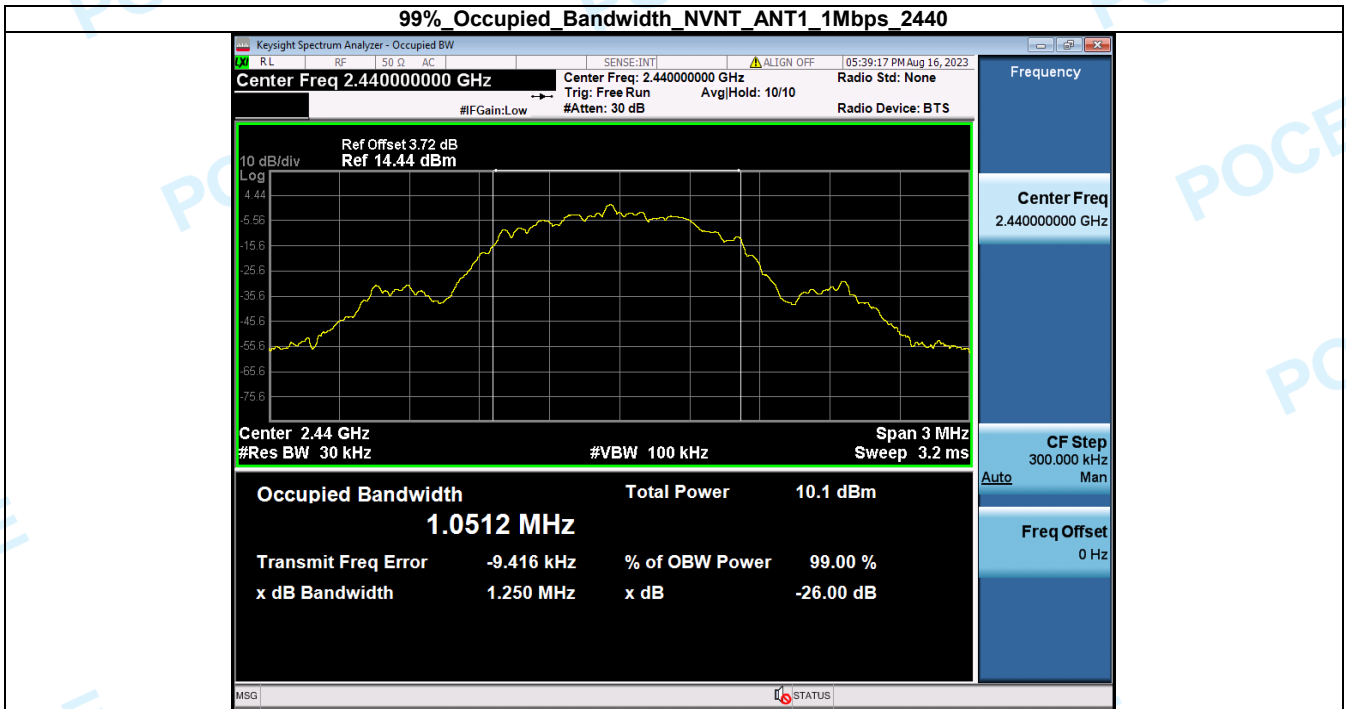


99% Occupied Bandwidth_NVNT_ANT1_1Mbps_2480

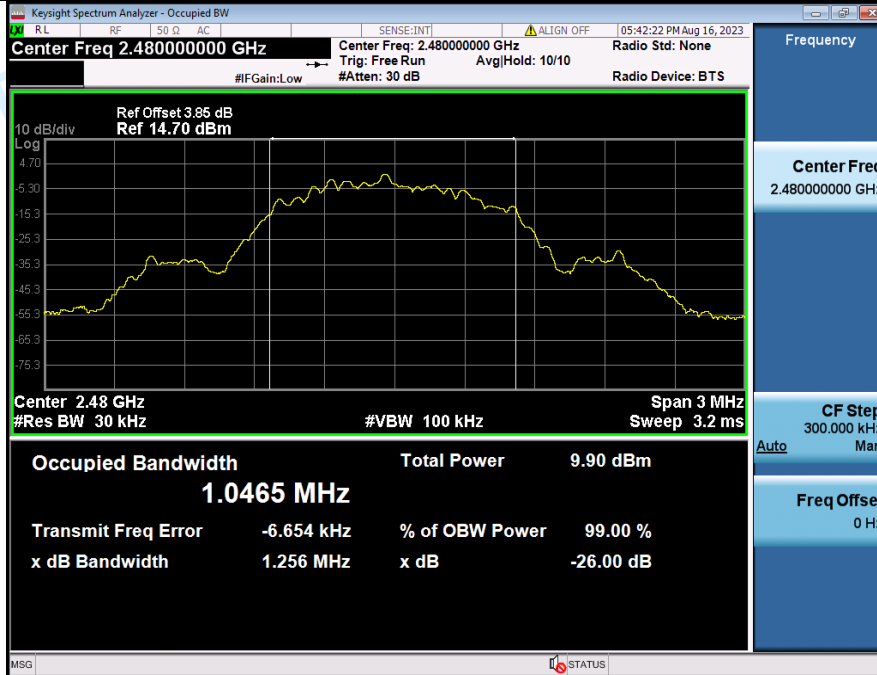


3. Bandedge

Condition	Antenna	Rate	TX_Frequency (MHz)	Max. Mark Frequency (MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	1Mbps	2402	2399.110	-51.552	-15.672	Pass
NVNT	ANT1	1Mbps	2480	2484.900	-53.045	-17.508	Pass


1 Reference Level NVNT_ANT1_1Mbps_2402

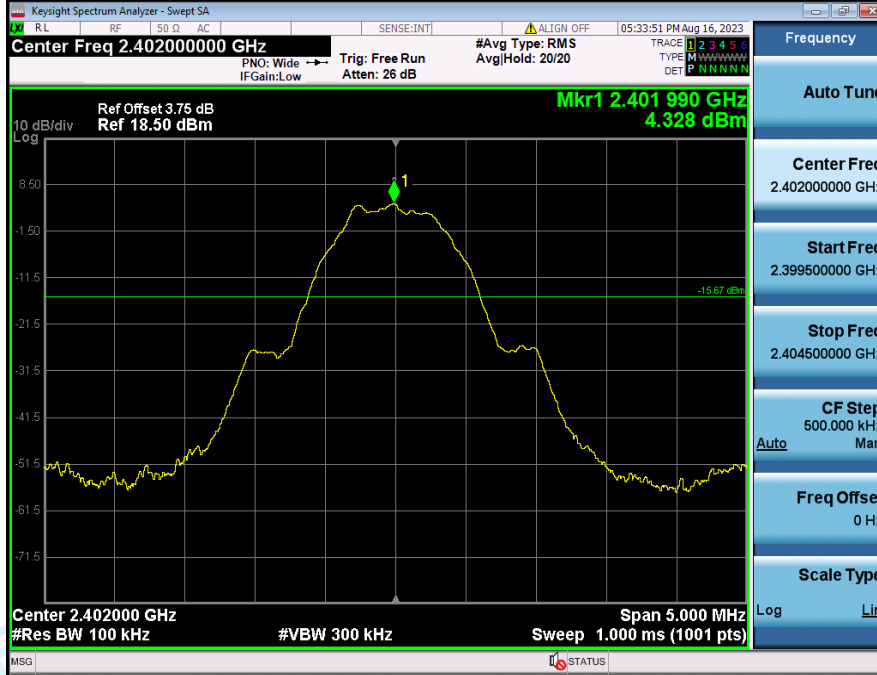


2 Bandedge NVNT_ANT1_1Mbps_2402

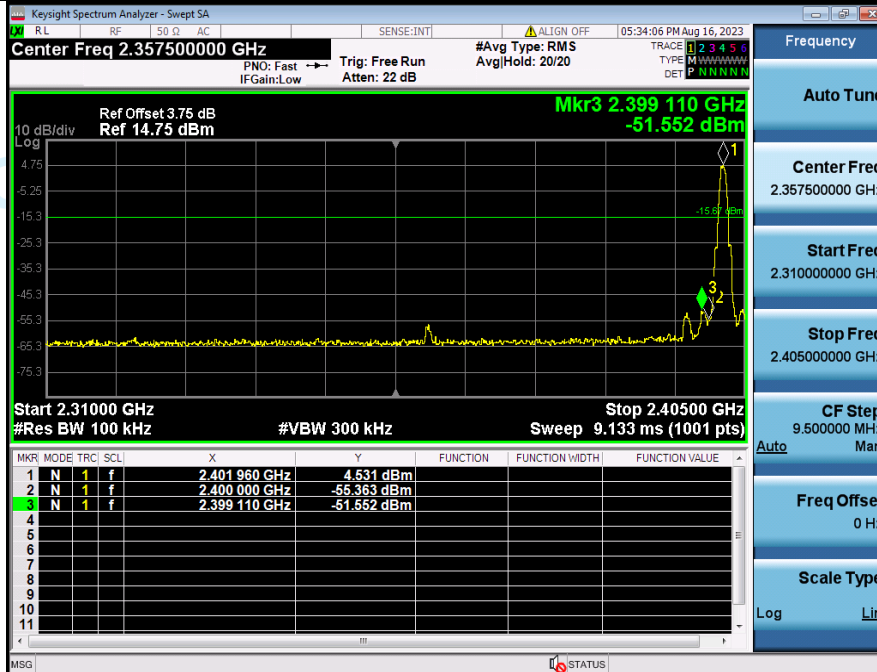

1 Reference Level NVNT_ANT1_1Mbps_2480


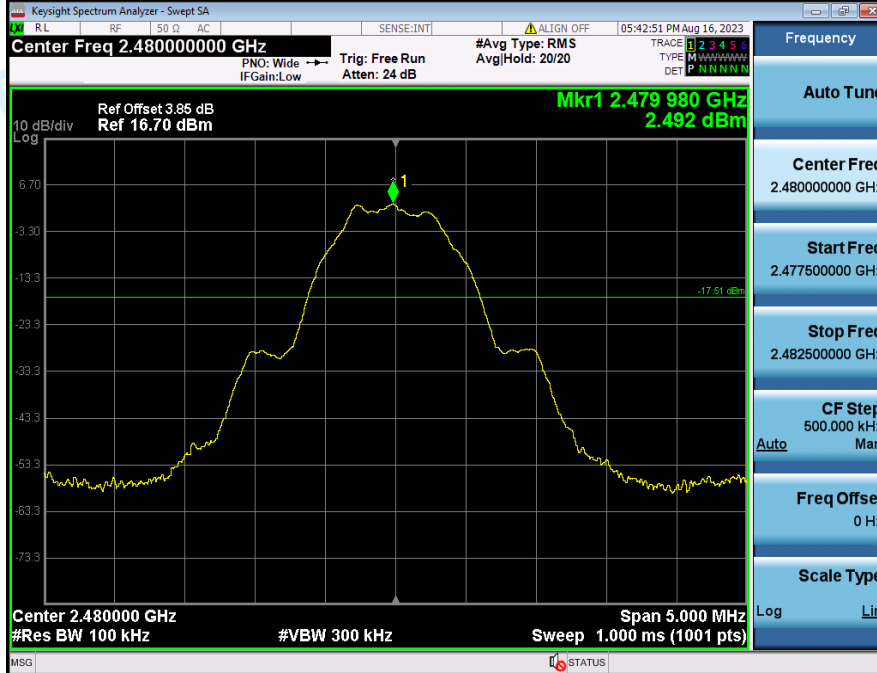



2 Bandedge_NVNT_ANT1_1Mbps_2480

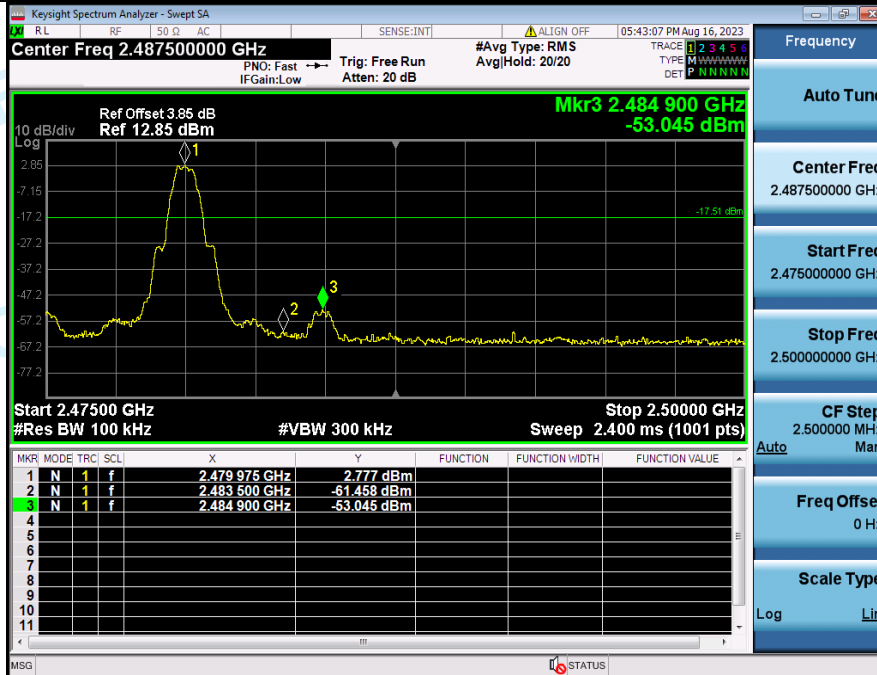

4. Peak Output Power

Condition	Antenna	Rate	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1Mbps	2402	5.22	3.33	1000	Pass
NVNT	ANT1	1Mbps	2440	3.67	2.33	1000	Pass
NVNT	ANT1	1Mbps	2480	3.43	2.20	1000	Pass

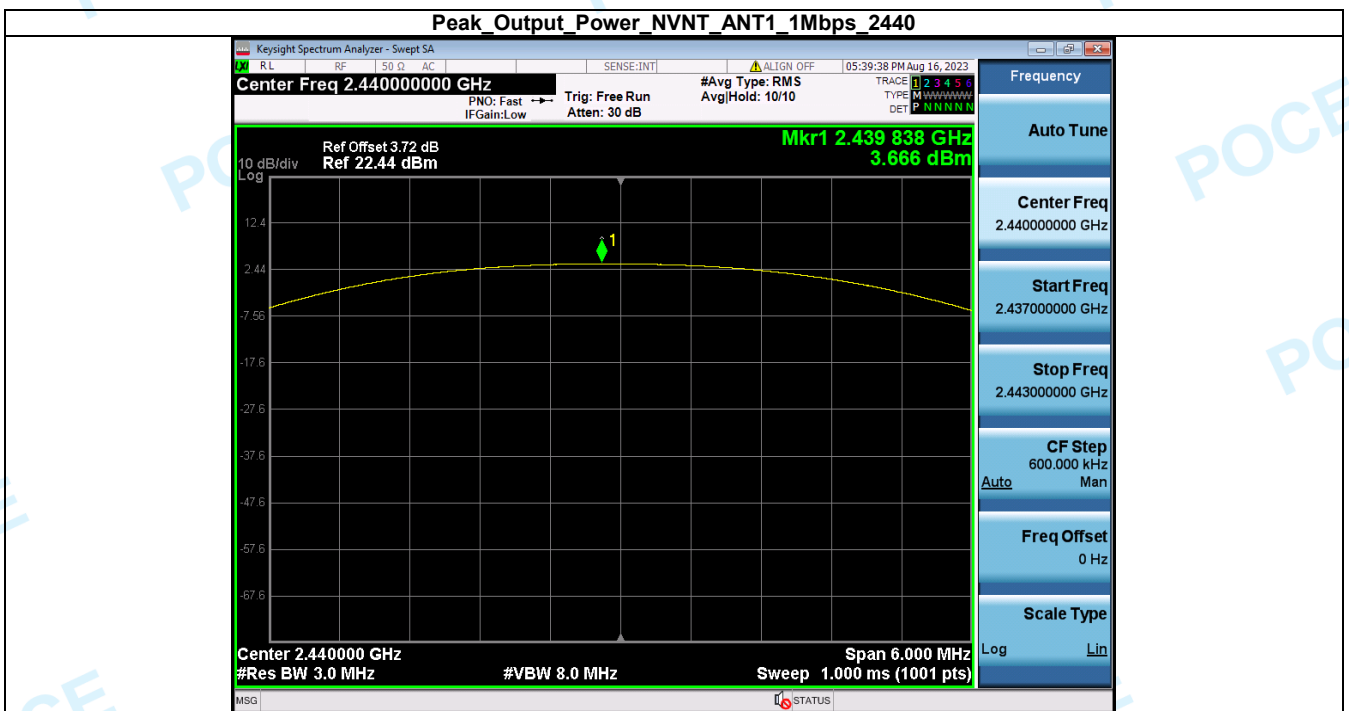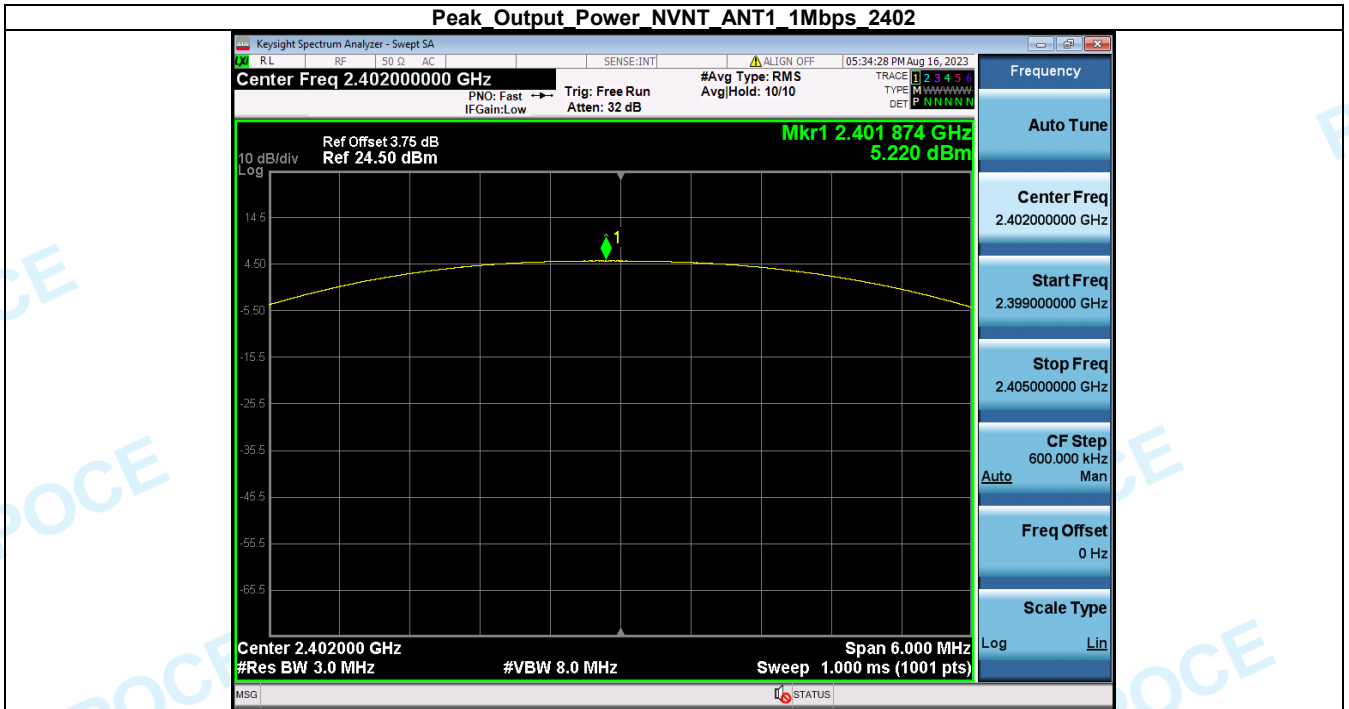


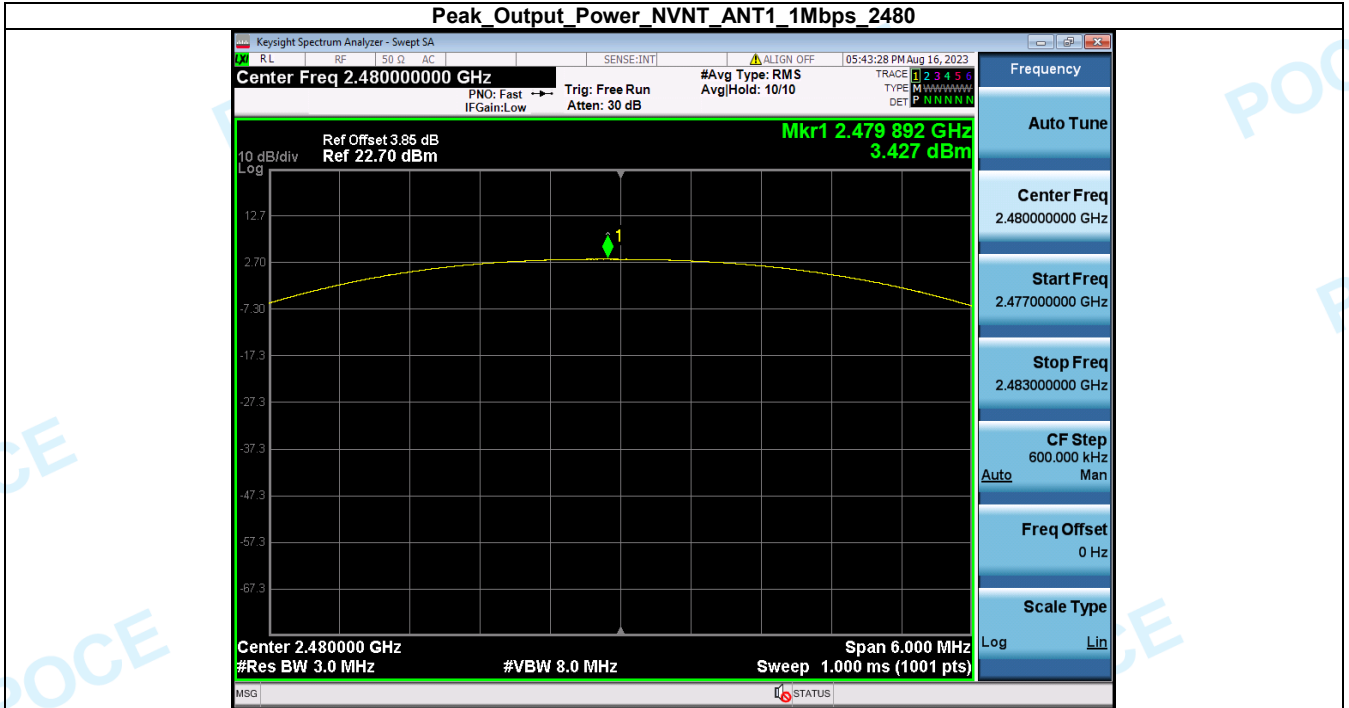


5. Power Spectral Density


Condition	Antenna	Rate	Frequency (MHz)	Power Spectral Density(dBm)	Limit(dBm/3kHz)	Result
NVNT	ANT1	1Mbps	2402	-10.52	8	Pass
NVNT	ANT1	1Mbps	2440	-11.89	8	Pass
NVNT	ANT1	1Mbps	2480	-12.54	8	Pass

Power_Spectral_Density_NVNT_ANT1_1Mbps_2402

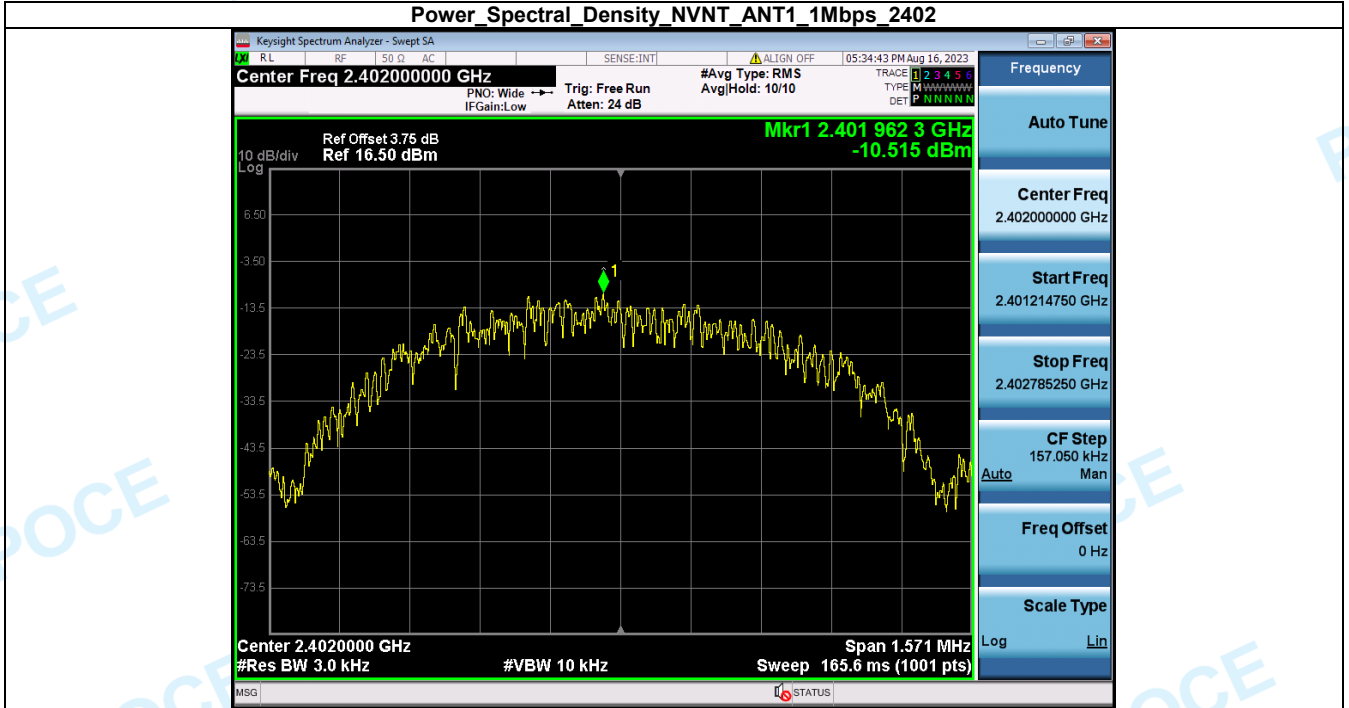

Power_Spectral_Density_NVNT_ANT1_1Mbps_2440

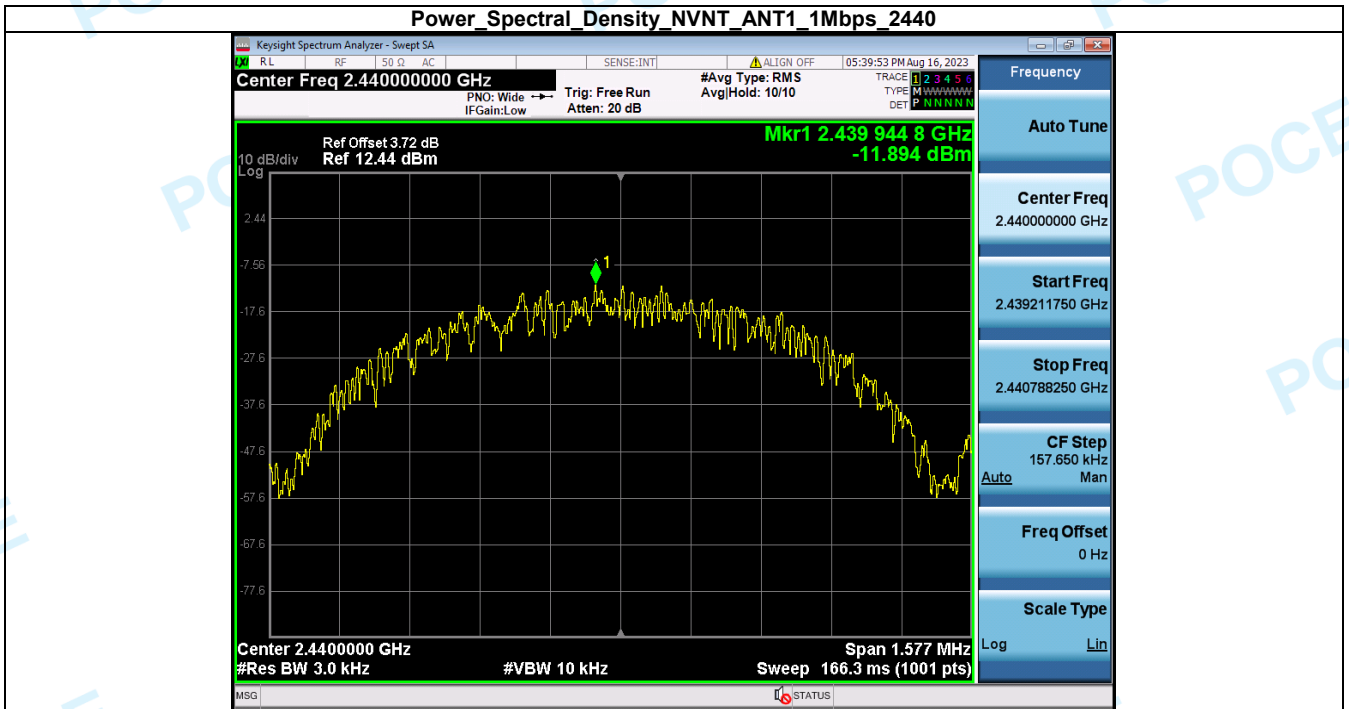


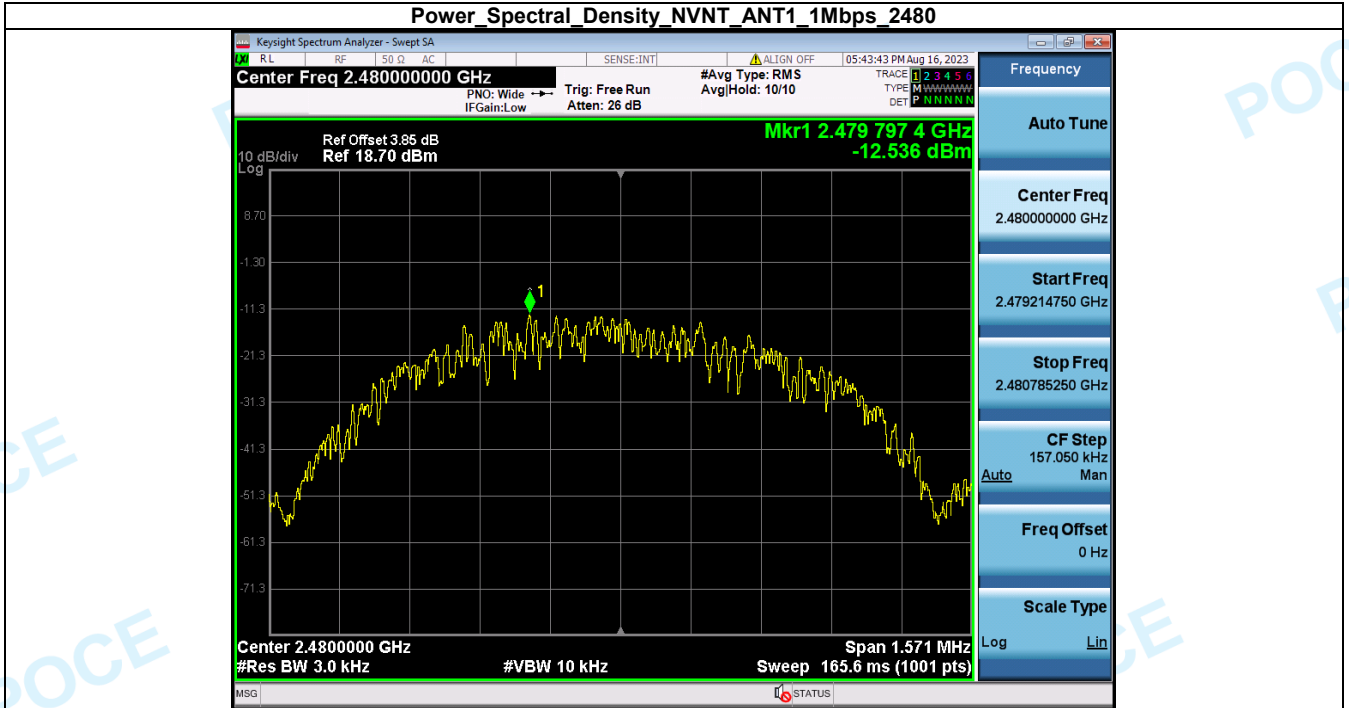


6. Spurious Emission

Condition	Antenna	Rate	TX_Frequency(MHz)	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1Mbps	2402	-49.323	-15.672	Pass
NVNT	ANT1	1Mbps	2440	-44.370	-17.235	Pass
NVNT	ANT1	1Mbps	2480	-51.137	-17.508	Pass


1_Reference_Level_NVNT_ANT1_1Mbps_2402

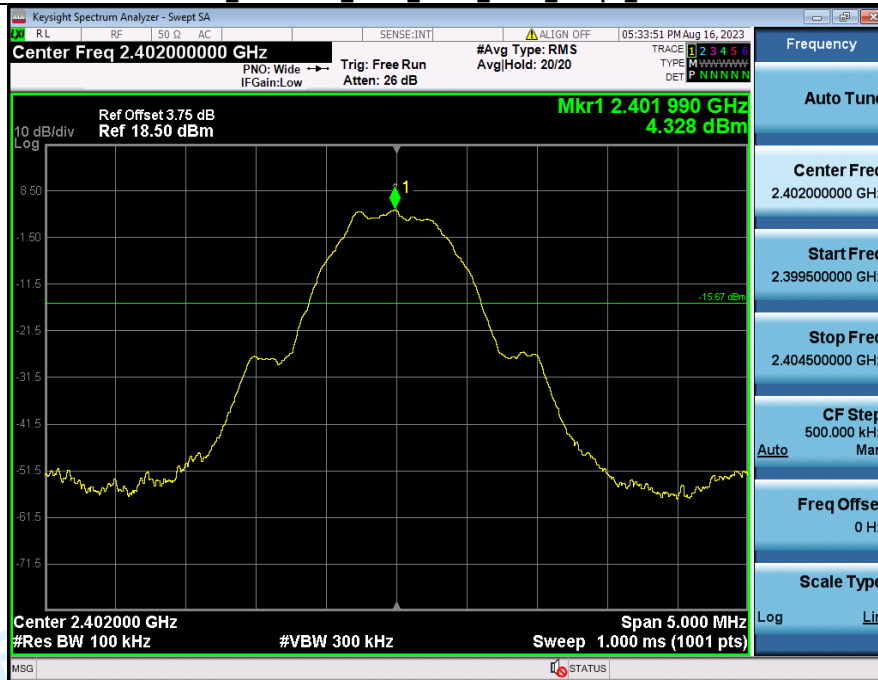


2_Spurious_Emission_NVNT_ANT1_1Mbps_2402

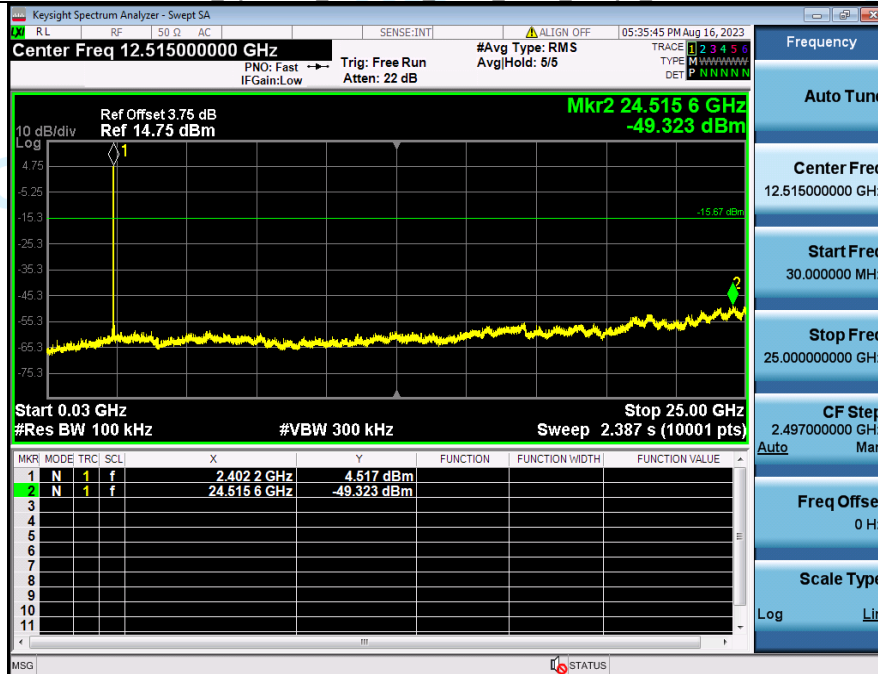


1 Reference Level_NVNT_ANT1_1Mbps_2440

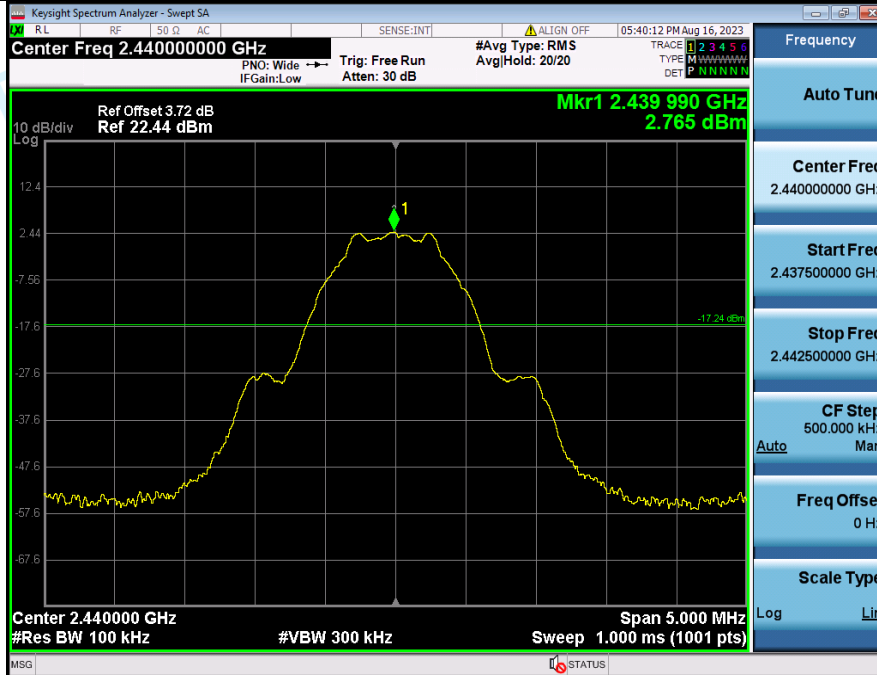


2 Spurious Emission_NVNT_ANT1_1Mbps_2440

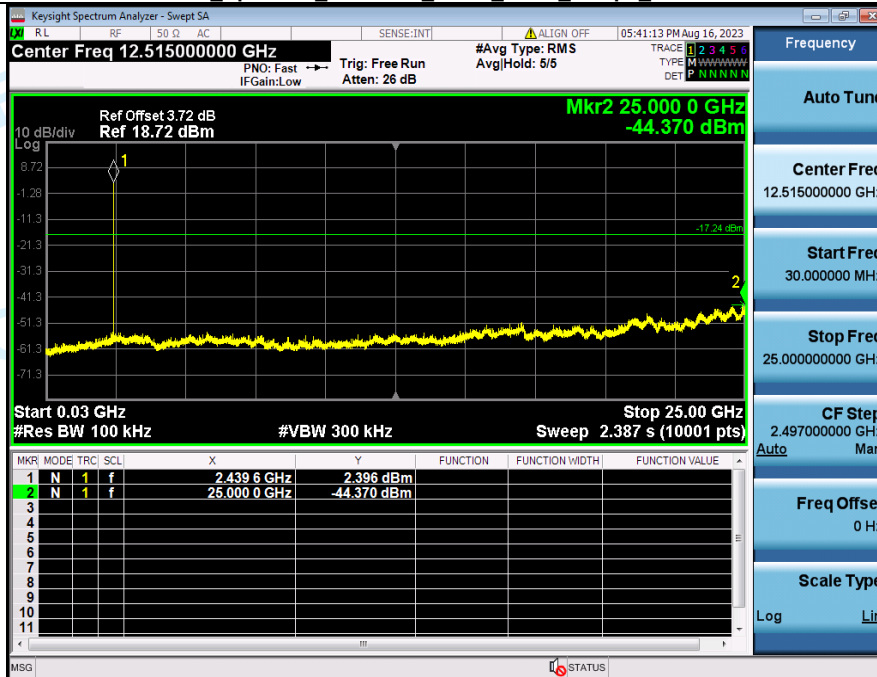

1 Reference Level NVNT ANT1 1Mbps 2480

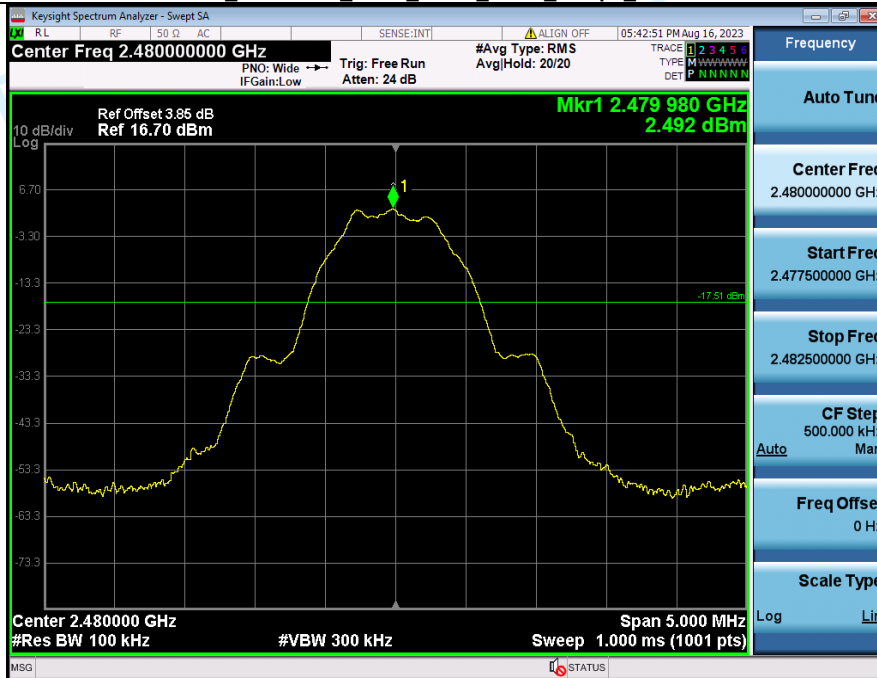

2 Spurious Emission NVNT ANT1 1Mbps 2480

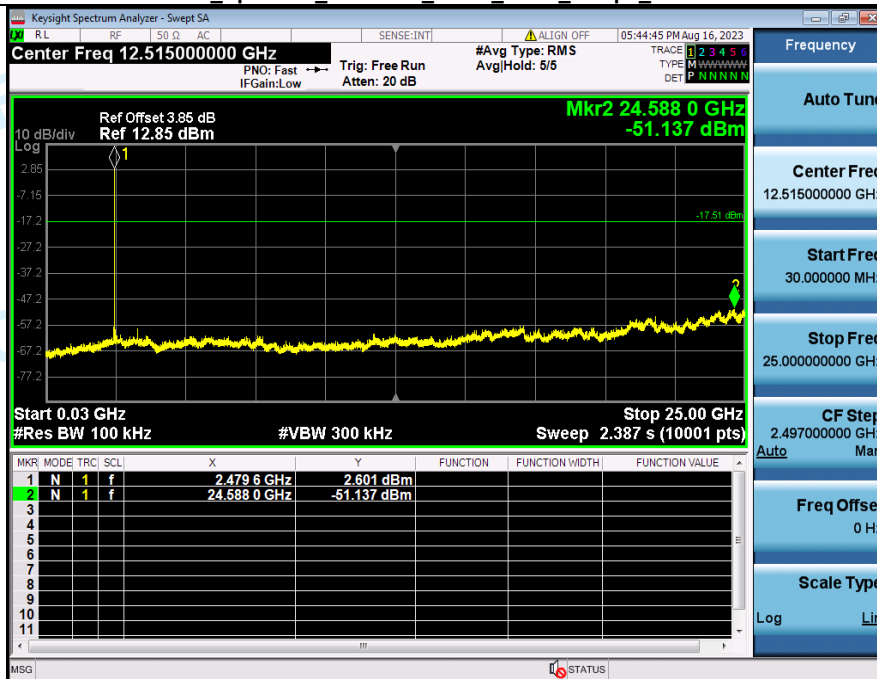

***** End of Report *****