

# FCC Test Report

**Client Name** : Shenzhen Three Bees E-Commerce Co., Ltd.

---

**Client Address** : Building A, Jianjin Industrial Park, Donghuan  
2nd Road, Longhua Street, Shenzhen, China

---

**Product Name** : Wireless Charging Station

---

**Report Date** : Aug. 23, 2022

---

**Shenzhen Anbotek Compliance Laboratory Limited**



**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline

400-003-0500

www.anbotek.com.cn



# Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. Description Of Test Setup.....	7
1.6. Test Equipment List.....	8
1.7. Measurement Uncertainty.....	9
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission.....	14
4.1. Test Standard and Limit.....	14
4.2. Test Setup.....	14
4.3. Test Procedure.....	15
4.4. Test Data.....	15
5. Antenna Requirement.....	20
5.1. Test Standard and Requirement.....	20
5.2. Antenna Connected Construction.....	20
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	21
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	21
APPENDIX III -- INTERNAL PHOTOGRAPH.....	21



# TEST REPORT

Applicant : Shenzhen Three Bees E-Commerce Co., Ltd.

Manufacturer : Shenzhen Black Snail Technology Co.,Ltd.

Product Name : Wireless Charging Station

Model No. : HM002, HM004, HM006, HM008

Trade Mark : NANAMI

Rating(s) : Please refer to page 5

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.209**

**Test Method(s) : ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Aug. 03, 2022

Date of Test

Aug. 03~16, 2022

Prepared By



(TuTu Hong)

Approved & Authorized Signer



(Kingkong Jin)





**Revision History**

Report Version	Description	Issued Date
R00	Original Issue.	Aug. 23, 2022



## 1. General Information

### 1.1. Client Information

Applicant	:	Shenzhen Three Bees E-Commerce Co., Ltd.
Address	:	Building A, Jianjin Industrial Park, Donghuan 2nd Road, Longhua Street, Shenzhen, China
Manufacturer	:	Shenzhen Black Snail Technology Co.,Ltd.
Address	:	Shenzhen Longhua District Fukang Community Donghuan Second Road Jianjian Bicycle Co., Ltd. Building 5 709

### 1.2. Description of Device (EUT)

Product Name	:	Wireless Charging Station
Model No.	:	HM002, HM004, HM006, HM008 (Note: All samples are the same except the model number, so we prepare "HM002" for test only.)
Trade Mark	:	NANAMI
Test Power Supply	:	AC 120V, 60Hz
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

#### RF Specification

Operation Frequency	:	110.1-205KHz
Modulation Type	:	FSK, ASK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi (Provided by customer)

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

#### Rating(s):

Input: AC100V-240V 50Hz-60Hz 4A Max  
Output: Total 161W Max,  
USB-C1 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A, PPS: 3.3V-11V/5A  
USB-C2 5V/3A,9V/3A,12V/3A,15V/3A,20V/5A, PPS: 3.3V-11V/5A  
USB-A1 5V/3A,9V/2A,12V/1.5A  
USB-A2 5V/3A,9V/2A,12V/1.5A  
Wireless Charger Output: 5W/7.5W/10W/15W  
Wireless AirPods Charger Output: 5W  
Wireless Watch Charger Input: 5V/1A  
Simply install the charger cable for the iWatch (NOTE: There is not included the original magnetic charger for Apple Watch)



### 1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Wireless charging load	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2577 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Yea
Earphone	M/N: Apple AirPods

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charging+Wireless AirPods Mode
Mode 2	Wireless Charging Mode
Mode 3	Wireless AirPods Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charging+Wireless AirPods Mode
Mode 2	Wireless Charging Mode
Mode 3	Wireless AirPods Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charging+Wireless AirPods Mode
Mode 2	Wireless Charging Mode
Mode 3	Wireless AirPods Mode



Note:

- (1) Test channel is 0.1285MHz.
- (2) For USB ports, one USB port alone, or two USB ports, three USB ports, and four USB ports are predicted with modes 1/2/3 respectively.
- (3) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 20W (Mode 1) ) was recorded in the report.





## 1.5. Description Of Test Setup

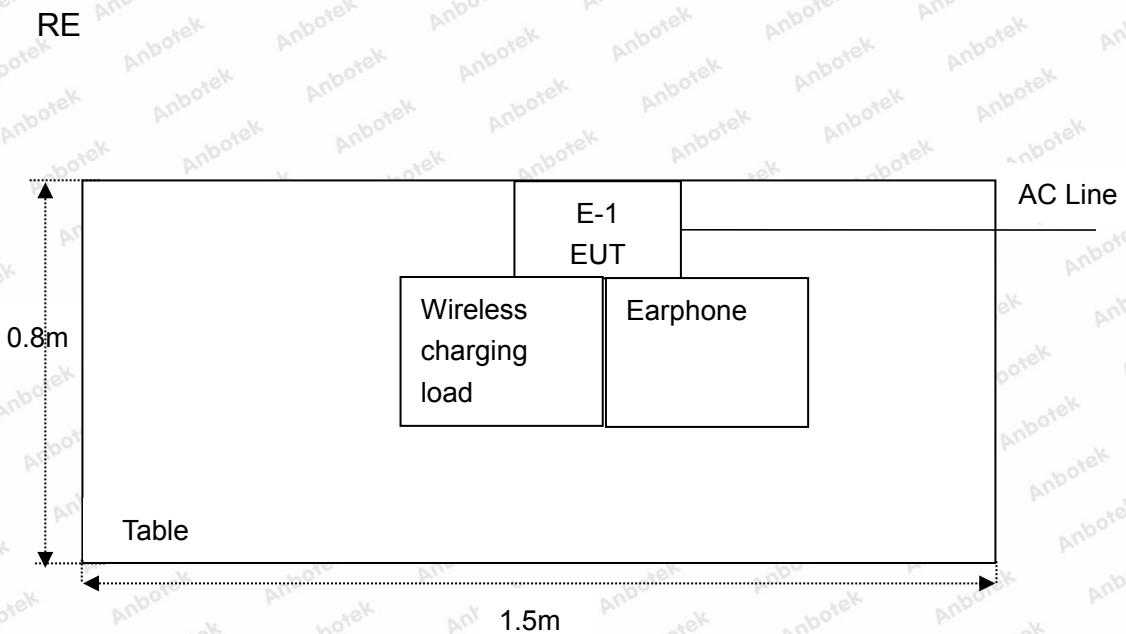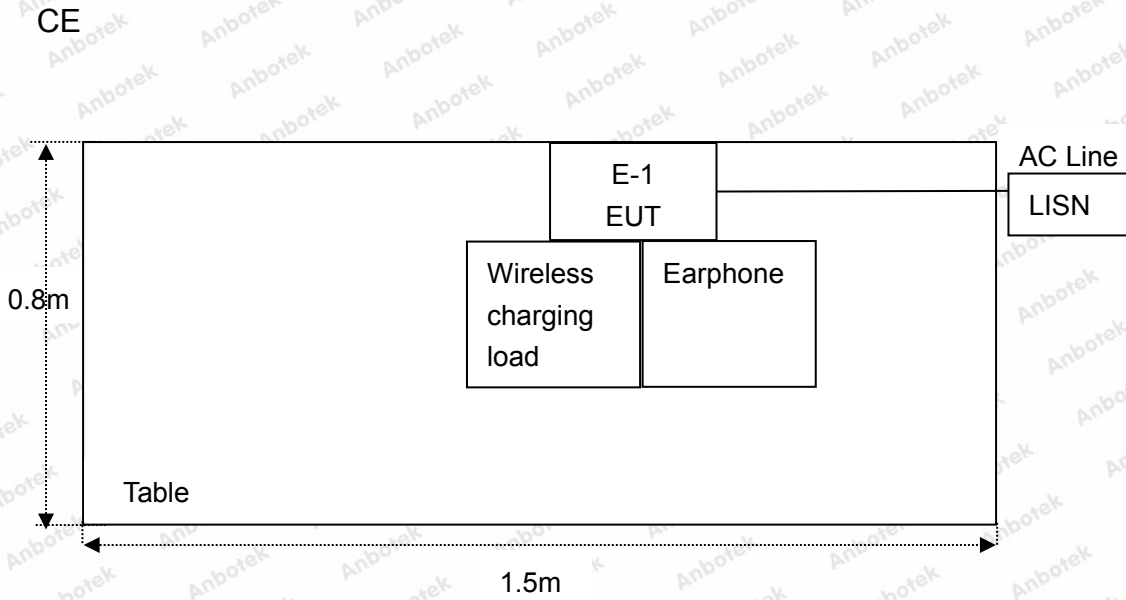

## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2022	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year





### 1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission Test	PASS
15.205/15.209	Spurious Emission	PASS




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

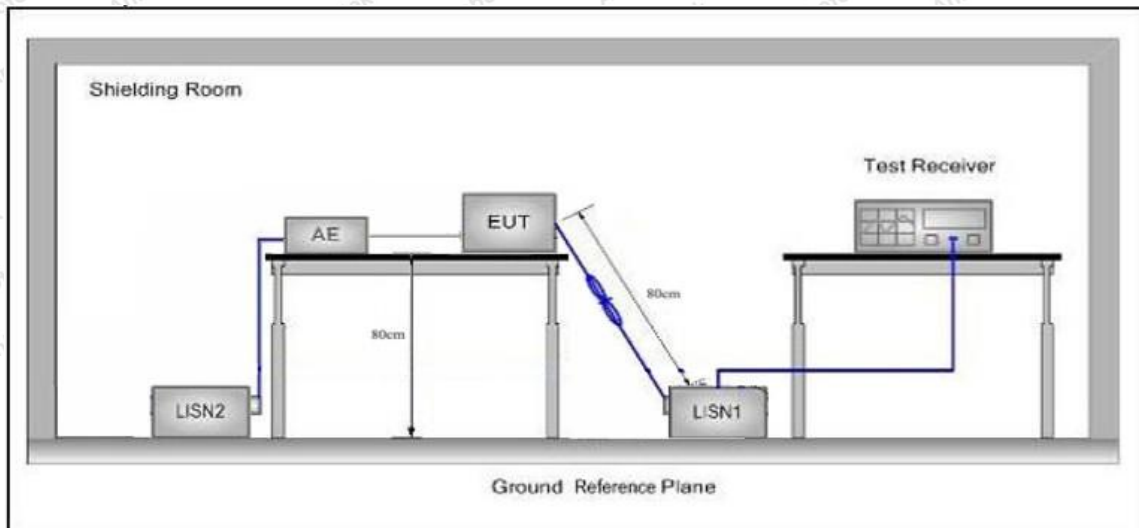

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.


Please to see the following pages.





### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz  
 Comment: Live Line  
 Temp.(°C)/Hum.(%RH): 22.8°C/48%RH

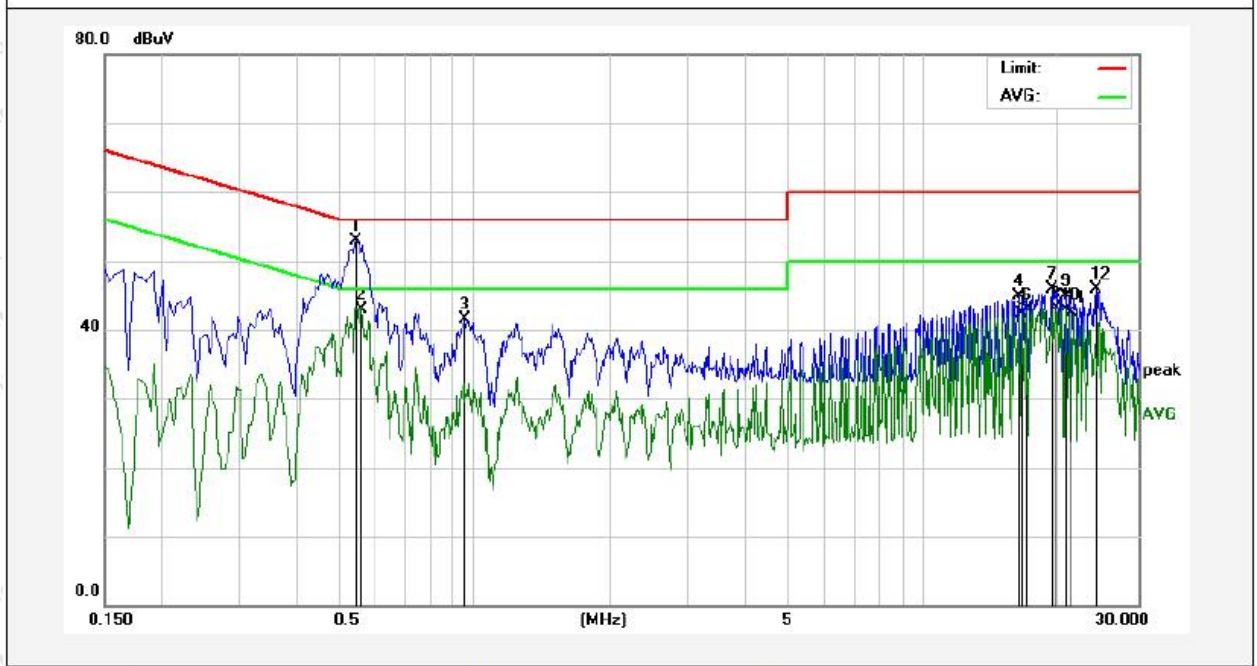


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.5460	43.20	9.76	52.96	56.00	-3.04	QP	
2	0.5620	33.17	9.76	42.93	46.00	-3.07	AVG	
3	0.9540	31.83	9.74	41.57	56.00	-14.43	QP	
4	16.3700	34.97	10.03	45.00	60.00	-15.00	QP	
5	16.5300	32.33	10.03	42.36	50.00	-7.64	AVG	
6	16.9700	32.77	10.04	42.81	50.00	-7.19	AVG	
7	19.2380	35.90	10.10	46.00	60.00	-14.00	QP	
8	19.5620	33.08	10.11	43.19	50.00	-6.81	AVG	
9	20.7380	34.82	10.12	44.94	60.00	-15.06	QP	
10	20.7380	32.71	10.12	42.83	50.00	-7.17	AVG	
11	21.3380	32.32	10.11	42.43	50.00	-7.57	AVG	
12	24.1580	35.86	10.11	45.97	60.00	-14.03	QP	



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz  
 Comment: Neutral Line  
 Temp.(°C)/Hum.(%RH): 22.8°C/48%RH

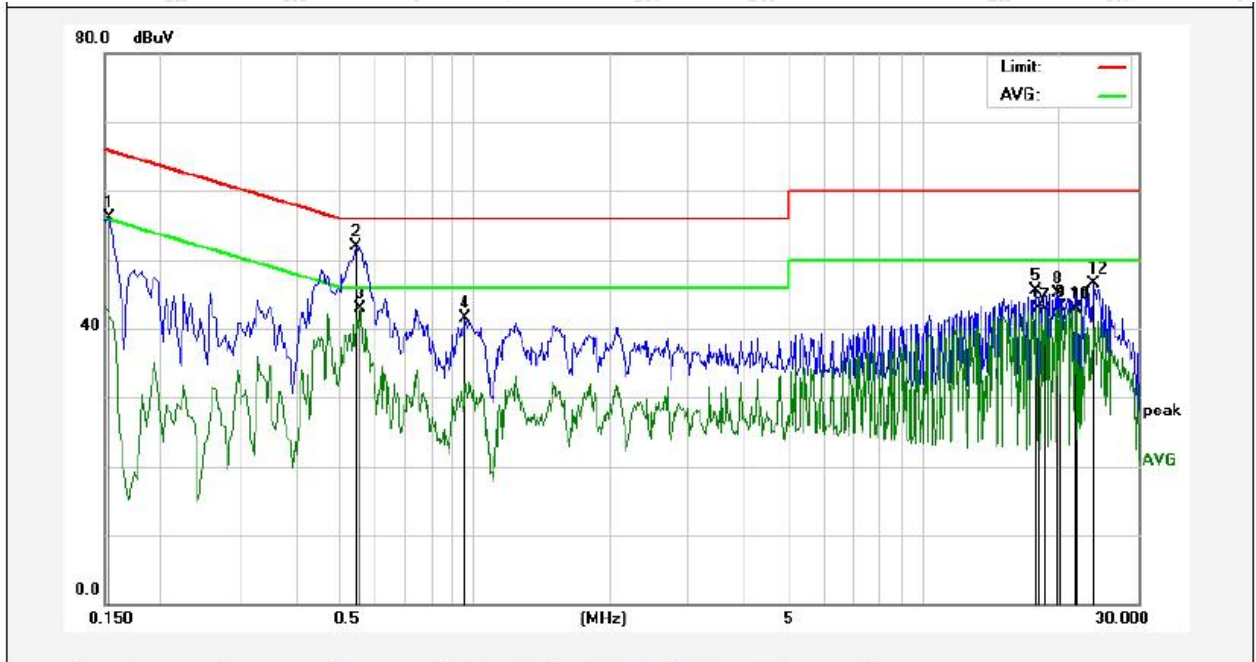

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	46.39	9.70	56.09	65.78	-9.69	QP	
2	0.5460	42.05	9.76	51.81	56.00	-4.19	QP	
3	0.5580	33.09	9.76	42.85	46.00	-3.15	AVG	
4	0.9580	31.68	9.74	41.42	56.00	-14.58	QP	
5	17.7820	35.51	10.07	45.58	60.00	-14.42	QP	
6	18.0300	32.92	10.07	42.99	50.00	-7.01	AVG	
7	18.6700	32.67	10.08	42.75	50.00	-7.25	AVG	
8	19.8540	34.92	10.12	45.04	60.00	-14.96	QP	
9	20.2340	33.02	10.12	43.14	50.00	-6.86	AVG	
10	21.7420	32.75	10.11	42.86	50.00	-7.14	AVG	
11	22.0459	32.54	10.11	42.65	50.00	-7.35	AVG	
12	23.9500	36.31	10.11	46.42	60.00	-13.58	QP	





## 4. Radiation Spurious Emission

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

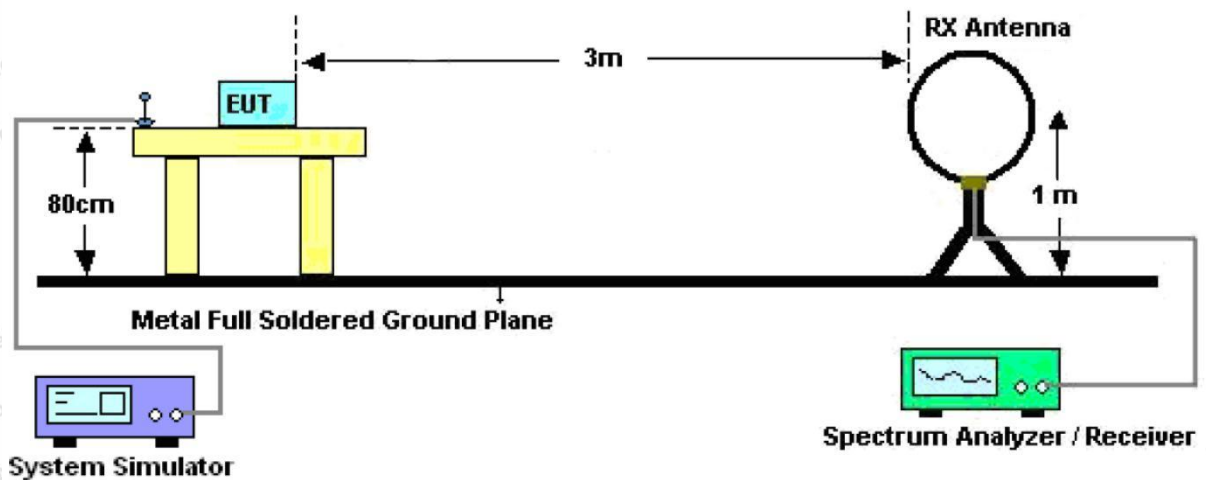


Figure 1. Below 30MHz





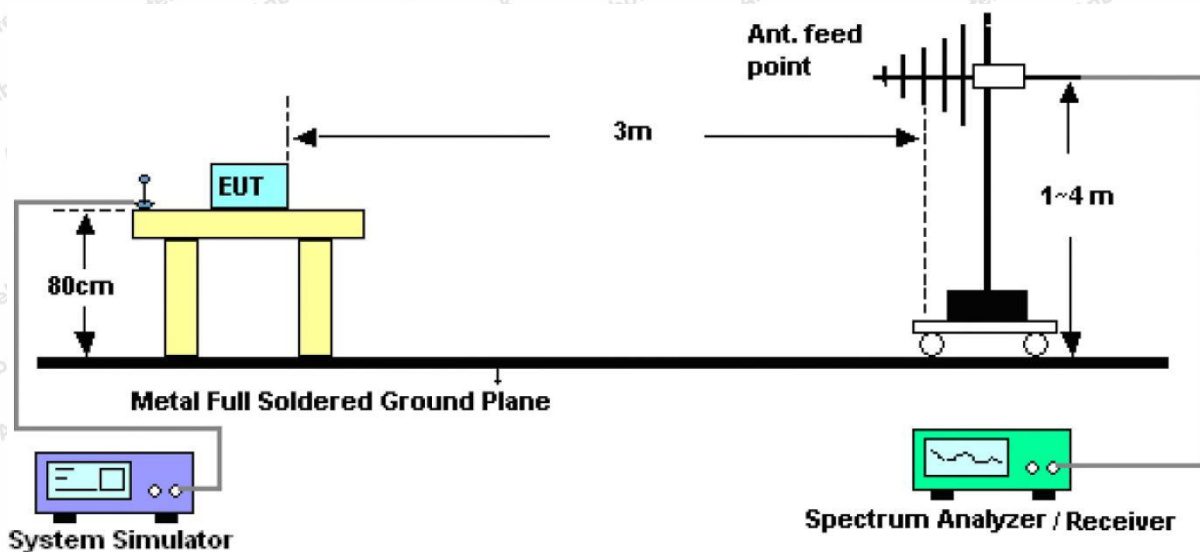


Figure 2. 30MHz to 1GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data


#### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.



**Test Results (Between 9KHz – 150KHz)**

Test Mode: Mode 1  
 Distance: 3m  
 Power Source: AC 120V, 60Hz  
 Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

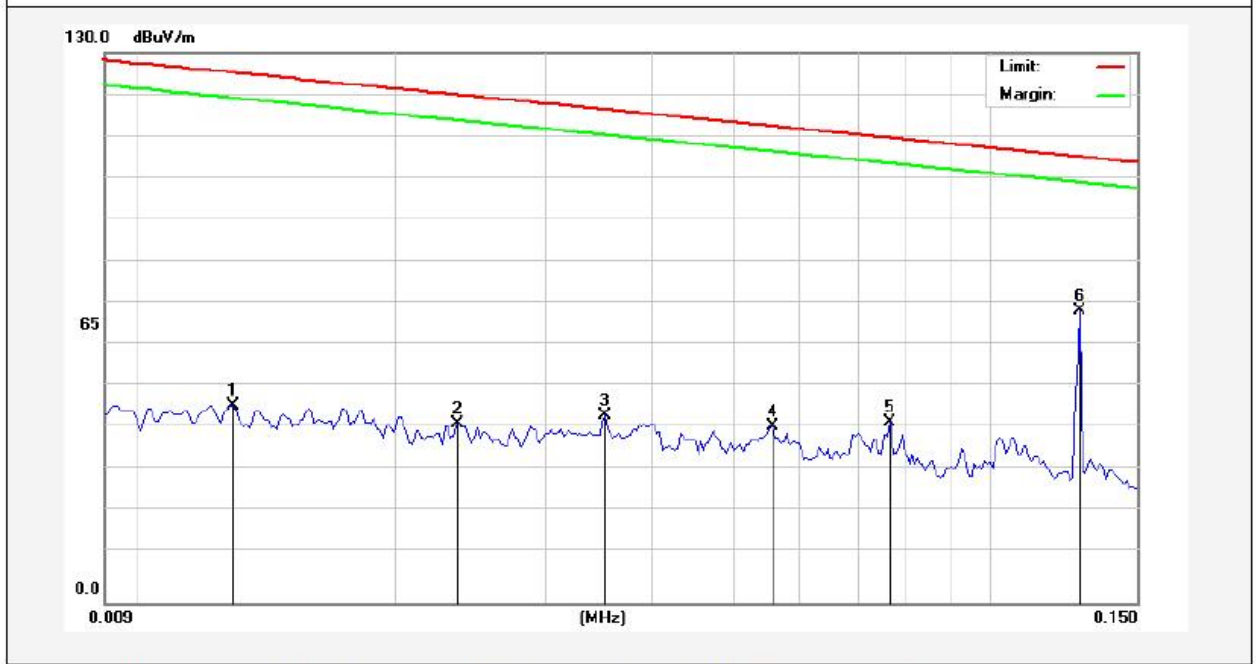


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0128	26.50	20.15	46.65	125.27	-78.62	AV			
2	0.0235	22.20	20.37	42.57	120.02	-77.45	AV			
3	0.0352	24.01	20.48	44.49	116.53	-72.04	AV			
4	0.0555	21.50	20.35	41.85	112.60	-70.75	AV			
5	0.0763	22.21	20.37	42.58	109.85	-67.27	AV			
6	0.1285	48.75	20.34	69.09	105.35	-36.26	AV			



**Test Results (Between 0.15MHz – 30MHz)**

Test Mode: Mode 1  
 Distance: 3m  
 Power Source: AC 120V, 60Hz  
 Temp.(°C)/Hum.(%RH): 22.5°C/50%RH

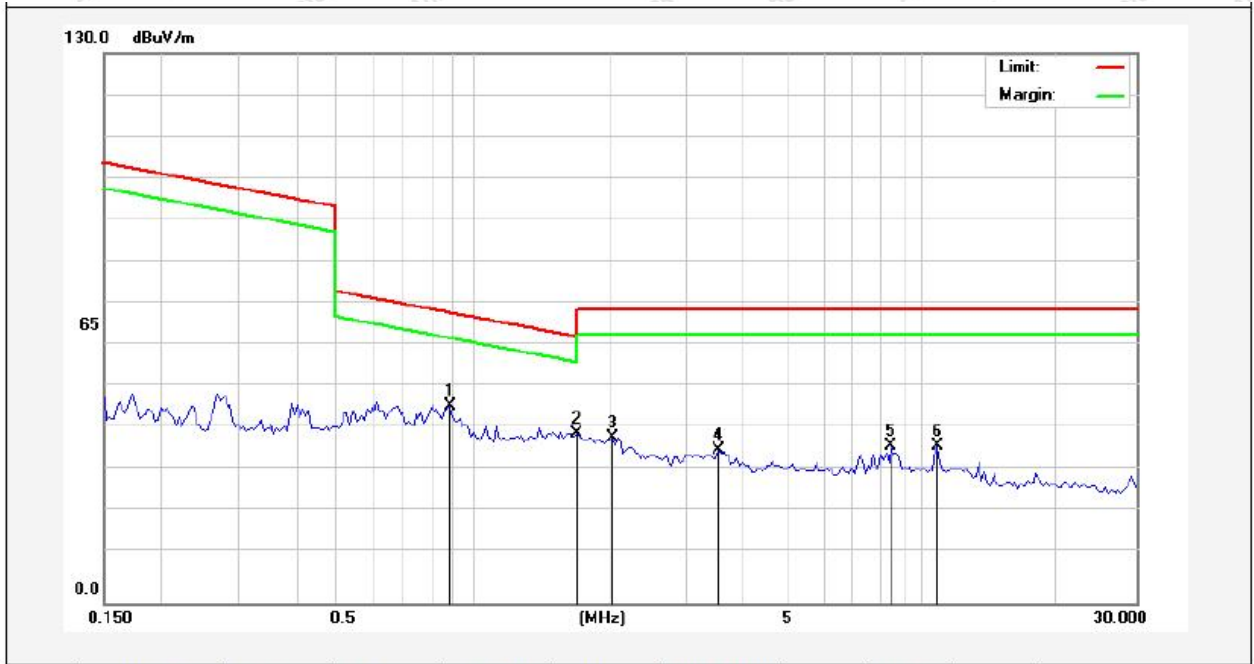

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.8850	26.32	20.26	46.58	68.68	-22.10	QP			
2	1.6935	19.79	20.27	40.06	63.06	-23.00	QP			
3	2.0386	18.79	20.28	39.07	69.50	-30.43	QP			
4	3.5091	16.00	20.34	36.34	69.50	-33.16	QP			
5	8.5236	16.69	20.51	37.20	69.50	-32.30	QP			
6	10.8185	16.82	20.52	37.34	69.50	-32.16	QP			

**Remark:** According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.





**Test Results (Between 30MHz –1000 MHz)**


Test Mode: Mode 1  
 Distance: 3m  
 Power Source: AC 120V, 60Hz  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 24.2°C/50%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	45.5347	48.32	-15.26	33.06	40.00	-6.94	QP			
2	177.5089	56.20	-23.29	32.91	43.50	-10.59	QP			
3	188.4123	54.83	-22.82	32.01	43.50	-11.49	QP			
4	222.9500	57.49	-21.95	35.54	46.00	-10.46	QP			
5	241.6761	60.99	-21.64	39.35	46.00	-6.65	QP			
6	269.4284	59.98	-19.82	40.16	46.00	-5.84	QP			



Test Mode: Mode 1  
 Distance: 3m  
 Power Source: AC 120V, 60Hz  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 24.2°C/50%RH

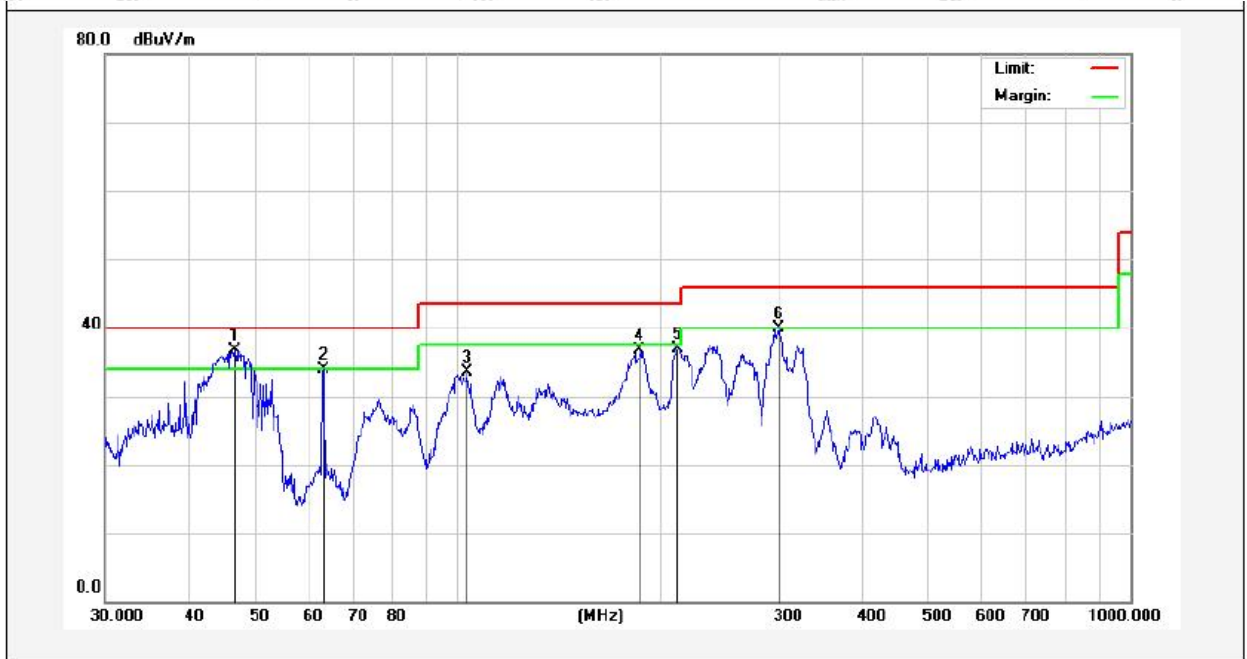

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	46.6664	51.96	-15.29	36.67	40.00	-3.33	QP			
2	63.0915	52.55	-18.62	33.93	40.00	-6.07	QP			
3	103.0798	50.53	-17.07	33.46	43.50	-10.04	QP			
4	186.4407	57.09	-20.30	36.79	43.50	-6.71	QP			
5	212.2693	56.18	-19.23	36.95	43.50	-6.55	QP			
6	300.3672	56.24	-16.25	39.99	46.00	-6.01	QP			



## 5. Antenna Requirement

### 5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.





## APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

## APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

## APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

