

FCC TEST REPORT

FCC ID: 2AXNMBONEPLUS

Report Number. : ZKT-211220L7051

Date of Test Dec. 13, 2021 – Dec. 24, 2021

Date of issue : Dec. 24, 2021

Total number of pages : 72

Test Result : PASS

Testing Laboratory : Shenzhen ZKT Technology Co., Ltd.

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial
Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Tecnotropolis LLC

Address : 10840 NW 27 Street, Miami Florida 33172, United States

Manufacturer's name : Shenzhen Top One Electronics Ltd

Address : F3, Building 3, Dongwu industrial park, Donghuan 1st RD, Longhua
District, Shenzhen 518109, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Standard : ANSI C63.10:2013

KDB558074 D0115.247 Meas Guidance v 05r02

Test procedure : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-112_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name : Bluetooth headset

Trademark : PALL

Model/Type reference : B-One Plus, BTH-286


Ratings : DC 3.7V

Testing procedure and testing location:


Testing Laboratory: Shenzhen ZKT Technology Co., Ltd.

Address: 1/F, No. 101, Building B, No. 6, Tangwei Community
Industrial Avenue, Fuhai Street, Bao'an District,
Shenzhen, China

Tested by (name + signature).....: Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature).....: Lake Xie



Table of Contents

	Page
1. VERSION	5
2. TEST SUMMARY	6
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 Test Setup Configuration.....	9
3.3 Support Equipment.....	9
3.4 Test Mode	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	12
4.1 Conducted emissions	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS.....	13
4.1.6 Test Result	14
4.2 Radiated emissions	16
4.2.1 Radiated Emission Limits	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS.....	18
4.2.6 TEST RESULTS.....	19
5. RADIATED BAND EMISSION MEASUREMENT	27
5.1 Test Requirement:.....	27
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM TEST STANDARD.....	28
5.4 TEST SETUP	28
5.5 EUT OPERATING CONDITIONS.....	28
5.6 TEST RESULT	29
6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	31
6.1 Limit.....	31
6.2 Test Setup	31
6.3 Test procedure	31
6.4 DEVIATION FROM STANDARD.....	31
6.5 Test Result	31
7. 20DB BANDWIDTH	47
7.1 Test Setup	47
7.2 Limit.....	47
7.3 Test procedure	47
7.4 DEVIATION FROM STANDARD.....	47
7.5 Test Result	47
8. MAXIMUM PEAK OUTPUT POWER	51
8.1 Block Diagram Of Test Setup.....	51
8.2 Limit.....	51

8.3 Test procedure	51
8.4 DEVIATION FROM STANDARD.....	51
8.5 Test Result	51
9.1 Test Setup	52
9.2 Test procedure	52
9.3 DEVIATION FROM STANDARD.....	52
9.4 Test Result	52
10.NUMBER OF HOPPING FREQUENCY.....	56
10.1 Test Setup.....	56
10.2 Test procedure	56
10.3 DEVIATION FROM STANDARD.....	56
10.4 Test Result	57
11. DWELL TIME.....	58
11.1 Test Setup.....	58
11.2 Test procedure	58
11.3 DEVIATION FROM STANDARD.....	58
11.4 Test Result	59
12. ANTENNA REQUIREMENT	69
13. TEST SETUP PHOTO	70
14. EUT CONSTRUCTIONAL DETAILS	72

1. VERSION

Report No.	Version	Description	Approved
ZKT-211220L7051	Rev.01	Initial issue of report	Dec. 24, 2021

2. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna Requirement	PASS	
15.207	AC Power Line Conducted Emission	PASS	
15.247 (b)(1)	Conducted Peak Output Power	PASS	
15.247 (a)(1)	20dB Occupied Bandwidth	PASS	
15.247 (a)(1)	Carrier Frequencies Separation	PASS	
15.247 (a)(1)(iii)	Hopping Channel Number	PASS	
15.247 (a)(1)(iii)	Dwell Time	PASS	
15.205/15.209	Radiated Emission	PASS	
15.247(d)	Band Edge	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street,
Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225
Designation Number: CN1299
IC Registered No.: 27033

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bluetooth headset
Model No.:	B-One Plus
Model Different.:	model names may different .
Serial No.:	BTH-286
Hardware Version:	V2.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	79
Channel separation:	2402MHz~2480MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Ceramic antenna
Antenna gain:	1.0 dBi
Power supply:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 Test Setup Configuration



Radiated Emission



Conducted Spurious



3.3 Support Equipment

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapter	HUAWEI	HW-100400C01	/	Provide by lab


Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

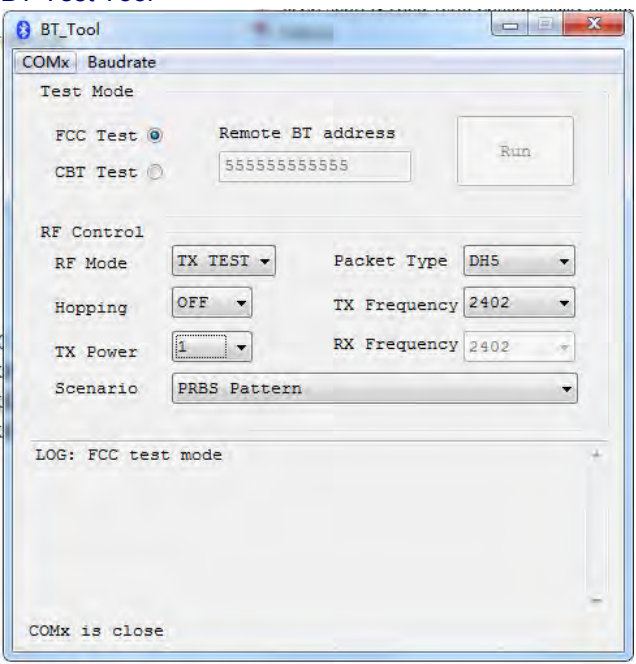Test Software	
Power level setup	<3dBm

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 21, 2021	Sep. 22, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 21, 2021	Sep. 22, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 21, 2021	Sep. 22, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 21, 2021	Sep. 22, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Sep. 21, 2021	Sep. 22, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 21, 2021	Sep. 22, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 21, 2021	Sep. 22, 2022
8	Amplifier (1GHz-40GHz)	QUANJUDA	DLE-161	097	Sep. 21, 2021	Sep. 22, 2022
9	Loop Antenna (9kHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Sep. 21, 2021	Sep. 22, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 21, 2021	Sep. 22, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 21, 2021	Sep. 22, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 21, 2021	Sep. 22, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 21, 2021	Sep. 22, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 21, 2021	Sep. 22, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 21, 2021	Sep. 22, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 21, 2021	Sep. 22, 2022
3	Test Cable	N/A	C01	N/A	Sep. 21, 2021	Sep. 22, 2022
4	Test Cable	N/A	C02	N/A	Sep. 21, 2021	Sep. 22, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 21, 2021	Sep. 22, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 21, 2021	Sep. 22, 2022

4. EMC EMISSION TEST

4.1 Conducted emissions

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

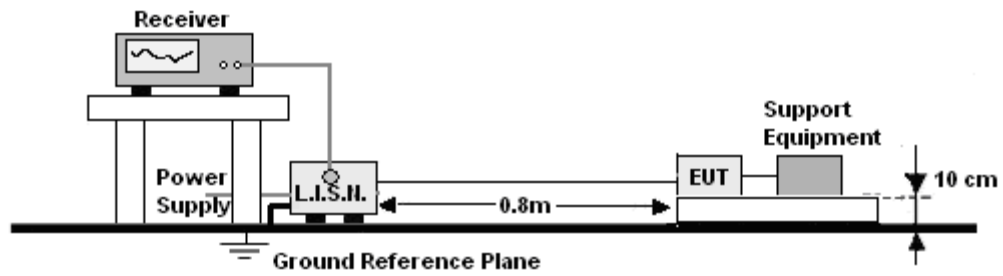


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test mode	charging

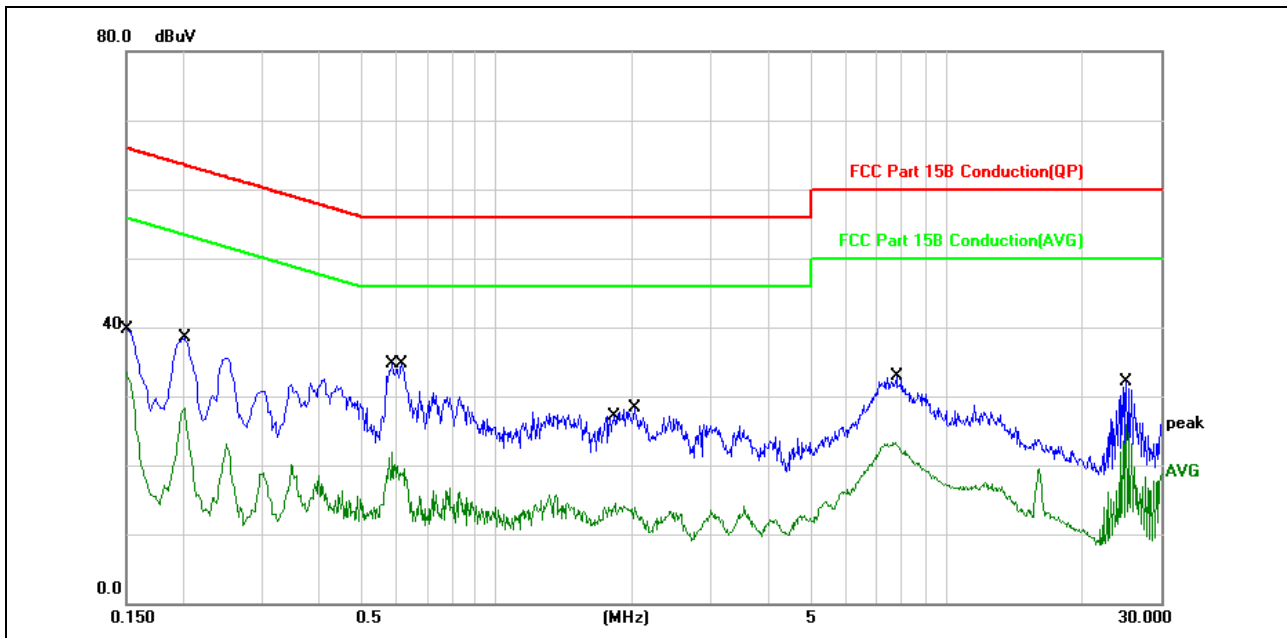


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
		MHz	Level	Factor	ment	dBuV	dB		
1		0.1500	30.00	9.75	39.75	65.99	-26.24	QP	
2		0.1500	23.83	9.75	33.58	55.99	-22.41	AVG	
3		0.2020	28.76	9.75	38.51	63.52	-25.01	QP	
4		0.2020	18.60	9.75	28.35	53.52	-25.17	AVG	
5		0.5860	12.09	9.84	21.93	46.00	-24.07	AVG	
6	*	0.6140	24.89	9.84	34.73	56.00	-21.27	QP	
7		1.8300	4.79	9.66	14.45	46.00	-31.55	AVG	
8		2.0300	18.68	9.65	28.33	56.00	-27.67	QP	
9		7.6940	13.65	9.61	23.26	50.00	-26.74	AVG	
10		7.7460	23.28	9.62	32.90	60.00	-27.10	QP	
11		25.0620	22.66	9.46	32.12	60.00	-27.88	QP	
12		25.0620	16.36	9.46	25.82	50.00	-24.18	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test mode	charging

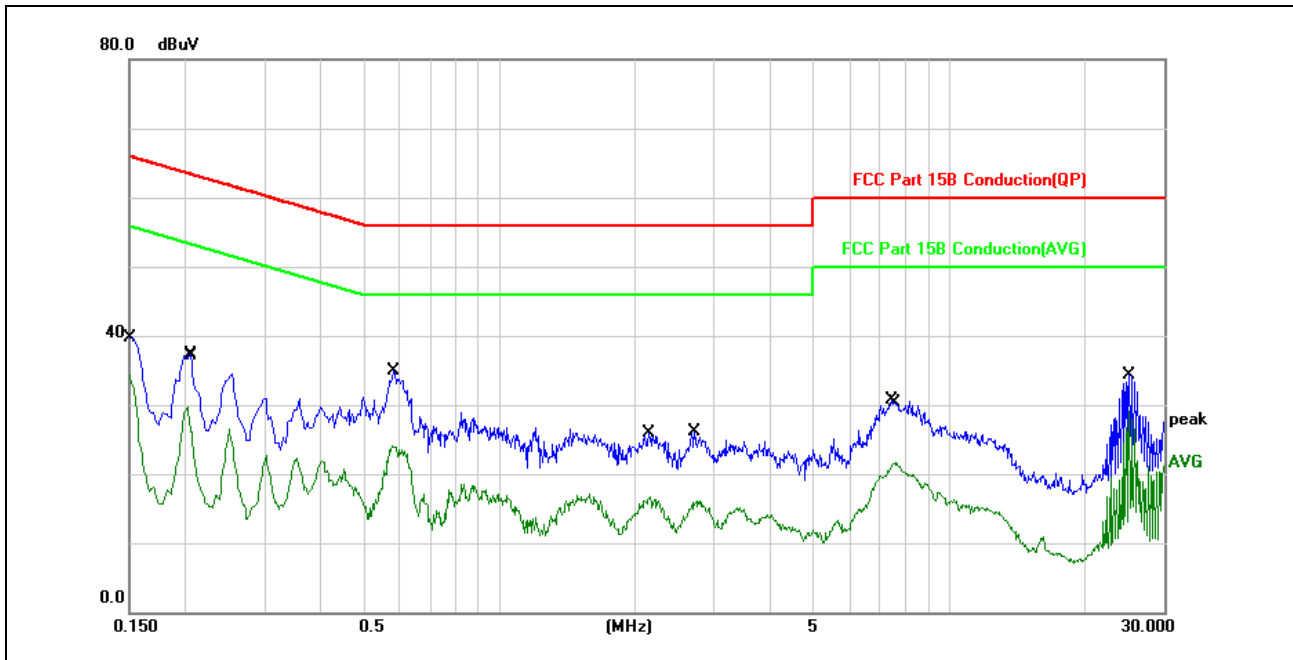

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	30.02	9.75	39.77	65.99	-26.22	QP	
2		0.1500	24.51	9.75	34.26	55.99	-21.73	AVG	
3		0.2020	19.89	9.75	29.64	53.52	-23.88	AVG	
4		0.2060	27.53	9.75	37.28	63.36	-26.08	QP	
5		0.5780	14.20	9.84	24.04	46.00	-21.96	AVG	
6		0.5820	25.08	9.84	34.92	56.00	-21.08	QP	
7		2.1660	7.01	9.64	16.65	46.00	-29.35	AVG	
8		2.7100	16.32	9.71	26.03	56.00	-29.97	QP	
9		7.4580	21.18	9.61	30.79	60.00	-29.21	QP	
10		7.5980	12.02	9.61	21.63	50.00	-28.37	AVG	
11		25.0620	24.93	9.46	34.39	60.00	-25.61	QP	
12	*	25.0620	19.61	9.46	29.07	50.00	-20.93	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. when charging, BT can not transmit

4.2 Radiated emissions

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 Radiated Emission Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

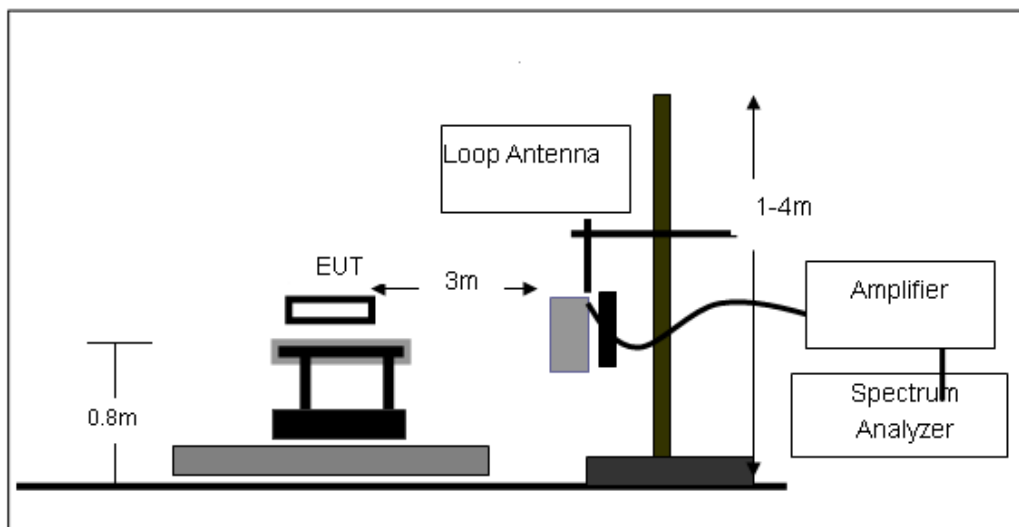

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

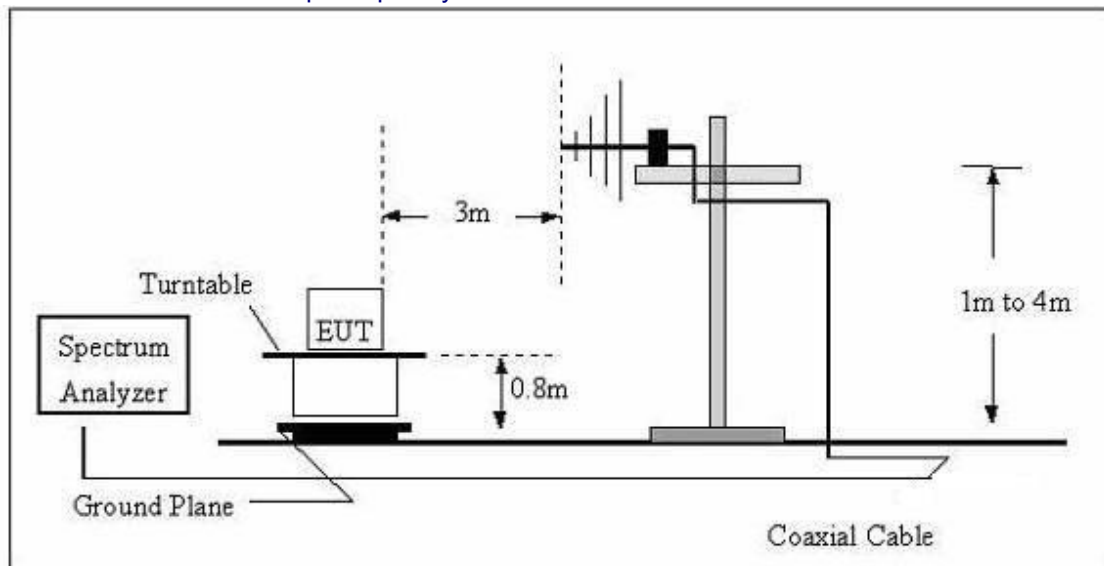

(C) Radiated Emission Test-Up Frequency Above 1GHz

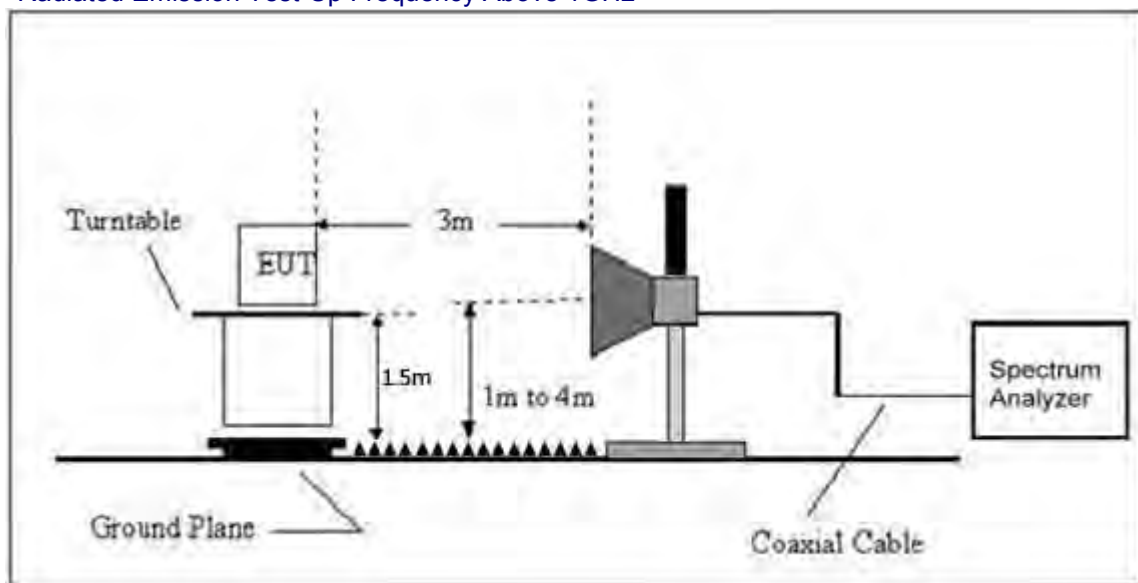

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test mode	BT

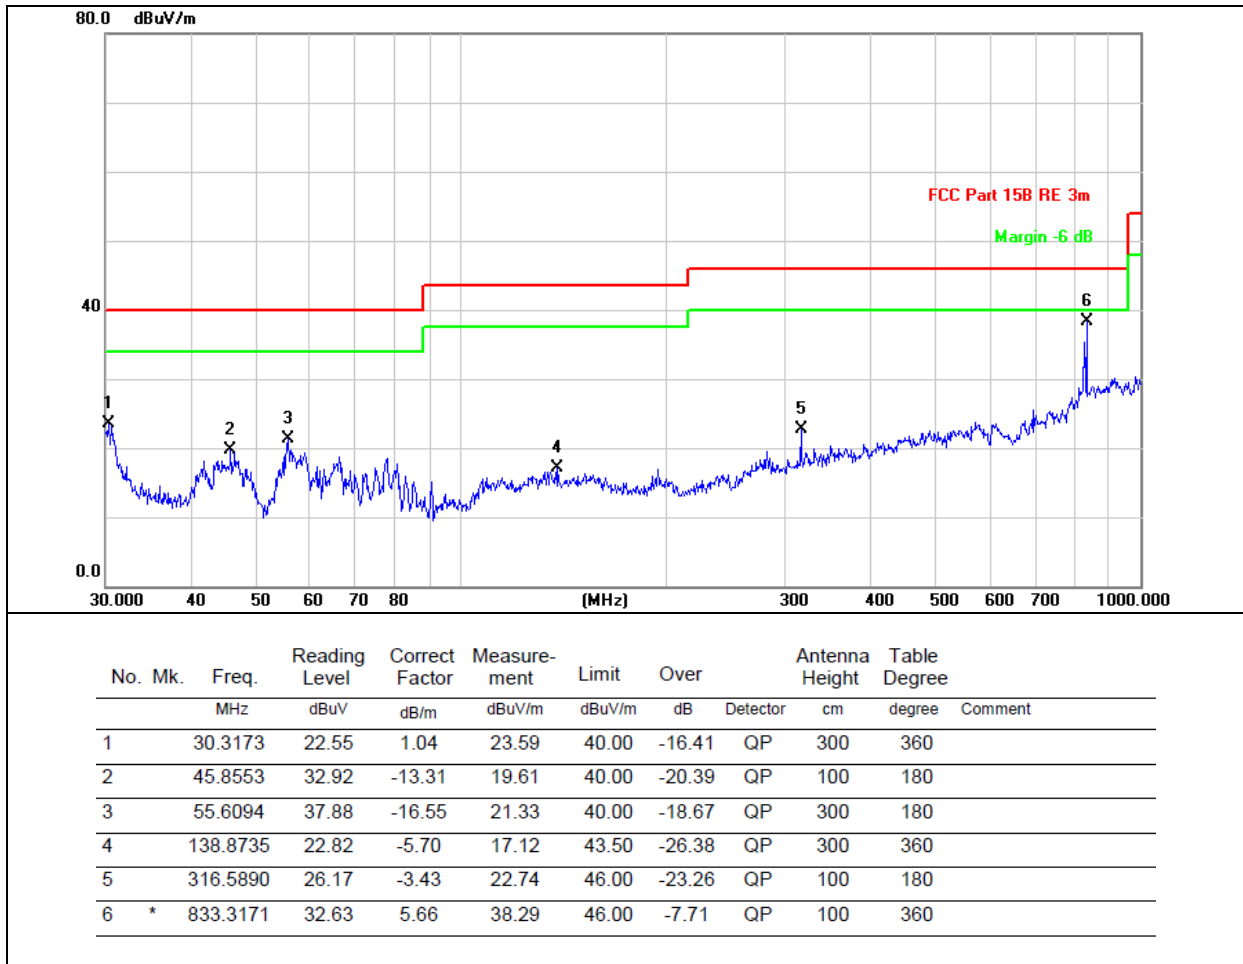

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test mode	BT

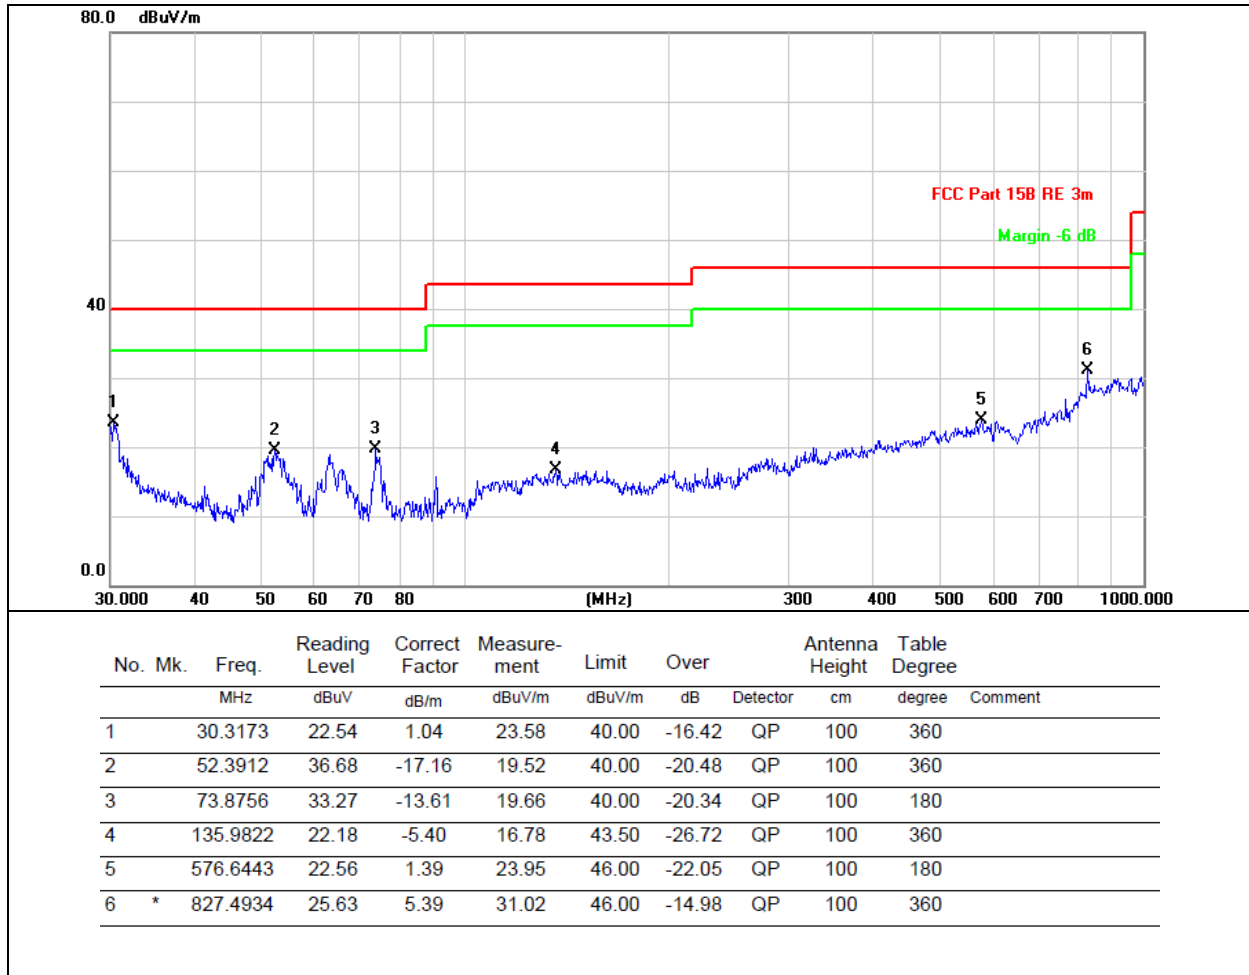

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case GFSK mode

1GHz~25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	55.24	30.55	5.77	24.66	55.12	74.00	-18.88	Pk
V	4804	43.11	30.55	5.77	24.66	42.99	54.00	-11.01	AV
V	7206	56.58	30.33	6.32	24.55	57.12	74.00	-16.88	Pk
V	7206	45.44	30.33	6.32	24.55	45.98	54.00	-8.02	AV
V	9608	43.66	30.85	7.45	24.69	44.95	74.00	-29.05	Pk
V	9608	45.87	30.85	7.45	24.69	47.16	54.00	-6.84	AV
H	4804	46.19	31.02	8.99	25.57	49.73	74.00	-24.27	Pk
H	4804	44.96	31.02	8.99	25.57	48.50	54.00	-5.50	AV
H	7206	43.74	30.55	5.77	24.66	43.62	74.00	-30.38	Pk
H	7206	44.50	30.55	5.77	24.66	44.38	54.00	-9.62	AV
H	9608	45.26	30.33	6.32	24.55	45.80	74.00	-28.20	Pk
H	9608	44.50	30.33	6.32	24.55	45.04	54.00	-8.96	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	56.57	30.55	5.77	24.66	56.45	74.00	-17.55	Pk
V	4882	44.22	30.55	5.77	24.66	44.10	54.00	-9.90	AV
V	7323	56.66	30.33	6.32	24.55	57.20	74.00	-16.80	Pk
V	7323	46.80	30.33	6.32	24.55	47.34	54.00	-6.66	AV
V	9764	45.22	30.85	7.45	24.69	46.51	74.00	-27.49	Pk
V	9764	45.92	30.85	7.45	24.69	47.21	54.00	-6.79	AV
H	4882	44.09	31.02	8.99	25.57	47.63	74.00	-26.37	Pk
H	4882	45.03	31.02	8.99	25.57	48.57	54.00	-5.43	AV
H	7323	43.76	30.55	5.77	24.66	43.64	74.00	-30.36	Pk
H	7323	44.04	30.55	5.77	24.66	43.92	54.00	-10.08	AV
H	9764	43.97	30.33	6.32	24.55	44.51	74.00	-29.49	Pk
H	9764	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	55.04	30.55	5.77	24.66	54.92	74.00	-19.08	Pk
V	4960	43.10	30.55	5.77	24.66	42.98	54.00	-11.02	AV
V	7440	55.73	30.33	6.32	24.55	56.27	74.00	-17.73	Pk
V	7440	46.00	30.33	6.32	24.55	46.54	54.00	-7.46	AV
V	9920	43.75	30.85	7.45	24.69	45.04	74.00	-28.96	Pk
V	9920	45.68	30.85	7.45	24.69	46.97	54.00	-7.03	AV
H	4960	45.13	31.02	8.99	25.57	48.67	74.00	-25.33	Pk
H	4960	46.59	31.02	8.99	25.57	50.13	54.00	-3.87	AV
H	7440	44.59	30.55	5.77	24.66	44.47	74.00	-29.53	Pk
H	7440	45.09	30.55	5.77	24.66	44.97	54.00	-9.03	AV
H	9920	44.06	30.33	6.32	24.55	44.60	74.00	-29.40	Pk
H	9920	46.01	30.33	6.32	24.55	46.55	54.00	-7.45	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

$\pi/4$ -DQPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	53.60	30.55	5.77	24.66	53.48	74.00	-20.52	Pk
V	4804	45.38	30.55	5.77	24.66	45.26	54.00	-8.74	AV
V	7206	56.13	30.33	6.32	24.55	56.67	74.00	-17.33	Pk
V	7206	46.42	30.33	6.32	24.55	46.96	54.00	-7.04	AV
V	9608	46.24	30.85	7.45	24.69	47.53	74.00	-26.47	Pk
V	9608	45.87	30.85	7.45	24.69	47.16	54.00	-6.84	AV
H	4804	44.62	31.02	8.99	25.57	48.16	74.00	-25.84	Pk
H	4804	44.77	31.02	8.99	25.57	48.31	54.00	-5.69	AV
H	7206	46.34	30.55	5.77	24.66	46.22	74.00	-27.78	Pk
H	7206	43.91	30.55	5.77	24.66	43.79	54.00	-10.21	AV
H	9608	46.24	30.33	6.32	24.55	46.78	74.00	-27.22	Pk
H	9608	45.18	30.33	6.32	24.55	45.72	54.00	-8.28	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	56.09	30.55	5.77	24.66	55.97	74.00	-18.03	Pk
V	4882	44.31	30.55	5.77	24.66	44.19	54.00	-9.81	AV
V	7323	54.94	30.33	6.32	24.55	55.48	74.00	-18.52	Pk
V	7323	46.24	30.33	6.32	24.55	46.78	54.00	-7.22	AV
V	9764	46.18	30.85	7.45	24.69	47.47	74.00	-26.53	Pk
V	9764	45.64	30.85	7.45	24.69	46.93	54.00	-7.07	AV
H	4882	45.36	31.02	8.99	25.57	48.90	74.00	-25.10	Pk
H	4882	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV
H	7323	44.48	30.55	5.77	24.66	44.36	74.00	-29.64	Pk
H	7323	45.34	30.55	5.77	24.66	45.22	54.00	-8.78	AV
H	9764	46.01	30.33	6.32	24.55	46.55	74.00	-27.45	Pk
H	9764	44.33	30.33	6.32	24.55	44.87	54.00	-9.13	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	57.24	30.55	5.77	24.66	57.12	74.00	-16.88	Pk
V	4960	43.62	30.55	5.77	24.66	43.50	54.00	-10.50	AV
V	7440	55.02	30.33	6.32	24.55	55.56	74.00	-18.44	Pk
V	7440	45.35	30.33	6.32	24.55	45.89	54.00	-8.11	AV
V	9920	44.65	30.85	7.45	24.69	45.94	74.00	-28.06	Pk
V	9920	44.24	30.85	7.45	24.69	45.53	54.00	-8.47	AV
H	4960	44.63	31.02	8.99	25.57	48.17	74.00	-25.83	Pk
H	4960	46.59	31.02	8.99	25.57	50.13	54.00	-3.87	AV
H	7440	45.29	30.55	5.77	24.66	45.17	74.00	-28.83	Pk
H	7440	44.14	30.55	5.77	24.66	44.02	54.00	-9.98	AV
H	9920	43.99	30.33	6.32	24.55	44.53	74.00	-29.47	Pk
H	9920	45.73	30.33	6.32	24.55	46.27	54.00	-7.73	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8-DPSK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804	55.03	30.55	5.77	24.66	54.91	74.00	-19.09	Pk
V	4804	45.11	30.55	5.77	24.66	44.99	54.00	-9.01	AV
V	7206	56.47	30.33	6.32	24.55	57.01	74.00	-16.99	Pk
V	7206	47.59	30.33	6.32	24.55	48.13	54.00	-5.87	AV
V	9608	44.07	30.85	7.45	24.69	45.36	74.00	-28.64	Pk
V	9608	44.63	30.85	7.45	24.69	45.92	54.00	-8.08	AV
H	4804	46.29	31.02	8.99	25.57	49.83	74.00	-24.17	Pk
H	4804	44.98	31.02	8.99	25.57	48.52	54.00	-5.48	AV
H	7206	44.53	30.55	5.77	24.66	44.41	74.00	-29.59	Pk
H	7206	45.36	30.55	5.77	24.66	45.24	54.00	-8.76	AV
H	9608	45.88	30.33	6.32	24.55	46.42	74.00	-27.58	Pk
H	9608	44.71	30.33	6.32	24.55	45.25	54.00	-8.75	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882	53.05	30.55	5.77	24.66	52.93	74.00	-21.07	Pk
V	4882	45.55	30.55	5.77	24.66	45.43	54.00	-8.57	AV
V	7323	55.90	30.33	6.32	24.55	56.44	74.00	-17.56	Pk
V	7323	45.21	30.33	6.32	24.55	45.75	54.00	-8.25	AV
V	9764	43.74	30.85	7.45	24.69	45.03	74.00	-28.97	Pk
V	9764	43.92	30.85	7.45	24.69	45.21	54.00	-8.79	AV
H	4882	45.79	31.02	8.99	25.57	49.33	74.00	-24.67	Pk
H	4882	46.42	31.02	8.99	25.57	49.96	54.00	-4.04	AV
H	7323	45.89	30.55	5.77	24.66	45.77	74.00	-28.23	Pk
H	7323	43.94	30.55	5.77	24.66	43.82	54.00	-10.18	AV
H	9764	46.50	30.33	6.32	24.55	47.04	74.00	-26.96	Pk
H	9764	46.05	30.33	6.32	24.55	46.59	54.00	-7.41	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960	57.76	30.55	5.77	24.66	57.64	74.00	-16.36	Pk
V	4960	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
V	7440	55.16	30.33	6.32	24.55	55.70	74.00	-18.30	Pk
V	7440	46.38	30.33	6.32	24.55	46.92	54.00	-7.08	AV
V	9920	44.07	30.85	7.45	24.69	45.36	74.00	-28.64	Pk
V	9920	46.19	30.85	7.45	24.69	47.48	54.00	-6.52	AV
H	4960	46.31	31.02	8.99	25.57	49.85	74.00	-24.15	Pk
H	4960	46.12	31.02	8.99	25.57	49.66	54.00	-4.34	AV
H	7440	43.85	30.55	5.77	24.66	43.73	74.00	-30.27	Pk
H	7440	43.78	30.55	5.77	24.66	43.66	54.00	-10.34	AV
H	9920	44.13	30.33	6.32	24.55	44.67	74.00	-29.33	Pk
H	9920	43.67	30.33	6.32	24.55	44.21	54.00	-9.79	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 Test Requirement:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

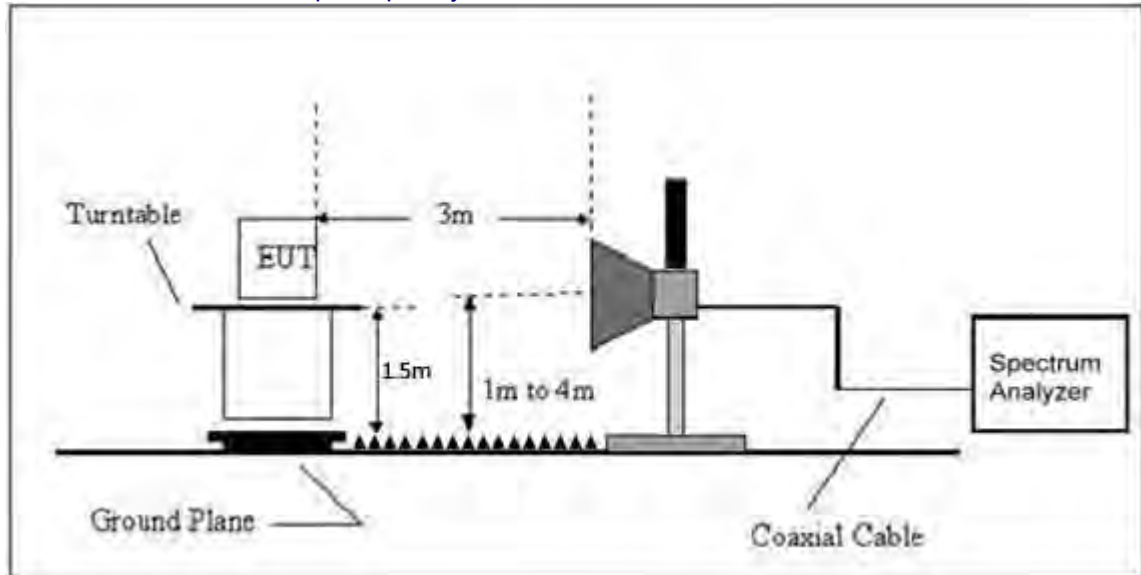

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2390.00	53.97	30.22	4.85	23.98	52.58	74.00	PK	PASS
	H	2390.00	44.94	30.22	4.85	23.98	43.55	54.00	AV	PASS
	H	2400.00	56.90	30.22	4.85	23.98	55.51	74.00	PK	PASS
	H	2400.00	47.09	30.22	4.85	23.98	45.70	54.00	AV	PASS
	V	2390.00	58.21	30.22	4.85	23.98	56.82	74.00	PK	PASS
	V	2390.00	44.60	30.22	4.85	23.98	43.21	54.00	AV	PASS
	V	2400.00	55.59	30.22	4.85	23.98	54.20	74.00	PK	PASS
	V	2400.00	46.12	30.22	4.85	23.98	44.73	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	53.59	30.22	4.85	23.98	52.20	74.00	PK	PASS
	H	2485.50	42.84	30.22	4.85	23.98	41.45	54.00	AV	PASS
	H	2483.50	54.69	30.22	4.85	23.98	53.30	74.00	PK	PASS
	H	2485.50	46.31	30.22	4.85	23.98	44.92	54.00	AV	PASS
	V	2483.50	53.95	30.22	4.85	23.98	52.56	74.00	PK	PASS
	V	2485.50	44.09	30.22	4.85	23.98	42.70	54.00	AV	PASS
V	2483.50	56.58	30.22	4.85	23.98	55.19	74.00	PK	PASS	
V	2485.50	45.43	30.22	4.85	23.98	44.04	54.00	AV	PASS	
π/4-DQPSK	Low Channel: 2402MHz									
	H	2390.00	53.40	30.22	4.85	23.98	52.01	74.00	PK	PASS
	H	2390.00	43.37	30.22	4.85	23.98	41.98	54.00	AV	PASS
	H	2400.00	56.60	30.22	4.85	23.98	55.21	74.00	PK	PASS
	H	2400.00	46.42	30.22	4.85	23.98	45.03	54.00	AV	PASS
	V	2390.00	55.64	30.22	4.85	23.98	54.25	74.00	PK	PASS
	V	2390.00	44.91	30.22	4.85	23.98	43.52	54.00	AV	PASS
	V	2400.00	54.71	30.22	4.85	23.98	53.32	74.00	PK	PASS
	V	2400.00	45.55	30.22	4.85	23.98	44.16	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	57.21	30.22	4.85	23.98	55.82	74.00	PK	PASS
	H	2485.50	45.37	30.22	4.85	23.98	43.98	54.00	AV	PASS
	H	2483.50	55.69	30.22	4.85	23.98	54.30	74.00	PK	PASS
	H	2485.50	47.43	30.22	4.85	23.98	46.04	54.00	AV	PASS
	V	2483.50	56.18	30.22	4.85	23.98	54.79	74.00	PK	PASS
	V	2485.50	44.13	30.22	4.85	23.98	42.74	54.00	AV	PASS
V	2483.50	55.50	30.22	4.85	23.98	54.11	74.00	PK	PASS	
V	2485.50	45.07	30.22	4.85	23.98	43.68	54.00	AV	PASS	

Low Channel: 2402MHz											
8-DPSK	H	2390.00	53.45	30.22	4.85	23.98	52.06	74.00	PK	PASS	
	H	2390.00	42.73	30.22	4.85	23.98	41.34	54.00	AV	PASS	
	H	2400.00	57.32	30.22	4.85	23.98	55.93	74.00	PK	PASS	
	H	2400.00	46.44	30.22	4.85	23.98	45.05	54.00	AV	PASS	
	V	2390.00	54.25	30.22	4.85	23.98	52.86	74.00	PK	PASS	
	V	2390.00	42.81	30.22	4.85	23.98	41.42	54.00	AV	PASS	
	V	2400.00	56.75	30.22	4.85	23.98	55.36	74.00	PK	PASS	
	V	2400.00	44.63	30.22	4.85	23.98	43.24	54.00	AV	PASS	
	High Channel: 2480MHz										
	H	2483.50	54.04	30.22	4.85	23.98	52.65	74.00	PK	PASS	
	H	2485.50	44.69	30.22	4.85	23.98	43.30	54.00	AV	PASS	
	H	2483.50	55.91	30.22	4.85	23.98	54.52	74.00	PK	PASS	
	H	2485.50	46.18	30.22	4.85	23.98	44.79	54.00	AV	PASS	
	V	2483.50	58.46	30.22	4.85	23.98	57.07	74.00	PK	PASS	
	V	2485.50	45.07	30.22	4.85	23.98	43.68	54.00	AV	PASS	
	V	2483.50	55.03	30.22	4.85	23.98	53.64	74.00	PK	PASS	
V	2485.50	46.21	30.22	4.85	23.98	44.82	54.00	AV	PASS		
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											

6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 Limit

Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2 Test Setup



6.3 Test procedure

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.




6.4 DEVIATION FROM STANDARD

No deviation.



6.5 Test Result

GFSK mode:

Test channel:	Lowest channel
---------------	----------------

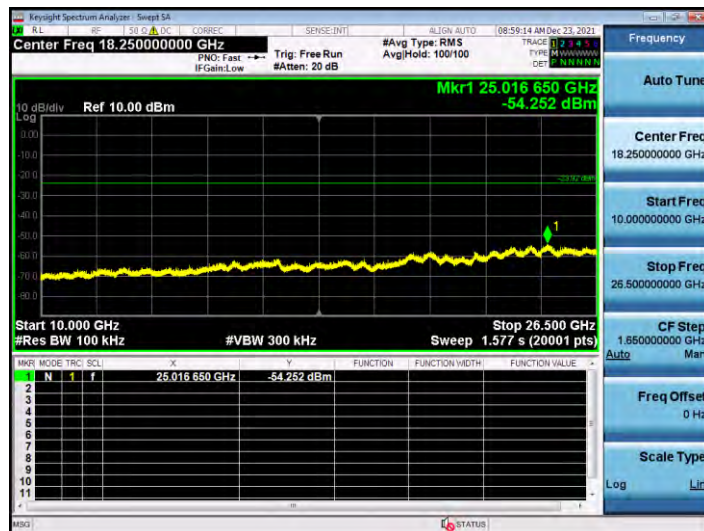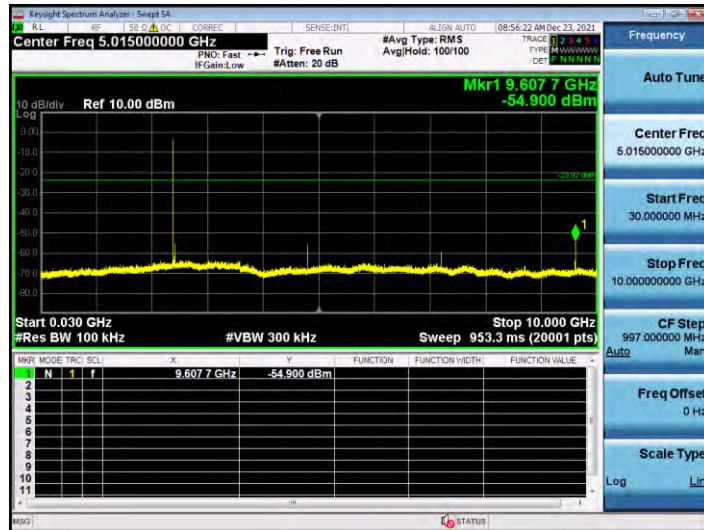
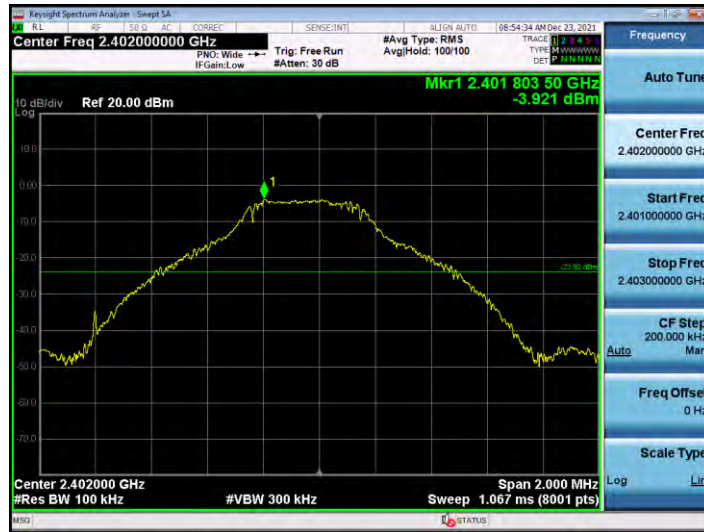


Test channel:	Highest channel
---------------	-----------------

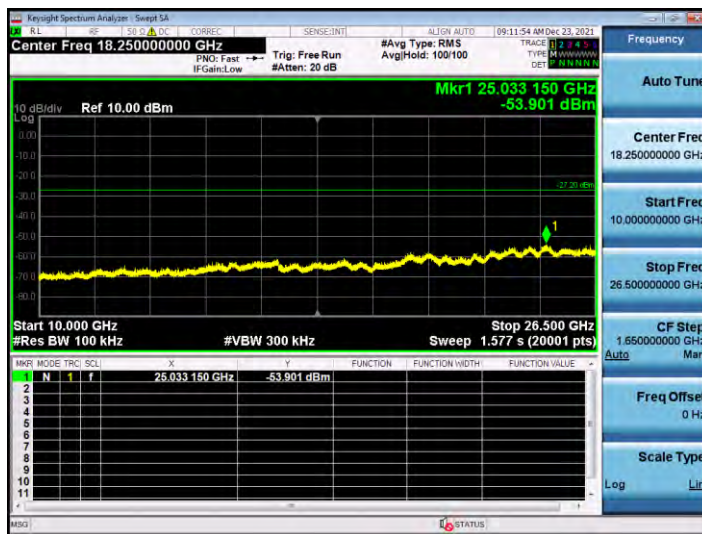
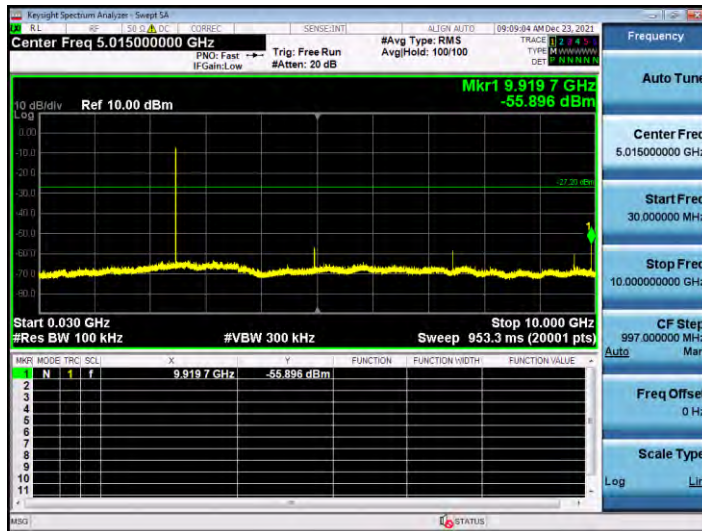


$\pi/4$ -DQPSK mode:

Test channel:	Lowest channel
---------------	----------------


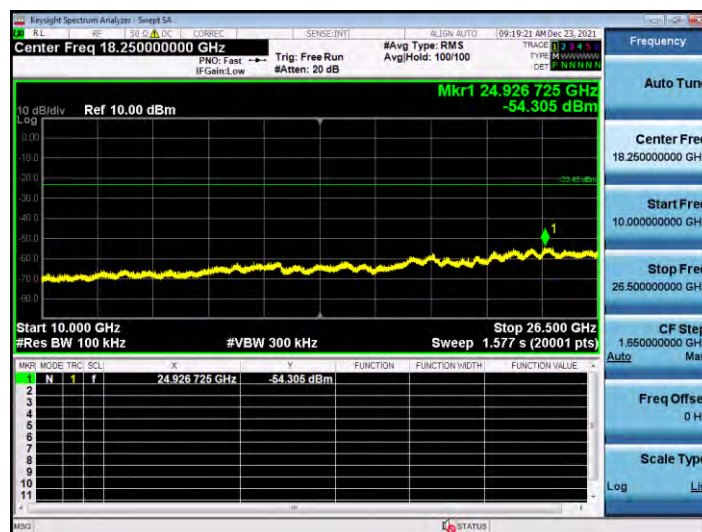
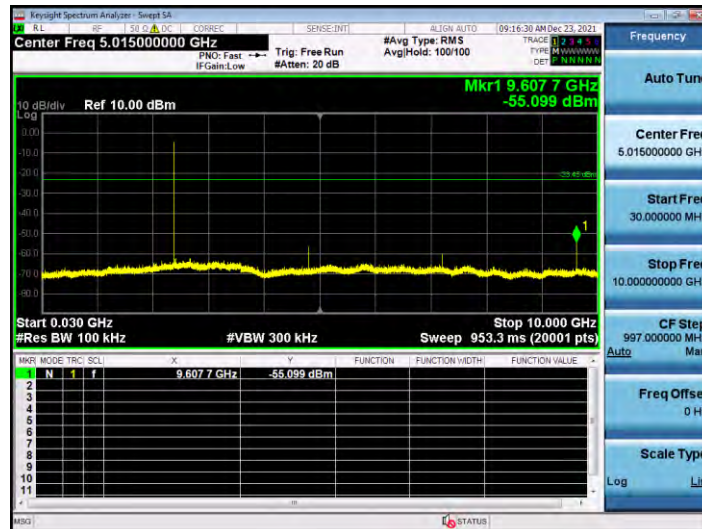


Test channel: Highest channel

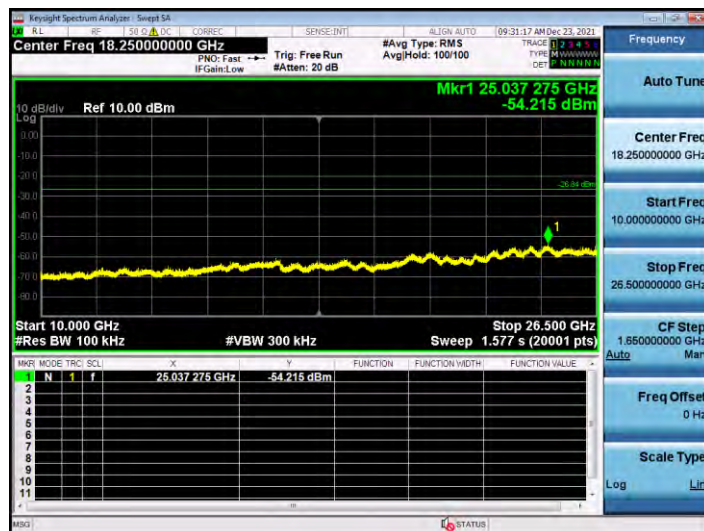
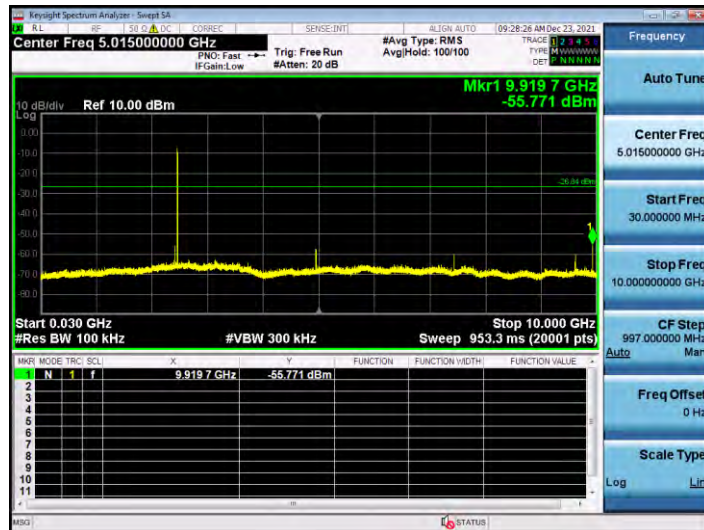


8-DPSK mode:




Test channel:	Lowest channel
---------------	----------------

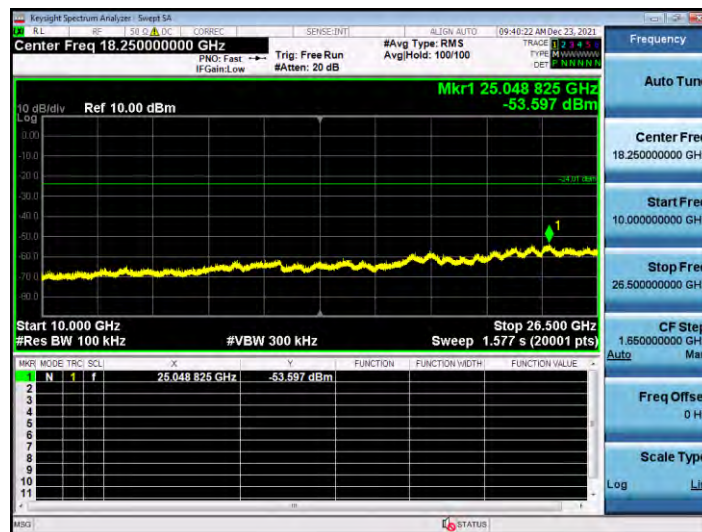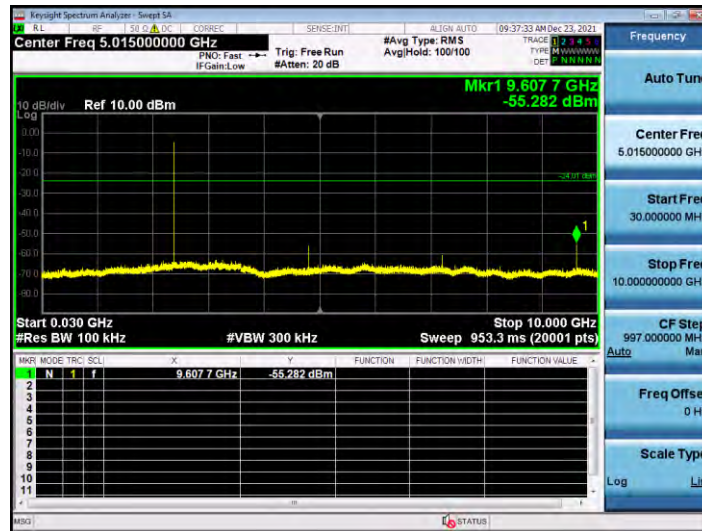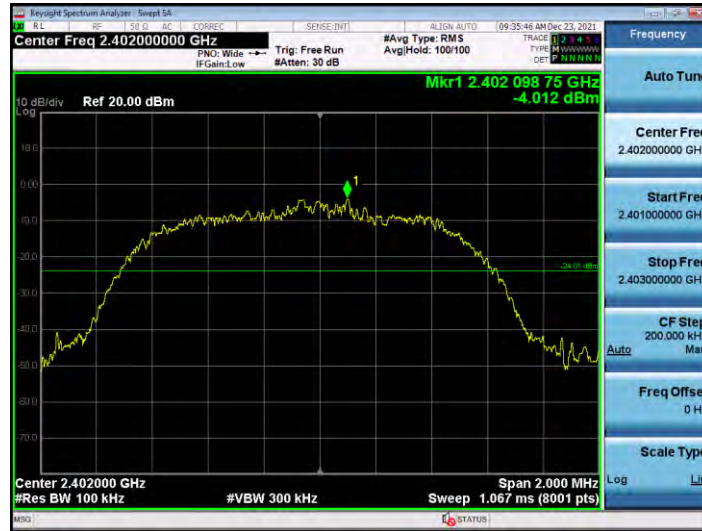


Test channel: Middle channel

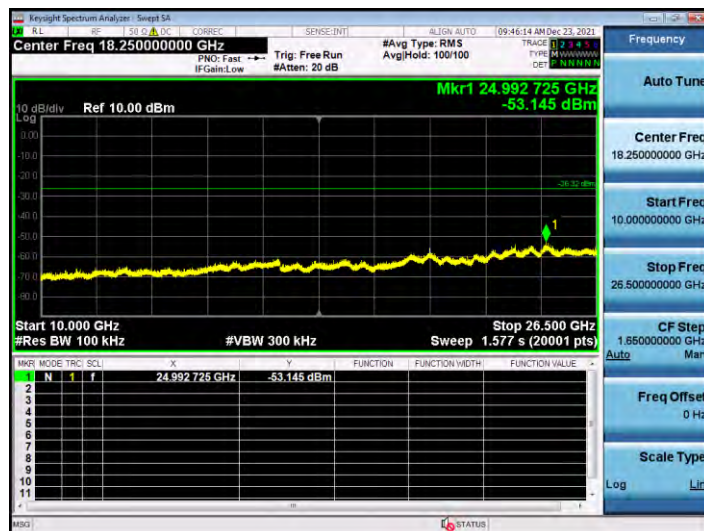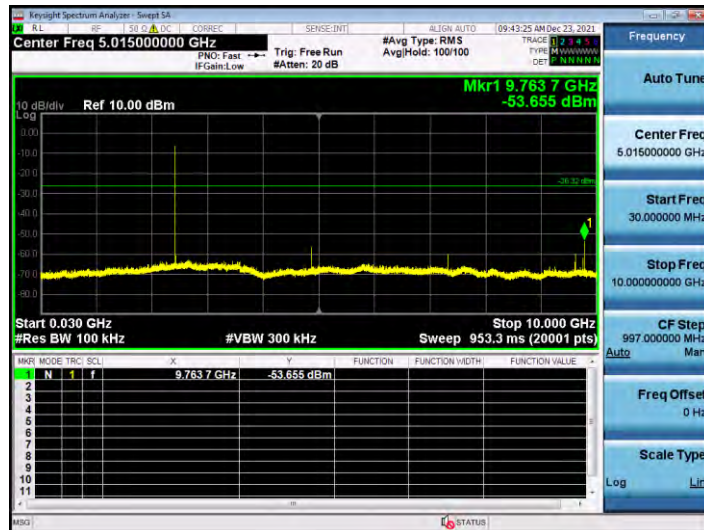


Test channel:	Highest channel
---------------	-----------------

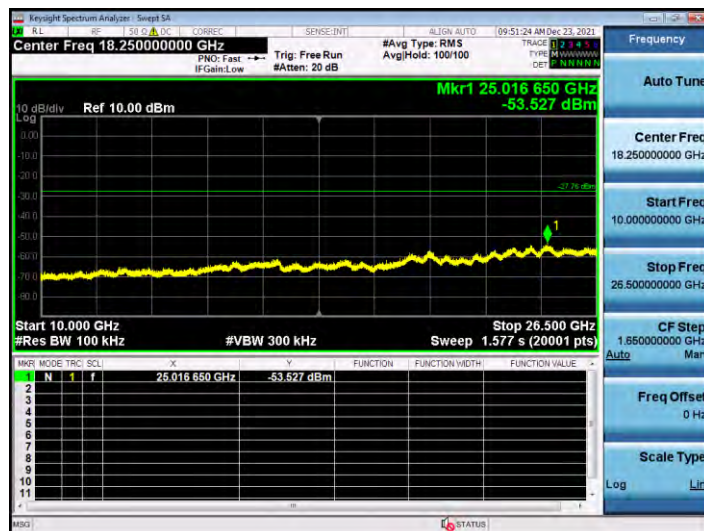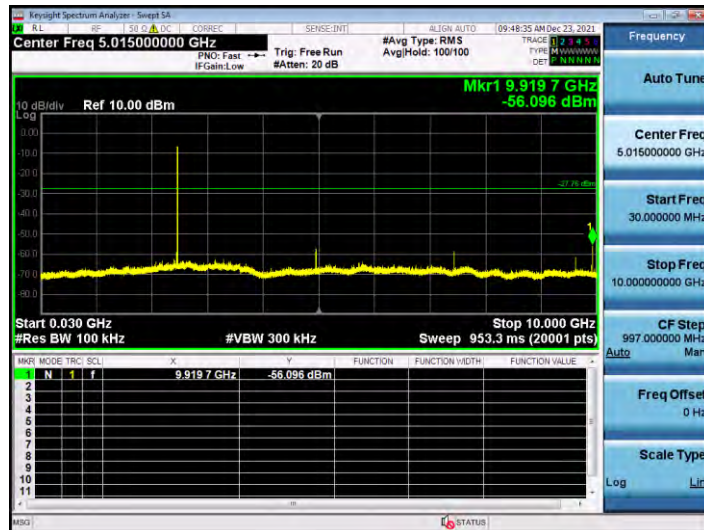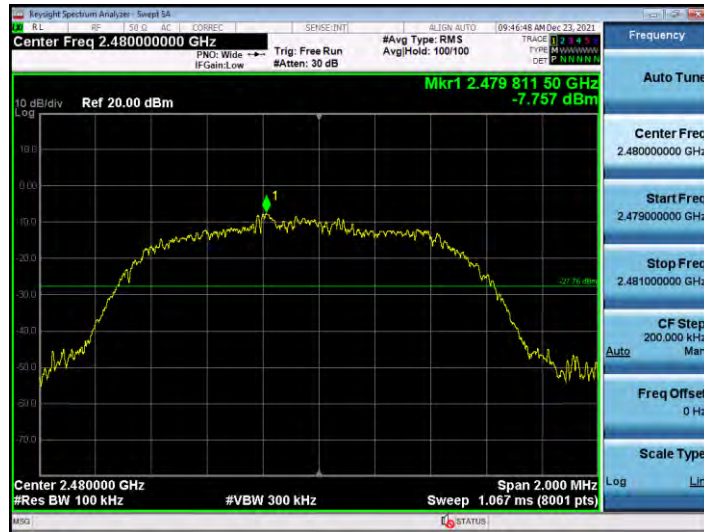

GFSK No-hopping Band edge-left side

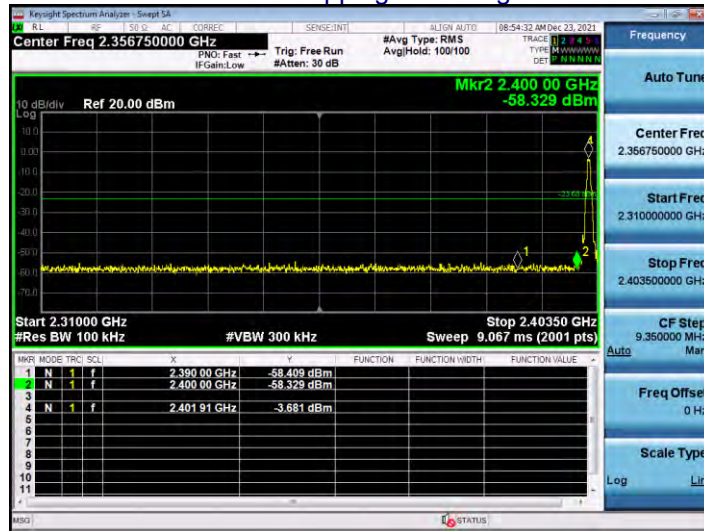

GFSK Hopping Band edge-left side

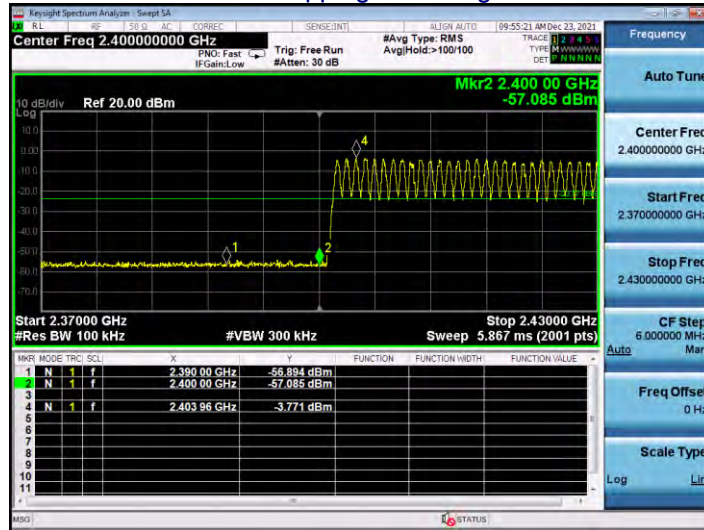

7. 20DB BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 20 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.8848	Pass
	Middle	0.8839	
	Highest	0.8852	
$\pi/4$ -DQPSK	Lowest	1.232	Pass
	Middle	1.303	
	Highest	1.242	
8-DPSK	Lowest	1.301	Pass
	Middle	1.252	
	Highest	1.243	

Test plots

GFSK Low Channel




GFSK Middle Channel




GFSK High Channel




$\pi/4$ -DQPSK Low Channel

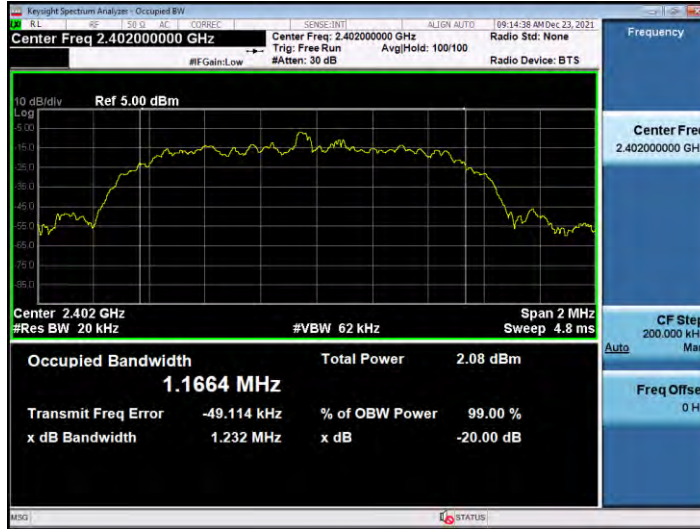

$\pi/4$ -DQPSK Middle Channel

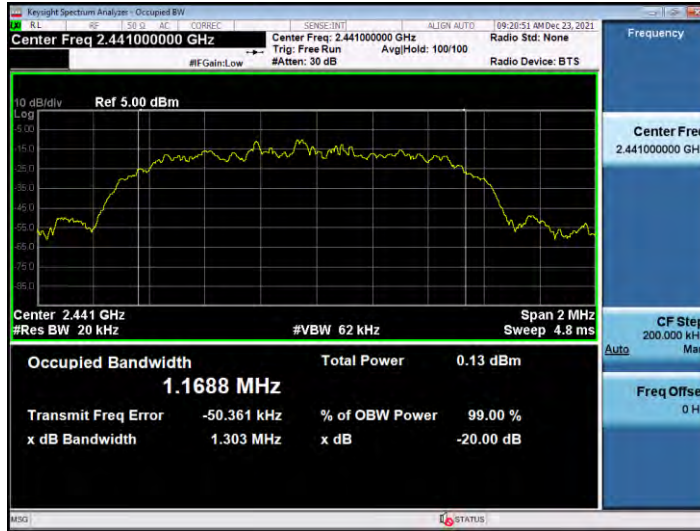


$\pi/4$ -DQPSK High Channel

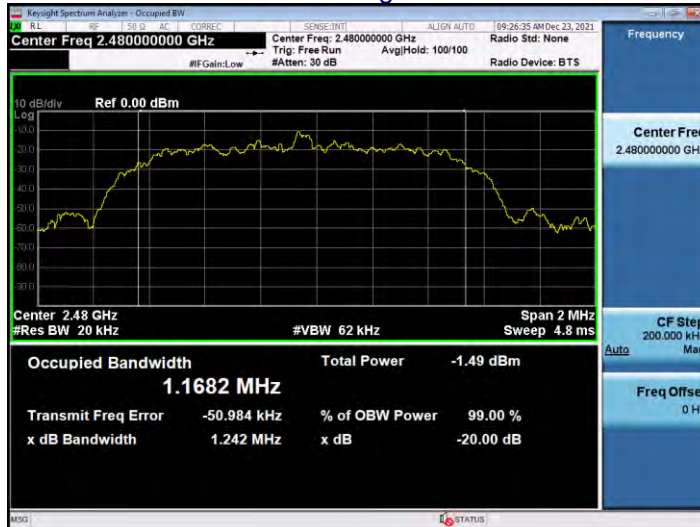


8-DPSK Low Channel



8-DPSK Middle Channel

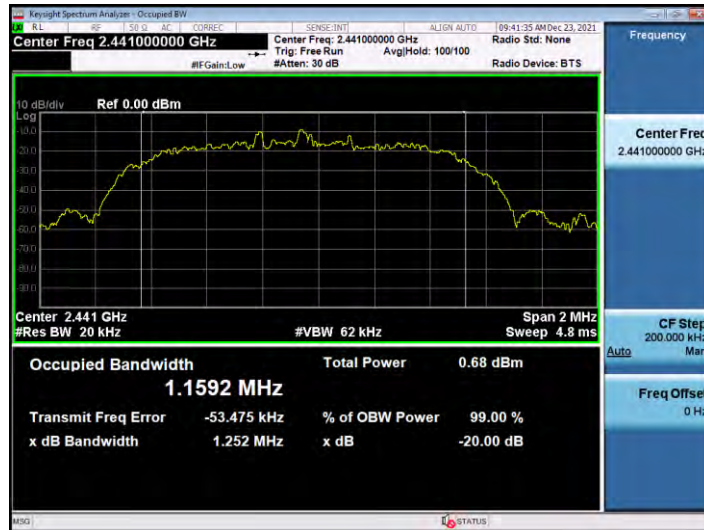


8-DPSK High Channel

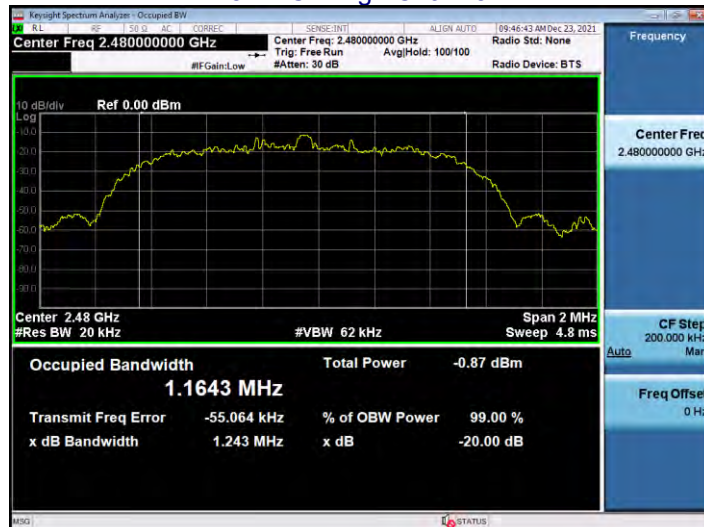

8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	21

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.

8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	-3.181	21	Pass
	Middle	-4.998		
	Highest	-6.530		
$\pi/4$ -DQPSK	Lowest	-2.458	21	Pass
	Middle	-4.450		
	Highest	-6.051		
8-DPSK	Lowest	-1.901	21	Pass
	Middle	-3.848		
	Highest	-5.409		

9. Hopping Channel Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


9.3 DEVIATION FROM STANDARD

No deviation.

9.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.004	0.8848	PASS
GFSK	Middle	0.999	0.8839	PASS
GFSK	High	0.996	0.8852	PASS
$\pi/4$ -DQPSK	Low	1.001	0.82	PASS
$\pi/4$ -DQPSK	Middle	1.003	0.87	PASS
$\pi/4$ -DQPSK	High	1.004	0.83	PASS
8-DPSK	Low	0.991	0.87	PASS
8-DPSK	Middle	1.009	0.83	PASS
8-DPSK	High	1.006	0.83	PASS


Test plots GFSK Low Channel

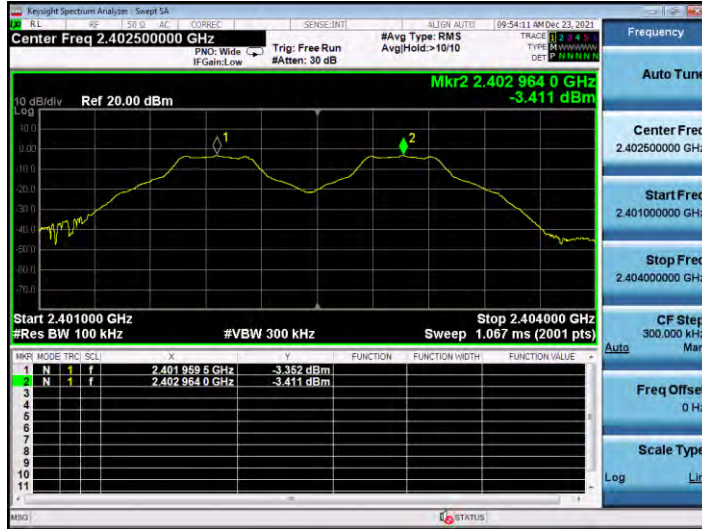


GFSK Middle Channel



GFSK High Channel

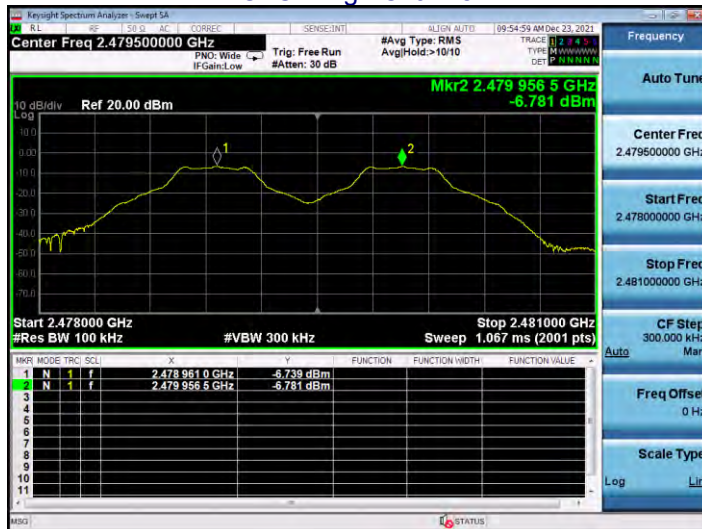


$\pi/4$ -DQPSK Low Channel

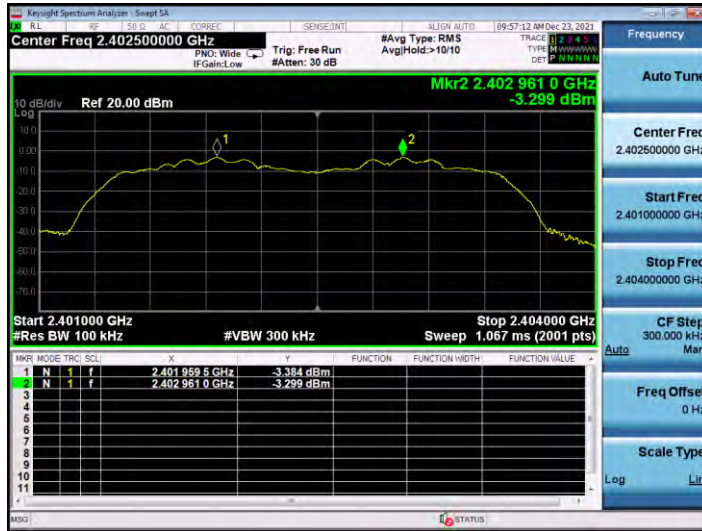


$\pi/4$ -DQPSK Middle Channel




$\pi/4$ -DQPSK High Channel

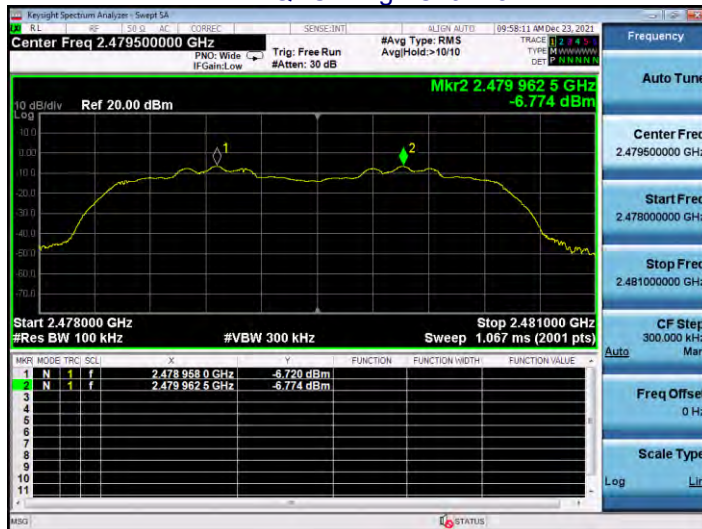


8-DPSK Low Channel

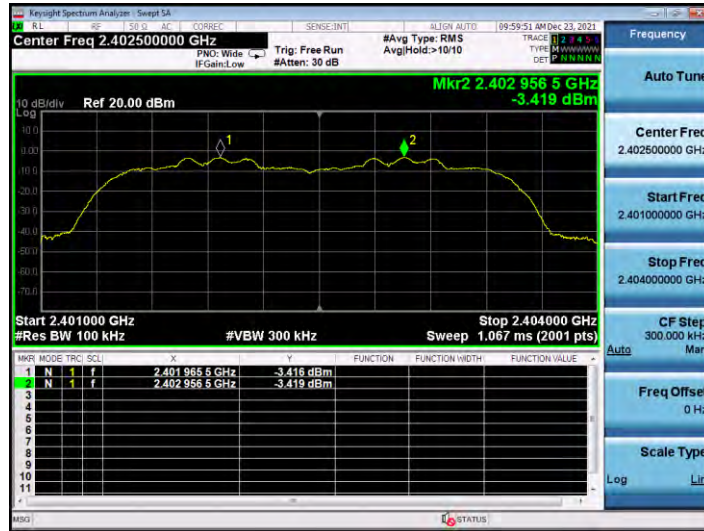

8-DPSK Middle Channel

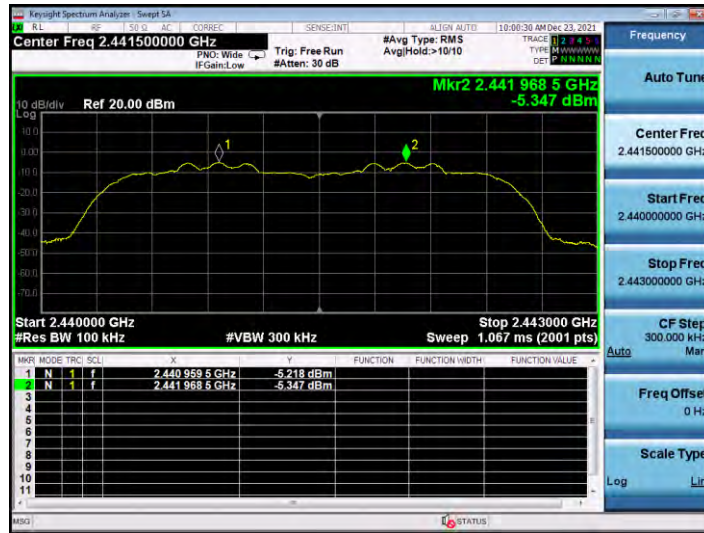


8-DPSK High Channel

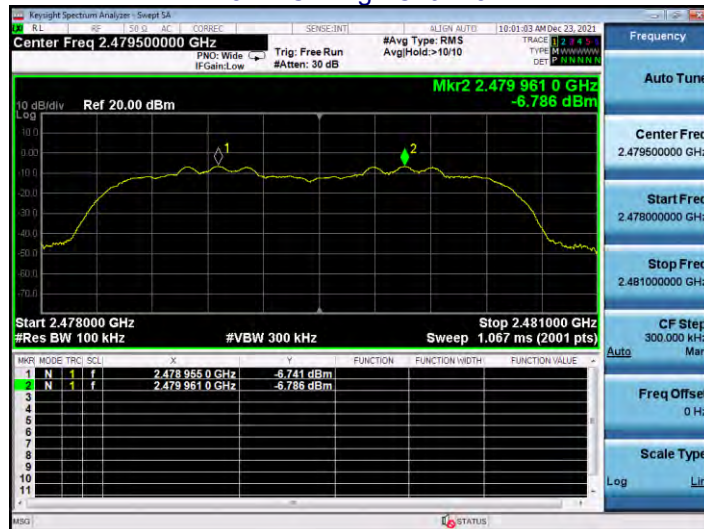

10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup

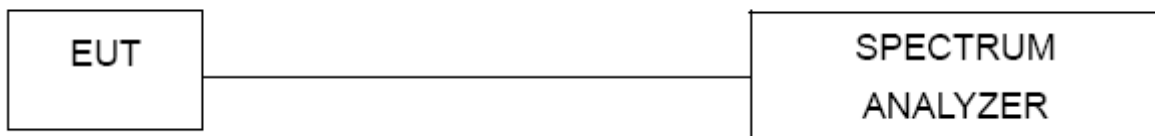

10.2 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

10.3 DEVIATION FROM STANDARD


No deviation.

10.4 Test Result


Test Plots: 79 Channels in total GFSK

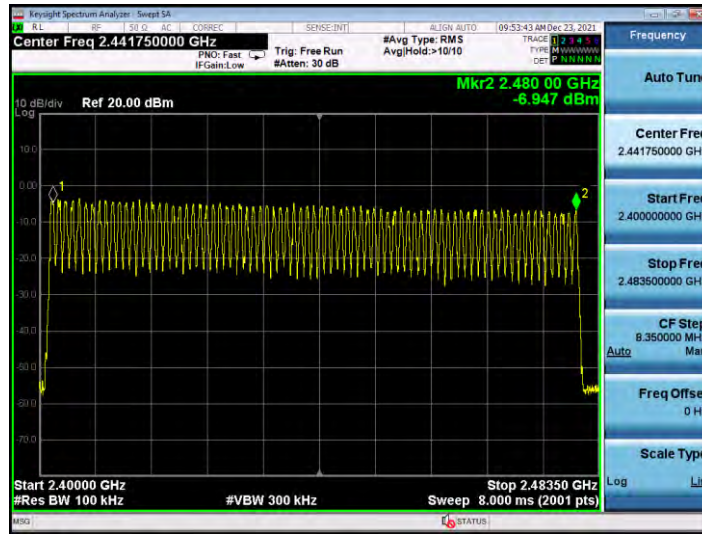

$\pi/4$ -DQPSK

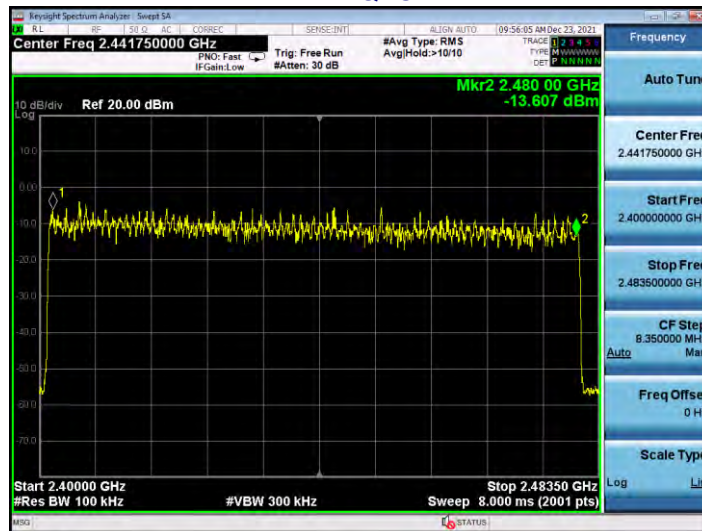


8-DPSK

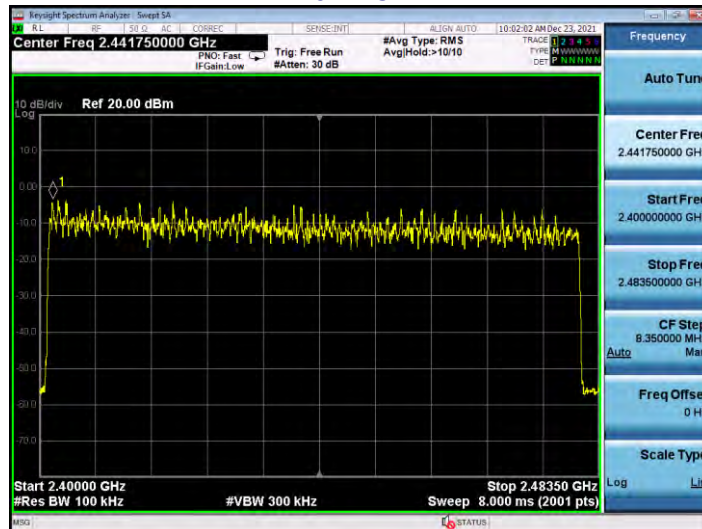

11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup

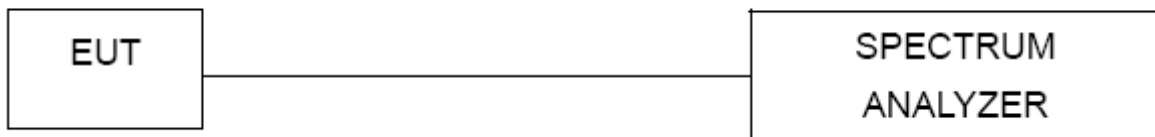

11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 Test Result


Frequency	Packet	Burst Width [ms/hop/ch]	Dwell time(ms)	Limit(ms)	Result
2402MHz	DH1	0.4031	128.992	400	Pass
2441MHz	DH1	0.4032	129.024	400	Pass
2480MHz	DH1	0.4045	129.440	400	Pass
2402MHz	DH3	1.660	265.600	400	Pass
2441MHz	DH3	1.660	265.600	400	Pass
2480MHz	DH3	1.656	264.960	400	Pass
2402MHz	DH5	2.905	309.867	400	Pass
2441MHz	DH5	2.906	309.973	400	Pass
2480MHz	DH5	2.905	309.867	400	Pass
2402MHz	2DH1	0.4135	132.320	400	Pass
2441MHz	2DH1	0.4134	132.288	400	Pass
2480MHz	2DH1	0.4129	132.128	400	Pass
2402MHz	2DH3	1.665	266.400	400	Pass
2441MHz	2DH3	1.665	266.400	400	Pass
2480MHz	2DH3	1.665	266.400	400	Pass
2402MHz	2DH5	2.910	310.400	400	Pass
2441MHz	2DH5	2.913	310.720	400	Pass
2480MHz	2DH5	2.914	310.827	400	Pass
2402MHz	3DH1	0.4151	132.832	400	Pass
2441MHz	3DH1	0.4130	132.160	400	Pass
2480MHz	3DH1	0.4150	132.800	400	Pass
2402MHz	3DH3	1.663	266.080	400	Pass
2441MHz	3DH3	1.664	266.240	400	Pass
2480MHz	3DH3	1.664	266.240	400	Pass
2402MHz	3DH5	2.915	310.933	400	Pass
2441MHz	3DH5	2.914	310.827	400	Pass
2480MHz	3DH5	2.914	310.827	400	Pass

Remarks:


The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
 Test channel: 2402MHz as blow
 DH1 2DH1 3DH1 time slot= $\text{Burst Width(ms)} \times (1600 / (2 \times 79)) \times 31.6$
 DH3 2DH3 3DH3 time slot= $\text{Burst Width(ms)} \times (1600 / (4 \times 79)) \times 31.6$
 DH5 2DH5 3DH5 time slot= $\text{Burst Width(ms)} \times (1600 / (6 \times 79)) \times 31.6$

Test Plots


GFSK DH1 2402MHZ

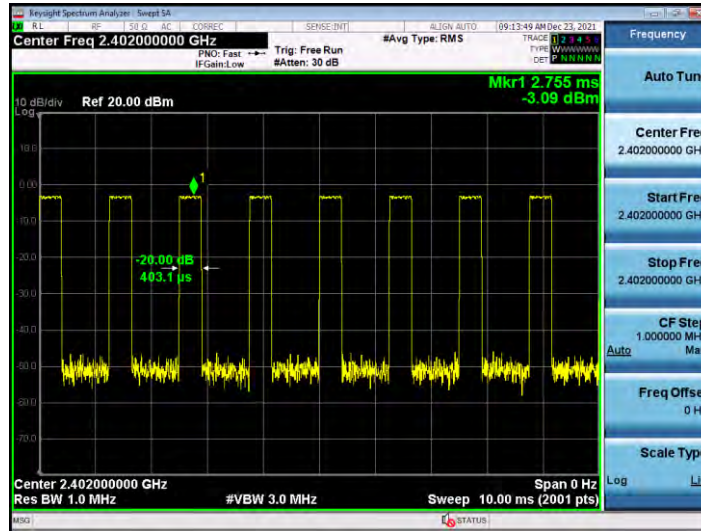


GFSK DH1 2441MHZ

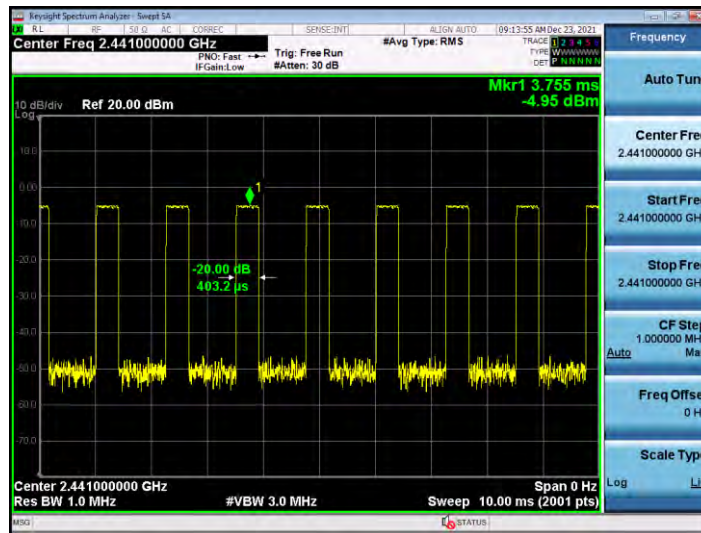


GFSK DH1 2480MHZ

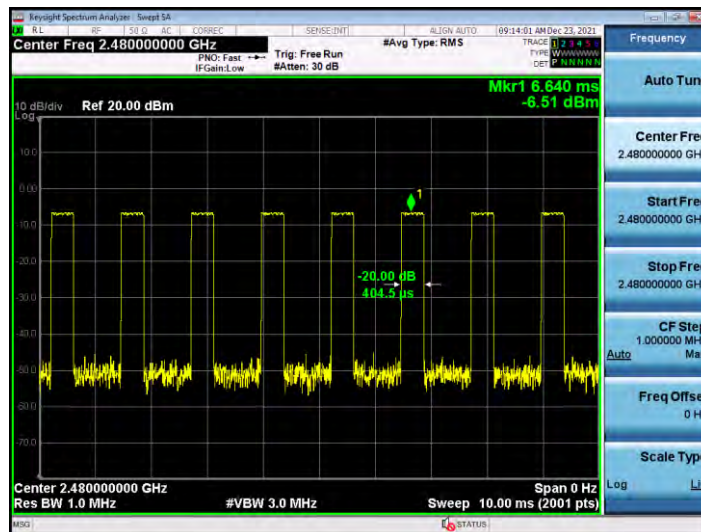


GFSK DH3 2402MHZ

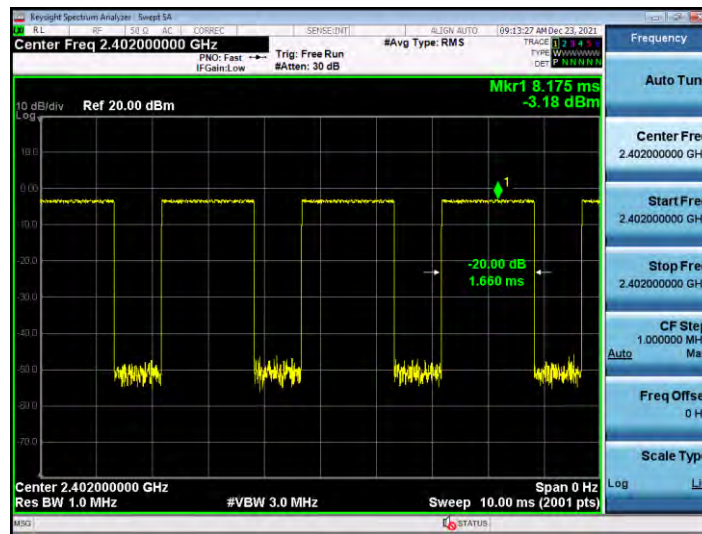


GFSK DH3 2441MHZ

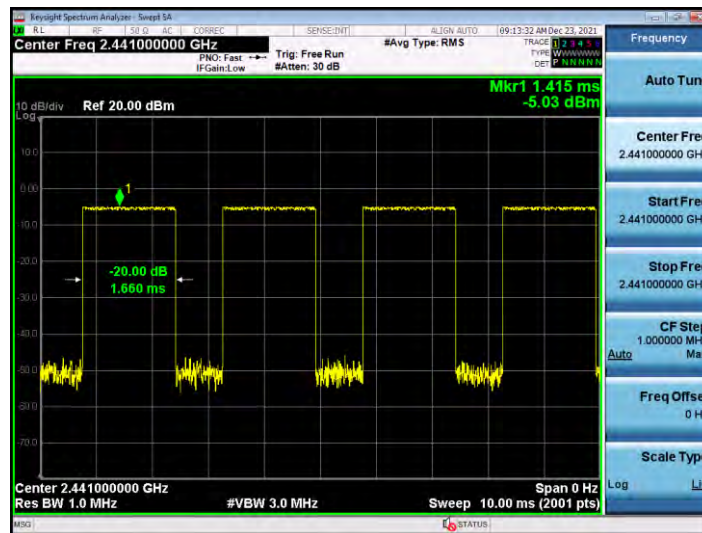


GFSK DH3 2480MHZ

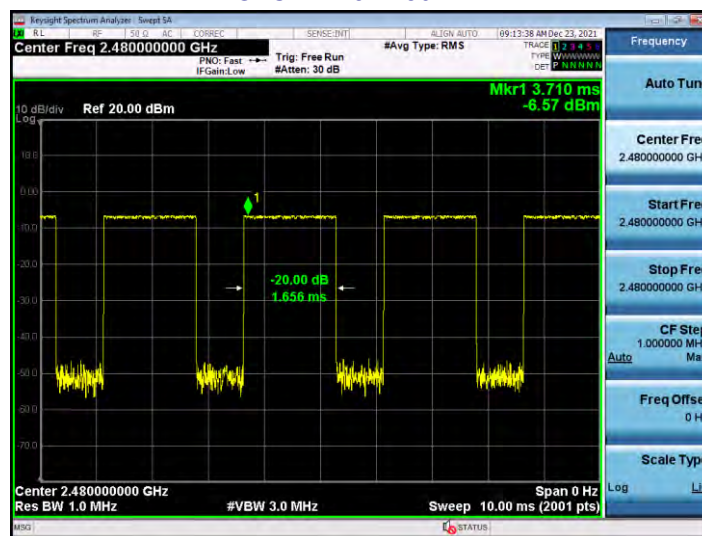


GFSK DH5 2402MHZ

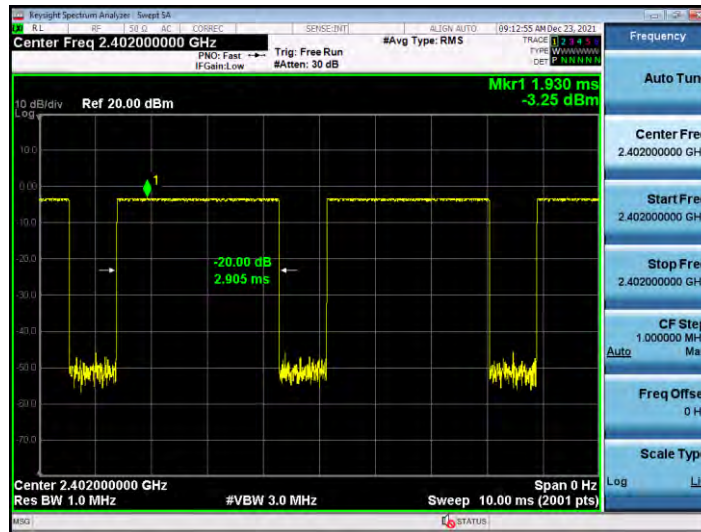


GFSK DH5 2441MHZ

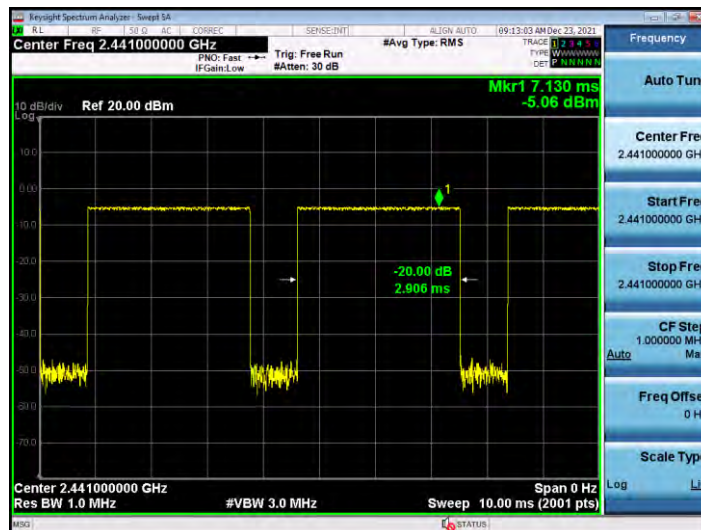


GFSK DH5 2480MHZ

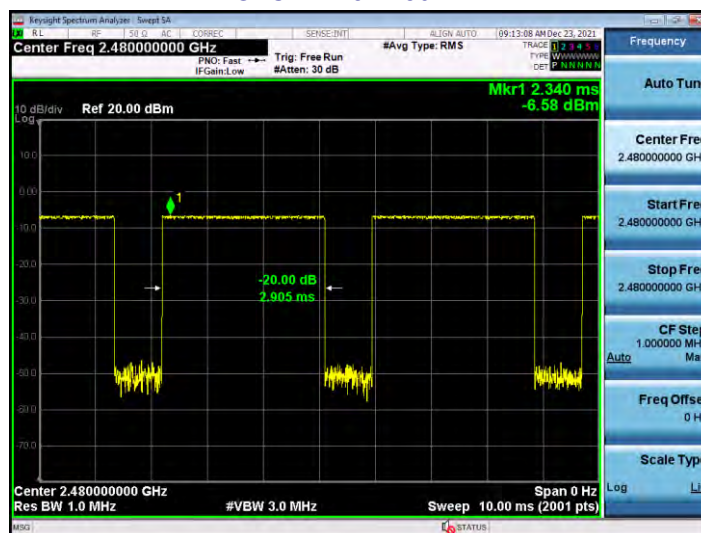


$\pi/4$ -DQPSK 2DH1 2402MHZ

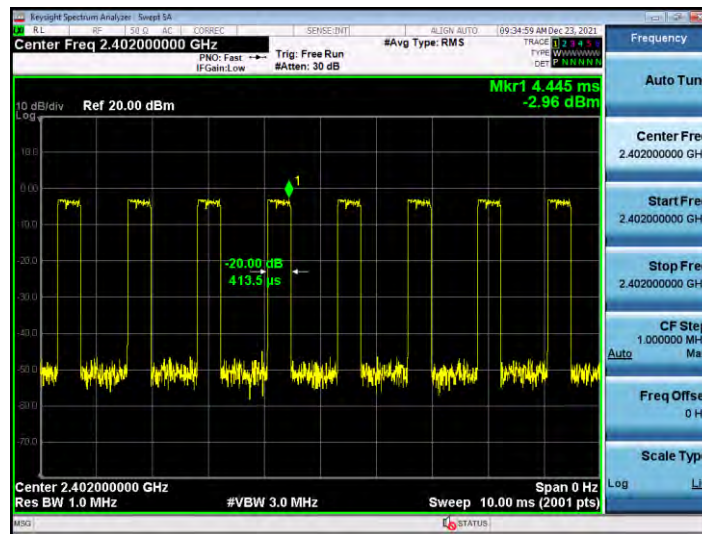


$\pi/4$ -DQPSK 2DH1 2441MHZ

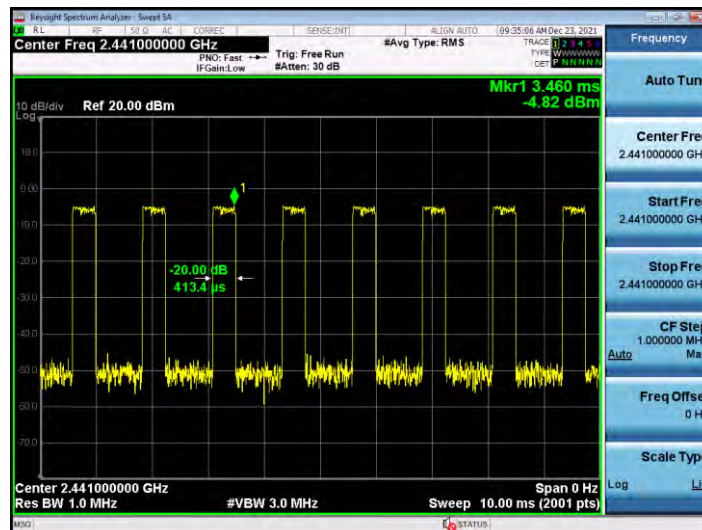


$\pi/4$ -DQPSK 2DH1 2480MHZ

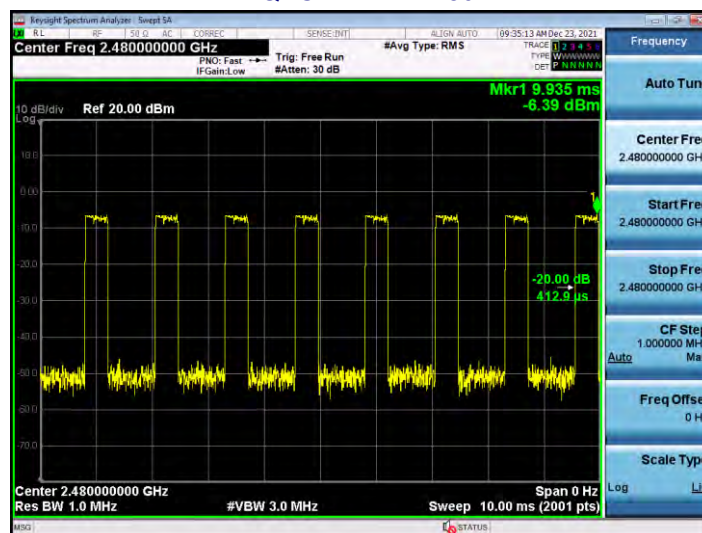


$\pi/4$ -DQPSK 2DH3 2402MHZ

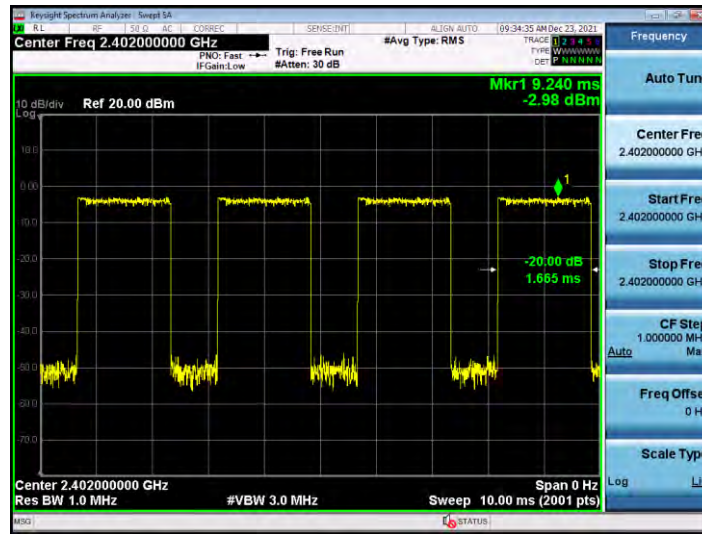


$\pi/4$ -DQPSK 2DH3 2441MHZ

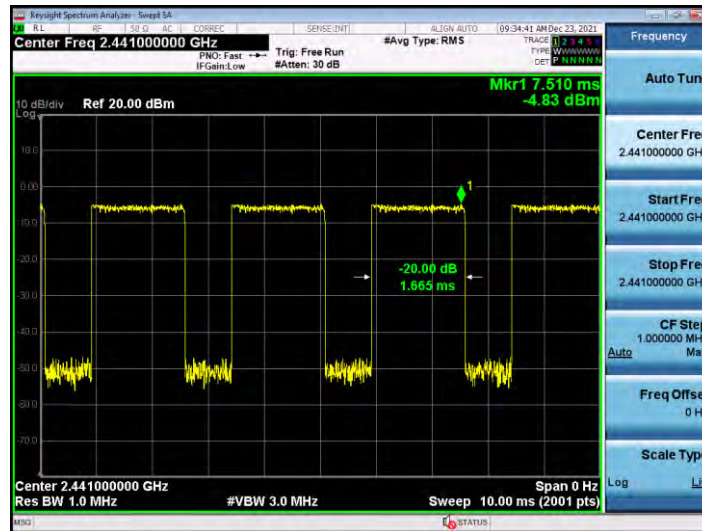


$\pi/4$ -DQPSK 2DH3 2480MHZ

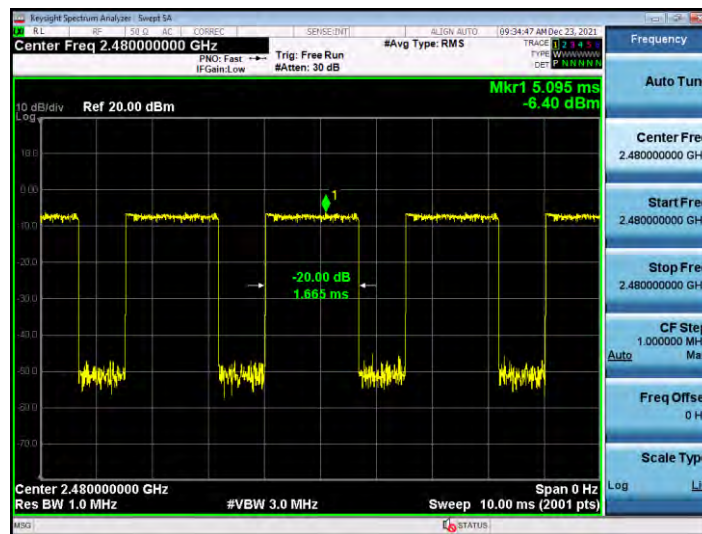


$\pi/4$ -DQPSK 2DH5 2402MHZ

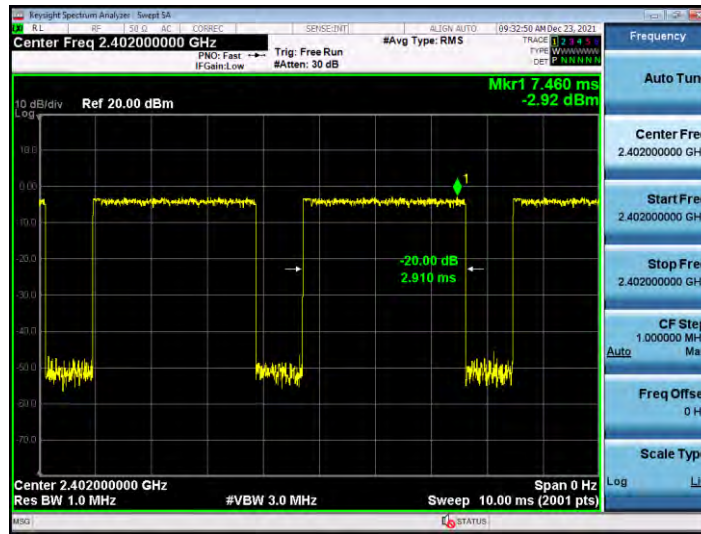


$\pi/4$ -DQPSK 2DH5 2441MHZ

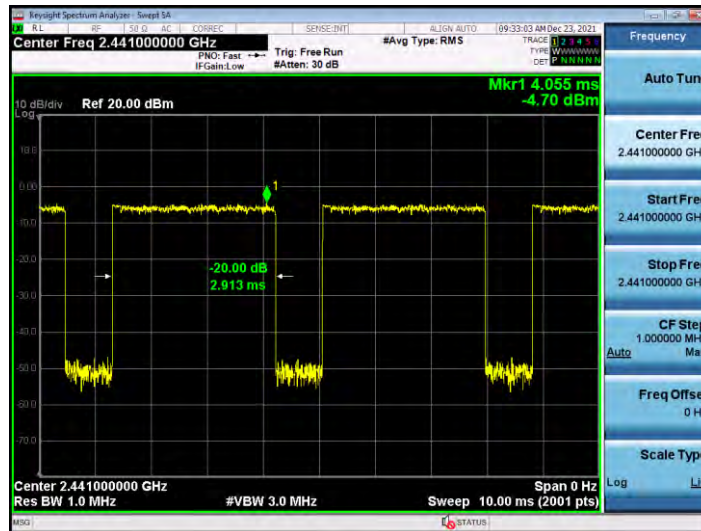


$\pi/4$ -DQPSK 2DH5 2480MHZ

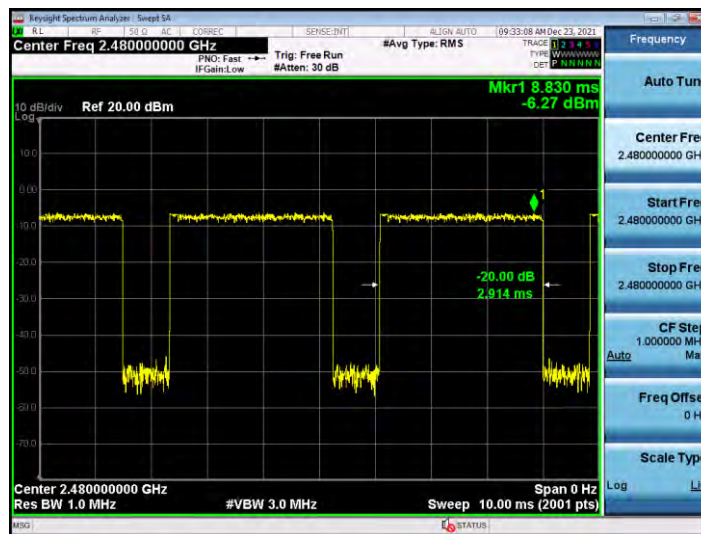


8-DPSK 3DH1 2402MHZ

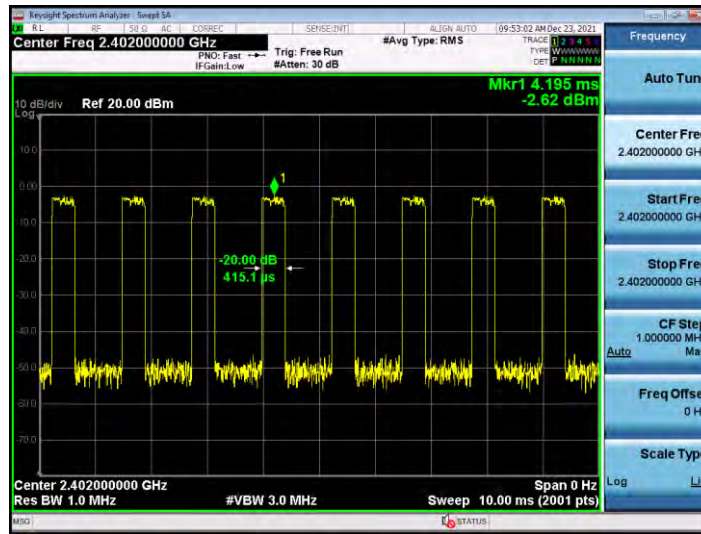


8-DPSK 3DH1 2441MHZ

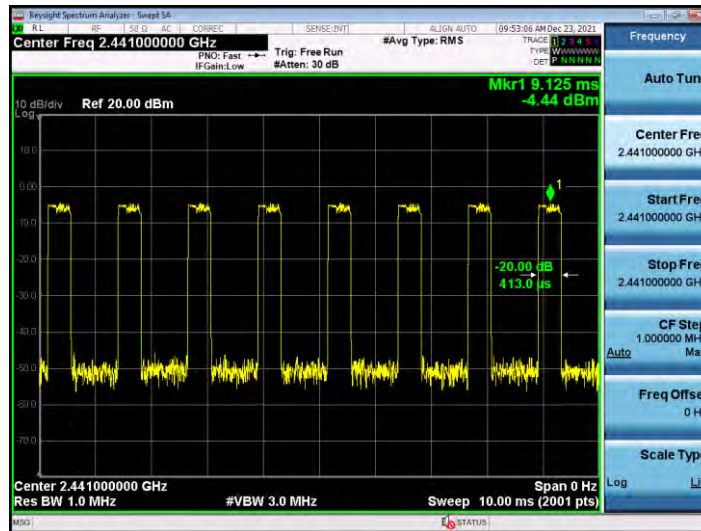


8-DPSK 3DH1 2480MHZ

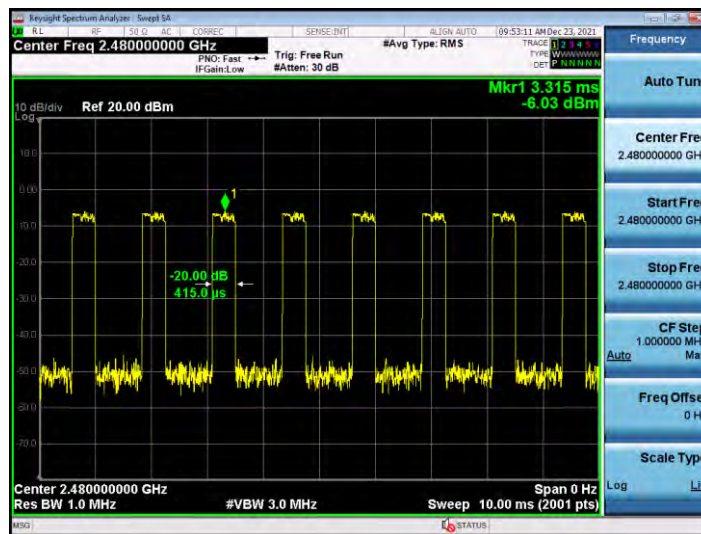


8-DPSK 3DH3 2402MHZ

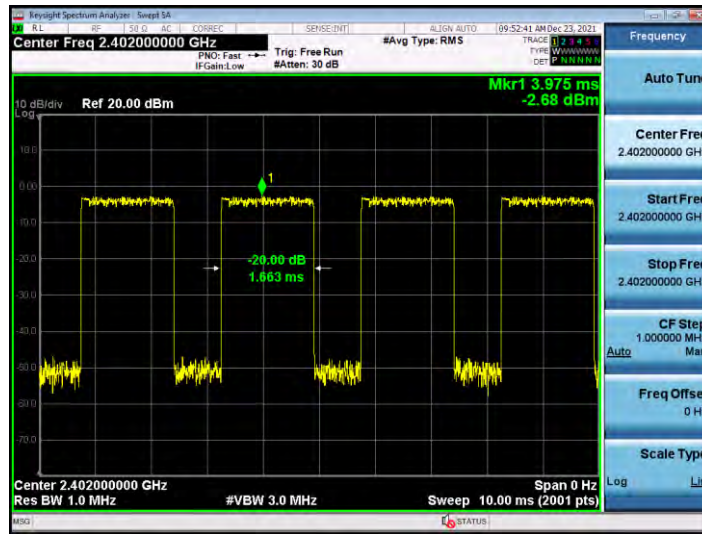


8-DPSK 3DH3 2441MHZ

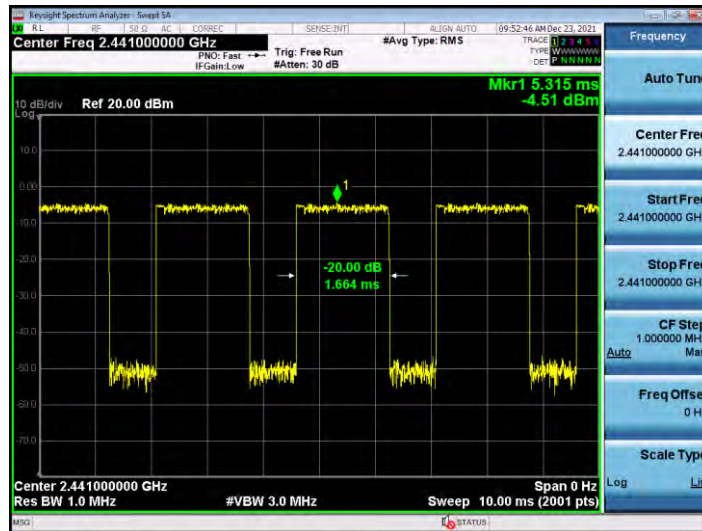


8-DPSK 3DH3 2480MHZ

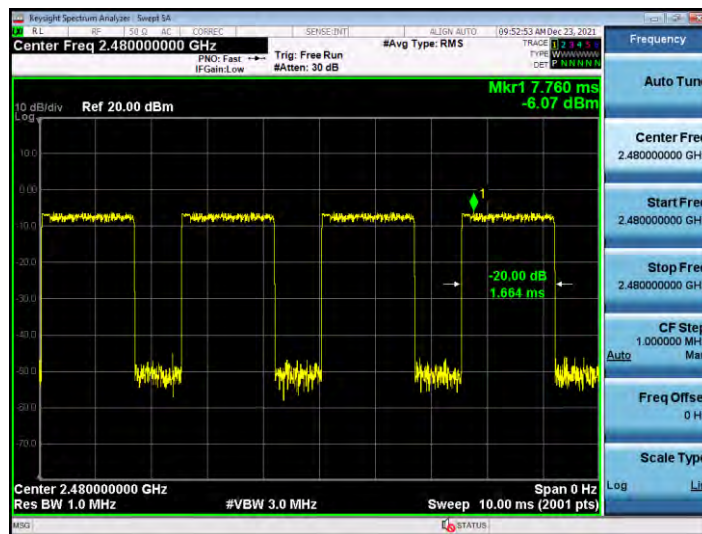


8-DPSK 3DH5 2402MHZ

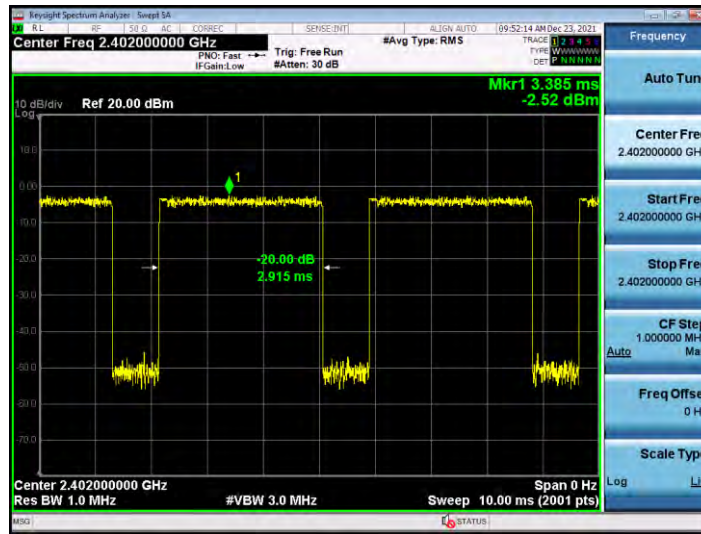


8-DPSK 3DH5 2441MHZ

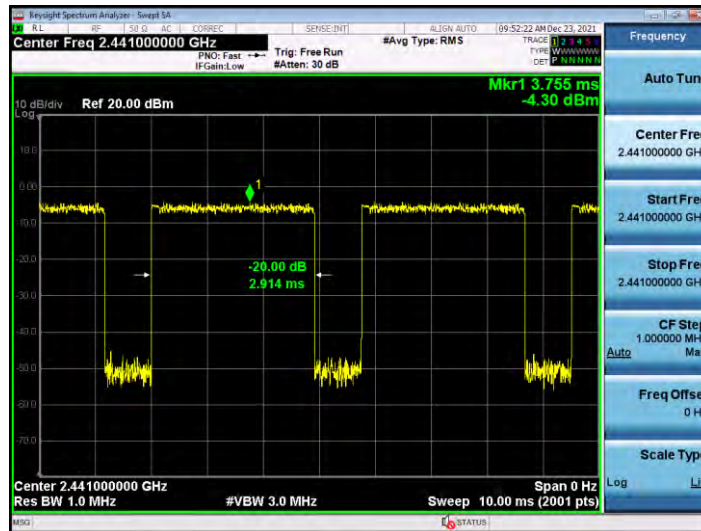


8-DPSK 3DH5 2480MHZ

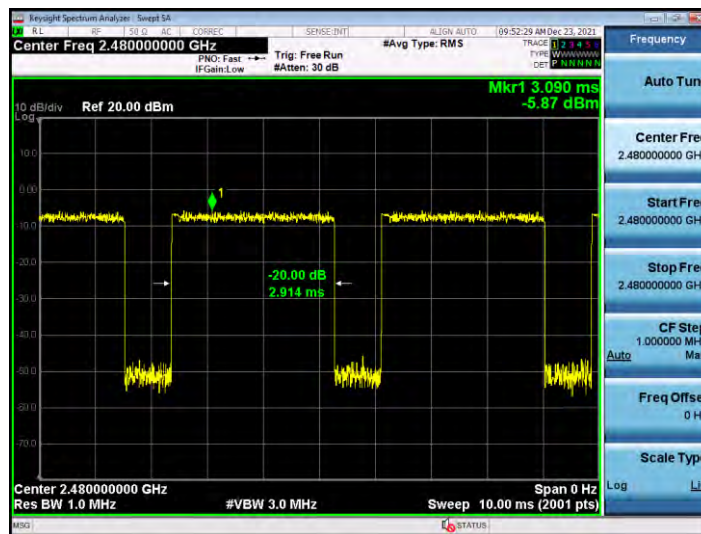


12. Antenna Requirement

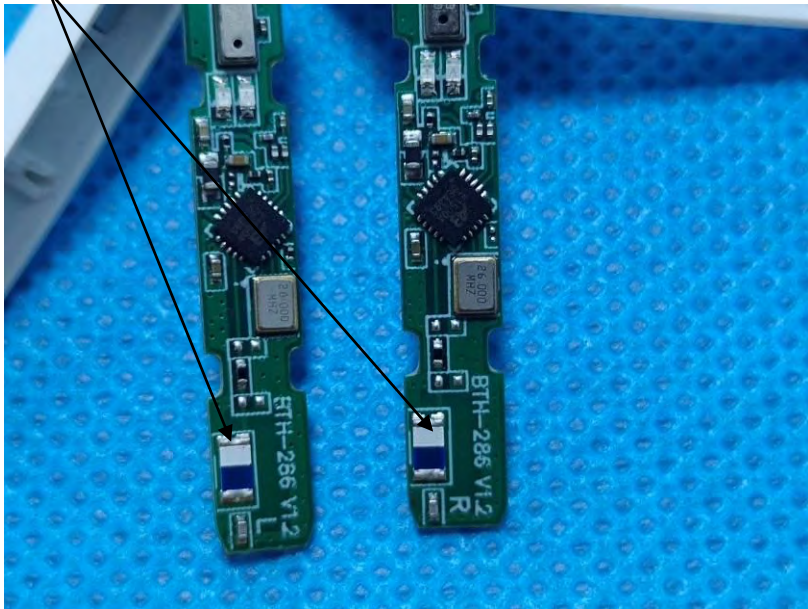Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
EUT Antenna:	
<p>The antenna is Ceramic antenna, the best case gain of the antennas are 1dBi, reference to the below photo for details ANT for BT</p>	
 <p>The image shows two green printed circuit boards (PCBs) lying on a blue textured surface. Each board has a small, square, light-colored ceramic antenna component mounted on it. The board on the left is labeled 'RTH-286 V1.2' and the board on the right is labeled 'BTH-286 V1.2'. Both boards feature various electronic components, including integrated circuits and surface-mount components. Two black arrows originate from the text 'ANT for BT' and point to the ceramic antenna components on each board.</p>	

13. Test Setup Photo

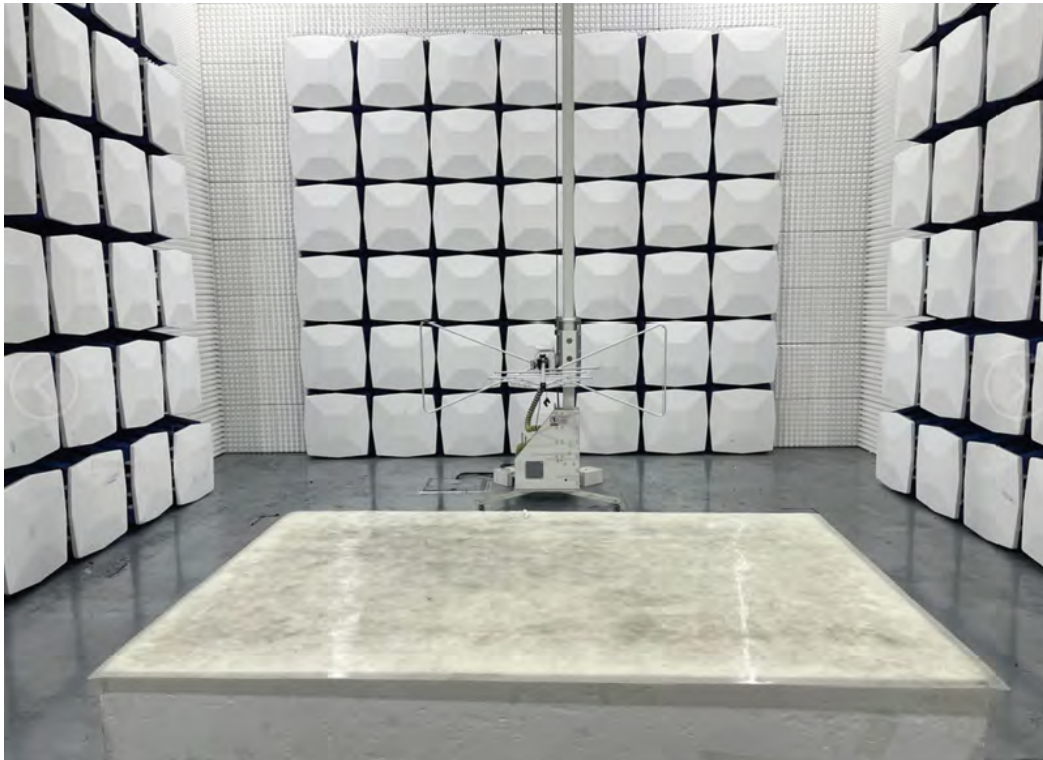

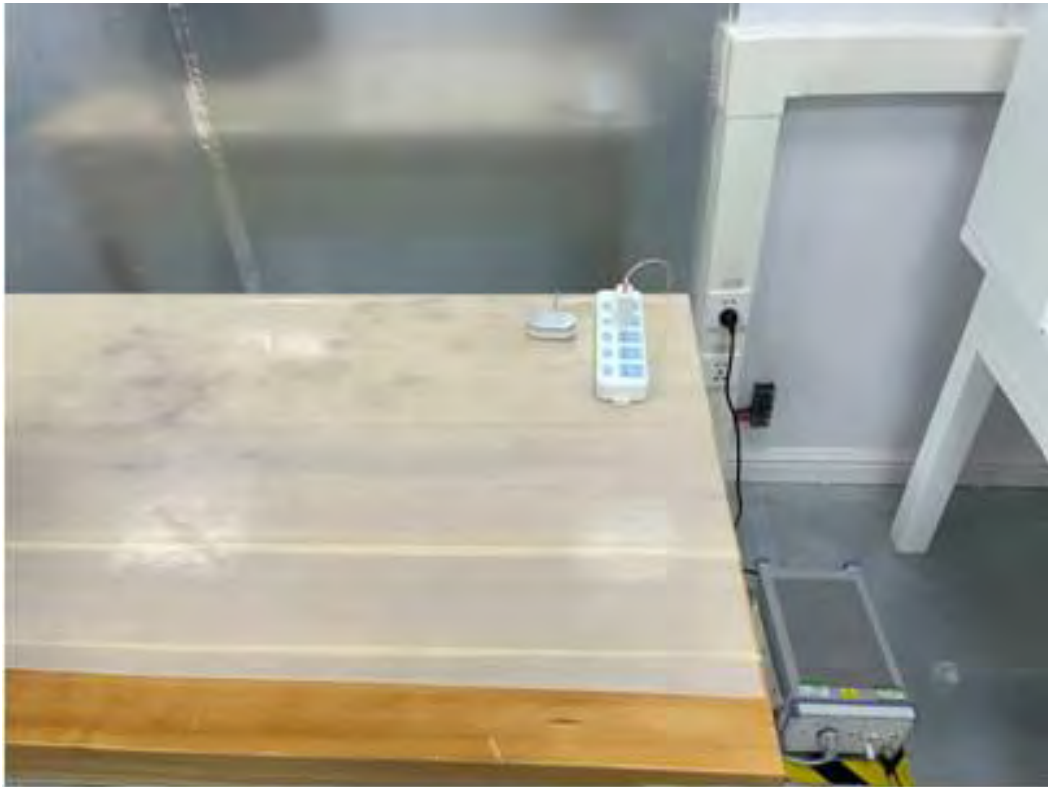

14. EUT Constructional Details

Refer to External photos and Internal photos

***** END OF REPORT *****