

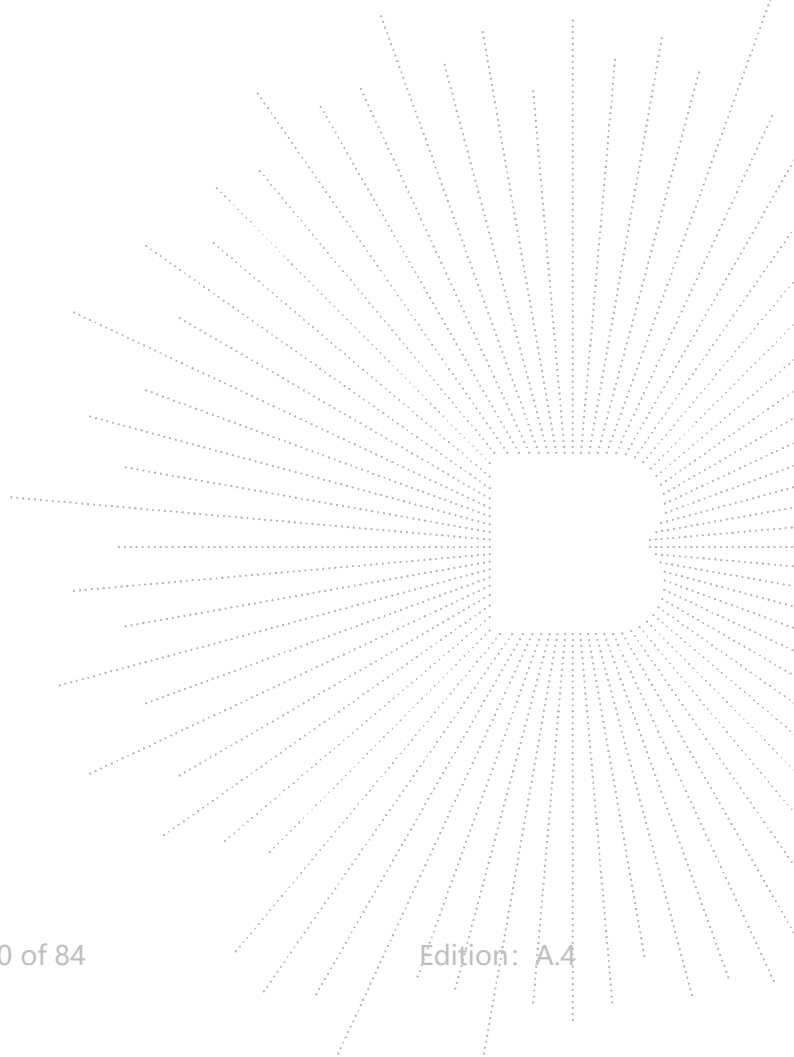




10.4 Test Result



Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 3.7V	Remark	N/A



Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.927
GFSK	Middle	0.938
GFSK	High	0.93
$\pi/4$ DQPSK	Low	1.269
$\pi/4$ DQPSK	Middle	1.254
$\pi/4$ DQPSK	High	1.306
8DPSK	Low	1.297
8DPSK	Middle	1.277
8DPSK	High	1.3


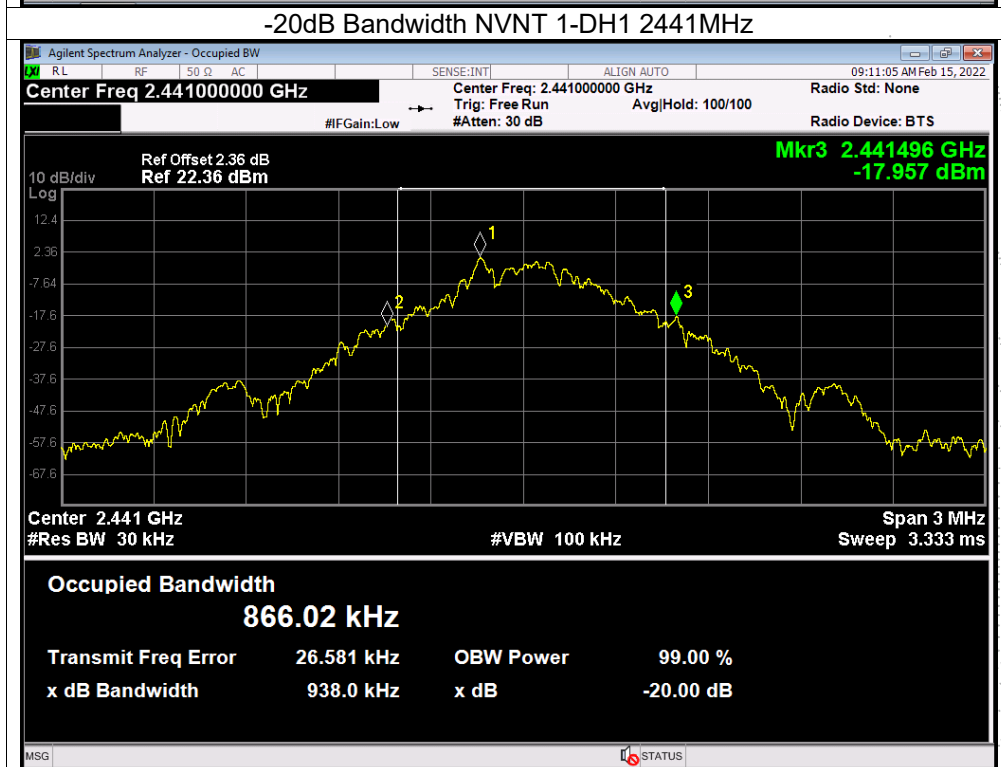


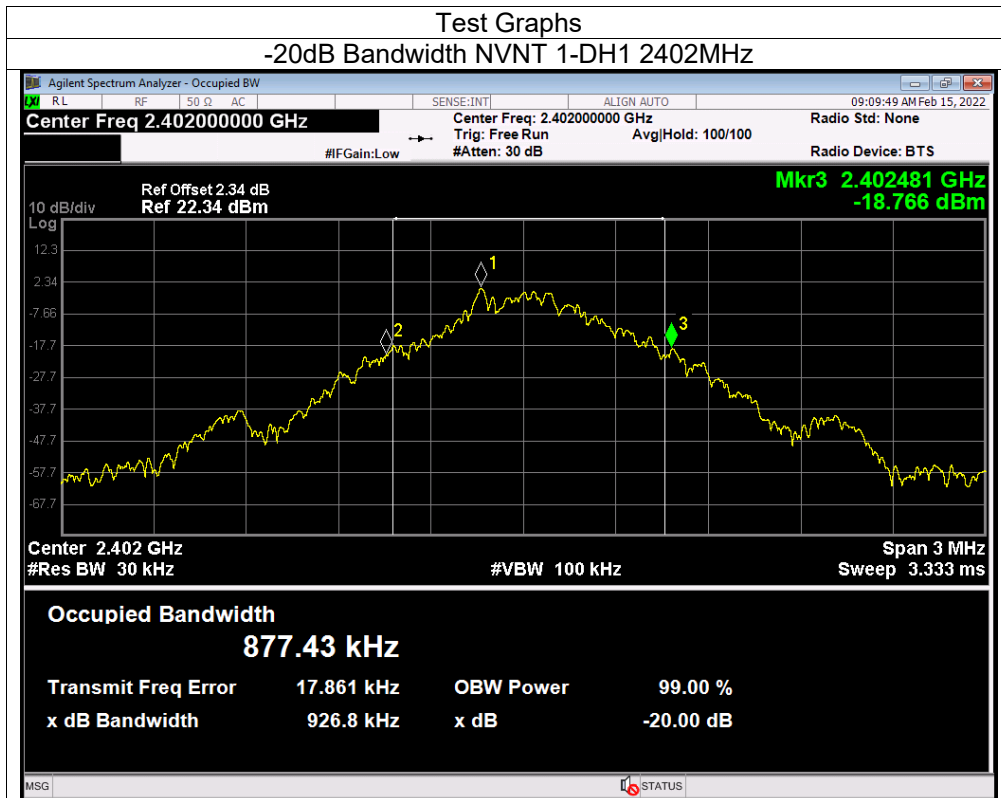

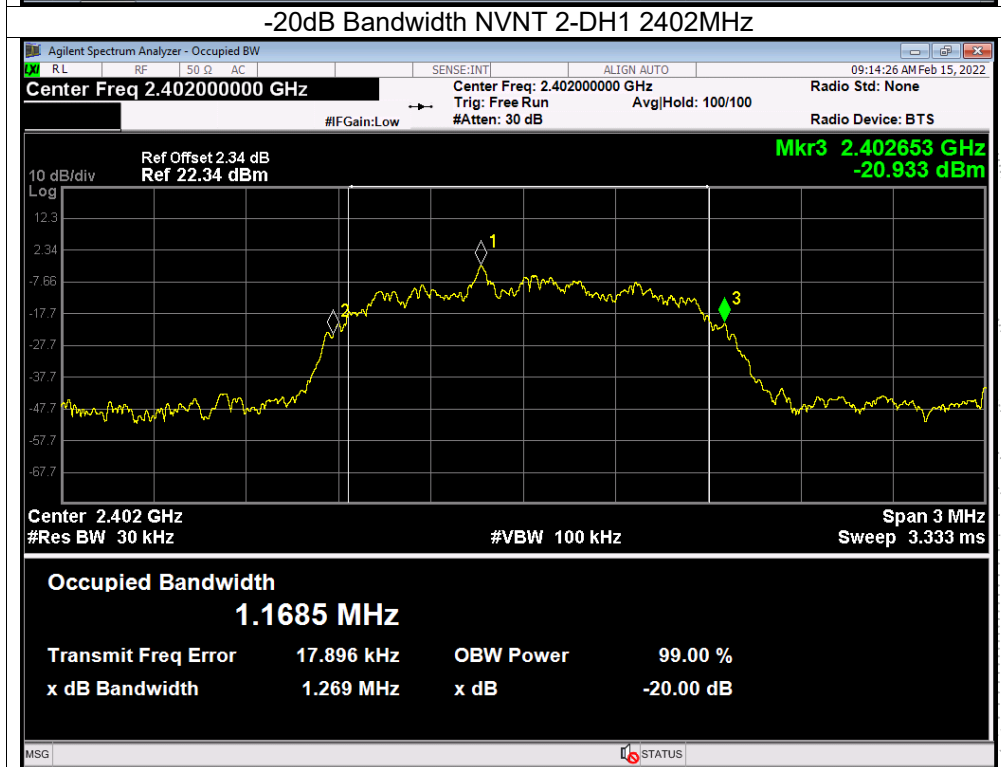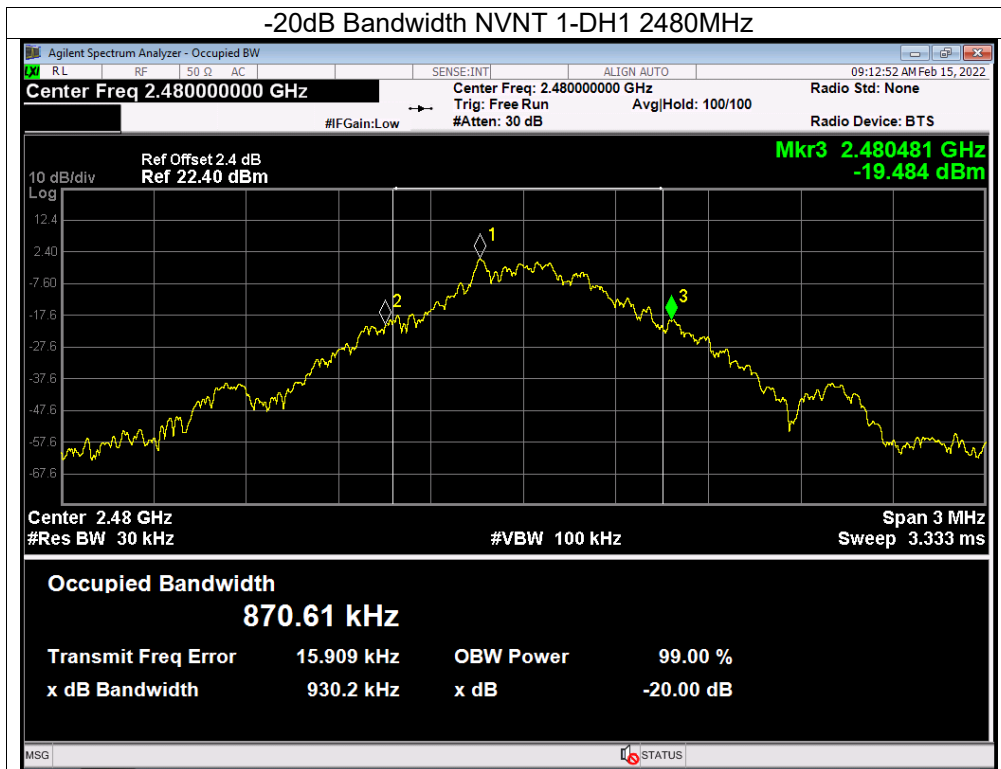

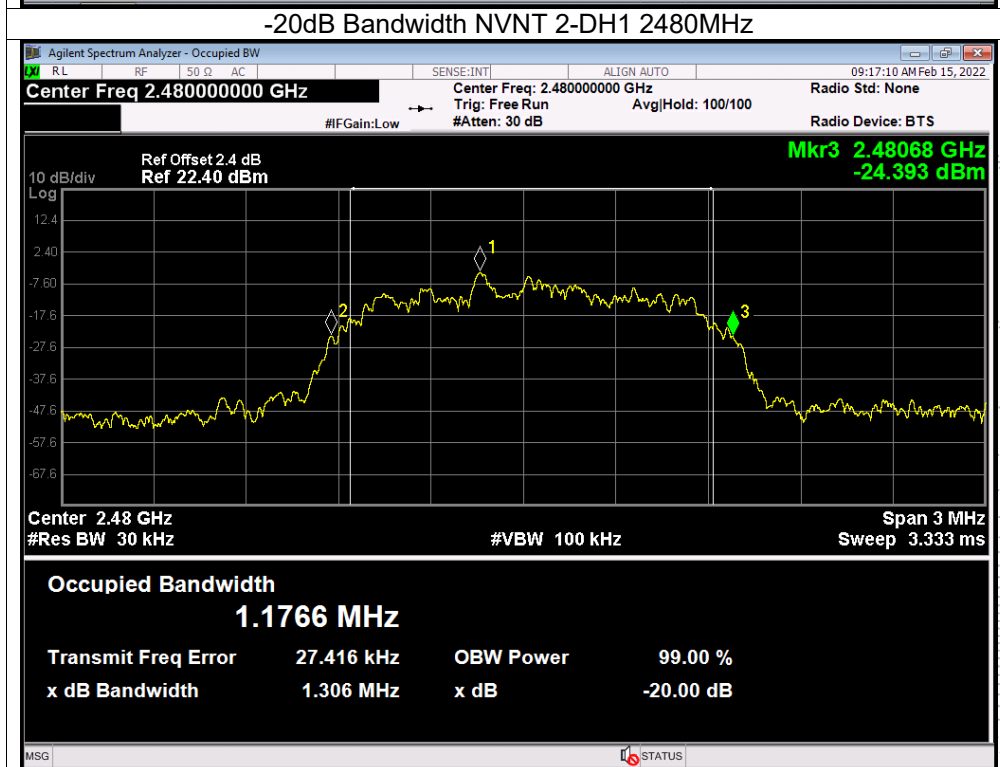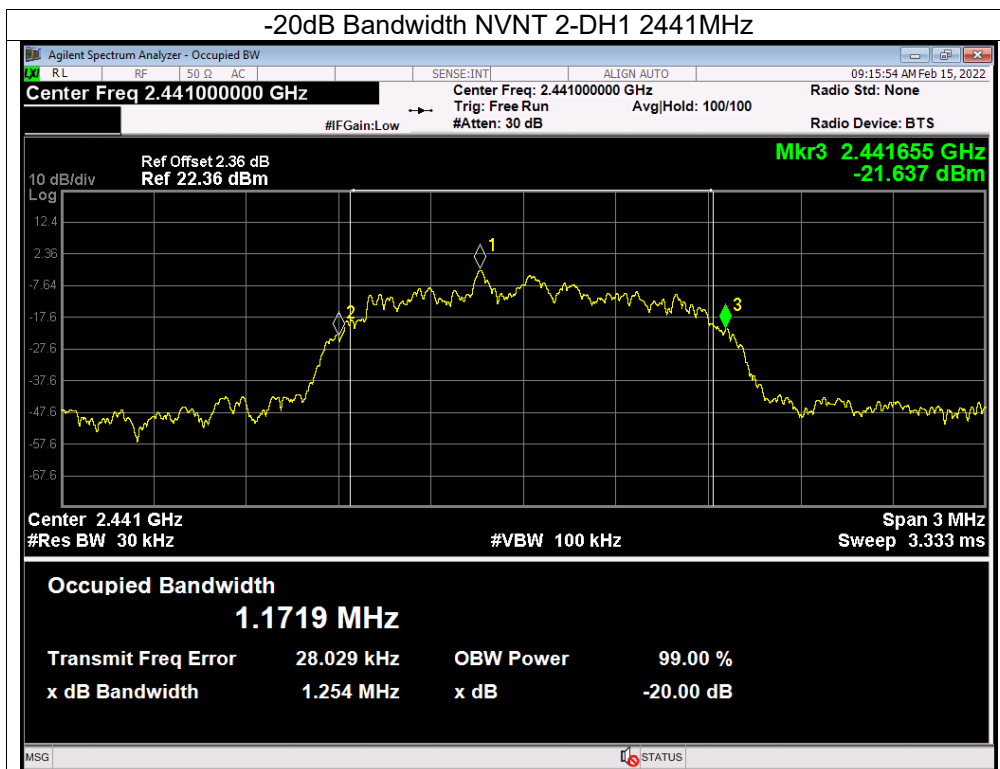

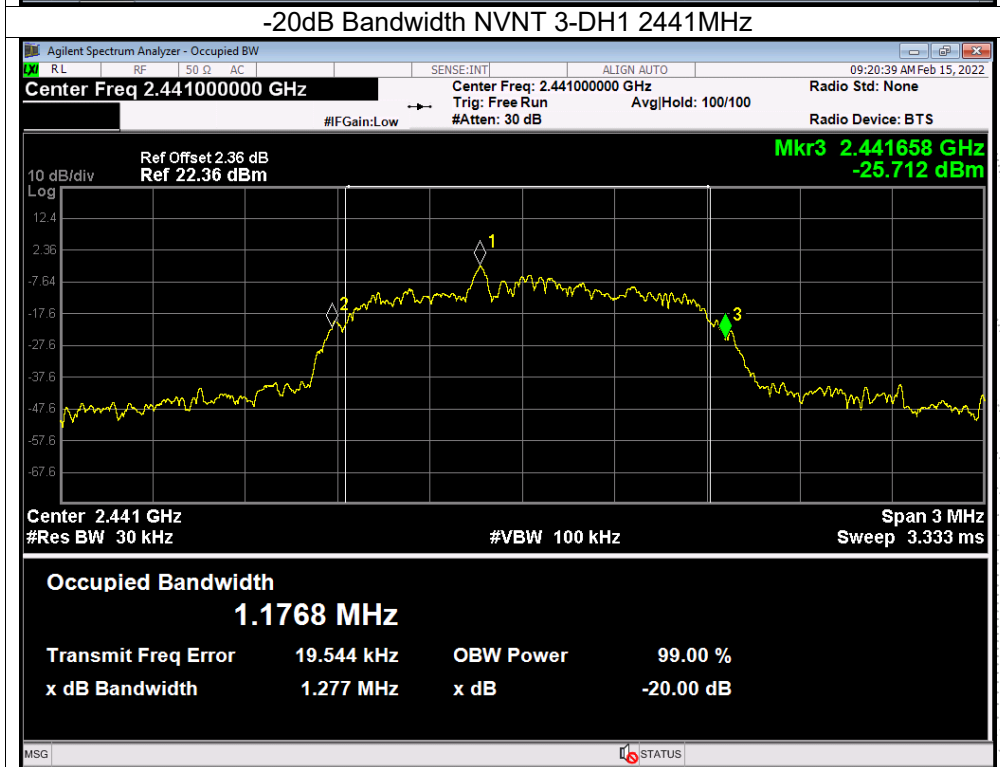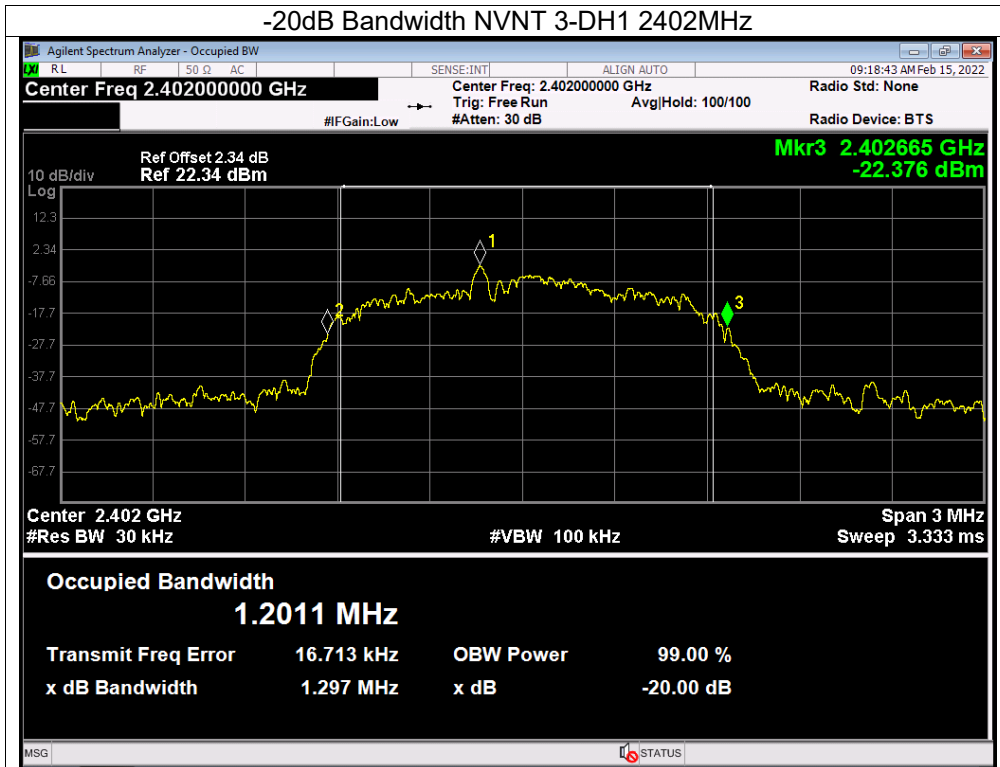

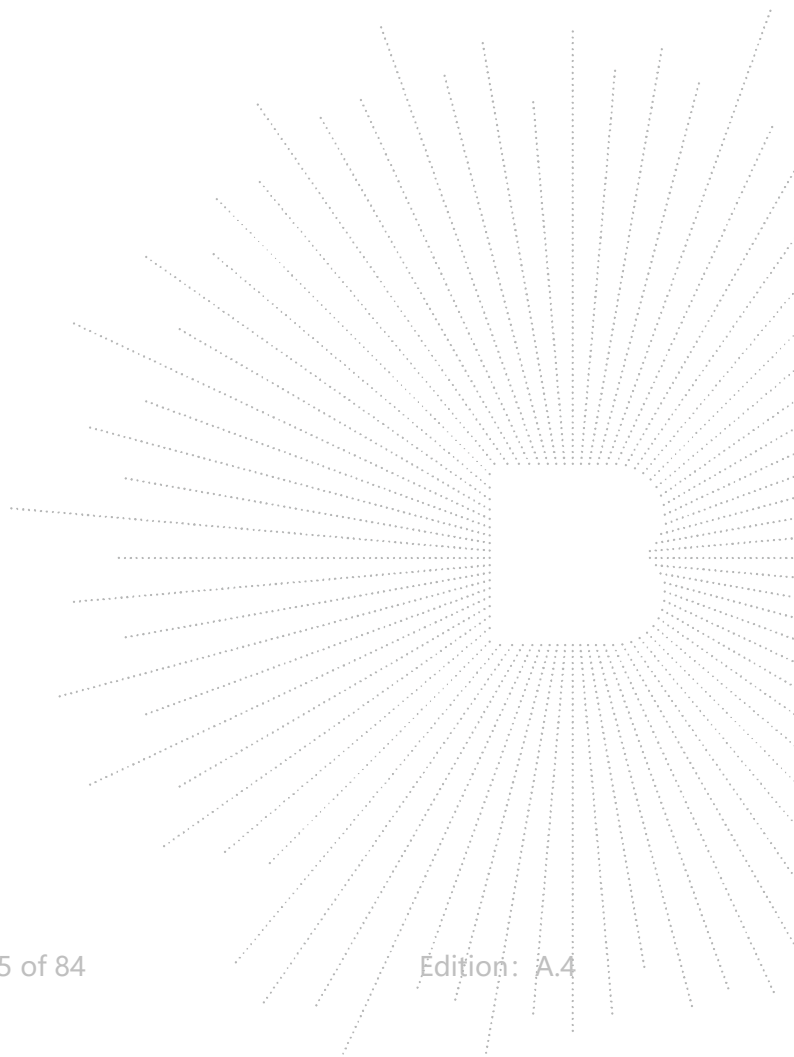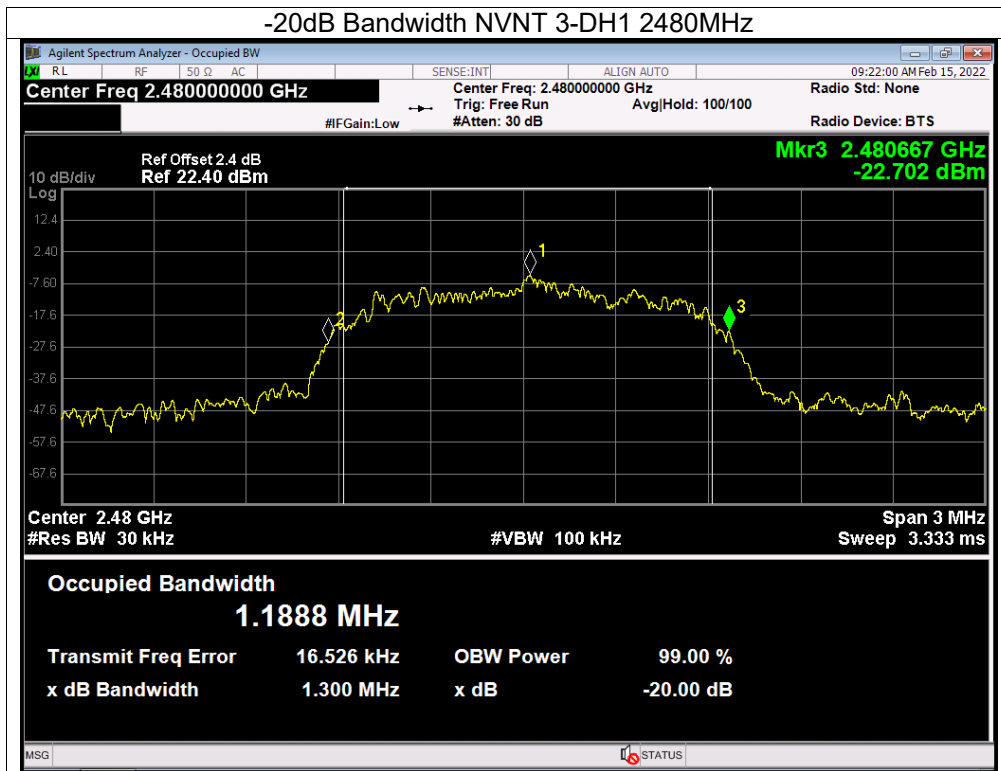

11. Maximum Peak Output Power

11.1 Block Diagram Of Test Setup




11.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt	2400-2483.5	PASS

11.3 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

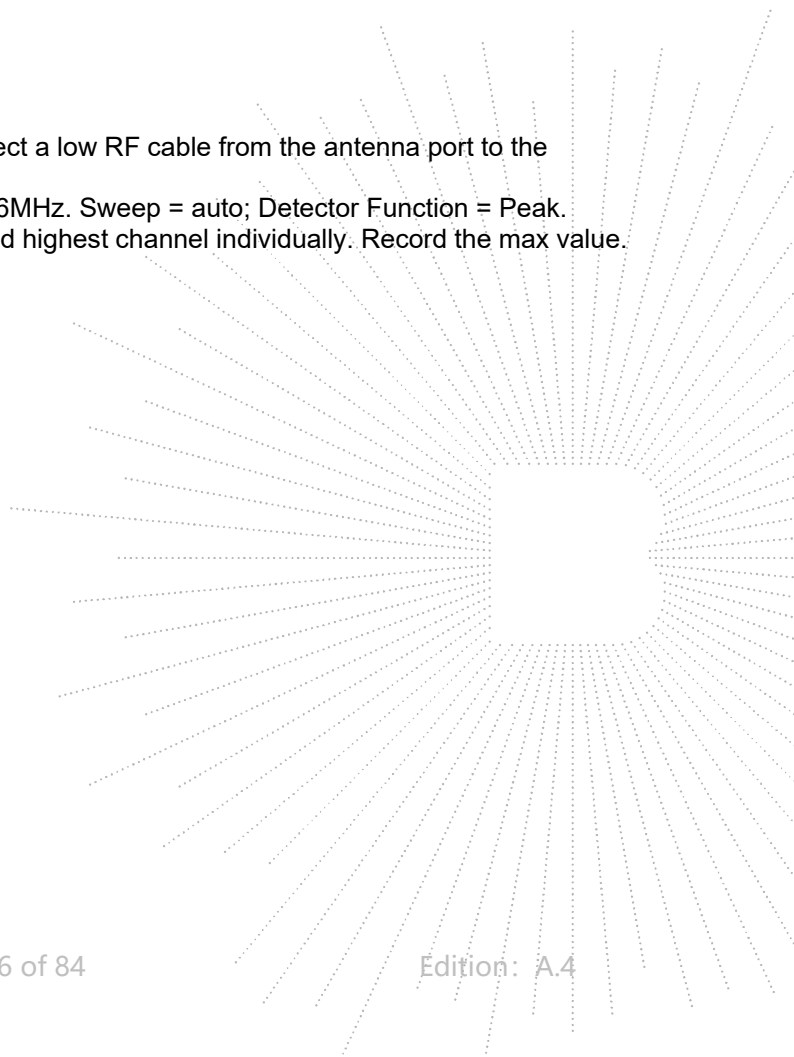




11.4 Test Result



Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	AC120V/60Hz	Remark:	N/A



Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	1.98	21
GFSK	Middle	2.09	21
GFSK	High	1.77	21
$\pi/4$ DQPSK	Low	0.95	21
$\pi/4$ DQPSK	Middle	0.89	21
$\pi/4$ DQPSK	High	0.4	21
8DPSK	Low	1.29	21
8DPSK	Middle	1.35	21
8DPSK	High	0.83	21


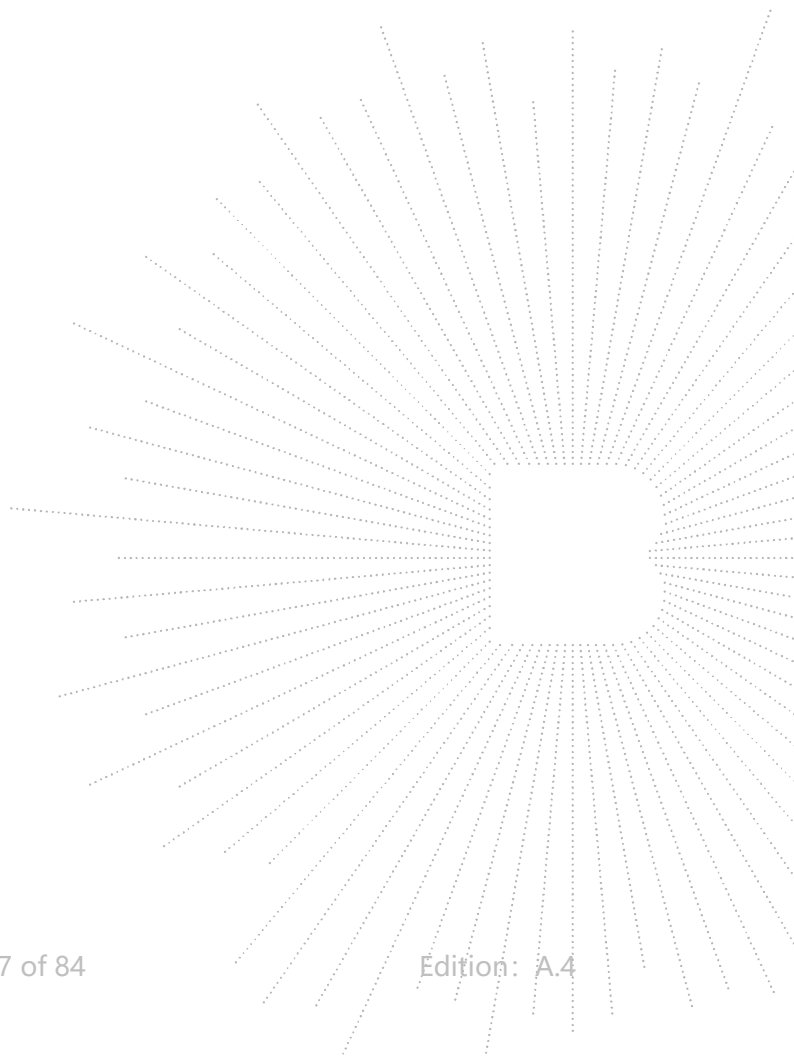


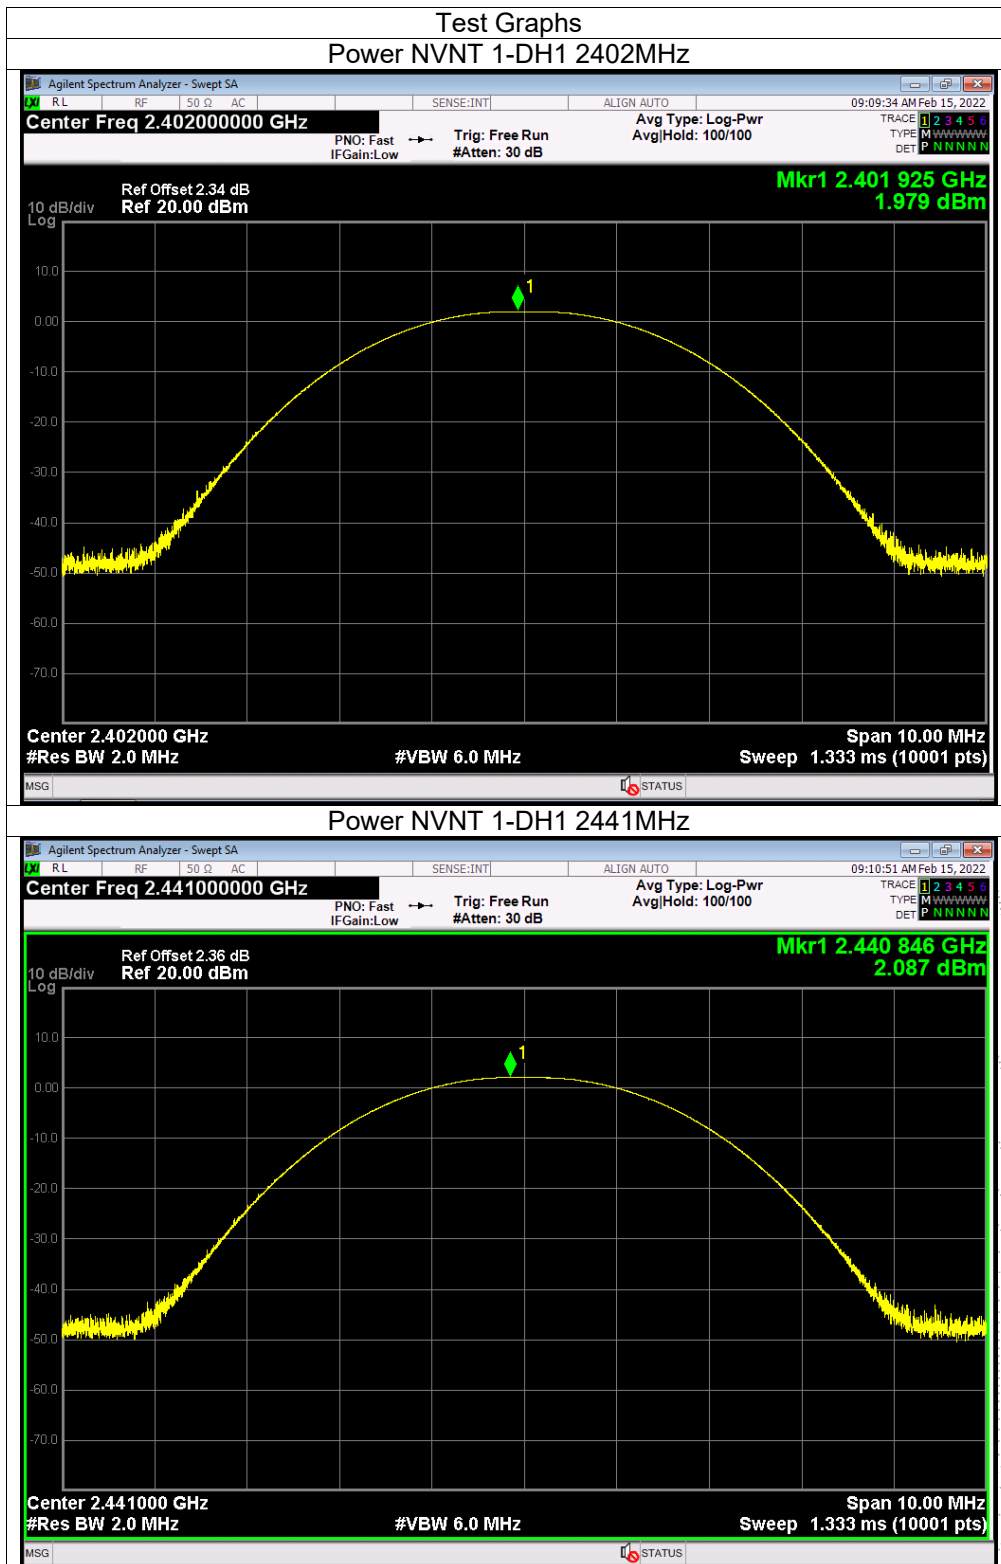

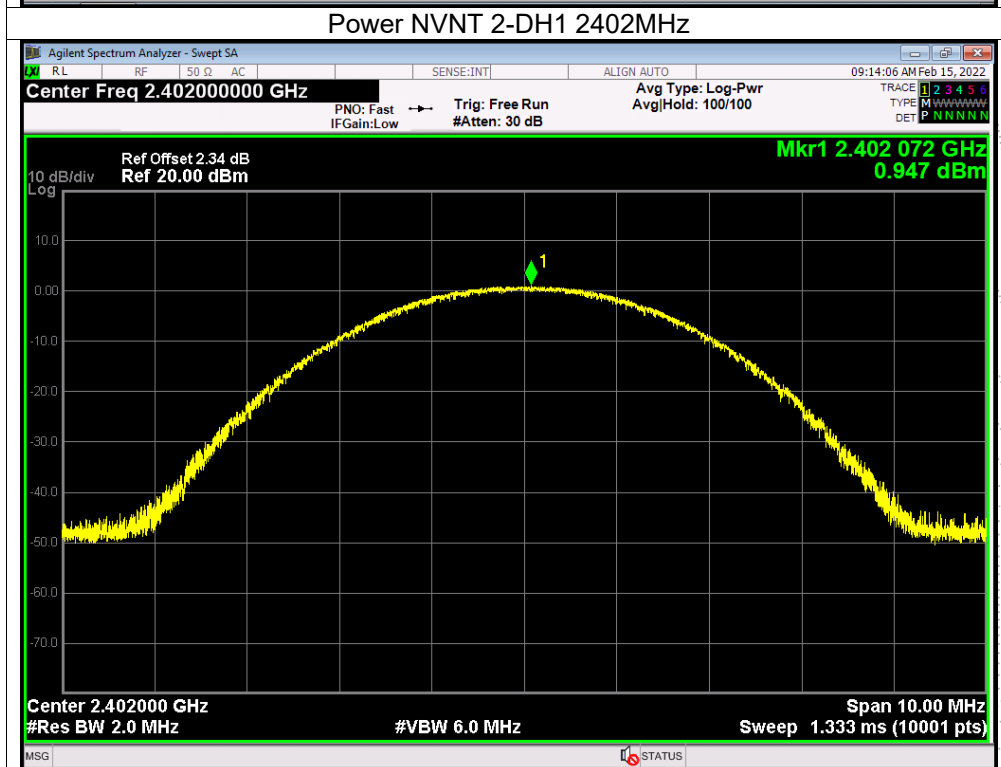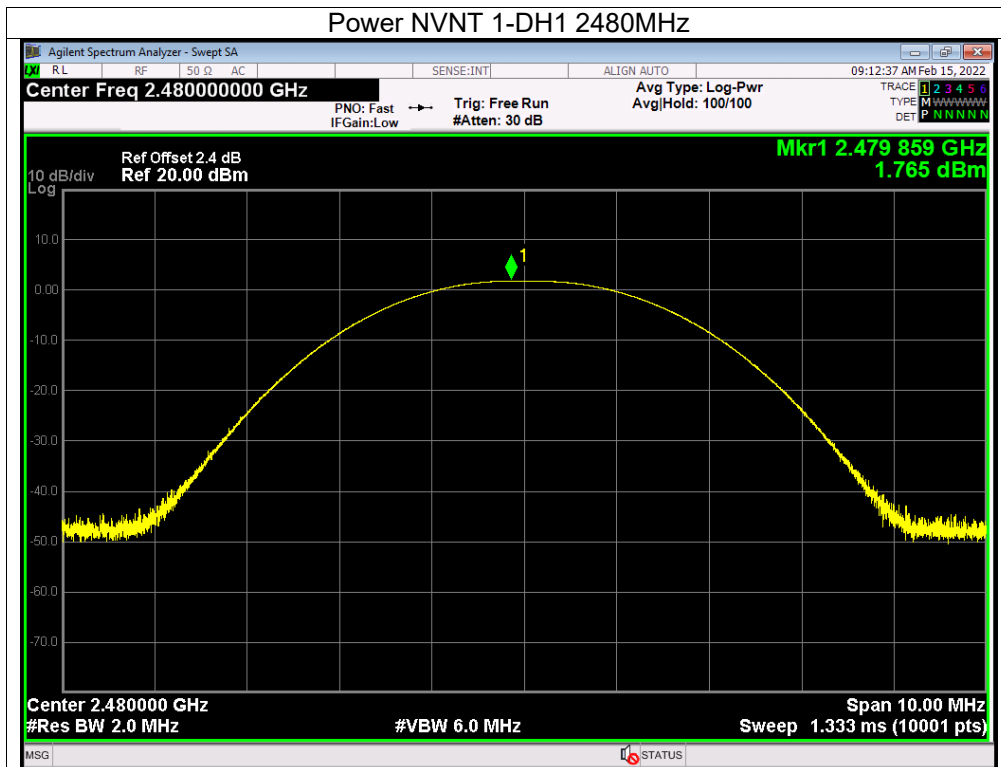

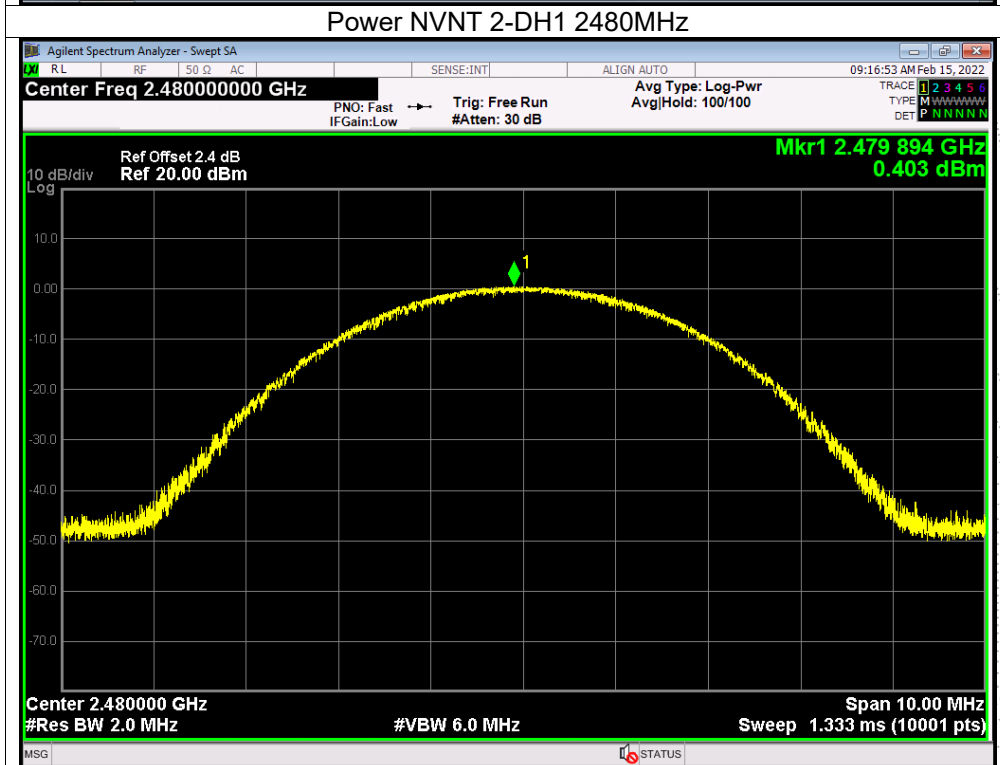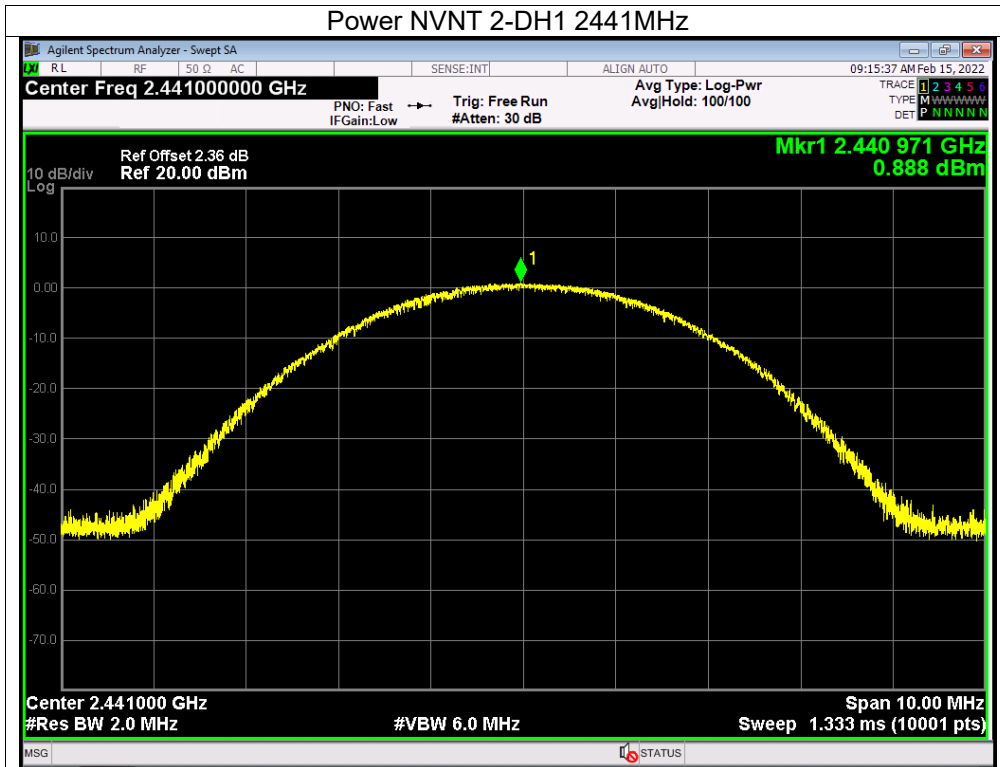

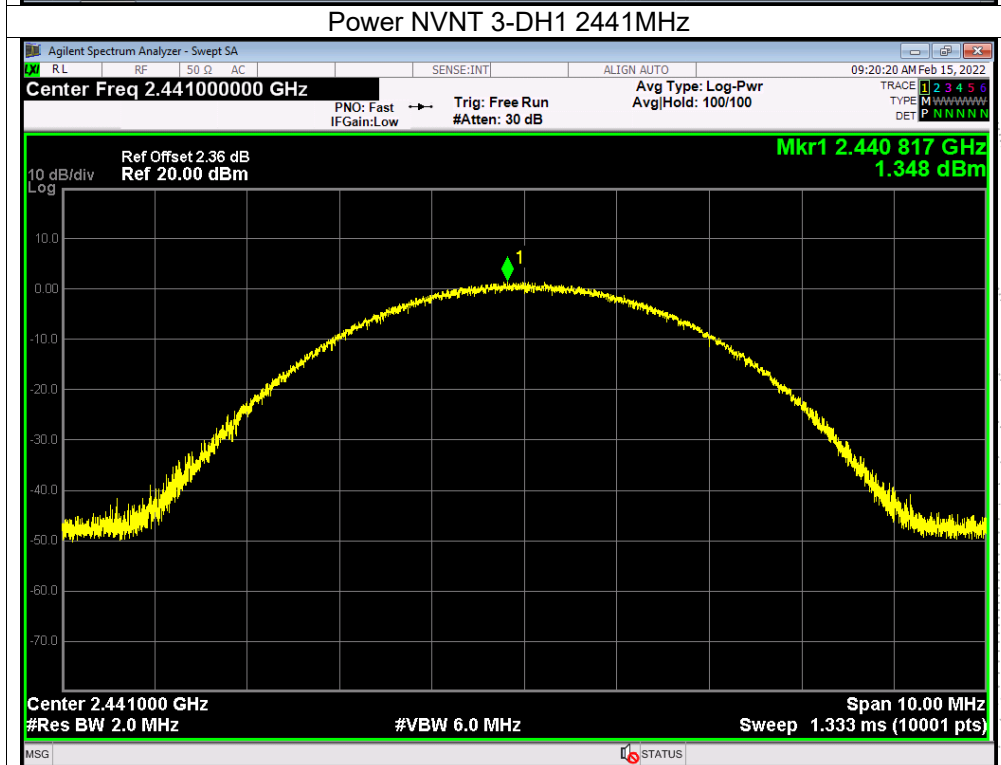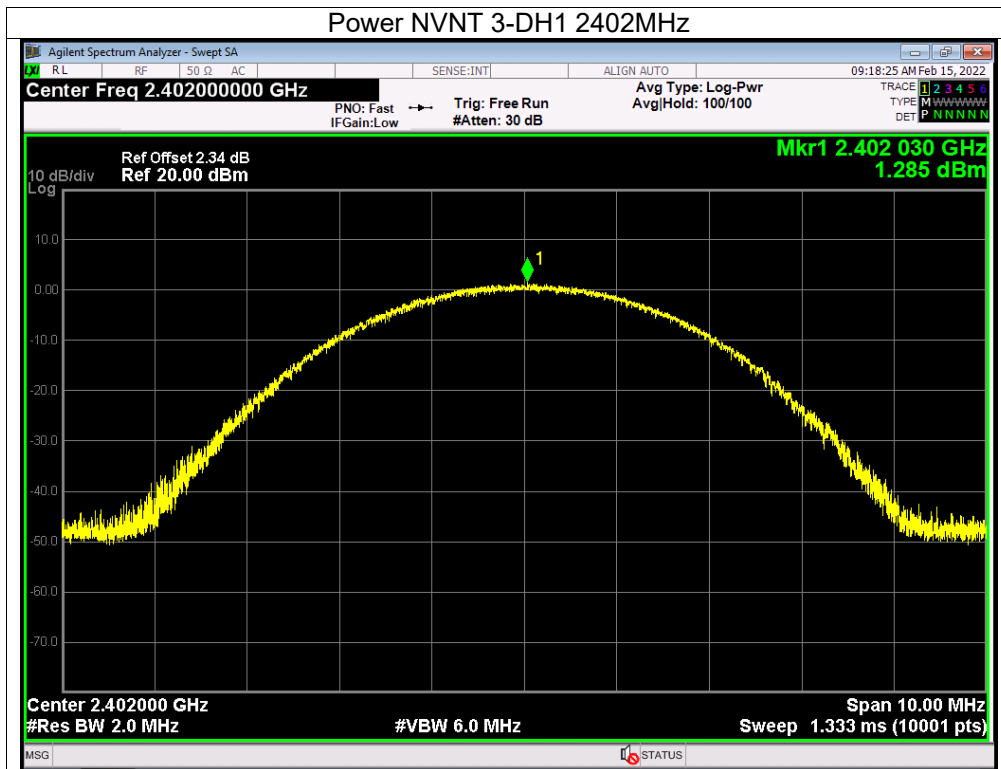

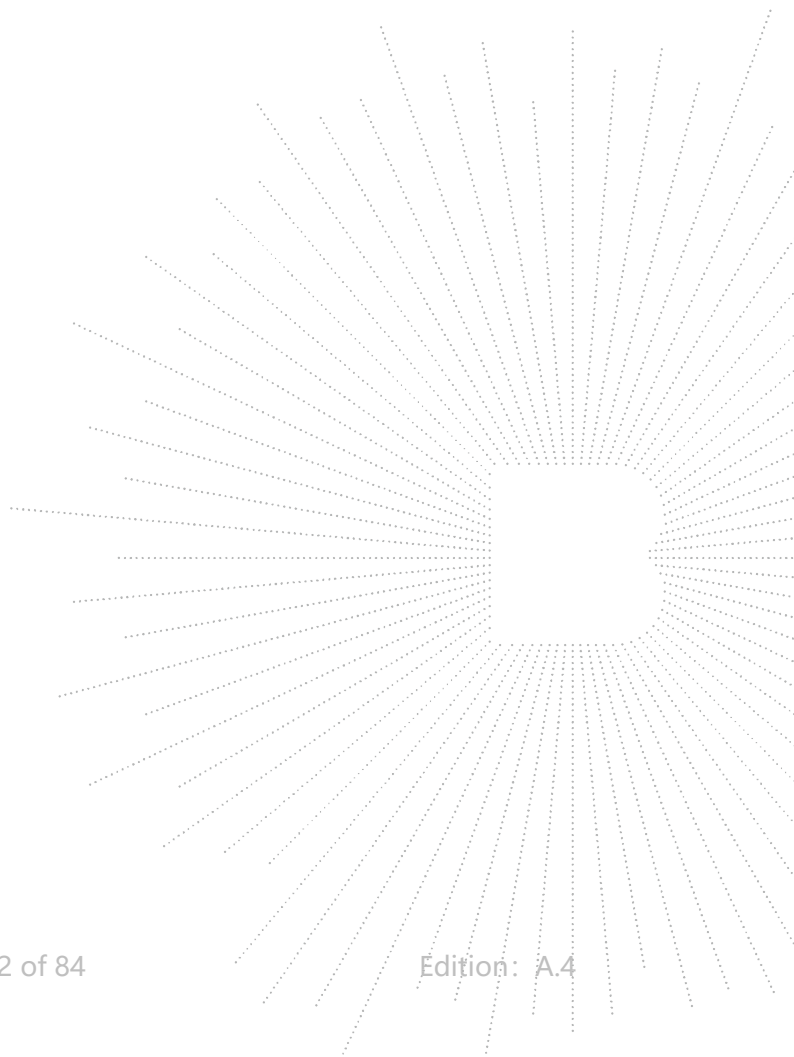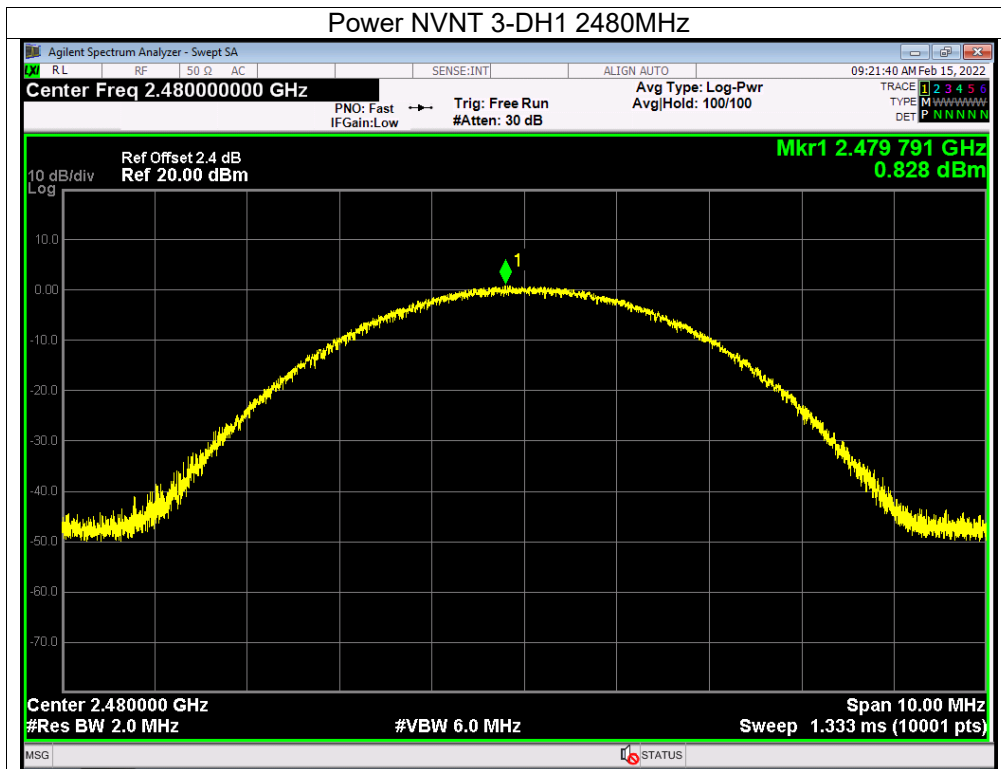

12. Hopping Channel Separation

12.1 Block Diagram Of Test Setup



12.2 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.



12.3 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



12.4 Test Result



Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	0.998	0.618	PASS
GFSK	Middle	1.004	0.625	PASS
GFSK	High	1.002	0.620	PASS
$\pi/4$ DQPSK	Low	0.998	0.846	PASS
$\pi/4$ DQPSK	Middle	1.008	0.836	PASS
$\pi/4$ DQPSK	High	1.000	0.871	PASS
8DPSK	Low	1.006	0.865	PASS
8DPSK	Middle	1.01	0.851	PASS
8DPSK	High	1.000	0.867	PASS


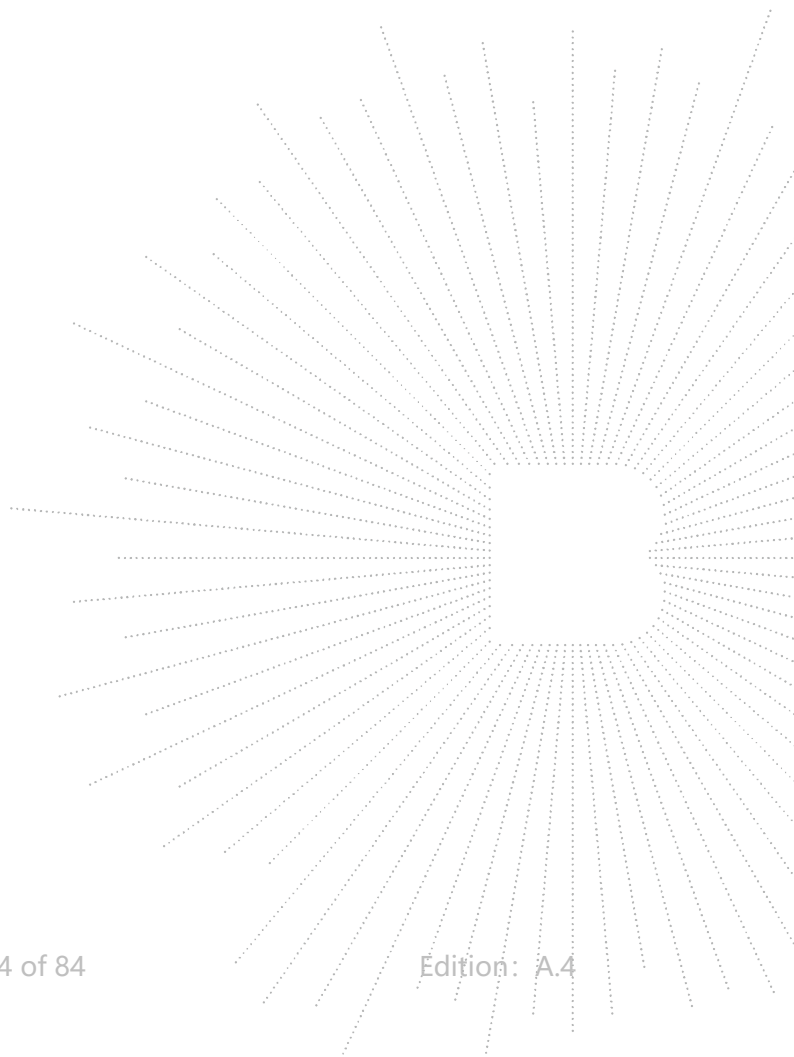


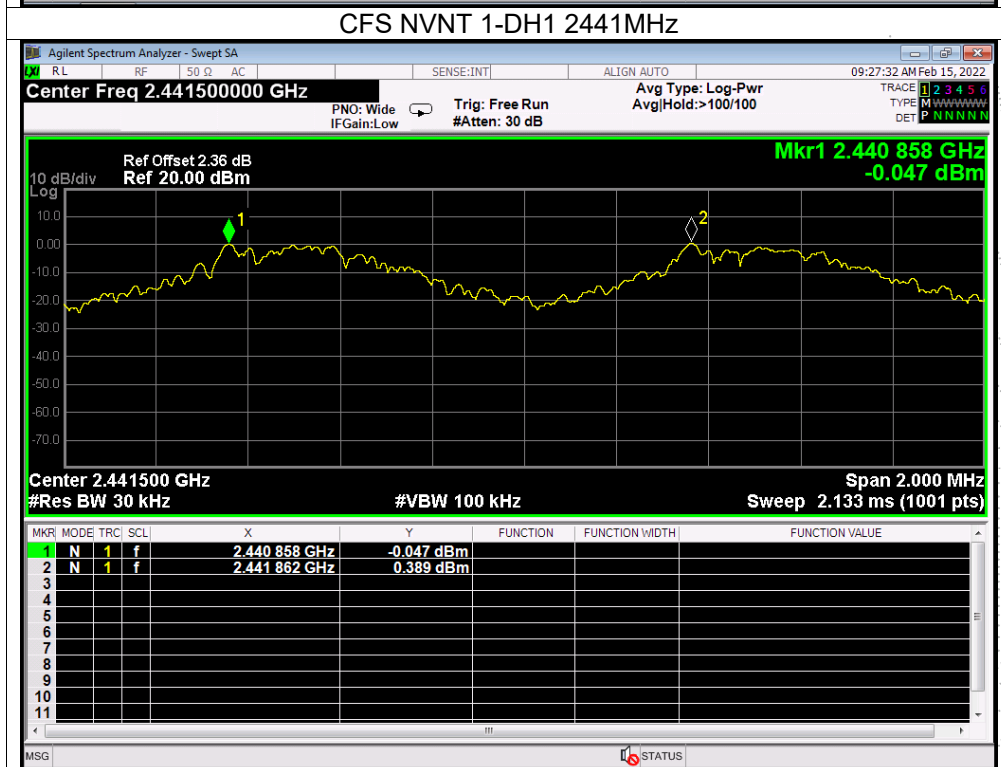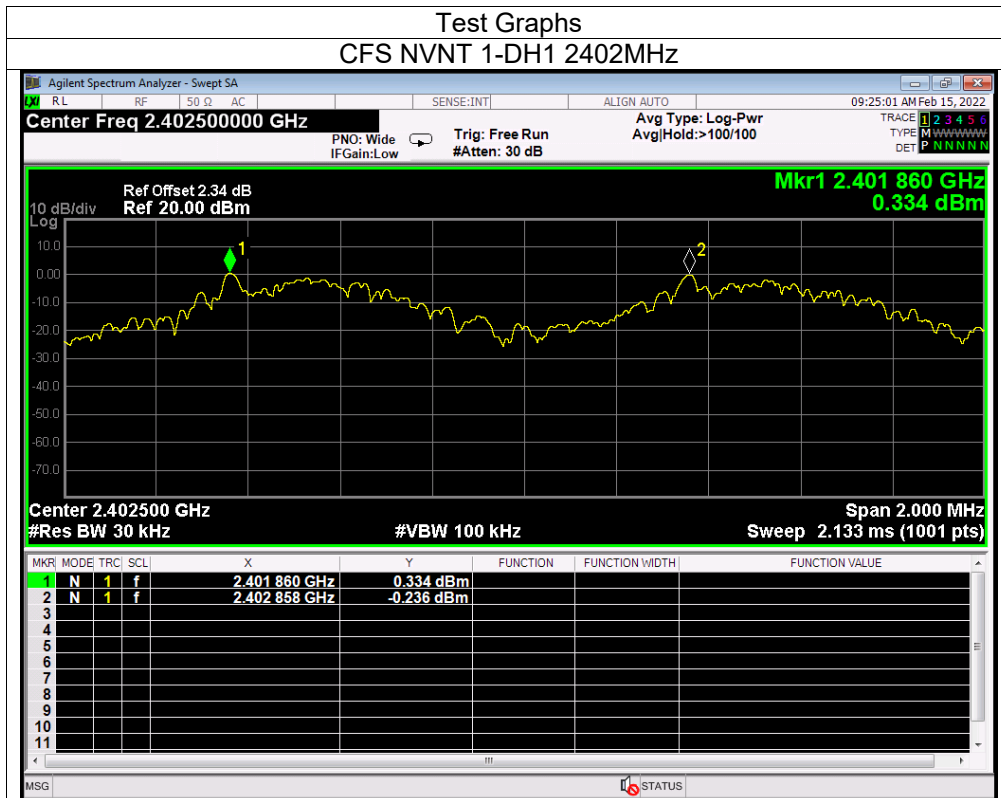

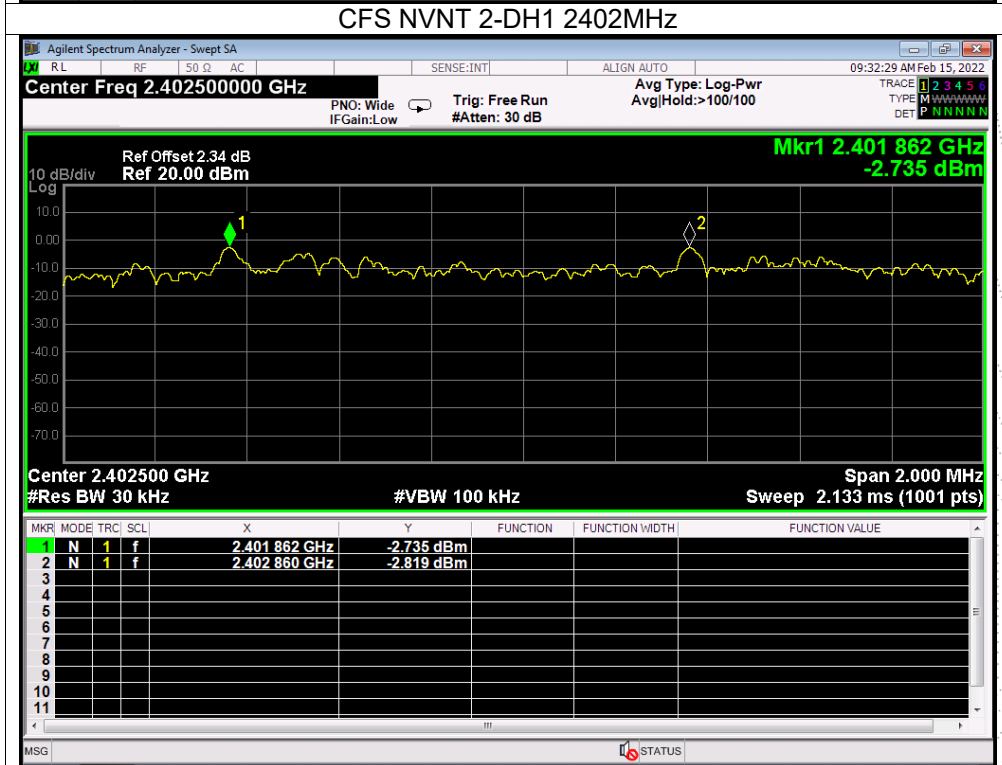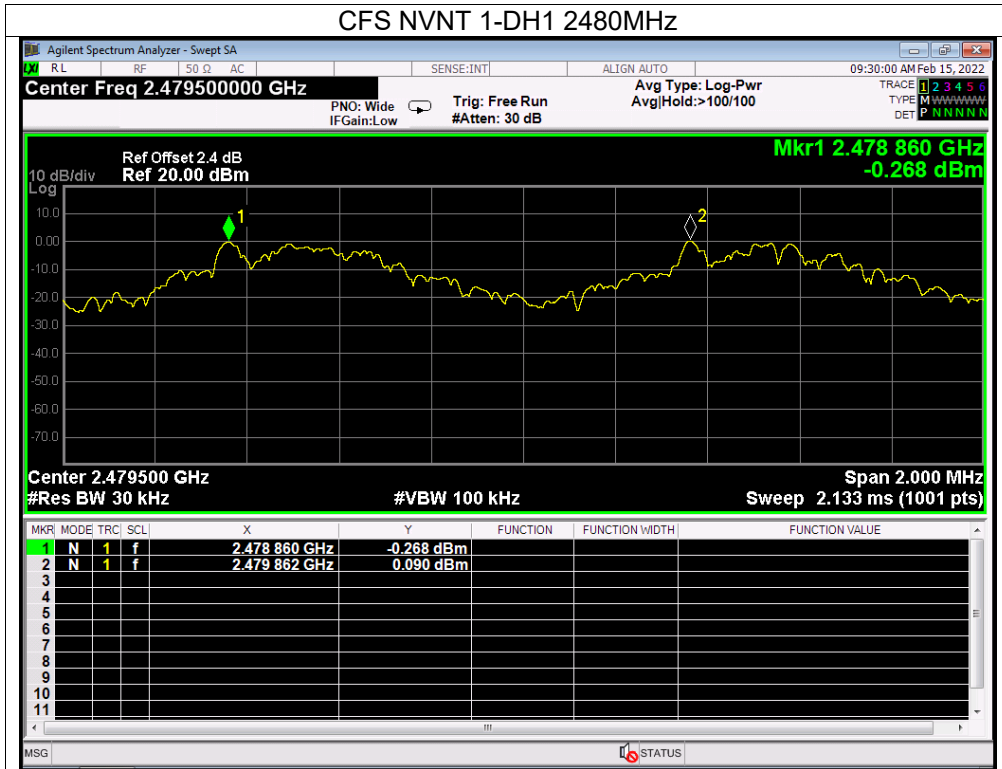

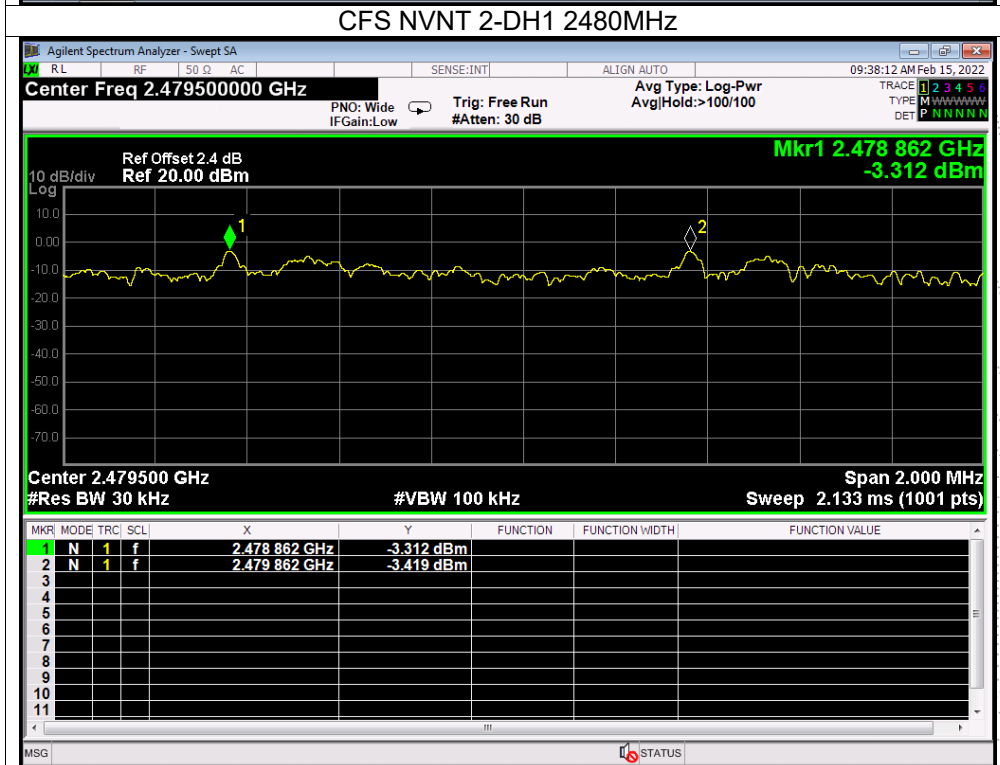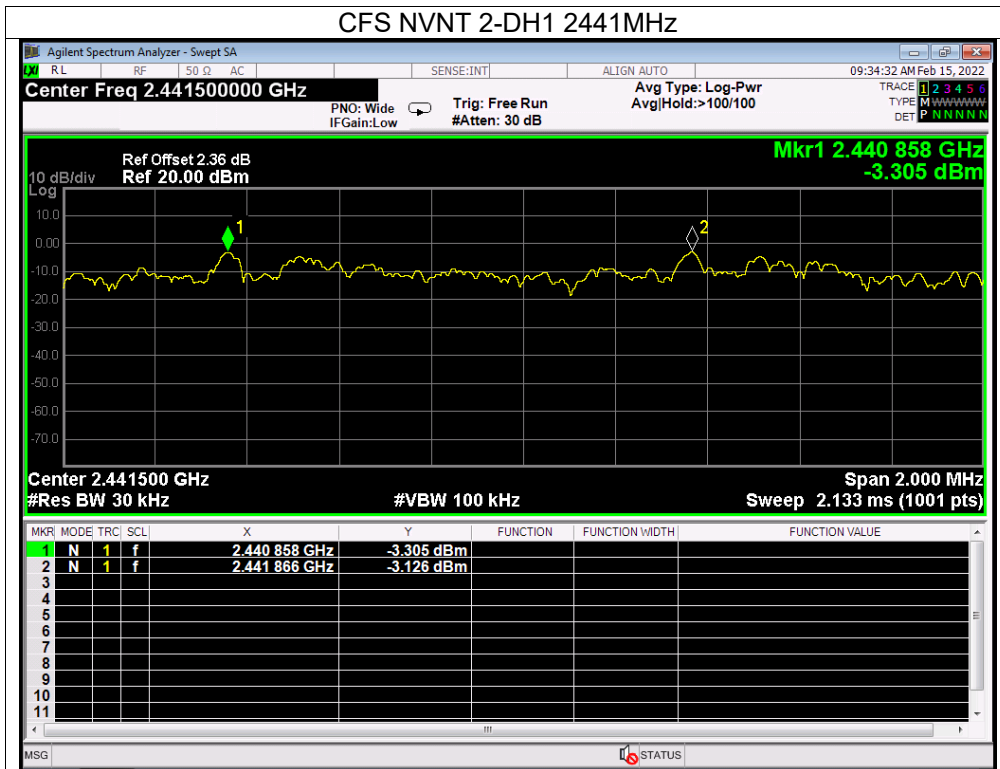

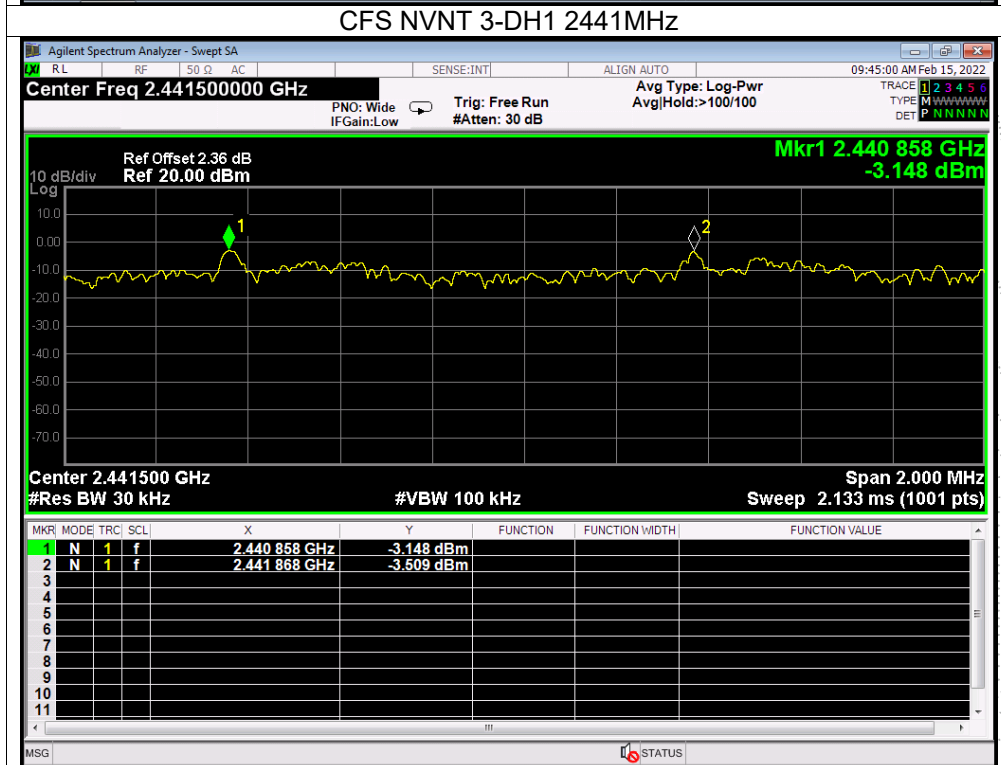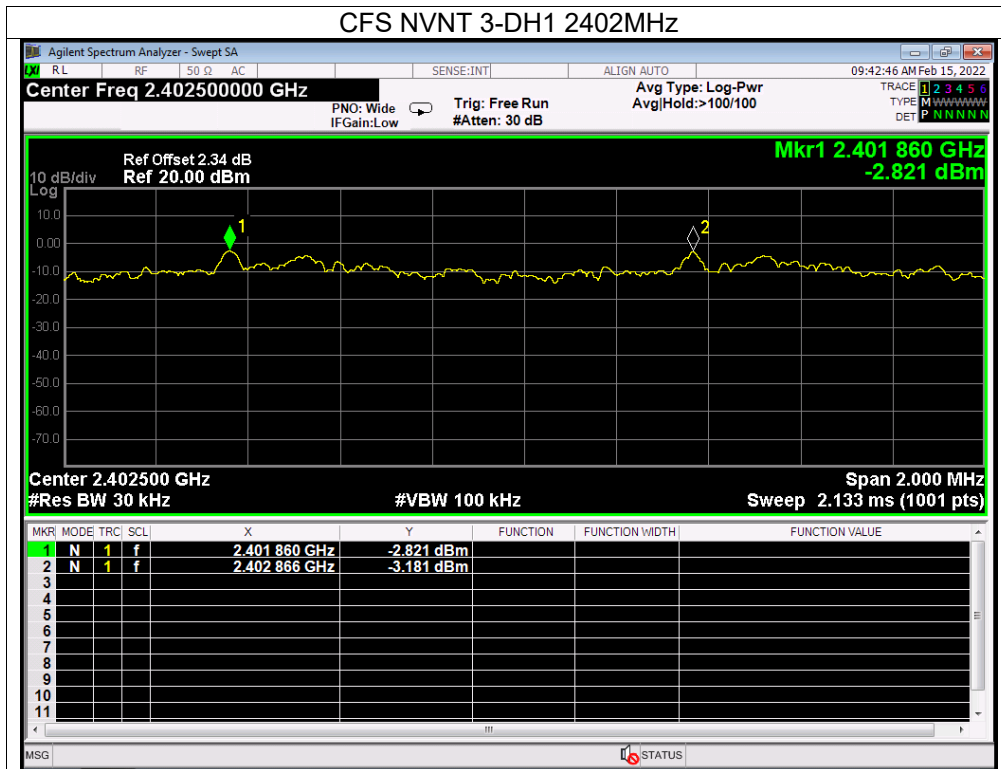

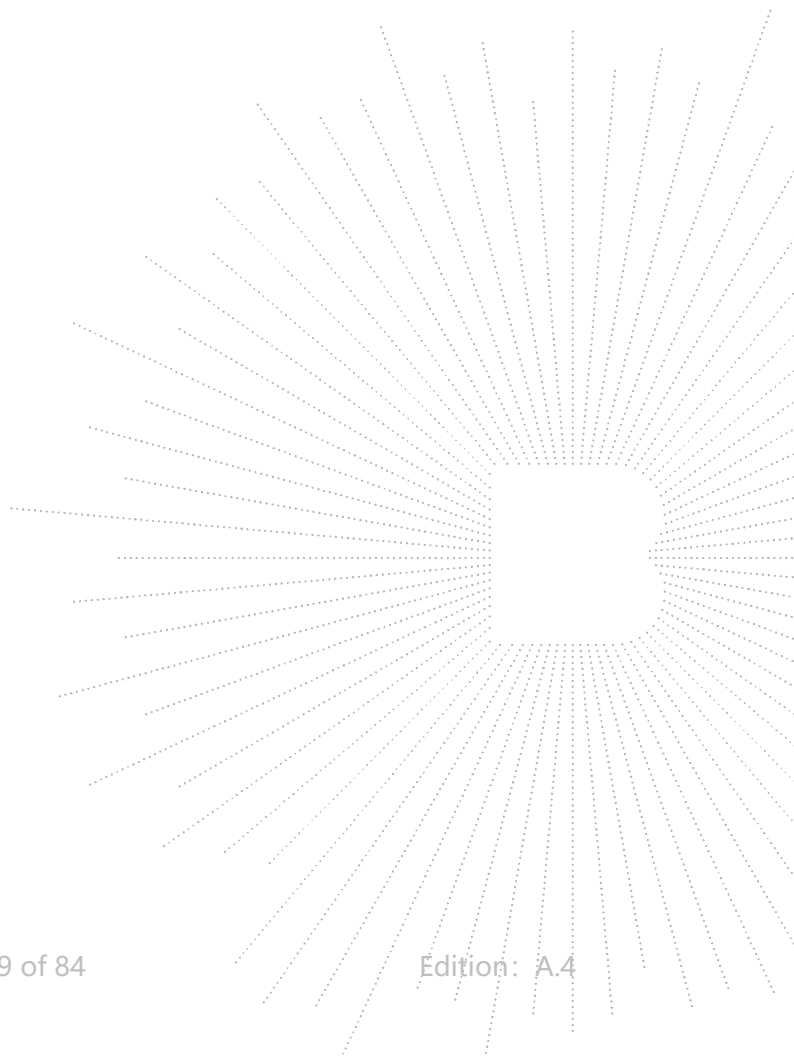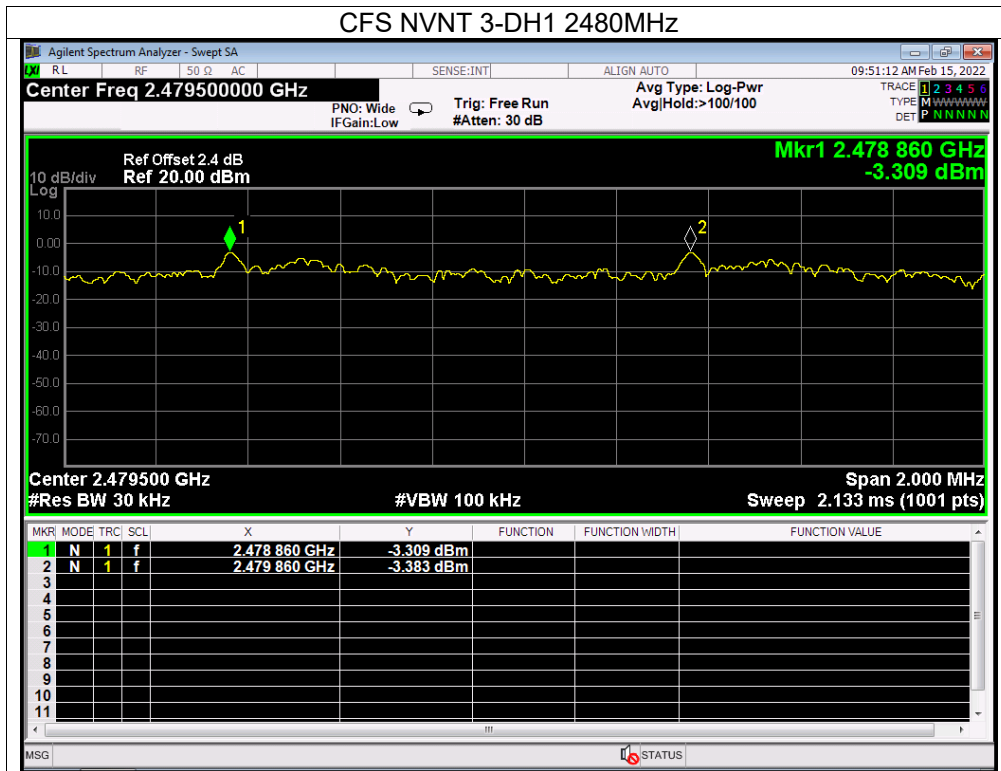

13. Number Of Hopping Frequency

13.1 Block Diagram Of Test Setup




13.2 Limit



Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

13.4 Test Result

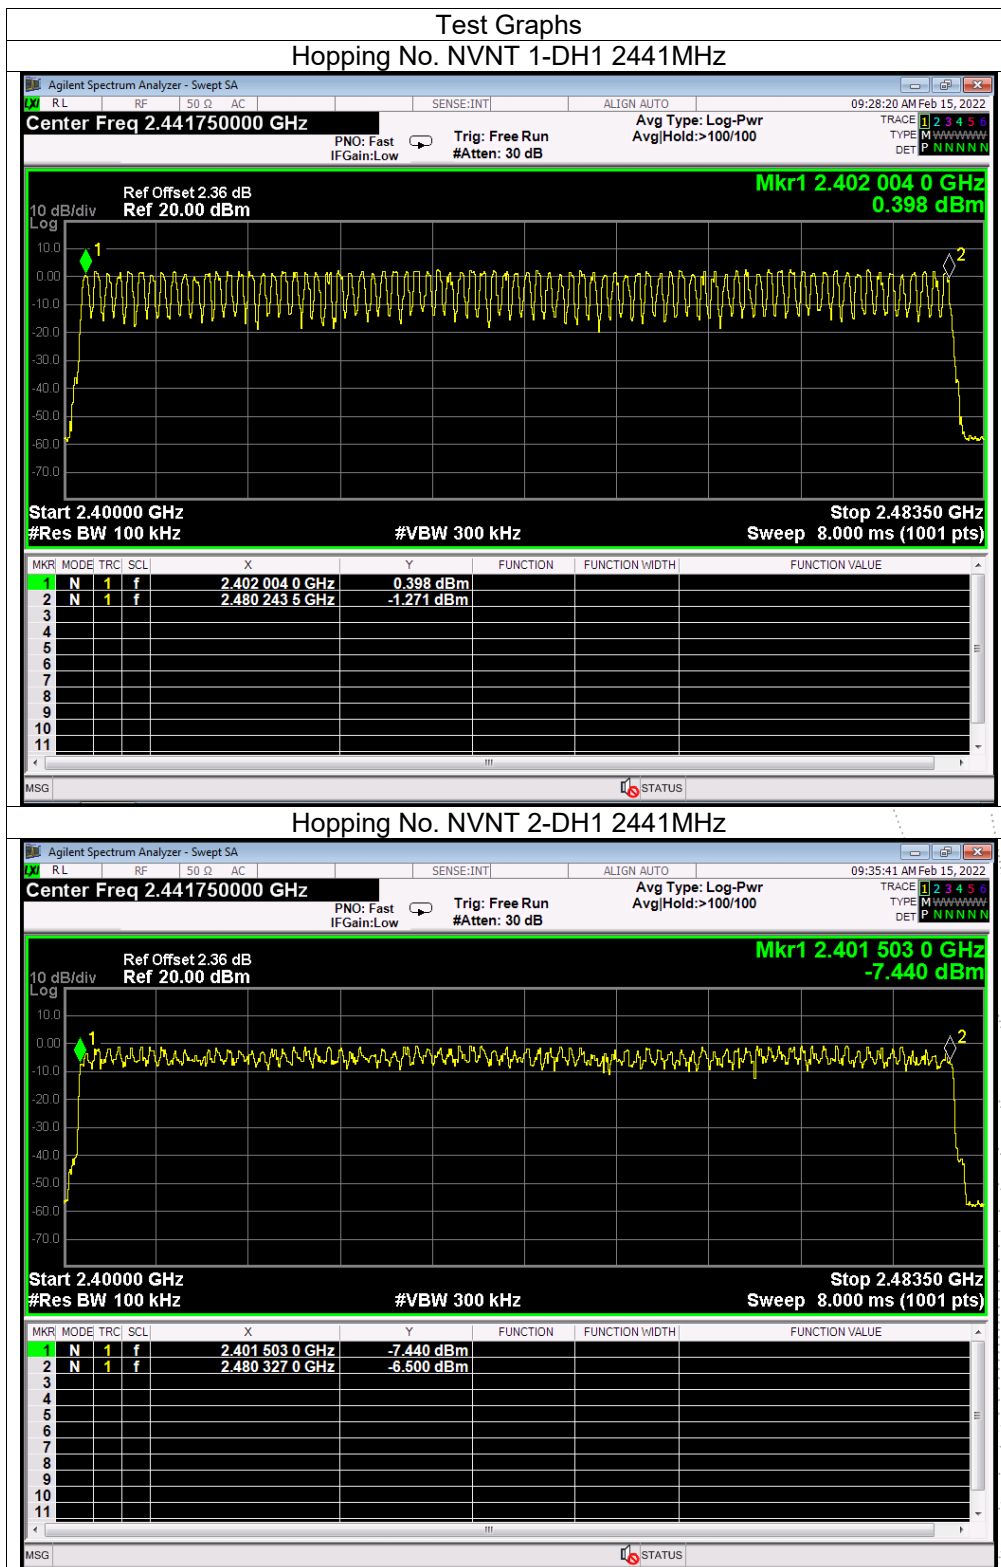

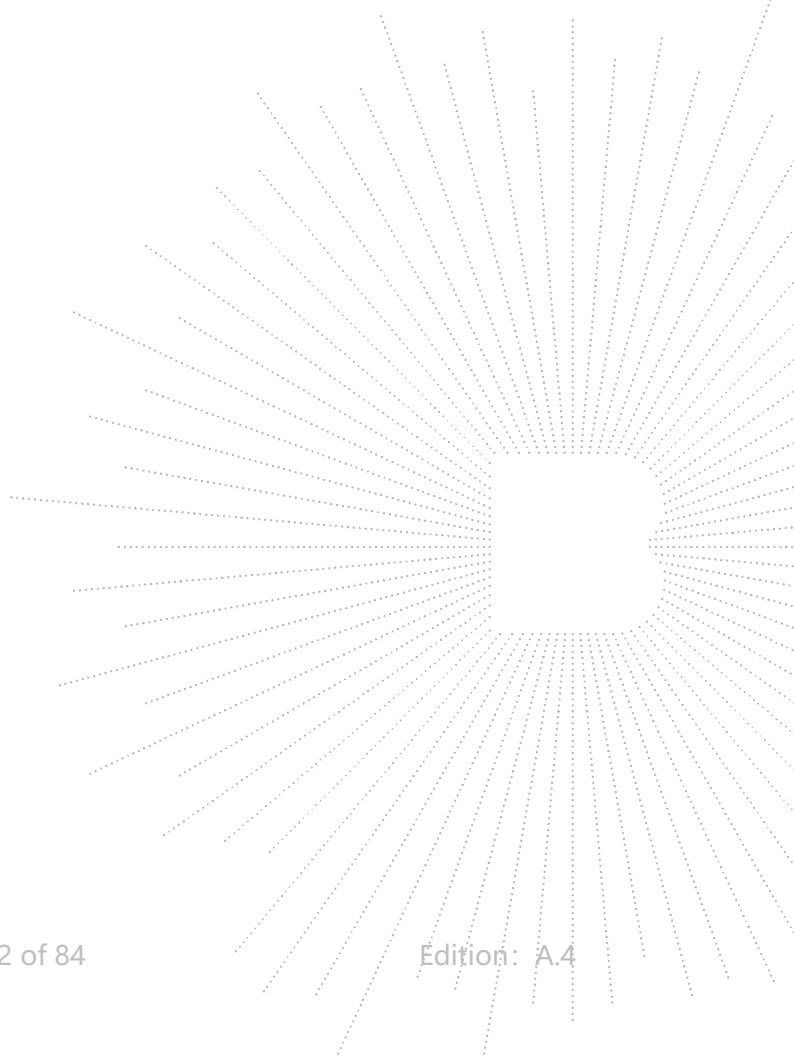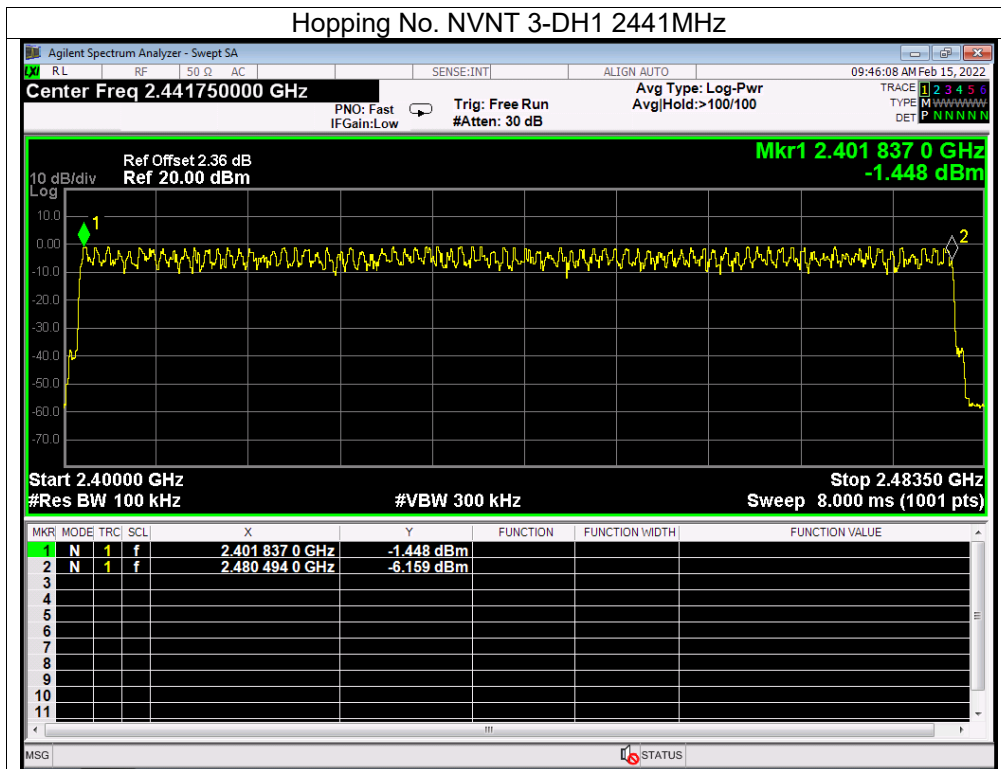

14. Dwell Time

14.1 Block Diagram Of Test Setup



14.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

14.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

14.4 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$



DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$



DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$



Remark: Mkr Delta is once pulse time.



Modulation	Channel Data	Packet	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	Middle	DH1	0.4	0.128	0.4
		DH3	1.672	0.268	0.4
		DH5	2.897	0.309	0.4
$\pi/4$ DQPSK	Middle	2DH1	0.416	0.133	0.4
		2DH3	1.675	0.268	0.4
		2DH5	2.912	0.311	0.4
8DPSK	Middle	3DH1	0.415	0.133	0.4
		3DH3	1.687	0.270	0.4
		3DH5	2.911	0.311	0.4


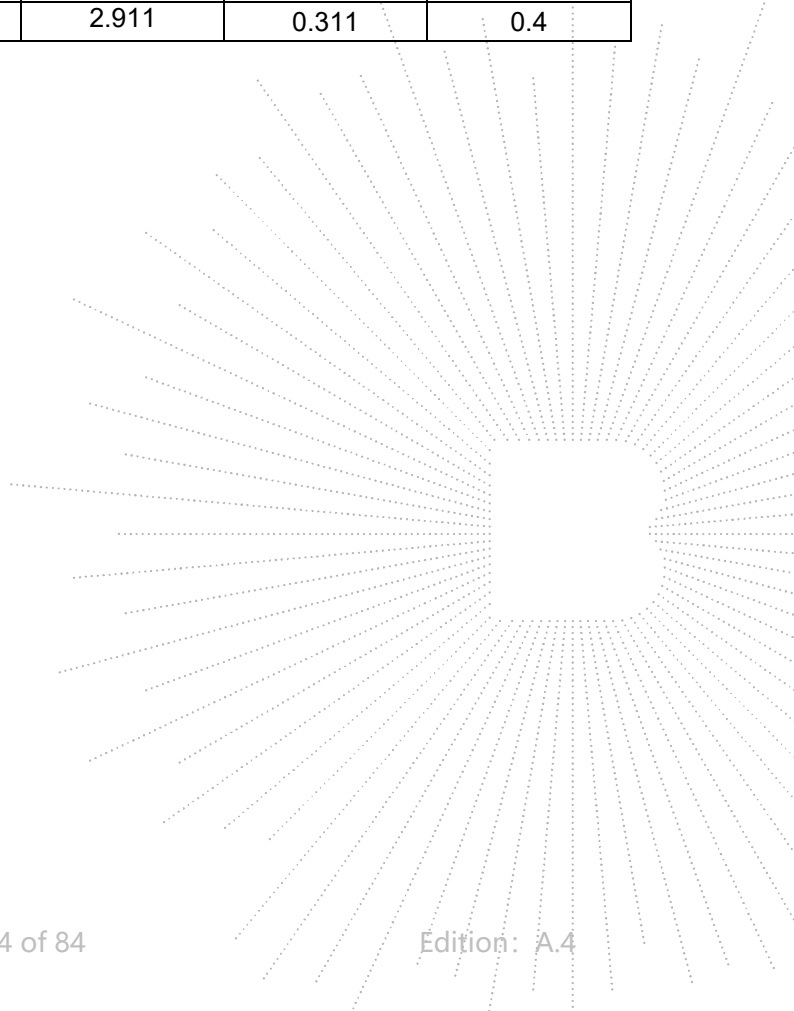


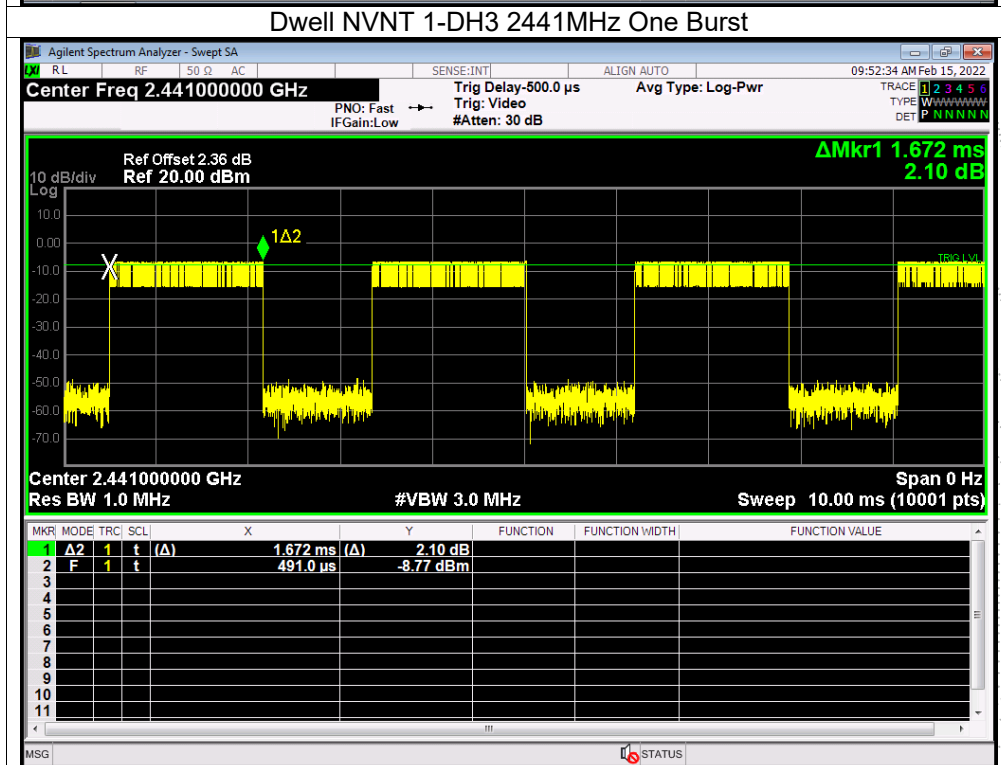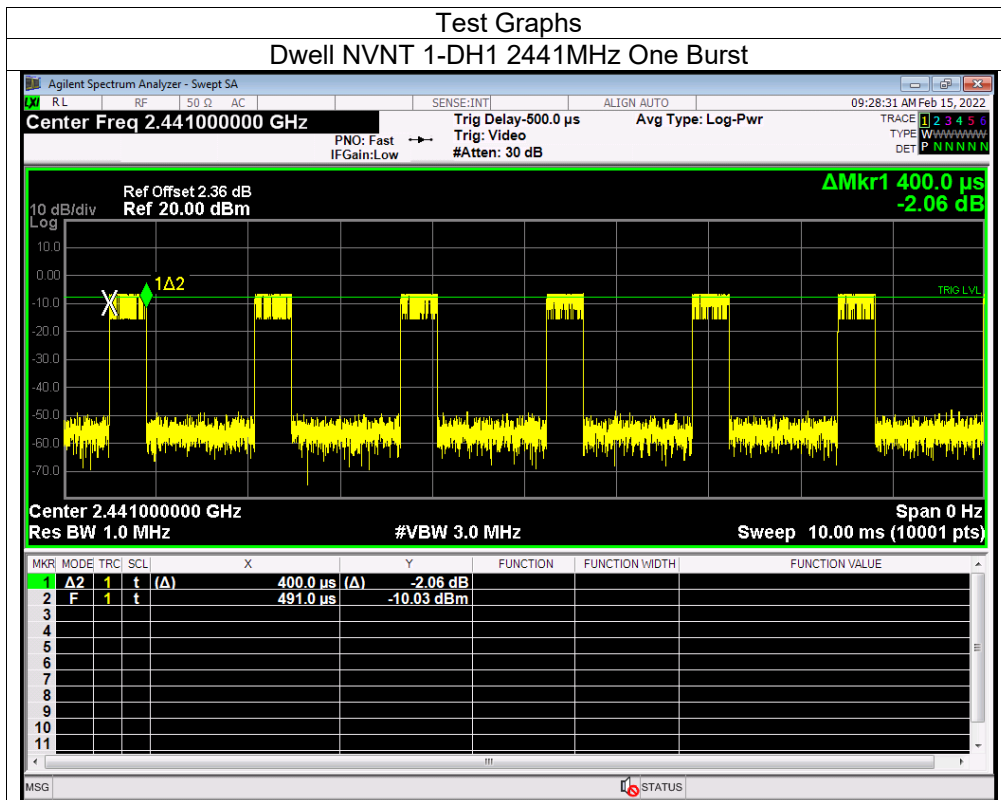

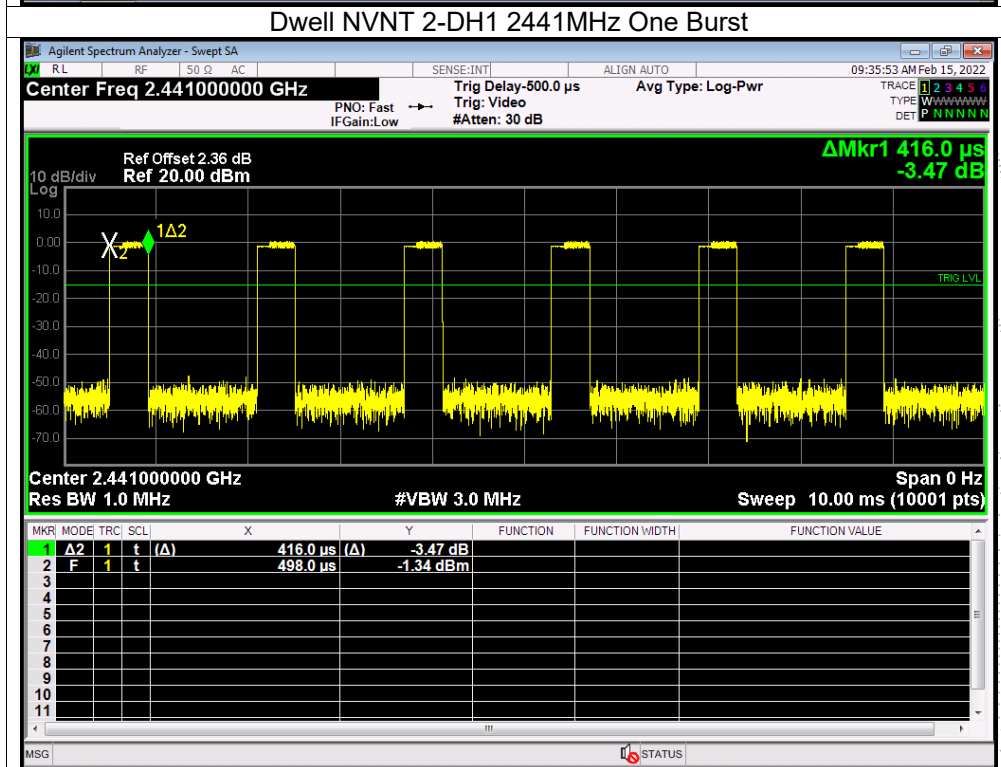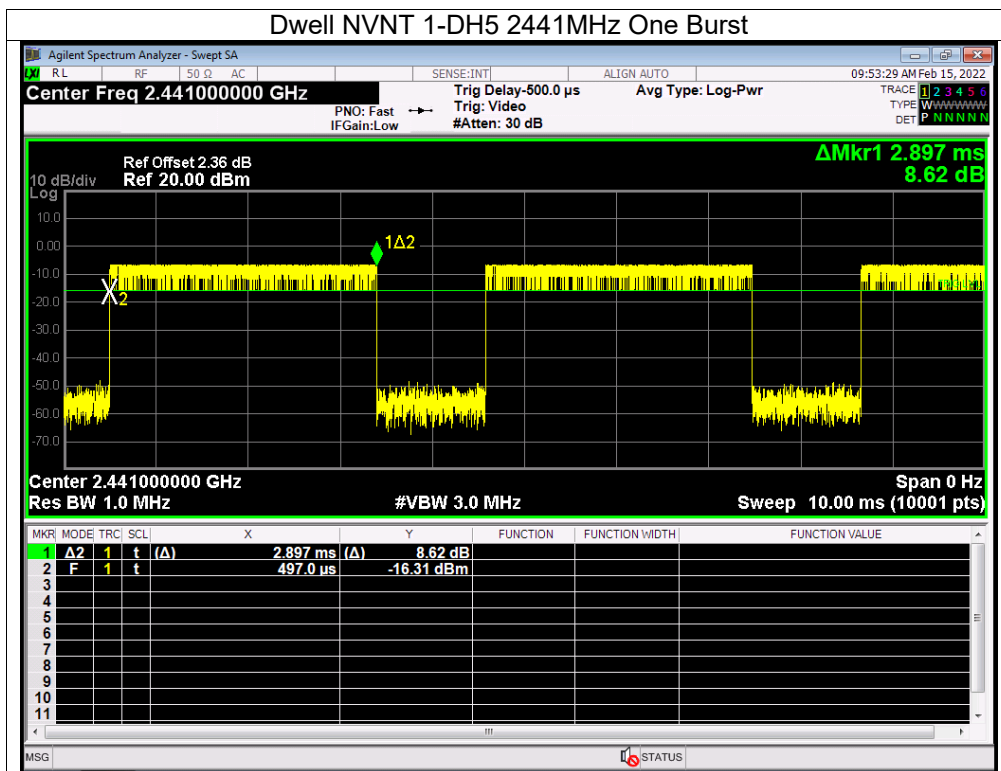

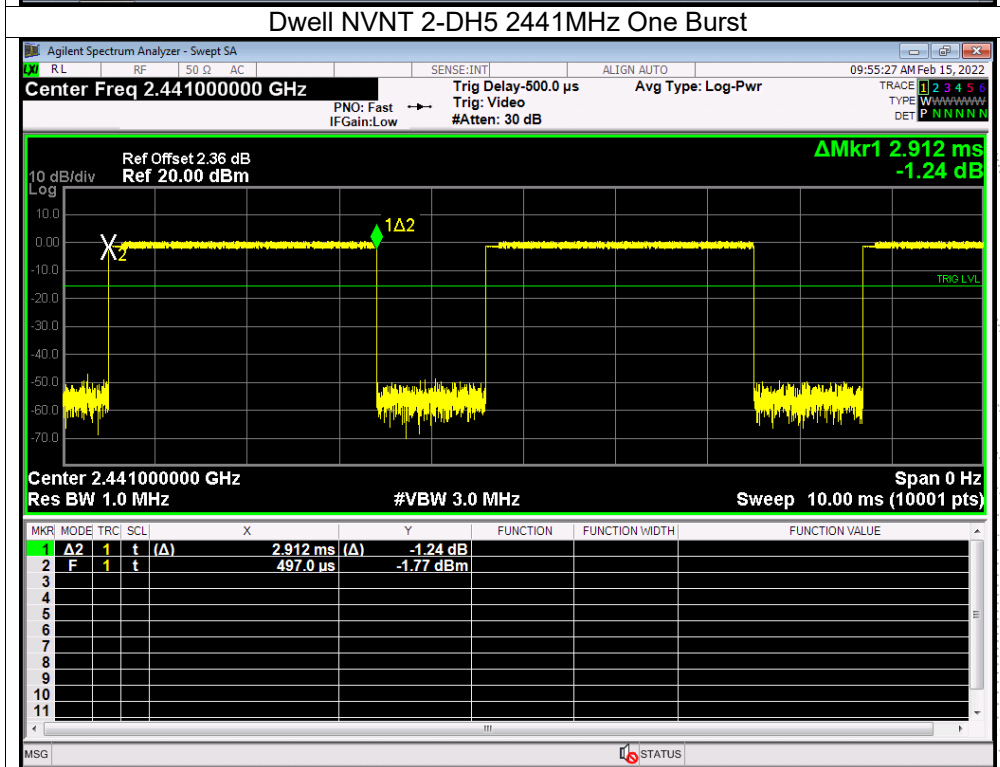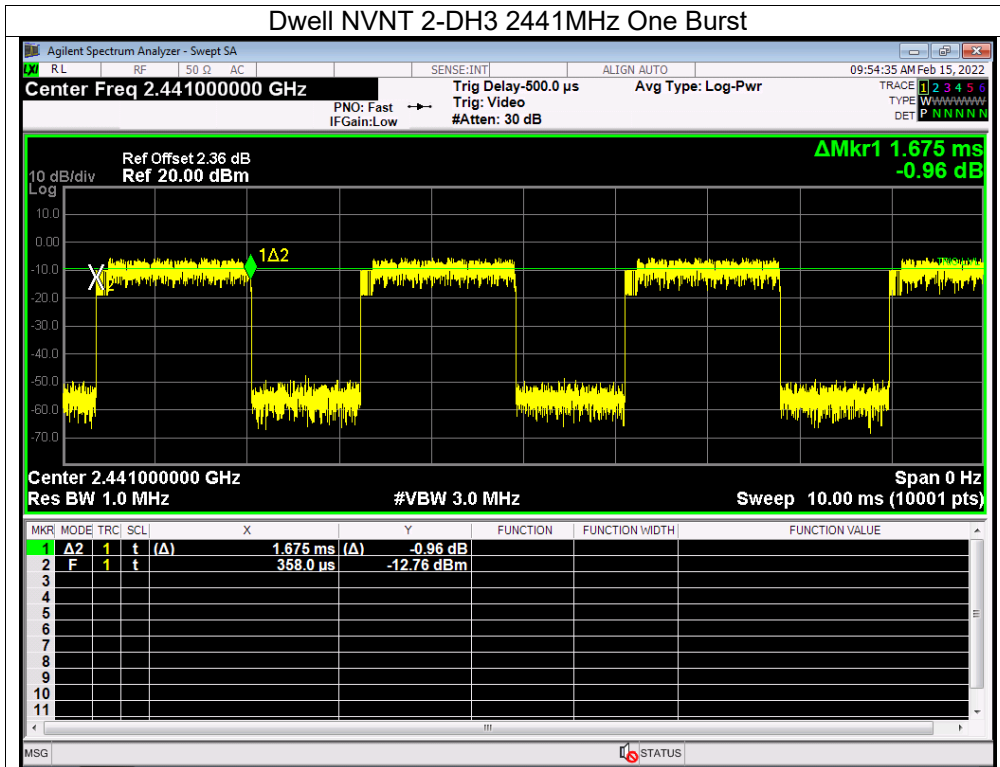

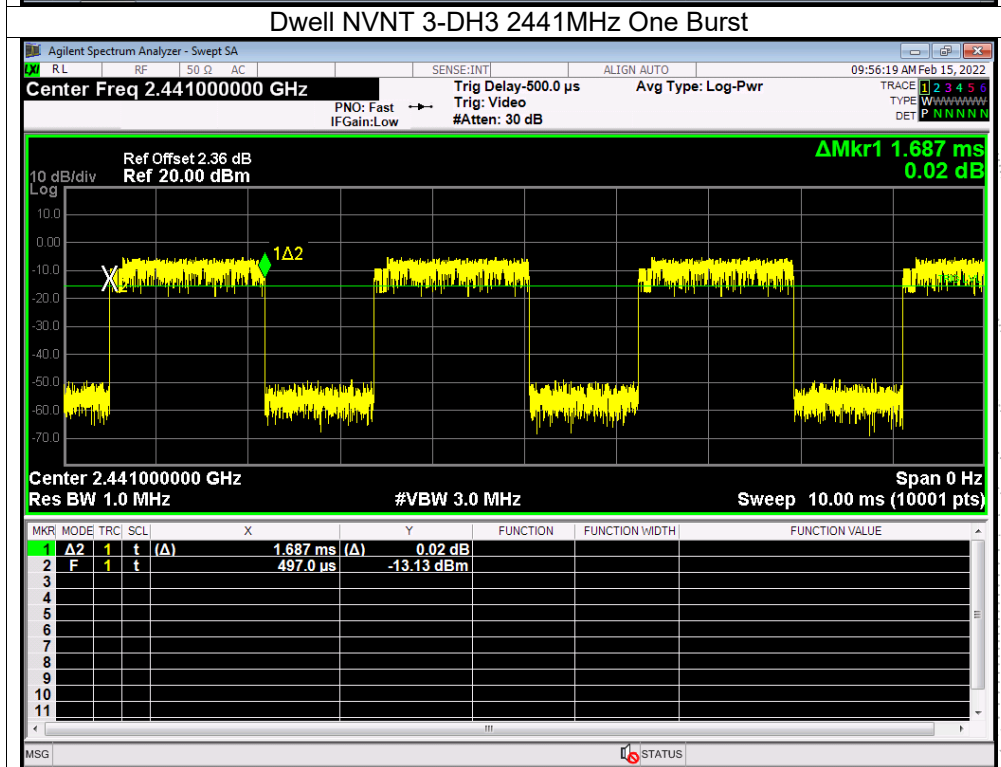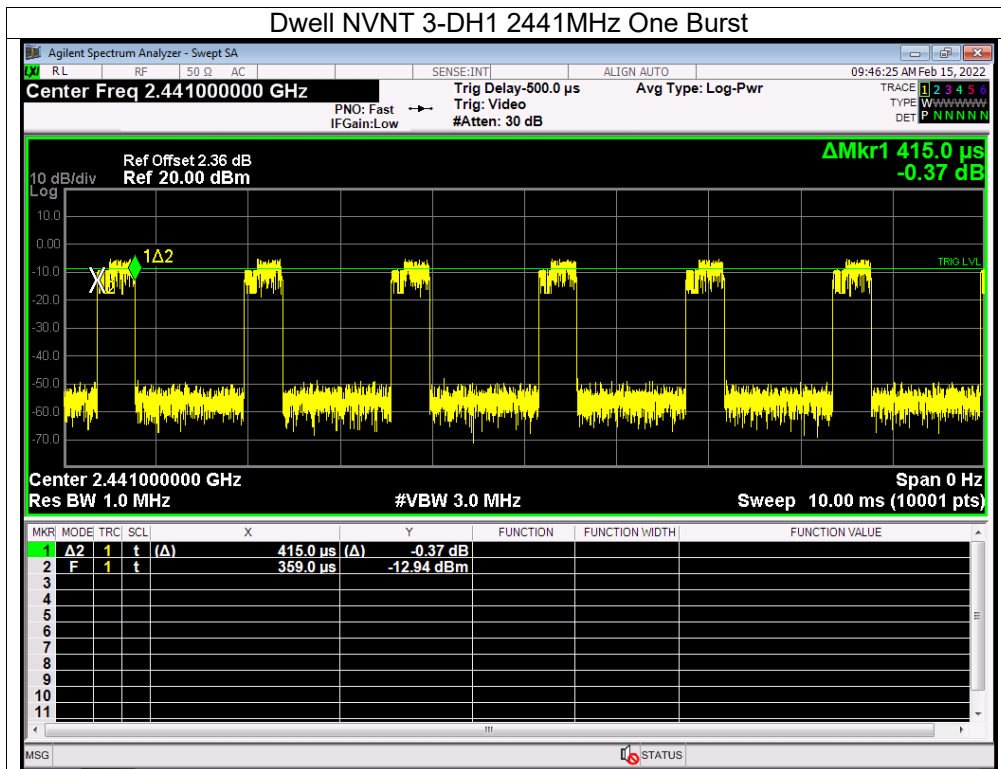

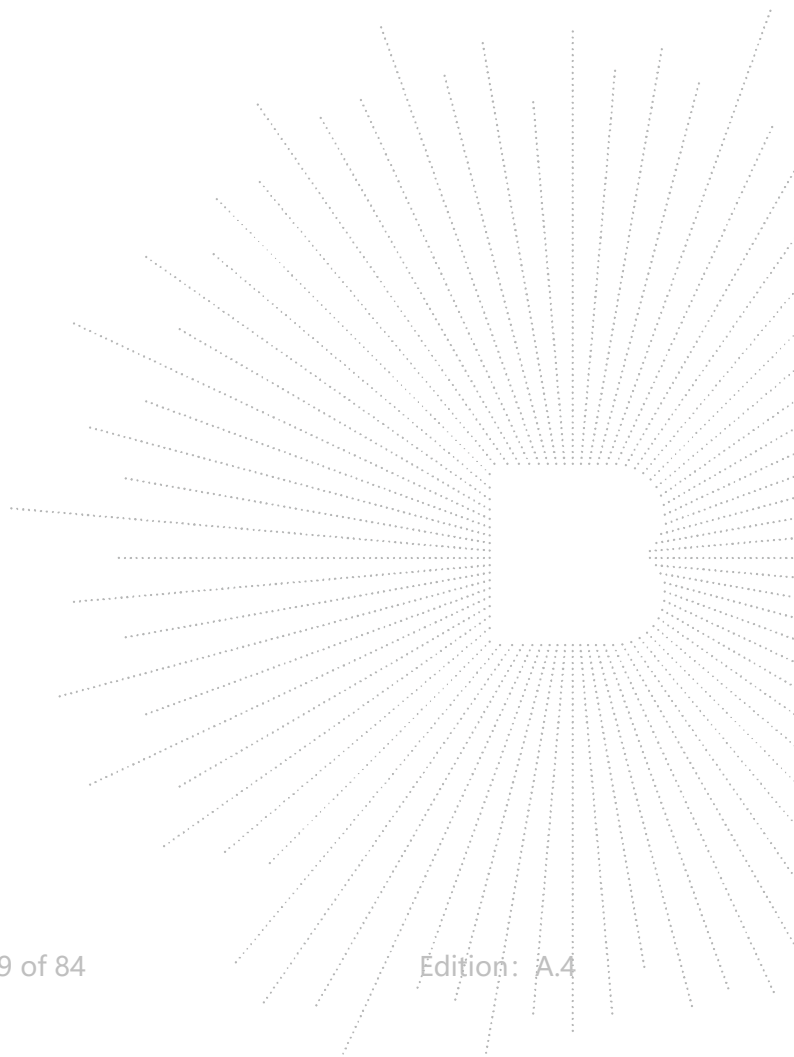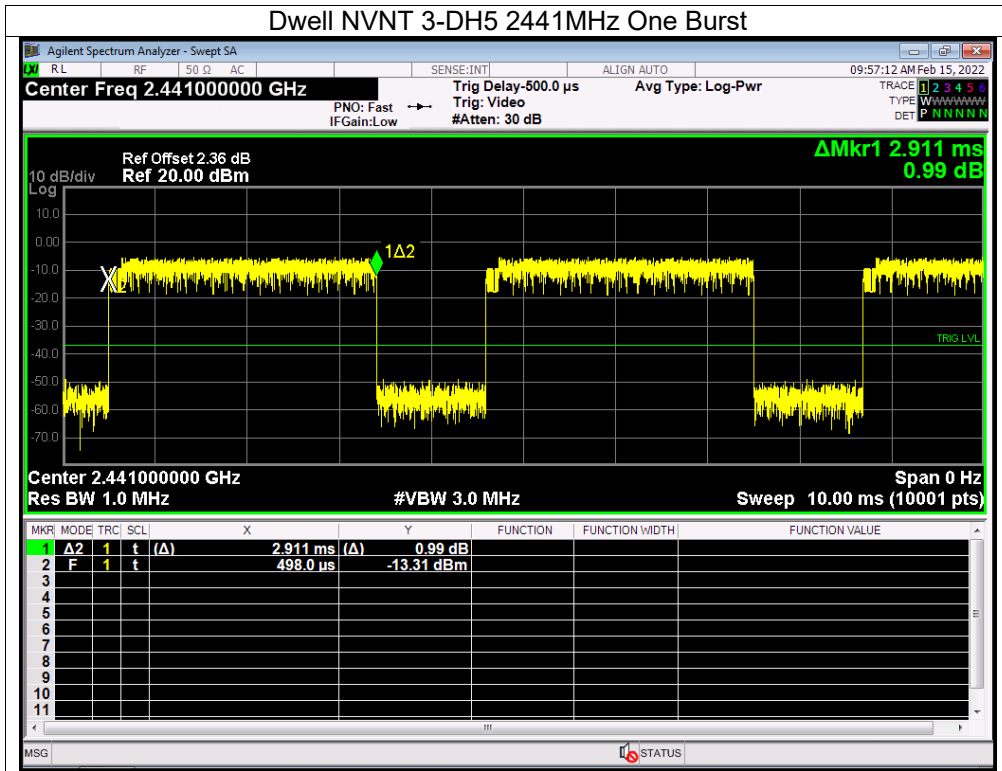


15. Antenna Requirement

15.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.2 Test Result

The EUT antenna is FPCB antenna, The antenna gain is -1.54dBi , fulfill the requirement of this section.

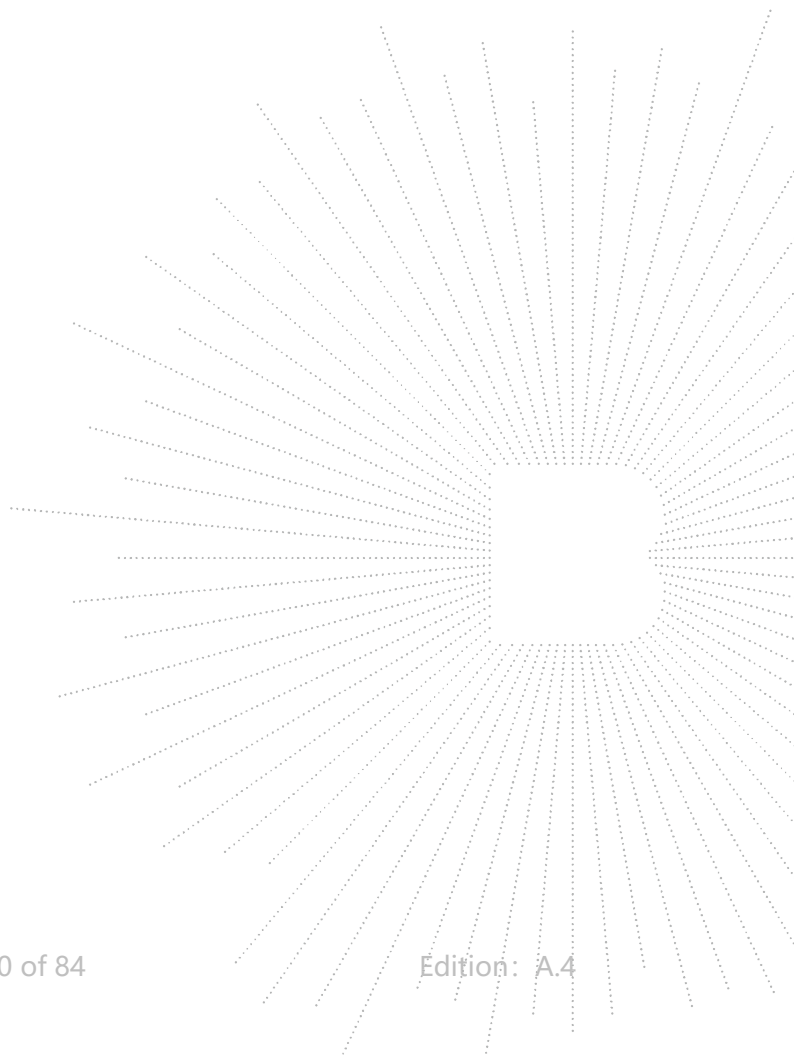

16. EUT Photographs

EUT Photo 1




EUT Photo 2




17. EUT Test Setup Photographs

Conducted Measurement Photos

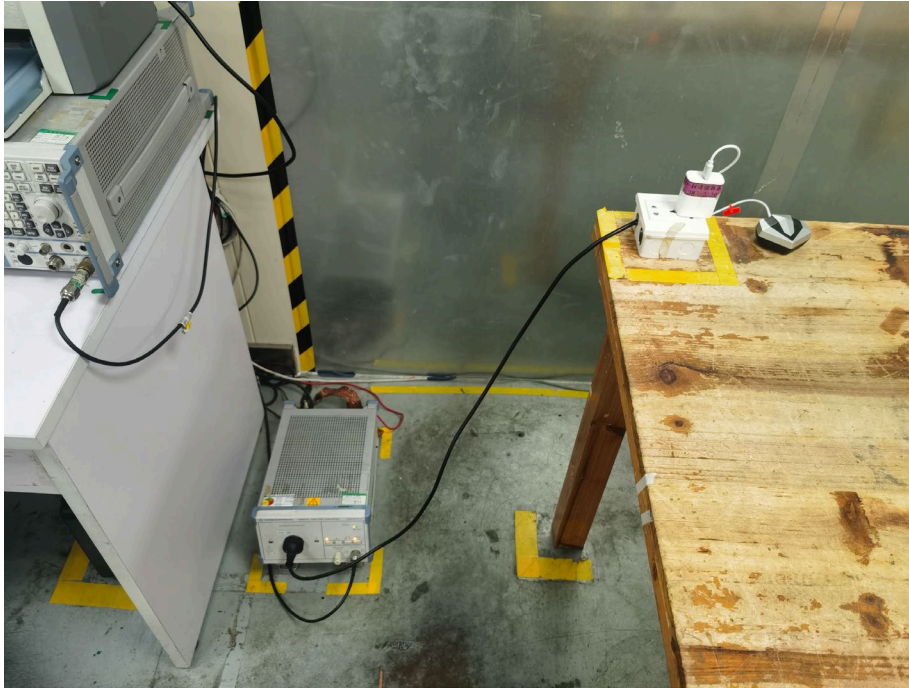

Radiated Measurement Photos



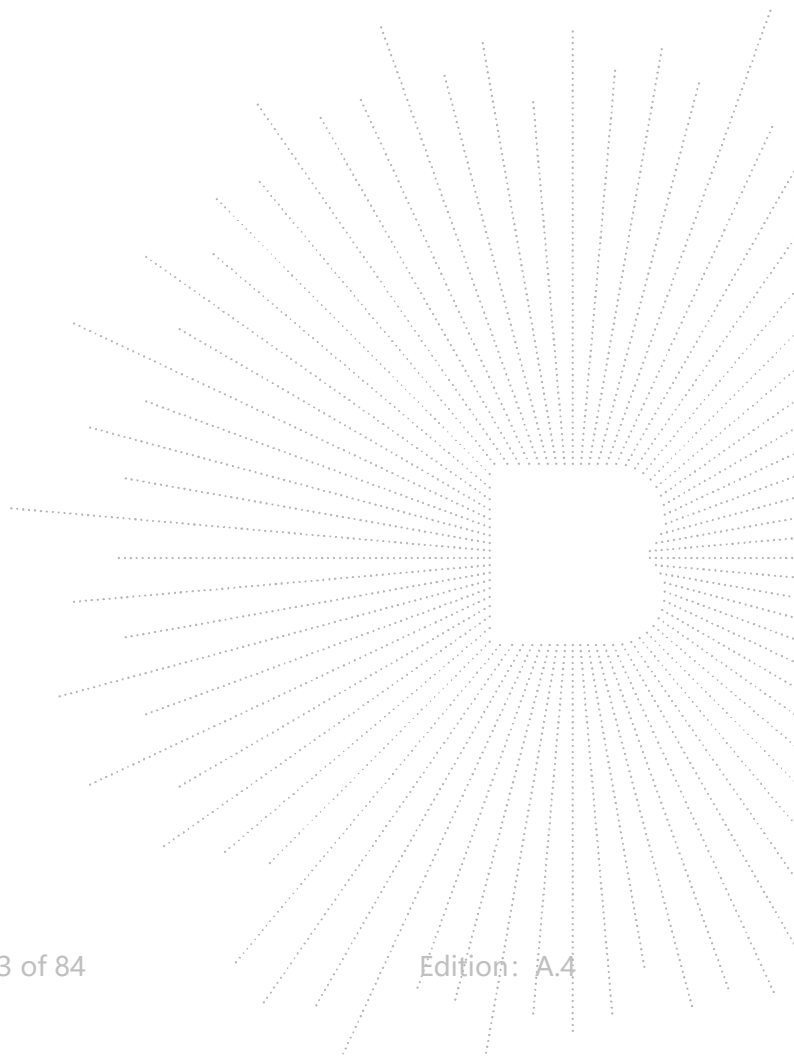

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

***** END *****

