

TEST REPORT

Applicant: Shenzhen Magic Vision Digital Technology Co., Ltd.

Address of Applicant: 5/F, building 2, new material port, Changyuan, Nanshan District, Shenzhen 518110, China

Manufacturer: Sichuan Tianyi Comheart Telecom Co., Ltd.

Address of Manufacturer: No. 198, Section 1, Xueshan Avenue, Dayi County, Chengdu, Sichuan, China

Equipment Under Test (EUT)

Product Name: ECPN W6

Model No.: W6

Trade Mark: ECPN

FCC ID: 2AXSA-W6

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: November 24, 2020

Date of Test: November 24, 2020- December 04, 2020

Date of report issued: December 04, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular blue stamp with the text "GTS" in the center, "GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD." around the perimeter, and "SHENZHEN, CHINA" at the bottom. Overlaid on the stamp is a handwritten signature in black ink.

Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 04, 2020	Original

Prepared By:



Date:

December 04, 2020

Project Engineer

Check By:



Reviewer

Date:

December 04, 2020

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH	16
7.5 POWER SPECTRAL DENSITY	23
7.6 BAND EDGES	30
7.6.1 Conducted Emission Method	30
7.6.2 Radiated Emission Method	34
7.7 SPURIOUS EMISSION	46
7.7.1 Conducted Emission Method	46
7.7.2 Radiated Emission Method	63
8 TEST SETUP PHOTO	80
9 EUT CONSTRUCTIONAL DETAILS	80

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth & 99% OCB	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	ECPN W6
Model No.:	W6
Serial No.:	8C0E60-D3BUS8COE600255A8
Hardware Version:	V1.0.0
Software Version:	V1.0.1
Test sample(s) ID:	GTS202010000093-1
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20) /802.11ax(HT20): 11 802.11n(HT40)/802.11ax(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM) 802.11ax(H20)/802.11ax(HT40): Orthogonal Frequency Division Multiplexing (OFDMA)
Antenna Type:	Dipole
Antenna gain:	ANT0:5dBi, ANT1:5dBi,MIMO:5dBi
Power supply:	Adapter MODEL: TS-A018-120015An INPUT:AC 100-240V, 50/60Hz 0.6A OUTPUT:DC 12V, 1.5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20) /802.11ax(HT20)	802.11n(HT40) /802.11ax(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	802.11ax(HT20)	802.11ax(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps	17.2 Mbps	34.4 Mbps

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Mtool
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antennas are Dipole antenna, the best case gain of the antennas are 5dBi, reference to the appendix II for details</i>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Reference Plane</p> <p>40cm</p> <p>80cm</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data

Line:

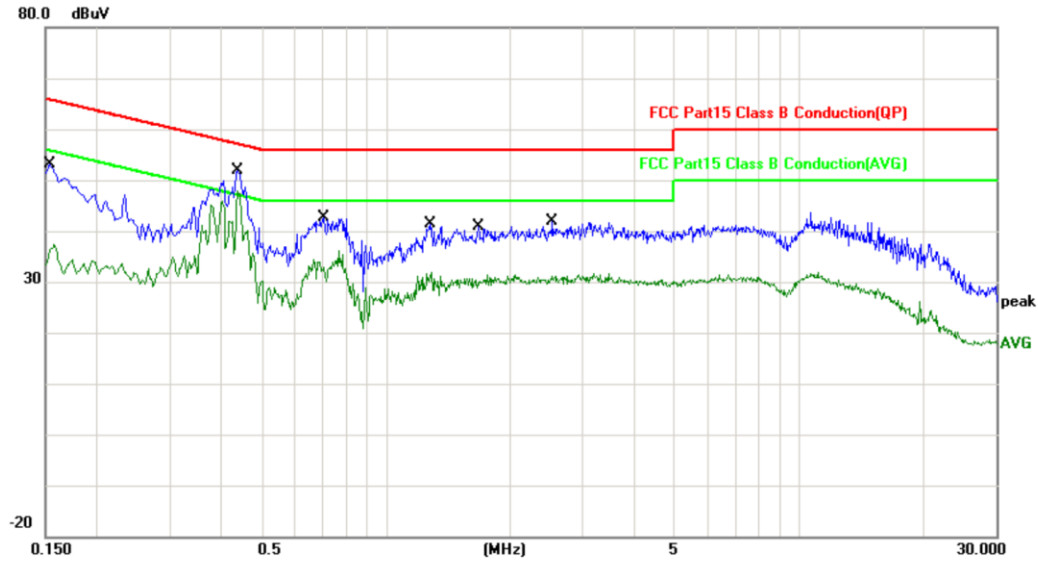

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1540	31.31	19.50	50.81	65.78	-14.97	QP	
2		0.1540	16.90	19.50	36.40	55.78	-19.38	AVG	
3		0.4380	29.82	19.53	49.35	57.10	-7.75	QP	
4 *		0.4380	23.39	19.53	42.92	47.10	-4.18	AVG	
5		0.7100	20.02	19.56	39.58	56.00	-16.42	QP	
6		0.7100	13.70	19.56	33.26	46.00	-12.74	AVG	
7		1.2820	15.94	19.73	35.67	56.00	-20.33	QP	
8		1.2820	9.26	19.73	28.99	46.00	-17.01	AVG	
9		1.6780	15.35	19.91	35.26	56.00	-20.74	QP	
10		1.6780	9.68	19.91	29.59	46.00	-16.41	AVG	
11		2.5300	15.96	20.41	36.37	56.00	-19.63	QP	
12		2.5300	10.26	20.41	30.67	46.00	-15.33	AVG	

Neutral:

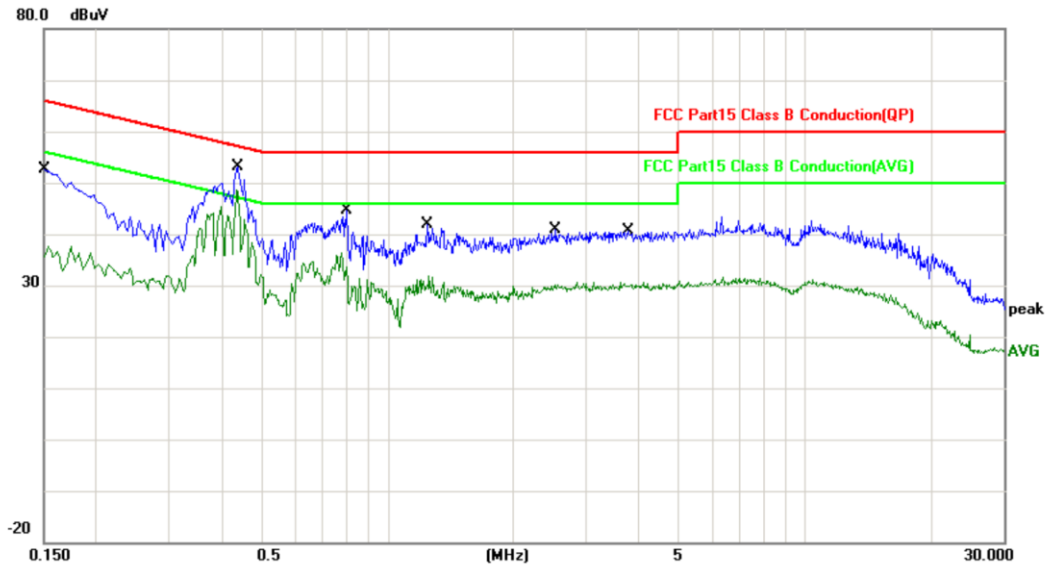


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	29.06	19.70	48.76	66.00	-17.24	QP	
2		0.1500	15.82	19.70	35.52	56.00	-20.48	AVG	
3		0.4380	30.03	19.73	49.76	57.10	-7.34	QP	
4	*	0.4380	23.68	19.73	43.41	47.10	-3.69	AVG	
5		0.7980	16.89	19.81	36.70	56.00	-19.30	QP	
6		0.7980	10.29	19.81	30.10	46.00	-15.90	AVG	
7		1.2460	13.72	19.97	33.69	56.00	-22.31	QP	
8		1.2460	8.44	19.97	28.41	46.00	-17.59	AVG	
9		2.5380	14.63	20.58	35.21	56.00	-20.79	QP	
10		2.5380	8.57	20.58	29.15	46.00	-16.85	AVG	
11		3.7620	14.96	20.27	35.23	56.00	-20.77	QP	
12		3.7620	9.37	20.27	29.64	46.00	-16.36	AVG	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

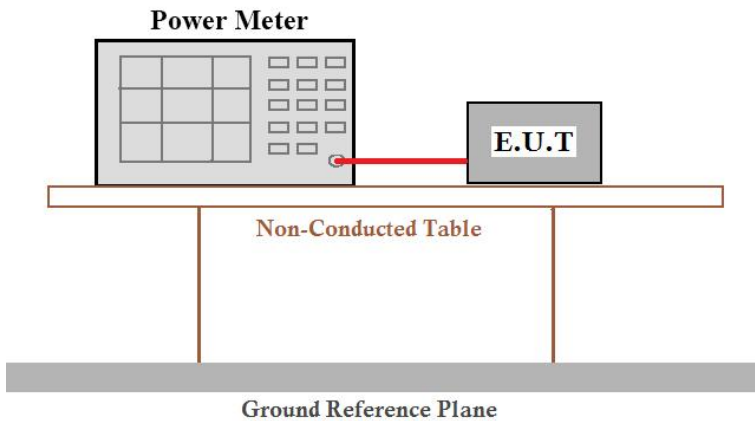Test Requirement :	FCC Part15 C Section 15.247 (b)(3)
Test Method :	KDB558074 D01 DTS Meas Guidance v05or02 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Power Meter and an E.U.T. (Equipment Under Test) are connected by a red cable. They are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test CH	Peak Output Power (dBm)	Limit(dBm)	Result
	802.11b (ANT0)		
Lowest	22.89	30.00	Pass
Middle	22.46		
Highest	22.41		

Test CH	Peak Output Power (dBm)	Limit(dBm)	Result
	802.11g (ANT0)		
Lowest	16.00	30.00	Pass
Middle	16.00		
Highest	16.27		


Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11n (HT20)				
	ANT0	ANT1	Total		
Lowest	17.52	18.18	20.90	30.00	Pass
Middle	22.66	23.10	25.90		
Highest	16.37	16.72	19.60		

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11n (HT40)				
	ANT0	ANT1	Total		
Lowest	15.42	16.44	19.00	30.00	Pass
Middle	17.02	17.56	20.30		
Highest	14.88	15.74	18.30		

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11ax (HT20)				
	ANT0	ANT1	Total		
Lowest	17.76	18.39	21.10	30.00	Pass
Middle	22.95	23.45	26.20		
Highest	16.65	17.02	19.80		

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11ax (HT40)				
	ANT0	ANT1	Total		
Lowest	15.77	16.63	19.20	30.00	Pass
Middle	17.09	17.86	20.50		
Highest	15.05	15.75	18.40		

7.4 Channel Bandwidth & 99% Occupy Bandwidth

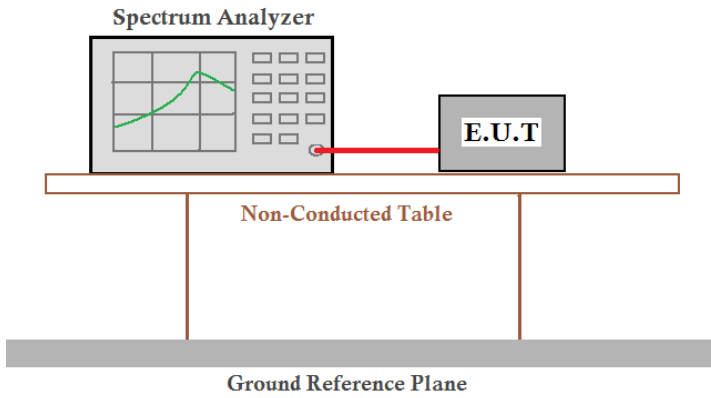Test Requirement :	FCC Part15 C Section 15.247 (a)(2)
Test Method :	KDB558074 D01 DTS Meas Guidance v05or02 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs that rest on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test CH	Channel Bandwidth (MHz)										Limit(KHz)	Resu lt
	802.11b	802.11g	802.11n (HT20)		802.11n (HT40)		802.11ax (HT20)		802.11ax (HT40)			
	ANT0	ANT0	ANT0	ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	ANT1		
Lowest	6.120	16.440	17.680	17.720	36.240	36.480	18.840	18.880	37.840	37.440	>500	Pass
Middle	8.120	16.400	17.640	17.680	36.480	36.480	18.840	18.920	37.760	37.440		
Highest	7.120	16.440	17.640	17.680	36.480	36.480	19.000	18.880	37.680	37.440		

Test CH	99% Occupy Bandwidth (MHz)										Result
	802.11b	802.11g	802.11n(HT20)		802.11n(HT40)		802.11ax(HT20)		802.11ax(HT40)		
	ANT0	ANT0	ANT0	ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	ANT1	
Lowest	10.741	17.240	18.242	18.120	36.530	36.692	19.143	19.301	37.778	37.663	Pass
Middle	10.803	17.303	18.198	18.086	36.409	36.568	19.198	19.244	37.694	37.647	
Highest	10.657	17.297	18.343	18.184	36.547	36.544	19.177	19.288	37.787	37.631	


Test plot as follows:



Lowest channel





Middle channel


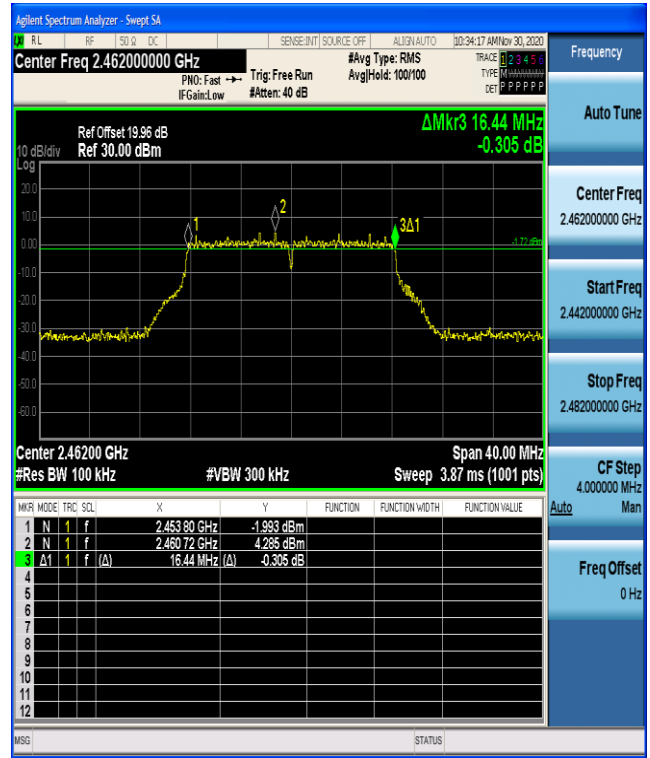


Highest channel


802.11n(HT20)	802.11n(HT40)
---------------	---------------

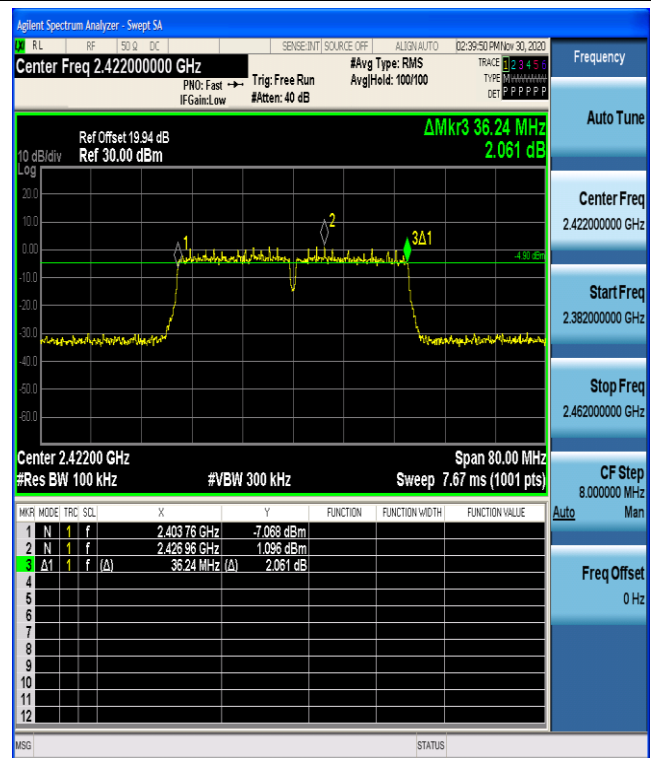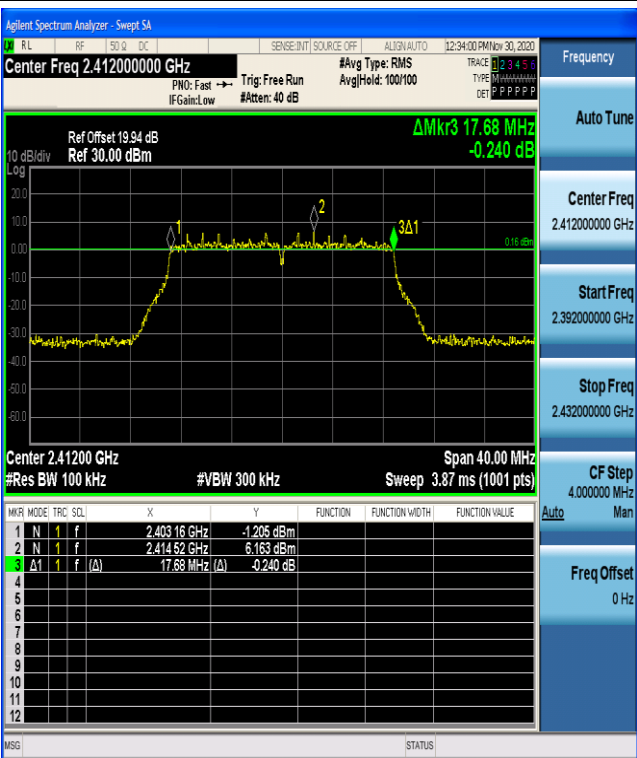

Lowest channel

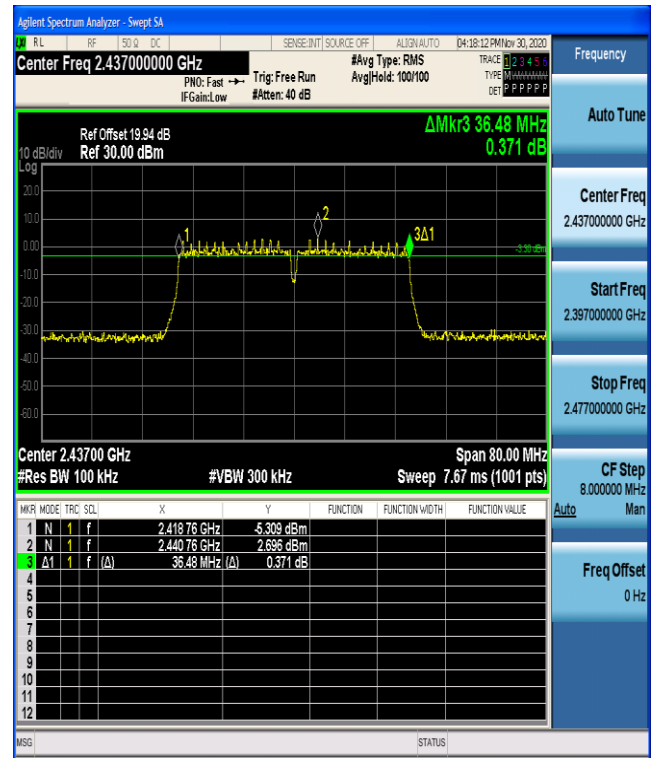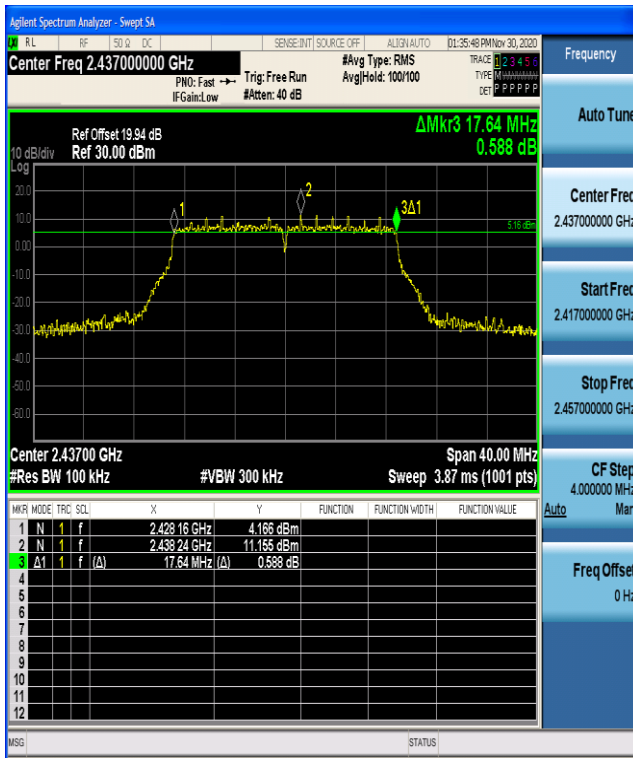


Middle channel

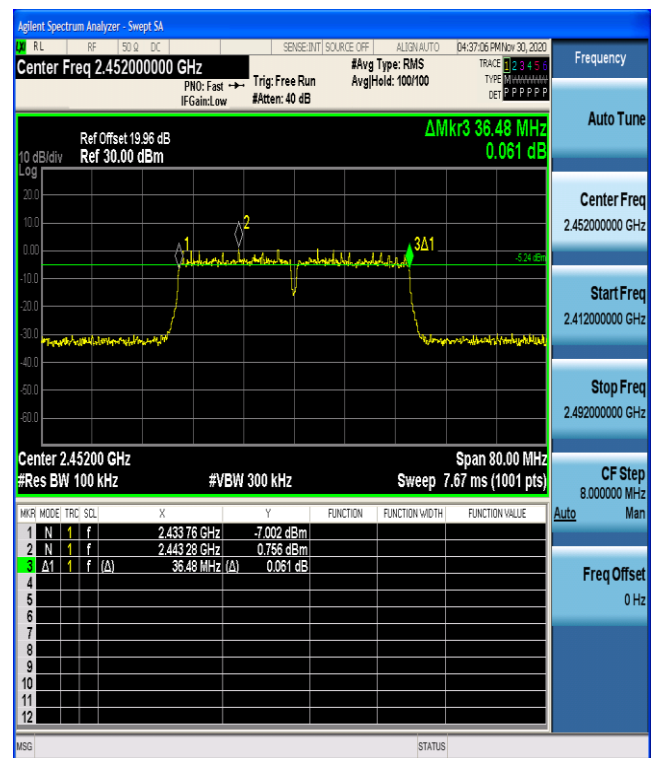


Highest channel


802.11ax(HT20)	802.11ax(HT40)
----------------	----------------

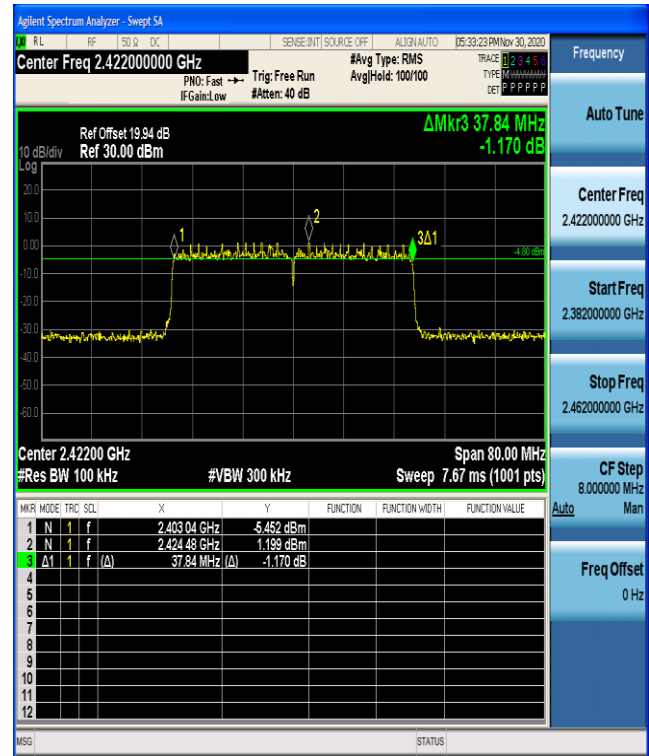

Lowest channel

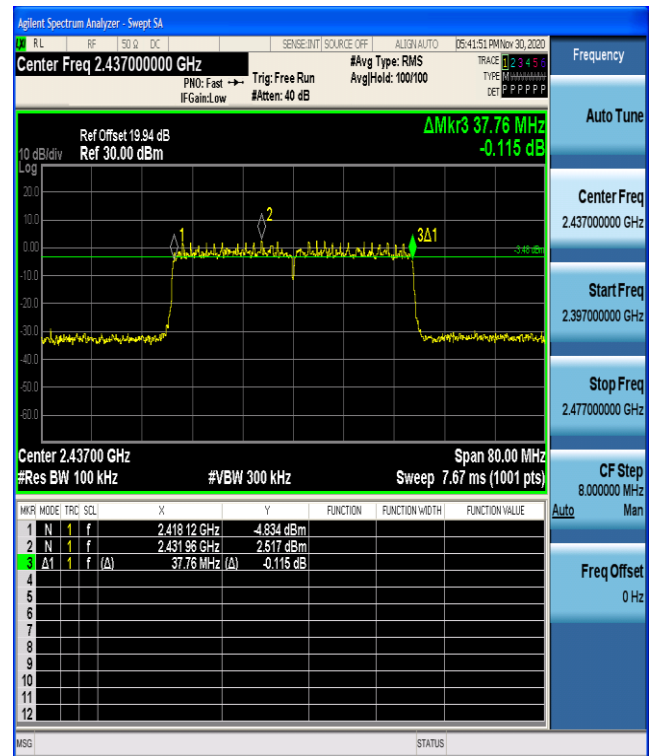


Middle channel

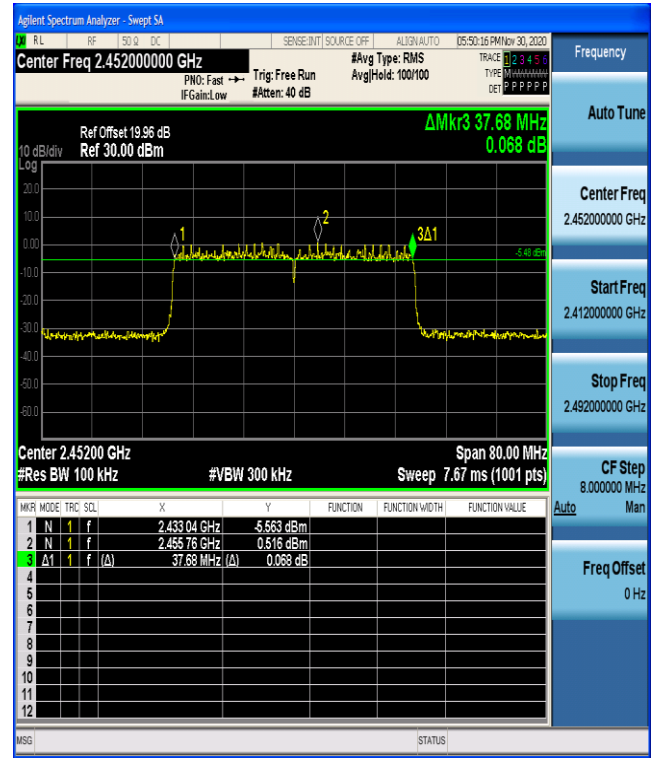

Highest channel

7.5 Power Spectral Density

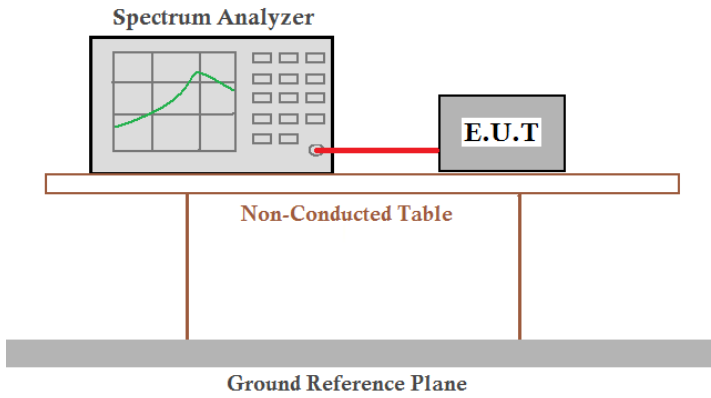Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D01 DTS Meas Guidance v05or02 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test CH	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	802.11b (ANT0)		
Lowest	-7.64	8.00	Pass
Middle	-7.77		
Highest	-8.05		

Test CH	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
	802.11g (ANT0)		
Lowest	-17.21	8.00	Pass
Middle	-17.08		
Highest	-17.46		

Test CH	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
	802.11n (HT20)				
	ANT0	ANT1	Total		
Lowest	-15.51	-14.55	-11.99	8.00	Pass
Middle	-10.44	-9.70	-7.04		
Highest	-16.68	-15.95	-13.29		


Test CH	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
	802.11n (HT40)				
	ANT0	ANT1	Total		
Lowest	-19.68	-19.11	-16.38	8.00	Pass
Middle	-17.99	-17.28	-14.61		
Highest	-20.25	-18.50	-16.28		

Test CH	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
	802.11ax (HT20)				
	ANT0	ANT1	Total		
Lowest	-15.67	-15.14	-12.39	8.00	Pass
Middle	-10.50	-10.29	-7.38		
Highest	-17.29	-16.83	-14.04		


Test CH	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
	802.11ax (HT40)				
	ANT0	ANT1	Total		
Lowest	-19.19	-18.57	-15.86	8.00	Pass
Middle	-18.84	-17.40	-15.05		
Highest	-20.45	-19.41	-16.89		

NOTE: $P(\text{dBm}/3\text{kHz}) = P(\text{dBm}/10\text{kHz}) - 10 \cdot \text{LOG}_{10}(0.001) + 10 \cdot \text{LOG}_{10}(0.0003)$



Test plot as follows:

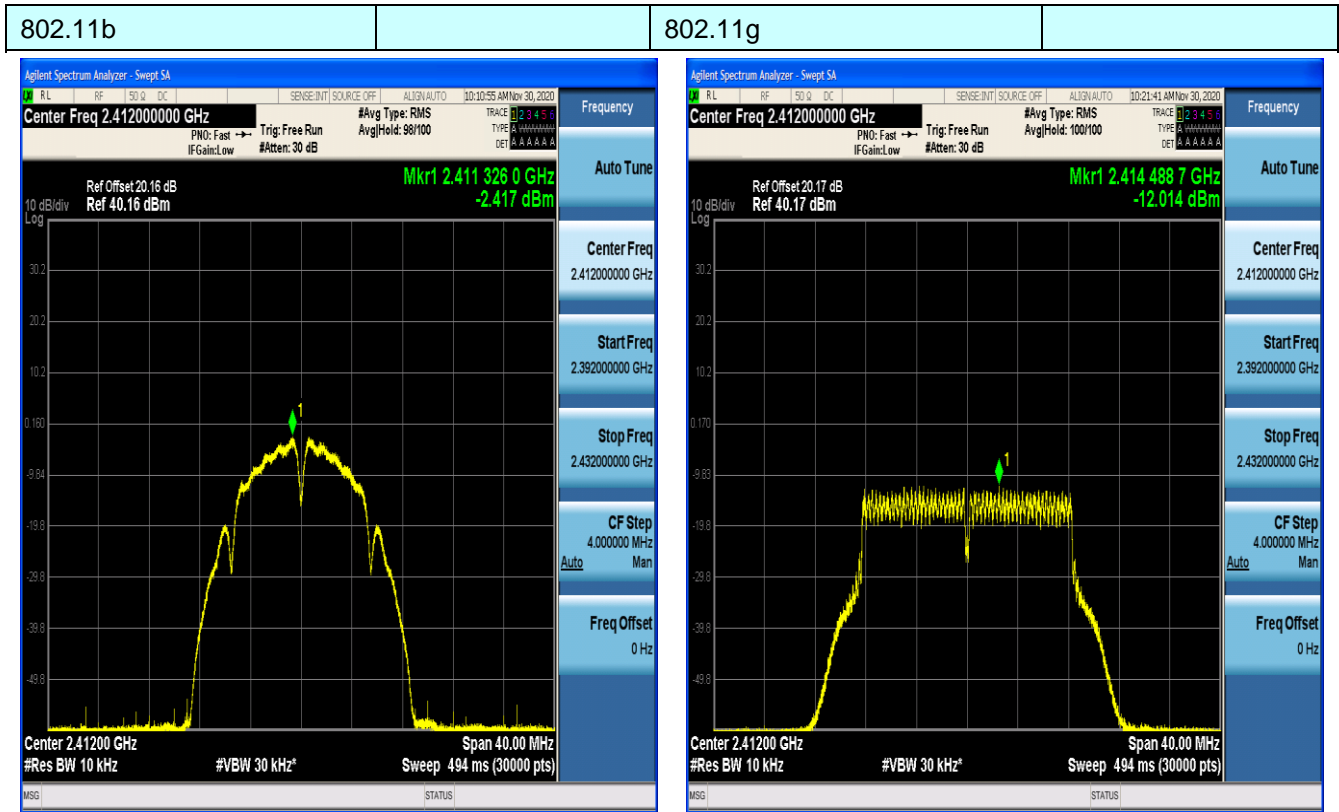

Lowest channel


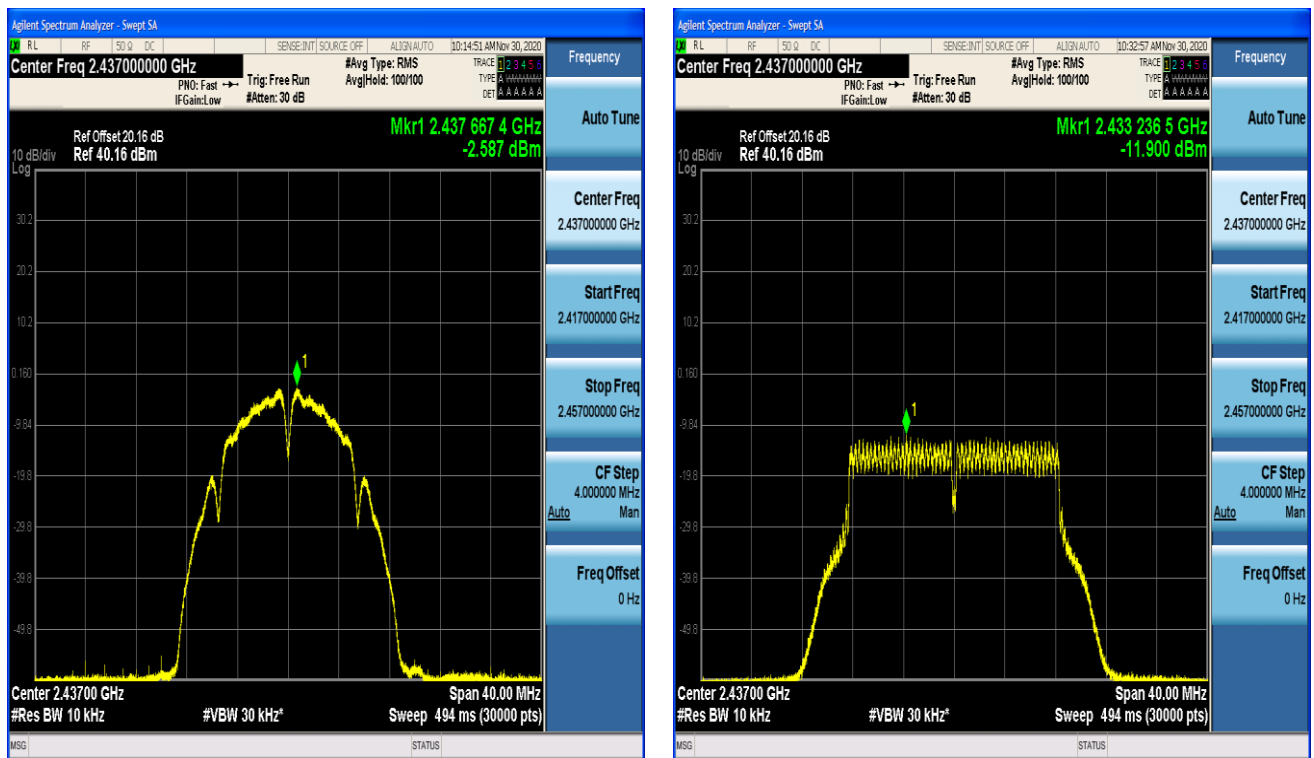


Middle channel

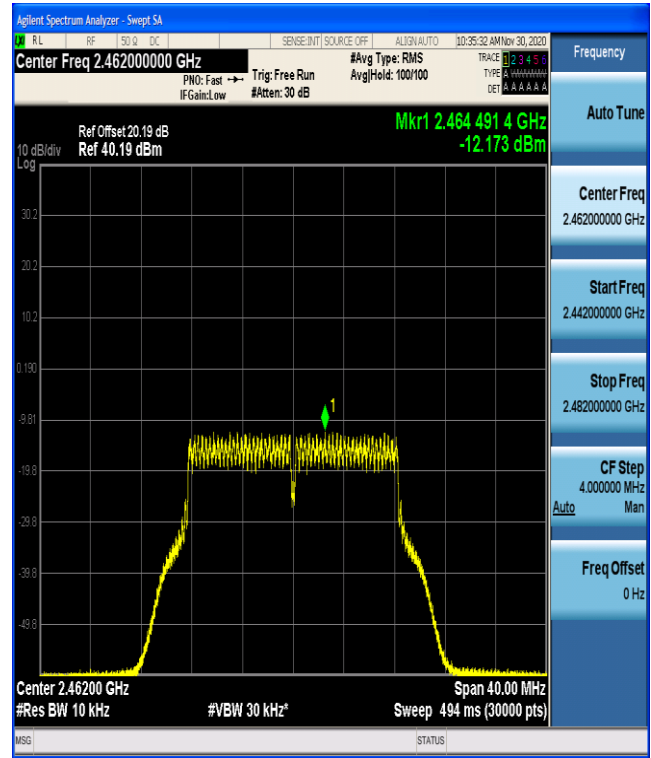
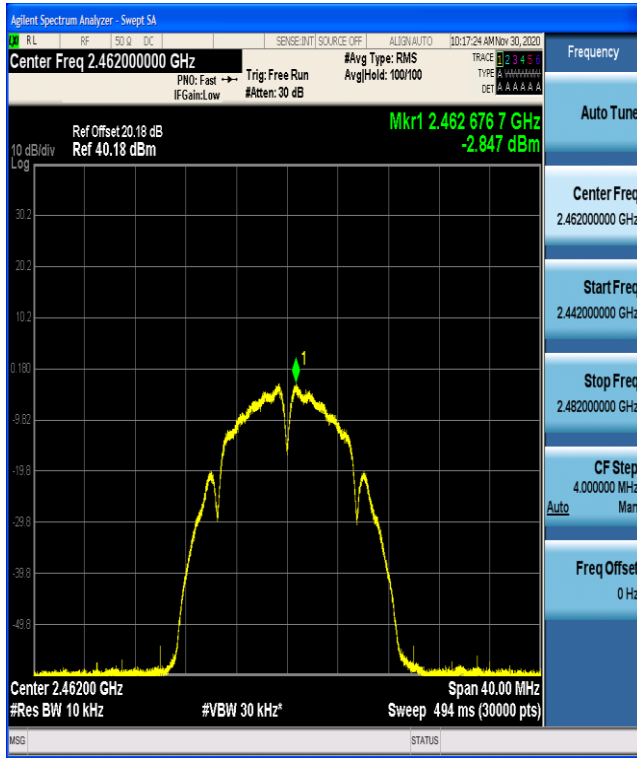


Highest channel



802.11n(HT20)	802.11n(HT40)
---------------	---------------

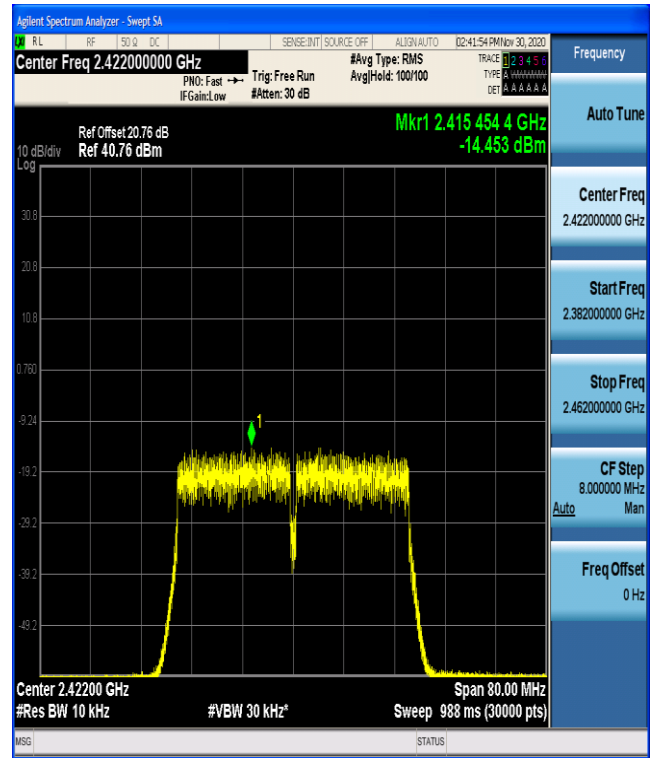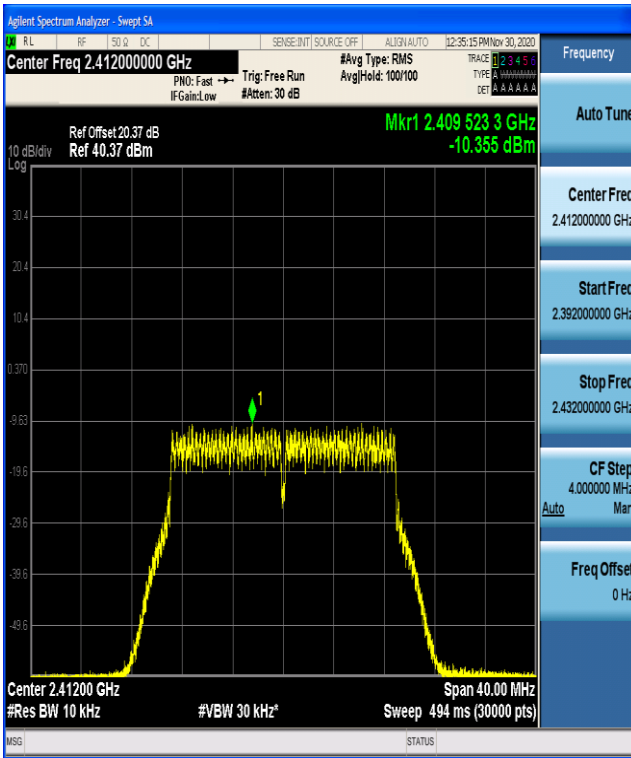

Lowest channel

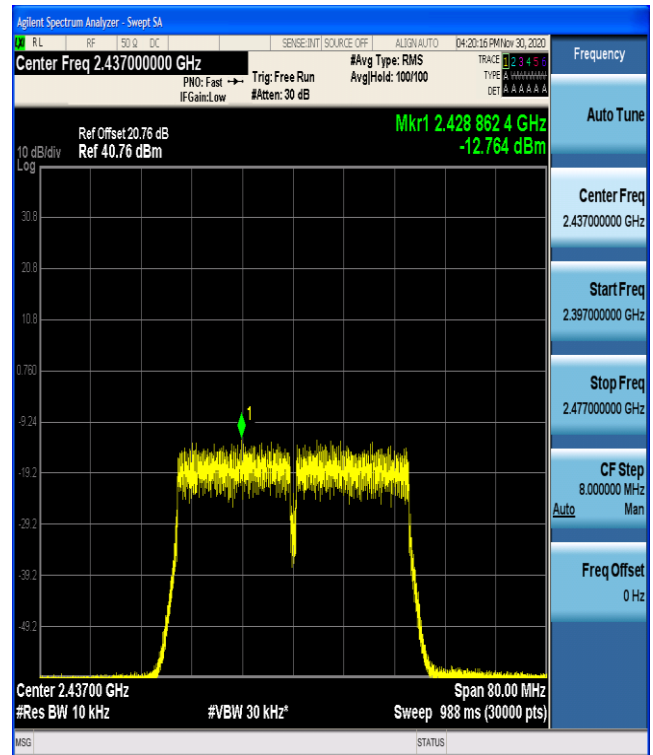
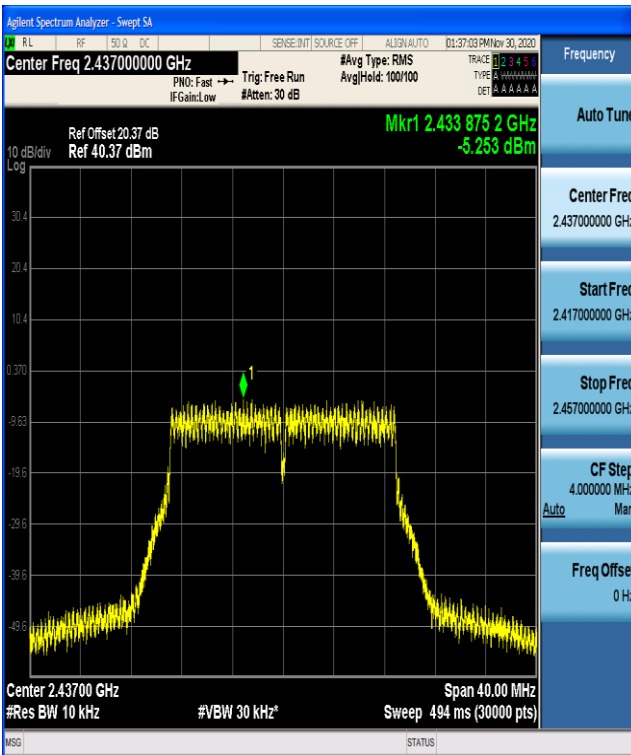


Middle channel

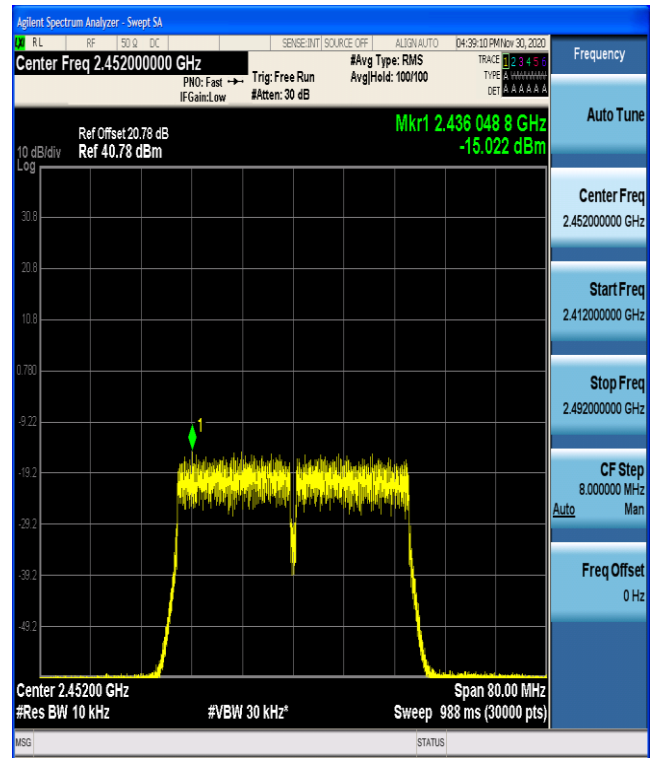
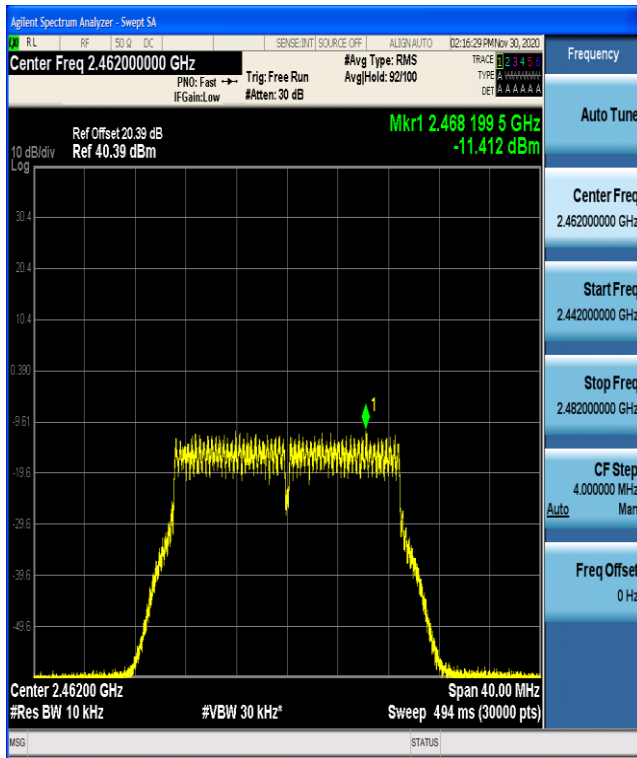


Highest channel



802.11ax(HT20)	802.11ax(HT40)
----------------	----------------

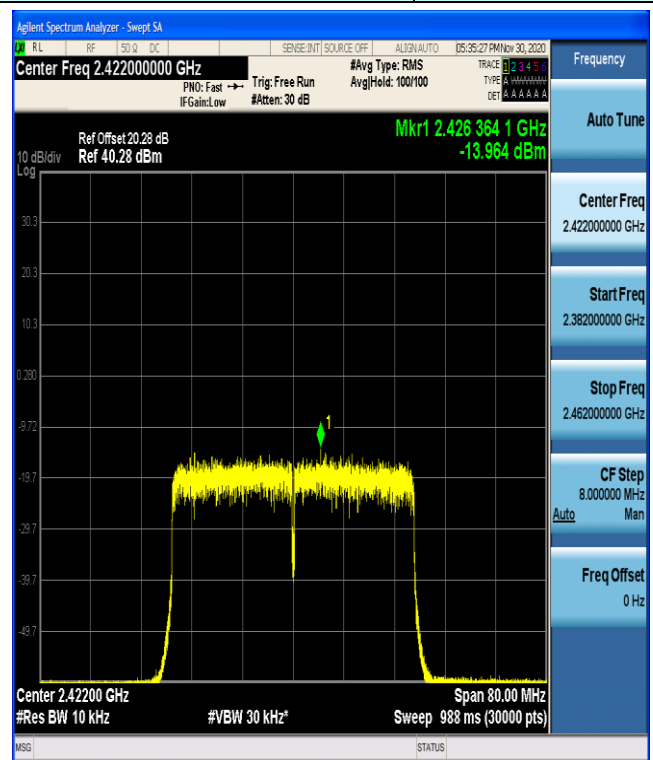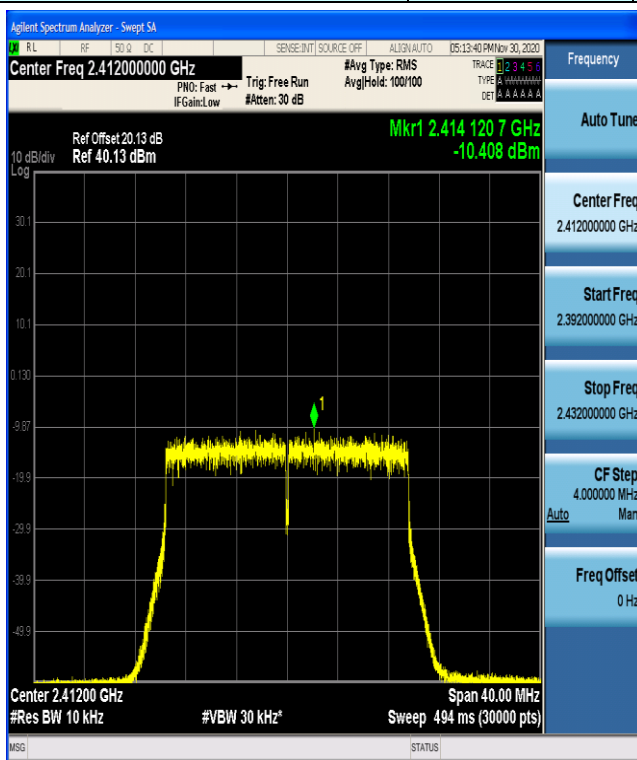

Lowest channel

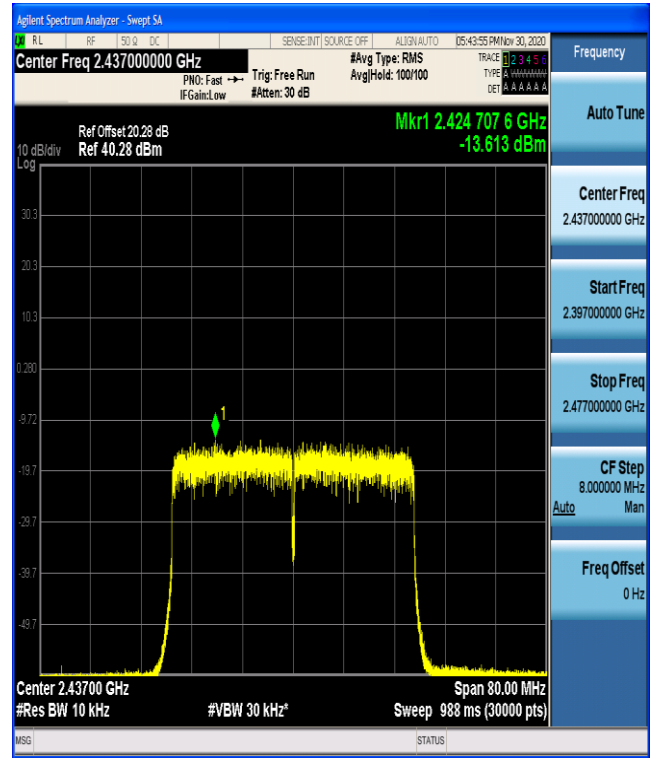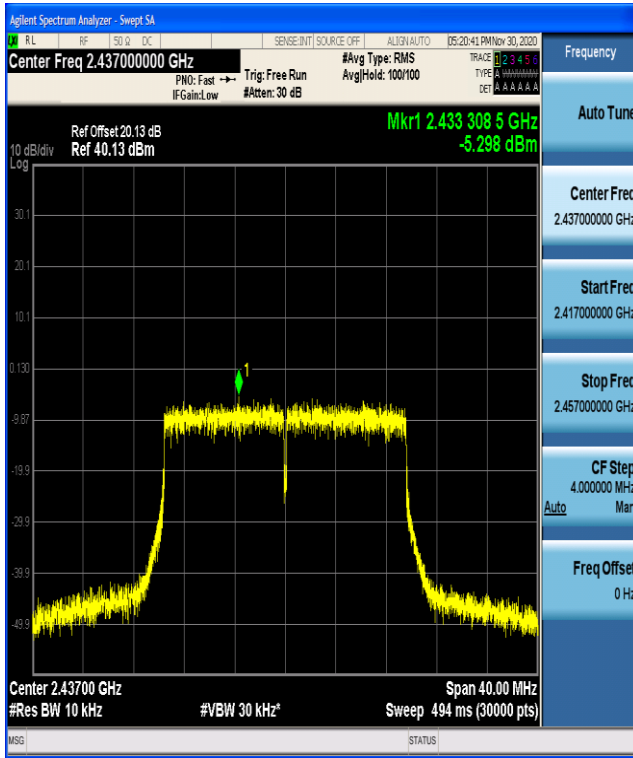


Middle channel

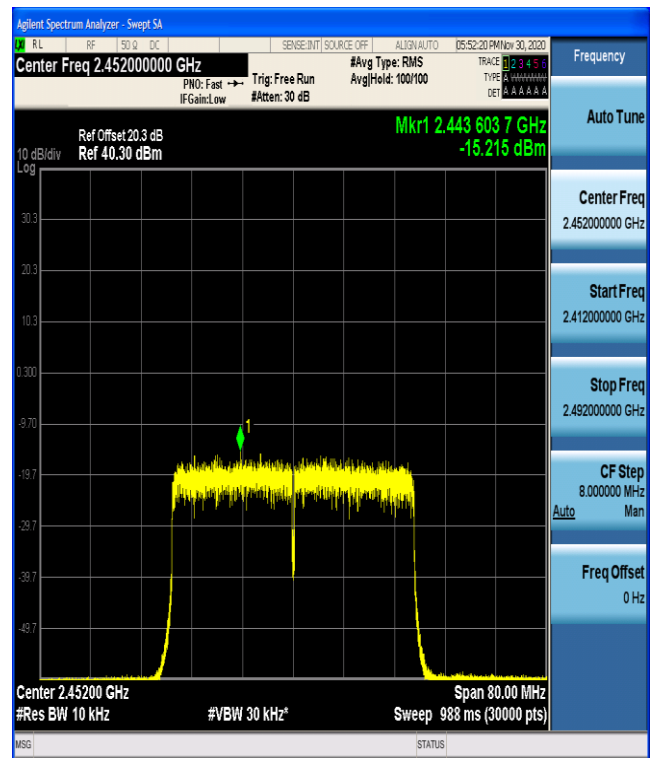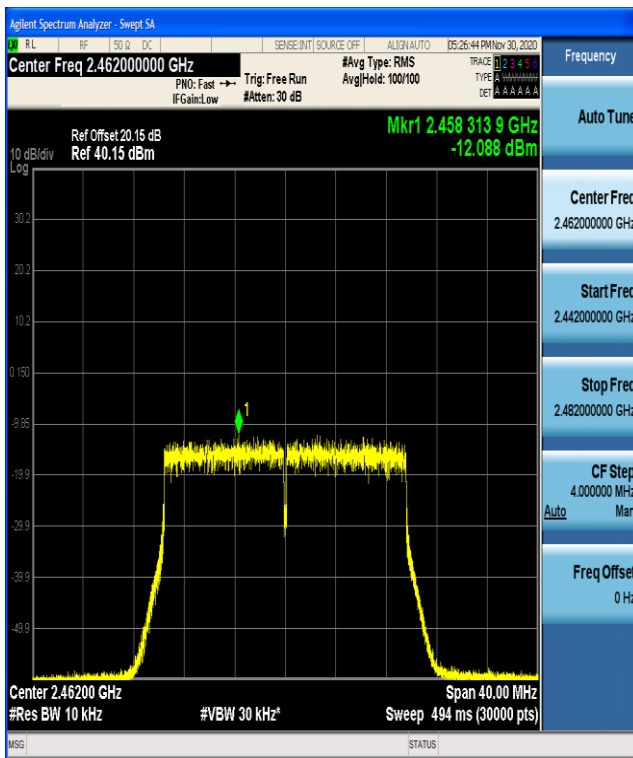



Highest channel

7.6 Band edges

7.6.1 Conducted Emission Method

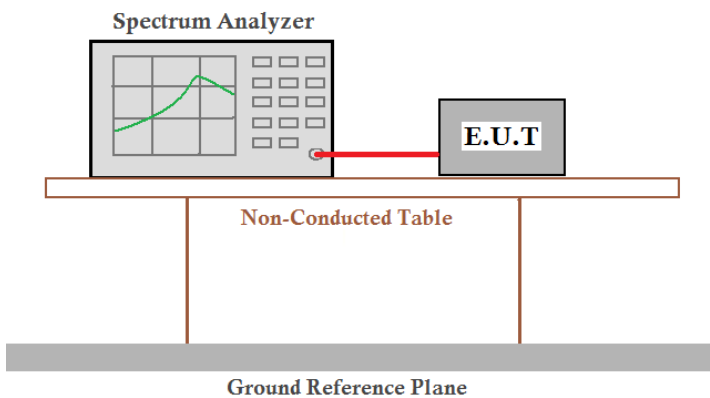
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D01 DTS Meas Guidance v05or02 KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

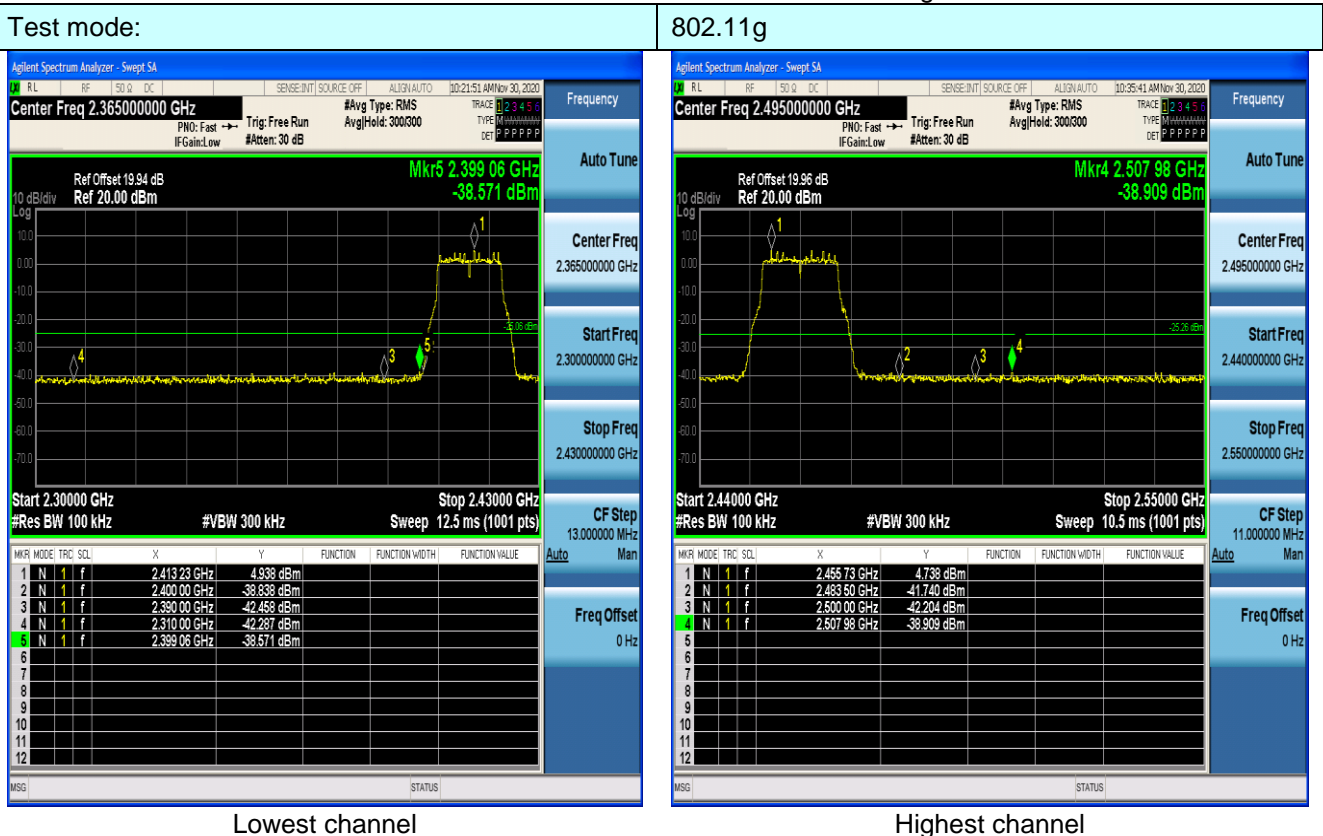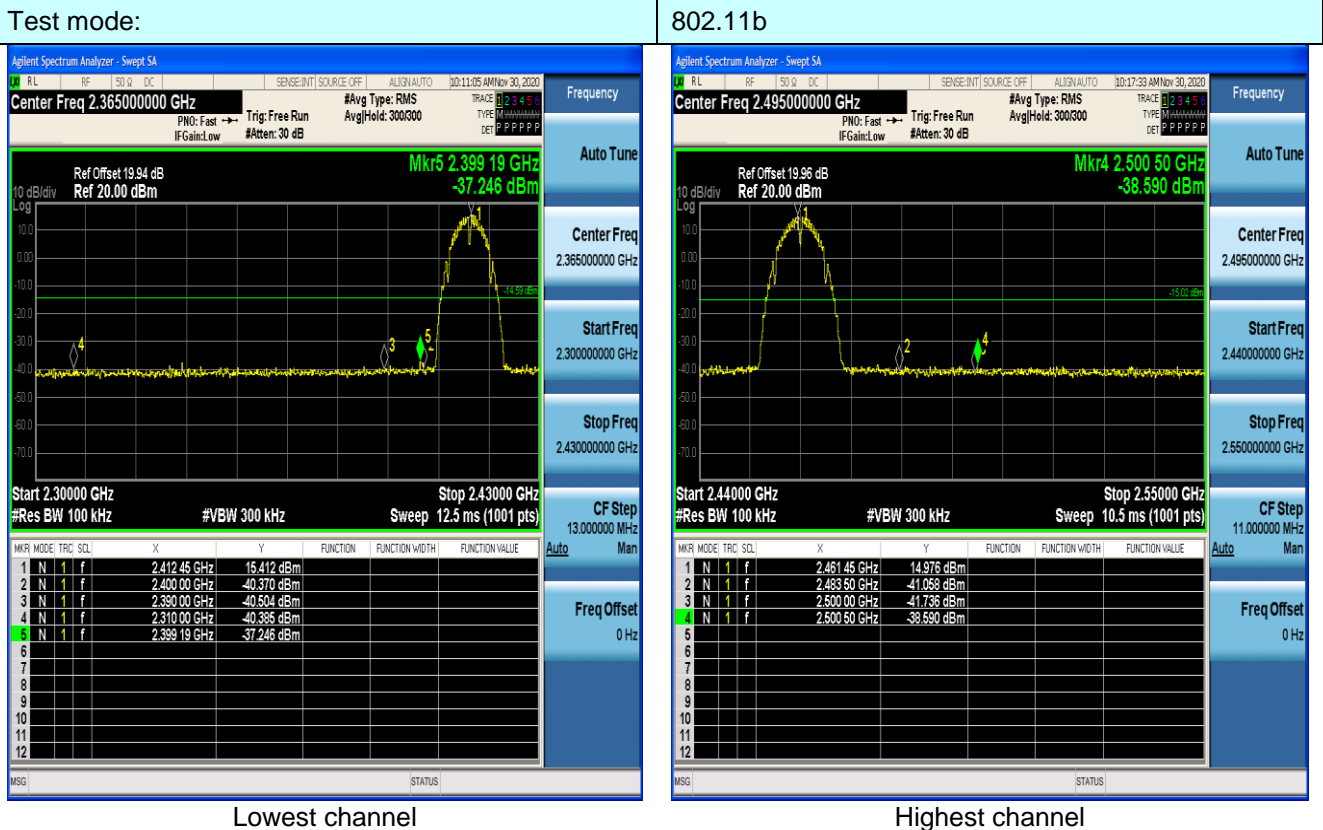


Test mode:

802.11n(HT20)

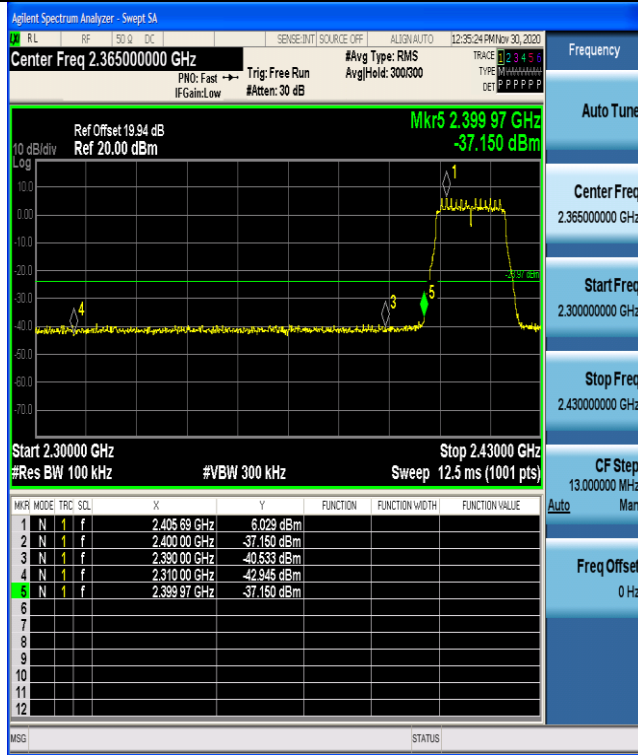


Lowest channel

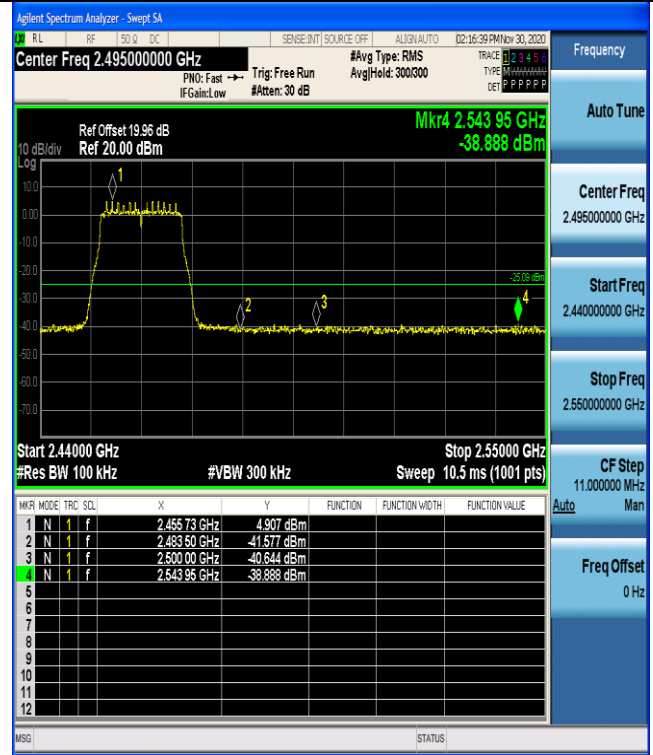


Highest channel

Test mode:

802.11n(HT40)

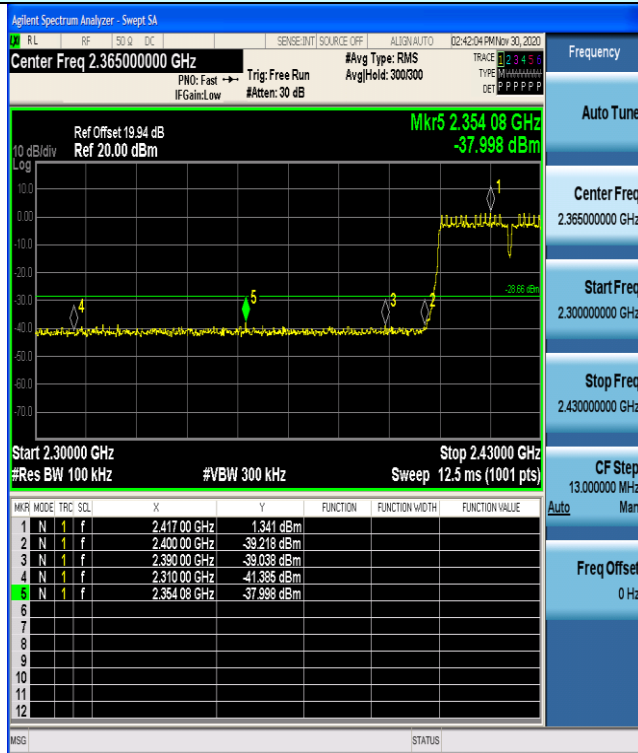


Lowest channel

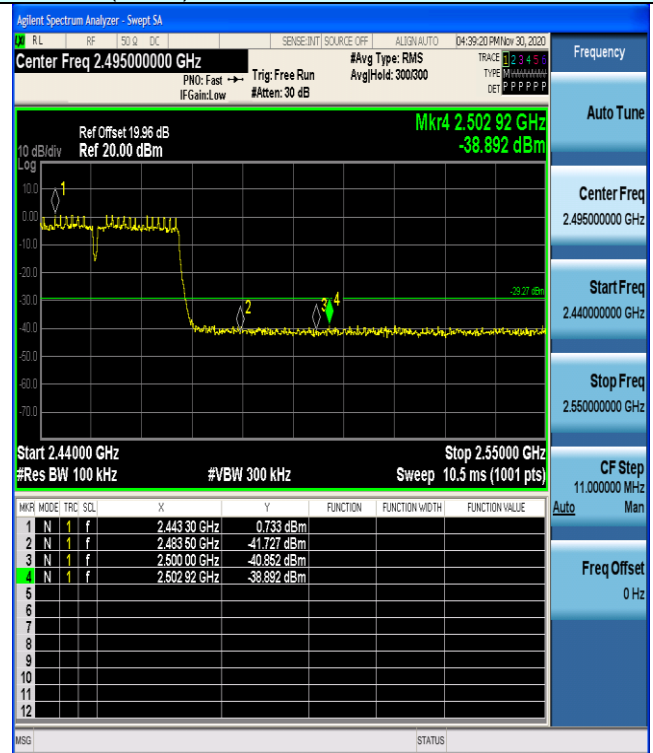


Highest channel

Test mode:

802.11ax(HT20)

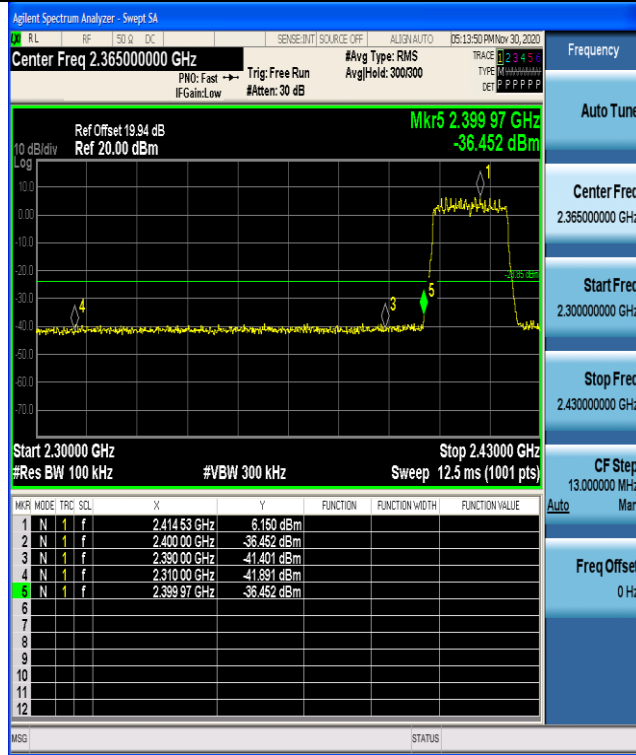

Lowest channel

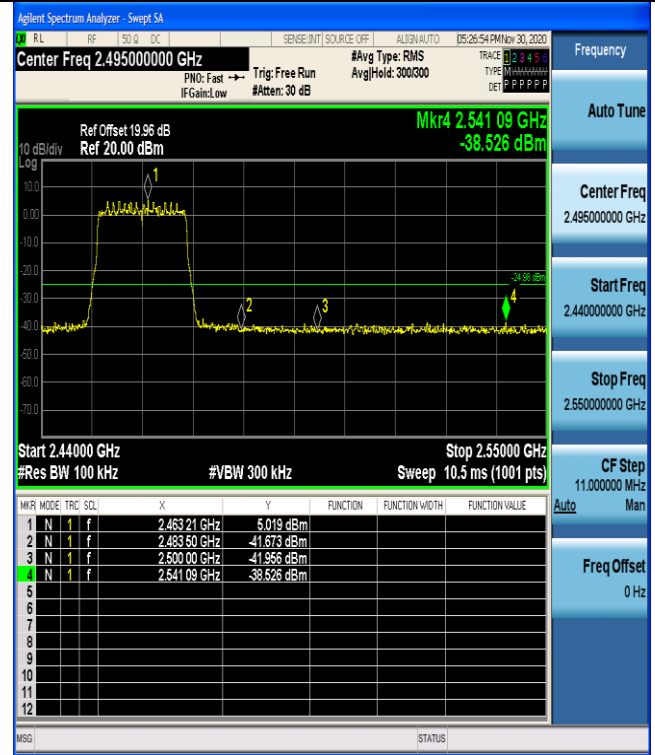

Highest channel

Test mode:

802.11ax(HT40)




Lowest channel



Highest channel

7.6.2 Radiated Emission Method

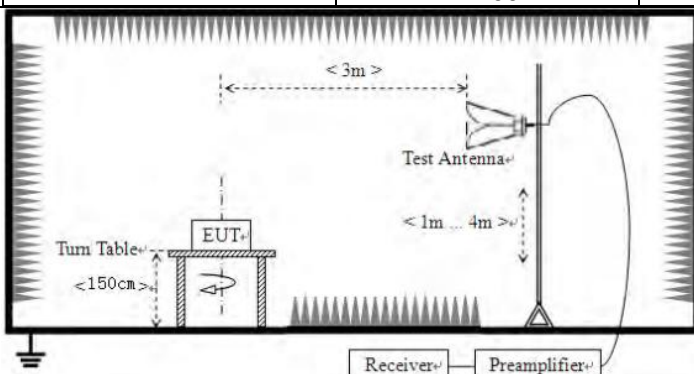
Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:

All the antennas were tested, and only show the worst case (ANT0) in this report.


Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11b 2412
 Note: -1
 Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

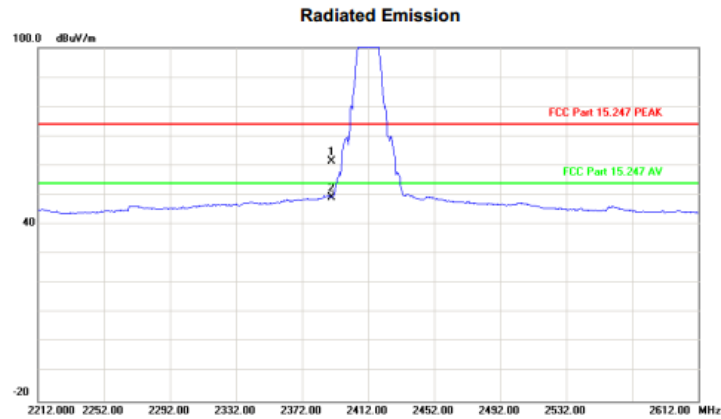

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	70.61	-9.11	61.50	74.00	-12.50	peak	
2		2390.000	58.33	-9.11	49.22	54.00	-4.78	AVG	
3 *		2412.800	124.79	-9.10	115.69	54.00	61.69	AVG	

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11b 2412
 Note: -1
 Polarization: **Horizontal**
 Power:
 Temperature: 25
 Humidity: 55 %

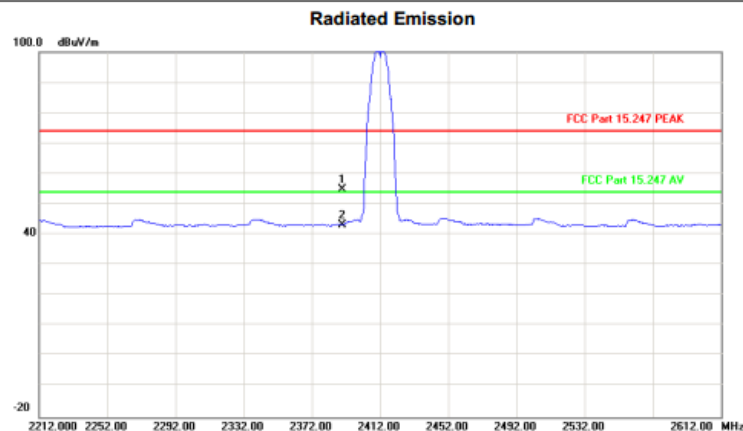


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	64.01	-9.11	54.90	74.00	-19.10	peak	
2 *		2390.000	52.41	-9.11	43.30	54.00	-10.70	AVG	

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11b 2462
 Note: -1


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

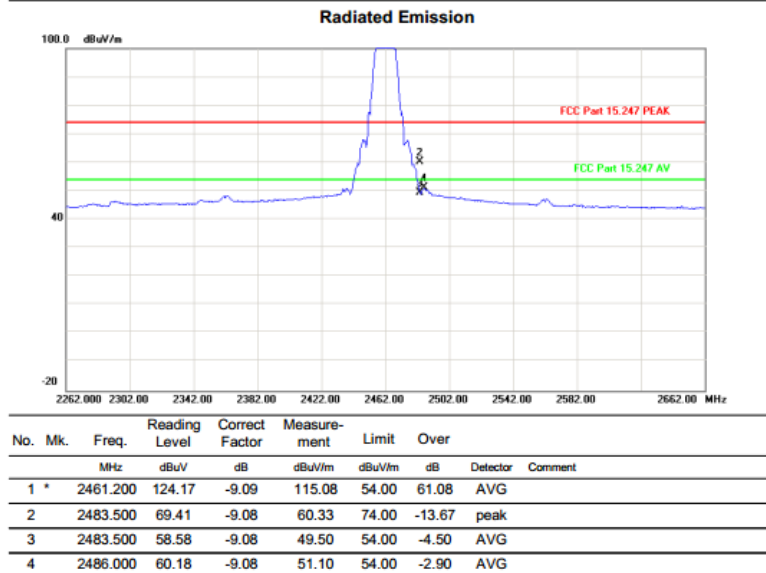

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11g 2412
 Note: 70


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

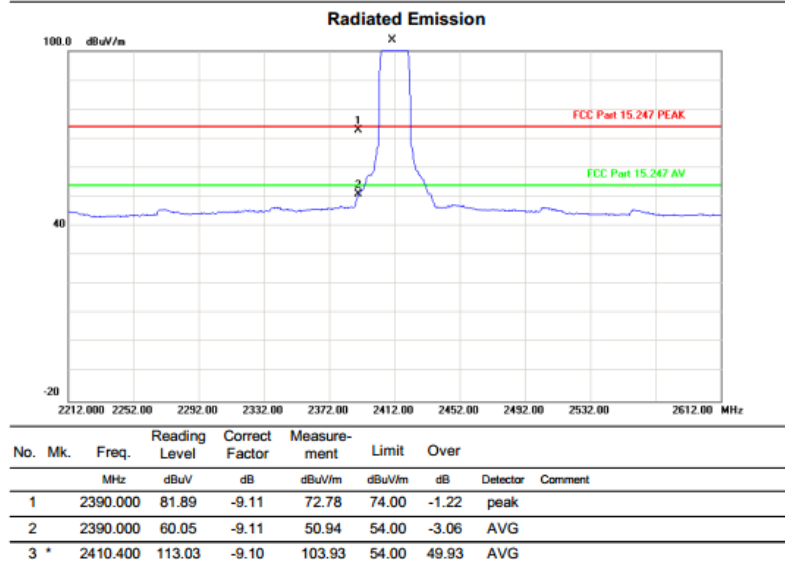

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Site: site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11g 2462
 Note: 72


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

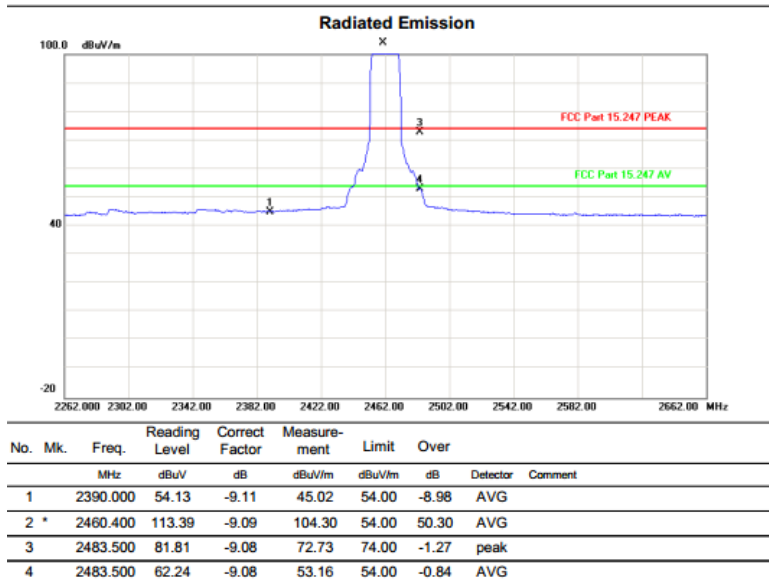

All mode (MIMO mode & SISO mode) were tested, and only show the worst case (MIMO mode) in this report.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------


Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11n HT20 2412
 Note: 76
 Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

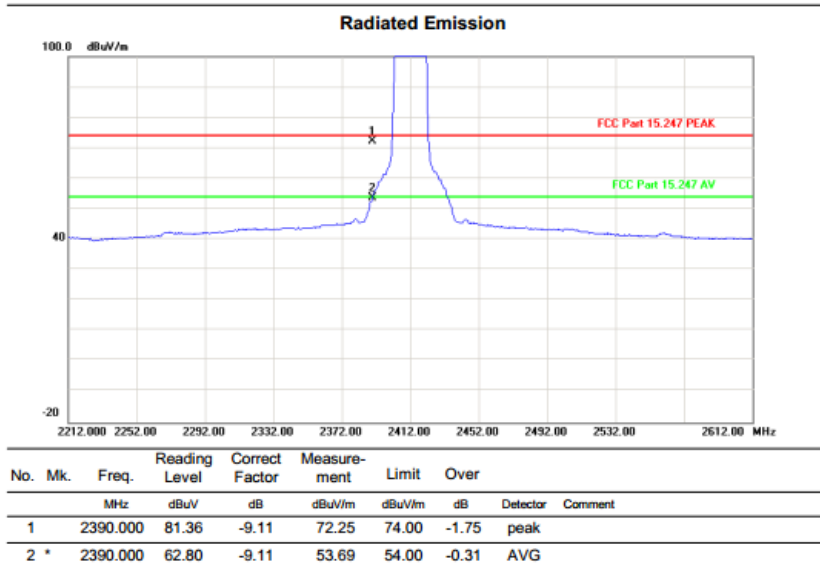

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11n HT20 2437
 Note: -1


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

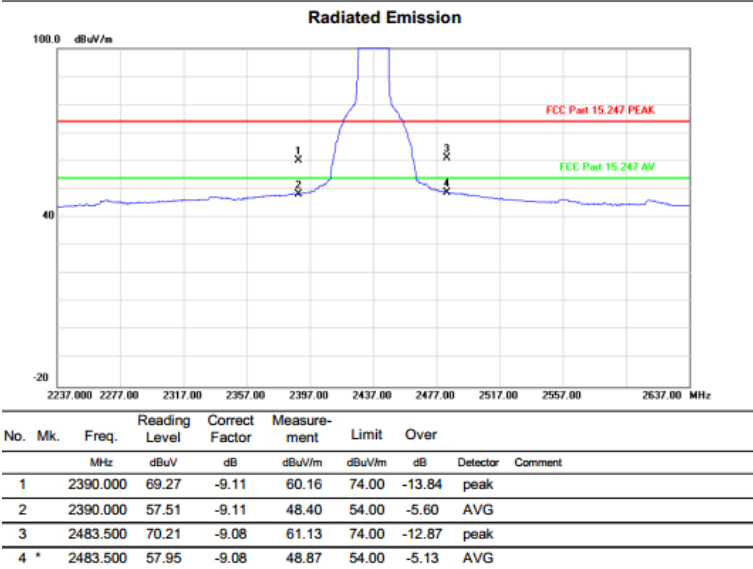

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11n HT20 2462
 Note: 72


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

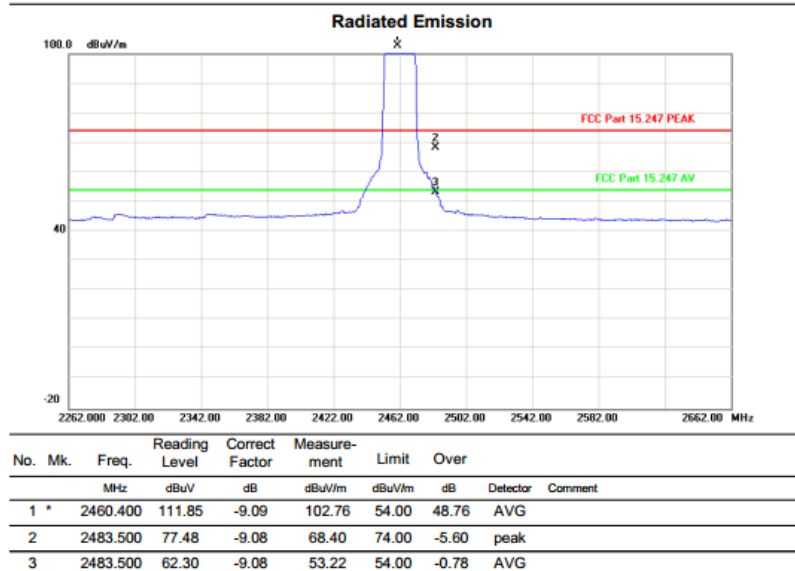

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11n HT40 2422
 Note: 68


Polarization: **Vertical**
 Power:
 Temperature: 25
 Humidity: 55 %

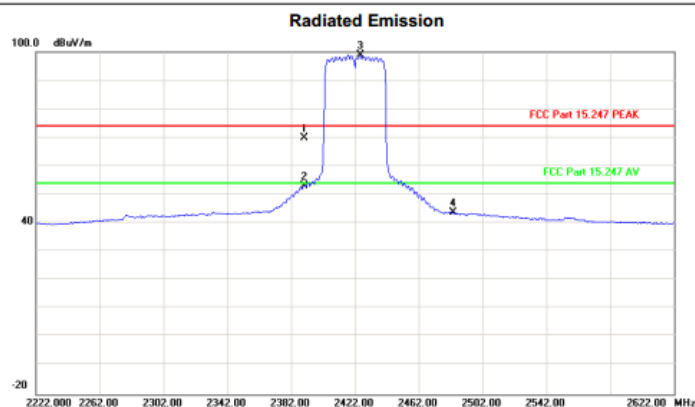

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	79.07	-9.11	69.96	74.00	-4.04	peak	
2		2390.000	62.23	-9.11	53.12	54.00	-0.88	AVG	
3 *		2425.200	108.13	-9.10	99.03	54.00	45.03	AVG	
4		2483.500	52.71	-9.08	43.63	54.00	-10.37	AVG	

Site site #1
 Limit: FCC Part 15.247 PEAK
 EUT: W6 WIFI6
 M/N:
 Mode: 11n HT40 2422
 Note: 68

Polarization: **Horizontal**
 Power:
 Temperature: 25
 Humidity: 55 %

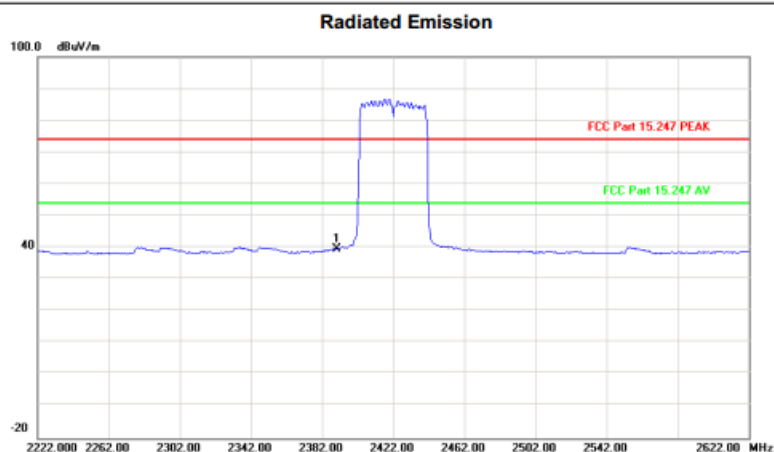

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *		2390.000	48.53	-9.11	39.42	74.00	-34.58	peak	