

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

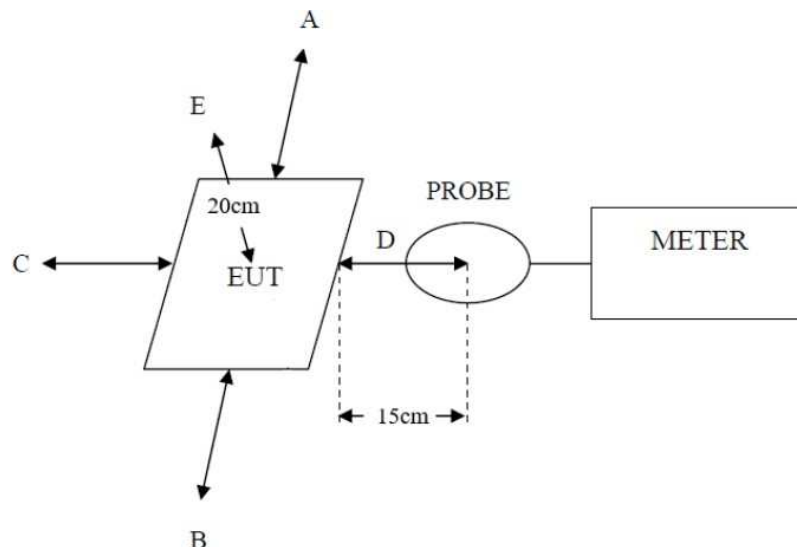
RESULT:
Pass
Test Specification

Test standard : FCC CFR Title 47, Part 2, Subpart J, Section 2.1091
 : FCC CFR Title 47, Part 1, Subpart I, Section 1.1310
 KDB 680106 D01 v03r01

According to the table 1 of FCC Part 1, Subpart I, Section 1.1310, the reference limit as below:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

Test Setup:


Test Result:

Table: H-Field Strength at 15 cm from the edges surrounding the EUT and 20cm from the top surface of the EUT

EUT Test Mode	Measured H-Field Strength Values (A/m)					50% Limit (A/m)	Limit (A/m)	Result
	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E			
Device working at the maximum power	0.2296	0.2832	0.2384	0.2496	0.2584	0.815	1.63	Pass