

# RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

## CERTIFICATE OF COMPLIANCE SAR EVALUATION

Impulse Dynamics (USA) Inc.

50 Lake Center Executive Parkway, Suite 100  
Marlton, NJ 08053

Dates of Test: February 28 – March 4, 2022

Test Report Number:

SAR.20220306

Revision C

FCC ID:	2AY43-EG25G
Model(s):	13-100-005
Test Sample:	Engineering Unit Same as Production
Serial Number:	02007
Equipment Type:	Wireless Implant Charger
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	699 – 716 MHz, 777 – 787 MHz, 814 – 849 MHz, 1710 – 1780 MHz, 1850 – 1915 MHz, 2496 – 2690 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	750 MHz (LTE) – 24.0 dBm, 850 MHz (GSM) – 33.0 dBm, 850 MHz (WCDMA) – 24.0 dBm, 850 MHz (LTE) – 24.0 dBm, 1750 MHz (WCDMA) – 24.0 dBm, 1750 MHz (LTE) – 24.0 dBm, 1900 MHz (GSM) – 30.0 dBm, 1900 MHz (WCDMA) – 24.0 dBm, 1900 MHz (LTE) – 23.5 dBm, 2550 MHz (LTE) – 23.0 dBm Conducted
Signal Modulation:	GMSK, 8-PSK, WCDMA, QPSK, 16QAM
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 15C, 22, 24, 27
KDB Test Methodology:	KDB 447498 D01 v07, KDB 941225 D01 v03r01, D02 v02r01 & D05 v02r05
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Max. Stand Alone SAR Value:	1.40 W/kg Reported
Separation Distance:	0 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-1528:2020 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton  
Vice President



Testing Cert. # 2387.01

## Table of Contents

1.	Introduction .....	4
	SAR Definition [5].....	5
2.	SAR Measurement Setup .....	6
	Robotic System .....	6
	System Hardware.....	6
	System Electronics.....	7
	Probe Measurement System .....	7
3.	Probe and Dipole Calibration .....	14
4.	Phantom & Simulating Tissue Specifications .....	15
	Head & Body Simulating Mixture Characterization .....	15
5.	ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2].....	16
	Uncontrolled Environment .....	16
	Controlled Environment.....	16
6.	Measurement Uncertainty.....	17
7.	System Validation.....	18
	Tissue Verification .....	18
	Test System Verification.....	18
8.	LTE Document Checklist .....	20
9.	SAR Test Data Summary .....	25
	Procedures Used To Establish Test Signal .....	25
	Device Test Condition .....	25
	9.1 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA.....	26
	9.2 SAR Measurement Conditions for GSM.....	28
	SAR Data Summary – 750 MHz Body – LTE Band 12 .....	69
	SAR Data Summary – 750 MHz Body – LTE Band 13 .....	70
	SAR Data Summary – 835 MHz Body – GPRS Band 5.....	71
	SAR Data Summary – 835 MHz Body - WCDMA .....	72
	SAR Data Summary – 835 MHz Body – LTE Band 26 .....	73
	SAR Data Summary – 1750 MHz Body - WCDMA .....	74
	SAR Data Summary – 1750 MHz Body – LTE Band 4 .....	75
	SAR Data Summary – 1900 MHz Body – GPRS Band 2.....	76
	SAR Data Summary – 1900 MHz Body - WCDMA .....	77
	SAR Data Summary – 1900 MHz Body – LTE Band 25.....	78
	SAR Data Summary – 2600 MHz Body – LTE Band 7 .....	79
	SAR Data Summary – 2550 MHz Body – LTE Band 41.....	80
	Carrier Aggregation Evaluation.....	81
10.	Test Equipment List.....	82
11.	Conclusion.....	83
12.	References .....	84
	Appendix A – System Validation Plots and Data .....	85
	Appendix B – SAR Test Data Plots .....	98
	Appendix C – SAR Test Setup Photos .....	111
	Appendix D – Probe Calibration Data Sheets.....	116
	Appendix E – Dipole Calibration Data Sheets .....	127
	Appendix F – Phantom Calibration Data Sheets.....	158
	Appendix G – Validation Summary.....	160

Comment/Revision	Date
Original Release	March 8, 2022
Revision A – Correct FCC ID, add note that this report is for the cellular modem integration and change NFC to ISM	March 9, 2022
Revision B – Add drawing show location of antennas and module, correct test positions for photos and correct band 25 channels and frequencies.	April 11, 2022
Revision C – Correct reported SAR value for GSM Band 2	May 12, 2022

**Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.**

## 1. Introduction

This measurement report shows compliance of the Impulse Dynamics (USA) Inc. Model 13-100-005 FCC ID: 2AY43-EG25G with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices. The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Impulse Dynamics (USA) Inc. Model 13-100-005 and therefore apply only to the tested sample.

The test procedures and limits, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the 13-100-005 Wireless Implant Charger. The table also shows the tolerance for the power level for each mode.

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 12 – 750 MHz	LTE	23.0	23.0	±1.0	22.0	24.0
Band 13 – 750 MHz	LTE	23.0	23.0	±1.0	22.0	24.0
Band 5 & 26 – 835 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 4 – 1750 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 2 & 25 – 1900 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 7 – 2550 MHz	LTE	22.0	22.0	±1.0	22.0	24.0
Band 41 – 2550 MHz	LTE	22.0	22.0	±1.0	22.0	24.0
Band 5 – 850 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 4 – 1750 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 2 – 1900 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 5 – 850 MHz	GSM	N/A	N/A	N/A	N/A	33.0
Band 2 – 1900 MHz	GSM	N/A	N/A	N/A	N/A	30.0
402-405 MHz	MICS	N/A	N/A	N/A	N/A	<1.0
13.56 MHz	ISM	N/A	N/A	N/A	N/A	<1.0

**Note:** There is no simultaneous transmission allowed between the transmitters.

**Note:** The report is for the integration of the cellular modem into the Battery Charger which contains the MICS and ISM radios.

**SAR Definition [5]**

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = rms electric field strength (V/m)


## 2. SAR Measurement Setup

### Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

### System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

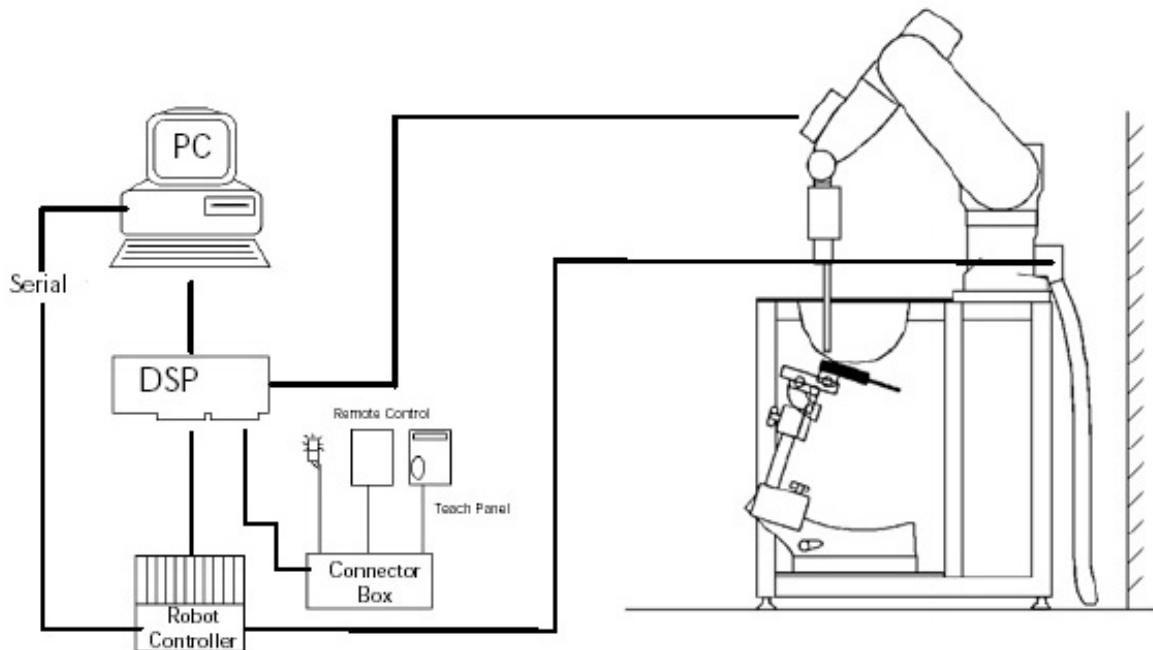

**Figure 2.1 SAR Measurement System Setup**

## System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

## Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



**DAE System**

**Probe Specifications**

**Calibration:** In air from 10 MHz to 6.0 GHz  
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

**Frequency:** 10 MHz to 6 GHz

**Linearity:**  $\pm 0.2$ dB (30 MHz to 6 GHz)

**Dynamic:** 10 mW/kg to 100 W/kg

**Range:** Linearity:  $\pm 0.2$ dB

**Dimensions:** Overall length: 330 mm

**Tip length:** 20 mm

**Body diameter:** 12 mm

**Tip diameter:** 2.5 mm

**Distance from probe tip to sensor center:** 1 mm

**Application:** SAR Dosimetry Testing  
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique



**Probe Calibration Process**

**Dosimetric Assessment Procedure**

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

**Free Space Assessment**

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

**Temperature Assessment \***

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

$\Delta t$  = exposure time (30 seconds),

$\sigma$  = simulated tissue conductivity,


C = heat capacity of tissue (brain or muscle),

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)


$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

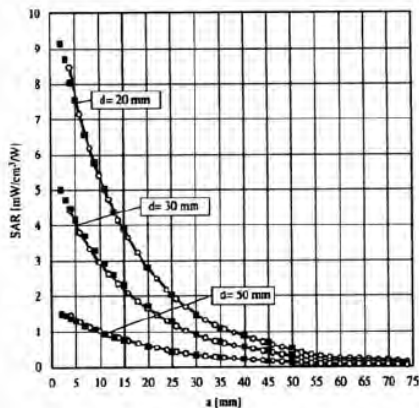

**Figure 2.4 E-Field and Temperature Measurements at 900MHz**

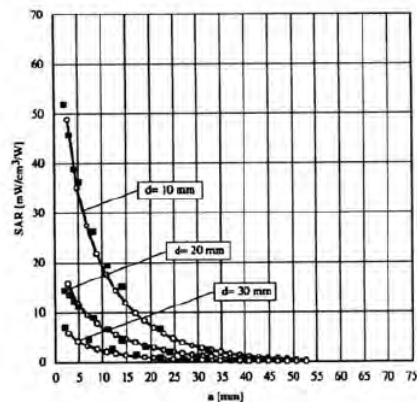

**Figure 2.5 E-Field and Temperature Measurements at 1800MHz**

## Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with

- $V_i$  = compensated signal of channel i (i=x,y,z)
- $U_i$  = input signal of channel i (i=x,y,z)
- cf = crest factor of exciting field (DASY parameter)
- dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with

- $V_i$  = compensated signal of channel i (i = x,y,z)
- Norm<sub>i</sub> = sensor sensitivity of channel i (i = x,y,z)  
μV/(V/m)<sup>2</sup> for E-field probes
- ConvF = sensitivity of enhancement in solution
- $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with

- SAR = local specific absorption rate in W/g
- $E_{tot}$  = total field strength in V/m
- σ = conductivity in [mho/m] or [Siemens/m]
- ρ = equivalent tissue density in g/cm<sup>3</sup>

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with

- $P_{free}$  = equivalent power density of a plane wave in W/cm<sup>2</sup>
- $E_{tot}$  = total electric field strength in V/m

## Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges  $\leq 2$ GHz is 15 mm in x - and y-dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
$\leq 2$ GHz	$\leq 15$ mm
2 – 4 GHz	$\leq 12$ mm
4 – 6 GHz	$\leq 10$ mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
$\leq 2$ GHz	$\leq 8$ mm	$\leq 5$ mm	$\geq 30$ mm
2 – 3 GHz	$\leq 5$ mm	$\leq 5$ mm	$\geq 28$ mm
3 – 4 GHz	$\leq 5$ mm	$\leq 4$ mm	$\geq 28$ mm
4 – 5 GHz	$\leq 4$ mm	$\leq 3$ mm	$\geq 25$ mm
5 – 6 GHz	$\leq 4$ mm	$\leq 2$ mm	$\geq 22$ mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test

results relevant for the specified standard (see section 3) are shown in table form in section 7.

## Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

## Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

## Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

## Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

## Advanced Extrapolation


DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

**SAM PHANTOM**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

**Phantom Specification**

**Phantom:** SAM Twin Phantom (V4.0)  
**Shell Material:** Vivac Composite  
**Thickness:**  $2.0 \pm 0.2$  mm

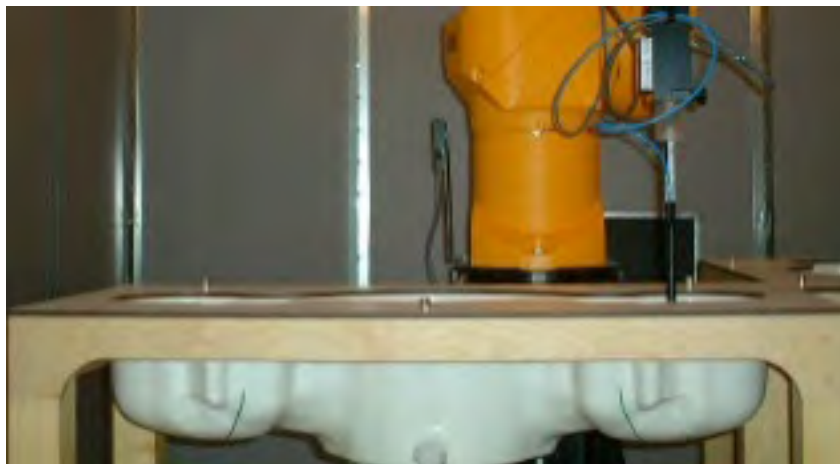

**Figure 2.6 SAM Twin Phantom**

**Device Holder for Transmitters**

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatedly be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 2.7 Mounting Device**

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

### **3. Probe and Dipole Calibration**

**See Appendix D and E.**

## 4. Phantom & Simulating Tissue Specifications

### Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in IEEE1528 – 2013 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 4.1 Typical Composition of Ingredients for Tissue**

Ingredients		Simulating Tissue				
		750 MHz Head	900 MHz Head	1750 MHz Head	1900 MHz Head	2550 MHz Head
Mixing Percentage						
Water		Proprietary Purchased From Speag				
Sugar						
Salt						
HEC						
Bactericide						
DGBE						
Dielectric Constant	Target	41.94	41.50	40.08	40.00	39.07
Conductivity (S/m)	Target	0.89	0.97	1.37	1.40	1.91

## 5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Head	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



## 6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

## 7. System Validation

### Tissue Verification

**Table 7.1 Measured Tissue Parameters**

		750 MHz Head		900 MHz Head		1750 MHz Head	
Date(s)		Mar. 4, 2022		Mar. 2, 2022		Mar. 1, 2022	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		41.94	41.46	41.50	41.34	40.08	39.24
Conductivity: $\sigma$		0.89	0.90	0.97	0.98	1.37	1.40
		1900 MHz Head		2550 MHz Head			
Date(s)		Feb. 28, 2022		Mar. 3, 2022			
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		40.00	39.87	39.07	38.95		
Conductivity: $\sigma$		1.40	1.39	1.91	1.94		

See Appendix A for data printout.


### Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

**Table 7.2 System Dipole Validation Target & Measured**


	Test Frequency	Targeted SAR <sub>1g</sub> (W/kg)	Measure SAR <sub>1g</sub> (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
04-Mar-2022	750 MHz	8.57	8.58	Head	+ 0.12	1
02-Mar-2022	900 MHz	11.20	11.50	Head	+ 2.68	2
01-Mar-2022	1750 MHz	37.70	37.80	Head	+ 0.27	3
28-Feb-2022	1900 MHz	40.40	41.50	Head	+ 2.72	4
03-Mar-2022	2550 MHz	55.30	56.40	Head	+ 1.99	5

See Appendix A for data plots.

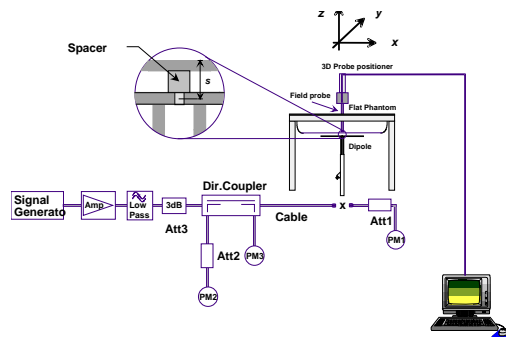

**Figure 7.1 Dipole Validation Test Setup**

**Location of Antennas and Module**

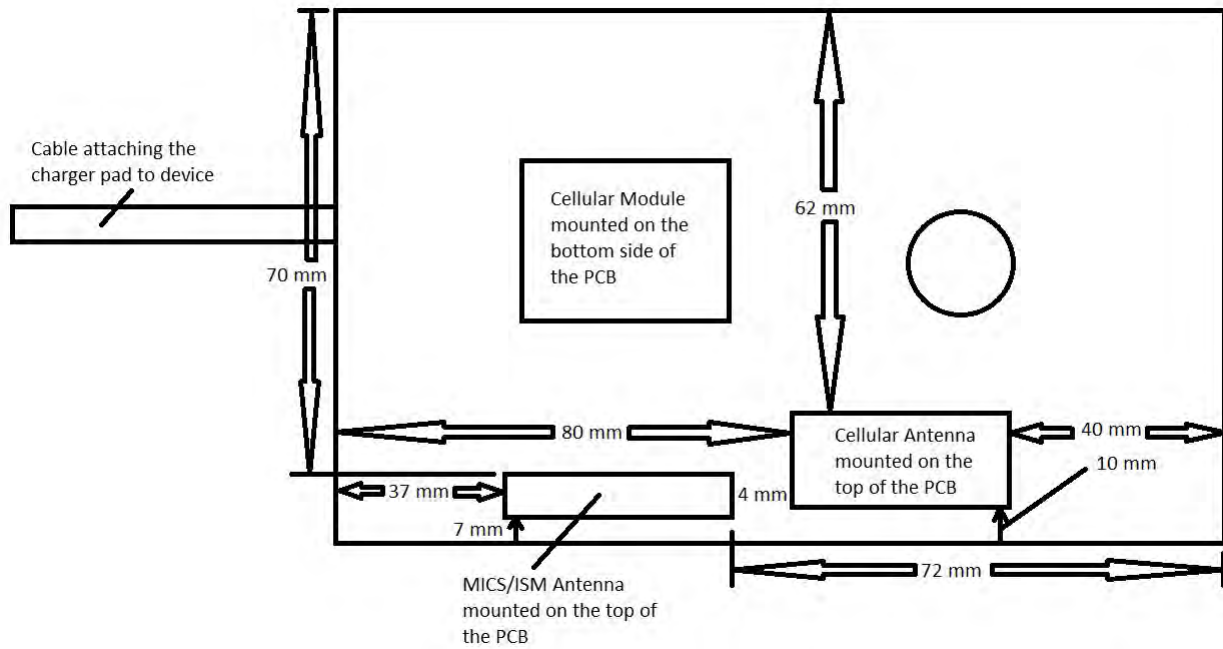

## 8. LTE Document Checklist

- 1) Identify the operating frequency range of each LTE transmission band used by the device

LTE Operating Band	Uplink (transmit)	Downlink (Receive)	Duplex mode (FDD/TDD)
	Low - high	Low - high	
2	1850-1910	1930-1990	FDD
4	1710-1755	2110-2155	FDD
5	824-849	869-894	FDD
7	2500-2570	2620-2690	FDD
12	699-716	729-746	FDD
13	777-787	746-756	FDD
25	1850-1915	1930-1995	FDD
26	814-849	859-894	FDD
41	2496-2690	2496-2690	TDD

- 2) Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
2	1.4, 3, 5, 10, 15, 20	1850-1910 MHz
4	1.4, 3, 5, 10, 15, 20	1710-1755 MHz
5	1.4, 3, 5, 10	824-849 MHz
7	5, 10, 15, 20	2500-2570 MHz
12	1.4, 3, 5, 10	699-716 MHz
13	5, 10	777-787 MHz
25	1.4, 3, 5, 10, 15, 20	1850-1915 MHz
26	1.4, 3, 5, 10, 15	814-849 MHz
41	5, 10, 15, 20	2496-2690 MHz

- 3) Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band

LTE Band Class	Bandwidth (MHz)	Frequency (MHz)/Channel #					
		Low		Mid		High	
2	1.4	1850.7	18607	1880.0	18900	1909.3	19193
2	3	1851.5	18615	1880.0	18900	1908.5	19185
2	5	1852.5	18625	1880.0	18900	1907.5	19175
2	10	1855.0	18650	1880.0	18900	1905.0	19150
2	15	1857.5	18675	1880.0	18900	1902.5	19125
2	20	1860.0	18700	1880.0	18900	1900.0	19100
4	1.4	1710.7	19957	1732.5	20175	1754.3	20393
4	3	1711.5	19965	1732.5	20175	1753.5	20385
4	5	1712.5	19975	1732.5	20175	1752.5	20375
4	10	1715.0	20000	1732.5	20175	1750.0	20350
4	15	1717.5	20025	1732.5	20175	1747.5	20325
4	20	1720.0	20050	1732.5	20175	1745.0	20300
5	1.4	824.7	20407	836.5	20525	848.3	20643
5	3	825.5	20415	836.5	20525	847.5	20635
5	5	826.5	20425	836.5	20525	846.5	20625
5	10	829.0	20450	836.5	20525	844.0	20600
7	5	2502.5	20775	2535.0	21100	2567.5	21425
7	10	2505.0	20800	2535.0	21100	2565.0	21400
7	15	2507.5	20825	2535.0	21100	2562.5	21375
7	20	2510.0	20850	2535.0	21100	2560.0	21350
12	1.4	699.7	23017	707.5	23095	715.3	23173
12	3	700.5	23025	707.5	23095	714.5	23165
12	5	701.5	23035	707.5	23095	713.5	23155
12	10	704.0	23060	707.5	23095	711.0	23130
13	5	779.5	23205	782.0	23230	784.5	23225
13	10	-----	-----	782.0	23230	-----	-----
25	1.4	1850.7	26047	1882.5	26365	1914.3	26683
25	3	1851.5	26055	1882.5	26365	1913.5	26675
25	5	1852.5	26065	1882.5	26365	1912.5	26665
25	10	1855.0	26090	1882.5	26365	1910.0	26640
25	15	1857.5	26115	1882.5	26365	1907.5	26615
25	20	1860.0	26140	1882.5	26365	1905.0	26590
26	1.4	814.7	26697	831.5	26865	848.3	27033
26	3	815.5	26705	831.5	26865	847.5	27025
26	5	816.5	26715	831.5	26865	846.5	27015
26	10	819.0	26740	831.5	26865	844.0	26990
26	15	821.5	26765	831.5	26865	841.5	26995
41	5	2498.5	39675	2593	40620	2687.5	41565
41	10	2501.0	39700	2593	40620	2685.0	41540
41	15	2503.5	39725	2593	40620	2682.5	41515
41	20	2506.0	39750	2593	40620	2680.0	41490

- 4) Specify the UE category and uplink modulations used:
  - UE Category: 3
  - Uplink modulations: QPSK and 16QAM
- 5) Include descriptions of the LTE transmitter and antenna implementation; and also identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc

The device has 4 antennas:

- WWAN Main (Transmit and Receive) Antenna
- WWAN Diversity (Receive Only) Antenna
- MICS Band (Transmit and Receive) Antenna
- ISM (Transmit Only) Antenna

Transmission relationship

- The device is unable to transmit GSM, WCDMA/HSPA or LTE simultaneously.
- The Diversity antenna is receive only antenna which is reserved for the WWAN operation.
- Rx is simultaneous on Main and Diversity
- Simultaneous Tx with the MICS and ISM is not allowed.

Antenna port	GSM/WCDMA/HSPA		LTE		MICS		ISM
	TX	RX	TX	RX	TX	RX	TX
#1 WWAN Main	Yes	Yes	Yes	Yes	No	No	No
#2 Diveristy	No	Yes	No	Yes	No	No	No
#3 MICS	No	No	No	No	Yes	Yes	No
#4 ISM	No	No	No	No	No	No	Yes

- 6) Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions etc

The device is a data only. Data mode was tested in each operating mode and exposure condition in the body configuration. See test setup photos to see all configurations tested.

- 7) Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design:
  - a) Only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards

MPR is mandatory, built-in by design on all production units. It was enabled during testing.

Modulation	Channel Bandwidth/transmission Bandwidth Configuration (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- b) A-MPR (additional MPR) must be disabled
- c) A-MPR was disabled during testing.

- 8) Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band:

The maximum average conducted output power measured for the testing is listed on pages 31-53 of this report. The below table shows the factory set point with the allowable tolerance.

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 12 – 750 MHz	LTE	23.0	23.0	±1.0	22.0	24.0
Band 13 – 750 MHz	LTE	23.0	23.0	±1.0	22.0	24.0
Band 5 & 26 – 835 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 4 – 1750 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 2 & 25 – 1900 MHz	LTE	22.5	22.5	±1.0	22.0	24.0
Band 7 – 2550 MHz	LTE	22.0	22.0	±1.0	22.0	24.0
Band 41 – 2550 MHz	LTE	22.0	22.0	±1.0	22.0	24.0

- 9) Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes

Other wireless modes:

Band	Technology	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 5 – 850 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 4 – 1750 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 2 – 1900 MHz	WCDMA/HSPA	23.0	23.0	±1.0	22.0	24.0
Band 5 – 850 MHz	GSM	N/A	N/A	N/A	N/A	33.0
Band 2 – 1900 MHz	GSM	N/A	N/A	N/A	N/A	30.0
402-405 MHz	MICS	N/A	N/A	N/A	N/A	<1.0
13.56 MHz	ISM	N/A	N/A	N/A	N/A	<1.0

- 10) Include the maximum average conducted output power measured for the other wireless modes and frequency bands.

The maximum average conducted output power measured for the testing is listed on pages 26-28 of this report. The table in item 9 shows the factory set point with the allowable tolerance.

- 11) Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)

The device is unable to transmit simultaneously.

- 12) When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup

Power reduction is not required to satisfy SAR compliance.

- 13) Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission

Power reduction is not required to satisfy SAR compliance.

- 14) When appropriate, include a SAR test plan proposal with respect to the above

Power reduction is not required to satisfy SAR compliance.

- 15) If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example, simultaneous transmission configurations.

Not applicable.



## **9. SAR Test Data Summary**

### **See Measurement Result Data Pages**

See Appendix B for SAR Test Data Plots.  
See Appendix C for SAR Test Setup Photos.

### **Procedures Used To Establish Test Signal**

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

### **Device Test Condition**

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula  $((\text{end}/\text{start})-1)*100$  and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The testing was conducted on all edges closest to the antenna. The front, back and left sides were tested. The remaining sides were not tested as the WWAN antenna was more than 2.5 cm from the side. All further test reductions are shown on pages 29 for WCDMA and GSM bands and pages 54-67 for LTE bands. See the photo in Appendix C for a pictorial of the setups and antenna locations.

The WCDMA testing was conducted using 12.2 kbps RMC configured in Test Loop Mode 1. The HSPA testing was conducted with HS-DPCCH, E-DPCCH and E-DPDCH all enabled and a 12.2 kbps RMC. FRC was configured according to HS-DPCCH Sub-Test 1 using H-set 1 and QPSK.

The device was on a minimum of 10 cm of Styrofoam during each test.

## 9.1 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA

Configure the call box 8960 to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table below). Measure the power at Ch4132, 4182 and 4233 for US cell; Ch9262, 9400 and 9538 for US PCS band.

For Rel99

- Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC).
- Set and send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with average detector.

For HSDPA Rel 6

- Establish a Test Mode 1 look back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8960 this is accomplished by setting the signal Channel Coding to “Fixed Reference Channel” and configuring for HSET-1 QKSP.
- Set beta values and HSDPA settings for HSDPA Subtest1 according to Table below.
- Send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with modulated average detector.
- Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table below.

For HSUPA Rel 6

- Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8960 this is accomplished by setting the signal Channel Coding to “E-DCH Test Channel” and configuring the equipment category to Cat5\_10ms.
- Set the Absolute Grant for HSUPA Subtest1 according to Table below.
- Set the device power to be at least 5dB lower than the Maximum output power
- Send power control bits to give one TPC\_cmd = +1 command to the device. If device doesn't send any E-DPCH data with decreased E-TFCl within 500ms, then repeat this process until the decreased E-TFCl is reported.
- Confirm that the E-TFCl transmitted by the device is equal to the target E-TFCl in Table below. If the E-TFCl transmitted by the device is not equal to the target E-TFCl, then send power control bits to give one TPC\_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCl within 500 ms, send new power control bits to give one TPC\_cmd = -1 command to the UE. Then confirm that the E-TFCl transmitted by the UE is equal to the target E-TFCl in Table below.
- Measure the power using the power meter with modulated average detector.
- Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table below.

### Full Power Measurements

3GPP Release Version	Mode	Cellular Band [dBm]			Sub-Test (See Table Below)	MPR
		4132	4183	4233		
99	WCDMA	23.27	23.15	23.10	-	-
6	HSDPA	23.03	23.09	23.14	1	0
6		23.45	23.20	23.46	2	0
6		22.98	22.59	22.60	3	0.5
6		22.99	22.90	22.64	4	0.5
6	HSUPA	23.24	23.33	23.34	1	0
6		21.43	21.03	21.37	2	2
6		22.37	22.25	22.05	3	1
6		21.31	21.14	21.02	4	2
6		23.15	23.31	23.14	5	0

3GPP Release Version	Mode	AWS Band [dBm]			Sub-Test (See Table Below)	MPR
		1312	1413	1513		
99	WCDMA	23.27	23.05	23.34	-	-
6	HSDPA	23.31	23.21	23.24	1	0
6		23.07	23.13	23.21	2	0
6		22.74	22.66	22.56	3	0.5
6		22.98	22.70	22.73	4	0.5
6	HSUPA	23.01	23.27	23.12	1	0
6		21.40	21.13	21.16	2	2
6		22.41	22.29	22.18	3	1
6		21.26	21.40	21.25	4	2
6		23.07	23.09	23.26	5	0

3GPP Release Version	Mode	PCS Band [dBm]			Sub-Test (See Table Below)	MPR
		9262	9400	9538		
99	WCDMA	23.01	23.10	23.36	-	-
6	HSDPA	23.26	23.18	23.44	1	0
6		23.28	23.07	23.13	2	0
6		22.58	22.94	22.86	3	0.5
6		22.64	22.80	22.59	4	0.5
6	HSUPA	23.03	23.08	23.05	1	0
6		21.06	21.49	21.46	2	2
6		22.21	22.28	22.05	3	1
6		21.28	21.35	21.26	4	2
6		23.34	23.21	23.34	5	0

**Sub-Test Setup for Release 6 HSDPA**

Sub-Test	$\beta_c$	$\beta_d$	$B_c/\beta_d$	$\beta_{hs}$
1	2/15	15/15	2/15	4/15
2	12/15	15/15	15/15	24/15
3	15/15	8/15	15/8	30/15
4	15/15	4/15	15/4	30/15
$\Delta_{ack}, \Delta_{nack}$ and $\Delta_{cqi} = 8$				

**Sub-Test Setup for Release 6 HSUPA**

Sub-Test	$\beta_c$	$\beta_d$	$B_c/\beta_d$	$\beta_{hs}$	$B_{ec}$	$B_{ed}$	MPR	AG Index	E-TFCI
1	11/15	15/15	11/15	22/15	209/225	1039/225	0.0	20	75
2	6/15	15/15	6/15	12/15	12/15	94/75	2.0	12	67
3	15/15	9/15	15/9	30/15	30/15	47/15	1.0	15	92
4	2/15	15/15	2/15	4/15	2/15	56/15	2.0	17	71
5	15/15	15/15	15/15	30/15	24/15	134/15	0.0	21	81
$\Delta_{ack}, \Delta_{nack}$ and $\Delta_{cqi} = 8$									

## 9.2 SAR Measurement Conditions for GSM

Configure the 8960 box to support GMSK and 8PSK call respectively, and set one timeslot and two timeslot transmission for GMSK GSM/GPRS and 8PSK EDGE. Measure and record power outputs for both modulations.

GPRS-GMSK/1 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	31.09	22.06
	190	31.32	22.29
	251	31.27	22.24
PCS	512	28.06	19.03
	661	28.27	19.24
	810	28.03	19.00

GPRS-GMSK/2 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	29.49	23.47
	190	29.37	23.35
	251	29.01	22.99
PCS	512	26.03	20.01
	661	26.07	20.05
	810	26.36	20.34

GPRS-GMSK/3 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	28.49	24.23
	190	28.31	24.05
	251	28.10	23.84
PCS	512	24.10	19.84
	661	24.22	19.96
	810	24.29	20.03

GPRS-GMSK/4 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	27.20	24.19
	190	27.25	24.24
	251	27.07	24.06
PCS	512	23.19	20.18
	661	23.41	20.40
	810	23.15	20.14

EDGE-8PSK/1 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	27.37	18.34
	190	27.42	18.39
	251	27.44	18.41
PCS	512	24.07	15.04
	661	24.09	15.06
	810	24.47	15.44

EDGE-8PSK/2 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	25.47	19.45
	190	25.36	19.34
	251	25.45	19.43
PCS	512	22.46	16.44
	661	22.41	16.39
	810	22.43	16.41

EDGE-8PSK/3 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	23.45	19.19
	190	23.19	18.93
	251	23.42	19.16
PCS	512	20.35	16.09
	661	20.22	15.96
	810	20.17	15.91

EDGE-8PSK/4 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	22.50	19.49
	190	22.37	19.36
	251	22.39	19.38
PCS	512	19.50	16.49
	661	19.04	16.03
	810	19.08	16.07

**Figure 9.1 Test Reduction Table – 3G WCDMA**

Band/ Frequency (MHz)	Technology	Side	Required Channel	Tested/ Reduced		
Band 5 824-849 MHz	WCDMA	Front	4132	Reduced <sup>1</sup>		
			4183	Tested		
			4233	Reduced <sup>1</sup>		
		Back	4132	Reduced <sup>1</sup>		
			4183	Tested		
			4233	Reduced <sup>1</sup>		
		Left	4132	Reduced <sup>1</sup>		
			4183	Tested		
			4233	Reduced <sup>1</sup>		
		Remaining Sides				Reduced <sup>2</sup>
Band 4 1710-1755 MHz		WCDMA	Front	1312	Reduced <sup>1</sup>	
				1413	Tested	
				1513	Reduced <sup>1</sup>	
			Back	1312	Reduced <sup>1</sup>	
				1413	Tested	
				1513	Reduced <sup>1</sup>	
			Left	1312	Reduced <sup>1</sup>	
				1413	Tested	
				1513	Reduced <sup>1</sup>	
			Remaining Sides			
Band 2 1850-1910 MHz			WCDMA	Front	9262	Tested
					9400	Tested
					9538	Tested
				Back	9262	Reduced <sup>1</sup>
					9400	Tested
					9538	Reduced <sup>1</sup>
				Left	9262	Reduced <sup>1</sup>
					9400	Tested
					9538	Reduced <sup>1</sup>
				Remaining Sides		

Reduced<sup>1</sup> – When the mid channel is 3 dB below the limit, the remaining channels are not required per KDB 447498 D01 v07 section 4.3.3 page 14.

Reduced<sup>2</sup> – The side is excluded per 47 CFR 1.1307.

**Figure 9.2 Test Reduction Table – GPRS**

Band/ Frequency (MHz)	Technology	Side	Required Channel	Tested/ Reduced		
Band 5 824-849 MHz	GPRS	Front	128	Reduced <sup>1</sup>		
			190	Tested		
			251	Reduced <sup>1</sup>		
		Back	128	Reduced <sup>1</sup>		
			190	Tested		
			251	Reduced <sup>1</sup>		
		Left	128	Reduced <sup>1</sup>		
			190	Tested		
			251	Reduced <sup>1</sup>		
		Remaining Sides				Reduced <sup>2</sup>
Band 2 1850-1910 MHz		GPRS	Front	512	Reduced <sup>1</sup>	
				661	Tested	
				810	Reduced <sup>1</sup>	
			Back	512	Reduced <sup>1</sup>	
				661	Tested	
				810	Reduced <sup>1</sup>	
			Left	512	Reduced <sup>1</sup>	
				661	Tested	
				810	Reduced <sup>1</sup>	
			Remaining Sides			

Reduced<sup>1</sup> – When the mid channel is 3 dB below the limit, the remaining channels are not required per KDB 447498 D01 v07 section 4.3.3 page 14.

Reduced<sup>2</sup> – The side is excluded per 47 CFR 1.1307.

### 9.3.1 LTE Functionality

The follow table identifies all the channel bandwidths in each frequency band supported by this device.

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
2	1.4, 3, 5, 10, 15, 20	1850-1910 MHz
4	1.4, 3, 5, 10, 15, 20	1710-1755 MHz
5	1.4, 3, 5, 10	824-849 MHz
7	5, 10, 15, 20	2500-2570 MHz
12	1.4, 3, 5, 10	699-716 MHz
13	5, 10	777-787 MHz
25	1.4, 3, 5, 10, 15, 20	1850-1915 MHz
26	1.4, 3, 5, 10, 15	814-849 MHz
41	5, 10, 15, 20	2496-2690 MHz

### 9.3.2 Test Conditions

All SAR measurements for LTE were performed using the Anritsu MT8820C. A closed loop power control setting allowed the UE to transmit at the maximum output power during the SAR measurements. The Figure 11.1 table indicates all the test reduction utilized for this report.

MPR was enabled for this device. A-MPR was disabled for all SAR test measurements.

**Table 9.3.1 LTE Power Measurements**

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
2	1.4 MHz	1	0	18607	1850.7	23.3	22.1	
				18900	1880.0	23.4	22.5	
				19193	1909.3	23.3	22.0	
			3	18607	1850.7	23.4	21.9	
				18900	1880.0	23.2	21.8	
				19193	1909.3	23.1	22.4	
			5	18607	1850.7	23.4	21.9	
				18900	1880.0	23.1	22.1	
				19193	1909.3	22.8	21.9	
		3	0	18607	1850.7	22.8	22.3	
				18900	1880.0	23.5	22.4	
				19193	1909.3	23.5	22.3	
			1	18607	1850.7	23.4	22.3	
				18900	1880.0	22.8	22.0	
				19193	1909.3	23.4	22.5	
			3	18607	1850.7	23.1	22.1	
				18900	1880.0	22.9	22.3	
				19193	1909.3	22.9	22.4	
		6	0	18607	1850.7	22.5	21.1	
				18900	1880.0	22.3	21.1	
				19193	1909.3	22.4	21.2	
		3 MHz	1	0	18615	1851.5	22.9	21.9
					18900	1880.0	23.1	22.4
					19185	1908.5	23.4	21.9
	7			18615	1851.5	23.0	22.2	
				18900	1880.0	23.3	22.1	
				19185	1908.5	23.3	21.9	
	14			18615	1851.5	23.5	22.3	
				18900	1880.0	22.9	22.2	
				19185	1908.5	23.0	22.0	
	8			0	18615	1851.5	22.3	20.8
					18900	1880.0	22.1	21.0
					19185	1908.5	22.4	21.3
			7	18615	1851.5	22.1	21.3	
				18900	1880.0	22.3	21.0	
				19185	1908.5	22.3	21.3	
			14	18615	1851.5	22.0	21.2	
				18900	1880.0	22.2	21.2	
				19185	1908.5	22.0	21.4	
	15		0	18615	1851.5	22.0	20.9	
				18900	1880.0	22.0	21.1	
				19185	1908.5	22.0	21.0	



Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
2	5 MHz	1	0	18625	1852.5	22.8	21.9		
				18900	1880.0	23.4	22.2		
				19175	1907.5	23.1	22.2		
			12	12	18625	1852.5	23.3	22.2	
					18900	1880.0	23.2	22.2	
					19175	1907.5	23.3	21.8	
				24	18625	1852.5	23.2	22.3	
					18900	1880.0	23.2	22.3	
					19175	1907.5	23.3	22.2	
		12	0	18625	1852.5	21.9	21.3		
				18900	1880.0	22.0	21.1		
				19175	1907.5	22.3	21.2		
			6	18625	1852.5	22.0	21.0		
				18900	1880.0	21.9	21.3		
				19175	1907.5	22.4	21.3		
				13	18625	1852.5	22.2	21.3	
					18900	1880.0	22.3	21.3	
					19175	1907.5	22.0	21.2	
			25	0	18625	1852.5	21.8	21.4	
					18900	1880.0	22.2	21.4	
					19175	1907.5	22.1	21.1	
			10 MHz	1	0	18650	1855.0	23.1	22.4
						18900	1880.0	23.2	22.1
						19150	1905.0	23.4	21.9
	24	18650				1855.0	22.9	22.4	
		18900				1880.0	23.0	22.4	
		19150				1905.0	23.4	22.2	
	49	18650			1855.0	23.5	22.1		
		18900			1880.0	23.0	21.9		
		19150			1905.0	23.3	21.8		
		25			0	18650	1855.0	21.8	21.3
						18900	1880.0	22.0	21.1
						19150	1905.0	21.9	21.2
	13				18650	1855.0	22.3	20.8	
					18900	1880.0	22.2	20.8	
					19150	1905.0	22.2	20.9	
					25	18650	1855.0	22.1	21.3
						18900	1880.0	22.1	21.2
						19150	1905.0	22.0	21.2
	50	0		18650	1855.0	22.1	21.3		
				18900	1880.0	21.9	21.3		
				19150	1905.0	21.8	21.3		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
2	15 MHz	1	0	18675	1857.5	23.0	22.0	
				18900	1880.0	23.5	21.9	
				19125	1902.5	22.9	22.4	
			37	18675	1857.5	22.9	22.0	
				18900	1880.0	23.4	22.4	
				19125	1902.5	23.3	21.9	
		74	18675	1857.5	23.5	22.1		
			18900	1880.0	23.4	22.3		
			19125	1902.5	23.0	22.4		
		36	0	18675	1857.5	21.8	21.2	
				18900	1880.0	22.0	20.9	
				19125	1902.5	21.9	21.1	
			19	18675	1857.5	22.1	21.3	
				18900	1880.0	21.9	20.9	
				19125	1902.5	22.0	21.1	
			39	18675	1857.5	22.2	21.0	
				18900	1880.0	22.0	20.9	
				19125	1902.5	21.9	21.1	
	75		0	18675	1857.5	22.3	20.9	
				18900	1880.0	22.3	21.4	
				19125	1902.5	22.3	21.2	
	20 MHz	1	0	18700	1860.0	22.8	22.5	
				18900	1880.0	22.9	22.5	
				19100	1900.0	23.3	22.4	
			49	18700	1860.0	22.8	22.3	
				18900	1880.0	23.5	22.1	
				19100	1900.0	22.8	21.9	
			99	18700	1860.0	23.1	22.1	
				18900	1880.0	23.5	21.9	
				19100	1900.0	23.5	21.9	
			50	0	18700	1860.0	22.4	21.5
					18900	1880.0	22.3	21.1
					19100	1900.0	21.9	21.4
		24		18700	1860.0	22.4	21.0	
				18900	1880.0	22.5	21.2	
				19100	1900.0	21.9	21.2	
		50		18700	1860.0	22.2	20.8	
				18900	1880.0	22.3	20.9	
				19100	1900.0	21.9	20.9	
		100	0	18700	1860.0	22.0	21.1	
				18900	1880.0	22.5	21.1	
				19100	1900.0	22.2	21.4	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
4	1.4 MHz	1	0	19957	1710.7	22.9	22.1		
				20175	1732.5	23.1	22.1		
				20393	1754.3	23.2	22.2		
			3	3	19957	1710.7	23.1	22.5	
					20175	1732.5	23.4	21.9	
					20393	1754.3	23.4	22.3	
				5	19957	1710.7	23.3	22.4	
					20175	1732.5	23.5	22.2	
					20393	1754.3	23.5	22.2	
		3	0	19957	1710.7	22.8	22.4		
				20175	1732.5	23.0	22.2		
				20393	1754.3	23.3	22.4		
			1	19957	1710.7	22.9	22.3		
				20175	1732.5	23.2	22.4		
				20393	1754.3	23.5	22.4		
				3	19957	1710.7	23.4	22.3	
					20175	1732.5	23.3	22.4	
					20393	1754.3	23.2	22.3	
		6	0	19957	1710.7	22.4	21.5		
				20175	1732.5	21.9	21.4		
				20393	1754.3	22.4	21.4		
		3 MHz	1	0	19965	1711.5	23.3	22.3	
					20175	1732.5	23.1	22.4	
					20385	1753.5	23.2	22.0	
	7				19965	1711.5	23.5	21.9	
					20175	1732.5	23.5	22.4	
					20385	1753.5	23.1	22.4	
	14			19965	1711.5	22.9	22.2		
				20175	1732.5	23.4	22.0		
				20385	1753.5	23.4	22.3		
				8	0	19965	1711.5	22.3	21.2
						20175	1732.5	22.5	20.8
						20385	1753.5	21.9	20.9
	7				19965	1711.5	22.1	21.0	
					20175	1732.5	21.9	21.4	
					20385	1753.5	22.0	21.1	
			14		19965	1711.5	22.1	21.0	
					20175	1732.5	22.0	21.5	
					20385	1753.5	22.5	21.2	
	15		0	19965	1711.5	22.0	21.0		
				20175	1732.5	22.3	21.3		
				20385	1753.5	21.9	21.3		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
4	5 MHz	1	0	19975	1712.5	23.3	22.2		
				20175	1732.5	23.4	22.5		
				20375	1752.5	23.1	22.1		
			12	12	19975	1712.5	23.1	22.1	
					20175	1732.5	23.2	21.9	
					20375	1752.5	23.0	21.9	
				24	19975	1712.5	23.1	22.0	
					20175	1732.5	22.9	22.5	
					20375	1752.5	23.3	22.2	
		12	0	19975	1712.5	21.8	21.1		
				20175	1732.5	22.1	20.9		
				20375	1752.5	21.9	20.9		
			6	19975	1712.5	22.2	21.4		
				20175	1732.5	22.0	21.4		
				20375	1752.5	22.1	21.4		
				13	19975	1712.5	22.5	21.4	
					20175	1732.5	22.0	21.3	
					20375	1752.5	21.8	20.9	
			25	0	19975	1712.5	22.4	21.3	
					20175	1732.5	22.1	21.0	
					20375	1752.5	22.4	21.4	
			10 MHz	1	0	20000	1715.0	23.3	22.0
						20175	1732.5	23.3	22.0
						20350	1750.0	23.2	22.3
	24	20000				1715.0	23.1	22.4	
		20175				1732.5	23.4	22.0	
		20350				1750.0	23.1	22.1	
	49	20000			1715.0	23.1	22.3		
		20175			1732.5	23.2	22.3		
		20350			1750.0	23.3	22.1		
		25			0	20000	1715.0	22.3	20.9
						20175	1732.5	22.3	21.3
						20350	1750.0	22.5	21.1
	13				20000	1715.0	22.1	21.3	
					20175	1732.5	22.1	21.3	
					20350	1750.0	21.9	21.4	
					25	20000	1715.0	22.0	21.2
						20175	1732.5	22.1	21.5
						20350	1750.0	21.9	21.3
	50	0		20000	1715.0	22.2	21.3		
				20175	1732.5	22.1	20.9		
				20350	1750.0	21.9	21.0		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
4	15 MHz	1	0	20025	1717.5	23.4	22.1		
				20175	1732.5	23.2	22.5		
				20325	1747.5	23.1	22.0		
			37	20025	1717.5	22.9	22.2		
				20175	1732.5	23.5	22.4		
				20325	1747.5	23.3	22.1		
				74	20025	1717.5	23.1	22.5	
					20175	1732.5	23.0	22.4	
					20325	1747.5	23.2	22.0	
		36	0	20025	1717.5	22.3	21.5		
				20175	1732.5	22.4	21.1		
				20325	1747.5	22.5	21.1		
			19	20025	1717.5	22.2	20.9		
				20175	1732.5	22.0	21.0		
				20325	1747.5	22.4	21.0		
				39	20025	1717.5	22.4	20.9	
					20175	1732.5	21.9	20.9	
					20325	1747.5	21.9	21.4	
			75	0	20025	1717.5	22.2	21.2	
					20175	1732.5	22.0	21.1	
					20325	1747.5	21.9	21.5	
		20 MHz	1	0	20050	1720.0	23.4	22.3	
					20175	1732.5	23.2	22.3	
					20300	1745.0	23.2	22.3	
	49				20050	1720.0	23.3	21.9	
					20175	1732.5	23.1	22.3	
					20300	1745.0	23.0	22.0	
	99			20050	1720.0	23.4	22.4		
				20175	1732.5	23.3	22.1		
				20300	1745.0	23.4	22.4		
				50	0	20050	1720.0	21.8	21.1
						20175	1732.5	21.9	21.1
						20300	1745.0	22.1	21.1
	24				20050	1720.0	22.1	21.4	
					20175	1732.5	22.4	20.9	
					20300	1745.0	22.4	20.9	
	50			50	20050	1720.0	22.3	21.3	
					20175	1732.5	22.5	21.2	
					20300	1745.0	22.4	21.5	
			100	0	20050	1720.0	21.9	21.4	
					20175	1732.5	22.4	21.3	
					20300	1745.0	22.4	20.9	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
5	1.4 MHz	1	0	20407	824.7	23.3	21.9		
				20525	836.5	23.1	21.9		
				20643	848.3	22.8	22.3		
			3	3	20407	824.7	23.3	22.3	
					20525	836.5	22.8	22.1	
					20643	848.3	23.3	22.2	
			5	5	20407	824.7	23.1	22.0	
					20525	836.5	23.1	22.5	
					20643	848.3	23.3	21.8	
		3	0	0	20407	824.7	23.1	22.1	
					20525	836.5	22.8	22.1	
					20643	848.3	22.9	22.1	
			1	1	20407	824.7	23.1	22.2	
					20525	836.5	23.4	21.9	
					20643	848.3	23.5	21.9	
			3	3	20407	824.7	23.0	21.8	
					20525	836.5	23.3	22.3	
					20643	848.3	23.1	21.9	
	6	0	0	20407	824.7	22.2	20.9		
				20525	836.5	22.2	21.4		
				20643	848.3	21.9	21.0		
	3 MHz	1	0	20415	825.5	23.2	22.4		
				20525	836.5	23.1	21.9		
				20635	847.5	23.4	22.5		
				7	7	20415	825.5	23.1	21.9
						20525	836.5	23.3	22.4
						20635	847.5	23.0	21.8
			14	14	20415	825.5	23.0	22.3	
					20525	836.5	22.8	21.9	
					20635	847.5	23.2	22.3	
			8	0	0	20415	825.5	22.4	21.0
						20525	836.5	22.5	21.4
						20635	847.5	22.0	21.2
				7	7	20415	825.5	21.8	21.1
						20525	836.5	22.5	20.9
						20635	847.5	22.4	20.9
				14	14	20415	825.5	22.3	21.3
						20525	836.5	22.2	21.2
						20635	847.5	22.5	21.2
		15	0	0	20415	825.5	22.2	21.2	
					20525	836.5	22.0	21.2	
					20635	847.5	22.1	20.9	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
5	5 MHz	1	0	20425	826.5	23.3	22.3		
				20525	836.5	23.2	21.9		
				20625	846.5	22.9	22.2		
			12	12	20425	826.5	23.4	22.4	
					20525	836.5	23.1	22.5	
					20625	846.5	23.3	22.4	
				24	20425	826.5	23.4	22.4	
					20525	836.5	23.4	22.4	
					20625	846.5	23.2	22.2	
		12	0	20425	826.5	22.5	21.4		
				20525	836.5	22.1	21.1		
				20625	846.5	22.4	21.3		
			6	20425	826.5	22.2	21.4		
				20525	836.5	22.1	21.2		
				20625	846.5	22.5	21.1		
				13	20425	826.5	22.0	21.0	
					20525	836.5	22.2	21.0	
					20625	846.5	21.9	20.8	
			25	0	20425	826.5	22.4	21.3	
					20525	836.5	21.9	21.0	
					20625	846.5	22.1	21.0	
			10 MHz	1	0	20450	829.0	23.0	22.0
						20525	836.5	23.4	21.8
						20600	844.0	23.0	22.5
	24	20450				829.0	23.2	22.4	
		20525				836.5	23.2	22.4	
		20600				844.0	23.3	22.3	
	49	20450			829.0	23.4	22.2		
		20525			836.5	23.0	21.8		
		20600			844.0	23.2	22.1		
		25			0	20450	829.0	21.9	21.2
						20525	836.5	22.4	21.3
						20600	844.0	22.2	21.5
	13				20450	829.0	22.1	20.9	
					20525	836.5	22.1	21.4	
					20600	844.0	22.4	21.0	
	25	25			20450	829.0	22.0	21.5	
					20525	836.5	22.2	21.3	
					20600	844.0	22.4	21.5	
		50		0	20450	829.0	21.9	21.0	
					20525	836.5	22.2	20.8	
					20600	844.0	22.0	21.2	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
7	5 MHz	1	0	20775	2502.5	22.4	21.6		
				21100	2535.0	22.4	21.5		
				21425	2567.5	22.9	21.7		
			12	12	20775	2502.5	22.7	21.7	
					21100	2535.0	22.8	21.9	
					21425	2567.5	22.9	21.9	
				24	20775	2502.5	22.9	21.8	
					21100	2535.0	22.5	21.6	
					21425	2567.5	22.9	21.9	
		12	0	20775	2502.5	21.5	20.9		
				21100	2535.0	22.0	20.3		
				21425	2567.5	21.5	20.9		
			6	20775	2502.5	21.6	20.6		
				21100	2535.0	21.9	20.4		
				21425	2567.5	22.0	20.7		
				13	20775	2502.5	21.4	20.7	
					21100	2535.0	21.9	20.3	
					21425	2567.5	21.5	20.9	
			25	0	20775	2502.5	21.5	20.5	
					21100	2535.0	21.5	20.7	
					21425	2567.5	21.8	20.9	
			10 MHz	1	0	20800	2505.0	22.3	21.4
						21100	2535.0	22.7	21.5
						21400	2565.0	22.4	21.9
	24	20800				2505.0	22.5	21.4	
		21100				2535.0	22.3	21.9	
		21400				2565.0	22.9	21.8	
	49	20800			2505.0	22.3	21.5		
		21100			2535.0	22.4	21.6		
		21400			2565.0	22.6	21.8		
		25			0	20800	2505.0	21.6	20.9
						21100	2535.0	21.9	20.9
						21400	2565.0	21.6	20.6
	13				20800	2505.0	21.7	20.3	
					21100	2535.0	21.4	21.0	
					21400	2565.0	21.7	20.9	
	25	25			20800	2505.0	21.5	20.8	
					21100	2535.0	21.3	20.3	
					21400	2565.0	21.8	20.8	
		50		0	20800	2505.0	21.4	20.5	
					21100	2535.0	21.4	20.9	
					21400	2565.0	22.0	21.0	



Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
7	15 MHz	1	0	20825	2507.5	22.5	21.6	
				21100	2535.0	22.4	21.8	
				21375	2562.5	22.7	21.9	
			37	20825	2507.5	22.9	21.4	
				21100	2535.0	22.3	21.4	
				21375	2562.5	22.7	21.3	
			74	20825	2507.5	22.6	21.7	
				21100	2535.0	22.7	21.5	
				21375	2562.5	23.0	21.6	
		36	0	20825	2507.5	21.7	20.7	
				21100	2535.0	21.8	20.8	
				21375	2562.5	21.6	20.6	
			19	20825	2507.5	21.4	20.4	
				21100	2535.0	21.7	20.8	
				21375	2562.5	21.8	20.6	
			39	20825	2507.5	21.8	20.4	
				21100	2535.0	21.9	20.3	
				21375	2562.5	21.8	20.9	
		75	0	20825	2507.5	21.6	20.7	
				21100	2535.0	21.8	20.8	
				21375	2562.5	21.3	20.4	
		20 MHz	1	0	20850	2510.0	23.9	22.0
					21100	2535.0	23.3	22.0
					21350	2560.0	23.9	21.6
	49			20850	2510.0	23.9	21.7	
				21100	2535.0	23.6	21.4	
				21350	2560.0	23.9	21.6	
	99			20850	2510.0	23.9	21.6	
				21100	2535.0	23.9	21.7	
				21350	2560.0	23.7	21.7	
	50			0	20850	2510.0	22.5	20.4
					21100	2535.0	22.6	20.6
					21350	2560.0	22.8	20.8
				24	20850	2510.0	23.0	20.4
					21100	2535.0	23.0	20.9
					21350	2560.0	22.5	20.9
	50			20850	2510.0	22.6	20.8	
				21100	2535.0	22.4	20.5	
				21350	2560.0	22.4	20.9	
	100		0	20850	2510.0	22.7	20.5	
				21100	2535.0	22.9	20.3	
				21350	2560.0	22.4	20.4	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
12	1.4 MHz	1	0	23017	699.7	23.5	23.0		
				23095	707.5	23.7	22.5		
				23173	715.3	23.4	22.3		
			3	3	23017	699.7	23.9	22.7	
					23095	707.5	23.7	22.8	
					23173	715.3	23.5	22.4	
				5	23017	699.7	23.9	22.9	
					23095	707.5	24.0	22.5	
					23173	715.3	23.8	22.9	
		3	0	23017	699.7	23.4	22.8		
				23095	707.5	23.9	22.6		
				23173	715.3	23.5	22.5		
			1	23017	699.7	23.6	22.3		
				23095	707.5	23.9	23.0		
				23173	715.3	23.5	22.5		
				3	23017	699.7	23.3	22.6	
					23095	707.5	23.4	22.4	
					23173	715.3	23.5	22.6	
			6	0	23017	699.7	23.0	21.8	
					23095	707.5	22.4	21.4	
					23173	715.3	22.4	21.9	
		3 MHz	1	0	23025	700.5	23.3	22.9	
					23095	707.5	23.7	22.8	
					23165	714.5	23.4	22.5	
	7				23025	700.5	23.9	22.6	
					23095	707.5	23.5	22.8	
					23165	714.5	23.6	22.4	
	14			23025	700.5	23.9	22.3		
				23095	707.5	23.3	22.8		
				23165	714.5	23.6	23.0		
				8	0	23025	700.5	22.8	21.4
						23095	707.5	22.9	21.4
						23165	714.5	22.7	21.5
	7				23025	700.5	22.9	21.4	
					23095	707.5	22.9	21.3	
					23165	714.5	22.7	21.8	
	14			23025	700.5	22.3	21.7		
				23095	707.5	22.5	21.9		
				23165	714.5	22.5	21.5		
			15	0	23025	700.5	22.7	21.4	
					23095	707.5	22.4	21.4	
					23165	714.5	22.7	21.6	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
12	5 MHz	1	0	23035	701.5	23.9	22.7		
				23095	707.5	23.8	22.9		
				23155	713.5	23.5	22.9		
			12	12	23035	701.5	23.5	22.9	
					23095	707.5	23.6	22.6	
					23155	713.5	23.9	22.8	
				24	23035	701.5	23.4	22.7	
					23095	707.5	23.4	22.7	
					23155	713.5	23.7	22.9	
		12	0	23035	701.5	22.4	21.6		
				23095	707.5	22.6	21.7		
				23155	713.5	22.4	21.4		
				6	23035	701.5	22.4	21.4	
					23095	707.5	23.0	21.7	
					23155	713.5	22.9	21.4	
				13	23035	701.5	23.0	21.9	
					23095	707.5	22.9	21.5	
					23155	713.5	22.9	21.6	
			25	0	23035	701.5	22.7	21.4	
					23095	707.5	22.3	21.9	
					23155	713.5	22.7	21.7	
			10 MHz	1	0	23060	704.0	23.7	22.5
						23095	707.5	23.9	22.9
						23130	711.0	23.5	22.5
	24	23060				704.0	23.6	22.8	
		23095				707.5	23.7	22.4	
		23130				711.0	23.8	22.6	
	49	23060			704.0	23.4	22.5		
		23095			707.5	23.8	22.8		
		23130			711.0	23.6	22.4		
		25			0	23060	704.0	22.4	21.9
						23095	707.5	22.8	21.4
						23130	711.0	22.9	21.3
	13				23060	704.0	22.6	21.5	
					23095	707.5	22.6	21.4	
					23130	711.0	23.0	21.9	
	25	25			23060	704.0	22.9	21.6	
					23095	707.5	22.8	21.7	
					23130	711.0	22.8	21.4	
		50		0	23060	704.0	22.4	21.5	
					23095	707.5	22.9	21.6	
					23130	711.0	22.9	21.8	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM		
13	5 MHz	1	0	23205	779.5	23.9	22.5		
				23230	782.0	23.7	22.7		
				23129	784.5	23.6	22.5		
			12	12	23205	779.5	23.7	22.8	
					23230	782.0	23.5	22.8	
					23129	784.5	23.8	22.6	
			24	24	23205	779.5	23.9	22.9	
					23230	782.0	23.4	22.8	
					23129	784.5	23.6	22.9	
		12	12	0	23205	779.5	22.3	21.6	
					23230	782.0	22.6	21.9	
					23129	784.5	22.4	21.5	
				6	6	23205	779.5	22.6	21.9
						23230	782.0	22.3	21.4
						23129	784.5	23.0	21.7
				13	13	23205	779.5	22.6	21.4
						23230	782.0	22.7	21.5
						23129	784.5	22.4	21.6
	25	25	0	23205	779.5	23.0	21.5		
				23230	782.0	23.0	21.3		
				23129	784.5	22.9	22.0		
	10 MHz	10 MHz	1	0	23230	782.0	23.4	22.8	
				24	23230	782.0	23.9	22.7	
				49	23230	782.0	23.6	22.8	
			25	25	0	23230	782.0	22.9	21.4
					13	23230	782.0	22.8	21.7
					25	23230	782.0	22.9	21.6
			50	0	23230	782.0	22.9	21.7	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
25	1.4 MHz	1	0	26047	1850.7	23.2	21.9	
				26365	1882.5	23.0	22.1	
				26683	1914.3	22.8	22.0	
			3	26047	1850.7	22.8	22.1	
				26365	1882.5	23.3	22.0	
				26683	1914.3	23.0	22.4	
		5	26047	1850.7	23.0	22.1		
			26365	1882.5	22.8	21.8		
			26683	1914.3	23.0	22.4		
		3	0	26047	1850.7	23.3	21.8	
				26365	1882.5	23.2	22.3	
				26683	1914.3	22.9	22.0	
			1	26047	1850.7	23.1	22.0	
				26365	1882.5	23.5	22.3	
				26683	1914.3	22.8	22.1	
			3	26047	1850.7	23.2	22.0	
				26365	1882.5	23.0	21.9	
				26683	1914.3	22.9	22.4	
	6	0	26047	1850.7	21.8	21.2		
			26365	1882.5	22.1	21.2		
			26683	1914.3	22.2	21.1		
	3 MHz	1	0	26055	1851.5	23.1	21.8	
				26365	1882.5	23.1	22.5	
				26675	1913.5	23.4	22.4	
			7	26055	1851.5	23.3	22.1	
				26365	1882.5	23.3	22.0	
				26675	1913.5	23.5	22.4	
			14	26055	1851.5	23.3	22.4	
				26365	1882.5	23.3	21.9	
				26675	1913.5	23.2	22.3	
			8	0	26055	1851.5	22.0	21.2
					26365	1882.5	22.1	21.4
					26675	1913.5	22.2	21.1
		7		26055	1851.5	22.1	21.0	
				26365	1882.5	21.8	21.2	
				26675	1913.5	22.4	21.0	
		14		26055	1851.5	22.1	21.1	
				26365	1882.5	22.2	21.3	
				26675	1913.5	21.9	21.2	
		15	0	26055	1851.5	21.9	21.0	
				26365	1882.5	22.1	21.4	
				26675	1913.5	21.9	21.3	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
25	5 MHz	1	0	26065	1852.5	23.4	22.5	
				26365	1882.5	23.0	22.1	
				26665	1912.5	22.9	22.0	
			12	26065	1852.5	23.3	22.0	
				26365	1882.5	23.2	22.5	
				26665	1912.5	22.8	21.9	
		24	26065	1852.5	23.1	22.4		
			26365	1882.5	22.8	22.3		
			26665	1912.5	23.5	22.2		
		12	0	26065	1852.5	22.2	21.5	
				26365	1882.5	22.2	21.4	
				26665	1912.5	22.0	21.0	
			6	26065	1852.5	22.2	21.0	
				26365	1882.5	22.0	21.4	
				26665	1912.5	22.0	20.8	
			13	26065	1852.5	22.4	21.3	
				26365	1882.5	22.0	21.3	
				26665	1912.5	21.8	21.0	
	25		0	26065	1852.5	22.2	21.3	
				26365	1882.5	21.9	21.2	
				26665	1912.5	22.4	21.1	
	10 MHz	1	0	26090	1855.0	23.5	22.1	
				26365	1882.5	23.4	22.3	
				26640	1910.0	23.5	22.2	
			24	26090	1855.0	23.4	22.5	
				26365	1882.5	23.4	22.0	
				26640	1910.0	23.1	22.1	
			49	26090	1855.0	23.1	22.1	
				26365	1882.5	22.9	22.1	
				26640	1910.0	23.4	22.2	
			25	0	26090	1855.0	22.1	21.1
					26365	1882.5	22.3	20.9
					26640	1910.0	22.5	21.2
		13		26090	1855.0	22.1	21.4	
				26365	1882.5	22.4	21.3	
				26640	1910.0	22.1	20.9	
		25		26090	1855.0	21.9	21.2	
				26365	1882.5	22.4	20.8	
				26640	1910.0	22.1	21.0	
		50	0	26090	1855.0	21.8	20.8	
				26365	1882.5	21.9	21.1	
				26640	1910.0	22.5	20.9	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
25	15 MHz	1	0	26115	1857.5	23.4	22.4	
				26365	1882.5	23.4	21.9	
				26615	1907.5	23.2	22.0	
			37	26115	1857.5	23.1	21.9	
				26365	1882.5	22.8	21.9	
				26615	1907.5	23.4	22.0	
			74	26115	1857.5	23.1	22.2	
				26365	1882.5	22.9	22.2	
				26615	1907.5	23.2	22.2	
		36	0	26115	1857.5	21.9	21.1	
				26365	1882.5	22.4	21.4	
				26615	1907.5	22.4	20.9	
			19	26115	1857.5	22.5	21.0	
				26365	1882.5	22.0	21.0	
				26615	1907.5	22.2	21.3	
			39	26115	1857.5	21.9	21.1	
				26365	1882.5	22.1	21.2	
				26615	1907.5	21.9	21.5	
			75	0	26115	1857.5	21.8	21.4
					26365	1882.5	21.9	21.0
					26615	1907.5	22.0	21.1
		20 MHz	1	0	26140	1860.0	23.4	21.8
					26365	1882.5	23.0	22.4
					26590	1905.0	23.3	22.3
	49			26140	1860.0	23.4	22.2	
				26365	1882.5	23.0	22.0	
				26590	1905.0	23.2	22.1	
	99			26140	1860.0	23.0	22.3	
				26365	1882.5	23.5	22.5	
				26590	1905.0	23.2	22.2	
	50			0	26140	1860.0	21.9	21.2
					26365	1882.5	22.3	21.2
					26590	1905.0	22.4	21.2
			24	26140	1860.0	21.9	21.3	
				26365	1882.5	22.2	21.1	
				26590	1905.0	21.9	21.4	
			50	26140	1860.0	22.3	20.9	
				26365	1882.5	21.9	21.0	
				26590	1905.0	22.0	21.5	
	100		0	26140	1860.0	22.0	21.4	
				26365	1882.5	22.2	21.4	
				26590	1905.0	22.3	21.2	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM	
26	1.4 MHz	1	0		26697	814.7	22.9	21.9
					26865	831.5	23.0	21.9
					27033	848.3	23.4	22.1
			3		26697	814.7	23.2	22.4
					26865	831.5	23.0	22.4
					27033	848.3	23.3	22.1
			5		26697	814.7	23.1	22.3
					26865	831.5	23.2	21.8
					27033	848.3	23.4	22.5
		3	0		26697	814.7	23.3	22.2
					26865	831.5	23.4	22.1
					27033	848.3	23.1	22.2
			1		26697	814.7	23.5	22.5
					26865	831.5	23.4	22.1
					27033	848.3	23.0	22.1
			3		26697	814.7	23.0	22.1
					26865	831.5	23.4	22.0
					27033	848.3	23.2	22.0
	6	0		26697	814.7	21.9	21.4	
				26865	831.5	22.1	21.3	
				27033	848.3	22.4	21.3	
	3 MHz	1	0		26705	815.5	23.3	22.1
					26865	831.5	23.1	22.4
					27025	847.5	23.5	22.2
			7		26705	815.5	23.4	22.3
					26865	831.5	23.0	22.3
					27025	847.5	23.1	22.1
			14		26705	815.5	22.8	22.0
					26865	831.5	22.9	22.2
					27025	847.5	23.4	22.5
		8	0		26705	815.5	22.1	20.9
					26865	831.5	22.0	21.0
					27025	847.5	22.4	21.0
			7		26705	815.5	22.2	21.1
					26865	831.5	22.0	21.5
					27025	847.5	22.4	21.4
			14		26705	815.5	22.0	21.5
					26865	831.5	21.9	21.0
					27025	847.5	22.0	20.9
	15	0		26705	815.5	22.4	21.5	
				26865	831.5	21.8	20.9	
				27025	847.5	22.1	21.2	



Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
26	5 MHz	1	0	26715	816.5	23.4	22.2
				26865	831.5	23.5	21.9
				27015	846.5	23.3	22.1
			12	26715	816.5	23.0	22.3
				26865	831.5	23.1	21.9
				27015	846.5	23.2	21.8
		24	26715	816.5	22.9	21.9	
			26865	831.5	23.0	22.3	
			27015	846.5	22.9	22.2	
		12	0	26715	816.5	22.2	21.4
				26865	831.5	21.9	21.2
				27015	846.5	22.3	21.1
			6	26715	816.5	22.3	20.9
				26865	831.5	21.9	21.2
				27015	846.5	22.0	21.3
			13	26715	816.5	22.2	21.0
				26865	831.5	22.1	21.1
				27015	846.5	22.2	21.3
	25		0	26715	816.5	21.8	21.2
				26865	831.5	22.1	21.5
				27015	846.5	22.1	21.2
	10 MHz	1	0	26740	819.0	23.1	21.8
				26865	831.5	22.9	22.4
				26990	844.0	23.3	22.2
			24	26740	819.0	23.2	22.3
				26865	831.5	23.5	22.3
				26990	844.0	22.9	22.0
			49	26740	819.0	23.4	22.1
				26865	831.5	23.4	22.2
				26990	844.0	23.4	22.0
		25	0	26740	819.0	21.9	21.4
				26865	831.5	21.9	21.0
				26990	844.0	22.5	21.2
			13	26740	819.0	21.9	20.8
				26865	831.5	22.0	21.2
				26990	844.0	22.1	20.8
			25	26740	819.0	22.1	21.1
				26865	831.5	22.3	21.1
				26990	844.0	22.1	21.0
	50	0	26740	819.0	22.2	21.4	
			26865	831.5	22.4	21.4	
			26990	844.0	22.3	21.3	

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
26	15 MHz	1	0	26765	821.5	23.3	21.9
				26865	831.5	23.3	22.4
				26965	841.5	23.0	22.1
			37	26765	821.5	22.8	22.0
				26865	831.5	23.1	22.4
				26965	841.5	22.9	22.0
			74	26765	821.5	23.3	22.1
				26865	831.5	23.2	22.5
				26965	841.5	22.9	22.0
		36	0	26765	821.5	21.8	20.9
				26865	831.5	22.0	21.3
				26965	841.5	21.9	21.2
			19	26765	821.5	21.9	20.9
				26865	831.5	22.3	20.9
				26965	841.5	22.5	20.9
			39	26765	821.5	22.0	20.8
				26865	831.5	22.4	21.5
				26965	841.5	22.0	20.9
		75	0	26765	821.5	22.0	21.1
				26865	831.5	22.5	21.3
				26965	841.5	21.9	21.1

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41	5 MHz	1	0	39675	2498.5	22.5	21.7
				40148	2545.8	22.4	21.5
				40620	2593.0	22.8	21.6
				41093	2640.3	22.6	21.9
				41565	2687.5	23.0	22.0
			12	39675	2498.5	22.7	21.7
				40148	2545.8	22.6	21.7
				40620	2593.0	22.9	21.9
				41093	2640.3	22.8	22.0
			24	41565	2687.5	22.8	21.3
				39675	2498.5	22.8	21.6
				40148	2545.8	22.4	21.9
		40620		2593.0	22.6	21.6	
		12	0	41093	2640.3	22.6	21.7
				41565	2687.5	22.7	21.7
				39675	2498.5	21.9	20.7
				40148	2545.8	21.3	20.5
			6	40620	2593.0	21.4	21.0
				41093	2640.3	21.5	20.9
				41565	2687.5	21.4	20.3
				39675	2498.5	21.9	20.3
			13	40148	2545.8	21.6	20.8
				40620	2593.0	21.5	21.0
				41093	2640.3	21.6	20.6
				41565	2687.5	21.5	20.7
		25	0	39675	2498.5	21.4	20.4
				40148	2545.8	21.9	20.5
				40620	2593.0	21.6	20.5
				41093	2640.3	21.4	20.6
			0	41565	2687.5	21.9	21.0
				39675	2498.5	21.7	20.5
				40148	2545.8	21.3	20.7
				40620	2593.0	21.9	20.7
		0	41093	2640.3	21.4	20.6	
			41565	2687.5	21.9	20.6	
			39675	2498.5	21.4	20.6	
40148	2545.8		21.9	20.3			

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41	10 MHz	1	0	39700	2501.0	22.5	21.9
				40160	2547.0	22.5	21.7
				40620	2593.0	22.4	21.7
				41080	2639.0	22.6	21.8
				41540	2685.0	22.8	21.9
			24	39700	2501.0	23.0	21.5
				40160	2547.0	22.8	21.3
				40620	2593.0	22.7	21.9
				41080	2639.0	22.5	21.8
				41540	2685.0	22.9	21.7
			49	39700	2501.0	22.6	21.5
				40160	2547.0	22.7	21.5
		40620		2593.0	22.7	21.7	
		41080		2639.0	22.8	21.5	
		41540		2685.0	22.9	21.3	
		25	0	39700	2501.0	21.5	20.7
				40160	2547.0	21.5	20.3
				40620	2593.0	21.7	20.5
				41080	2639.0	21.4	20.7
				41540	2685.0	21.4	21.0
			13	39700	2501.0	21.4	20.3
				40160	2547.0	21.8	20.7
				40620	2593.0	21.7	20.4
				41080	2639.0	21.9	20.6
				41540	2685.0	21.7	20.8
			25	39700	2501.0	21.9	20.6
				40160	2547.0	21.6	20.5
				40620	2593.0	21.9	20.9
				41080	2639.0	21.9	20.7
				41540	2685.0	21.7	20.8
		50	0	39700	2501.0	21.8	20.7
				40160	2547.0	21.4	20.7
40620	2593.0			21.4	20.4		
41080	2639.0			21.3	20.9		
41540	2685.0			21.5	20.7		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41	15 MHz	1	0	39725	2503.5	22.9	21.6
				40173	2548.3	22.9	21.5
				40620	2593.0	22.5	21.5
				41068	2637.8	22.9	21.8
				41515	2682.5	22.8	22.0
			37	39725	2503.5	22.5	21.6
				40173	2548.3	22.6	21.9
				40620	2593.0	22.6	21.6
				41068	2637.8	22.6	21.9
				41515	2682.5	22.3	21.8
			74	39725	2503.5	22.5	21.8
				40173	2548.3	22.5	22.0
		40620		2593.0	22.7	21.9	
		41068		2637.8	22.8	21.8	
		41515		2682.5	22.9	21.5	
		36	0	39725	2503.5	21.3	20.6
				40173	2548.3	21.8	20.4
				40620	2593.0	21.9	20.9
				41068	2637.8	21.7	20.9
				41515	2682.5	21.4	20.5
			19	39725	2503.5	21.3	20.5
				40173	2548.3	21.8	20.8
				40620	2593.0	21.9	20.5
				41068	2637.8	21.4	21.0
				41515	2682.5	21.7	20.8
			39	39725	2503.5	21.6	20.5
				40173	2548.3	21.3	20.6
				40620	2593.0	21.6	20.4
				41068	2637.8	21.4	20.5
				41515	2682.5	21.5	21.0
		75	0	39725	2503.5	21.7	20.5
				40173	2548.3	21.7	20.9
40620	2593.0			21.4	20.8		
41068	2637.8			21.7	20.6		
41515	2682.5			22.0	20.5		

Band	Bandwidth	RB Size	RB Offset	Channel	Frequency	QPSK	16QAM
41	20 MHz	1	0	39750	2506.0	22.8	21.9
				40185	2549.5	22.9	21.6
				40620	2593.0	22.8	21.7
				41055	2636.5	22.6	21.8
				41490	2680.0	22.5	21.8
			49	39750	2506.0	22.6	22.0
				40185	2549.5	22.5	21.8
				40620	2593.0	22.8	21.7
				41055	2636.5	22.6	21.7
			99	41490	2680.0	22.3	21.6
				39750	2506.0	22.3	21.7
				40185	2549.5	22.5	21.5
		40620		2593.0	22.5	21.3	
		50	0	41055	2636.5	22.4	21.4
				41490	2680.0	22.3	21.6
				39750	2506.0	21.3	20.4
				40185	2549.5	21.5	20.7
			24	40620	2593.0	21.7	20.7
				41055	2636.5	21.7	20.5
				41490	2680.0	21.3	20.6
				39750	2506.0	21.9	20.4
			50	40185	2549.5	21.7	20.9
				40620	2593.0	21.9	20.7
				41055	2636.5	21.3	20.8
				41490	2680.0	21.5	20.4
		100	0	39750	2506.0	22.0	20.8
				40185	2549.5	21.8	21.0
				40620	2593.0	21.7	20.4
				41055	2636.5	21.8	21.0
		100	0	41490	2680.0	21.8	20.4
				39750	2506.0	21.9	20.3
				40185	2549.5	21.8	20.5
				40620	2593.0	22.0	20.6
		100	0	41055	2636.5	21.6	20.8
				41490	2680.0	21.6	20.5
				41055	2636.5	21.6	20.8
41490	2680.0			21.6	20.5		

**Table 9.3.2 Test Reduction Table – LTE**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced		
Band 4 1710-1755 MHz	Front	20050	20 MHz	QPSK	50	25	Reduced <sup>1</sup>		
		20175					Tested		
		20300			Reduced <sup>1</sup>				
		20050			100	0	Reduced <sup>1</sup>		
		20175					Reduced <sup>1</sup>		
		20300			Reduced <sup>1</sup>				
		20050			1	49	Reduced <sup>1</sup>		
		20175					Tested		
		20300					Reduced <sup>1</sup>		
		20050			99	99	Reduced <sup>2</sup>		
		20175		Reduced <sup>2</sup>					
		20300		Reduced <sup>2</sup>					
		20050		50	25	Reduced <sup>3</sup>			
		20175				Reduced <sup>3</sup>			
		20300		100	0	Reduced <sup>3</sup>			
		20050				Reduced <sup>1</sup>			
		20175		1	49	Reduced <sup>1</sup>			
		20300				Reduced <sup>1</sup>			
		20050		99	99	Reduced <sup>4</sup>			
		20175				Reduced <sup>4</sup>			
	20300	Reduced <sup>4</sup>							
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>	
	Back	QPSK	20050	20 MHz	50	25	Reduced <sup>1</sup>		
			20175				Tested		
			20300		Reduced <sup>1</sup>				
			20050		100	0	Reduced <sup>1</sup>		
			20175				Reduced <sup>1</sup>		
			20300		Reduced <sup>1</sup>				
			20050		1	49	Reduced <sup>1</sup>		
			20175				Tested		
			20300				Reduced <sup>1</sup>		
			20050		99	99	Reduced <sup>2</sup>		
		20175	Reduced <sup>2</sup>						
		20300	Reduced <sup>2</sup>						
		20050	50		25	Reduced <sup>3</sup>			
		20175				Reduced <sup>3</sup>			
		20300	100		0	Reduced <sup>3</sup>			
		20050				Reduced <sup>1</sup>			
		20175	1		49	Reduced <sup>1</sup>			
		20300				Reduced <sup>1</sup>			
		20050	99		99	Reduced <sup>4</sup>			
		20175				Reduced <sup>4</sup>			
		20300	Reduced <sup>4</sup>						
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced			
Band 4 1710-1755 MHz	Left	20050	20 MHz	QPSK	50	25	Reduced <sup>1</sup>			
		20175					Tested			
		20300					Reduced <sup>1</sup>			
		20050					100	0	Reduced <sup>1</sup>	
		20175							Reduced <sup>1</sup>	
		20300							Reduced <sup>1</sup>	
		20050			1	49			Reduced <sup>1</sup>	
		20175					Tested			
		20300			16QAM	50	25	Reduced <sup>3</sup>		
		20050						100	0	Reduced <sup>3</sup>
		20175								Reduced <sup>3</sup>
		20300								Reduced <sup>3</sup>
		20050						1	49	Reduced <sup>4</sup>
		20175								Reduced <sup>4</sup>
		20300		Reduced <sup>4</sup>						
		20050		99	99	Reduced <sup>2</sup>				
		20175				Reduced <sup>2</sup>				
		20300				Reduced <sup>2</sup>				
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>	

- Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
- Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
- Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
- Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
- Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**



Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 7 2500-2570 MHz	Front	20850	20 MHz	QPSK	50	25	Tested	
		21100					Tested	
		21350					Tested	
		20850			100	0	Reduced <sup>1</sup>	
		21100					Tested	
		21350					Reduced <sup>1</sup>	
		20850			1	49	Tested	
		21100					Tested	
		21350					Tested	
		20850					99	Reduced <sup>2</sup>
		21100			Reduced <sup>2</sup>			
		21350			Reduced <sup>2</sup>			
		20850			50	25	Reduced <sup>3</sup>	
		21100					Reduced <sup>3</sup>	
		21350		Reduced <sup>3</sup>				
		20850		100	0	Reduced <sup>1</sup>		
		21100				Reduced <sup>1</sup>		
		21350				Reduced <sup>1</sup>		
		20850		1	49	Reduced <sup>4</sup>		
		21100				Reduced <sup>4</sup>		
		21350				Reduced <sup>4</sup>		
	20850	99	Reduced <sup>4</sup>					
	21100		Reduced <sup>4</sup>					
	21350		Reduced <sup>4</sup>					
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>
	Back	QPSK	20850	20 MHz	50	25	Reduced <sup>1</sup>	
			21100				Tested	
			21350				Reduced <sup>1</sup>	
			20850		100	0	Reduced <sup>1</sup>	
			21100				Reduced <sup>1</sup>	
			21350				Reduced <sup>1</sup>	
			20850		1	49	Reduced <sup>1</sup>	
			21100				Tested	
			21350				Reduced <sup>1</sup>	
			20850				99	Reduced <sup>2</sup>
			21100		Reduced <sup>2</sup>			
			21350		Reduced <sup>2</sup>			
			20850		50	25	Reduced <sup>3</sup>	
			21100				Reduced <sup>3</sup>	
		21350	Reduced <sup>3</sup>					
		20850	100		0	Reduced <sup>1</sup>		
		21100				Reduced <sup>1</sup>		
21350		Reduced <sup>1</sup>						
20850		1	49		Reduced <sup>4</sup>			
21100					Reduced <sup>4</sup>			
21350					Reduced <sup>4</sup>			
20850	99			Reduced <sup>4</sup>				
21100		Reduced <sup>4</sup>						
21350		Reduced <sup>4</sup>						
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>	

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced			
Band 7 2500-2570 MHz	Left	20850	20 MHz	QPSK	50	25	Tested			
		21100					Tested			
		21350					Tested			
		20850			100	0	Reduced <sup>1</sup>			
		21100					Tested			
		21350					Reduced <sup>1</sup>			
		20850			1	49	Tested			
		21100					Tested			
		21350					Tested			
		20850				99	Reduced <sup>2</sup>			
		21100					Reduced <sup>2</sup>			
		21350					Reduced <sup>2</sup>			
		20850		50	25	Reduced <sup>3</sup>				
		21100				Reduced <sup>3</sup>				
		21350				Reduced <sup>3</sup>				
		20850			100	0	Reduced <sup>1</sup>			
		21100					Reduced <sup>1</sup>			
		21350					Reduced <sup>1</sup>			
		20850		1	49	Reduced <sup>4</sup>				
		21100				Reduced <sup>4</sup>				
		21350				Reduced <sup>4</sup>				
		20850			99	Reduced <sup>4</sup>				
		21100				Reduced <sup>4</sup>				
		21350				Reduced <sup>4</sup>				
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>	

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 12 699-716 MHz	Front	23060	10 MHz	QPSK	25	12	Reduced <sup>1</sup>	
		23095					Tested	
		23130					Reduced <sup>1</sup>	
		23060			50	0	Reduced <sup>1</sup>	
		23095					Reduced <sup>1</sup>	
		23130					Reduced <sup>1</sup>	
		23060			1	24	Reduced <sup>1</sup>	
		23095					Tested	
		23130					Reduced <sup>1</sup>	
		23060			49	24	Reduced <sup>2</sup>	
		23095					Reduced <sup>2</sup>	
		23130		Reduced <sup>2</sup>				
		23060		25	12	Reduced <sup>3</sup>		
		23095				Reduced <sup>3</sup>		
		23130				Reduced <sup>3</sup>		
		23060		50	0	Reduced <sup>1</sup>		
		23095				Reduced <sup>1</sup>		
		23130				Reduced <sup>1</sup>		
		23060		1	24	Reduced <sup>4</sup>		
		23095				Reduced <sup>4</sup>		
		23130				Reduced <sup>4</sup>		
		23060		49	24	Reduced <sup>4</sup>		
	23095	Reduced <sup>4</sup>						
	23130	Reduced <sup>4</sup>						
	All lower bandwidths (5 MHz)							Reduced <sup>5</sup>
	Back	Back	23060	10 MHz	QPSK	25	12	Reduced <sup>1</sup>
			23095					Tested
			23130					Reduced <sup>1</sup>
			23060			50	0	Reduced <sup>1</sup>
			23095					Reduced <sup>1</sup>
			23130					Reduced <sup>1</sup>
			23060			1	24	Reduced <sup>1</sup>
			23095					Tested
			23130					Reduced <sup>1</sup>
			23060			49	24	Reduced <sup>2</sup>
			23095					Reduced <sup>2</sup>
			23130		Reduced <sup>2</sup>			
			23060		25	12	Reduced <sup>3</sup>	
			23095				Reduced <sup>3</sup>	
			23130				Reduced <sup>3</sup>	
			23060		50	0	Reduced <sup>1</sup>	
			23095				Reduced <sup>1</sup>	
			23130				Reduced <sup>1</sup>	
			23060		1	24	Reduced <sup>4</sup>	
23095			Reduced <sup>4</sup>					
23130			Reduced <sup>4</sup>					
23060			49		24	Reduced <sup>4</sup>		
23095	Reduced <sup>4</sup>							
23130	Reduced <sup>4</sup>							
All lower bandwidths (5 MHz)							Reduced <sup>5</sup>	

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup> - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced			
Band 12 699-716 MHz	Left	23060	10 MHz	QPSK	25	12	Reduced <sup>1</sup>			
		23095					Tested			
		23130					Reduced <sup>1</sup>			
		23060			50	0	Reduced <sup>1</sup>			
		23095					Reduced <sup>1</sup>			
		23130					Reduced <sup>1</sup>			
		23060			1	24	Reduced <sup>1</sup>			
		23095					Tested			
		23130					Reduced <sup>1</sup>			
		23060				49	Reduced <sup>2</sup>			
		23095					Reduced <sup>2</sup>			
		23130					Reduced <sup>2</sup>			
		23060		16QAM	25	12	Reduced <sup>3</sup>			
		23095					Reduced <sup>3</sup>			
		23130					Reduced <sup>3</sup>			
		23060			50	0	Reduced <sup>1</sup>			
		23095					Reduced <sup>1</sup>			
		23130					Reduced <sup>1</sup>			
		23060			1	24	Reduced <sup>4</sup>			
		23095					Reduced <sup>4</sup>			
		23130					Reduced <sup>4</sup>			
		23060				49	Reduced <sup>4</sup>			
		23095					Reduced <sup>4</sup>			
		23130					Reduced <sup>4</sup>			
		All lower bandwidths (5 MHz)							Reduced <sup>5</sup>	

- Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
- Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
- Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
- Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
- Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 13 777-787 MHz	Front	23230	10 MHz	QPSK	25	12	Tested
		23230			50	0	Reduced <sup>1</sup>
		23230			1	24	Tested
		23230		16QAM	25	12	Reduced <sup>3</sup>
		23230			50	0	Reduced <sup>1</sup>
		23230			1	24	Reduced <sup>4</sup>
		23230			All lower bandwidths (5 MHz)	49	Reduced <sup>4</sup>
		23230				Reduced <sup>5</sup>	
	Back	10 MHz	QPSK	25	12	Tested	
				50	0	Reduced <sup>1</sup>	
				1	24	Tested	
			23230	16QAM	25	12	Reduced <sup>3</sup>
			23230		50	0	Reduced <sup>1</sup>
			23230		1	24	Reduced <sup>4</sup>
			23230		All lower bandwidths (5 MHz)	49	Reduced <sup>4</sup>
			23230			Reduced <sup>5</sup>	
	Left	10 MHz	QPSK	25	12	Tested	
				50	0	Reduced <sup>1</sup>	
				1	24	Tested	
			23230	16QAM	25	12	Reduced <sup>3</sup>
			23230		50	0	Reduced <sup>1</sup>
			23230		1	24	Reduced <sup>4</sup>
			23230		All lower bandwidths (5 MHz)	49	Reduced <sup>4</sup>
			23230			Reduced <sup>5</sup>	

Reduced<sup>1</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup> - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced		
Band 25 1850-1915 MHz	Front	26140	20 MHz	QPSK	50	0	Reduced <sup>1</sup>		
		26365					Tested		
		26590					Reduced <sup>1</sup>		
		26140			100	0	Reduced <sup>1</sup>		
		26365					Reduced <sup>1</sup>		
		26590					Reduced <sup>1</sup>		
		26140			1	49	Reduced <sup>2</sup>		
		26365					Tested		
		26590					Reduced <sup>2</sup>		
		26140			99	99	Reduced <sup>2</sup>		
		26365					Reduced <sup>2</sup>		
		26590					Reduced <sup>2</sup>		
		26140		50	25	Reduced <sup>3</sup>			
		26365				Reduced <sup>3</sup>			
		26590				Reduced <sup>3</sup>			
		26140		100	0	Reduced <sup>1</sup>			
		26365				Reduced <sup>1</sup>			
		26590				Reduced <sup>1</sup>			
		26140		1	49	Reduced <sup>4</sup>			
		26365				Reduced <sup>4</sup>			
		26590				Reduced <sup>4</sup>			
		26140		99	99	Reduced <sup>4</sup>			
		26365				Reduced <sup>4</sup>			
		26590				Reduced <sup>4</sup>			
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>	
	Back	QPSK	26140	20 MHz	50	25	Reduced <sup>1</sup>		
			26365				Tested		
			26590				Reduced <sup>1</sup>		
			26140				100	0	Reduced <sup>1</sup>
			26365						Reduced <sup>1</sup>
			26590						Reduced <sup>1</sup>
			26140		1	49	Reduced <sup>2</sup>		
			26365				Tested		
			26590				Reduced <sup>2</sup>		
			26140		99	99	Reduced <sup>2</sup>		
			26365				Reduced <sup>2</sup>		
			26590				Reduced <sup>2</sup>		
		26140	50		25	Reduced <sup>3</sup>			
		26365				Reduced <sup>3</sup>			
		26590				Reduced <sup>3</sup>			
		26140	100		0	Reduced <sup>1</sup>			
		26365				Reduced <sup>1</sup>			
		26590				Reduced <sup>1</sup>			
		26140	1		49	Reduced <sup>4</sup>			
		26365				Reduced <sup>4</sup>			
		26590				Reduced <sup>4</sup>			
		26140	99		99	Reduced <sup>4</sup>			
		26365				Reduced <sup>4</sup>			
26590		Reduced <sup>4</sup>							
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>		

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 25 1850-1915 MHz	Left	26140	20 MHz	QPSK	50	25	Reduced <sup>1</sup>
		26365					Tested
		26590					Reduced <sup>1</sup>
		26140			100	0	Reduced <sup>1</sup>
		26365					Tested
		26590					Reduced <sup>1</sup>
		26140			1	49	Tested
		26365					Tested
		26590					Tested
		26140		99		Reduced <sup>2</sup>	
		26365				Reduced <sup>2</sup>	
		26590				Reduced <sup>2</sup>	
		26140		16QAM	50	25	Reduced <sup>3</sup>
		26365					Reduced <sup>3</sup>
		26590					Reduced <sup>3</sup>
		26140			100	0	Reduced <sup>1</sup>
		26365					Reduced <sup>1</sup>
		26590					Reduced <sup>1</sup>
		26140			1	49	Reduced <sup>4</sup>
		26365					Reduced <sup>4</sup>
		26590					Reduced <sup>4</sup>
26140	99	Reduced <sup>4</sup>					
26365		Reduced <sup>4</sup>					
26590		Reduced <sup>4</sup>					
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced <sup>5</sup>

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 26 814-849 MHz	Front	26740	10 MHz	QPSK	25	12	Reduced <sup>1</sup>	
		26865					Tested	
		26990			Reduced <sup>1</sup>			
		26740			50	0	Reduced <sup>1</sup>	
		26865					Reduced <sup>1</sup>	
		26990			Reduced <sup>1</sup>			
		26740			1	24	Reduced <sup>1</sup>	
		26865					Tested	
		26990			Reduced <sup>1</sup>			
		26740			49		Reduced <sup>2</sup>	
		26865		Reduced <sup>2</sup>				
		26990		Reduced <sup>2</sup>				
		26740		25	12	Reduced <sup>3</sup>		
		26865				Reduced <sup>3</sup>		
		26990		50	0	Reduced <sup>3</sup>		
		26740				Reduced <sup>1</sup>		
		26865		Reduced <sup>1</sup>				
		26990		1	24	Reduced <sup>1</sup>		
		26740				Reduced <sup>4</sup>		
		26865		Reduced <sup>4</sup>				
	26990	49		Reduced <sup>4</sup>				
	26740			Reduced <sup>4</sup>				
	26865	Reduced <sup>4</sup>						
	26990	Reduced <sup>4</sup>						
	All lower bandwidths (5 MHz)							Reduced <sup>5</sup>
	Back		26740	10 MHz	QPSK	25	12	Reduced <sup>1</sup>
			26865					Tested
			26990			Reduced <sup>1</sup>		
			26740			50	0	Reduced <sup>1</sup>
			26865					Reduced <sup>1</sup>
			26990			Reduced <sup>1</sup>		
			26740			1	24	Reduced <sup>1</sup>
			26865					Tested
			26990			Reduced <sup>1</sup>		
			26740			49		Reduced <sup>2</sup>
			26865		Reduced <sup>2</sup>			
			26990		Reduced <sup>2</sup>			
			26740		25	12	Reduced <sup>3</sup>	
			26865				Reduced <sup>3</sup>	
			26990		50	0	Reduced <sup>3</sup>	
			26740				Reduced <sup>1</sup>	
			26865		Reduced <sup>1</sup>			
			26990		1	24	Reduced <sup>1</sup>	
			26740				Reduced <sup>4</sup>	
26865			Reduced <sup>4</sup>					
26990		49		Reduced <sup>4</sup>				
26740				Reduced <sup>4</sup>				
26865		Reduced <sup>4</sup>						
26990		Reduced <sup>4</sup>						
All lower bandwidths (5 MHz)							Reduced <sup>5</sup>	

Reduced<sup>1</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup> - If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.



Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 26 814-849 MHz	Left	26740	10 MHz	QPSK	25	12	Reduced <sup>1</sup>
		26865					Tested
		26990					Reduced <sup>1</sup>
		26740			50	0	Reduced <sup>1</sup>
		26865					Reduced <sup>1</sup>
		26990					Reduced <sup>1</sup>
		26740			1	24	Reduced <sup>1</sup>
		26865					Tested
		26990					Reduced <sup>1</sup>
		26740				49	Reduced <sup>2</sup>
		26865					Reduced <sup>2</sup>
		26990					Reduced <sup>2</sup>
		26740		16QAM	25	12	Reduced <sup>3</sup>
		26865					Reduced <sup>3</sup>
		26990					Reduced <sup>3</sup>
		26740			50	0	Reduced <sup>1</sup>
		26865					Reduced <sup>1</sup>
		26990					Reduced <sup>1</sup>
		26740			1	24	Reduced <sup>4</sup>
		26865					Reduced <sup>4</sup>
		26990					Reduced <sup>4</sup>
		26740				49	Reduced <sup>4</sup>
		26865					Reduced <sup>4</sup>
		26990					Reduced <sup>4</sup>
All lower bandwidths (5 MHz)							Reduced <sup>5</sup>

- Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
- Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
- Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
- Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
- Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 41 2496-2690 MHz	Front	39750	20 MHz	QPSK	50	25	Reduced <sup>1</sup>
		40185					Reduced <sup>1</sup>
		40620					Tested
		41055					Reduced <sup>1</sup>
		41490					Reduced <sup>1</sup>
		39750					Reduced <sup>1</sup>
		40185			Reduced <sup>1</sup>		
		40620			Reduced <sup>1</sup>		
		41055			Reduced <sup>1</sup>		
		41490			Reduced <sup>1</sup>		
		39750			100	0	Reduced <sup>1</sup>
		40185					Reduced <sup>1</sup>
		40620					Reduced <sup>1</sup>
		41055					Reduced <sup>1</sup>
		41490					Reduced <sup>1</sup>
		39750					Reduced <sup>1</sup>
		40185			1	49	Reduced <sup>1</sup>
		40620					Reduced <sup>1</sup>
		41055		Tested			
		41490		Reduced <sup>1</sup>			
		39750		Reduced <sup>1</sup>			
		40185		Reduced <sup>1</sup>			
		40620		99	99	Reduced <sup>2</sup>	
		41055				Reduced <sup>2</sup>	
		41490				Reduced <sup>2</sup>	
		39750				Reduced <sup>2</sup>	
		40185				Reduced <sup>2</sup>	
		40620				Reduced <sup>2</sup>	
		41055		50	25	Reduced <sup>3</sup>	
		41490				Reduced <sup>3</sup>	
		39750				Reduced <sup>3</sup>	
		40185				Reduced <sup>3</sup>	
		40620				Reduced <sup>3</sup>	
		41055				Reduced <sup>3</sup>	
		41490		100	0	Reduced <sup>1</sup>	
		39750				Reduced <sup>1</sup>	
40185	Reduced <sup>1</sup>						
40620	Reduced <sup>1</sup>						
41055	Reduced <sup>1</sup>						
41490	Reduced <sup>1</sup>						
39750	1	49	Reduced <sup>4</sup>				
40185			Reduced <sup>4</sup>				
40620			Reduced <sup>4</sup>				
41055			Reduced <sup>4</sup>				
41490			Reduced <sup>4</sup>				
39750			Reduced <sup>4</sup>				
40185	99	99	Reduced <sup>4</sup>				
40620			Reduced <sup>4</sup>				
41055			Reduced <sup>4</sup>				
41490			Reduced <sup>4</sup>				
39750			Reduced <sup>4</sup>				
40185			Reduced <sup>4</sup>				
All lower bandwidths (15 MHz, 10 MHz, 5 MHz)							Reduced <sup>5</sup>

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 41 2496-2690 MHz	Back	39750	20 MHz	QPSK	50	25	Reduced <sup>1</sup>	
		40185					Reduced <sup>1</sup>	
		40620					Tested	
		41055					Reduced <sup>1</sup>	
		41490					Reduced <sup>1</sup>	
		39750			100	0	Reduced <sup>1</sup>	
		40185					Reduced <sup>1</sup>	
		40620					Reduced <sup>1</sup>	
		41055					Reduced <sup>1</sup>	
		41490					Reduced <sup>1</sup>	
		39750			1	49	Reduced <sup>1</sup>	
		40185					Tested	
		40620					Reduced <sup>1</sup>	
		41055					Reduced <sup>1</sup>	
		41490					Reduced <sup>1</sup>	
		39750				99	Reduced <sup>2</sup>	Reduced <sup>2</sup>
		40185						Reduced <sup>2</sup>
		40620						Reduced <sup>2</sup>
		41055						Reduced <sup>2</sup>
		41490						Reduced <sup>2</sup>
		39750		50	25	Reduced <sup>3</sup>		
		40185				Reduced <sup>3</sup>		
		40620				Reduced <sup>3</sup>		
		41055				Reduced <sup>3</sup>		
		41490				Reduced <sup>3</sup>		
		39750		100	0	Reduced <sup>1</sup>		
		40185				Reduced <sup>1</sup>		
		40620				Reduced <sup>1</sup>		
		41055				Reduced <sup>1</sup>		
		41490				Reduced <sup>1</sup>		
		39750		1	49	Reduced <sup>4</sup>		
		40185				Reduced <sup>4</sup>		
		40620				Reduced <sup>4</sup>		
		41055				Reduced <sup>4</sup>		
		41490				Reduced <sup>4</sup>		
		39750			99	Reduced <sup>4</sup>	Reduced <sup>4</sup>	
		40185					Reduced <sup>4</sup>	
		40620					Reduced <sup>4</sup>	
		41055					Reduced <sup>4</sup>	
		41490					Reduced <sup>4</sup>	
All lower bandwidths (15 MHz, 10 MHz, 5 MHz)							Reduced <sup>5</sup>	

Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.  
 Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.  
 Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.  
 Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.  
 Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced			
Band 41 2496-2690 MHz	Left	39750	20 MHz	QPSK	50	25	Reduced <sup>1</sup>			
		40185					Reduced <sup>1</sup>			
		40620					Tested			
		41055					Reduced <sup>1</sup>			
		41490					Reduced <sup>1</sup>			
		39750			100	0	Reduced <sup>1</sup>			
		40185					Reduced <sup>1</sup>			
		40620					Reduced <sup>1</sup>			
		41055					Reduced <sup>1</sup>			
		41490					Reduced <sup>1</sup>			
		39750			1	49	Reduced <sup>1</sup>			
		40185					Reduced <sup>1</sup>			
		40620					Tested			
		41055					Reduced <sup>1</sup>			
		41490					Reduced <sup>1</sup>			
		39750				99		Reduced <sup>2</sup>		
		40185						Reduced <sup>2</sup>		
		40620						Reduced <sup>2</sup>		
		41055						Reduced <sup>2</sup>		
		41490						Reduced <sup>2</sup>		
		39750			50	25	Reduced <sup>3</sup>			
		40185		Reduced <sup>3</sup>						
		40620		Reduced <sup>3</sup>						
		41055		Reduced <sup>3</sup>						
		41490		Reduced <sup>3</sup>						
		39750		100		0	Reduced <sup>1</sup>			
		40185					Reduced <sup>1</sup>			
		40620					Reduced <sup>1</sup>			
		41055					Reduced <sup>1</sup>			
		41490					Reduced <sup>1</sup>			
		39750		1	49	Reduced <sup>4</sup>				
		40185				Reduced <sup>4</sup>				
		40620				Reduced <sup>4</sup>				
		41055				Reduced <sup>4</sup>				
		41490				Reduced <sup>4</sup>				
		39750			99		Reduced <sup>4</sup>			
		40185					Reduced <sup>4</sup>			
		40620					Reduced <sup>4</sup>			
		41055					Reduced <sup>4</sup>			
		41490					Reduced <sup>4</sup>			
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz)							Reduced <sup>5</sup>	

- Reduced<sup>1</sup> – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.
- Reduced<sup>2</sup> - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.
- Reduced<sup>3</sup> - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.
- Reduced<sup>4</sup>- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.
- Reduced<sup>5</sup>- If the conducted power is within ±0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

**All remaining sides are reduced based on the calculations in 47 CFR 1307.**


**SAR Data Summary – 750 MHz Body – LTE Band 12**

**MEASUREMENT RESULTS**

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	1	Front	707.5	23095	10 MHz/QPSK	1	24	0	23.7	0.406	0.44
	-----		707.5	23095	10 MHz/QPSK	25	13	1	22.6	0.323	0.35
	-----	Back	707.5	23095	10 MHz/QPSK	1	24	0	23.7	0.266	0.29
	-----		707.5	23095	10 MHz/QPSK	25	13	1	22.6	0.215	0.24
	-----	Left	707.5	23095	10 MHz/QPSK	1	24	0	23.7	0.240	0.26
	-----		707.5	23095	10 MHz/QPSK	25	13	1	22.6	0.192	0.21

**Head**  
**1.6 W/kg (mW/g)**  
 averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
 Vice President


### SAR Data Summary – 750 MHz Body – LTE Band 13

**MEASUREMENT RESULTS**

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	2	Front	782.0	23230	10 MHz/QPSK	1	24	0	23.9	0.261	0.27
	-----		782.0	23230	10 MHz/QPSK	25	13	1	22.8	0.215	0.23
	-----	Back	782.0	23230	10 MHz/QPSK	1	24	0	23.9	0.209	0.21
	-----		782.0	23230	10 MHz/QPSK	25	13	1	22.8	0.165	0.17
	-----	Left	782.0	23230	10 MHz/QPSK	1	24	0	23.9	0.205	0.21
	-----		782.0	23230	10 MHz/QPSK	25	13	1	22.8	0.159	0.17

**Head**  
1.6 W/kg (mW/g)  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

**SAR Data Summary – 835 MHz Body – GPRS Band 5**

<b>MEASUREMENT RESULTS</b>								
Gap	Plot	Position	Frequency		Modulation	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.				
0 mm	3	Front	836.6	190	GMSK/2 Slot	29.37	0.127	0.19
	-----	Back	836.6	190	GMSK/2 Slot	29.37	0.0895	0.13
	-----	Left	836.6	190	GMSK/2 Slot	29.37	0.0742	0.11
						<b>Body</b> <b>1.6 W/kg (mW/g)</b> averaged over 1 gram		

1. SAR Measurement
  - Phantom Configuration
    - Left Head
    - Head
    - Eli4
    - Right Head
    - Body
  - 2. Test Signal Call Mode
    - Test Code
    - Base Station Simulator
  - 3. Test Configuration
    - With Belt Clip
    - Without Belt Clip
    - N/A
  - 4. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

**SAR Data Summary – 835 MHz Body - WCDMA**

**MEASUREMENT RESULTS**

Gap	Plot	Frequency		Modulation	Position	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
0 mm	4	836.6	4183	WCDMA	Front	23.15	12.2 kbps	Test Loop 1	0.328	0.40
	----	836.6	4183	WCDMA	Back	23.15	12.2 kbps	Test Loop 1	0.210	0.26
	----	836.6	4183	WCDMA	Left	23.15	12.2 kbps	Test Loop 1	0.228	0.28

**Head**  
**1.6 W/kg (mW/g)**  
 averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
 Vice President




**SAR Data Summary – 835 MHz Body – LTE Band 26**

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	5	Front	831.5	26865	10 MHz/QPSK	1	24	0	23.1	0.250	0.31
	-----		831.5	26865	10 MHz/QPSK	25	13	1	22.3	0.196	0.23
	-----	Back	831.5	26865	10 MHz/QPSK	1	24	0	23.1	0.225	0.28
	-----		831.5	26865	10 MHz/QPSK	25	13	1	22.3	0.182	0.21
	-----	Left	831.5	26865	10 MHz/QPSK	1	24	0	23.1	0.221	0.27
	-----		831.5	26865	10 MHz/QPSK	25	13	1	22.3	0.174	0.20

**Head**  
1.6 W/kg (mW/g)  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: Band 5 LTE is fully within the frequency band of B26. Therefore, Band 5 was not tested for standalone SAR.

**SAR Data Summary – 1750 MHz Body - WCDMA**

**MEASUREMENT RESULTS**

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
0 mm	6	1732.6	1413	WCDMA	Front	23.05	12.2 kbps	Test Loop 1	0.351	0.44
	----	1732.6	1413	WCDMA	Back	23.05	12.2 kbps	Test Loop 1	0.230	0.29
	----	1732.6	1413	WCDMA	Left	23.05	12.2 kbps	Test Loop 1	0.189	0.24

**Head**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.  
Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
Phantom Configuration  Left Head  Eli4  Right Head  
SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

## SAR Data Summary – 1750 MHz Body – LTE Band 4

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Front	1732.5	20175	20 MHz/QPSK	1	49	0	23.1	0.195	0.24
	-----		1732.5	20175	20 MHz/QPSK	50	24	1	22.4	0.154	0.18
	7	Back	1732.5	20175	20 MHz/QPSK	1	49	0	23.1	0.223	0.27
	-----		1732.5	20175	20 MHz/QPSK	50	24	1	22.4	0.180	0.21
	-----	Left	1732.5	20175	20 MHz/QPSK	1	49	0	23.1	0.178	0.22
	-----		1732.5	20175	20 MHz/QPSK	50	24	1	22.4	0.139	0.16

**Head**  
1.6 W/kg (mW/g)  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

**SAR Data Summary – 1900 MHz Body – GPRS Band 2**

<b>MEASUREMENT RESULTS</b>								
Gap	Plot	Position	Frequency		Modulation	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.				
0 mm	8	Front	1880.0	661	GMSK/2 Slot	26.07	0.417	0.82
	-----	Back	1880.0	661	GMSK/2 Slot	26.07	0.280	0.55
	-----	Left	1880.0	661	GMSK/2 Slot	26.07	0.352	0.69
<b>Body</b>						<b>1.6 W/kg (mW/g)</b> averaged over 1 gram		

1. SAR Measurement  
 Phantom Configuration     Left Head                     Eli4                     Right Head  
 SAR Configuration         Head                         Body
2. Test Signal Call Mode     Test Code                     Base Station Simulator
3. Test Configuration         With Belt Clip             Without Belt Clip     N/A
4. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

**SAR Data Summary – 1900 MHz Body - WCDMA**

**MEASUREMENT RESULTS**

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power (dBm)	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
0 mm	----	1852.4	9262	WCDMA	Front	23.01	12.2 kbps	Test Loop 1	0.642	0.81
	9	1880.0	9400	WCDMA		23.27	12.2 kbps	Test Loop 1	0.750	0.89
	----	1907.6	9538	WCDMA		23.12	12.2 kbps	Test Loop 1	0.695	0.85
	----	1880.0	9400	WCDMA	Back	23.27	12.2 kbps	Test Loop 1	0.467	0.55
	----	1880.0	9400	WCDMA	Left	23.27	12.2 kbps	Test Loop 1	0.638	0.76
	----	1880.0	9400	WCDMA	Repeated	23.27	12.2 kbps	Test Loop 1	0.735	0.87

**Head**  
**1.6 W/kg (mW/g)**  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
 Vice President

## SAR Data Summary – 1900 MHz Body – LTE Band 25

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	-----	Front	1882.5	26365	20 MHz/QPSK	1	49	0	23.0	0.332	0.42
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	22.2	0.173	0.21
	-----	Back	1882.5	26365	20 MHz/QPSK	1	49	0	23.0	0.597	0.75
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	22.2	0.469	0.56
	-----	Left	1860.0	26140	20 MHz/QPSK	1	49	0	23.4	0.711	0.82
	-----		1882.5	26365	20 MHz/QPSK	1	49	0	23.0	0.763	0.96
	-----		1905.0	26590	20 MHz/QPSK	1	49	0	23.2	0.723	0.87
	-----		1882.5	26365	20 MHz/QPSK	50	24	1	22.2	0.603	0.73
	-----		1882.5	26365	20 MHz/QPSK	100	0	1	22.2	0.542	0.65
	-----	Repeated	1882.5	26365	20 MHz/QPSK	1	49	0	23.0	0.751	0.95

**Head**  
**1.6 W/kg (mW/g)**  
 averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President

Note: Band 2 LTE is fully within the frequency band of B25. Therefore, Band 2 was not tested for standalone SAR.


**SAR Data Summary – 2600 MHz Body – LTE Band 7**

**MEASUREMENT RESULTS**

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	----	Front	2510.0	20850	20 MHz/QPSK	1	49	0	23.9	1.08	1.11
	----		2535.0	21100	20 MHz/QPSK	1	49	0	23.6	1.16	1.27
	----		2560.0	21350	20 MHz/QPSK	1	49	0	23.9	1.21	1.24
	----		2510.0	20850	20 MHz/QPSK	50	24	1	23.0	0.918	0.92
	----		2535.0	21100	20 MHz/QPSK	50	24	1	23.0	0.988	0.99
	----		2560.0	21350	20 MHz/QPSK	50	24	1	22.5	0.936	1.05
	----		2535.0	21100	20 MHz/QPSK	100	0	1	22.9	0.802	0.82
	----	Back	2560.0	21350	20 MHz/QPSK	1	49	0	23.6	0.509	0.56
	----		2510.0	20850	20 MHz/QPSK	50	24	1	23.0	0.401	0.40
	11	Left	2510.0	20850	20 MHz/QPSK	1	49	0	23.9	1.37	1.40
	----		2535.0	21100	20 MHz/QPSK	1	49	0	23.6	1.27	1.39
	----		2560.0	21350	20 MHz/QPSK	1	49	0	23.9	1.22	1.25
	----		2510.0	20850	20 MHz/QPSK	50	24	1	23.0	1.09	1.09
	----		2535.0	21100	20 MHz/QPSK	50	24	1	23.0	1.03	1.03
	----		2560.0	21350	20 MHz/QPSK	50	24	1	22.5	0.943	1.06
	----	2535.0	21100	20 MHz/QPSK	100	0	1	22.9	0.879	0.90	
	----	Repeat	2535.0	21100	20 MHz/QPSK	1	49	0	23.9	1.35	1.38

**Head**  
1.6 W/kg (mW/g)  
averaged over 1 gram

- Battery is fully charged for all tests.  
Power Measured  Conducted  ERP  EIRP
- SAR Measurement  
Phantom Configuration  Left Head  Eli4  Right Head  
SAR Configuration  Head  Body
- Test Signal Call Mode  Test Code  Base Station Simulator
- Test Configuration  With Belt Clip  Without Belt Clip  N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President


**SAR Data Summary – 2550 MHz Body – LTE Band 41**

**MEASUREMENT RESULTS**

Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
0 mm	12	Front	2593.0	40620	20 MHz/QPSK	1	49	0	22.8	0.439	0.58
	-----		2593.0	40620	20 MHz/QPSK	50	24	1	21.9	0.344	0.44
	-----	Back	2593.0	40620	20 MHz/QPSK	1	49	0	22.8	0.175	0.23
	-----		2593.0	40620	20 MHz/QPSK	50	24	1	21.9	0.135	0.17
	-----	Left	2593.0	40620	20 MHz/QPSK	1	49	0	22.8	0.359	0.47
	-----		2593.0	40620	20 MHz/QPSK	50	24	1	21.9	0.283	0.37

**Head**  
1.6 W/kg (mW/g)  
averaged over 1 gram

1. Battery is fully charged for all tests.  
 Power Measured  Conducted  ERP  EIRP
2. SAR Measurement  
 Phantom Configuration  Left Head  Eli4  Right Head  
 SAR Configuration  Head  Body
3. Test Signal Call Mode  Test Code  Base Station Simulator
4. Test Configuration  With Belt Clip  Without Belt Clip  N/A
5. Tissue Depth is at least 15.0 cm



Jay M. Moulton  
Vice President



## Carrier Aggregation Evaluation

### MIMO

This device only supports LTE downlink 2x2 MIMO. Per Fall 2017 TCB Workshop Notes, SAR for LTE MIMO operations was not needed since the maximum average output power in LTE MIMO mode was not >0.25 dB higher than the maximum output power when MIMO is inactive.

## 10. Test Equipment List

**Table 10.1 Equipment Specifications**

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI4 Flat Phantom	N/A	N/A	1065
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	02/18/2023	02/18/2022	1217
SPEAG E-Field Probe EX3DV4	04/16/2022	04/16/2021	7531
Speag Validation Dipole D750V2	06/04/2022	06/04/2021	1053
Speag Validation Dipole D900V2	06/04/2022	06/04/2021	1d128
Speag Validation Dipole D1750V2	06/03/2022	06/03/2021	1061
Speag Validation Dipole D1900V2	06/04/2022	06/04/2021	5d147
Speag Validation Dipole D2550V2	06/03/2022	06/03/2021	1003
Agilent N1911A Power Meter	03/16/2022	03/16/2021	GB45100254
Agilent N1922A Power Sensor	03/17/2022	03/17/2021	MY45240464
Agilent (HP) 8561E Spectrum Analyzer	03/15/2022	03/15/2021	31720068
Agilent (HP) 8350B Signal Generator	03/16/2022	03/16/2021	2749A10226
Agilent (HP) 83525A RF Plug-In	03/16/2022	03/16/2021	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/15/2022	03/15/2021	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/15/2022	03/15/2021	2904A00595
Anritsu MT8820C	04/23/2022	04/23/2021	6201381721
Aprel Dielectric Probe Assembly	N/A	N/A	0011
Head Equivalent Matter (750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (2550 MHz)	N/A	N/A	N/A

## 11. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

## 12. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
  
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
  
- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
  
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
  
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
  
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
  
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

## Appendix A – System Validation Plots and Data

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Fri 04/Mar/2022

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.7000	42.20	0.89	41.76	0.86
0.7040	42.18	0.89	41.732	0.864*
0.7075	42.163	0.89	41.708	0.868*
0.7100	42.15	0.89	41.69	0.87
0.7110	42.145	0.89	41.685	0.871*
0.7200	42.10	0.89	41.64	0.88
0.7300	42.05	0.89	41.57	0.89
0.7400	41.99	0.89	41.51	0.89
0.7500	41.94	0.89	41.46	0.90
0.7600	41.89	0.89	41.40	0.91
0.7700	41.84	0.89	41.34	0.92
0.7800	41.79	0.90	41.28	0.92
0.7820	41.778	0.90	41.268	0.922*
0.7900	41.73	0.90	41.22	0.93
0.8000	41.68	0.90	41.18	0.93

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Wed 02/Mar/2022

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
0.8000	41.68	0.90	41.52	0.89
0.8100	41.63	0.90	41.47	0.90
0.8200	41.58	0.90	41.41	0.91
0.8215	41.573	0.90	41.418	0.91*
0.8242	41.559	0.90	41.431	0.91*
0.8264	41.548	0.90	41.442	0.91*
0.8300	41.53	0.90	41.46	0.91
0.8315	41.526	0.902	41.456	0.912*
0.8366	41.51	0.907	41.44	0.917*
0.8400	41.50	0.91	41.43	0.92
0.8415	41.50	0.912	41.427	0.922*
0.8466	41.50	0.917	41.417	0.927*
0.8488	41.50	0.919	41.412	0.929*
0.8500	41.50	0.92	41.41	0.93
0.8600	41.50	0.93	41.39	0.94
0.8700	41.50	0.94	41.37	0.95
0.8800	41.50	0.95	41.36	0.96
0.8900	41.50	0.96	41.35	0.97
0.9000	41.50	0.97	41.34	0.98
0.9100	41.50	0.98	41.33	0.99
0.9200	41.49	0.98	41.32	0.99

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Tue 01/Mar/2022

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
1.7000	40.16	1.34	39.34	1.36
1.7100	40.14	1.35	39.32	1.37
1.7124	40.138	1.35	39.315	1.372*
1.7200	40.13	1.35	39.30	1.38
1.7300	40.11	1.36	39.28	1.38
1.7325	40.105	1.363	39.275	1.383*
1.7326	40.105	1.363	39.275	1.383*
1.7400	40.09	1.37	39.26	1.39
1.7450	40.085	1.37	39.25	1.395*
1.7500	40.08	1.37	39.24	1.40
1.7526	40.075	1.373	39.235	1.403*
1.7600	40.06	1.38	39.22	1.41
1.7700	40.05	1.38	39.20	1.42
1.7800	40.03	1.39	39.18	1.42
1.7900	40.02	1.39	39.16	1.43

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Mon 28/Feb/2022

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
1.8500	40.00	1.40	39.97	1.37
1.8502	40.00	1.40	39.97	1.37*
1.8524	40.00	1.40	39.65	1.372*
1.8600	40.00	1.40	39.95	1.38
1.8700	40.00	1.40	39.93	1.38
1.8800	40.00	1.40	39.91	1.39
1.8825	40.00	1.40	39.905	1.39*
1.8900	40.00	1.40	39.89	1.39
1.9000	40.00	1.40	39.87	1.39
1.9050	40.00	1.40	39.86	1.395*
1.9076	40.00	1.40	39.855	1.398*
1.9098	40.00	1.40	39.85	1.40*
1.9100	40.00	1.40	39.85	1.40
1.9200	40.00	1.40	39.84	1.41

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Thu 03/Mar/2022

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
2.4900	39.15	1.84	39.09	1.86
2.5000	39.14	1.85	39.07	1.87
2.5060	39.128	1.862	39.052	1.876*
2.5100	39.12	1.87	39.04	1.88
2.5200	39.11	1.88	39.02	1.90
2.5300	39.10	1.89	39.00	1.91
2.5350	39.095	1.895	38.985	1.915*
2.5400	39.09	1.90	38.97	1.92
2.5495	39.071	1.91	38.951	1.939*
2.5500	39.07	1.91	38.95	1.94
2.5600	39.06	1.92	38.93	1.95
2.5700	39.05	1.93	38.90	1.96
2.5800	39.03	1.94	38.88	1.98
2.5900	39.02	1.95	38.85	1.99
2.5930	39.017	1.953	38.853	1.99*
2.6000	39.01	1.96	38.86	1.99
2.6100	39.00	1.97	38.84	2.00
2.6200	38.98	1.99	38.83	2.01
2.6300	38.97	2.00	38.81	2.02
2.6365	38.964	2.007	38.797	2.027*
2.6400	38.96	2.01	38.79	2.03
2.6500	38.95	2.02	38.77	2.04
2.6600	38.93	2.03	38.76	2.05

\* value interpolated

# RF Exposure Lab

## Plot 1

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN 1053**

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: HSL750; Medium parameters used (interpolated):  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.46$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 3/4/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN7531; ConvF(10.49, 10.49, 10.49); Calibrated: 4/16/2021;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:


**750 MHz Head/Verification/Area Scan (41x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.883 W/kg

**750 MHz Head/Verification /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 31.949 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.691 mW/g  
 $P_{in} = 100$  mW

**SAR(1 g) = 0.858 mW/g; SAR(10 g) = 0.552 mW/g**  
Maximum value of SAR (measured) = 0.888 W/kg

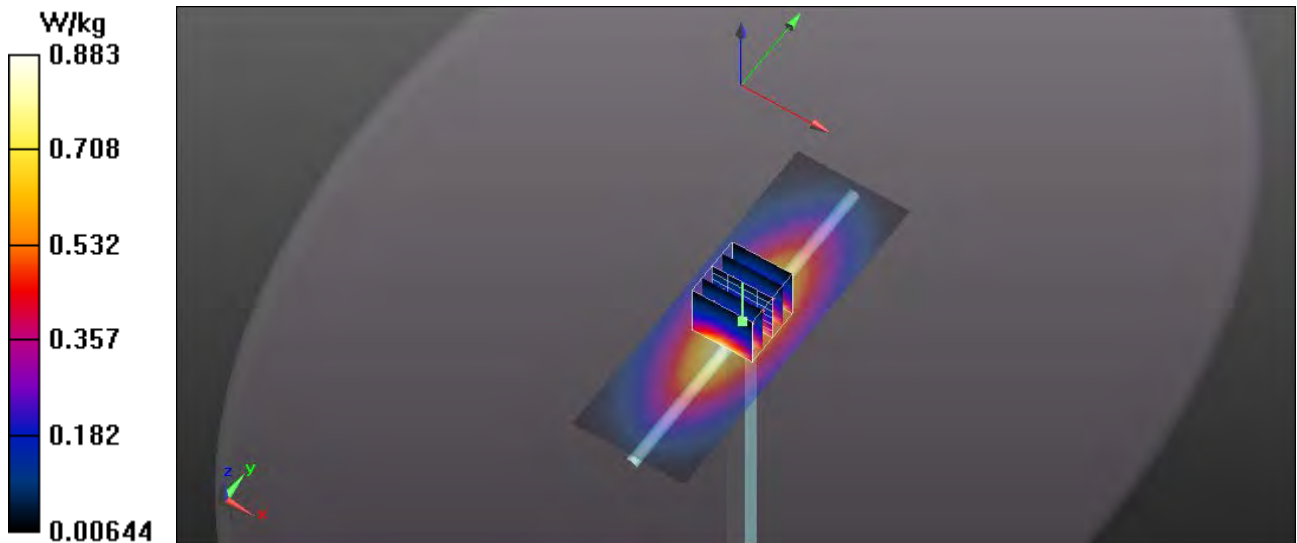



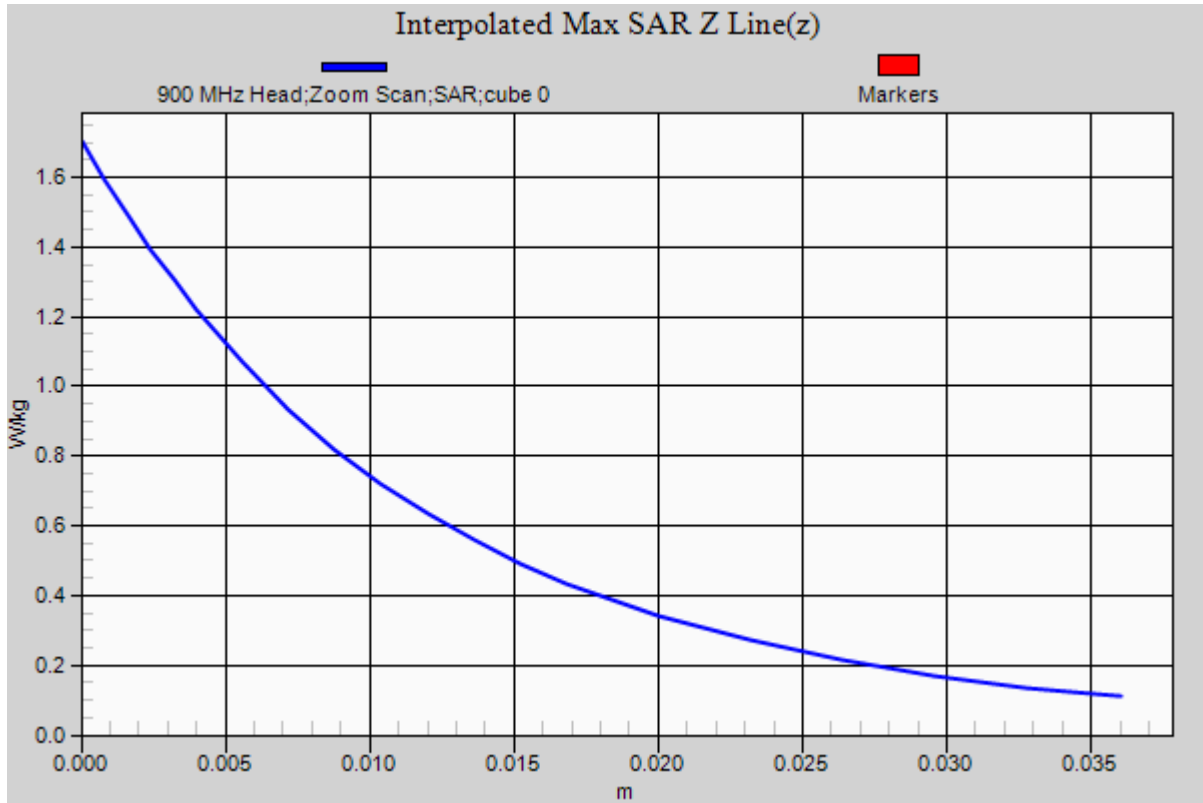

# RF Exposure Lab

## Plot 2

**DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d128**


Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1  
Medium: HSL900; Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 0.98 \text{ S/m}$ ;  $\epsilon_r = 41.34$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 - SN7531; ConvF(10.16, 10.16, 10.16); Calibrated: 4/15/2021;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**900 MHz/Verification/Area Scan (5x11x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
Maximum value of SAR (measured) = 1.19 W/kg

**900 MHz/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 31.568 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 1.43 W/kg  
 $P_{in} = 100 \text{ mW}$   
**SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.712 W/kg**  
Maximum value of SAR (measured) = 1.2 W/kg

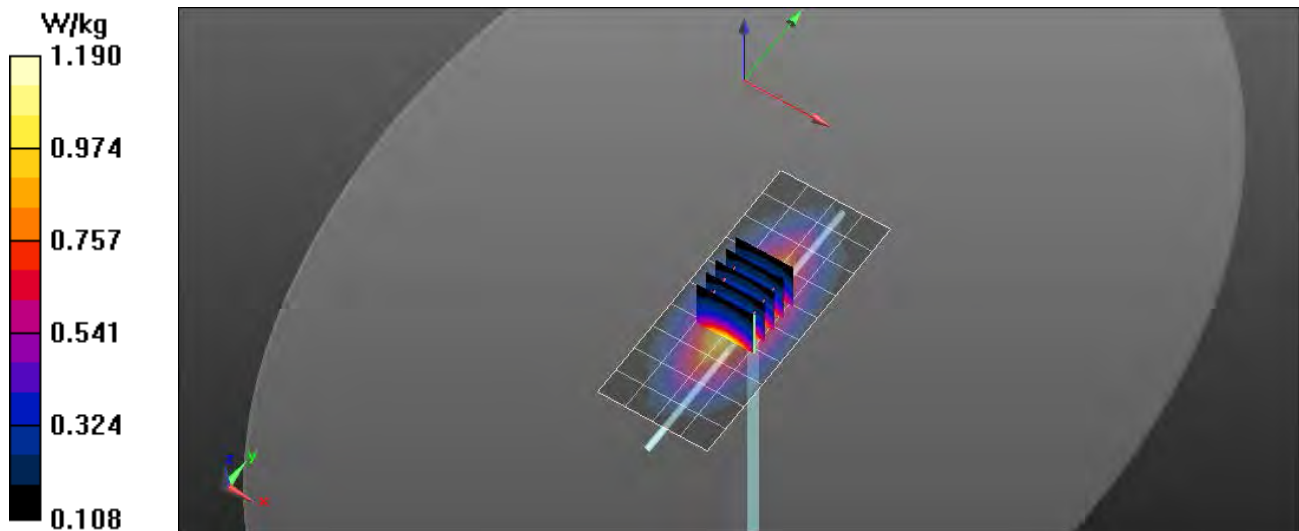

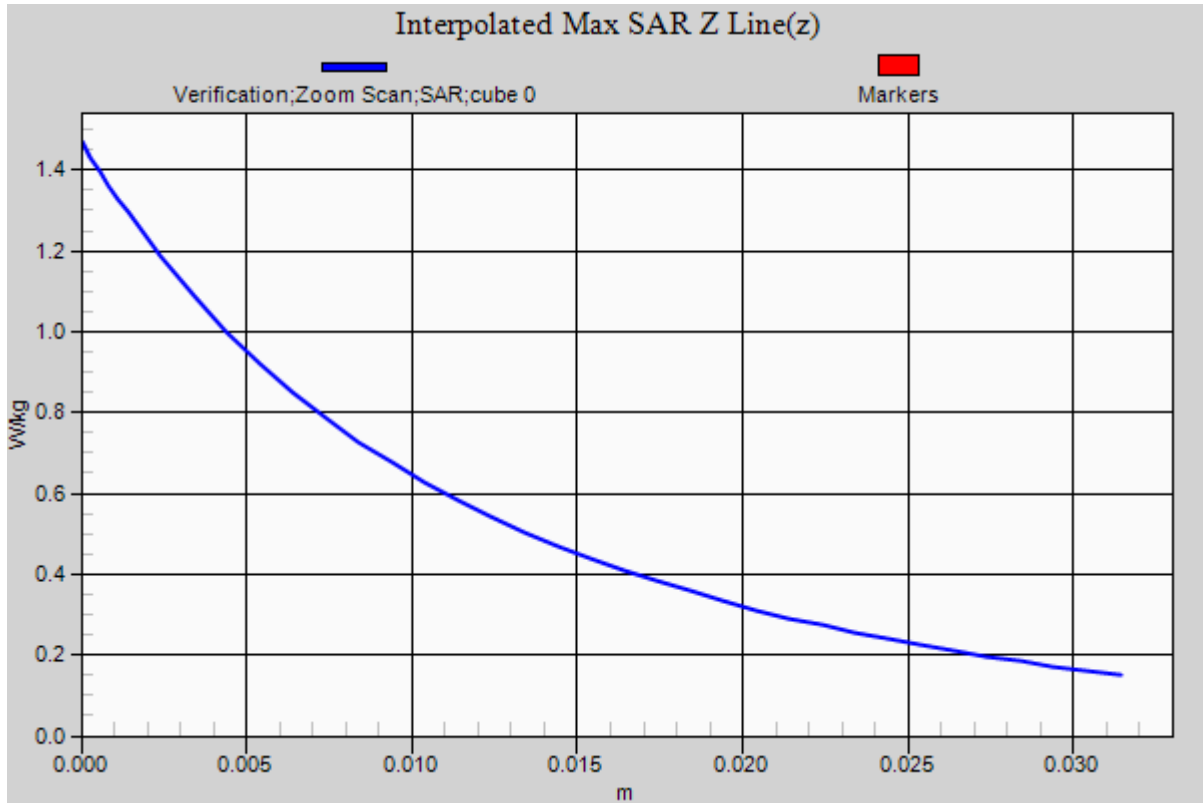

# RF Exposure Lab

## Plot 3

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061**


Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: HSL1750; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.4$  S/m;  $\epsilon_r = 39.24$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 3/1/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 - SN7531; ConvF(8.57, 8.57, 8.57); Calibrated: 4/16/2021;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**1750 MHz/Verification/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.38 W/kg

**1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 33.639 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 6.87 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 3.78 W/kg; SAR(10 g) = 1.97 W/kg**  
Maximum value of SAR (measured) = 5.47 W/kg

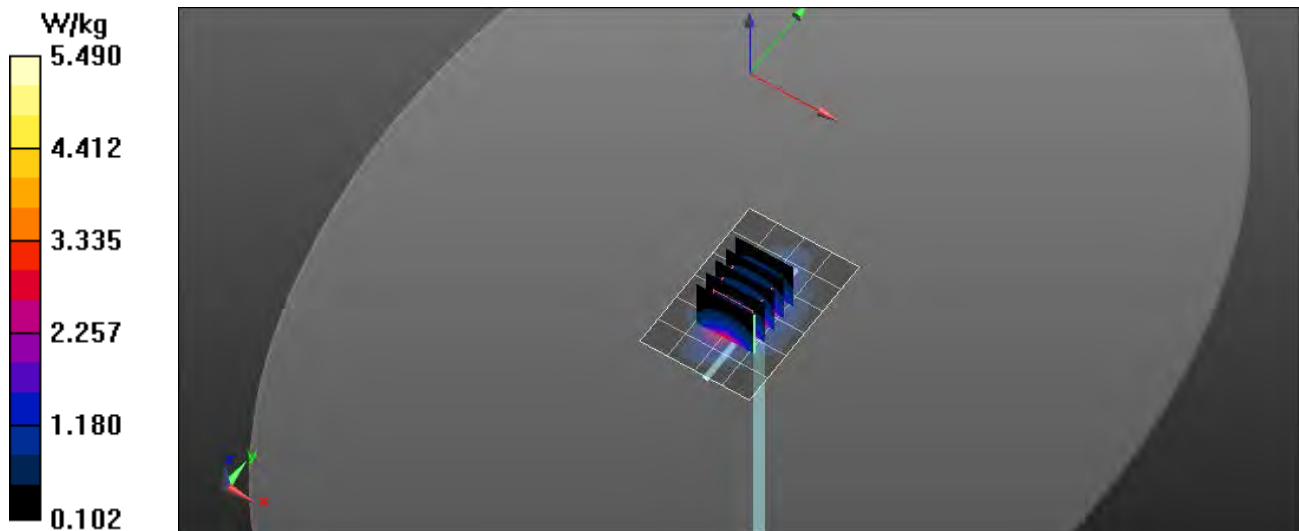

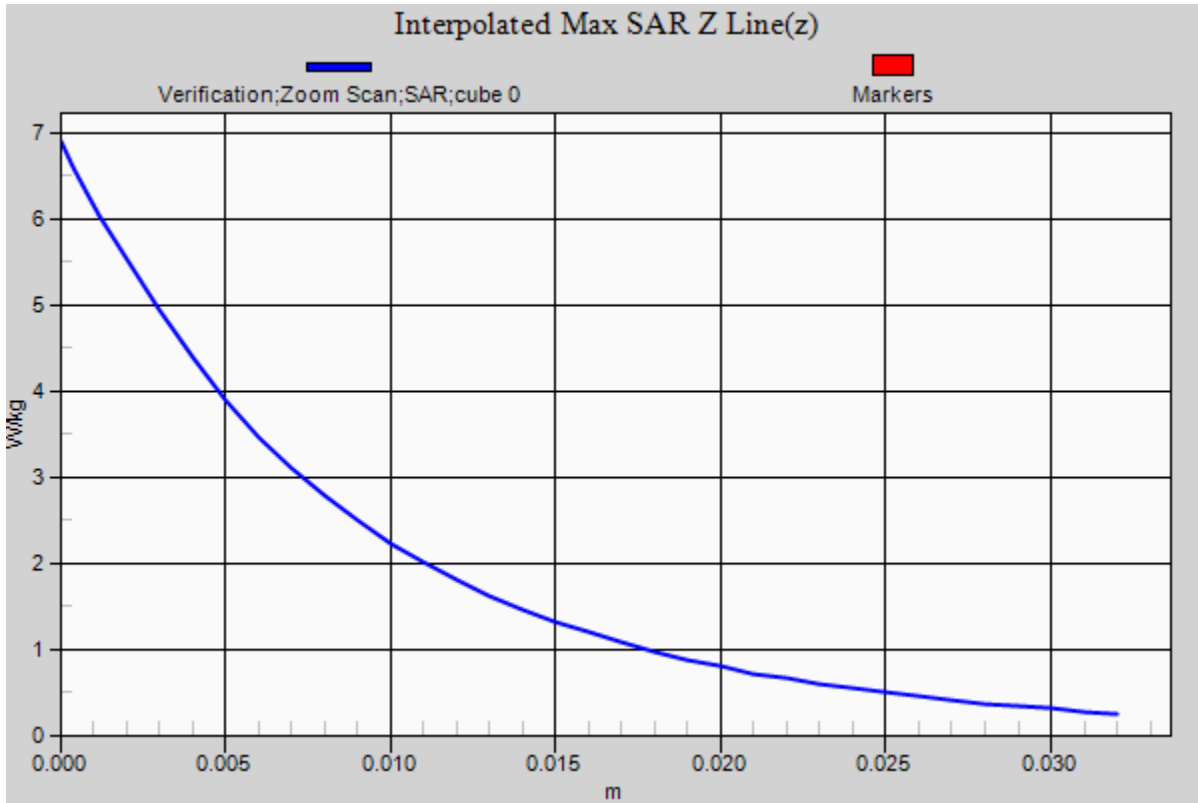

# RF Exposure Lab

## Plot 4

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d147**


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: HSL1950; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 39.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 2/28/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 - SN7531; ConvF(8.05, 8.05, 8.05); Calibrated: 4/16/2021;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**1900 MHz/Verification/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.52 W/kg

**1900 MHz/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 32.186 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 7.25 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 4.15 W/kg; SAR(10 g) = 2.16 W/kg**  
Maximum value of SAR (measured) = 5.79 W/kg

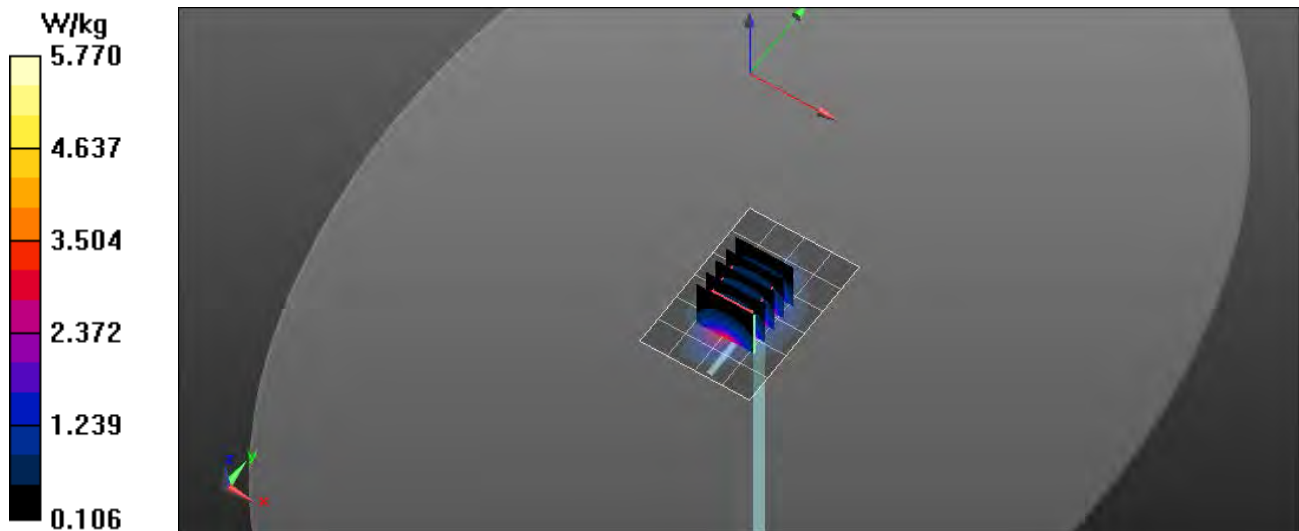

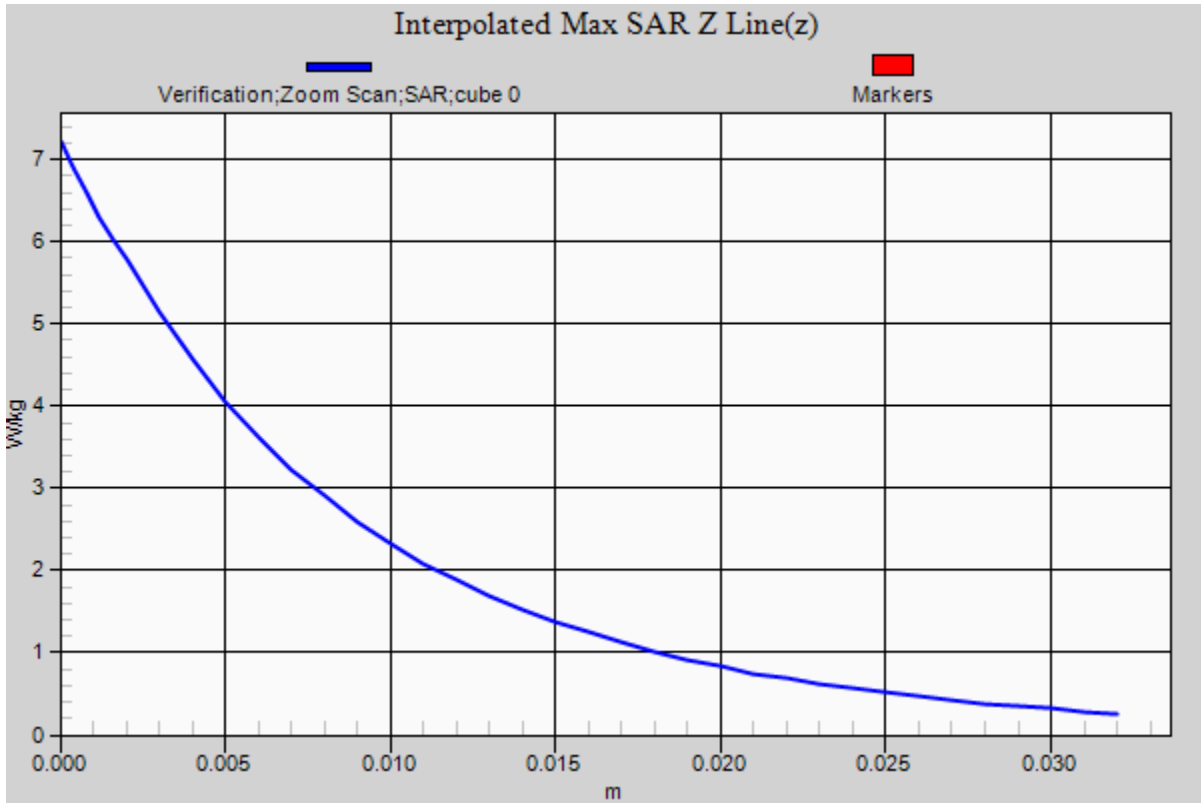

# RF Exposure Lab

## Plot 5

**DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003**


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used:  $f = 2550$  MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 38.95$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/3/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 - SN7531; ConvF(7.3, 7.3, 7.3); Calibrated: 4/16/2021;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**2550 MHz Body/Verification/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.18 W/kg

**2550 MHz Body/Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 54.541 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 11.5 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 5.64 W/kg; SAR(10 g) = 2.48 W/kg**  
Maximum value of SAR (measured) = 8.98 W/kg

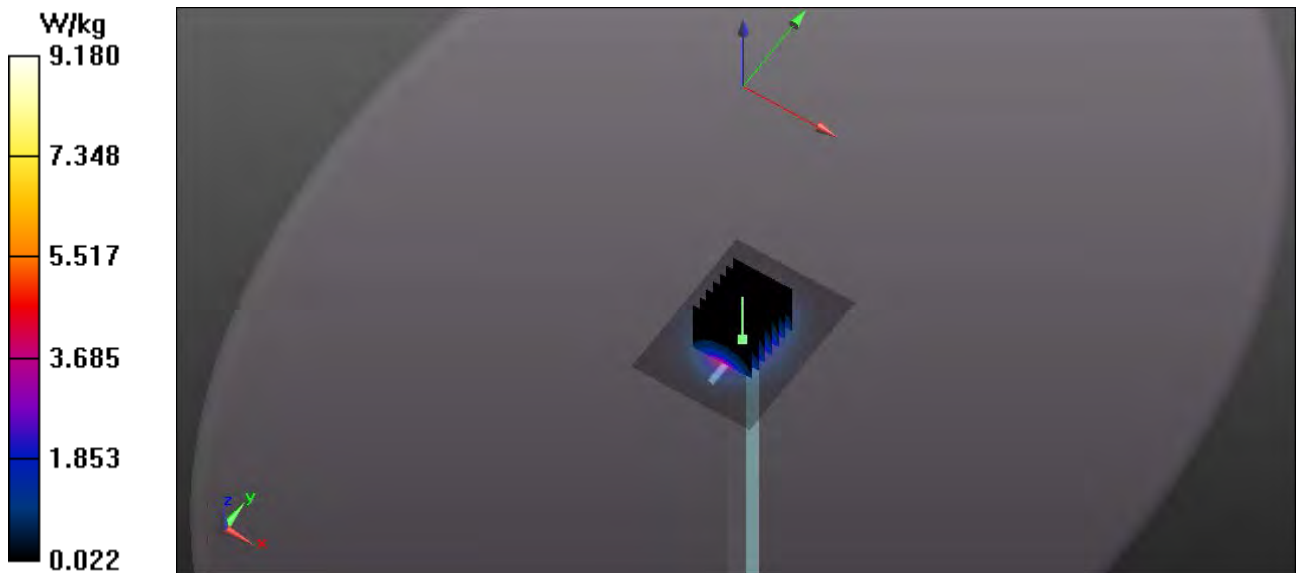



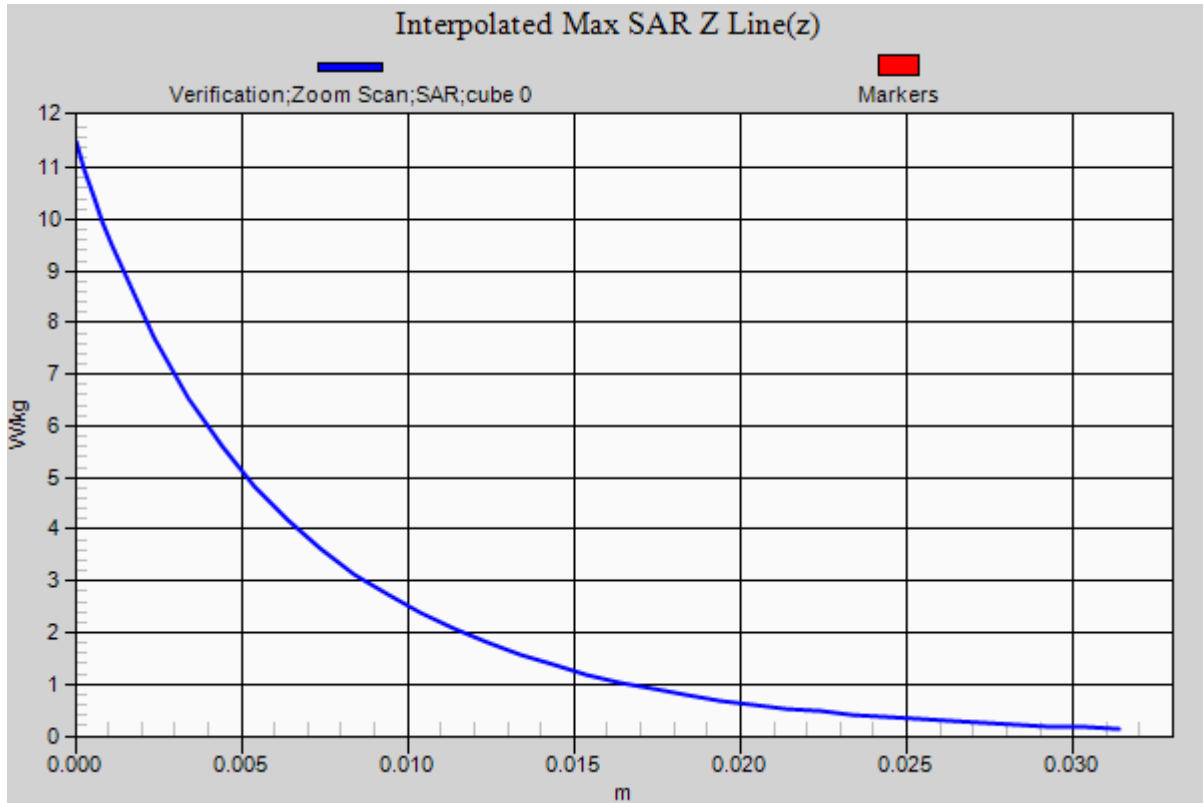

## Appendix B – SAR Test Data Plots

# RF Exposure Lab

## Plot 1

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL750; Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 41.708$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/4/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(10.49, 10.49, 10.49); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B12 LTE/Front 1 RB 24 Offset Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.524 W/kg

**B12 LTE/Front 1 RB 24 Offset Mid/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.73 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.668 W/kg

**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.256 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.542 W/kg

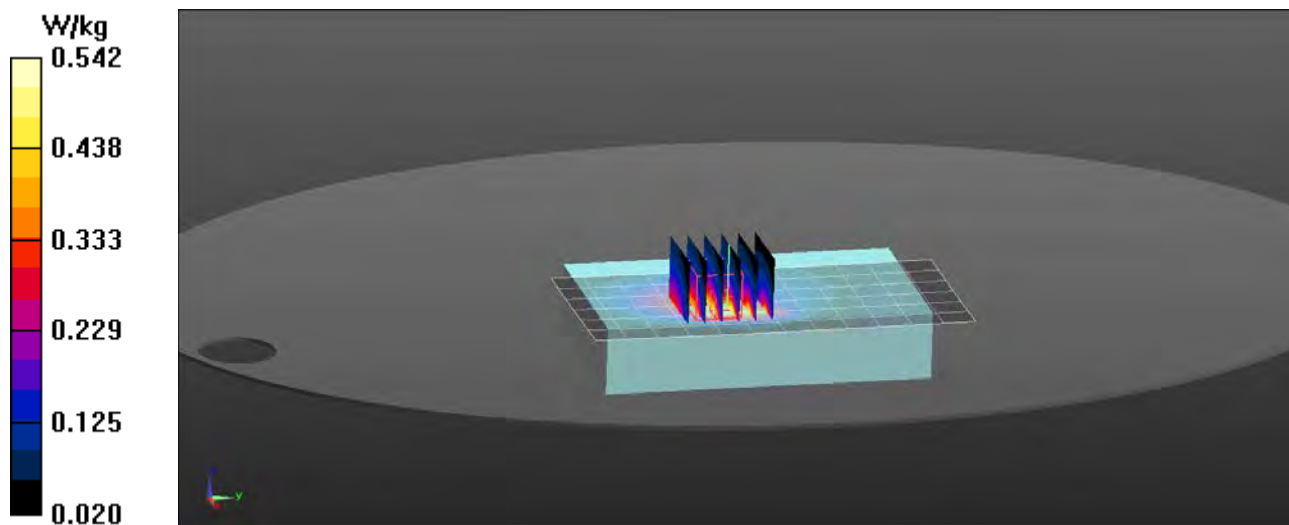

# RF Exposure Lab

## Plot 2

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: HSL835; Medium parameters used (interpolated):  $f = 782$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.268$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/4/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(10.49, 10.49, 10.49); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B13 LTE/Front 1 RB 24 Offset Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.311 W/kg

**B13 LTE/Front 1 RB 24 Offset Mid/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.54 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.409 W/kg

**SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.172 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.323 W/kg

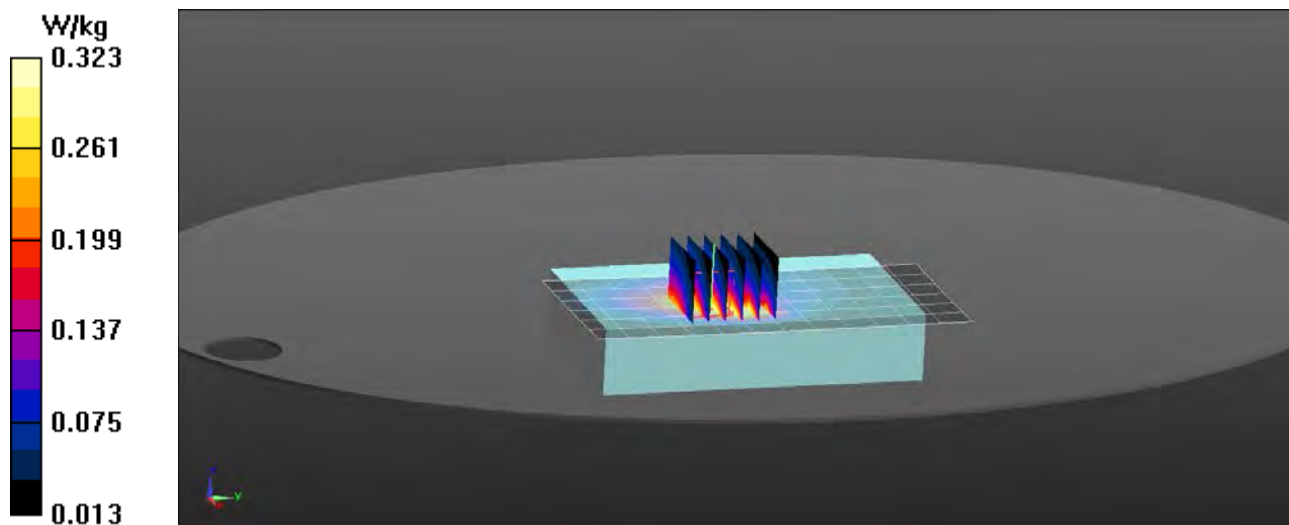

# RF Exposure Lab

## Plot 3

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: GPRS 2-Slot (GMSK); Frequency: 836.6 MHz; Duty Cycle: 1:4.00037  
Medium: HSL835; Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 41.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(10.16, 10.16, 10.16); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B5 GSM/Front Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.145 W/kg

**B5 GSM/Front Mid/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.870 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.145 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.090 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.154 W/kg

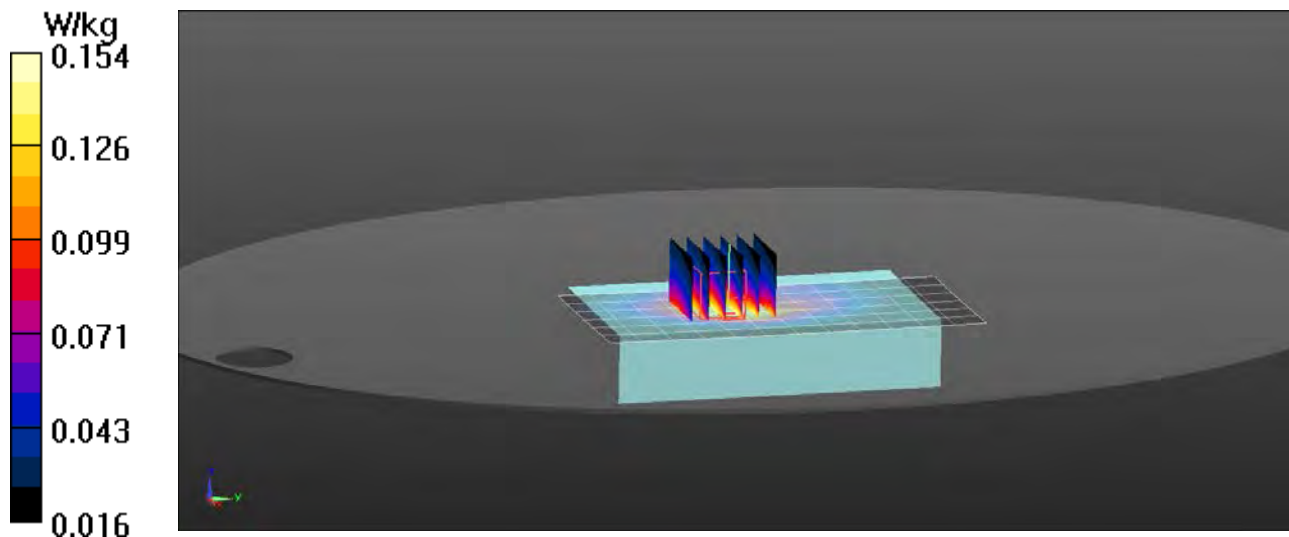

# RF Exposure Lab

## Plot 4

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: UMTS (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium: HSL835; Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 41.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(10.16, 10.16, 10.16); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B5 WCDMA/Front Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.408 W/kg

**B5 WCDMA/Front Mid/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.97 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.513 W/kg

**SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.219 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.419 W/kg

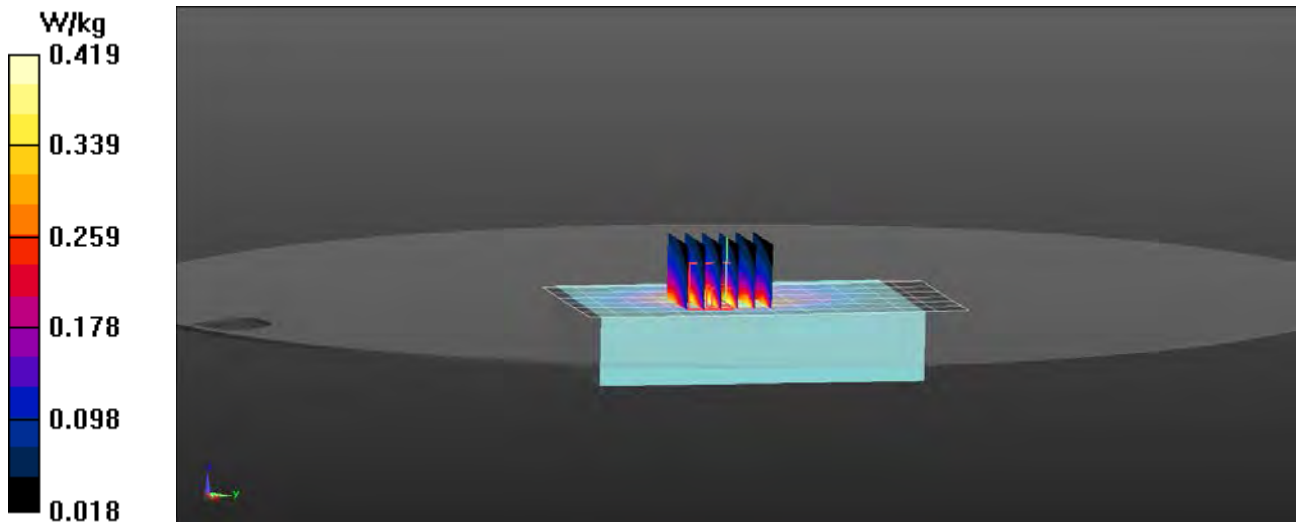

# RF Exposure Lab

## Plot 5

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL835; Medium parameters used (interpolated):  $f = 831.5$  MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.456$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/2/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(10.16, 10.16, 10.16); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B26 LTE/Front 1 RB 24 Offset Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.288 W/kg

**B26 LTE/Front 1 RB 24 Offset Mid/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.25 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.165 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.315 W/kg

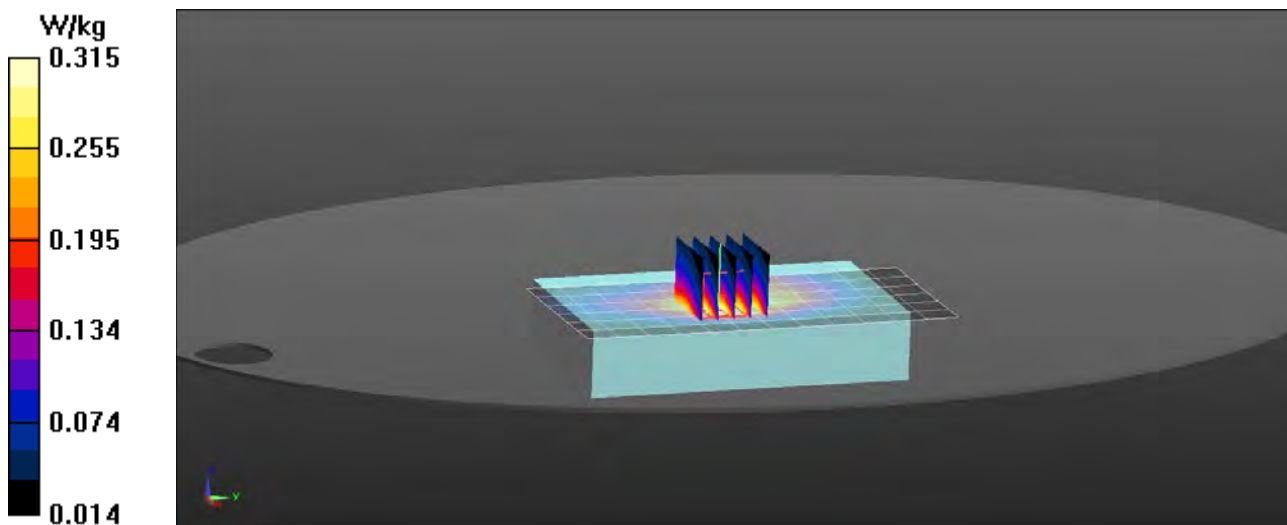

# RF Exposure Lab

## Plot 6

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: UMTS (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium: HSL1750; Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 39.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Test Date: Date: 3/1/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(8.57, 8.57, 8.57); Calibrated: 4/16/2021  
 Sensor-Surface: 2mm (Mechanical Surface Detection)  
 Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
 Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B4 WCDMA/Front Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.469 W/kg

**B4 WCDMA/Front Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.877 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.653 W/kg

**SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.197 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.461 W/kg

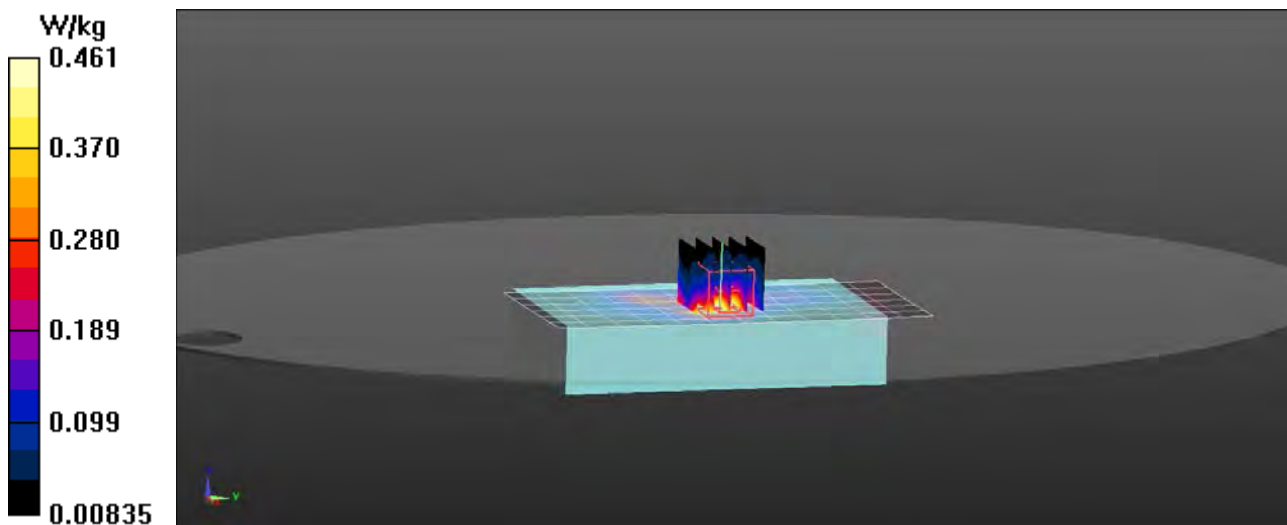



# RF Exposure Lab

## Plot 7

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL1750; Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.383$  S/m;  $\epsilon_r = 39.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/1/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(8.57, 8.57, 8.57); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B4 LTE/Back 1 RB 49 Offset Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.281 W/kg

**B4 LTE/Back 1 RB 49 Offset Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.22 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.369 W/kg

**SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.129 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.297 W/kg

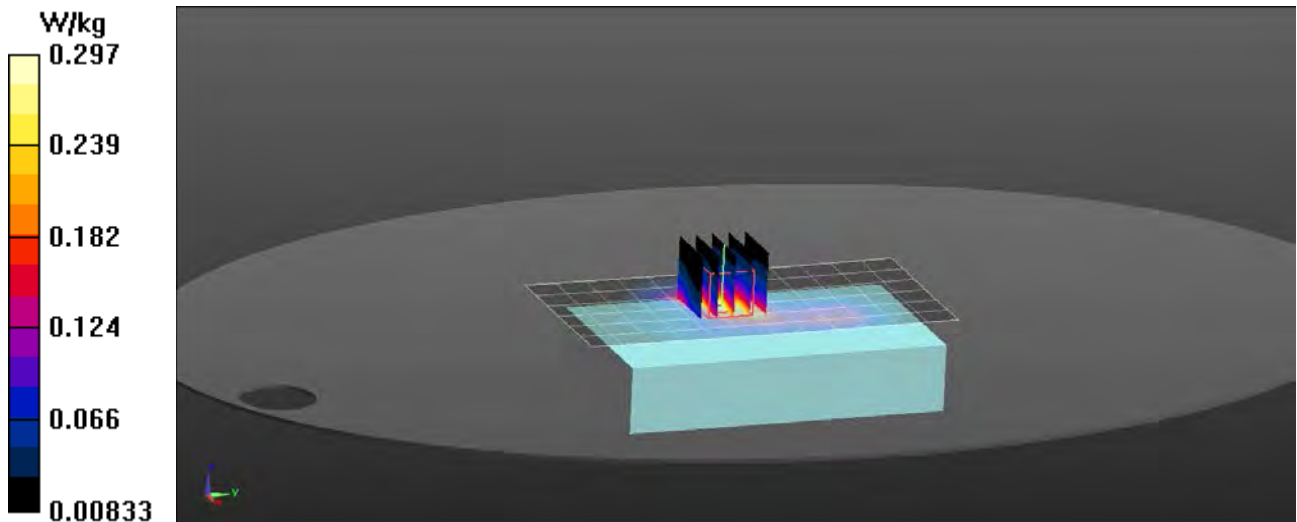

# RF Exposure Lab

## Plot 8

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: GPRS 2-Slot (GMSK); Frequency: 1880 MHz; Duty Cycle: 1:4.00037  
Medium: HSL1900; Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 39.91$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 3/1/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(8.05, 8.05, 8.05); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B2 GSM/Front Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.503 W/kg

**B2 GSM/Front Mid/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.578 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.700 W/kg  
**SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.244 W/kg**  
Maximum value of SAR (measured) = 0.542 W/kg

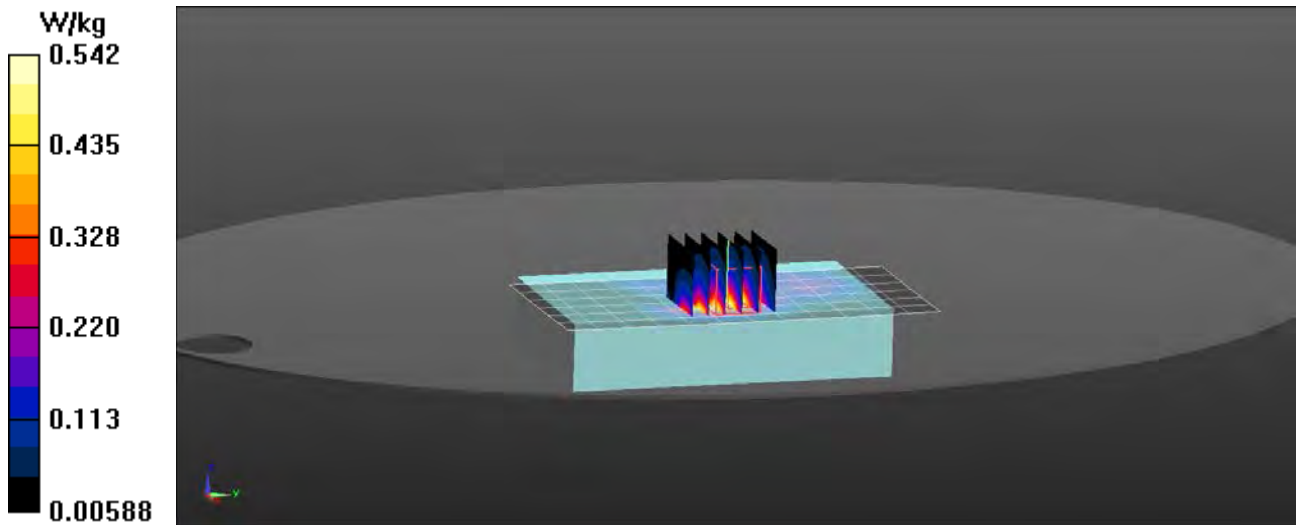

# RF Exposure Lab

## Plot 9

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: UMTS (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL1900; Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.39 \text{ S/m}$ ;  $\epsilon_r = 39.91$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section


Test Date: Date: 2/28/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(8.05, 8.05, 8.05); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B2 WCDMA/Front Mid/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.932 W/kg

**B2 WCDMA/Front Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.805 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.29 W/kg  
**SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.431 W/kg**  
Maximum value of SAR (measured) = 0.958 W/kg

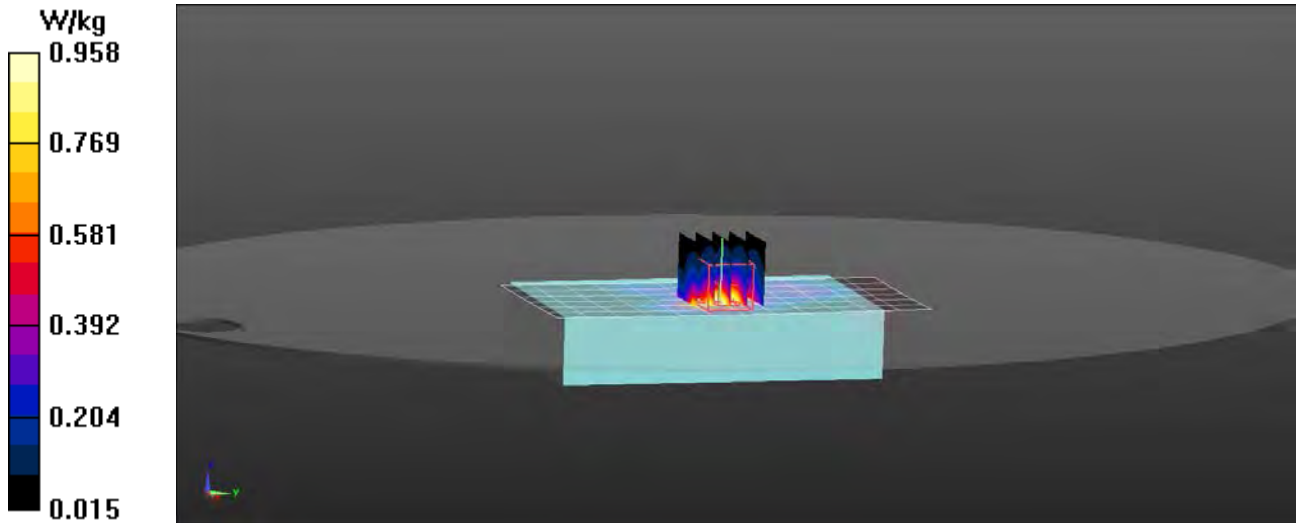

# RF Exposure Lab

## Plot 10

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: HSL1900; Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 39.905$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 2/28/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(8.05, 8.05, 8.05); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B25 LTE/Left 1 RB 49 Offset Mid/Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.694 W/kg

**B25 LTE/Left 1 RB 49 Offset Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.88 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.402 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.06 W/kg

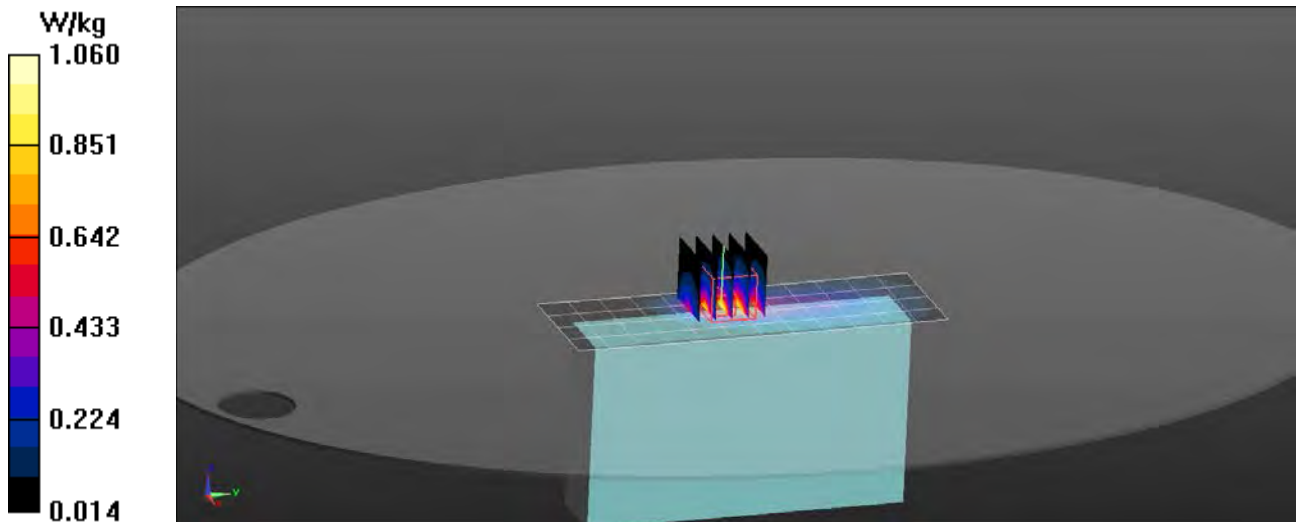

# RF Exposure Lab

## Plot 11

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2510 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.88$  S/m;  $\epsilon_r = 39.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 3/3/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(7.3, 7.3, 7.3); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B7 LTE/Left 1 RB 49 Offset Low/Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.95 W/kg

**B7 LTE/Left 1 RB 49 Offset Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.20 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 2.64 W/kg  
**SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.681 W/kg**  
Maximum value of SAR (measured) = 2.01 W/kg

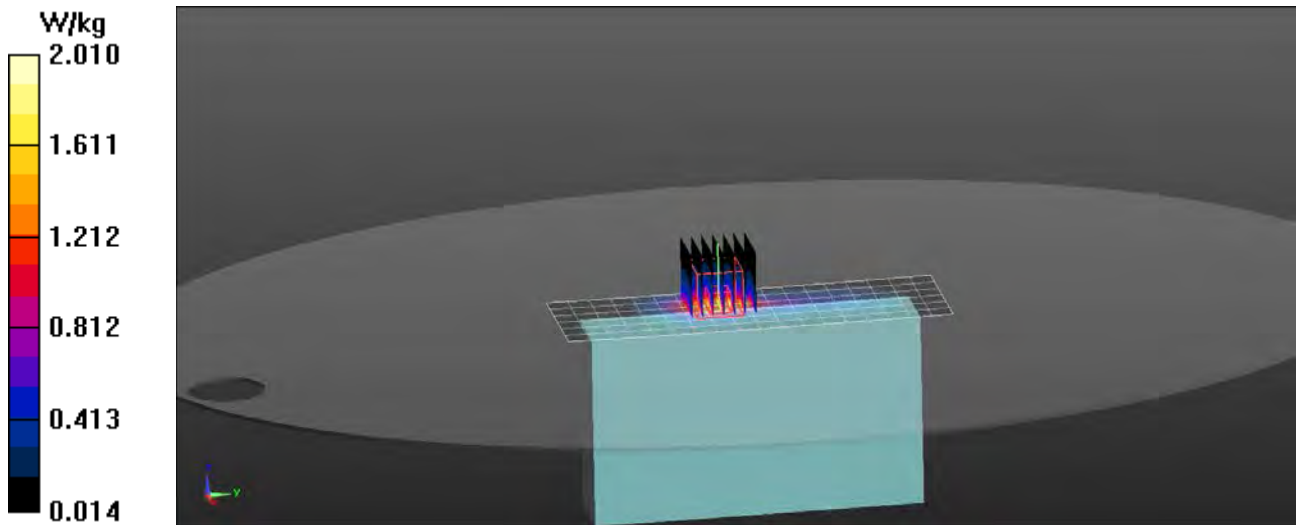

# RF Exposure Lab

## Plot 12

**DUT: Guardio Charger; Type: Wireless Charger; Serial: 002007**

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.99$  S/m;  $\epsilon_r = 38.853$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 3/3/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN7531; ConvF(7.3, 7.3, 7.3); Calibrated: 4/16/2021  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn1217; Calibrated: 2/18/2022  
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**B41 LTE/Front 1 RB 49 Offset Mid/Area Scan (10x19x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.607 W/kg

**B41 LTE/Front 1 RB 49 Offset Mid/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.891 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.837 W/kg

**SAR(1 g) = 0.439 W/kg; SAR(10 g) = 0.223 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.641 W/kg

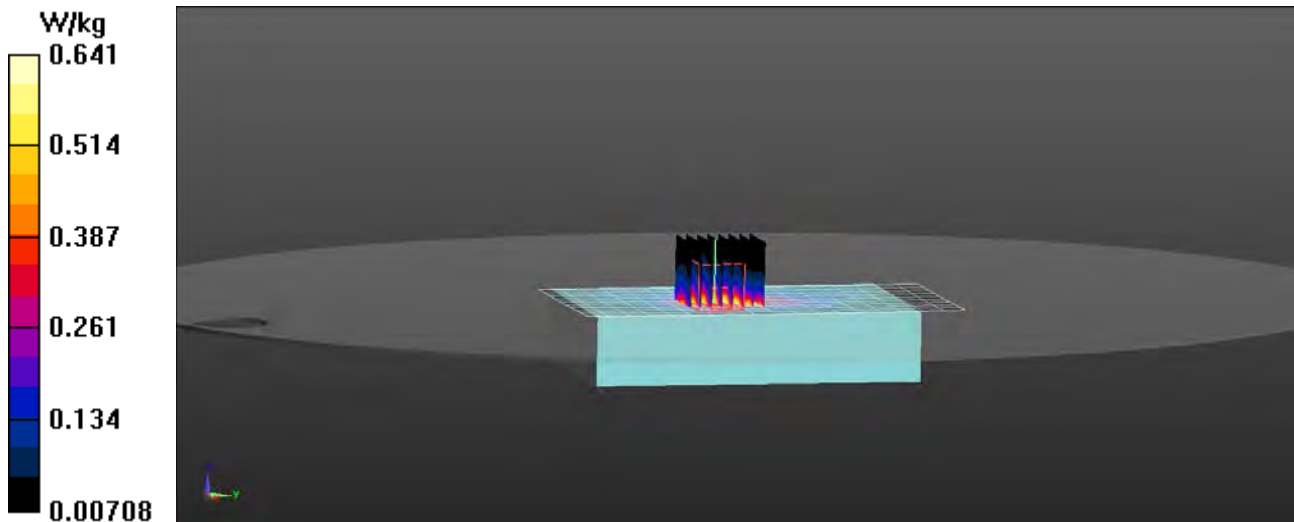

## Appendix D – Probe Calibration Data Sheets

gm

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-7531\_Apr21**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:7531**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5,  
QA CAL-25.v7  
Calibration procedure for dosimetric E-field probes**

Calibration date: **April 16, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	09-Apr-21 (No. 217-03343)	Apr-22
DAE4	SN: 660	23-Dec-20 (No. DAE4-660_Dec20)	Dec-21
Reference Probe ES3DV2	SN: 3013	30-Dec-20 (No. ES3-3013_Dec20)	Dec-21
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-20)	In house check: Jun-22
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	<b>Jeton Kastrati</b>	<b>Laboratory Technician</b>	
Approved by:	<b>Katja Pokovic</b>	<b>Technical Manager</b>	

Issued: April 20, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7531

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.39	0.47	0.40	± 10.1 %
DCP (mV) <sup>B</sup>	100.2	101.2	98.6	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ $\mu\text{V}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	195.5	±3.3 %
		Y	0.0	0.0	1.0		189.5	
		Z	0.0	0.0	1.0		192.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7531

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-173.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Note:** Measurement distance from surface can be increased to 3-4 mm for an *Area Scan* job.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7531

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth (mm) <sup>G</sup>	Unc (k=2)
150	52.3	0.76	12.89	12.89	12.89	0.00	1.00	± 13.3 %
220	49.0	0.81	12.66	12.66	12.66	0.00	1.00	± 13.3 %
300	45.3	0.87	12.09	12.09	12.09	0.10	1.30	± 13.3 %
450	43.5	0.87	11.21	11.21	11.21	0.16	1.30	± 13.3 %
600	42.7	0.88	10.64	10.64	10.64	0.10	1.25	± 13.3 %
750	41.9	0.89	10.49	10.49	10.49	0.63	0.80	± 12.0 %
900	41.5	0.97	10.16	10.16	10.16	0.54	0.80	± 12.0 %
1750	40.1	1.37	8.57	8.57	8.57	0.33	0.86	± 12.0 %
1900	40.0	1.40	8.05	8.05	8.05	0.37	0.86	± 12.0 %
2300	39.5	1.67	7.88	7.88	7.88	0.29	0.90	± 12.0 %
2450	39.2	1.80	7.57	7.57	7.57	0.37	0.90	± 12.0 %
2600	39.0	1.96	7.30	7.30	7.30	0.40	0.90	± 12.0 %
3500	37.9	2.91	6.80	6.80	6.80	0.40	1.35	± 13.1 %
3700	37.7	3.12	6.40	6.40	6.40	0.40	1.35	± 13.1 %
5250	35.9	4.71	5.19	5.19	5.19	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.65	4.65	4.65	0.40	1.80	± 13.1 %
5750	35.4	5.22	4.75	4.75	4.75	0.40	1.80	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7531

### Calibration Parameter Determined in Head Tissue Simulating Media


f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
6500	34.5	6.07	5.40	5.40	5.40	0.20	2.50	± 18.6 %

<sup>C</sup> Frequency validity above 6GHz is ± 700 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies 6-10 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz; below ± 2% for frequencies between 3-6 GHz; and below ± 4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.


### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

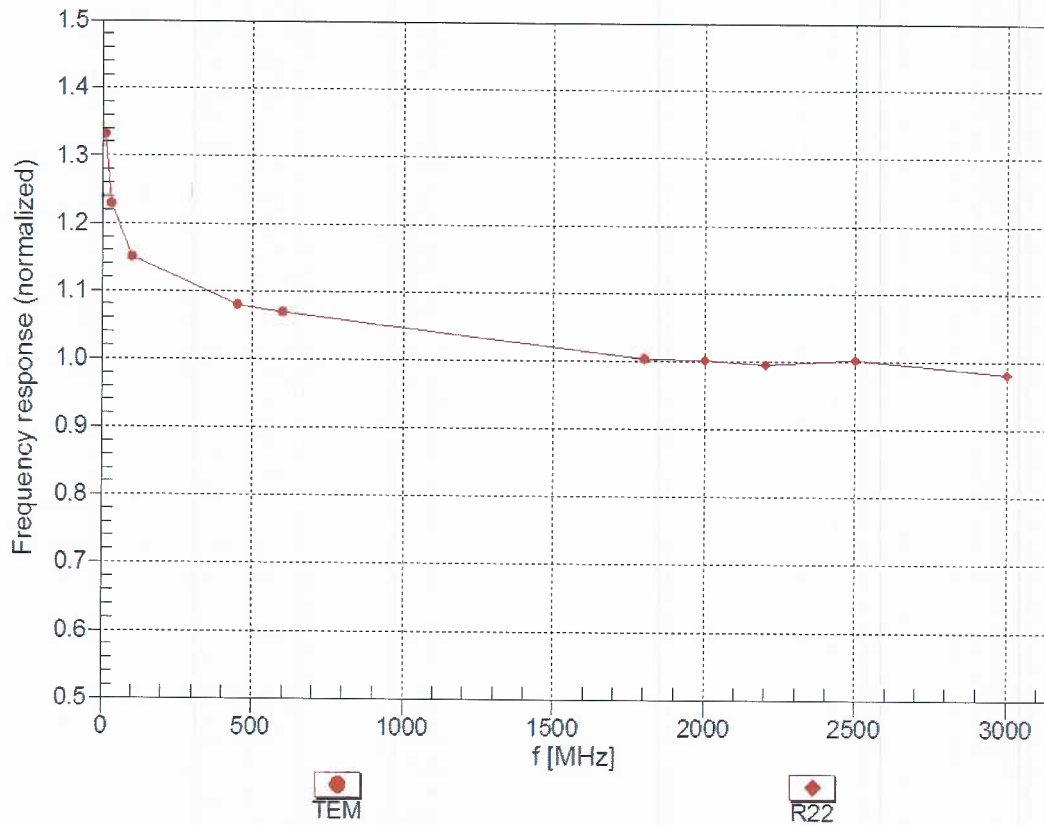



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz, TEM


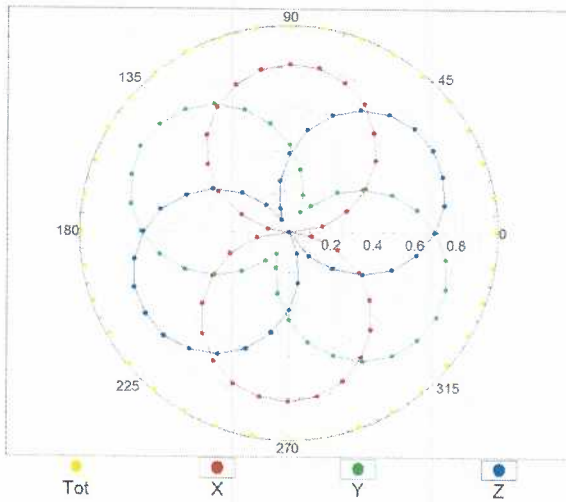


f=1800 MHz, R22

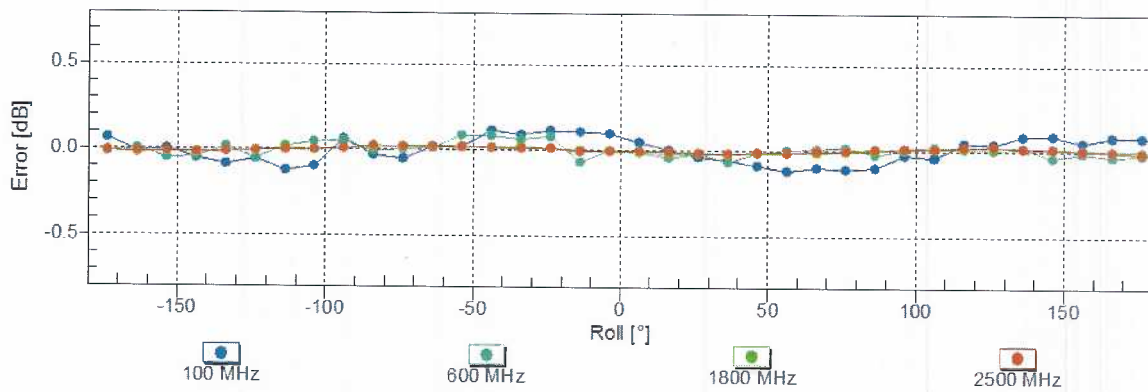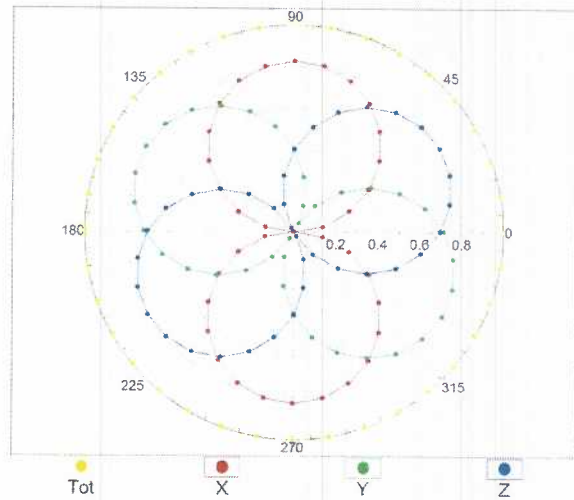

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}}= 1900 \text{ MHz}$ )

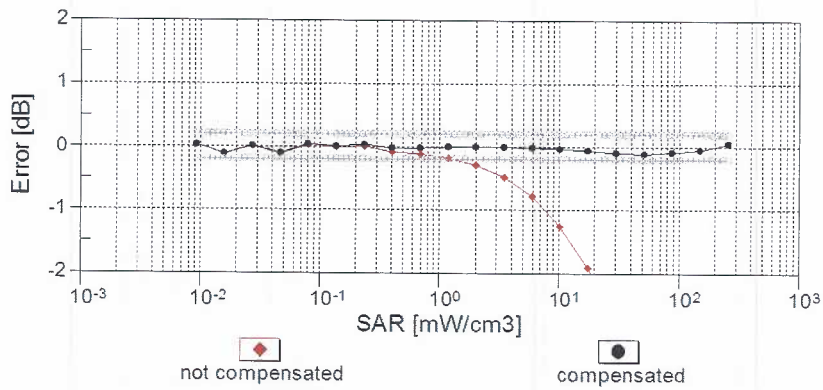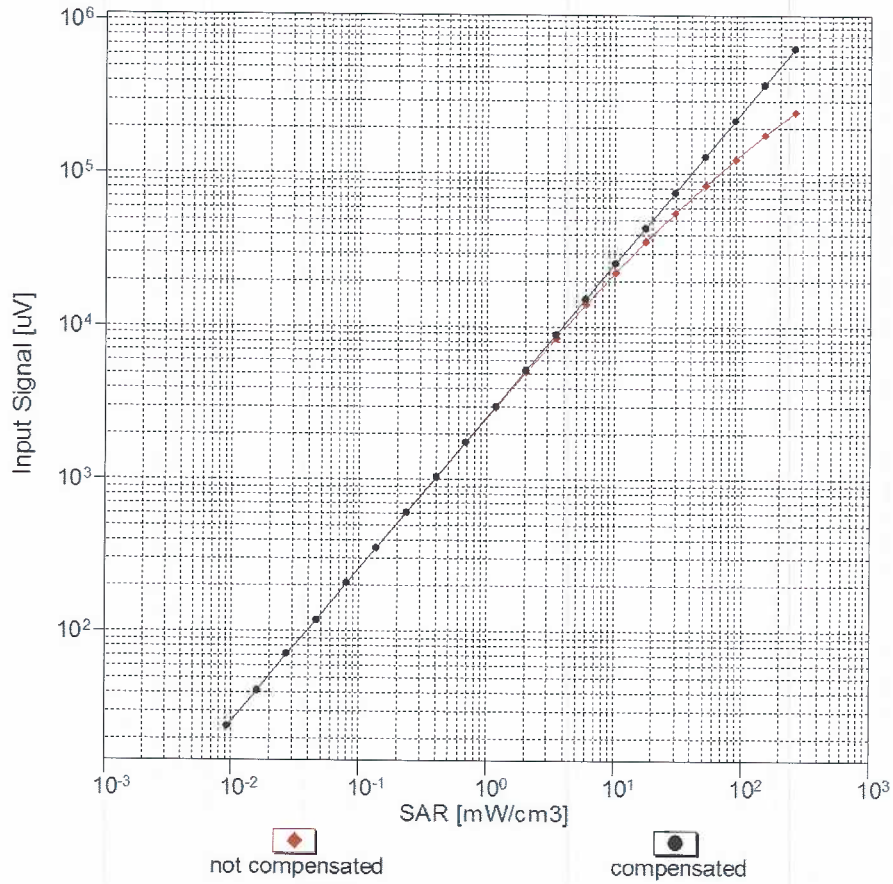


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )



# Conversion Factor Assessment

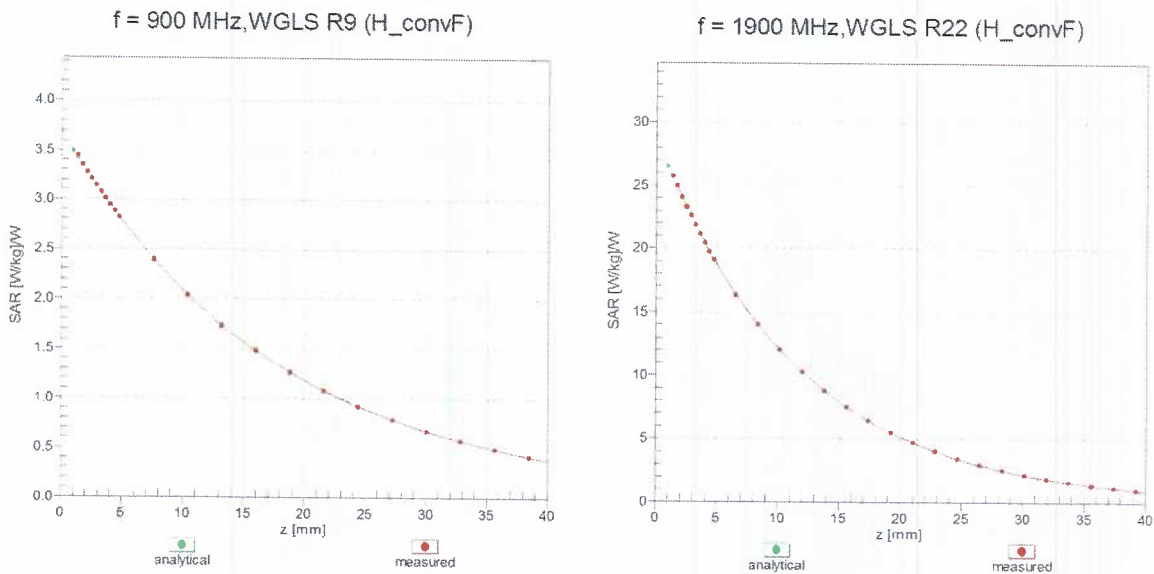

## Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

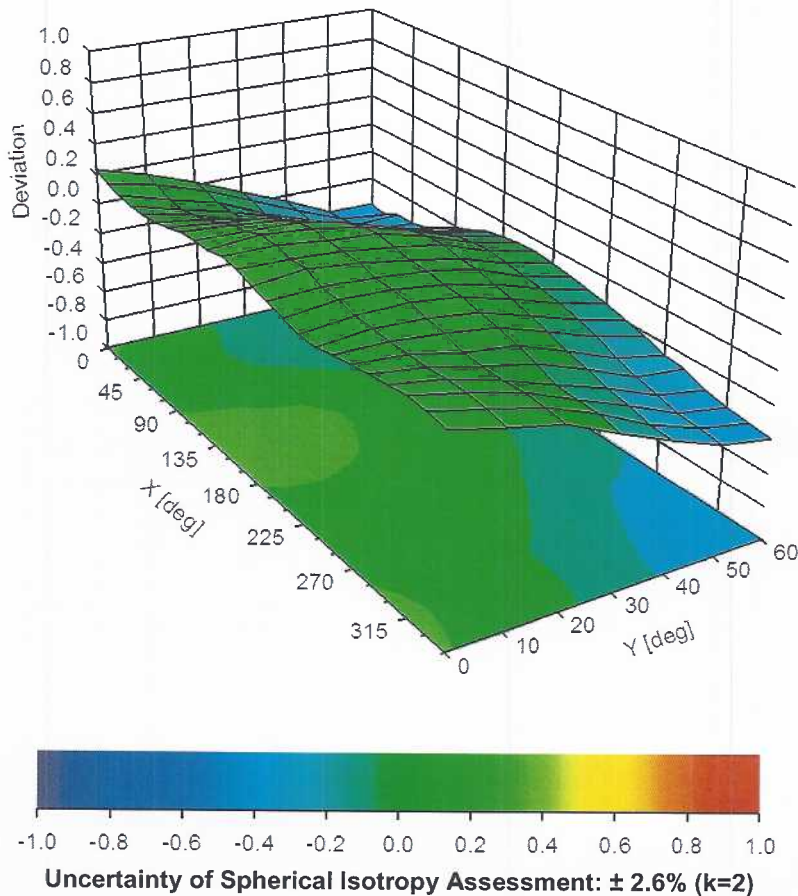

## Appendix E – Dipole Calibration Data Sheets

gm

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D750V3-1053\_Jun21**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1053**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber**      Name: Michael Weber      Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Function: Technical Manager

Signature:

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	42.7 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.57 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.58 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.5 $\Omega$ + 0.1 j $\Omega$
Return Loss	- 24.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1053**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 42.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.11, 10.11, 10.11) @ 750 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.74 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.41 W/kg**

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 30mm)


Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 2.93 W/kg

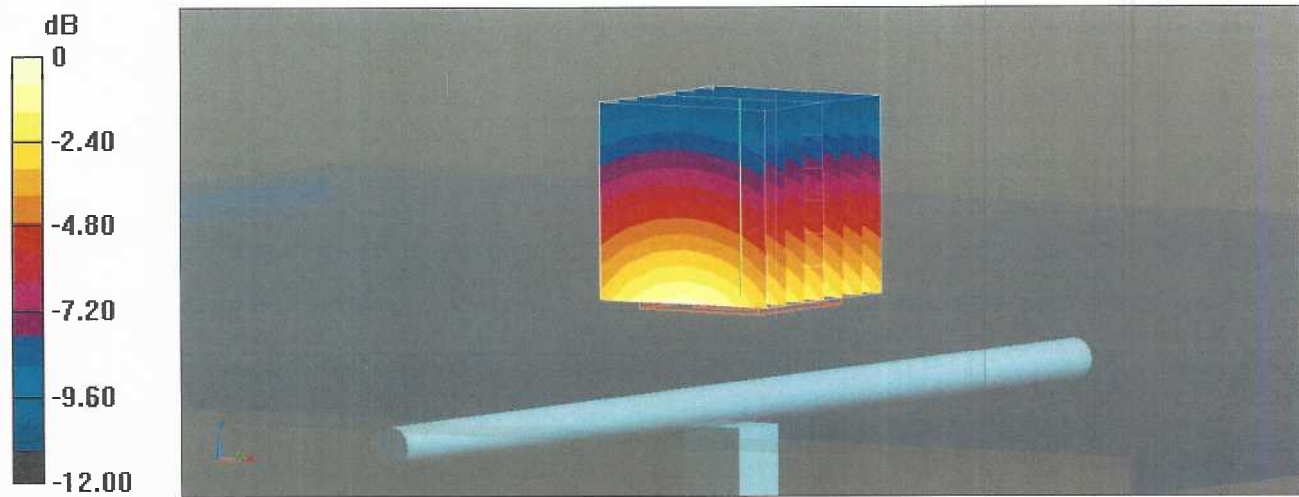

0 dB = 2.93 W/kg = 4.67 dBW/kg

# Impedance Measurement Plot for Head TSL

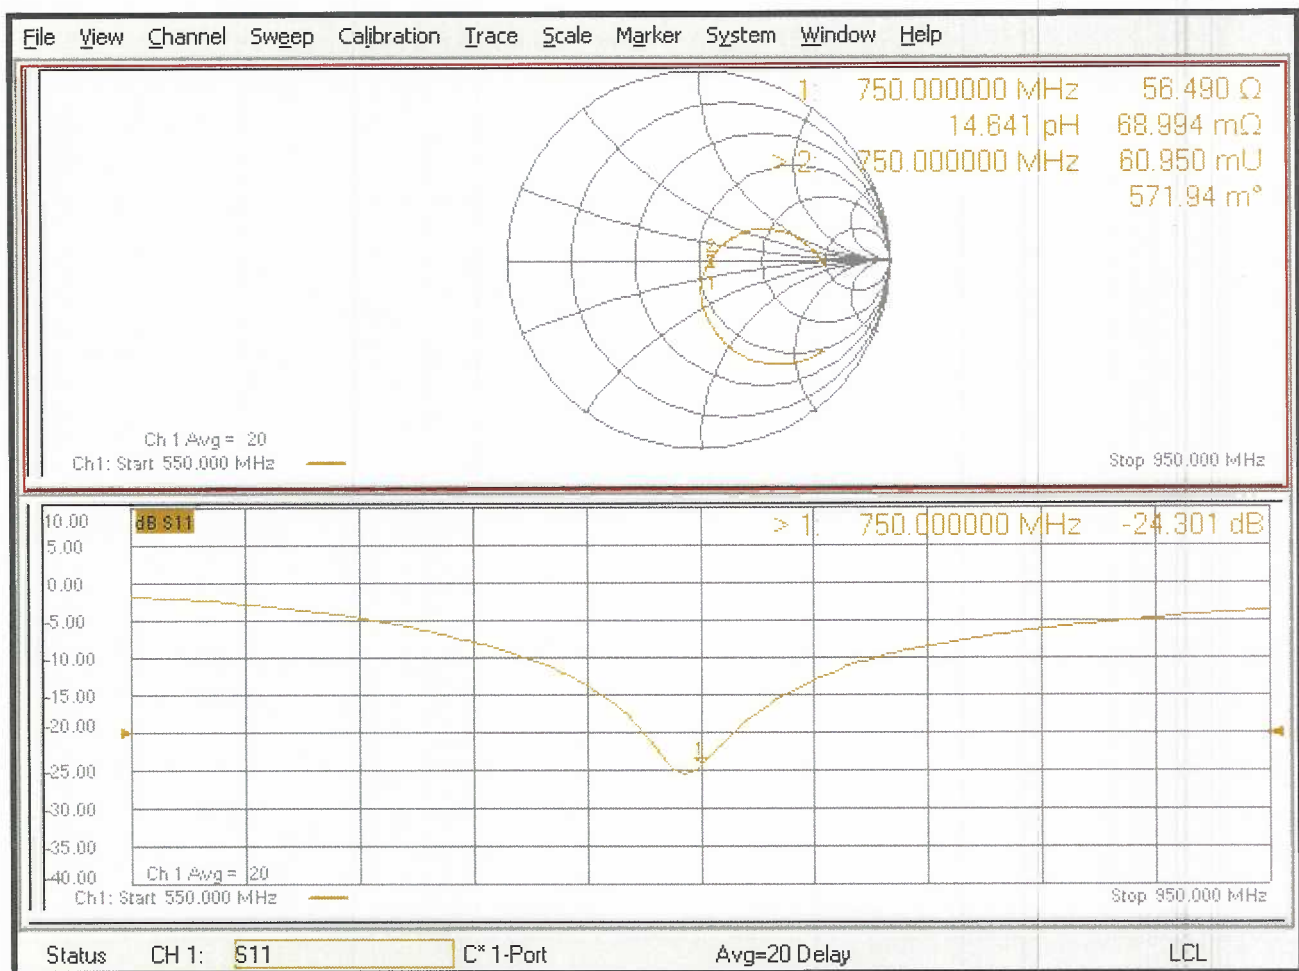



*Jm*

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D900V2-1d128\_Jun21**

## CALIBRATION CERTIFICATE

Object **D900V2 - SN:1d128**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by:	Name <b>Michael Weber</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Technical Manager	

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	41.5	0.97 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	42.3 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.76 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>11.2 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.77 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>7.14 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.0 $\Omega$ - 0.6 j $\Omega$
Return Loss	- 38.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.412 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

# DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:1d128**

Communication System: UID 0 - CW; Frequency: 900 MHz

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.62, 9.62, 9.62) @ 900 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 65.79 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 4.23 W/kg

**SAR(1 g) = 2.76 W/kg; SAR(10 g) = 1.77 W/kg**


Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 3.74 W/kg

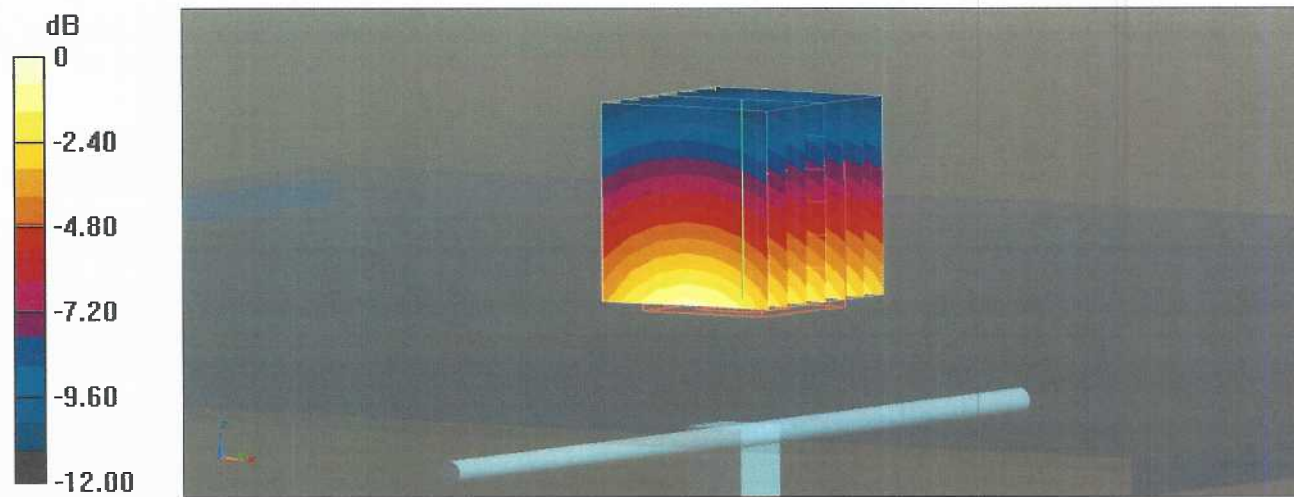

# Impedance Measurement Plot for Head TSL

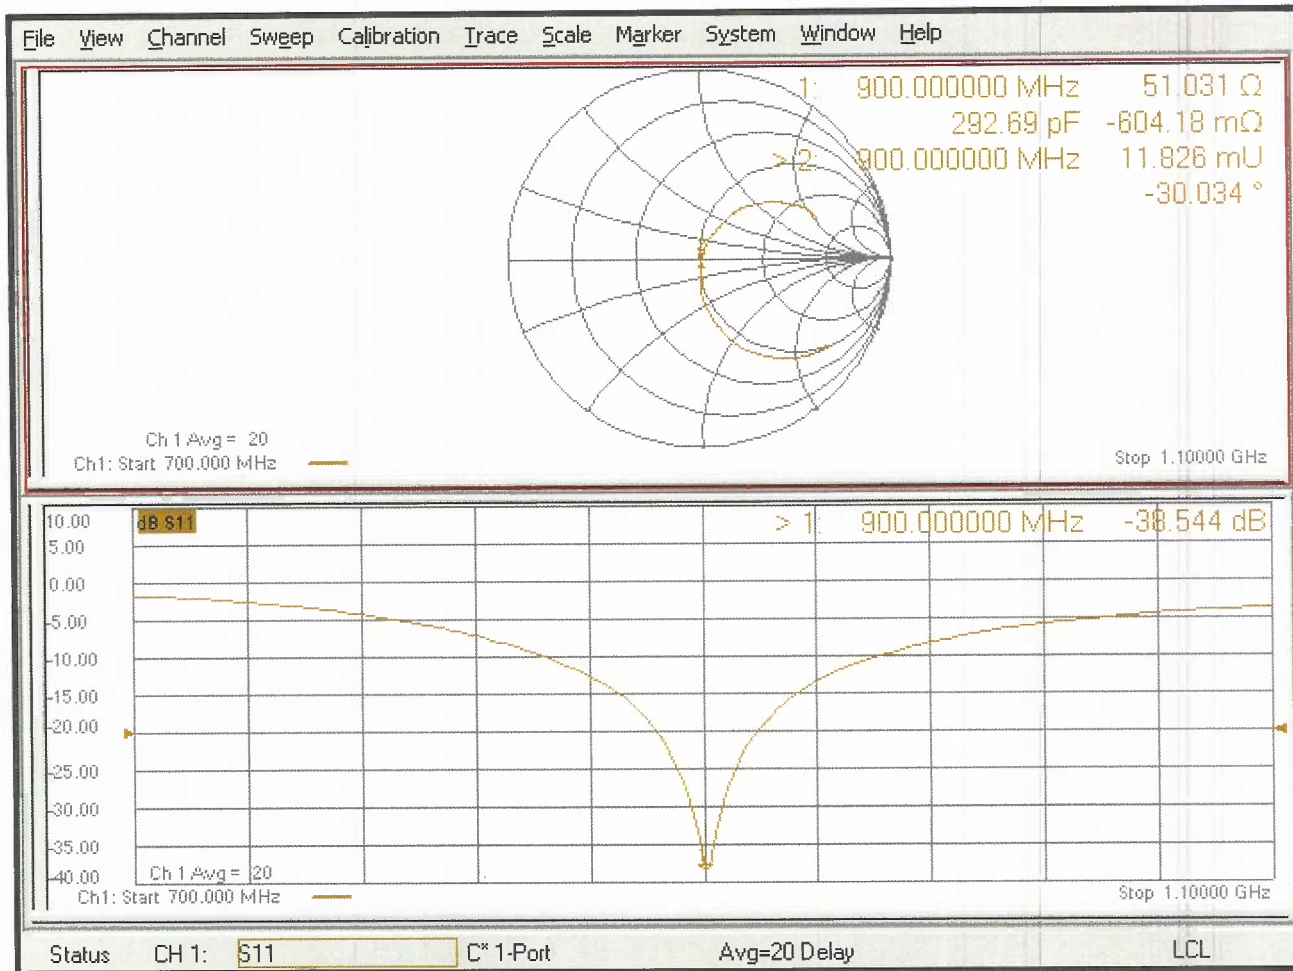

gm

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client RF Exposure Lab

Certificate No: D1750V2-1061\_Jun21

### CALIBRATION CERTIFICATE

Object D1750V2 - SN:1061

Calibration procedure(s) QA CAL-05 v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz

Calibration date: June 03, 2021

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by:	Name Jeffrey Katzman	Function Laboratory Technician	Signature 
----------------	-------------------------	-----------------------------------	---------------

Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 
--------------	-----------------------	-------------------------------	---------------

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1750 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	40.1	1.37 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	40.7 ± 6 %	1.37 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	9.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>37.7 W/kg ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	4.93 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>19.8 W/kg ± 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.4 $\Omega$ + 0.0 j $\Omega$
Return Loss	- 44.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.221 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

# DASY5 Validation Report for Head TSL

Date: 03.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1061**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.67, 8.67, 8.67) @ 1750 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

## Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.4 V/m; Power Drift = 0.08 dB



Peak SAR (extrapolated) = 17.5 W/kg

**SAR(1 g) = 9.38 W/kg; SAR(10 g) = 4.93 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.1 mm


Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 14.6 W/kg

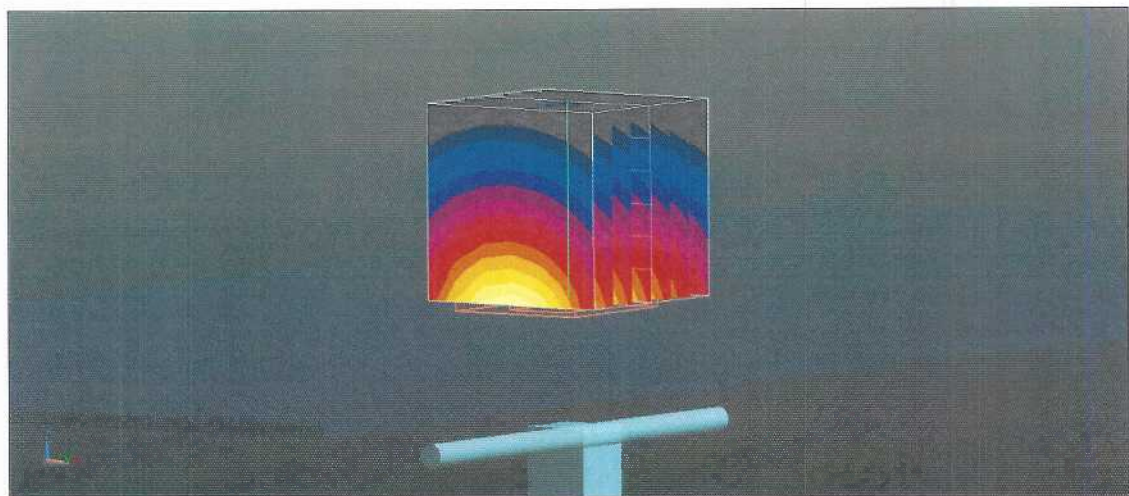

0 dB = 14.6 W/kg = 11.64 dBW/kg

# Impedance Measurement Plot for Head TSL

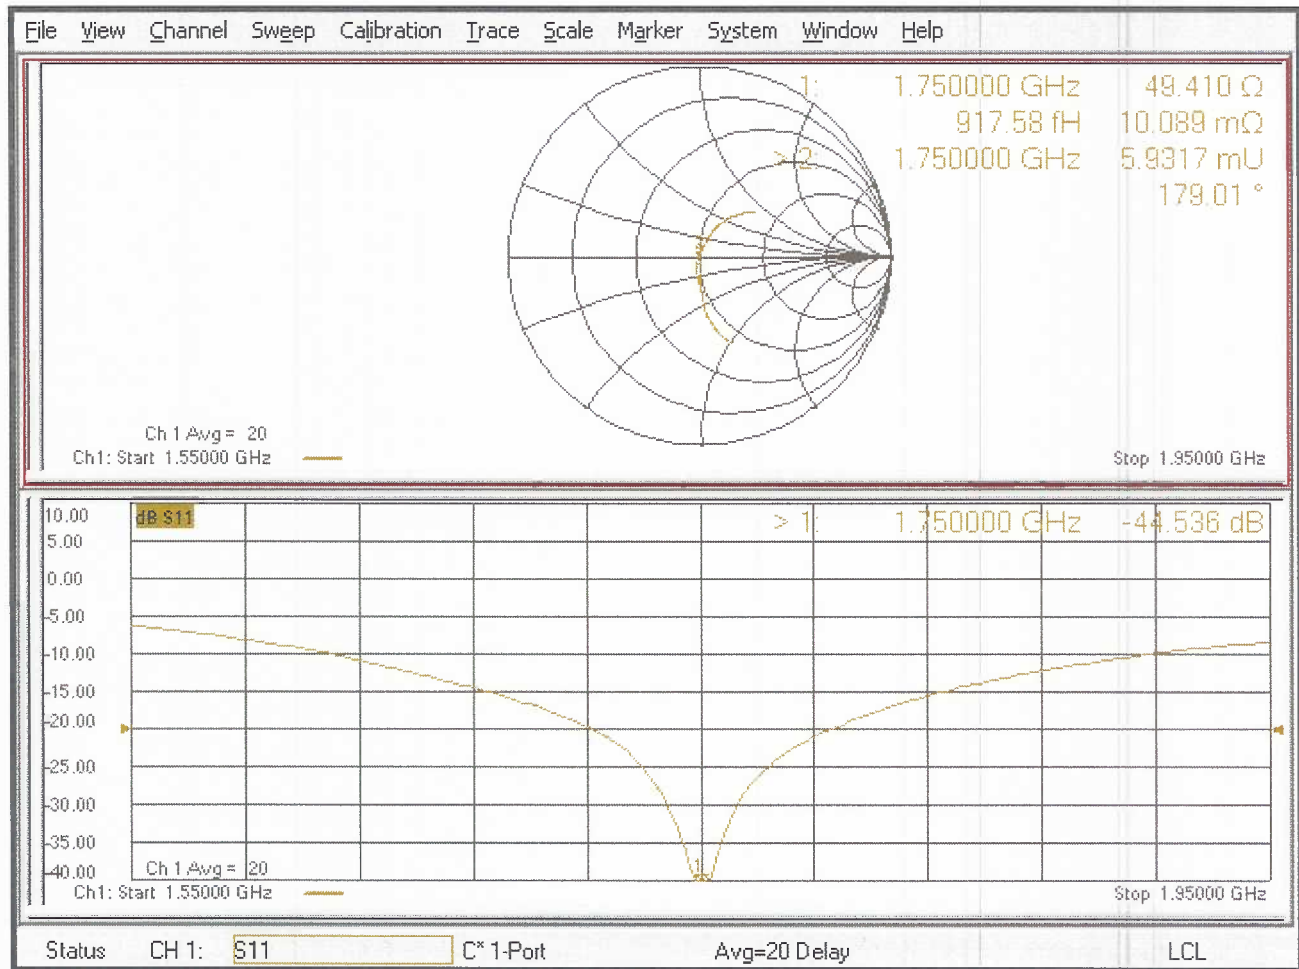

gm

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D1900V2-5d147\_Jun21**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d147**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber**      Name: Michael Weber      Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Function: Technical Manager

Signature:

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- e) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	1900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	40.0	1.40 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	1.41 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>40.4 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	5.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>21.1 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.3 $\Omega$ + 5.4 j $\Omega$
Return Loss	- 24.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.192 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



## DASY5 Validation Report for Head TSL

Date: 04.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d147**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.43, 8.43, 8.43) @ 1900 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.2 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 18.7 W/kg

**SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.28 W/kg**

Smallest distance from peaks to all points 3 dB below = 10 mm


Ratio of SAR at M2 to SAR at M1 = 54.6%

Maximum value of SAR (measured) = 15.6 W/kg

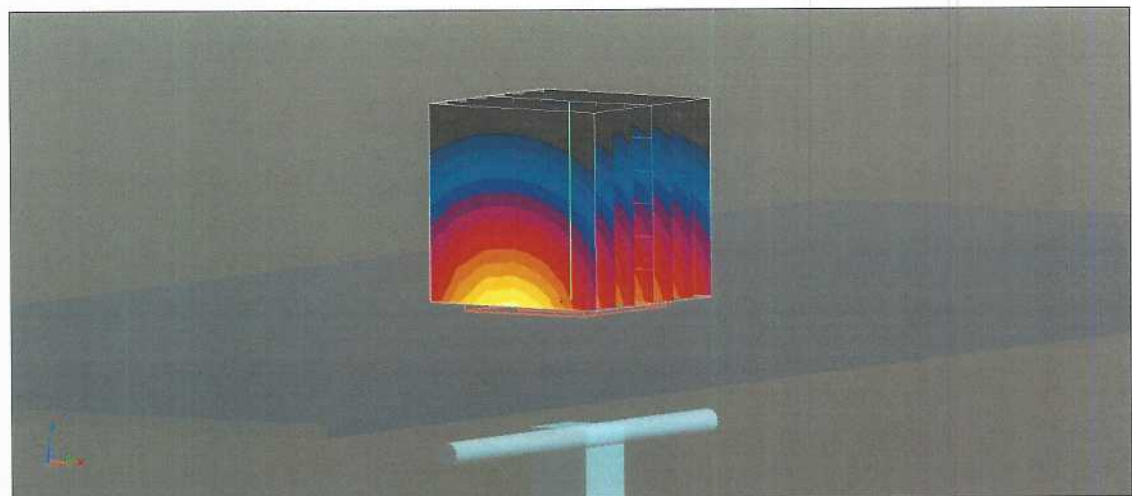

0 dB = 15.6 W/kg = 11.93 dBW/kg

# Impedance Measurement Plot for Head TSL

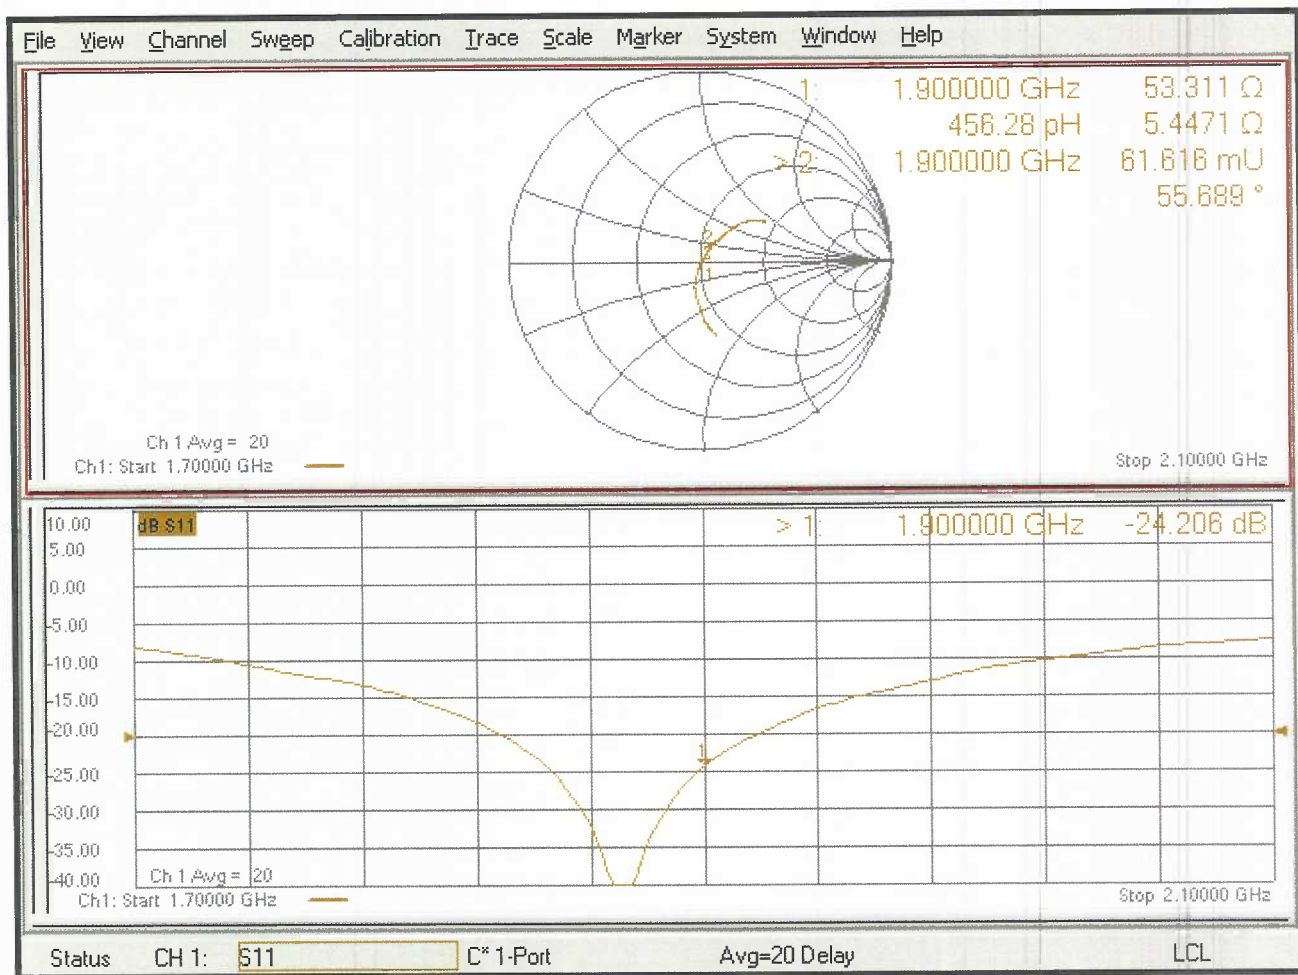

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D2550V2-1003\_Jun21**

## CALIBRATION CERTIFICATE

Object **D2550V2 - SN:1003**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 03, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Jeffrey Katzman	Laboratory Technician	

	Name	Function	Signature
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2550 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	39.1	1.91 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	37.3 ± 6 %	1.98 mho/m ± 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	---	---

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	14.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>55.3 W/kg ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.28 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>24.7 W/kg ± 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	49.4 $\Omega$ - 3.5 j $\Omega$
Return Loss	- 29.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.156 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

## DASY5 Validation Report for Head TSL

Date: 03.06.2021

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2550 MHz; Type: D2550V2; Serial: D2550V2 - SN:1003**

Communication System: UID 0 - CW; Frequency: 2550 MHz

Medium parameters used:  $f = 2550$  MHz;  $\sigma = 1.98$  S/m;  $\epsilon_r = 37.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.85, 7.85, 7.85) @ 2550 MHz; Calibrated: 28.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 02.11.2020
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.6 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 29.9 W/kg

**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.28 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.5 mm


Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 24.3 W/kg

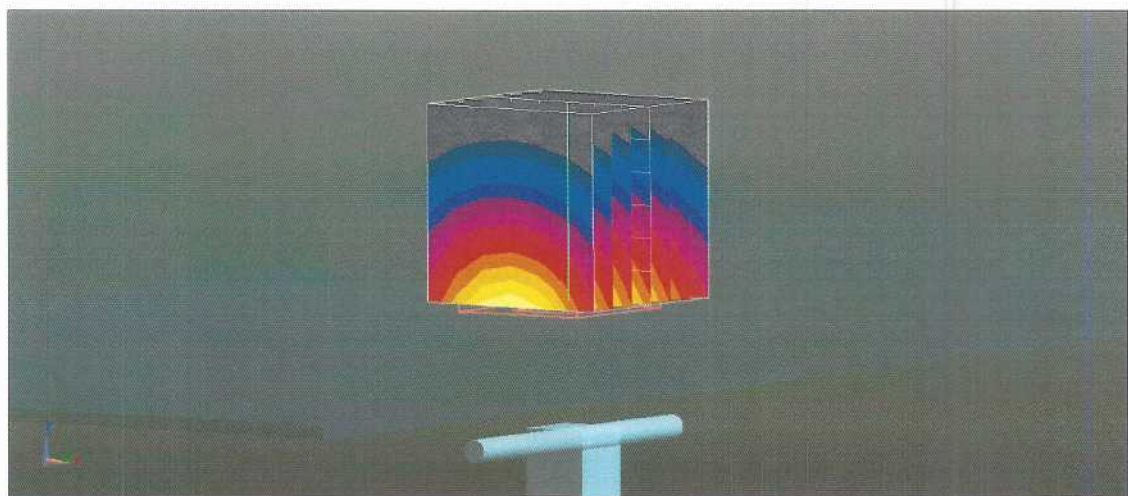

0 dB = 24.3 W/kg = 13.86 dBW/kg

# Impedance Measurement Plot for Head TSL

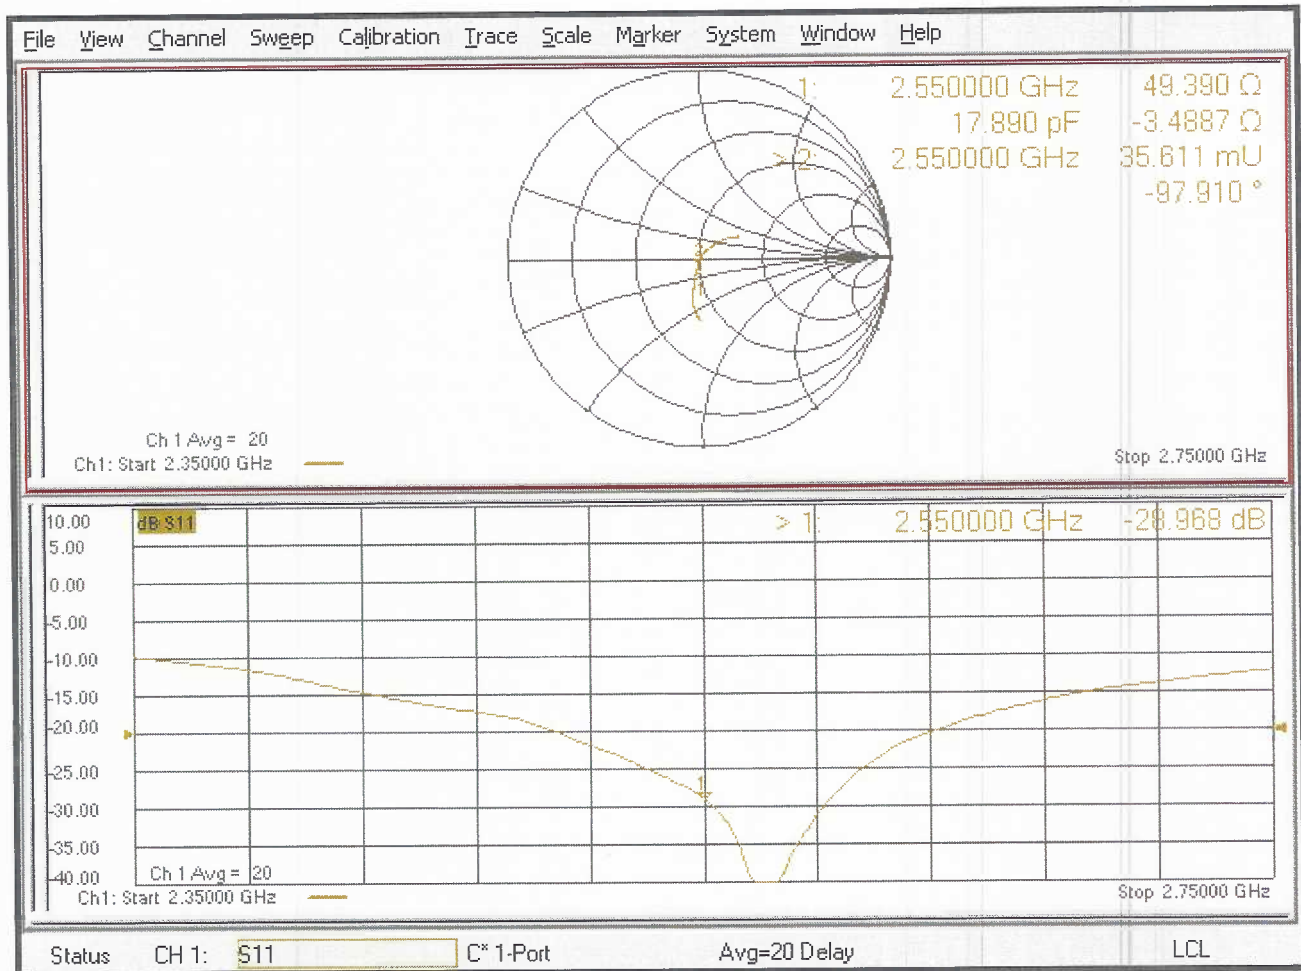



## Appendix F – Phantom Calibration Data Sheets

**Certificate of Conformity / First Article Inspection**

Item	Oval Flat Phantom ELI 4.0
Type No	QD OVA 001 B
Series No	1003 and higher
Manufacturer	Untersee Composites Knebelstrasse 8 CH-8268 Mannenbach, Switzerland

**Tests**

Complete tests were made on the prototype units QD OVA 001 AA 1001, QD OVA 001 AB 1002, pre-series units QD OVA 001 BA 1003-1005 as well as on the series units QD OVA 001 BB, 1006 ff.

Test	Requirement	Details	Units tested
Material thickness	Compliant with the standard requirements	Bottom plate: 2.0mm +/- 0.2mm	all
Material parameters	Dielectric parameters for required frequencies	< 6 GHz: Rel. permittivity = 4 +/-1, Loss tangent ≤ 0.05	Material sample
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions.	DGBE based simulating liquids. Observe Technical Note for material compatibility.	Equivalent phantoms, Material sample
Shape	Thickness of bottom material, Internal dimensions, Sagging compatible with standards from minimum frequency	Bottom elliptical 600 x 400 mm Depth 190 mm, Shape is within tolerance for filling height up to 155 mm, Eventual sagging is reduced or eliminated by support via DUT	Prototypes, Sample testing

**Standards**

- [1] CENELEC EN 50361-2001, « Basic standard for the measurement of the Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz) », July 2001
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft, "Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation and Procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30 MHz to 6 GHz Handheld and Body-Mounted Devices used in close proximity to the Body.", February 2005
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition January 2001

Based on the tests above, we certify that this item is in compliance with the standards [1] to [5] if operated according to the specific requirements and considering the thickness. The dimensions are fully compliant with [4] from 30 MHz to 6 GHz. For the other standards, the minimum lower frequency limit is limited due to the dimensional requirements ([1]: 450 MHz, [2]: 300 MHz, [3]: 800 MHz, [5]: 375 MHz) and possibly further by the dimensions of the DUT.

Date 28.4.2008 Signature / Stamp

**s p e a g**  
Schmid & Partner Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland  
Phone +41 44 245 9700, Fax +41 44 245 9779  
info@speag.com; http://www.speag.com

## Appendix G – Validation Summary

Per FCC KDB 865664 D02 v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue equivalent media for system validation according to the procedures outlined in FCC KDB 865664 D01 v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point using the system that normally operates with the probe for routine SAR measurements and according to the required tissue equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table G-1  
SAR System Validation Summary**

SAR System #	Freq. (MHz)	Date	Probe S/N	Probe Type	Probe Cal. Point	Cond. ( $\sigma$ )	Perm. ( $\epsilon_r$ )	CW Validation			Modulation Validation			
								Sensitivity	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	
2	750	05/03/2021	7531	EX3DV4	750	Head	0.91	41.21	Pass	Pass	Pass	QPSK	Pass	Pass
2	900	05/03/2021	7531	EX3DV4	900	Head	0.99	41.03	Pass	Pass	Pass	GMSK	Pass	Pass
2	900	05/03/2021	7531	EX3DV4	900	Head	0.99	41.03	Pass	Pass	Pass	QPSK	Pass	Pass
2	900	05/03/2021	7531	EX3DV4	900	Head	0.99	41.03	Pass	Pass	Pass	WCDMA	Pass	Pass
2	1750	05/04/2021	7531	EX3DV4	1750	Head	1.38	38.22	Pass	Pass	Pass	QPSK	Pass	Pass
2	1750	05/04/2021	7531	EX3DV4	1750	Head	1.38	38.22	Pass	Pass	Pass	WCDMA	Pass	Pass
2	1900	05/04/2021	7531	EX3DV4	1900	Head	1.42	39.17	Pass	Pass	Pass	GMSK	Pass	Pass
2	1900	05/04/2021	7531	EX3DV4	1900	Head	1.42	39.17	Pass	Pass	Pass	QPSK	Pass	Pass
2	1900	05/04/2021	7531	EX3DV4	1900	Head	1.42	39.17	Pass	Pass	Pass	WCDMA	Pass	Pass
2	2550	05/05/2021	7531	EX3DV4	2550	Head	1.92	38.59	Pass	Pass	Pass	QPSK	Pass	Pass