



11AC20SISO_Ant1_5785

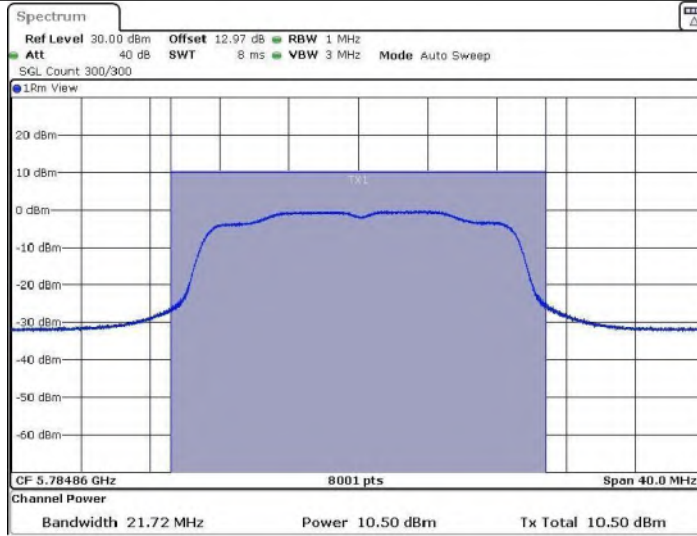


Date: 6 AUG.2022 11:51:18

11AC20SISO_Ant1_5825

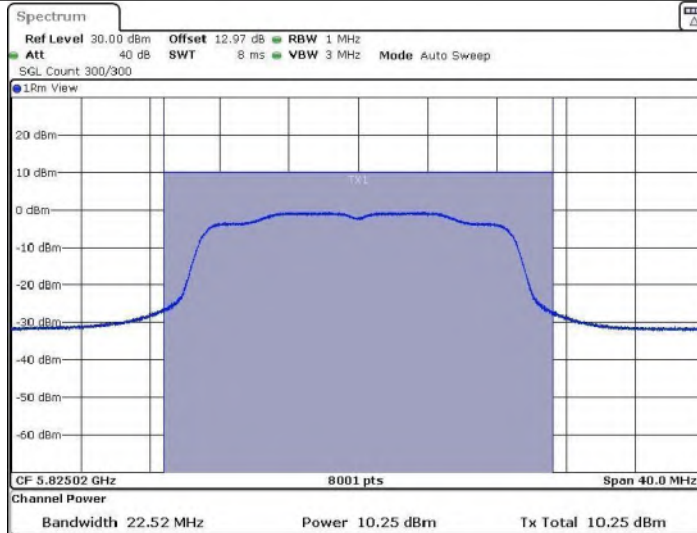


Date: 6 AUG.2022 11:56:04

11AC40SISO_Ant1_5190

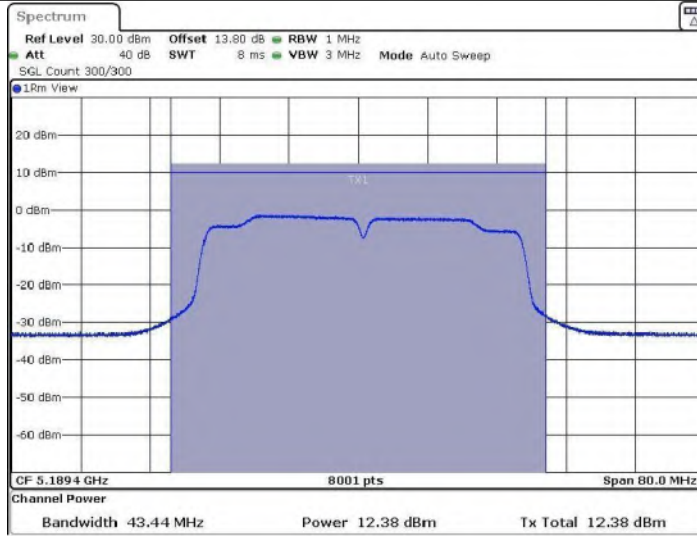


Date: 6 AUG.2022 12:01:27

11AC40SISO_Ant1_5230

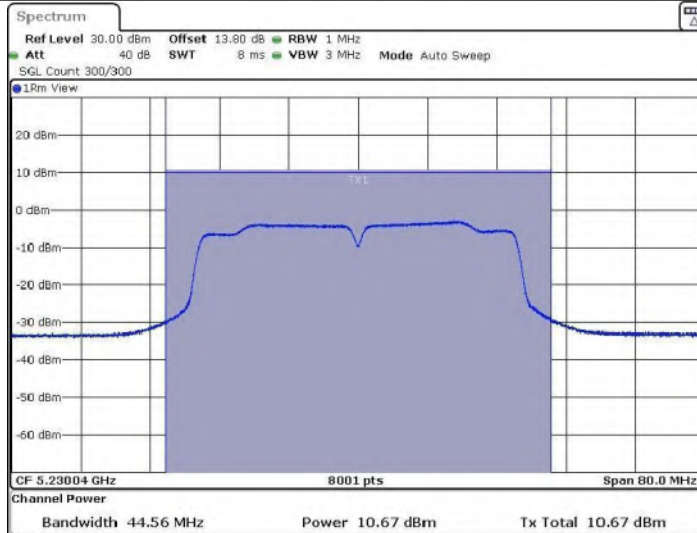


Date: 6 AUG.2022 12:06:55

11AC40SISO_Ant1_5755

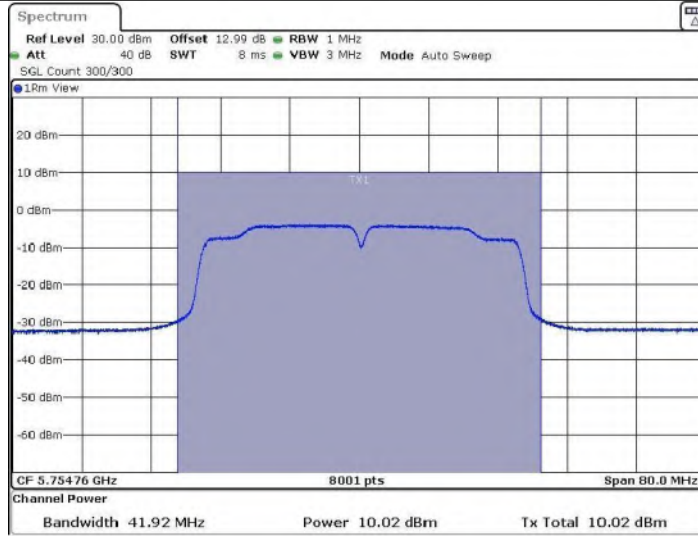

Date: 6 AUG.2022 12:14:38

11AC40SISO_Ant1_5795

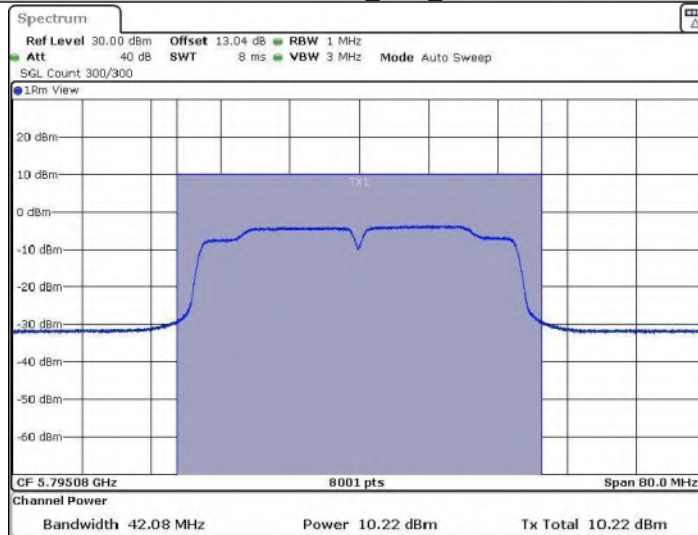


Date: 6 AUG.2022 12:20:25

11AC80SISO_Ant1_5210



Date: 6 AUG.2022 12:25:50

11AC80SISO_Ant1_5775

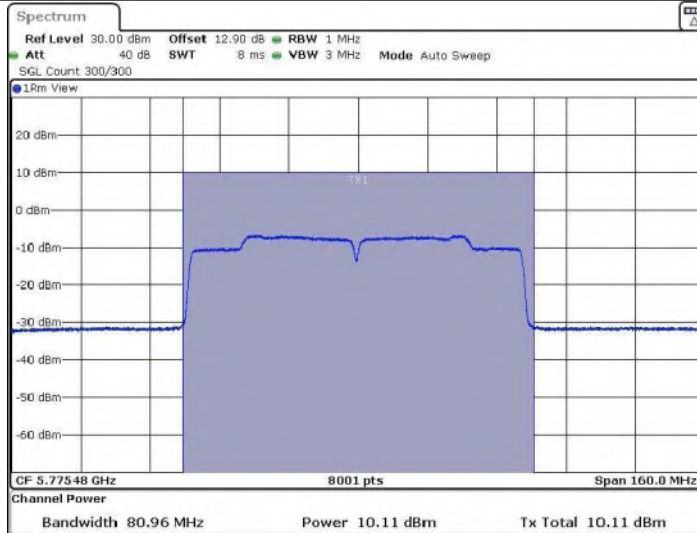

Date: 6 AUG.2022 12:33:00

Ant1+Ant2

Measurement Data

Test Mode	Antenna	Channel	Av.Power [dBm]	Limit [dBm]	Verdict
11N20	Ant1+Ant2	5180	16.00	23.21	PASS
11N20	Ant1+Ant2	5220	13.89	23.21	PASS
11N20	Ant1+Ant2	5240	14.78	23.21	PASS
11N20	Ant1+Ant2	5745	13.75	29.21	PASS
11N20	Ant1+Ant2	5785	13.86	29.21	PASS
11N20	Ant1+Ant2	5825	13.70	29.21	PASS
11N40	Ant1+Ant2	5190	15.64	23.21	PASS
11N40	Ant1+Ant2	5230	14.33	23.21	PASS
11N40	Ant1+Ant2	5755	13.84	29.21	PASS
11N40	Ant1+Ant2	5795	13.76	29.21	PASS
11AC20	Ant1+Ant2	5180	16.13	23.21	PASS
11AC20	Ant1+Ant2	5220	14.06	23.21	PASS
11AC20	Ant1+Ant2	5240	14.81	23.21	PASS
11AC20	Ant1+Ant2	5745	13.81	29.21	PASS
11AC20	Ant1+Ant2	5785	13.58	29.21	PASS
11AC20	Ant1+Ant2	5825	13.33	29.21	PASS
11AC40	Ant1+Ant2	5190	15.48	23.21	PASS
11AC40	Ant1+Ant2	5230	13.77	23.21	PASS
11AC40	Ant1+Ant2	5755	13.12	29.21	PASS
11AC40	Ant1+Ant2	5795	13.37	29.21	PASS
11AC80	Ant1+Ant2	5210	14.94	23.21	PASS
11AC80	Ant1+Ant2	5775	13.17	29.21	PASS

Note: The EUT supports MIMO and transmit signals are correlated with each other, then

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi} = 6.79 \text{ dBi} > 6\text{dBi}$$

Appendix C): Maximum Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Test Procedure:

For 5150-5725MHz:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 1MHz.
4. Set the VBW $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold.


For 5725-5850MHz:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on operation frequency individually.
3. Set RBW = 500KHz.
4. Set the VBW $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold.

Limit:

Frequency band(MHz)	Limit
5150-5250	≤ 17 dBm in 1MHz for master device
	≤ 11 dBm in 1MHz for client device
5250-5350	≤ 11 dBm in 1MHz for client device
5470-5725	≤ 11 dBm in 1MHz for client device
5725-5850	≤ 30 dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

Test Setup Diagram

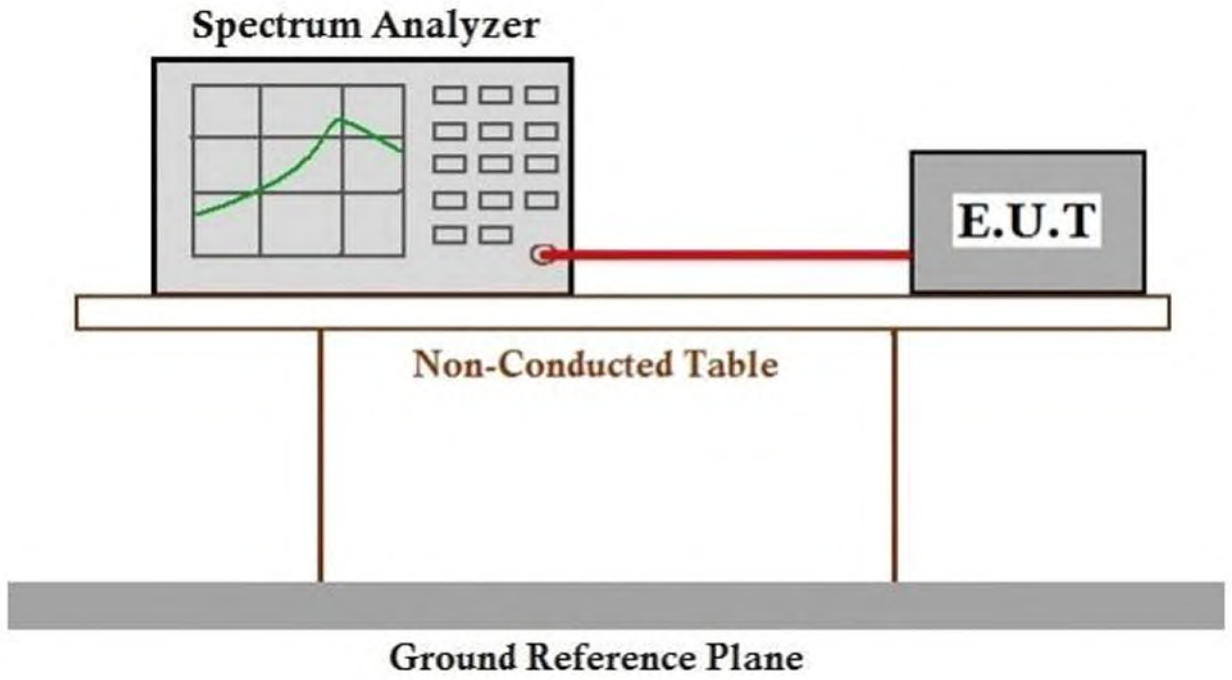

Ant1


Test Result

TestMode	Antenna	Channel	Meas.Level [dBm]	Duty Cycle Factor [dB]	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	-0.15	0.06	-0.09	11	PASS
11A	Ant1	5220	-0.23	0.04	-0.19	11	PASS
11A	Ant1	5240	1.25	0.06	1.31	11	PASS
11A	Ant1	5745	-2.72	0.06	-2.66	30	PASS
11A	Ant1	5785	-3.14	0.06	-3.08	30	PASS
11A	Ant1	5825	-2.23	0.04	-2.19	30	PASS
11N20SISO	Ant1	5180	2.53	0.05	2.58	11	PASS
11N20SISO	Ant1	5220	0.39	0.05	0.44	11	PASS
11N20SISO	Ant1	5240	0.98	0.07	1.05	11	PASS
11N20SISO	Ant1	5745	-2.84	0.07	-2.77	30	PASS
11N20SISO	Ant1	5785	-2.67	0.07	-2.6	30	PASS
11N20SISO	Ant1	5825	-2.37	0.07	-2.3	30	PASS
11N40SISO	Ant1	5190	-1.41	0.14	-1.27	11	PASS
11N40SISO	Ant1	5230	-2.15	0.14	-2.01	11	PASS
11N40SISO	Ant1	5755	-6.02	0.14	-5.88	30	PASS
11N40SISO	Ant1	5795	-5.59	0.09	-5.5	30	PASS
11AC20SISO	Ant1	5180	3.08	0.07	3.15	11	PASS
11AC20SISO	Ant1	5220	0.11	0.05	0.16	11	PASS
11AC20SISO	Ant1	5240	1.31	0.05	1.36	11	PASS
11AC20SISO	Ant1	5745	-2.54	0.05	-2.49	30	PASS
11AC20SISO	Ant1	5785	-3.17	0.07	-3.1	30	PASS
11AC20SISO	Ant1	5825	-3.18	0.07	-3.11	30	PASS
11AC40SISO	Ant1	5190	-1	0.09	-0.91	11	PASS
11AC40SISO	Ant1	5230	-2.8	0.09	-2.71	11	PASS
11AC40SISO	Ant1	5755	-6.09	0.09	-6	30	PASS
11AC40SISO	Ant1	5795	-6.51	0.14	-6.37	30	PASS
11AC80SISO	Ant1	5210	-4.77	0.29	-4.48	11	PASS
11AC80SISO	Ant1	5775	-9.71	0.05	-9.66	30	PASS

Remark:

PSD = Meas PSD + Duty Cycle Factor

Test Graphs

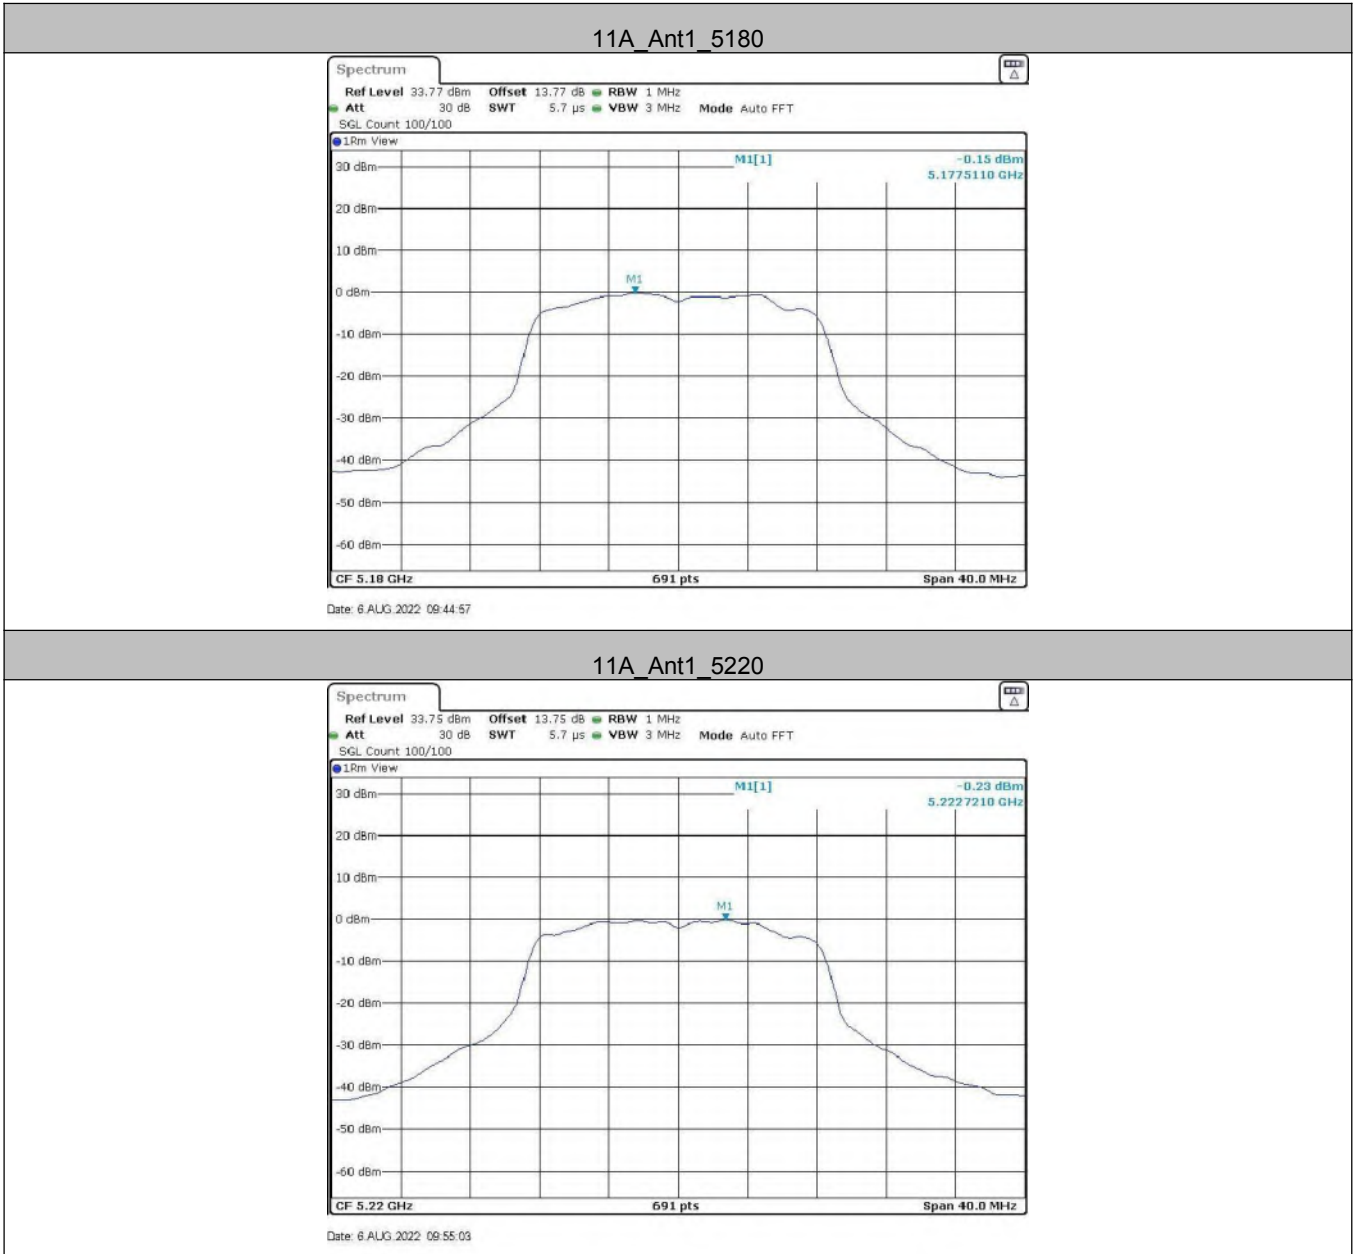

11A_Ant1_5240




Date: 6 AUG.2022 10:00:52

11A_Ant1_5745




Date: 6 AUG.2022 10:07:43


11A_Ant1_5785

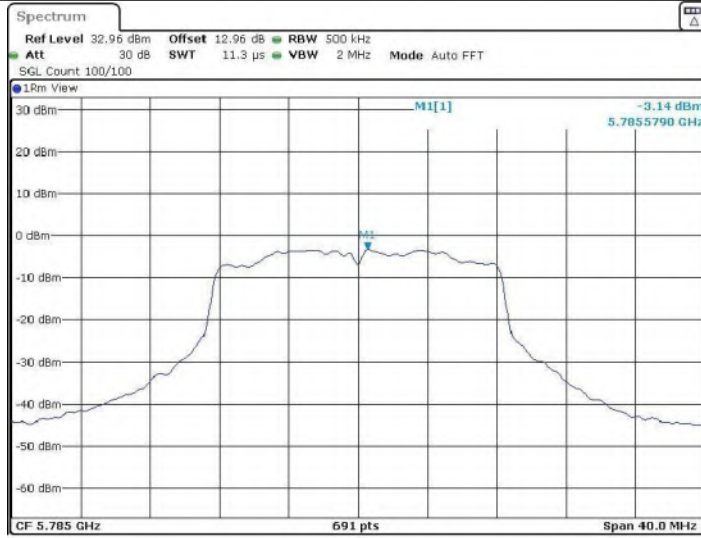

11A_Ant1_5825

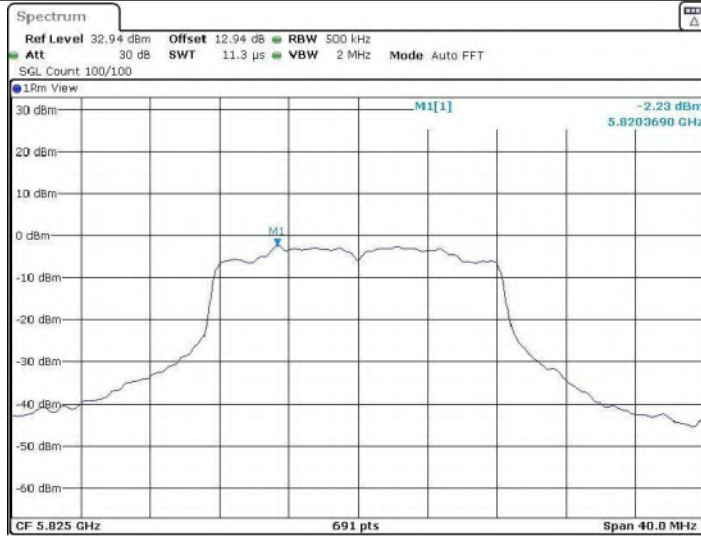

11N20SISO_Ant1_5180

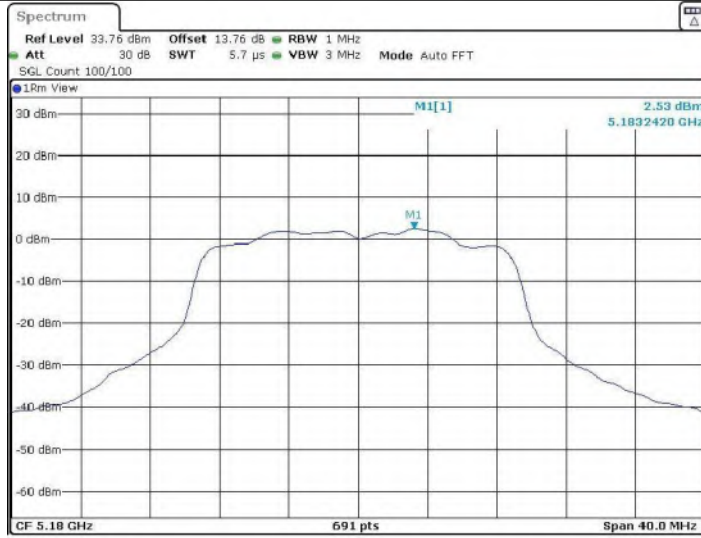


Date: 6 AUG.2022 10:26:27

11N20SISO_Ant1_5220




Date: 6 AUG.2022 10:32:14

11N20SISO_Ant1_5240

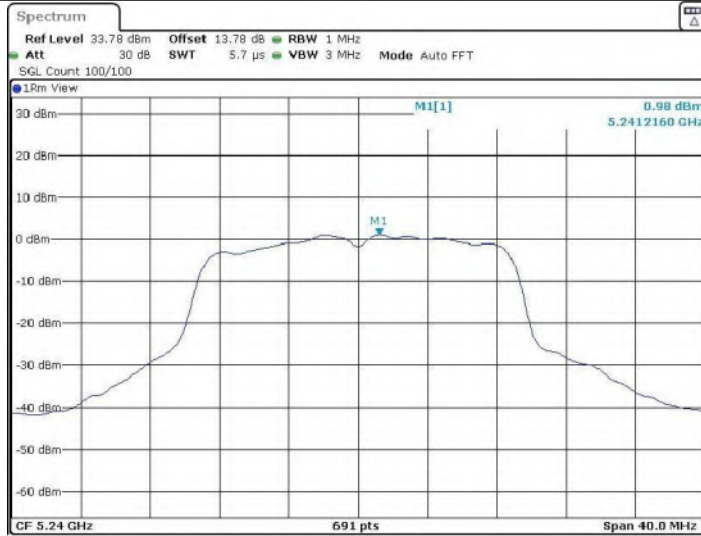

Date: 6 AUG.2022 10:36:42

11N20SISO_Ant1_5745

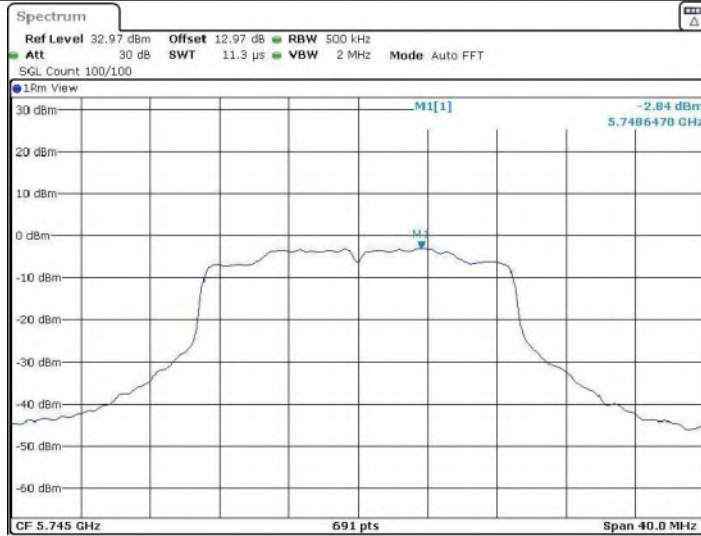


Date: 6 AUG.2022 10:42:54

11N20SISO_Ant1_5785




Date: 6 AUG.2022 10:49:05

11N20SISO_Ant1_5825

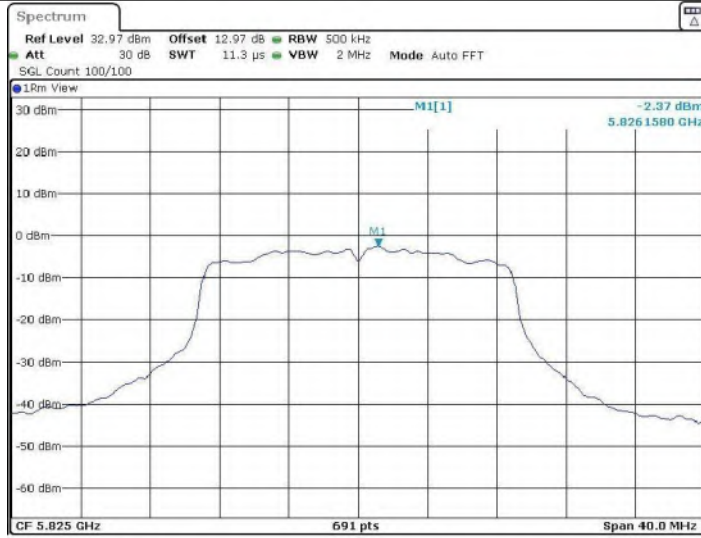


Date: 6 AUG.2022 10:53:40

11N40SISO_Ant1_5190

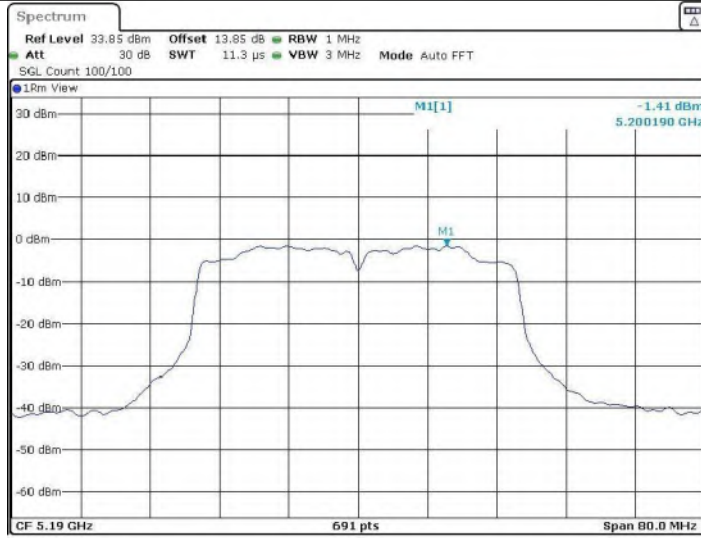


Date: 6 AUG.2022 10:59:38

11N40SISO_Ant1_5230

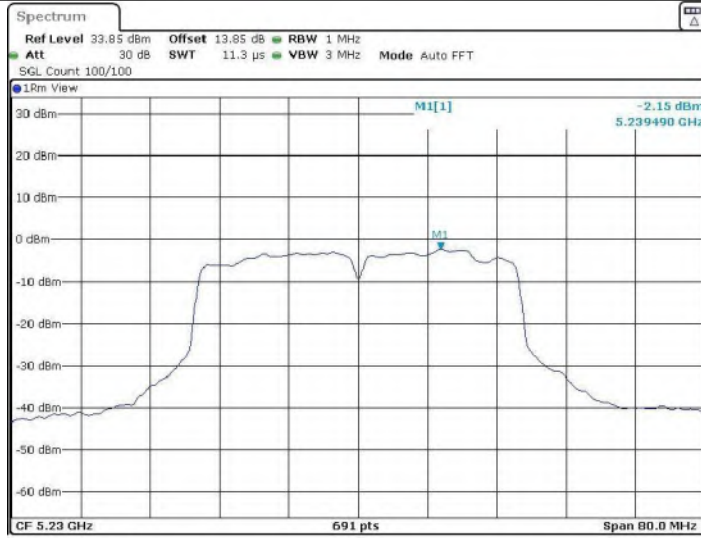


Date: 6 AUG.2022 11:05:17

11N40SISO_Ant1_5755

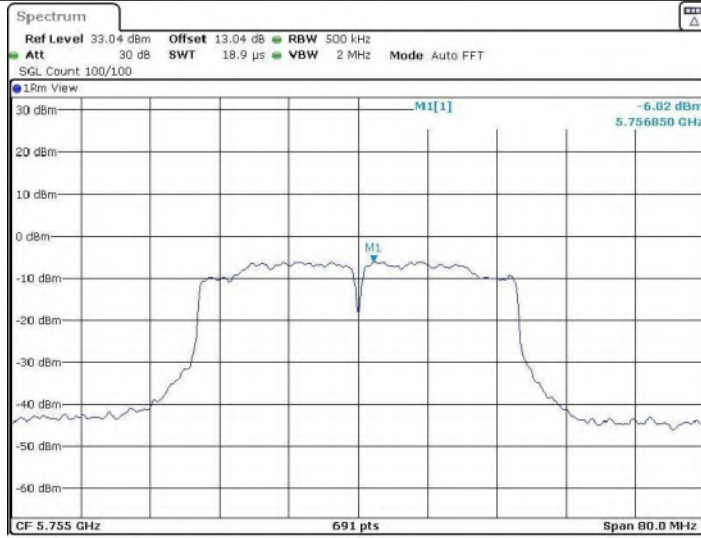


Date: 6 AUG.2022 11:14:58

11N40SISO_Ant1_5795

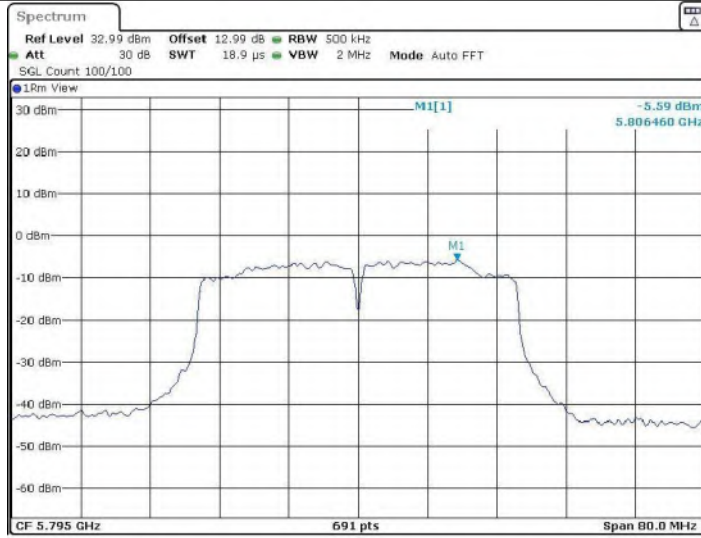


Date: 6 AUG.2022 11:22:06

11AC20SISO_Ant1_5180

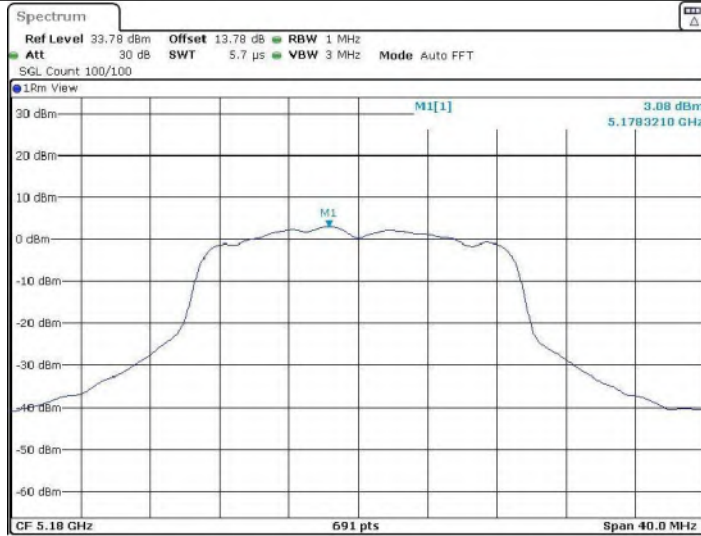

Date: 6 AUG.2022 11:28:17

11AC20SISO_Ant1_5220

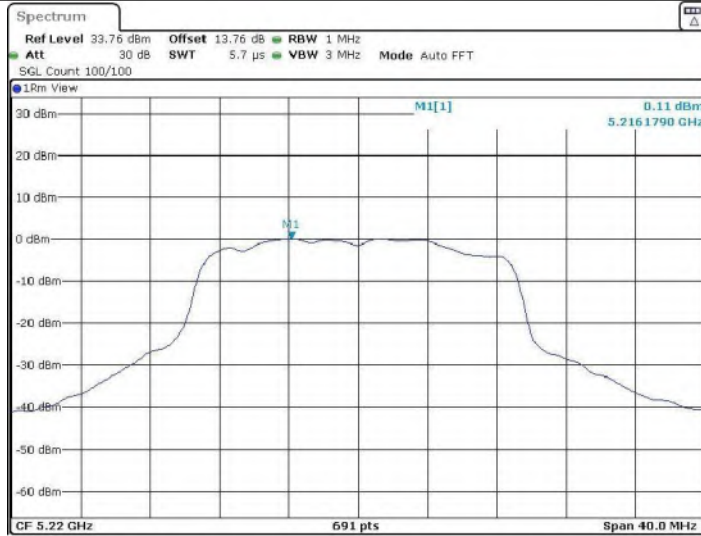


Date: 6 AUG.2022 11:34:30

11AC20SISO_Ant1_5240




Date: 6 AUG.2022 11:38:51

11AC20SISO_Ant1_5745

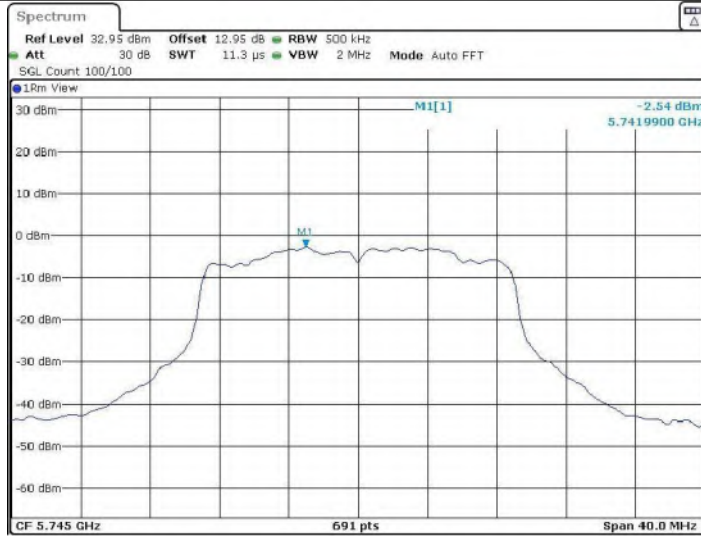


Date: 6 AUG.2022 11:44:42

11AC20SISO_Ant1_5785

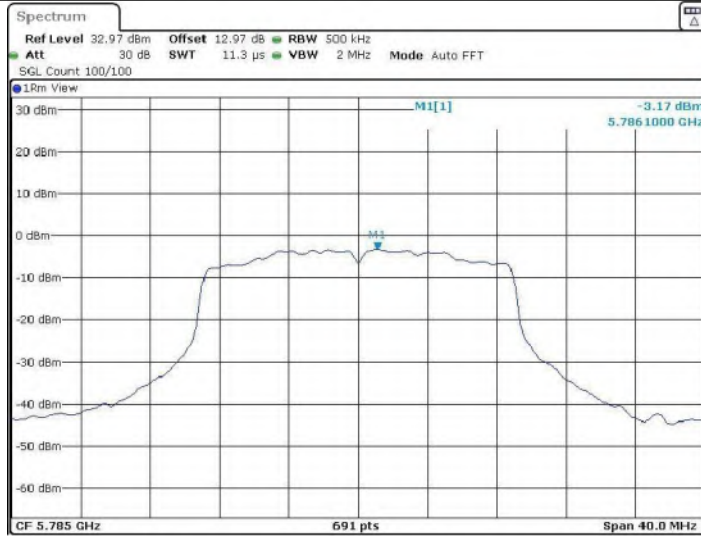


Date: 6 AUG.2022 11:51:25

11AC20SISO_Ant1_5825

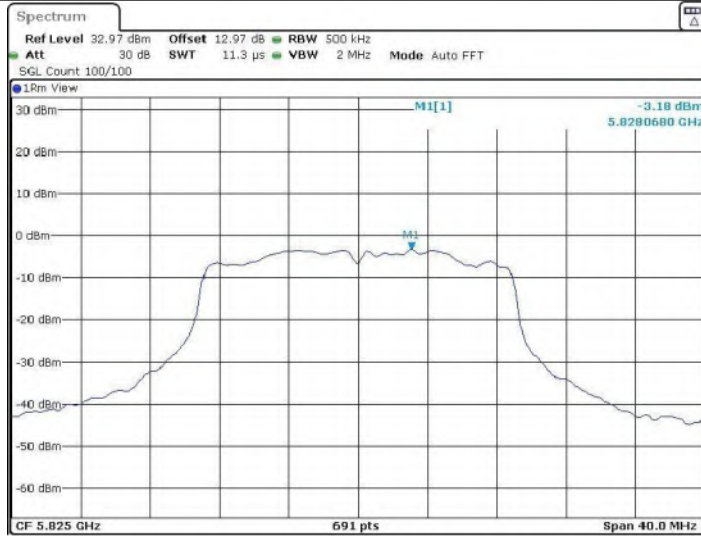

Date: 6 AUG.2022 11:56:11

11AC40SISO_Ant1_5190

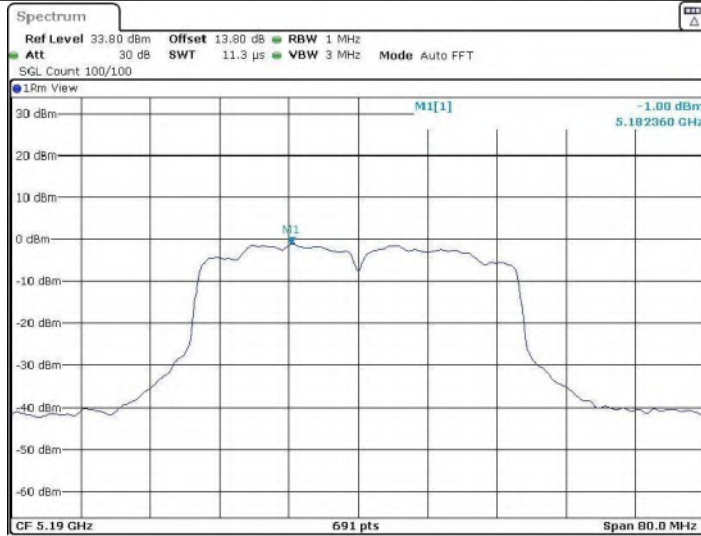


Date: 6 AUG.2022 12:01:34

11AC40SISO_Ant1_5230




Date: 6 AUG.2022 12:07:02

11AC40SISO_Ant1_5755

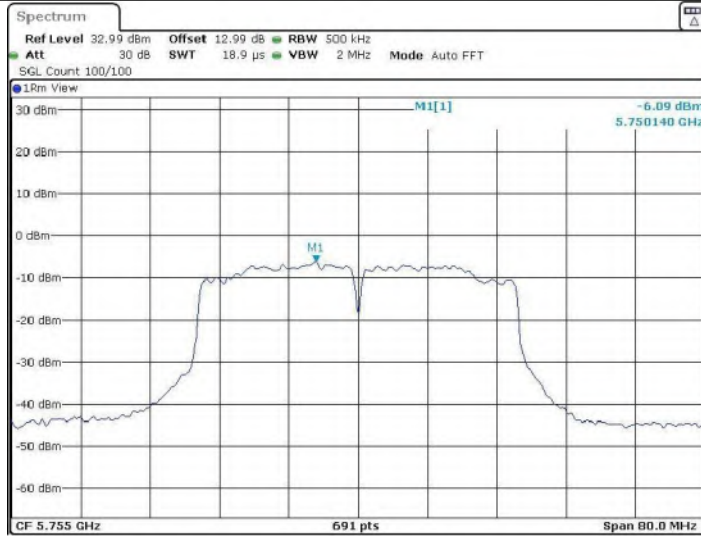


Date: 6 AUG.2022 12:14:45

11AC40SISO_Ant1_5795

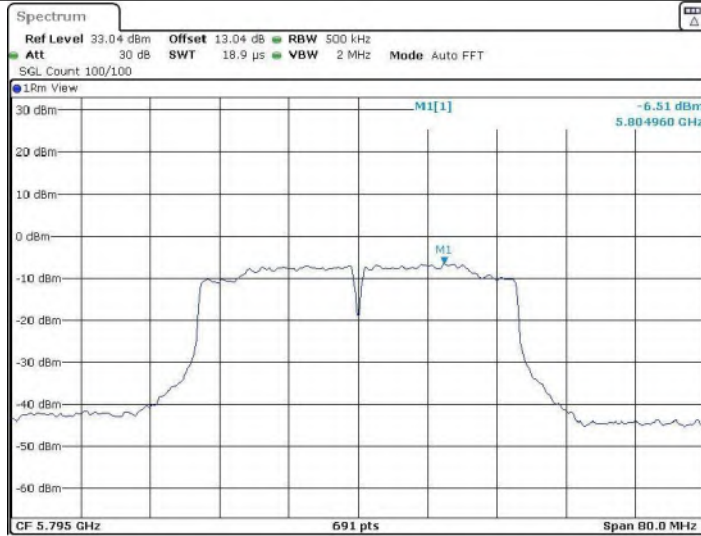


Date: 6 AUG.2022 12:20:32

11AC80SISO_Ant1_5210

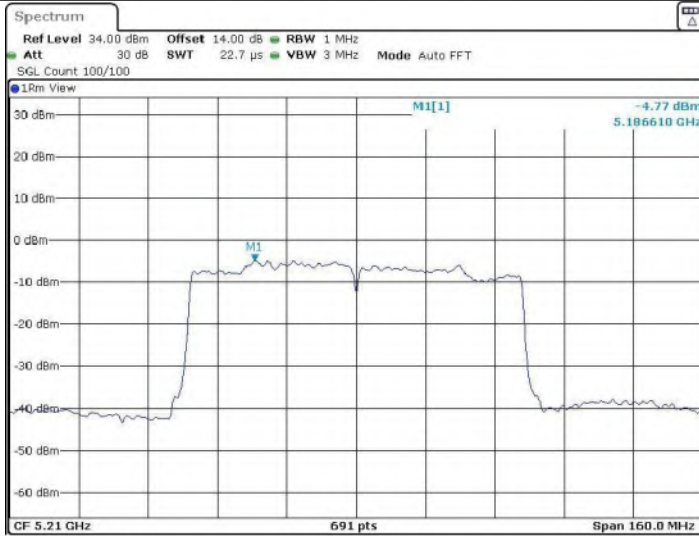

Date: 6 AUG.2022 12:25:57

11AC80SISO_Ant1_5775

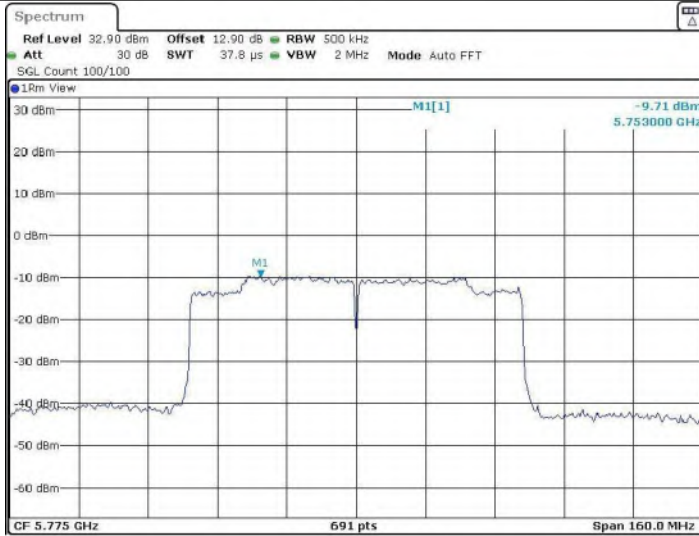

Date: 6 AUG.2022 12:33:07

Ant2


Test Result

TestMode	Antenna	Channel	Meas.Level [dBm]	Duty Cycle Factor [dB]	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant2	5180	-0.15	0.06	-0.09	11	PASS
11A	Ant2	5220	-0.23	0.04	-0.19	11	PASS
11A	Ant2	5240	1.25	0.06	1.31	11	PASS
11A	Ant2	5745	-2.72	0.06	-2.66	30	PASS
11A	Ant2	5785	-3.14	0.06	-3.08	30	PASS
11A	Ant2	5825	-2.23	0.04	-2.19	30	PASS
11N20SISO	Ant2	5180	2.53	0.05	2.58	11	PASS
11N20SISO	Ant2	5220	0.39	0.05	0.44	11	PASS
11N20SISO	Ant2	5240	0.98	0.07	1.05	11	PASS
11N20SISO	Ant2	5745	-2.84	0.07	-2.77	30	PASS
11N20SISO	Ant2	5785	-2.67	0.07	-2.6	30	PASS
11N20SISO	Ant2	5825	-2.37	0.07	-2.3	30	PASS
11N40SISO	Ant2	5190	-1.41	0.14	-1.27	11	PASS
11N40SISO	Ant2	5230	-2.15	0.14	-2.01	11	PASS
11N40SISO	Ant2	5755	-6.02	0.14	-5.88	30	PASS
11N40SISO	Ant2	5795	-5.59	0.09	-5.5	30	PASS
11AC20SISO	Ant2	5180	3.08	0.07	3.15	11	PASS
11AC20SISO	Ant2	5220	0.11	0.05	0.16	11	PASS
11AC20SISO	Ant2	5240	1.31	0.05	1.36	11	PASS
11AC20SISO	Ant2	5745	-2.54	0.05	-2.49	30	PASS
11AC20SISO	Ant2	5785	-3.17	0.07	-3.1	30	PASS
11AC20SISO	Ant2	5825	-3.18	0.07	-3.11	30	PASS
11AC40SISO	Ant2	5190	-1	0.09	-0.91	11	PASS
11AC40SISO	Ant2	5230	-2.8	0.09	-2.71	11	PASS
11AC40SISO	Ant2	5755	-6.09	0.09	-6	30	PASS
11AC40SISO	Ant2	5795	-6.51	0.14	-6.37	30	PASS
11AC80SISO	Ant2	5210	-4.77	0.29	-4.48	11	PASS
11AC80SISO	Ant2	5775	-9.71	0.05	-9.66	30	PASS

Remark:

PSD = Meas PSD + Duty Cycle Factor

Test Graphs

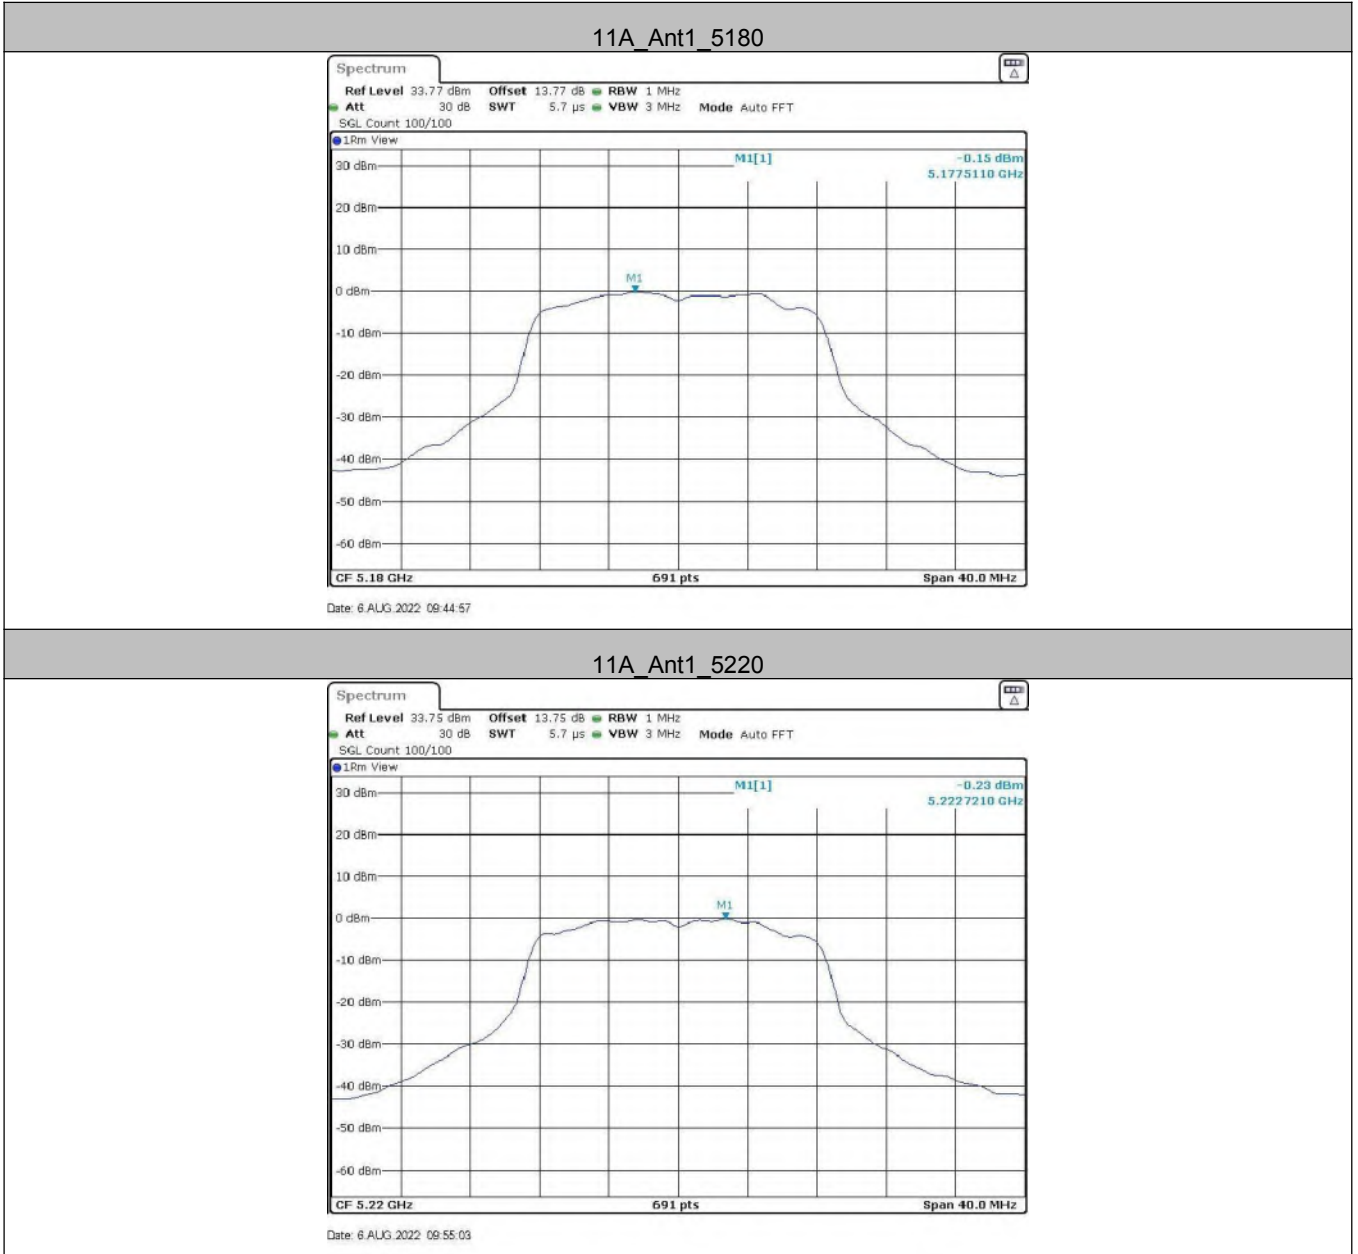

11A_Ant1_5240




Date: 6 AUG.2022 10:00:52

11A_Ant1_5745




Date: 6 AUG.2022 10:07:43

11A_Ant1_5785

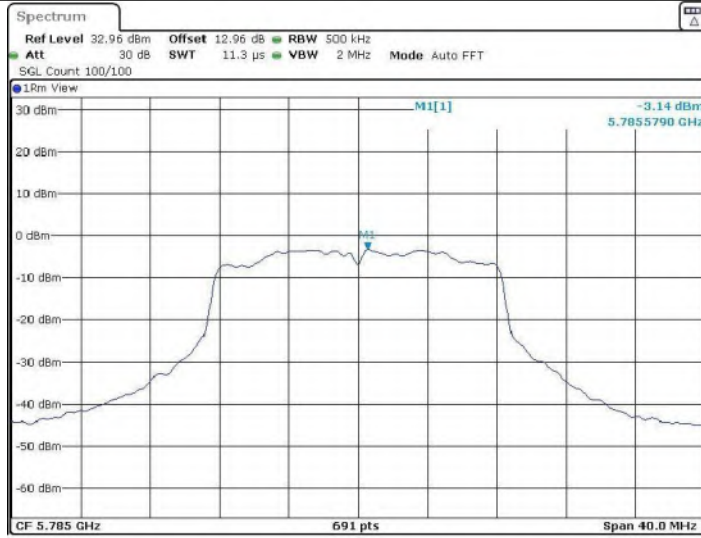


Date: 6 AUG.2022 10:14:27

11A_Ant1_5825

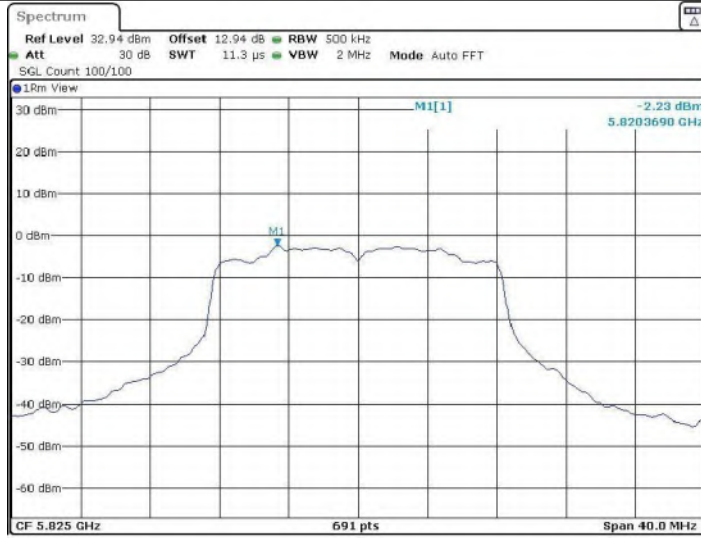


Date: 6 AUG.2022 10:20:29

11N20SISO_Ant1_5180

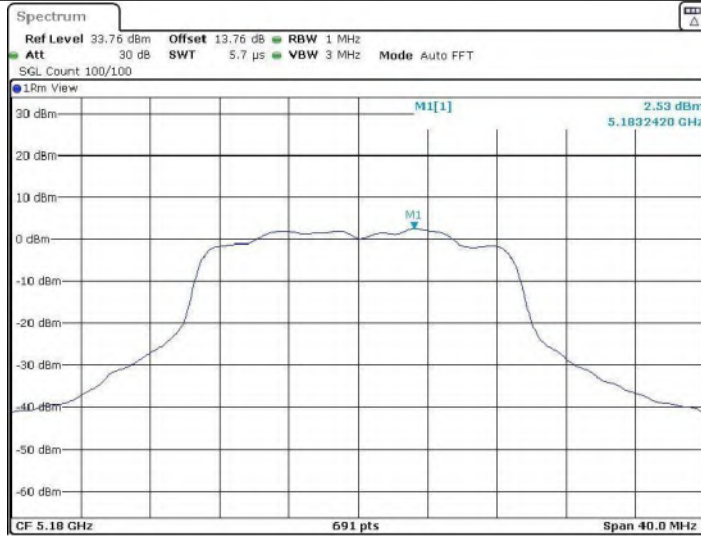

Date: 6 AUG.2022 10:26:27

11N20SISO_Ant1_5220

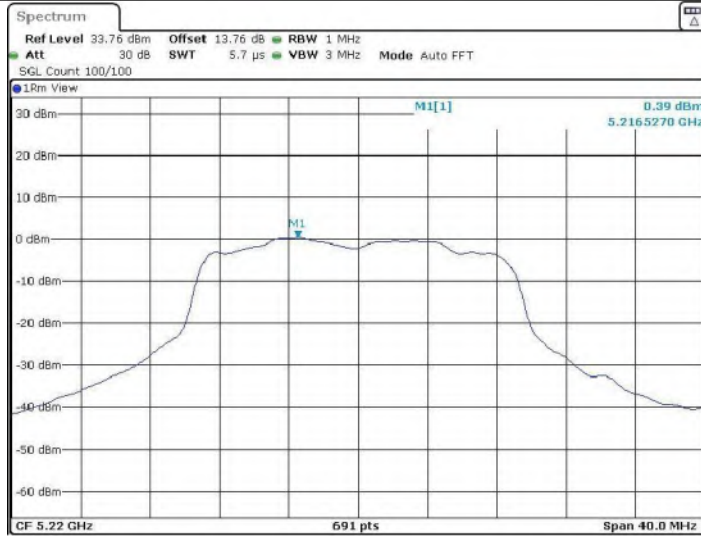


Date: 6 AUG.2022 10:32:14

11N20SISO_Ant1_5240




Date: 6 AUG.2022 10:36:42

11N20SISO_Ant1_5745

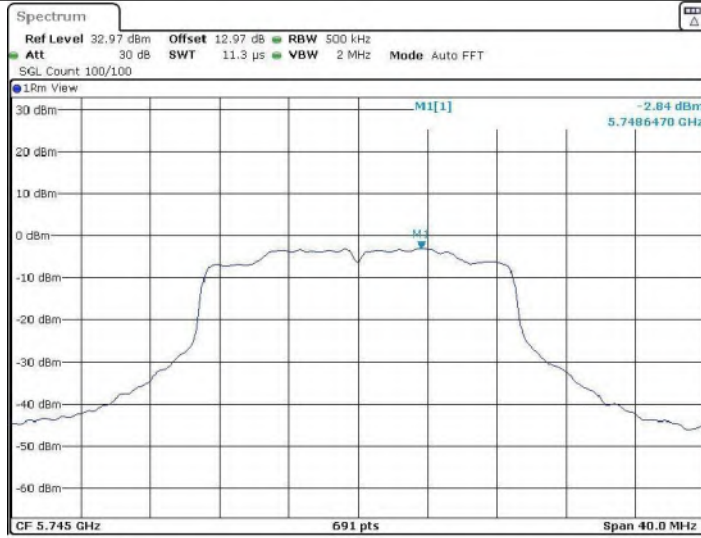

Date: 6 AUG.2022 10:42:54

11N20SISO_Ant1_5785

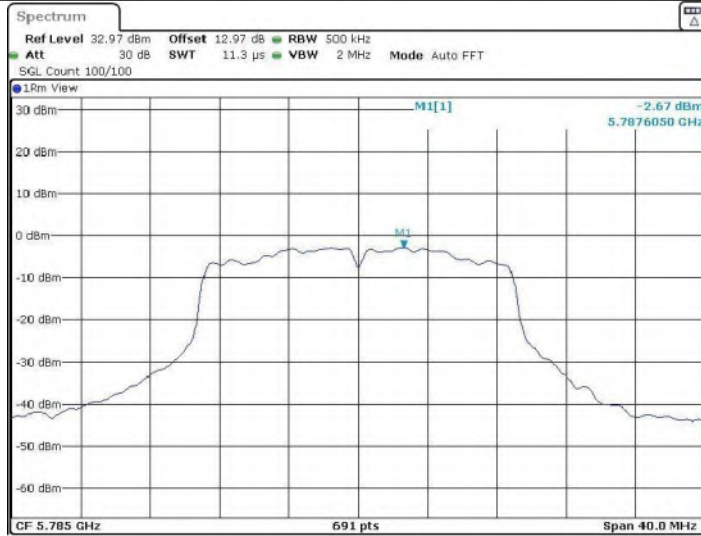


Date: 6 AUG.2022 10:49:05

11N20SISO_Ant1_5825



Date: 6 AUG.2022 10:53:40

11N40SISO_Ant1_5190

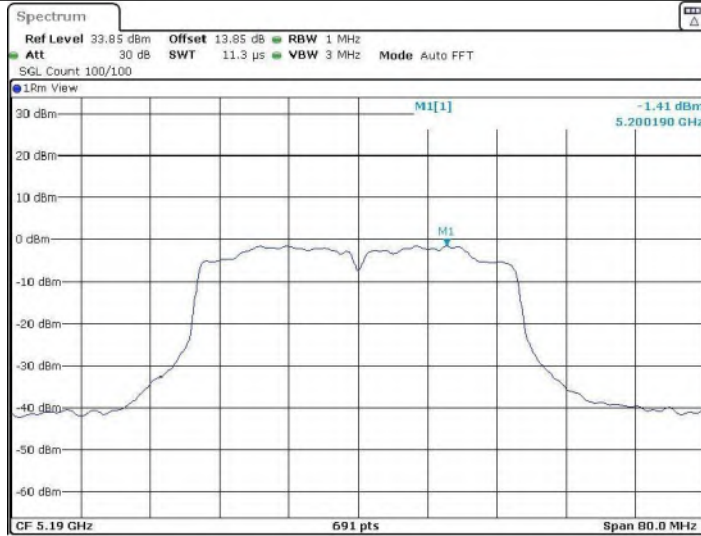


Date: 6 AUG.2022 10:59:38

11N40SISO_Ant1_5230




Date: 6 AUG.2022 11:05:17

11N40SISO_Ant1_5755

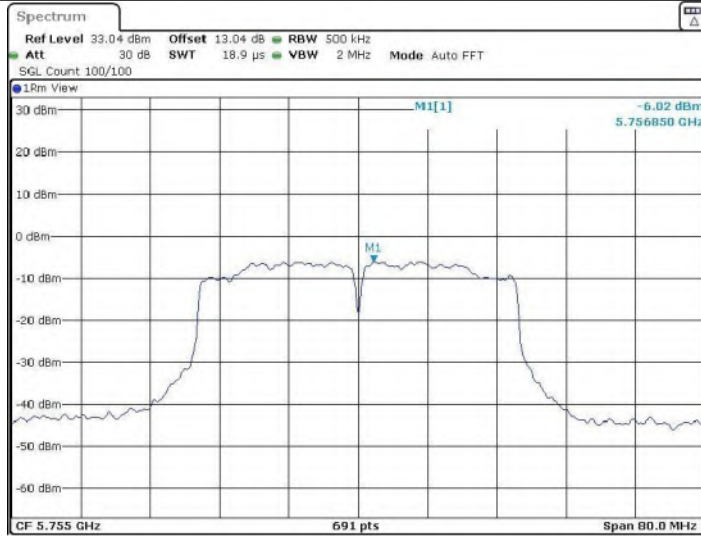


Date: 6 AUG.2022 11:14:58

11N40SISO_Ant1_5795

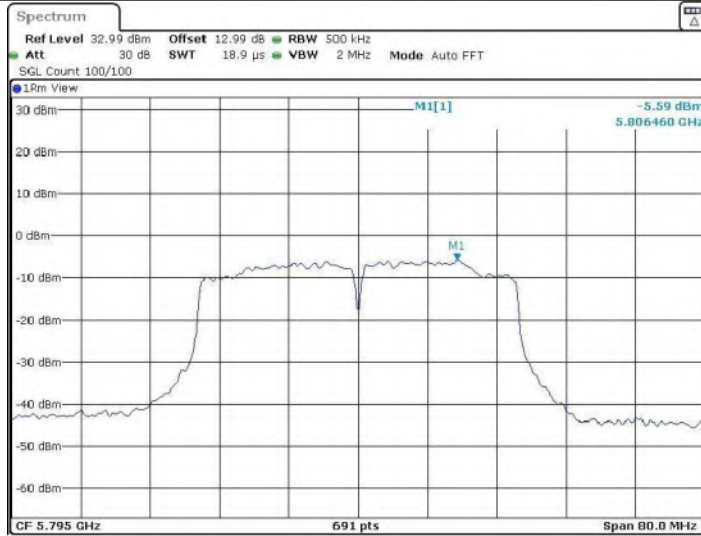

Date: 6 AUG.2022 11:22:06

11AC20SISO_Ant1_5180

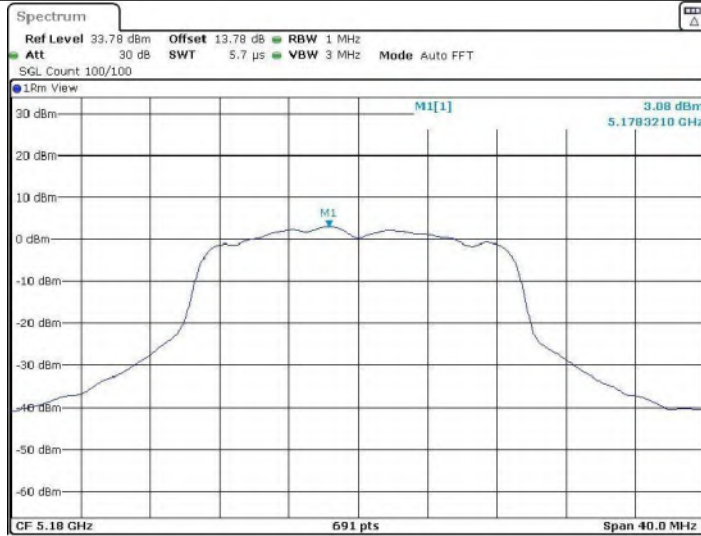

Date: 6 AUG.2022 11:28:17

11AC20SISO_Ant1_5220



Date: 6 AUG.2022 11:34:30

11AC20SISO_Ant1_5240




Date: 6 AUG.2022 11:38:51

11AC20SISO_Ant1_5745




Date: 6 AUG.2022 11:44:42

11AC20SISO_Ant1_5785

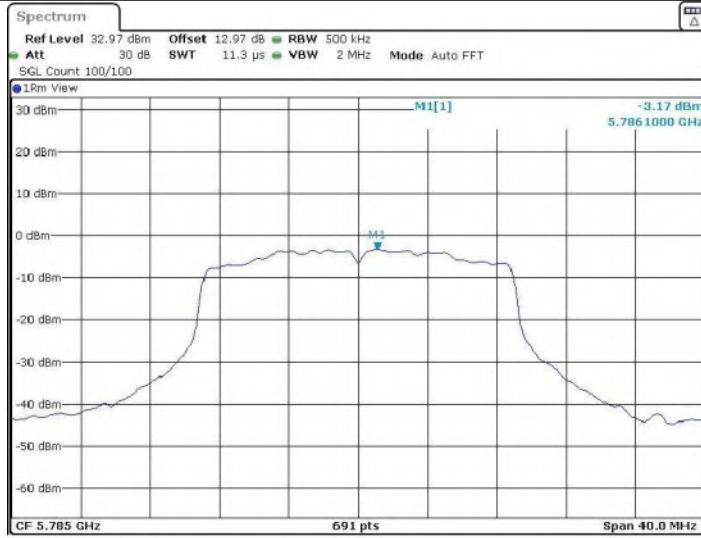


Date: 6 AUG.2022 11:51:25

11AC20SISO_Ant1_5825

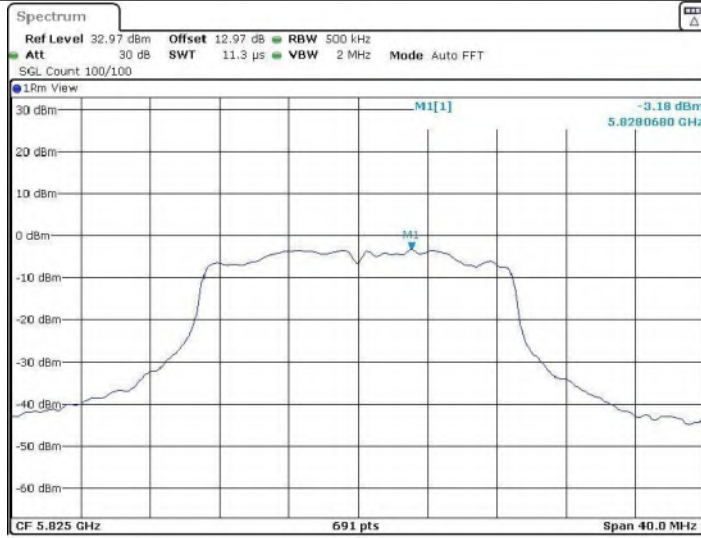

Date: 6 AUG.2022 11:56:11

11AC40SISO_Ant1_5190

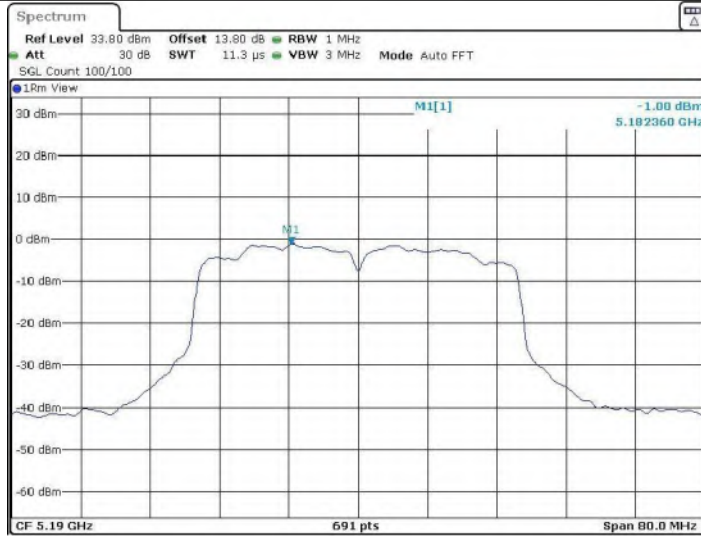


Date: 6 AUG.2022 12:01:34

11AC40SISO_Ant1_5230




Date: 6 AUG.2022 12:07:02

11AC40SISO_Ant1_5755

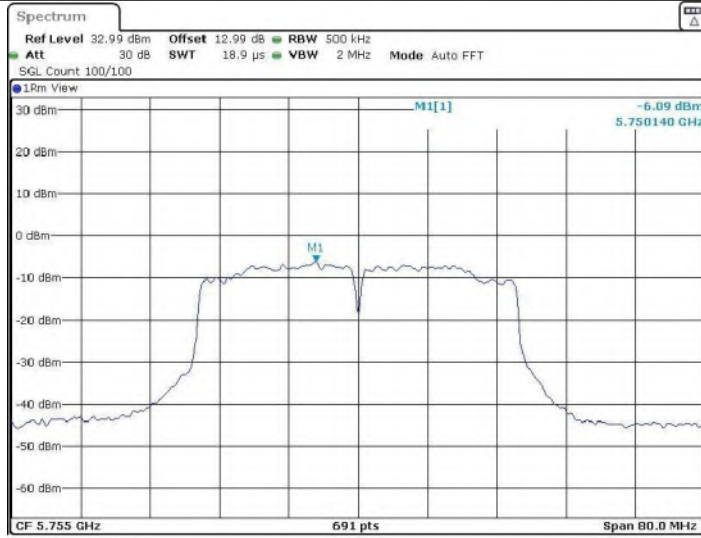


Date: 6 AUG.2022 12:14:45

11AC40SISO_Ant1_5795

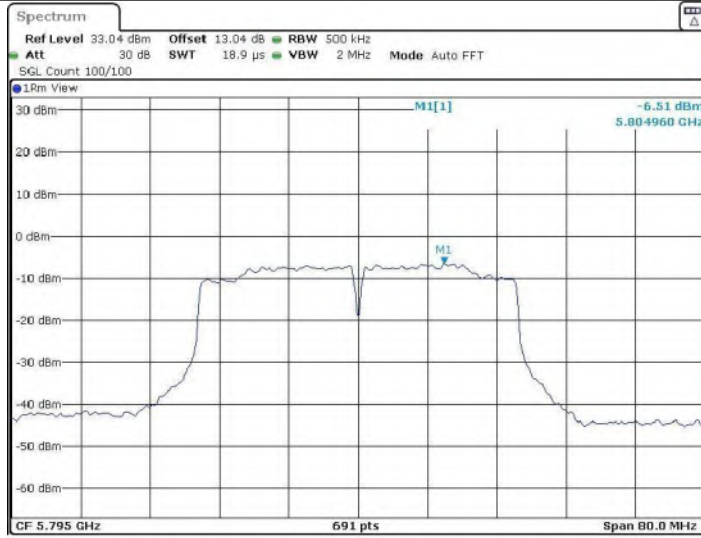


Date: 6 AUG.2022 12:20:32

11AC80SISO_Ant1_5210

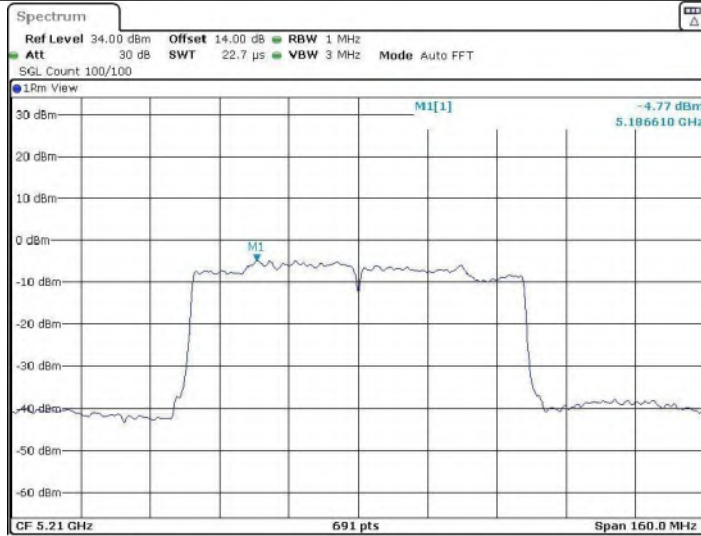

Date: 6 AUG.2022 12:25:57

11AC80SISO_Ant1_5775

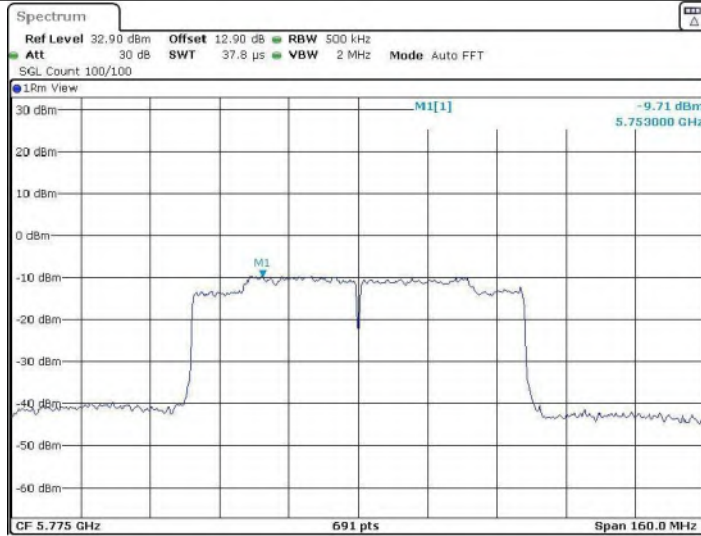

Date: 6 AUG.2022 12:33:07

Ant1+Ant2

Test Mode	Antenna	Channel	PSD [dBm/MHz]	Limit [dBm/MHz]	Verdict
11N20	Ant1+Ant2	5180	5.59	10.21	PASS
11N20	Ant1+Ant2	5220	3.45	10.21	PASS
11N20	Ant1+Ant2	5240	4.06	10.21	PASS
11N20	Ant1+Ant2	5745	0.24	29.21	PASS
11N20	Ant1+Ant2	5785	0.41	29.21	PASS
11N20	Ant1+Ant2	5825	0.71	29.21	PASS
11N40	Ant1+Ant2	5190	1.74	10.21	PASS
11N40	Ant1+Ant2	5230	1.00	10.21	PASS
11N40	Ant1+Ant2	5755	-2.87	10.21	PASS
11N40	Ant1+Ant2	5795	-2.49	29.21	PASS
11AC20	Ant1+Ant2	5180	6.16	29.21	PASS
11AC20	Ant1+Ant2	5220	3.17	29.21	PASS
11AC20	Ant1+Ant2	5240	4.37	10.21	PASS
11AC20	Ant1+Ant2	5745	0.52	10.21	PASS
11AC20	Ant1+Ant2	5785	-0.09	29.21	PASS
11AC20	Ant1+Ant2	5825	-0.10	29.21	PASS
11AC40	Ant1+Ant2	5190	2.10	10.21	PASS
11AC40	Ant1+Ant2	5230	0.30	10.21	PASS
11AC40	Ant1+Ant2	5755	-2.99	10.21	PASS
11AC40	Ant1+Ant2	5795	-3.36	29.21	PASS
11AC80	Ant1+Ant2	5210	-1.47	29.21	PASS
11AC80	Ant1+Ant2	5775	-6.64	29.21	PASS

Note: The EUT supports MIMO and transmit signals are correlated with each other, then

$$\text{Directional gain} = 10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{\text{ANT}}] \text{ dBi} = 6.79 \text{ dBi} > 6\text{dBi}$$

Appendix D): Band Edge Measurements

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G


Test Procedure:

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO

Limit:


For transmitters operating in the 5.15-5.25 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.25-5.35 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.47-5.725 GHz band:	All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.725-5.85 GHz band:	(i) All emissions shall be limited to a level of -27 dBm/MHz (68.2dBuV/m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz (105.2dBuV/m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz (110.8dBuV/m) at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz (122.2dBuV/m) at the band edge.

Test Setup Diagram

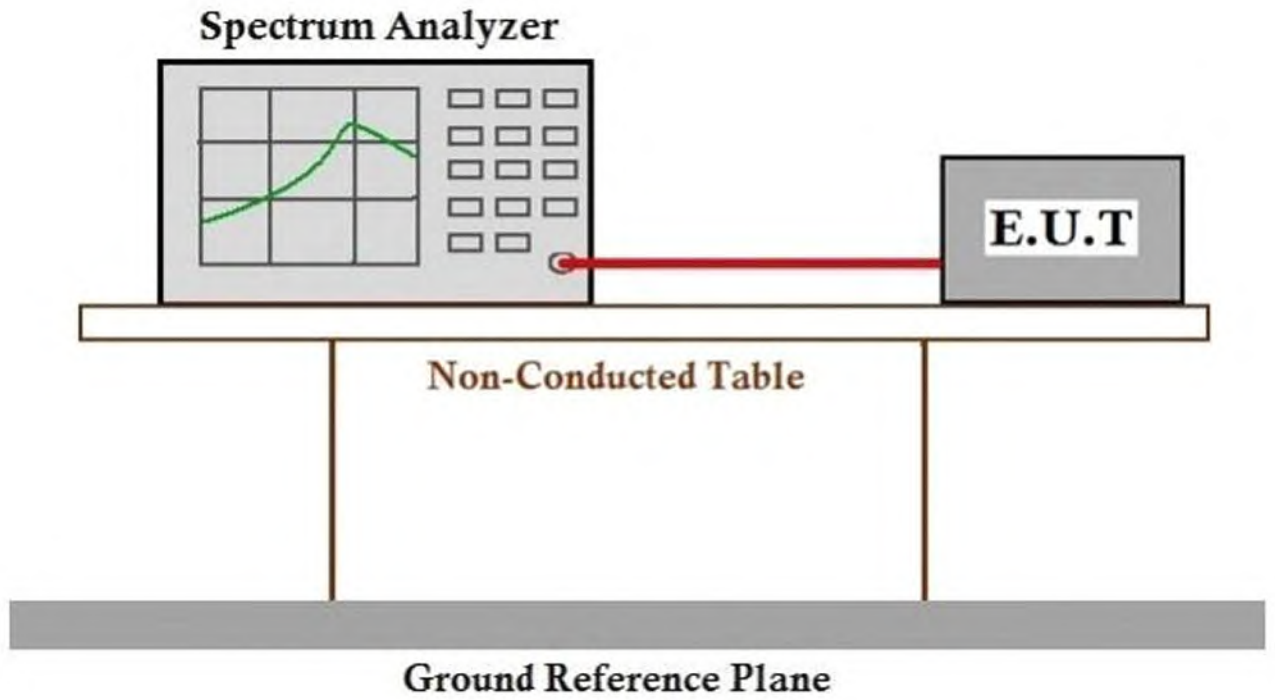


Test Graphs

Ant1

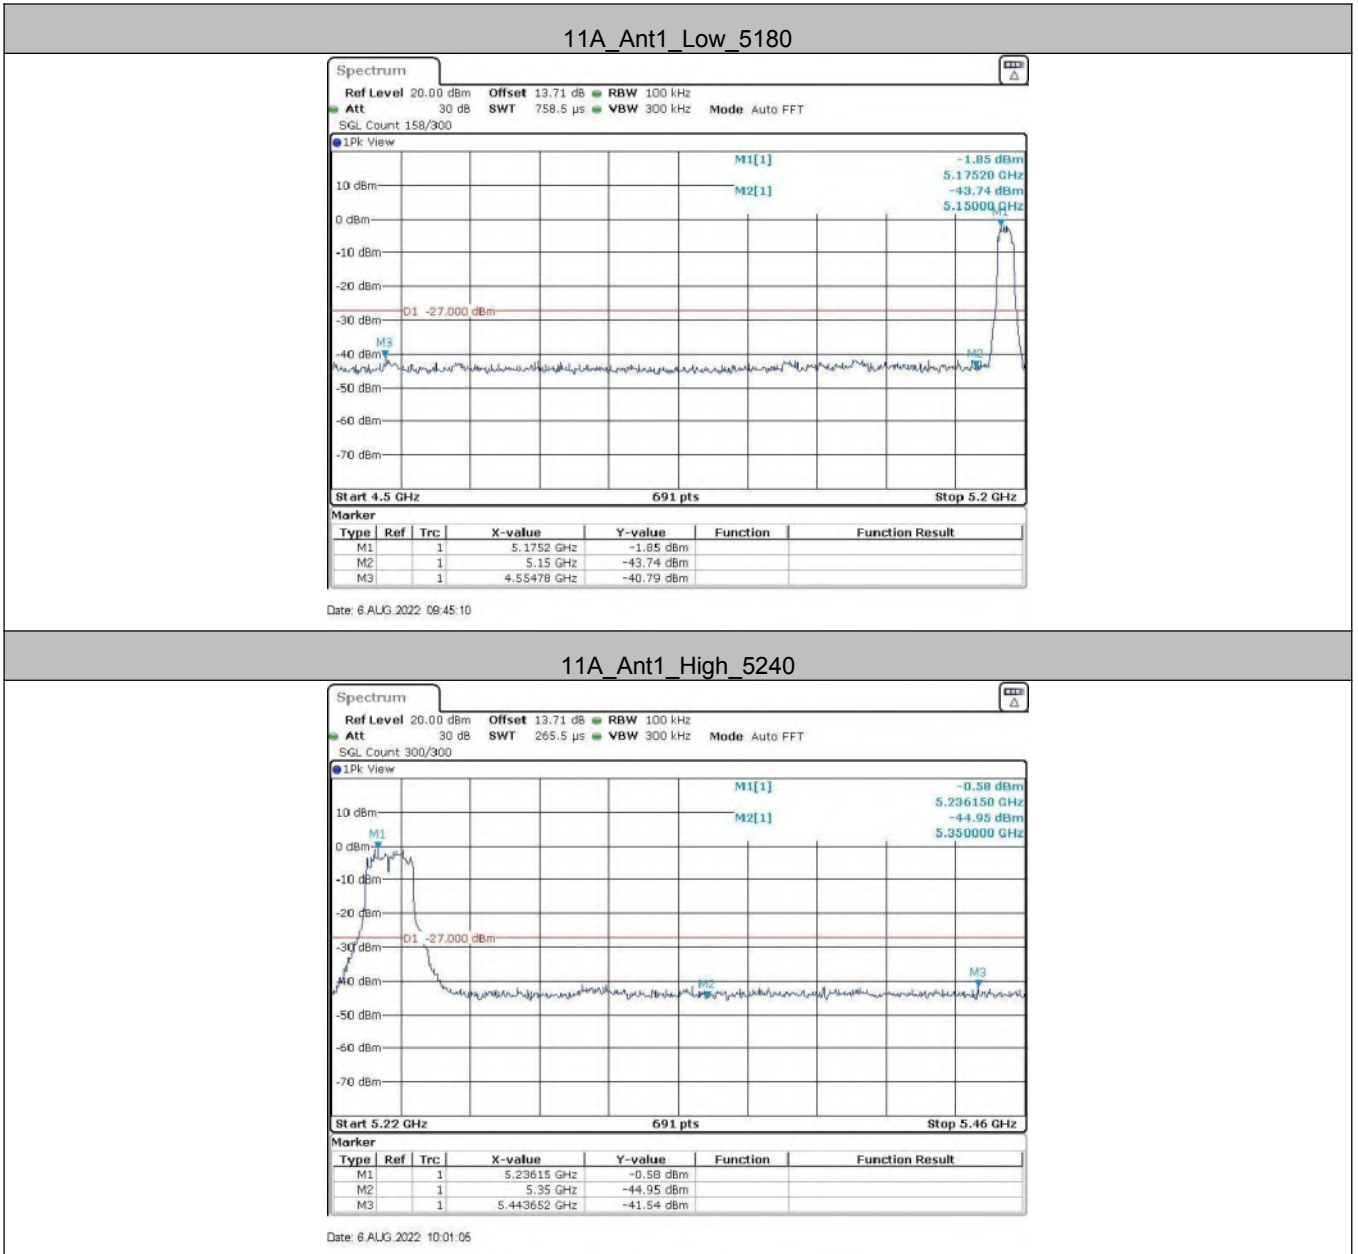


11A_Ant1_High_5240

11N20SISO_Ant1_Low_5180

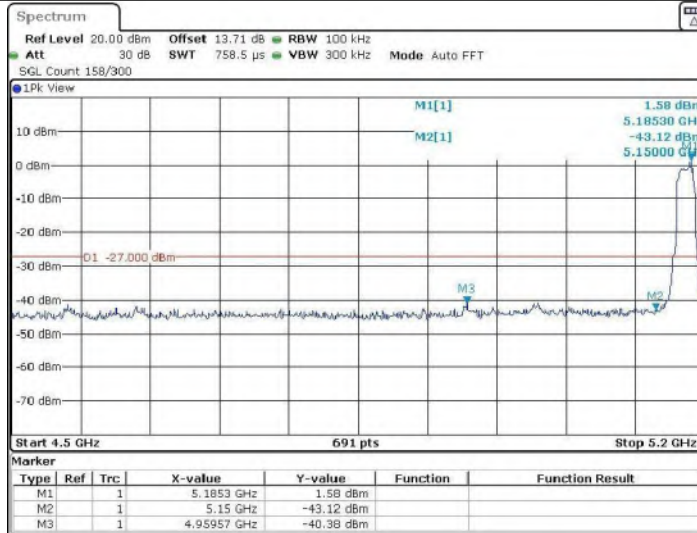


Date: 6 AUG.2022 10:26:41

11N20SISO_Ant1_High_5240

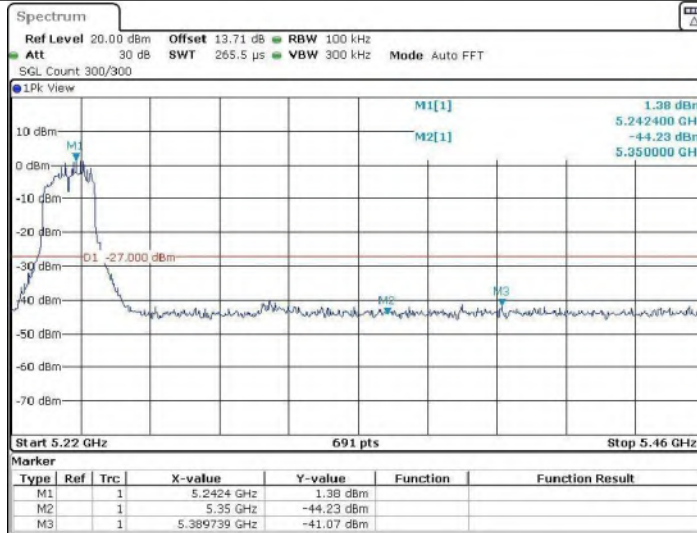


Date: 6 AUG.2022 10:26:55

11N40SISO_Ant1_Low_5190

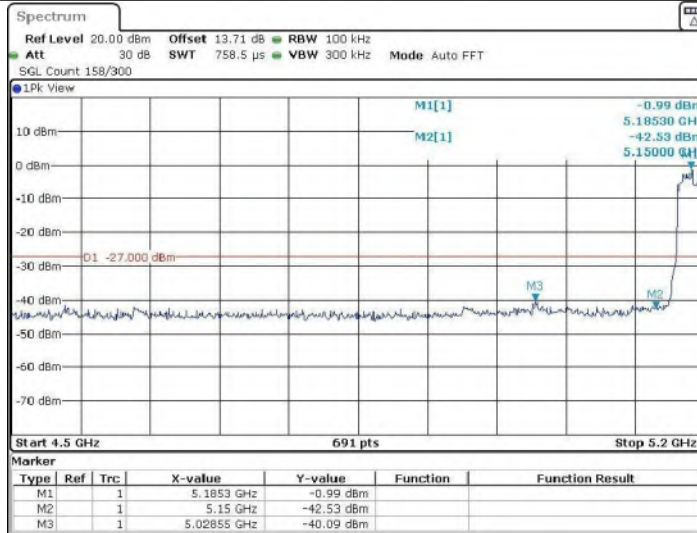


Date: 6 AUG.2022 10:59:51

11N40SISO_Ant1_High_5230

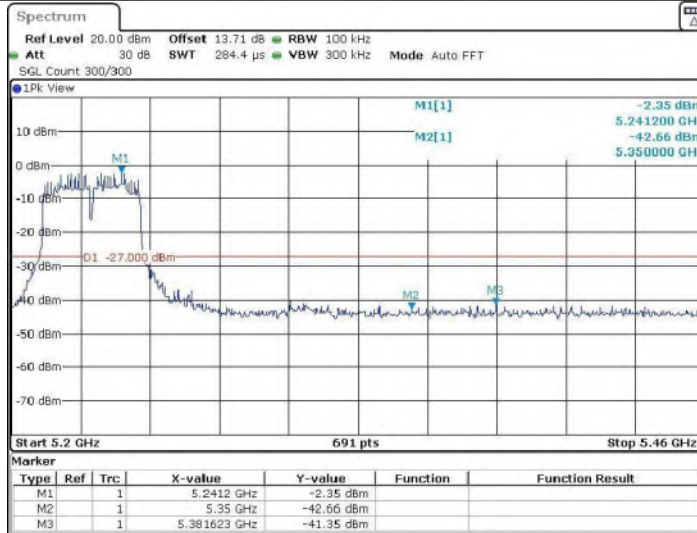


Date: 6 AUG.2022 11:05:30

11AC20SISO_Ant1_Low_5180

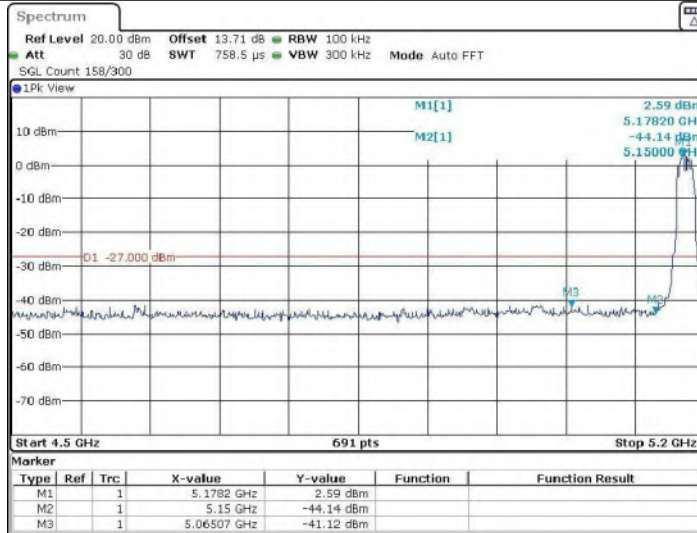


Date: 6 AUG.2022 11:28:30

11AC20SISO_Ant1_High_5240

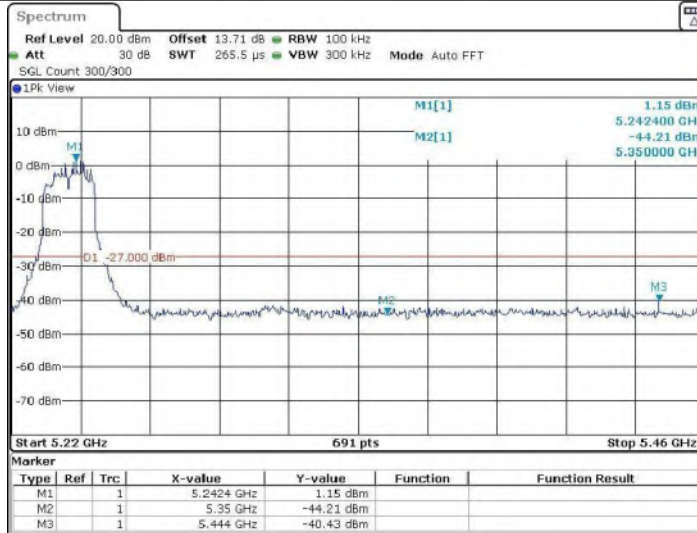


Date: 6 AUG.2022 11:30:05

11AC40SISO_Ant1_Low_5190

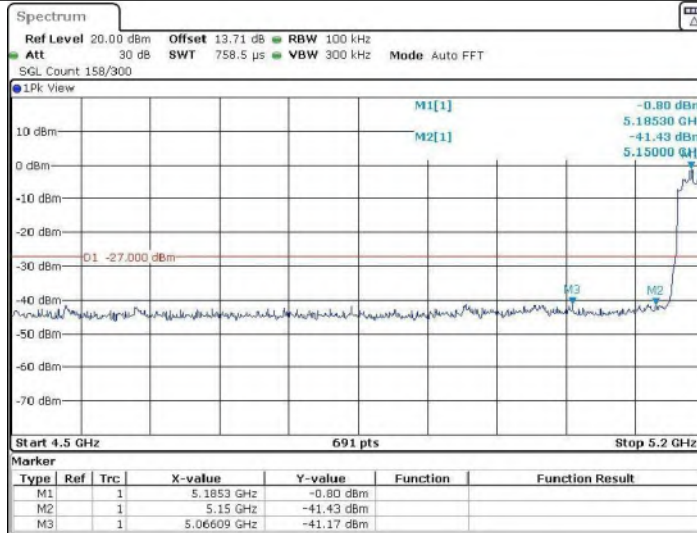


Date: 6 AUG.2022 12:01:48

11AC40SISO_Ant1_High_5230

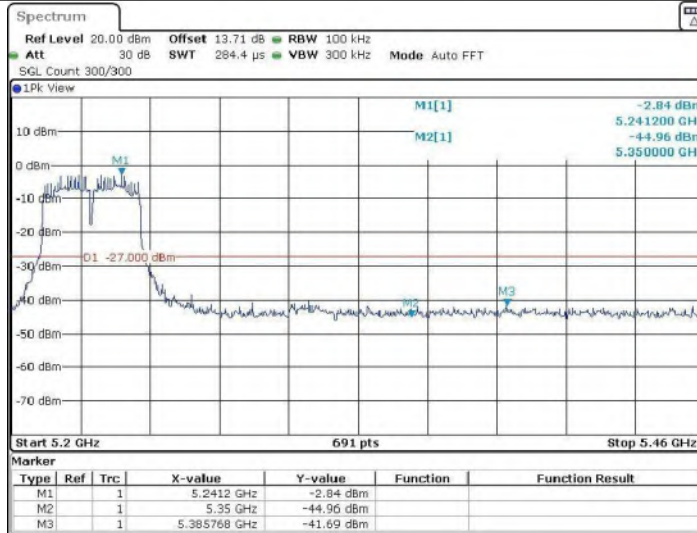


Date: 6 AUG.2022 12:07:15

11AC80SISO_Ant1_Low_5210

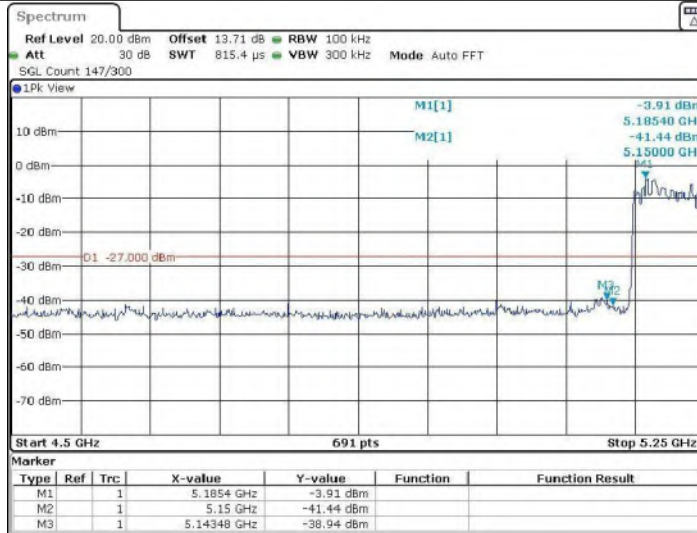

Date: 6 AUG.2022 12:26:10

11AC80SISO_Ant1_High_5210

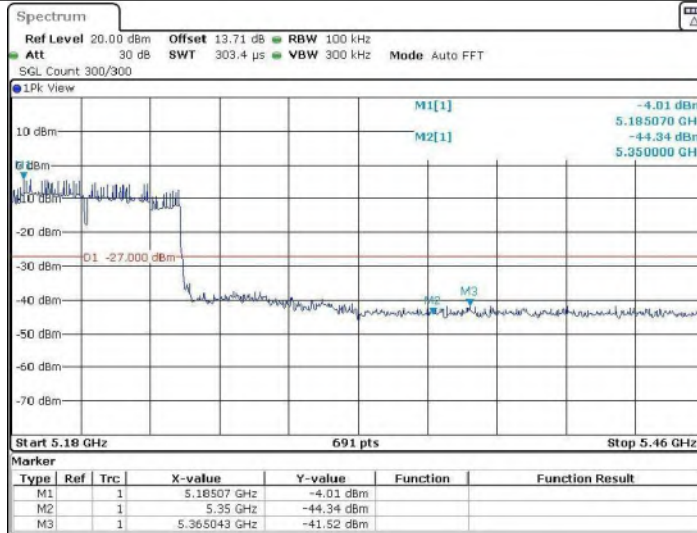


Date: 6 AUG.2022 12:26:24

11A_Ant1_Low_5745




Date: 6 AUG.2022 10:07:56

11A_Ant1_High_5825

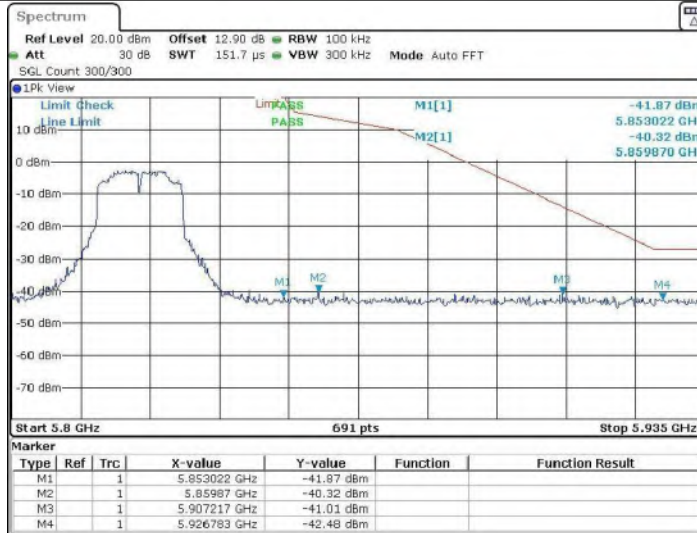


Date: 6 AUG.2022 10:20:43

11N20SISO_Ant1_Low_5745

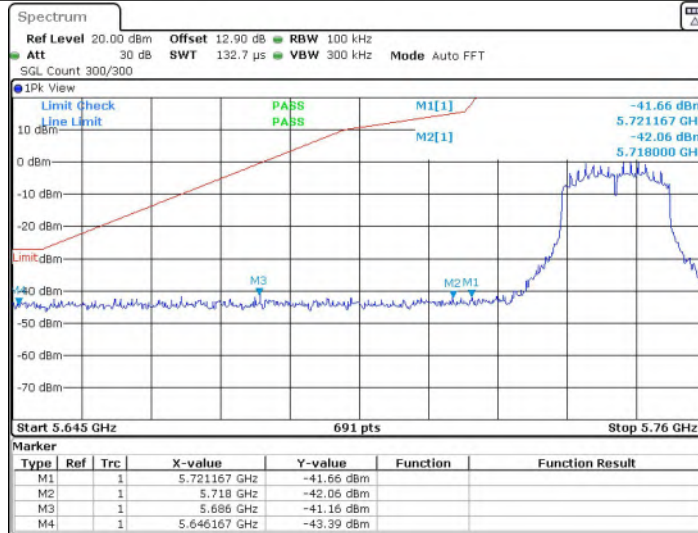

Date: 6 AUG.2022 10:43:07

11N20SISO_Ant1_High_5825

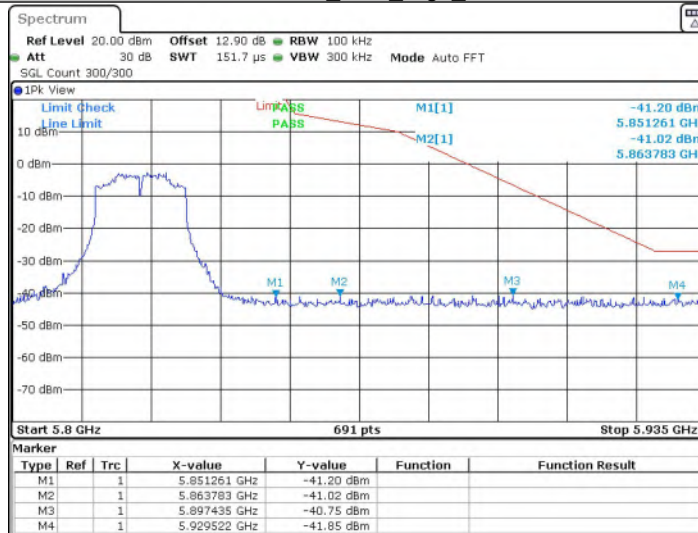


Date: 6 AUG.2022 10:53:54

11N40SISO_Ant1_Low_5755




Date: 6 AUG.2022 11:15:12

11N40SISO_Ant1_High_5795

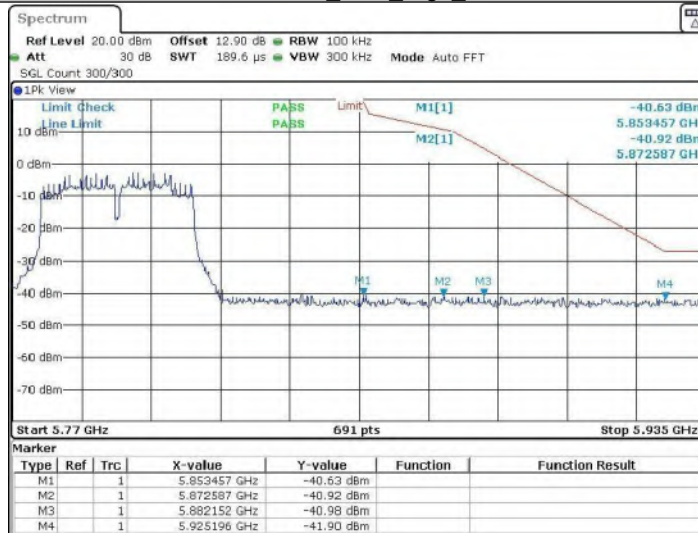


Date: 6 AUG.2022 11:22:19

11AC20SISO_Ant1_Low_5745

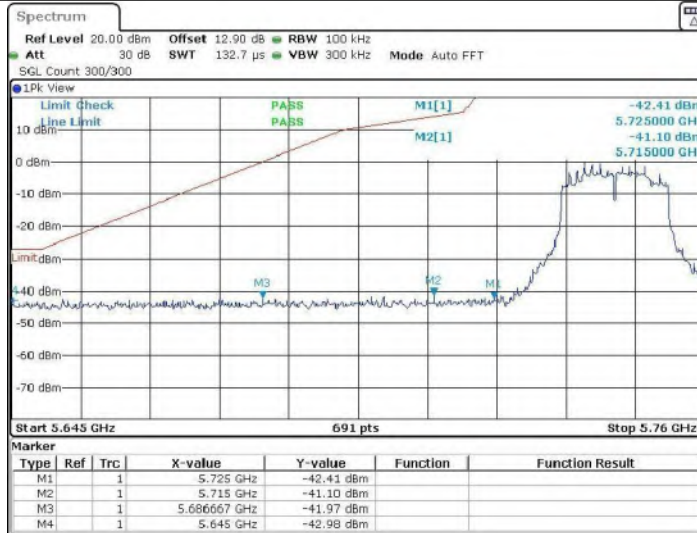

Date: 6 AUG.2022 11:44:56

11AC20SISO_Ant1_High_5825

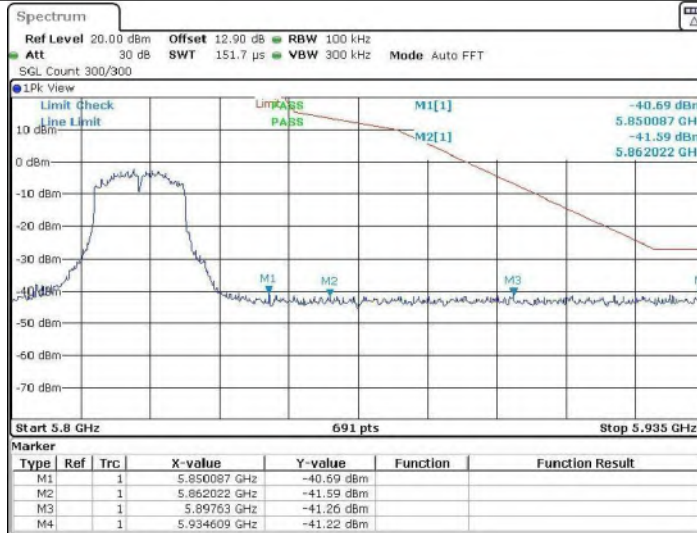


Date: 6 AUG.2022 11:56:25

11AC40SISO_Ant1_Low_5755




Date: 6 AUG.2022 12:14:58

11AC40SISO_Ant1_High_5795

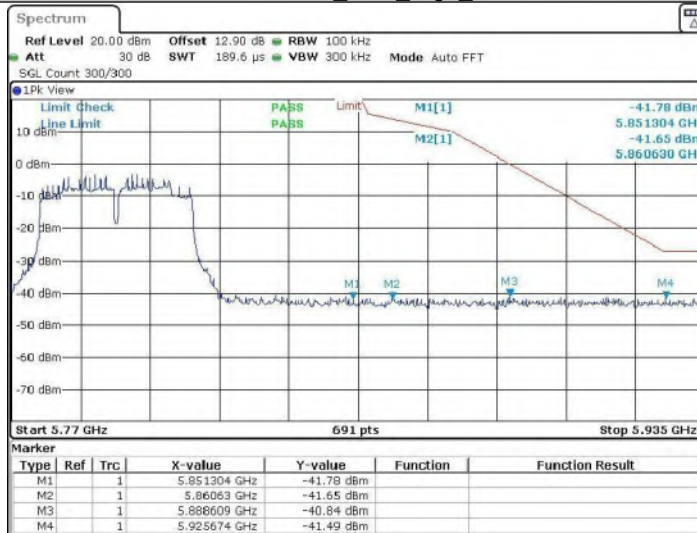


Date: 6 AUG.2022 12:20:46

11AC80SISO_Ant1_Low_5775

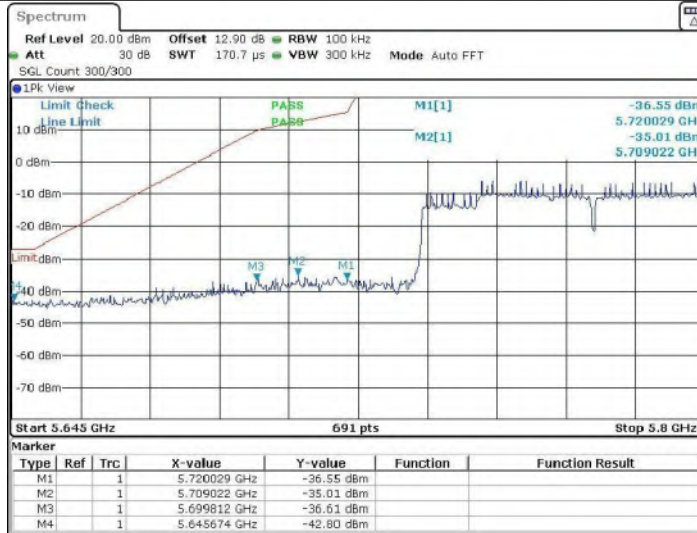


Date: 6 AUG.2022 12:33:20

11AC80SISO_Ant1_High_5775

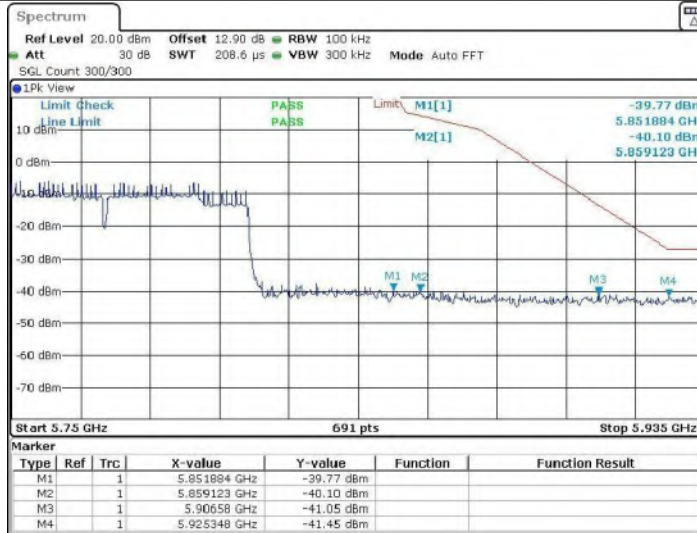


Date: 6 AUG.2022 12:33:37

Ant2

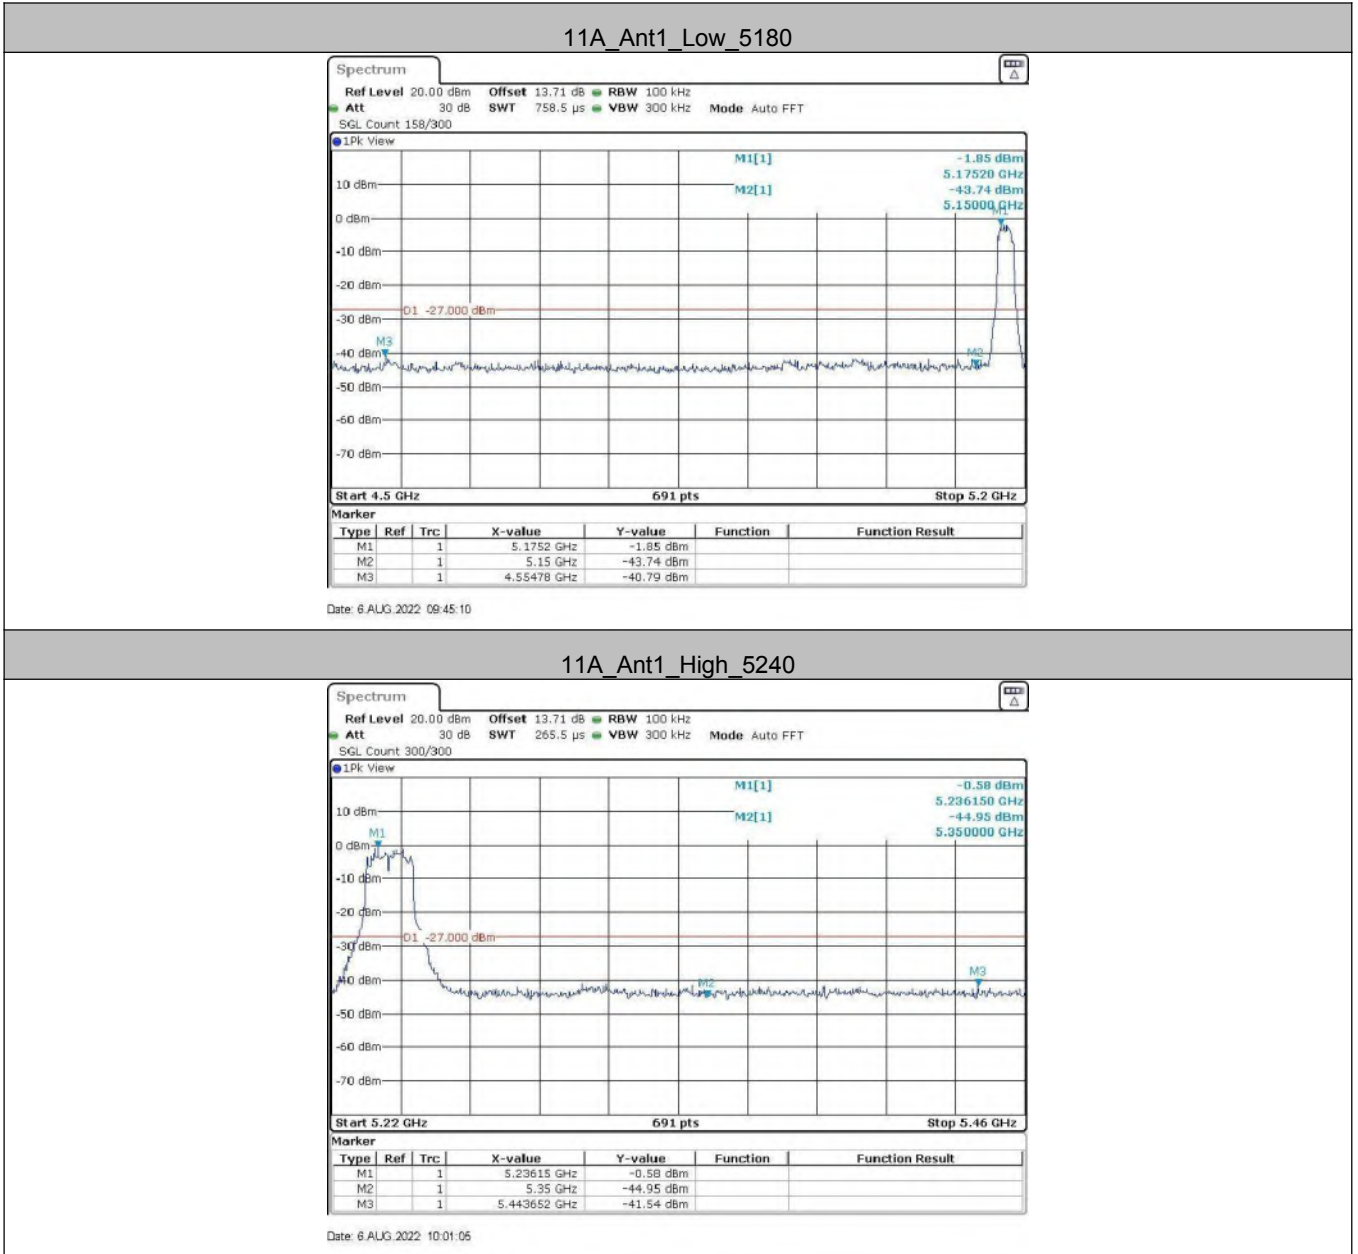


11A_Ant1_High_5240

11N20SISO_Ant1_Low_5180

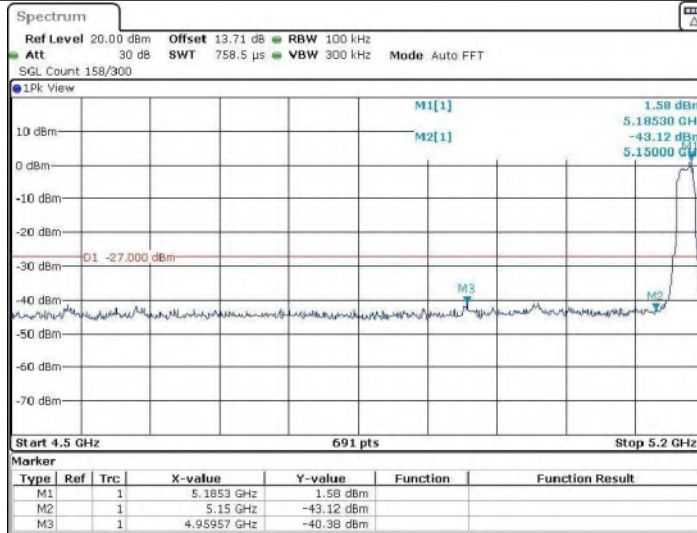


Date: 6 AUG.2022 10:26:41

11N20SISO_Ant1_High_5240

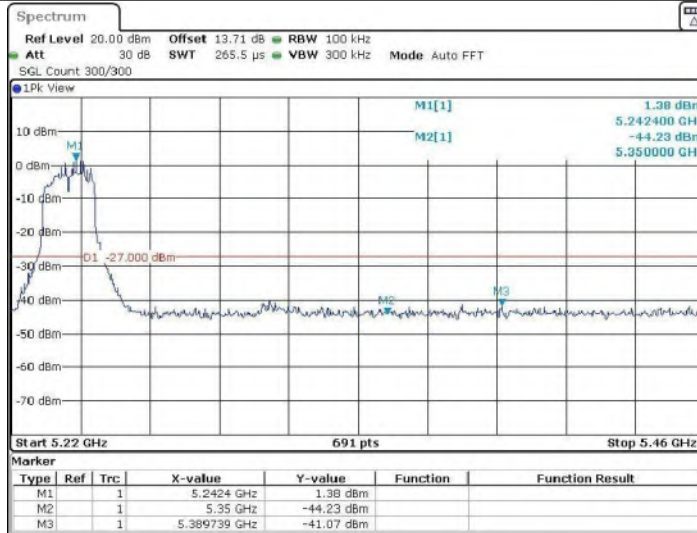


Date: 6 AUG.2022 10:26:55

11N40SISO_Ant1_Low_5190

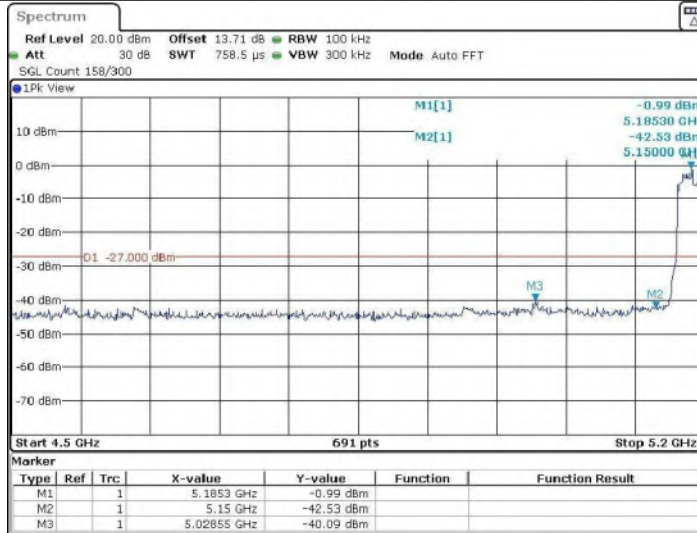


Date: 6 AUG.2022 10:59:51

11N40SISO_Ant1_High_5230

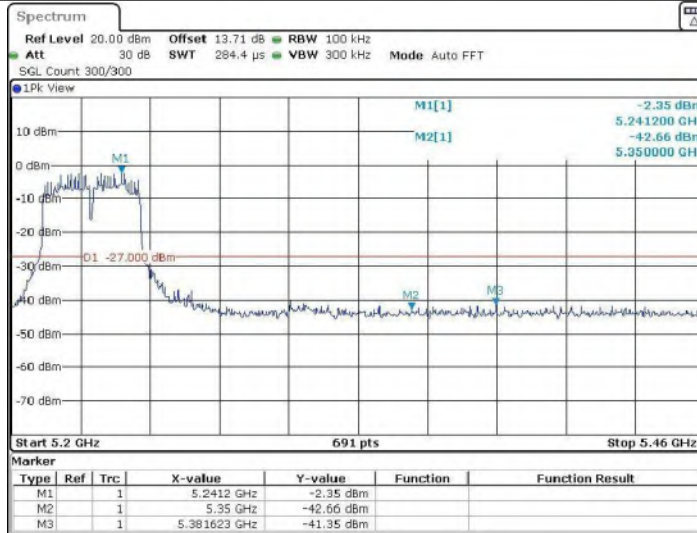


Date: 6 AUG.2022 11:05:30

11AC20SISO_Ant1_Low_5180

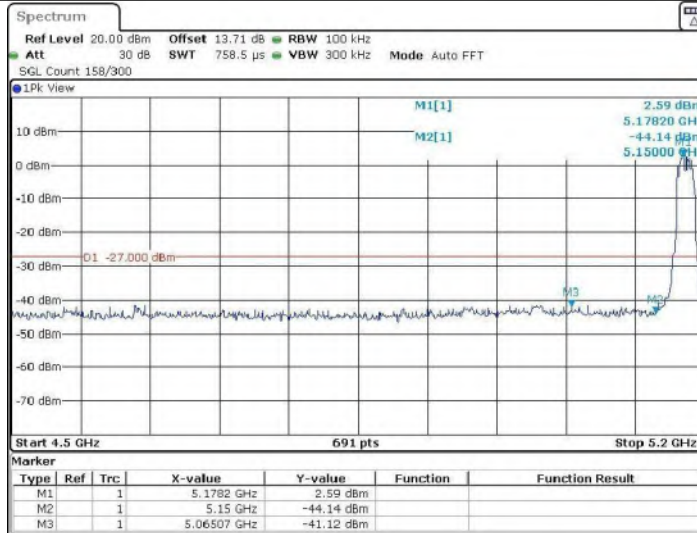


Date: 6 AUG.2022 11:28:30

11AC20SISO_Ant1_High_5240

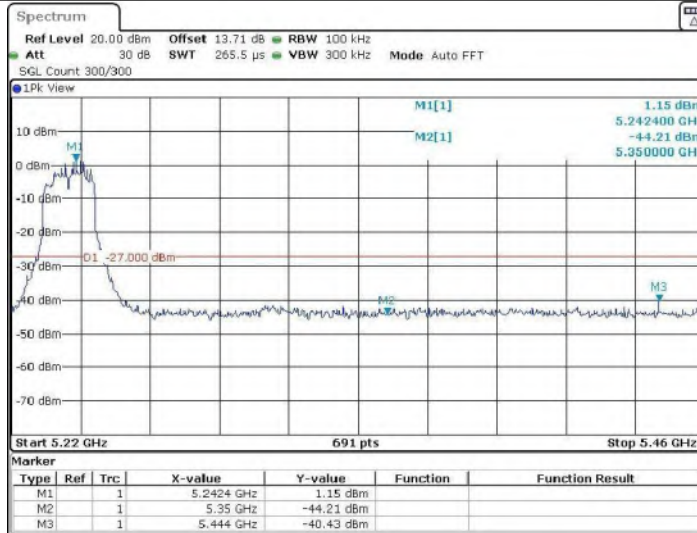


Date: 6 AUG.2022 11:30:05

11AC40SISO_Ant1_Low_5190

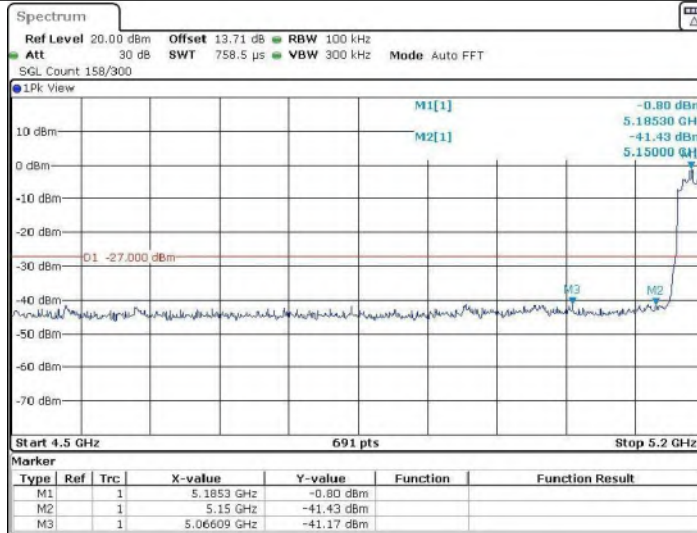


Date: 6 AUG.2022 12:01:48

11AC40SISO_Ant1_High_5230

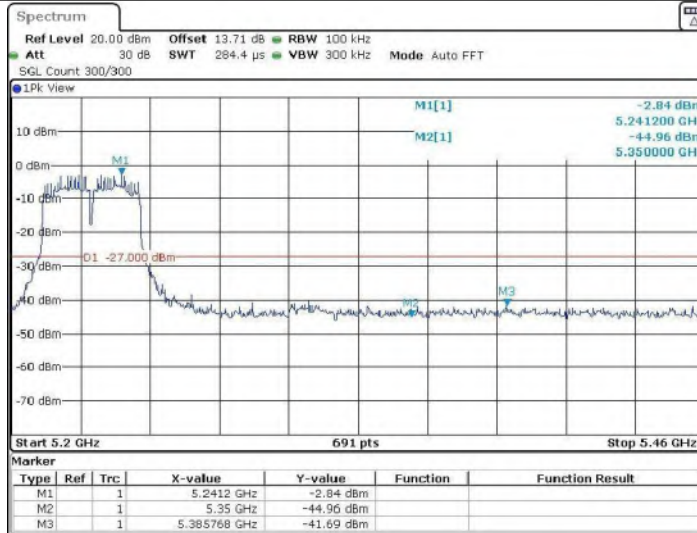


Date: 6 AUG.2022 12:07:15

11AC80SISO_Ant1_Low_5210

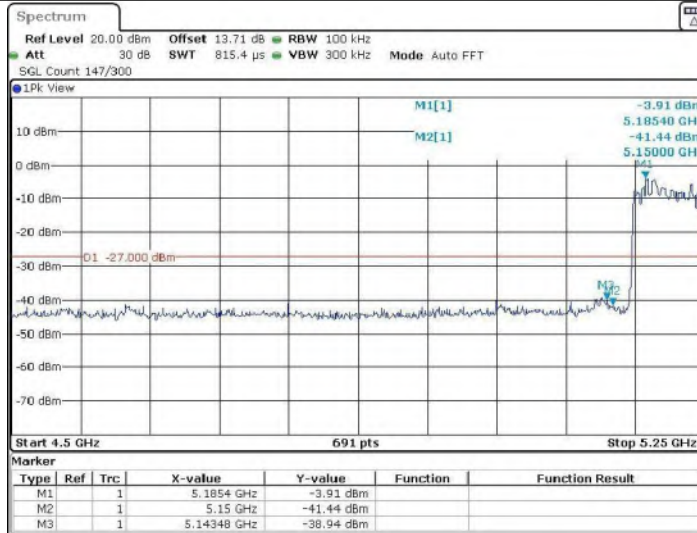

Date: 6 AUG.2022 12:26:10

11AC80SISO_Ant1_High_5210

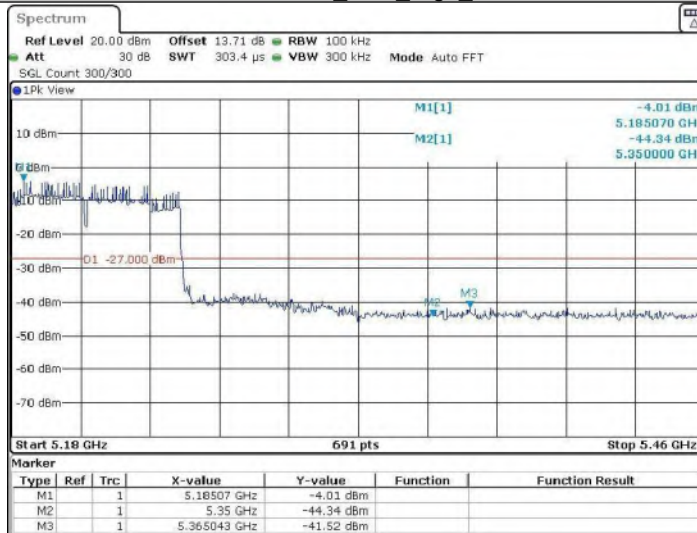


Date: 6 AUG.2022 12:26:24

11A_Ant1_Low_5745




Date: 6 AUG.2022 10:07:56

11A_Ant1_High_5825

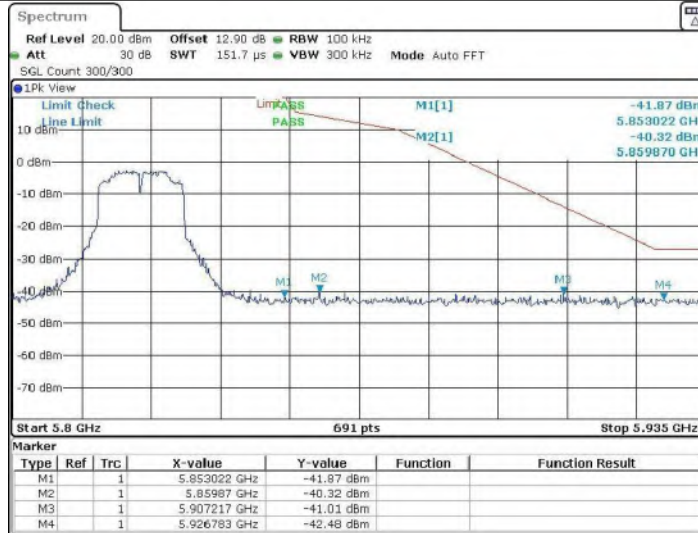


Date: 6 AUG.2022 10:20:43

11N20SISO_Ant1_Low_5745

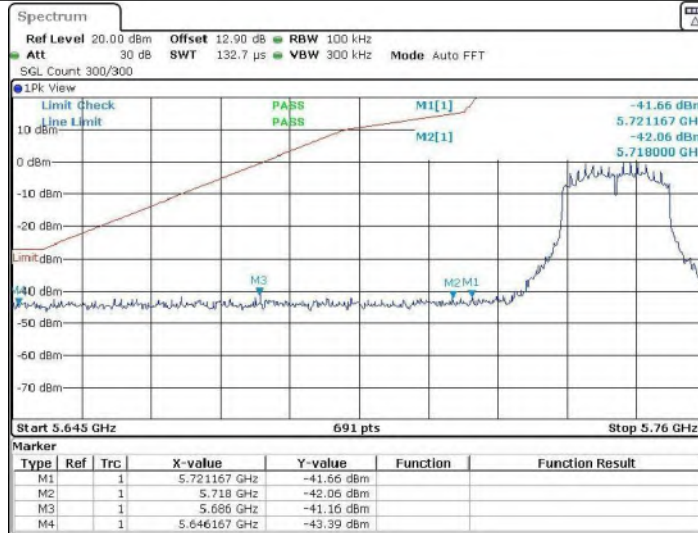

Date: 6 AUG.2022 10:43:07

11N20SISO_Ant1_High_5825

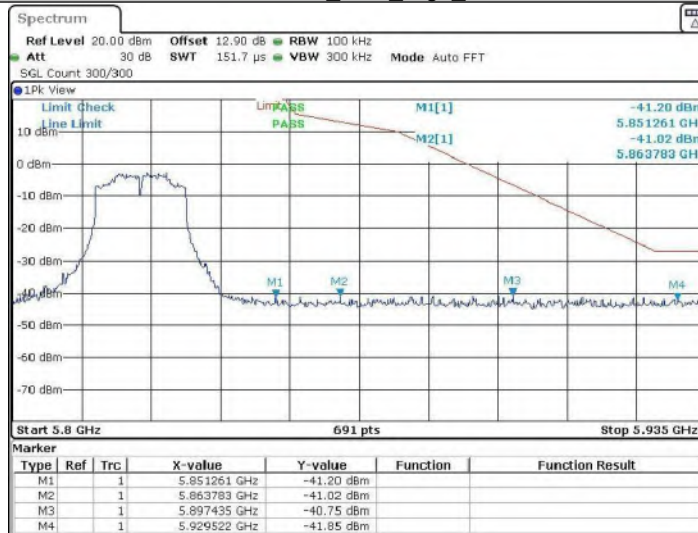


Date: 6 AUG.2022 10:53:54

11N40SISO_Ant1_Low_5755




Date: 6 AUG.2022 11:15:12

11N40SISO_Ant1_High_5795

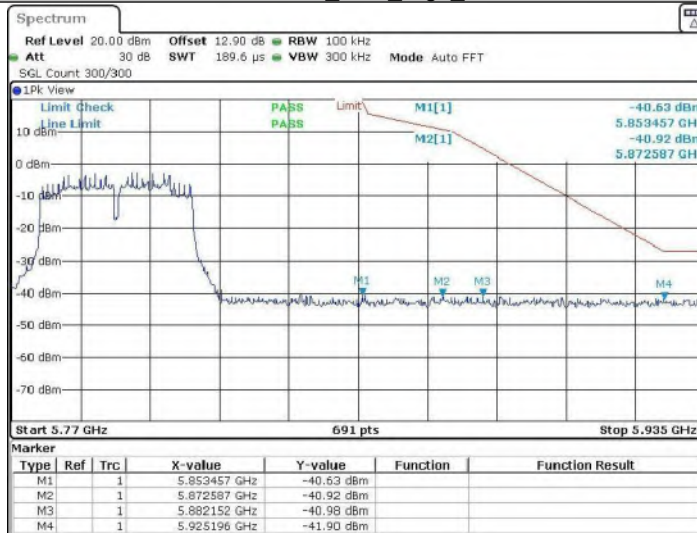


Date: 6 AUG.2022 11:22:19

11AC20SISO_Ant1_Low_5745

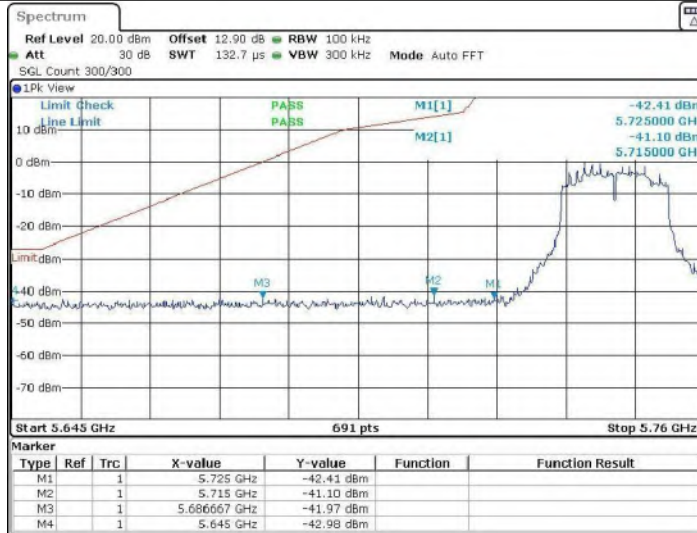

Date: 6 AUG.2022 11:44:56

11AC20SISO_Ant1_High_5825

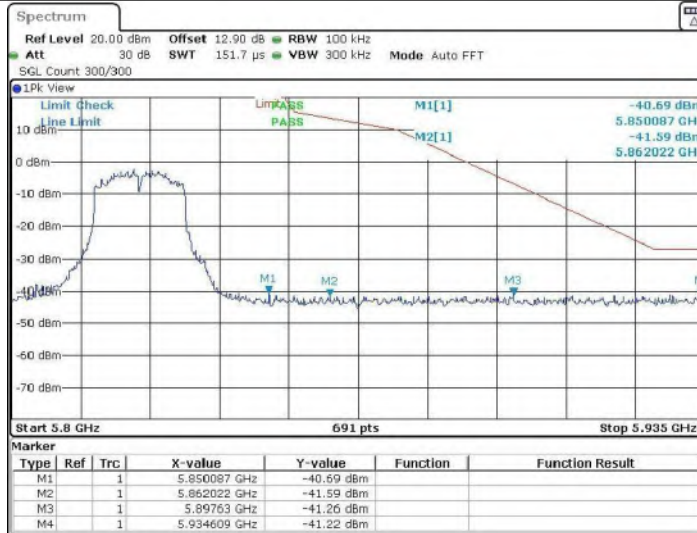


Date: 6 AUG.2022 11:56:25

11AC40SISO_Ant1_Low_5755




Date: 6 AUG.2022 12:14:58

11AC40SISO_Ant1_High_5795

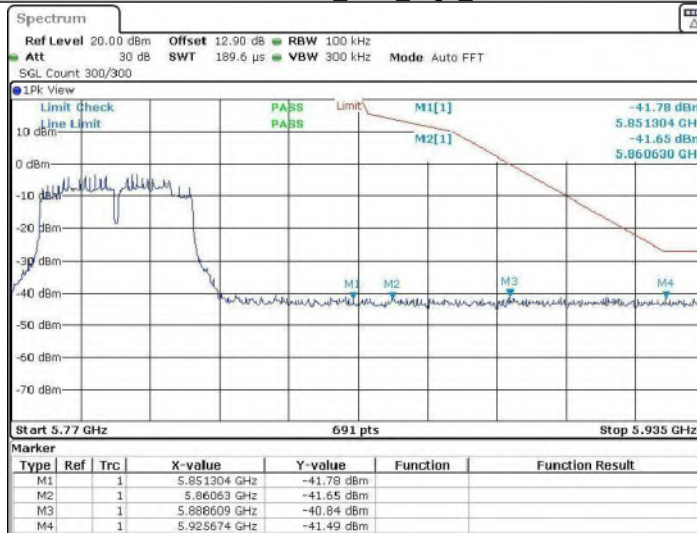

Date: 6 AUG.2022 12:20:46

11AC80SISO_Ant1_Low_5775

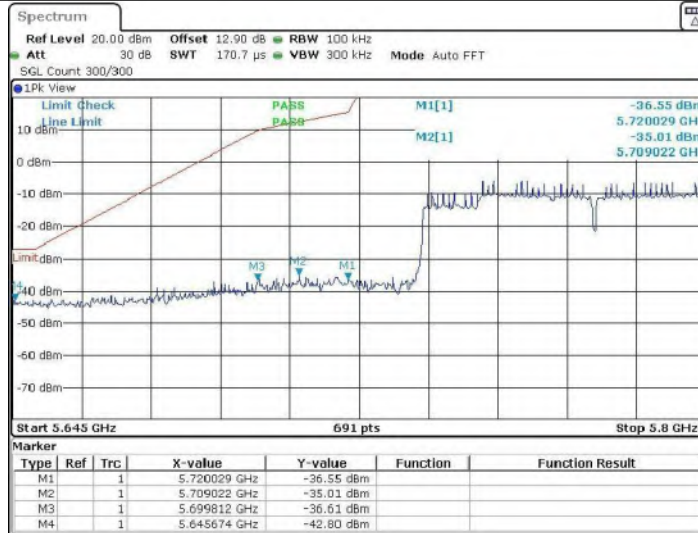

Date: 6 AUG.2022 12:33:20

11AC80SISO_Ant1_High_5775



Date: 6 AUG.2022 12:33:37


Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Setup Diagram

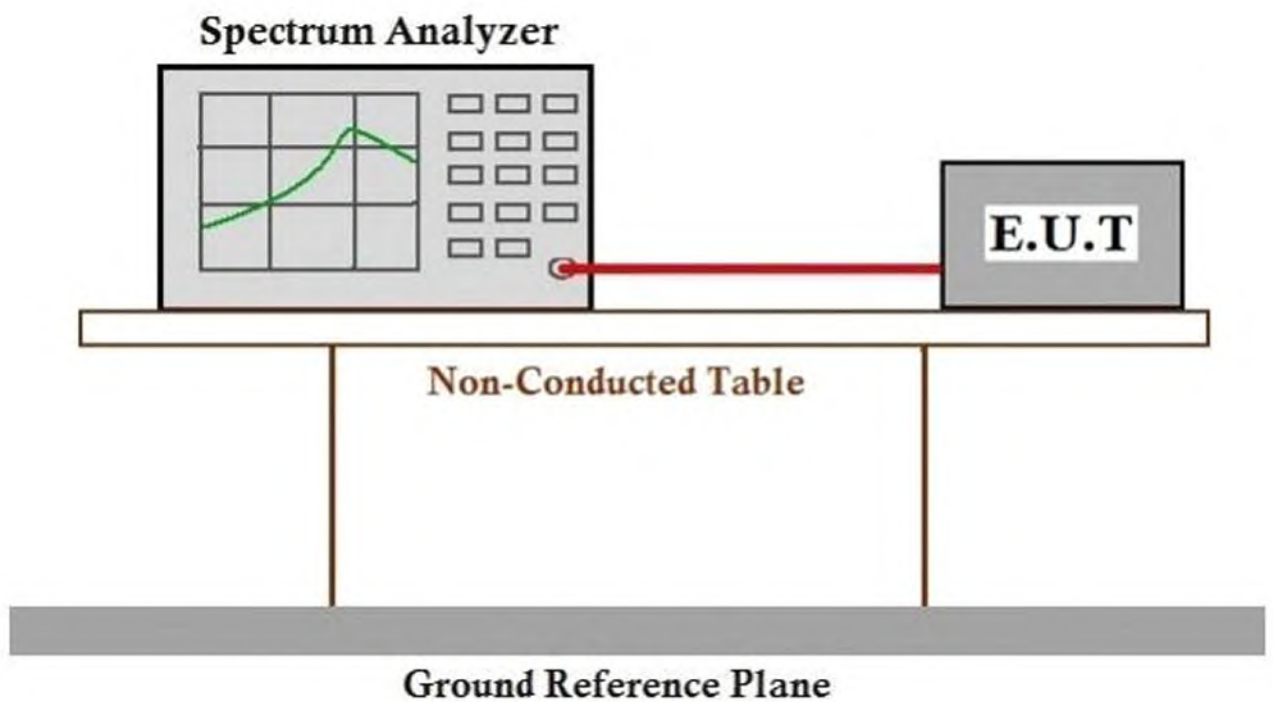

Measurement Data

Ant1

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp	Voltage	Measured Frequency	Frequency Drift
(°C)		(MHz)	(ppm)
50	VN	5240.04	7.634
40		5240.09	17.176
30		5240.01	1.908
20		5240.08	15.267
10		5240.05	9.542
0		5240.06	11.450
-10		5240.03	5.725
-20		5240.04	7.634

Frequency Stability Versus Temp.			
Operating Frequency: 5210 MHz			
Temp.	Voltage	Measured Frequency	Frequency Drift
		(MHz)	(ppm)
TN	VL	5210.05	9.597
	VN	5210.02	3.839
	VH	5210.01	1.919

Ant2

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp	Voltage	Measured Frequency	Frequency Drift
(°C)		(MHz)	(ppm)
50	VN	5240.05	9.542
40		5240.06	11.450
30		5240.06	11.450
20		5240.03	5.725
10		5240.04	7.634
0		5240.07	13.359
-10		5240.05	9.542
-20		5240.01	1.908

Frequency Stability Versus Temp.			
Operating Frequency: 5210 MHz			
Temp.	Voltage	Measured Frequency	Frequency Drift
		(MHz)	(ppm)
TN	VL	5210.02	3.839
	VN	5210.05	9.597
	VH	5210.09	17.274


Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

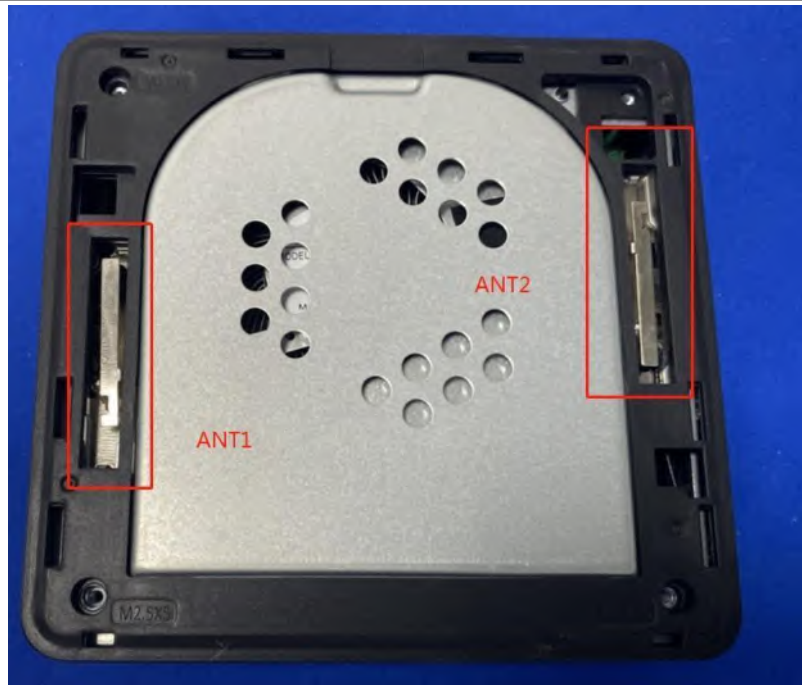

The antenna is Metal antenna.4.46dBi@5GHz: Wi-Fi: ant 1, 3.04dBi@5GHz: Wi-Fi: ant 2

Appendix G): Operation in the absence of information to the transmit

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix H): AC Power Line Conducted Emission


<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="497 1037 1366 1256"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

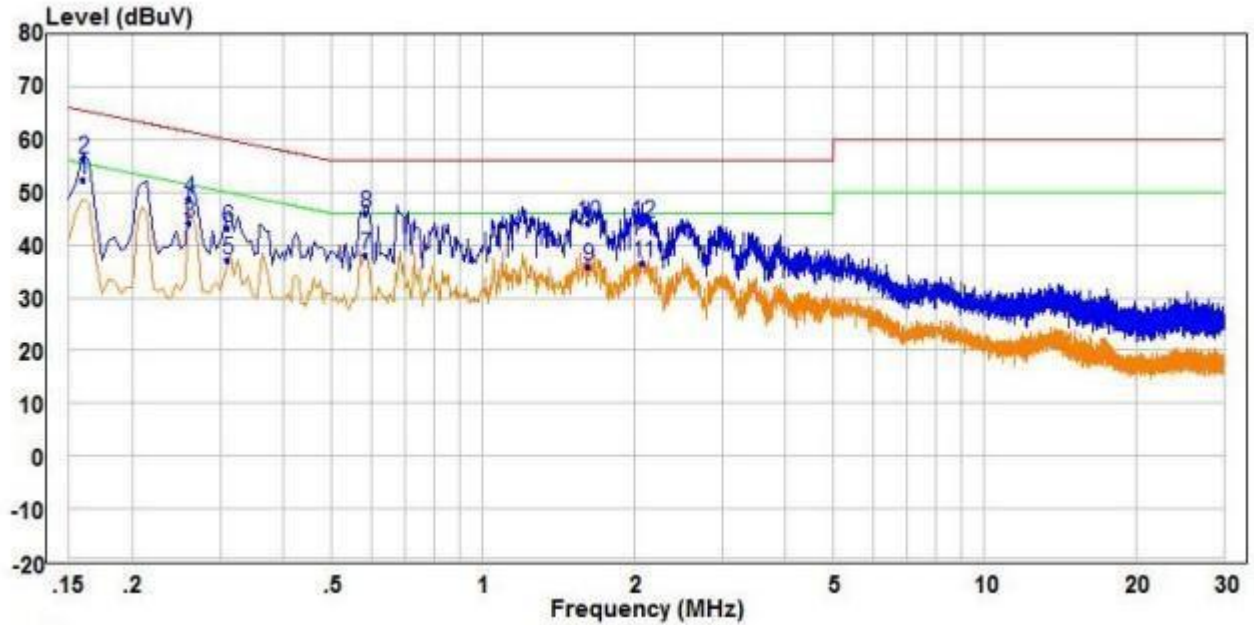

		Read		Limit	Over				
	Freq	Level	Factor	Line	Limit	Remark	Pol/Phase		
	MHz	dBuV	dB	dBuV	dB				
1	PP	0.160	42.67	9.68	52.35	55.46	-3.11	Average	Line
2	QP	0.160	46.59	9.68	56.27	65.46	-9.19	QP	Line
3		0.260	34.70	9.53	44.23	51.43	-7.20	Average	Line
4		0.260	39.03	9.53	48.56	61.43	-12.87	QP	Line
5		0.310	27.50	9.50	37.00	49.97	-12.97	Average	Line
6		0.310	33.59	9.50	43.09	59.97	-16.88	QP	Line
7		0.585	28.40	9.79	38.19	46.00	-7.81	Average	Line
8		0.585	36.32	9.79	46.11	56.00	-9.89	QP	Line
9		1.625	24.80	11.06	35.86	46.00	-10.14	Average	Line
10		1.625	33.09	11.06	44.15	56.00	-11.85	QP	Line
11		2.085	24.91	11.56	36.47	46.00	-9.53	Average	Line
12		2.085	32.45	11.56	44.01	56.00	-11.99	QP	Line

Neutral line:

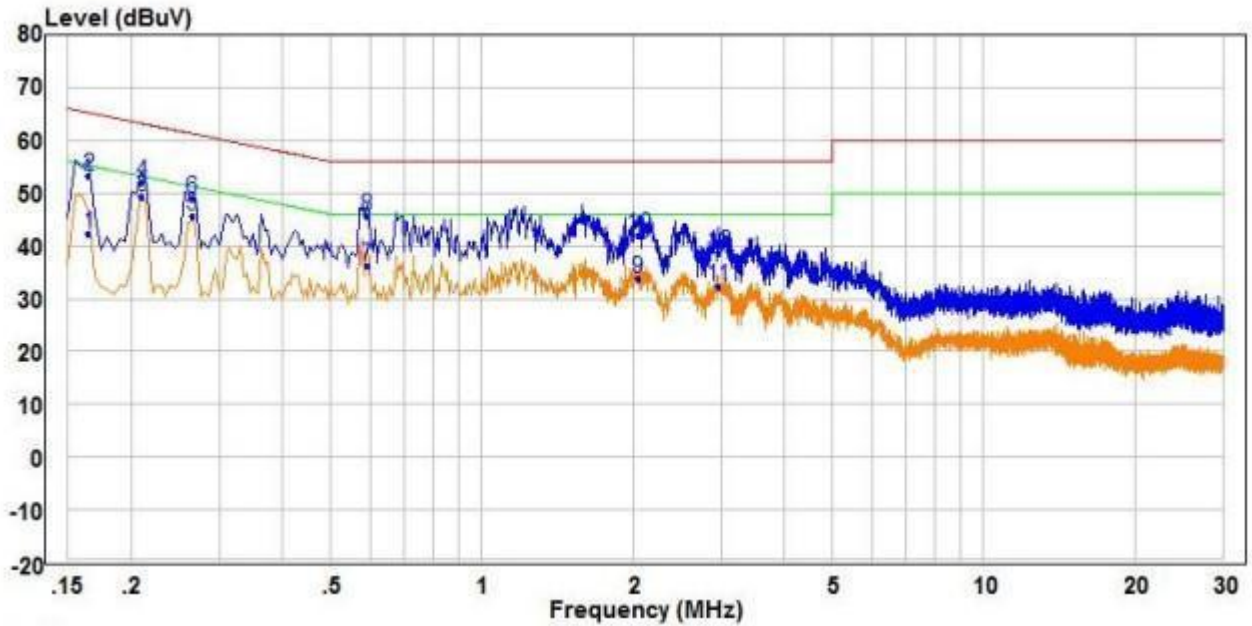

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.165	32.71	9.67	42.38	55.21	-12.83	Average	Neutral
2	0.165	43.57	9.67	53.24	65.21	-11.97	QP	Neutral
3 PP	0.210	39.78	9.59	49.37	53.21	-3.84	Average	Neutral
4	0.210	42.38	9.59	51.97	63.21	-11.24	QP	Neutral
5	0.265	36.07	9.52	45.59	51.27	-5.68	Average	Neutral
6	0.265	39.43	9.52	48.95	61.27	-12.32	QP	Neutral
7	0.590	26.46	9.79	36.25	46.00	-9.75	Average	Neutral
8 QP	0.590	35.74	9.79	45.53	56.00	-10.47	QP	Neutral
9	2.045	24.14	9.75	33.89	46.00	-12.11	Average	Neutral
10	2.045	32.24	9.75	41.99	56.00	-14.01	QP	Neutral
11	2.960	22.52	9.77	32.29	46.00	-13.71	Average	Neutral
12	2.960	29.00	9.77	38.77	56.00	-17.23	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. The 6Mbps of rate of 802.11A_5240 is the worst case, only the worst data recorded in the report.

Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3cm)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3cm)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			

Test plot as follows:

Worse case mode:		802.11a(6Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.24	-9.2	49.04	74	-24.96	peak	H
5150	44.44	-9.2	35.24	54	-18.76	AVG	H
5150	58.59	-9.2	49.39	74	-24.61	peak	V
5150	44.86	-9.2	35.66	54	-18.34	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	60.09	-9.39	50.70	74	-23.30	peak	H
5350	46.47	-9.39	37.08	54	-16.92	AVG	H
5350	59.31	-9.39	49.92	74	-24.08	peak	V
5350	46.60	-9.39	37.21	54	-16.79	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	57.95	-9.29	48.66	74	-25.34	peak	H
5725	44.09	-9.29	34.80	54	-19.20	AV	H
5725	57.99	-9.29	48.70	74	-25.30	peak	V
5725	46.45	-9.29	37.16	54	-16.84	AV	V

Worse case mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	58.44	-9.2	49.24	74	-24.76	peak	H
5850	44.02	-9.2	34.82	54	-19.18	AV	H
5850	59.09	-9.2	49.89	74	-24.11	peak	V
5850	44.91	-9.2	35.71	54	-18.29	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	59.38	-9.39	49.99	74	-24.01	peak	H
5150	46.59	-9.39	37.20	54	-16.80	AVG	H
5150	59.26	-9.39	49.87	74	-24.13	peak	V
5150	46.38	-9.39	36.99	54	-17.01	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	57.69	-9.29	48.40	74	-25.60	peak	H
5350	44.45	-9.29	35.16	54	-18.84	AVG	H
5350	57.93	-9.29	48.64	74	-25.36	peak	V
5350	45.49	-9.29	36.20	54	-17.80	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	58.40	-9.2	49.20	74	-24.80	peak	H
5725	44.38	-9.2	35.18	54	-18.82	AV	H
5725	58.65	-9.2	49.45	74	-24.55	peak	V
5725	44.19	-9.2	34.99	54	-19.01	AV	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	59.85	-9.39	50.46	74	-23.54	peak	H
5850	46.20	-9.39	36.81	54	-17.19	AV	H
5850	60.16	-9.39	50.77	74	-23.23	peak	V
5850	46.94	-9.39	37.55	54	-16.45	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.43	-9.29	49.14	74	-24.86	peak	H
5150	44.19	-9.29	34.90	54	-19.10	AVG	H
5150	58.26	-9.29	48.97	74	-25.03	peak	V
5150	46.33	-9.29	37.04	54	-16.96	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	59.14	-9.2	49.94	74	-24.06	peak	H
5350	44.53	-9.2	35.33	54	-18.67	AVG	H
5350	58.49	-9.2	49.29	74	-24.71	peak	V
5350	44.65	-9.2	35.45	54	-18.55	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	59.82	-9.39	50.43	74	-23.57	peak	H
5725	46.96	-9.39	37.57	54	-16.43	AV	H
5725	59.42	-9.39	50.03	74	-23.97	peak	V
5725	46.72	-9.39	37.33	54	-16.67	AV	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	58.40	-9.29	49.11	74	-24.89	peak	H
5850	44.00	-9.29	34.71	54	-19.29	AV	H
5850	58.05	-9.29	48.76	74	-25.24	peak	V
5850	45.66	-9.29	36.37	54	-17.63	AV	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.83	-9.2	49.63	74	-24.37	peak	H
5150	44.44	-9.2	35.24	54	-18.76	AVG	H
5150	59.22	-9.2	50.02	74	-23.98	peak	V
5150	44.26	-9.2	35.06	54	-18.94	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	59.95	-9.39	50.56	74	-23.44	peak	H
5350	46.12	-9.39	36.73	54	-17.27	AVG	H
5350	59.99	-9.39	50.60	74	-23.40	peak	V
5350	46.73	-9.39	37.34	54	-16.66	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	57.71	-9.29	48.42	74	-25.58	peak	H
5725	44.16	-9.29	34.87	54	-19.13	AV	H
5725	57.77	-9.29	48.48	74	-25.52	peak	V
5725	45.47	-9.29	36.18	54	-17.82	AV	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	57.94	-9.29	48.65	74	-25.35	peak	H
5850	44.07	-9.29	34.78	54	-19.22	AV	H
5850	57.68	-9.29	48.39	74	-25.61	peak	V
5850	45.77	-9.29	36.48	54	-17.52	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	58.72	-9.2	49.52	74	-24.48	peak	H
5150	44.46	-9.2	35.26	54	-18.74	AVG	H
5150	58.65	-9.2	49.45	74	-24.55	peak	V
5150	44.35	-9.2	35.15	54	-18.85	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	60.08	-9.39	50.69	74	-23.31	peak	H
5350	46.66	-9.39	37.27	54	-16.73	AVG	H
5350	59.57	-9.39	50.18	74	-23.82	peak	V
5350	46.75	-9.39	37.36	54	-16.64	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		151	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	57.63	-9.29	48.34	74	-25.66	peak	H
5725	43.54	-9.29	34.25	54	-19.75	AV	H
5725	57.63	-9.29	48.34	74	-25.66	peak	V
5725	46.11	-9.29	36.82	54	-17.18	AV	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		159	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5850	59.16	-9.2	49.96	74	-24.04	peak	H
5850	43.99	-9.2	34.79	54	-19.21	AV	H
5850	58.59	-9.2	49.39	74	-24.61	peak	V
5850	44.94	-9.2	35.74	54	-18.26	AV	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	57.60	-9.29	48.31	74	-25.69	peak	H
5150	44.03	-9.29	34.74	54	-19.26	AVG	H
5150	58.13	-9.29	48.84	74	-25.16	peak	V
5150	46.17	-9.29	36.88	54	-17.12	AVG	V
5350	59.72	-9.39	50.33	74	-23.67	peak	H
5350	46.55	-9.39	37.16	54	-16.84	AVG	H
5350	59.57	-9.39	50.18	74	-23.82	peak	V
5350	46.81	-9.39	37.42	54	-16.58	AVG	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		155	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5725	58.42	-9.2	49.22	74	-24.78	peak	H
5725	44.47	-9.2	35.27	54	-18.73	AV	H
5725	58.80	-9.2	49.60	74	-24.40	peak	V
5725	44.52	-9.2	35.32	54	-18.68	AV	V
5850	60.09	-9.39	50.70	74	-23.30	peak	H
5850	46.69	-9.39	37.30	54	-16.70	AV	H
5850	60.21	-9.39	50.82	74	-23.18	peak	V
5850	46.50	-9.39	37.11	54	-16.89	AV	V

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) Test the EUT in the lowest channel ,the middle channel ,the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result:	PASS				


Test Data:
Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting (802.11a 36CH)	Vertical

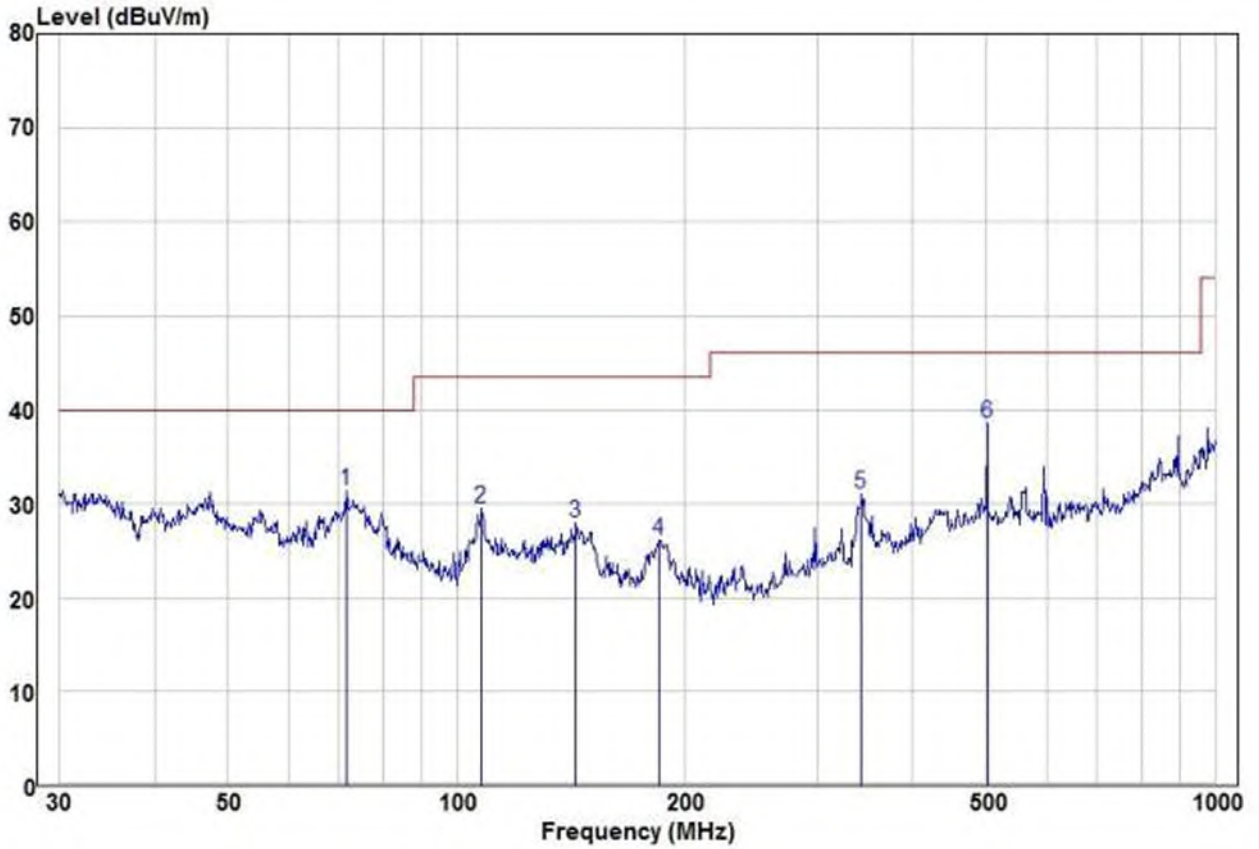


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	71.58	23.07	8.41	31.48	40.00	-8.52	Peak	VERTICAL
2	107.89	19.31	10.28	29.59	43.50	-13.91	Peak	VERTICAL
3	143.83	19.71	8.21	27.92	43.50	-15.58	Peak	VERTICAL
4	185.14	18.03	8.14	26.17	43.50	-17.33	Peak	VERTICAL
5	341.98	16.26	14.76	31.02	46.00	-14.98	Peak	VERTICAL
6 pp	501.18	20.34	18.29	38.63	46.00	-7.37	Peak	VERTICAL

Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

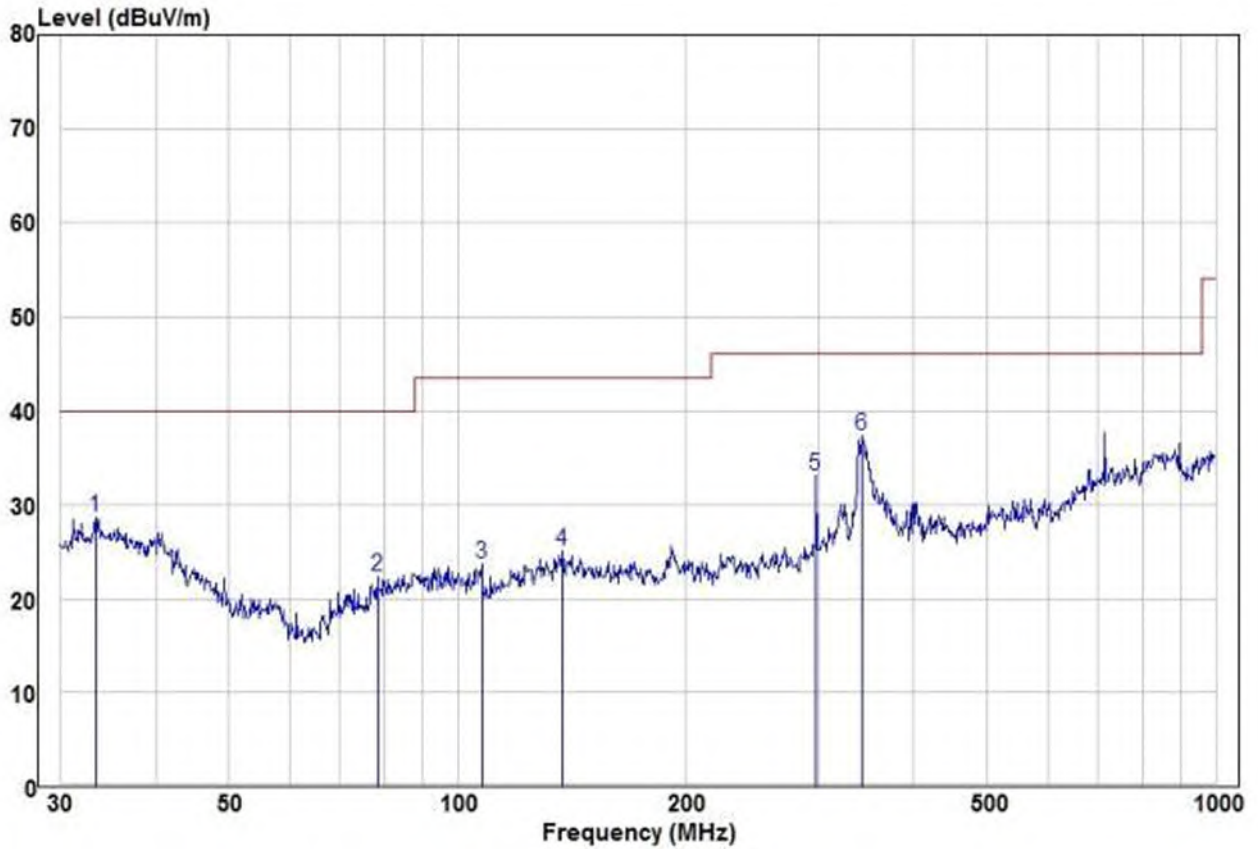


	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	33.33	13.54	15.04	28.58	40.00	-11.42	Peak	HORIZONTAL
2	78.41	12.86	9.53	22.39	40.00	-17.61	Peak	HORIZONTAL
3	107.51	13.42	10.29	23.71	43.50	-19.79	Peak	HORIZONTAL
4	137.42	16.37	8.63	25.00	43.50	-18.50	Peak	HORIZONTAL
5	297.22	19.49	13.63	33.12	46.00	-12.88	Peak	HORIZONTAL
6 pp	340.78	22.63	14.73	37.36	46.00	-8.64	Peak	HORIZONTAL

30MHz~1GHz		
Test mode:	Transmitting (802.11a 149CH)	Vertical

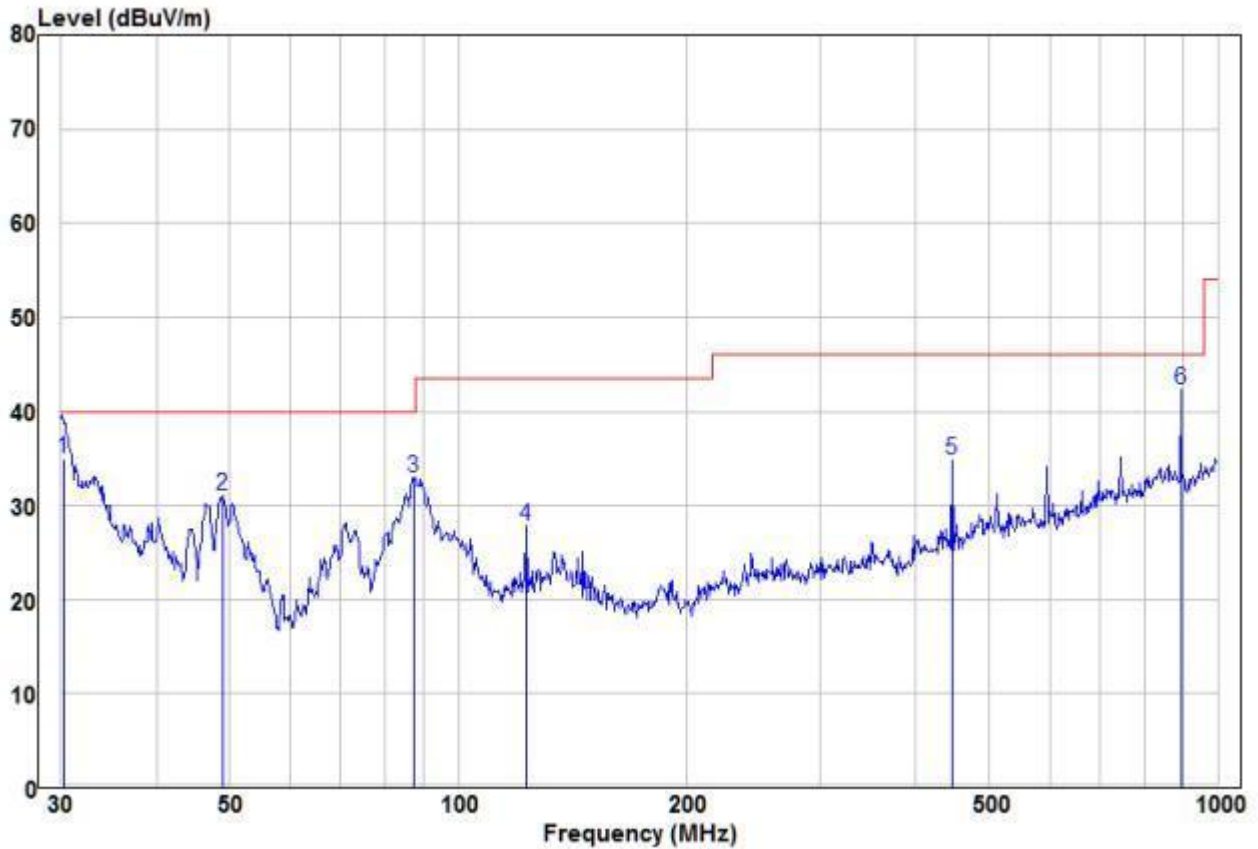

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 qp	30.21	19.20	15.85	35.05	40.00	-4.95	QP	VERTICAL
2	48.84	22.39	8.63	31.02	40.00	-8.98	Peak	VERTICAL
3	87.42	22.97	9.96	32.93	40.00	-7.07	Peak	VERTICAL
4	122.83	17.30	10.59	27.89	43.50	-15.61	Peak	VERTICAL
5	446.41	18.21	16.62	34.83	46.00	-11.17	Peak	VERTICAL
6 pp	893.86	18.36	23.87	42.23	46.00	-3.77	Peak	VERTICAL

Test mode:	Transmitting (802.11a 149CH)	Horizontal
------------	------------------------------	------------

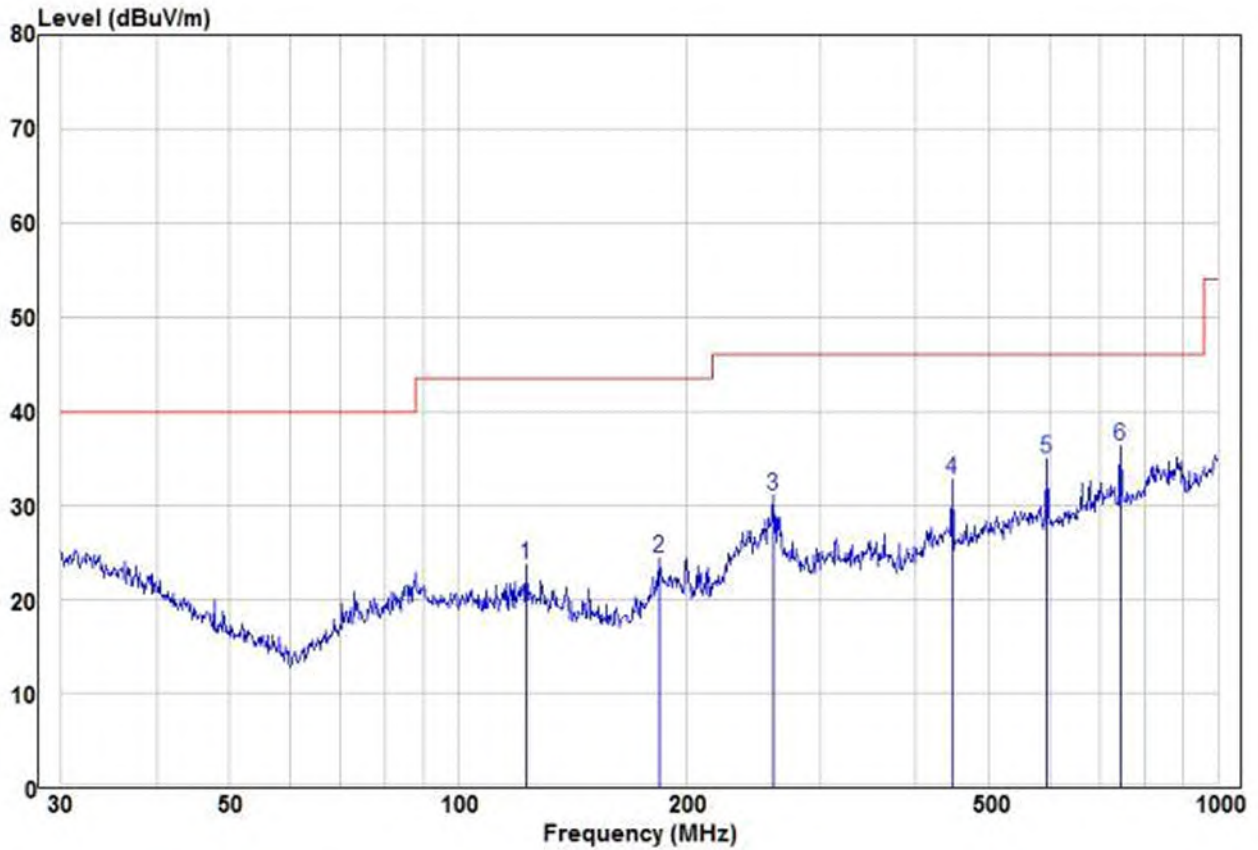

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	122.83	13.13	10.59	23.72	43.50	-19.78	Peak	HORIZONTAL
2	183.84	16.13	8.20	24.33	43.50	-19.17	Peak	HORIZONTAL
3	260.14	18.66	12.41	31.07	46.00	-14.93	Peak	HORIZONTAL
4	446.41	16.16	16.62	32.78	46.00	-13.22	Peak	HORIZONTAL
5	595.13	16.19	18.76	34.95	46.00	-11.05	Peak	HORIZONTAL
6 pp	744.87	14.44	21.88	36.32	46.00	-9.68	Peak	HORIZONTAL

Transmitter Emission above 1GHz

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	52.36	-4.26	48.10	74	-25.90	peak	H
10360	37.69	-4.26	33.43	54	-20.57	AVG	H
15540	51.06	1.18	52.24	74	-21.76	peak	H
15540	38.73	1.18	39.91	54	-14.09	AVG	H
10360	55.99	-4.26	51.73	74	-22.27	peak	V
10360	38.59	-4.26	34.33	54	-19.67	AVG	V
15540	50.74	1.18	51.92	74	-22.08	peak	V
15540	36.50	1.18	37.68	54	-16.32	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	53.11	-4.12	48.99	74	-25.01	peak	H
10480	37.85	-4.12	33.73	54	-20.27	AVG	H
15720	48.28	1.46	49.74	74	-24.26	peak	H
15720	35.67	1.46	37.13	54	-16.87	AVG	H
10480	53.68	-4.12	49.56	74	-24.44	peak	V
10480	37.85	-4.12	33.73	54	-20.27	AVG	V
15720	49.34	1.46	50.80	74	-23.20	peak	V
15720	35.35	1.46	36.81	54	-17.19	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		149	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11490	52.91	-4.03	48.88	74	-25.12	peak	H
11490	37.69	-4.03	33.66	54	-20.34	AVG	H
17235	50.63	1.66	52.29	74	-21.71	peak	H
17235	36.86	1.66	38.52	54	-15.48	AVG	H
11490	54.60	-4.03	50.57	74	-23.43	peak	V
11490	37.67	-4.03	33.64	54	-20.36	AVG	V
17235	50.58	1.66	52.24	74	-21.76	peak	V
17235	36.11	1.66	37.77	54	-16.23	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		165	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
11650	55.47	-4.28	51.19	74	-22.81	peak	H
11650	43.05	-4.28	38.77	54	-15.23	AVG	H
17475	52.73	1.13	53.86	74	-20.14	peak	H
17475	36.01	1.13	37.14	54	-16.86	AVG	H
11650	57.07	-4.28	52.79	74	-21.21	peak	V
11650	42.25	-4.28	37.97	54	-16.03	AVG	V
17475	51.16	1.13	52.29	74	-21.71	peak	V
17475	37.08	1.13	38.21	54	-15.79	AVG	V


Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


8 Photographs - EUT Test Setup

8.1 Radiated Emission

9KHz~30MHz:

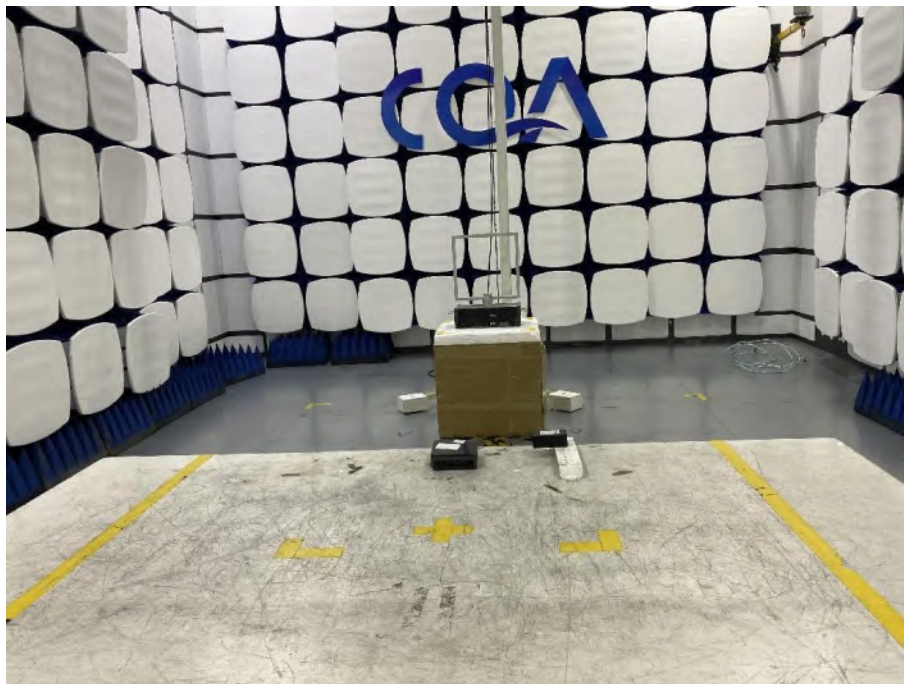

30MHz~1GHz:

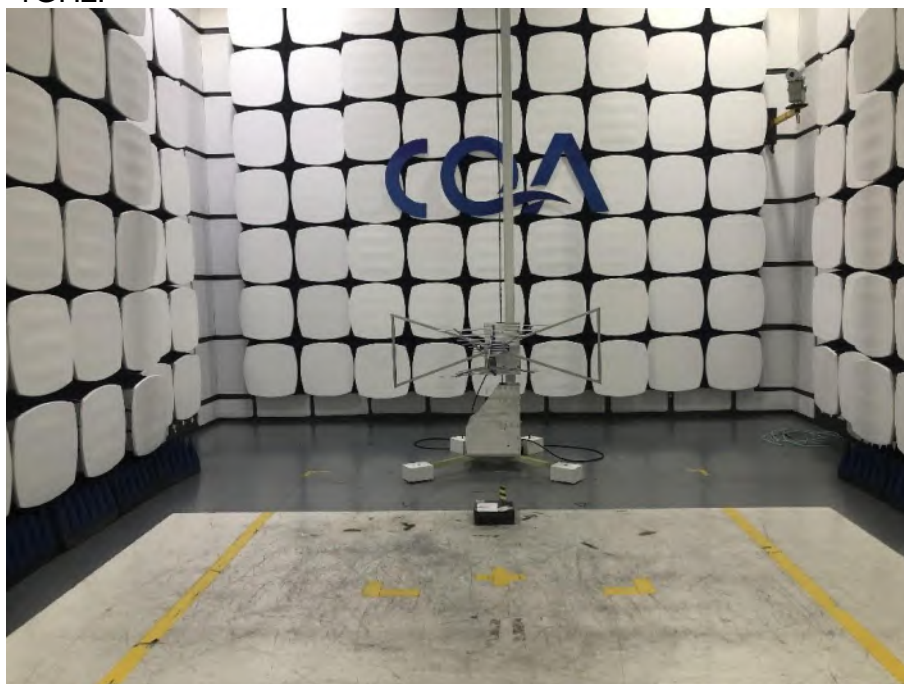

Above 1GHz:



8.2 Conducted Emission



9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20220701221E-01.

*** END OF REPORT ***