

FCC Test Report

Applicant : Revopoint 3D Technologies Inc

Address : Office 902, 9/F, Tinno Building, Tongfa South Rd, Xili Street, Nanshan District, Shenzhen, 518000, P.R.China.

Product Name : POP 3 3D Scanner

Report Date : Jun. 25, 2023

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	6
1.1. Client Information	6
1.2. Description of Device (EUT)	6
1.3. Auxiliary Equipment Used During Test	8
1.4. Description of Test Modes	8
1.5. Description Of Test Setup	9
1.6. Test Equipment List	10
1.7. Measurement Uncertainty	11
1.8. Description of Test Facility	11
2. Summary of Test Results	12
3. Conducted Emission Test	13
3.1. Test Standard and Limit	13
3.2. Test Setup	13
3.3. Test Procedure	13
3.4. Test Data	13
4. Radiation Spurious Emission and Band Edge	16
4.1. Test Standard and Limit	16
4.2. Test Setup	17
4.3. Test Procedure	18
4.4. Test Data	19
5. Maximum conducted output power Test	28
5.1. Test Standard and Limit	28
5.2. Test Setup	28
5.3. Test Procedure	28
5.4. Test Data	29
6. 26dB Bandwidth & 99% Occupied Bandwidth Test	30
6.1. Test Standard	30
6.2. Test Setup	30
6.3. Test Procedure	30
6.4. Test Data	30
7. Power Spectral Density Test	31
7.1. Test Standard and Limit	31
7.2. Test Setup	31
7.3. Test Procedure	31
7.4. Test Data	32
8. Frequency Stability	33
8.1. Test Standard and Limit	33
8.2. Test Setup	33
8.3. Test Procedure	33



8.4. Test Data	33
9. Antenna Requirement.....	40
9.1. Test Standard and Requirement.....	40
9.2. Antenna Connected Construction.....	40
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	41
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	41
APPENDIX III -- INTERNAL PHOTOGRAPH.....	41



TEST REPORT

Applicant : Revopoint 3D Technologies Inc
Manufacturer : Revopoint 3D Technologies Inc
Product Name : POP 3 3D Scanner
Model No. : POP 3, POP SE
Trade Mark : N/A
Rating(s) : Input: 5V $\overline{\text{---}}$ 1A

**Test Standard(s) : FCC Part15 Subpart E, Paragraph 15.407
ANSI C63.10: 2020**

**Test Method(s) : KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart E requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

May 09, 2023

Date of Test


May 09 ~ Jun. 09, 2023

Prepared By



(TuTu Hong)

Approved & Authorized Signer



(Kingkong Jin)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jun. 25, 2023



1. General Information

1.1. Client Information

Applicant	:	Revopoint 3D Technologies Inc
Address	:	Office 902, 9/F, Tinno Building, Tongfa South Rd, Xili Street, Nanshan District, Shenzhen, 518000, P.R.China.
Manufacturer	:	Revopoint 3D Technologies Inc
Address	:	Office 902, 9/F, Tinno Building, Tongfa South Rd, Xili Street, Nanshan District, Shenzhen, 518000, P.R.China.
Factory	:	Zhejiang Revopoint Optoelectronics Technology Co., Ltd
Address	:	2F, Building 7, No.1, Weizhong Road, Weitang Street, Jiashan County, Jiaxing city, Zhejiang Province, China

1.2. Description of Device (EUT)

Product Name	:	POP 3 3D Scanner
Model No.	:	POP 3, POP SE (Note: All samples are the same except the model number, so we prepare "POP 3" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	AC 120V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A

RF Specification

Operation Mode	:	<input checked="" type="checkbox"/> a <input checked="" type="checkbox"/> n(HT20) <input checked="" type="checkbox"/> n(HT40) <input checked="" type="checkbox"/> ac(VHT20) <input checked="" type="checkbox"/> ac(VHT40) <input checked="" type="checkbox"/> ac(VHT80) <input type="checkbox"/> ac(VHT160) <input checked="" type="checkbox"/> ax(HEW20) <input checked="" type="checkbox"/> ax(HEW40) <input checked="" type="checkbox"/> ax(HEW80) <input type="checkbox"/> ax(HEW160)
Device Type	:	<input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Point-to-point AP <input checked="" type="checkbox"/> Client
Operation Frequency	:	<input checked="" type="checkbox"/> Wi-Fi 5.2G: 5150~5250MHz <input type="checkbox"/> Wi-Fi 5.3G: 5250~5350MHz <input type="checkbox"/> Wi-Fi 5.6G: 5470~5725MHz <input type="checkbox"/> Wi-Fi 5.8G: 5725~5850MHz
Number of Channel	:	<input checked="" type="checkbox"/> 4 Channels for 20MHz bandwidth (5180-5240MHz) <input checked="" type="checkbox"/> 2 Channels for 40MHz bandwidth (5190-5230MHz) <input checked="" type="checkbox"/> 1 Channels for 80MHz bandwidth (5210MHz)



Modulation Type	: ☑ 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) ☑ 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM) ☑ 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) ☑ 802.11ax: OFDMA(BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Antenna Type	: FPC antenna
Antenna Gain(Peak)	: ANT 1: 2.39dBi (Provided by customer) ANT 2: 2.39dBi (Provided by customer)
Directional antenna gain	: 5.40 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) Only 802.11n(HT20), 802.11n(HT40), 802.11ac(VHT20), 802.11ac(VHT40), 802.11ac(VHT80), 802.11ax(HEW20), 802.11ax(HEW40), 802.11ax(HEW80) support MIMO.	



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Adapter	Model: MDY-11-EX Input: 100-240VAC,50-60Hz, 0.7A Output: 5V== 3A,9V== 3A,12V== 2.25A,20V== 1.35A,11V== 3A

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



Frequency Band	Mode	Test channel	Frequency (MHz)
5.2GHz	OFDM: 802.11a/n(HT20)/ac(VHT20) OFDMA: 802.11ax(HEW20)	CH 36	5180MHz
		CH 40	5200MHz
		CH 48	5240MHz
	OFDM: 802.11n(HT40)/ac(VHT40) OFDMA: 802.11ax(HEW40)	CH 38	5190MHz
		CH 46	5230MHz
		CH 42	5210MHz
OFDM: 802.11ac(VHT80) OFDMA: 802.11ax(HEW80)			

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode.



1.5. Description Of Test Setup

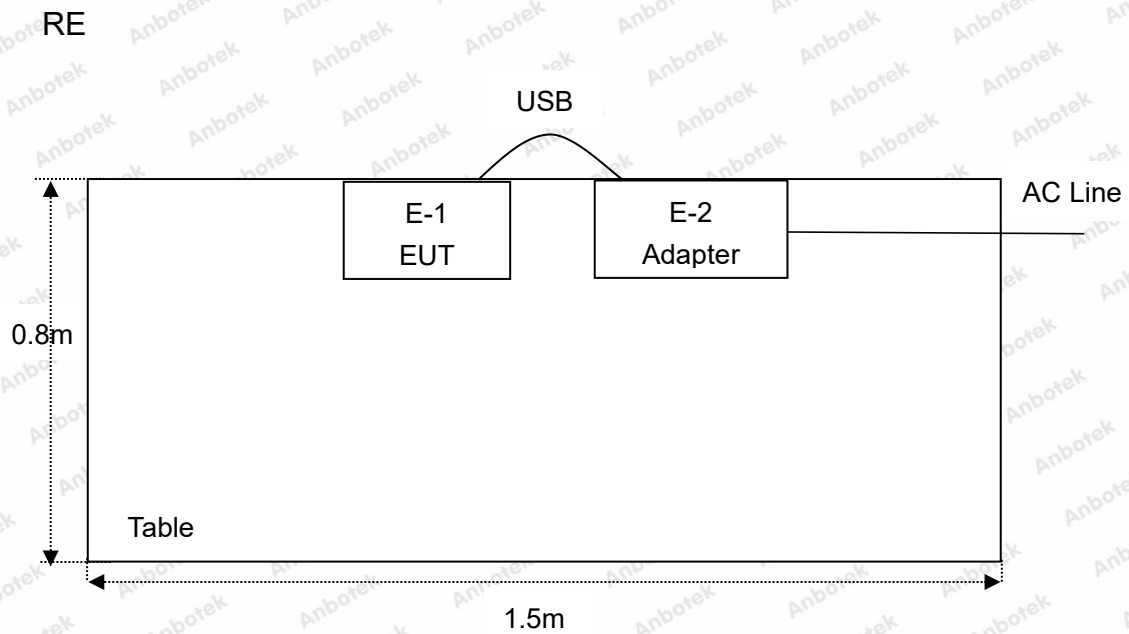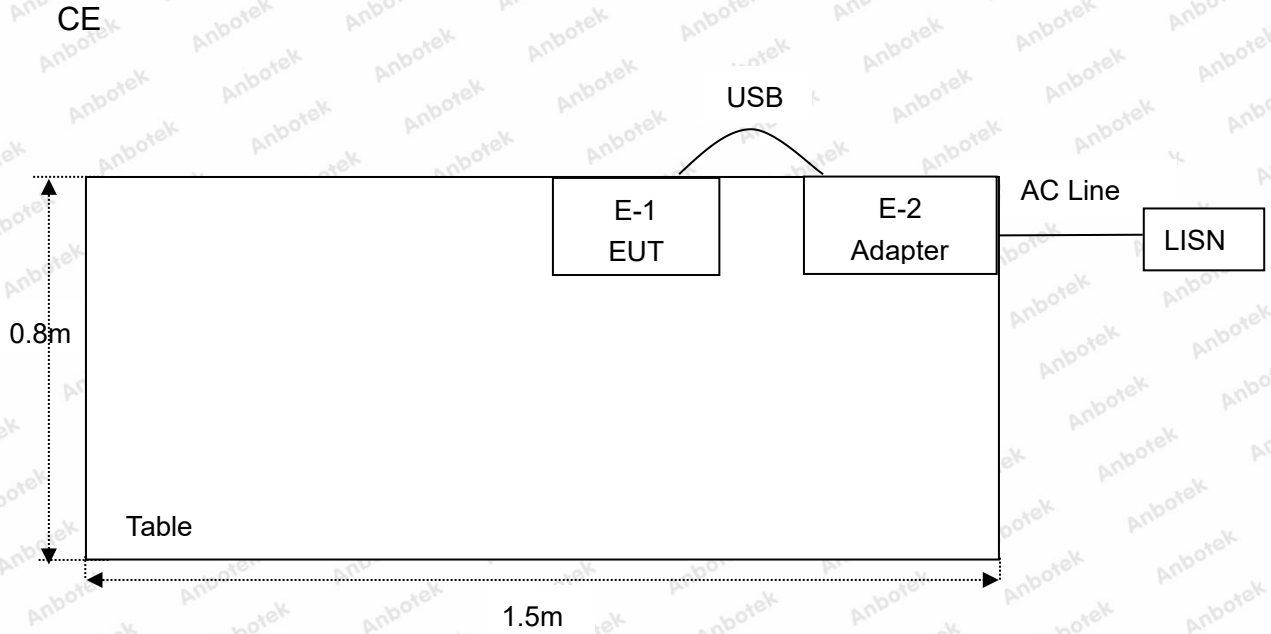

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 23, 2022	1 Year
2.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul. 05, 2022	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 13, 2022	1 Year
4.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 23, 2022	1 Year
5.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2022	1 Year
6.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 13, 2022	1 Year
7.	EMI Preamplifier	SKET Electronic	LNPA-0118G -45	SKET-PA-002	Oct. 13, 2022	1 Year
8.	Double Ridged Horn Antenna	SCHWARZBECK	BBHA 9120D	02555	Oct. 16, 2022	3 Year
9.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 23, 2022	1 Year
10.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 23, 2022	1 Year
11.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 23, 2022	1 Year
12.	Pre-amplifier	SONOMA	310N	186860	Oct. 23, 2022	1 Year
13.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
14.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 13, 2022	1 Year
15.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 13, 2022	1 Year
16.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 13, 2022	1 Year
17.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2022	1 Year
18.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 19, 2022	1 Year
19.	Power Meter	Agilent	N1914A	MY50001102	Oct.26, 2022	1 Year



1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407(b)	Conducted Emission	PASS
15.205 & 15.209	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a) & 2.1049	26dB Bandwidth & 99% Occupied Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(a)	Peak Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.203	Antenna Requirement	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207 & 15.407(b)		
	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
Test Limit	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

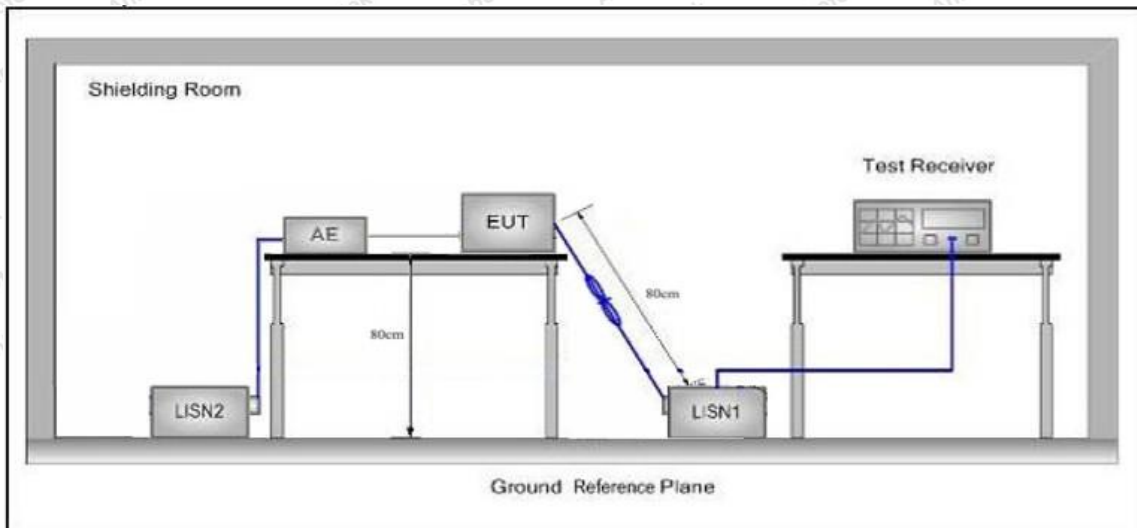

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data


During the test, pre-scan all modes, only the worst case is recorded in the report.

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case AC 120V/60Hz.



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11ax(HT40) 5190MHz MIMO
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

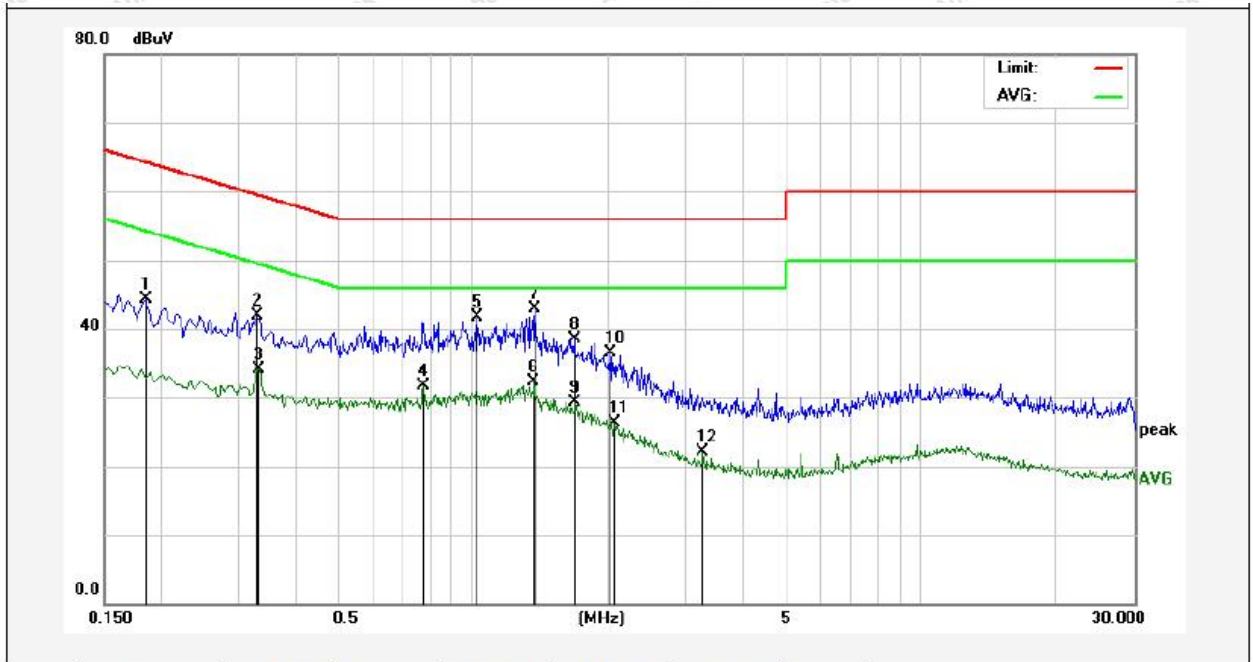


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1860	34.52	9.82	44.34	64.21	-19.87	QP	
2	0.3300	32.16	9.83	41.99	59.45	-17.46	QP	
3	0.3339	24.33	9.83	34.16	49.35	-15.19	AVG	
4	0.7780	21.76	9.87	31.63	46.00	-14.37	AVG	
5	1.0260	31.87	9.86	41.73	56.00	-14.27	QP	
6	1.3700	22.39	9.86	32.25	46.00	-13.75	AVG	
7	1.3740	33.10	9.86	42.96	56.00	-13.04	QP	
8	1.6820	28.73	9.85	38.58	56.00	-17.42	QP	
9	1.6940	19.38	9.85	29.23	46.00	-16.77	AVG	
10	2.0300	26.64	9.85	36.49	56.00	-19.51	QP	
11	2.0660	16.39	9.85	26.24	46.00	-19.76	AVG	
12	3.2620	12.35	9.85	22.20	46.00	-23.80	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 802.11ax(HT40) 5190MHz MIMO
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Temp.(°C)/Hum.(%RH): 22.1°C/52%RH

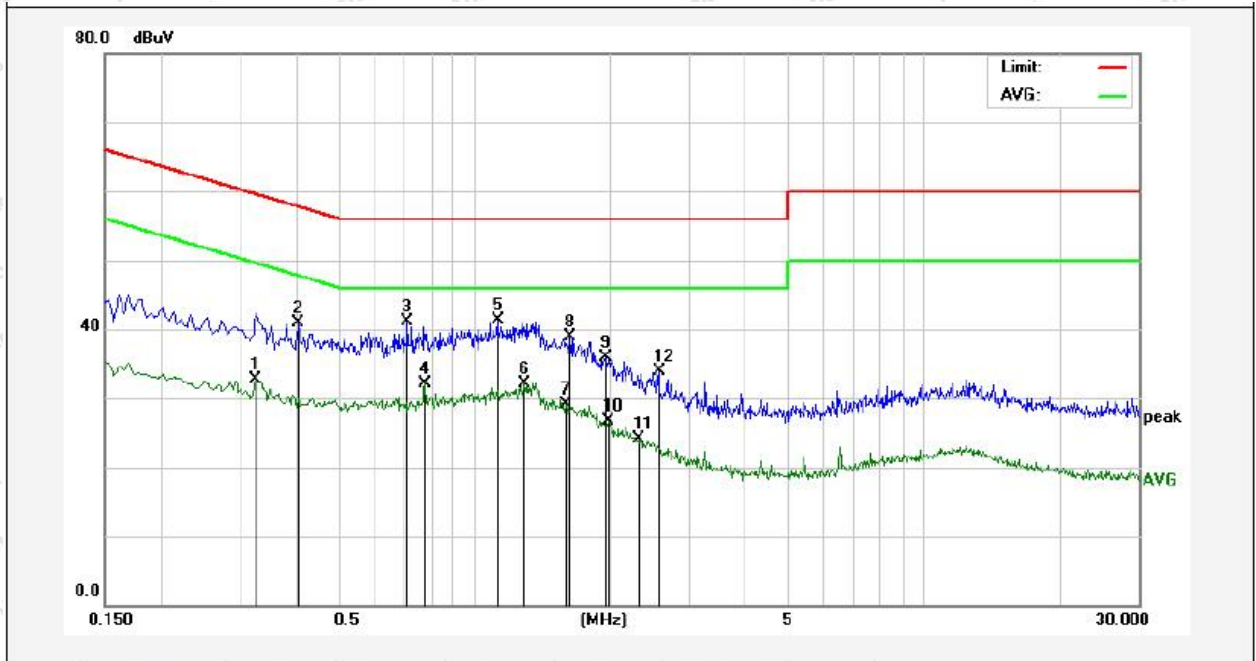

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.3260	22.96	9.83	32.79	49.55	-16.76	AVG	
2	0.4060	31.18	9.81	40.99	57.73	-16.74	QP	
3	0.7100	31.17	9.87	41.04	56.00	-14.96	QP	
4	0.7780	22.22	9.87	32.09	46.00	-13.91	AVG	
5	1.1260	31.35	9.86	41.21	56.00	-14.79	QP	
6	1.2940	22.32	9.86	32.18	46.00	-13.82	AVG	
7	1.5980	19.32	9.85	29.17	46.00	-16.83	AVG	
8	1.6300	29.06	9.85	38.91	56.00	-17.09	QP	
9	1.9660	26.04	9.85	35.89	56.00	-20.11	QP	
10	1.9900	16.91	9.85	26.76	46.00	-19.24	AVG	
11	2.3140	14.21	9.85	24.06	46.00	-21.94	AVG	
12	2.5740	24.08	9.85	33.93	56.00	-22.07	QP	



4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Radiated Spurious Emission					
Test Standard	FCC Part15 C Section 15.205 & 15.209				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3
Band Edge					
Test Standard	15.407(b)				
Test Limit	Operating Band	Frequency	EIRP Limit		Remark
	5150-5250MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5250-5350MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
	5470-5725MHz	Above 1GHz	-27dBm/MHz(68.2dBuV/m)@3m		Peak
		1GHz-5.65GHz	-27*dBm/MHz to 10dBm/MHz (68.2* dBuV/m to 105.6dBuV/m)		Peak
	5725-5850 MHz	5.65GHz-5.7GHz	10*dBm/MHz to 15.6dBm/MHz (105.6*dBuV/m to 110.8dBuV/m)		Peak
		5.7GHz-5.72GHz	15.6*dBm/MHz to 27dBm/MHz (110.8dBuV/m to* 122.2dBuV/m)		Peak
		5.72GHz-5.725GHz	27dBm/MHz to 15.6*dBm/MHz (122.2dBuV/m to110.8* dBuV/m)		Peak



	5.85GHz-5.855GHz	15.6dBm/MHz to 10*dBm/MHz (110.8dBuV/m to 105.6* dBuV/m)	Peak
	5.855GHz-5.875GHz	10dBm/MHz to -27*dBm/MHz (105.6dBuV/m to 68.2* dBuV/m)	Peak
	5.875GHz-5.925GHz	-27 dBm/MHz(68.2dBuV/m)@3m	Peak

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.
- (3)Above 1GHz limit: $E[dBuV/m] = EIRP[dBm] + 95.2 = 68.2 dBuV/m$, for $EIRP[dBm] = -27dBm$.

4.2. Test Setup

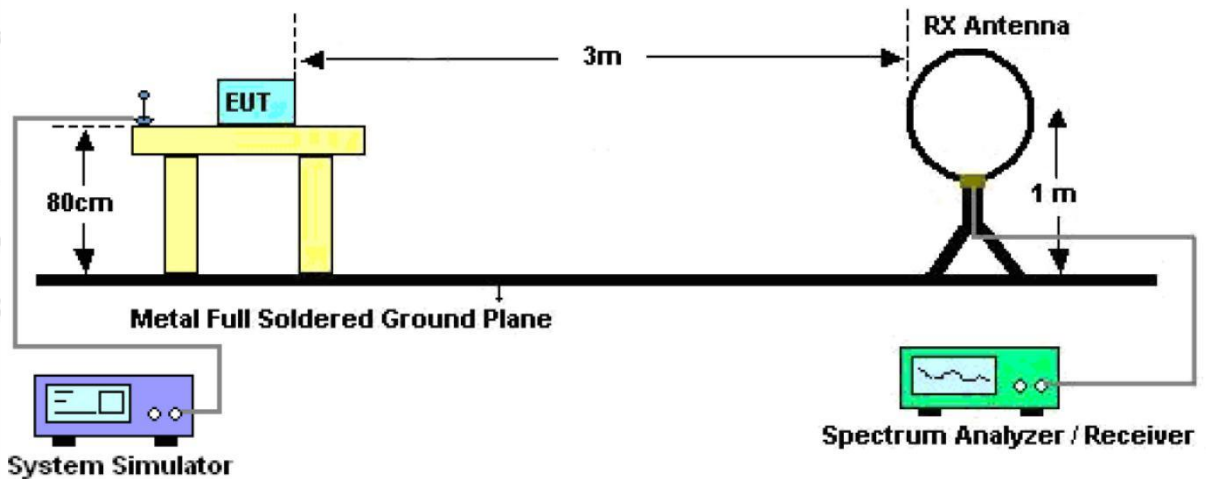


Figure 1. Below 30MHz



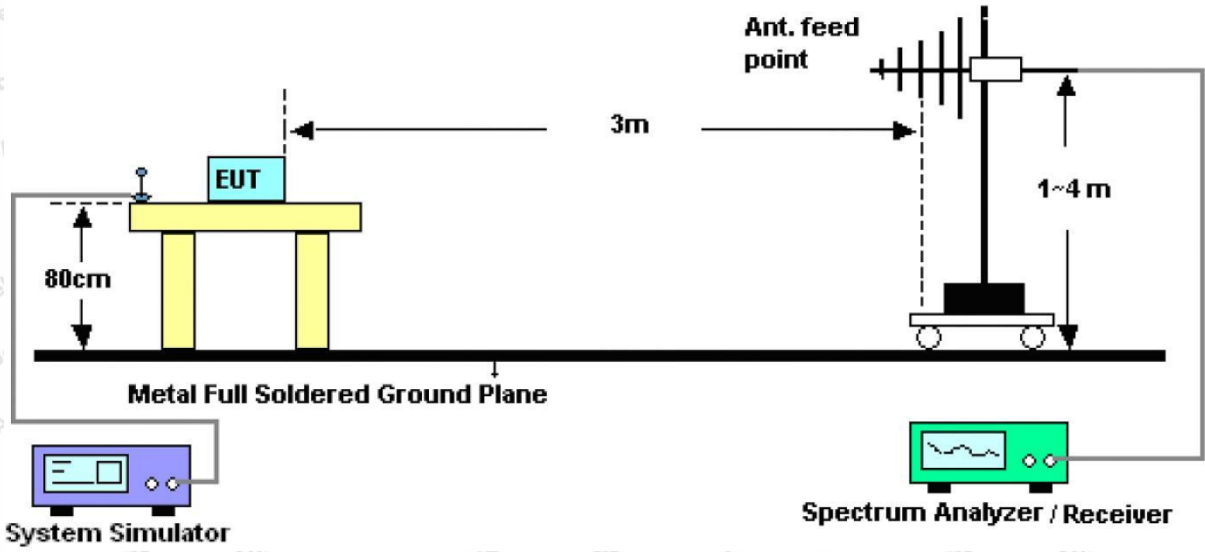


Figure 2. 30MHz to 1GHz

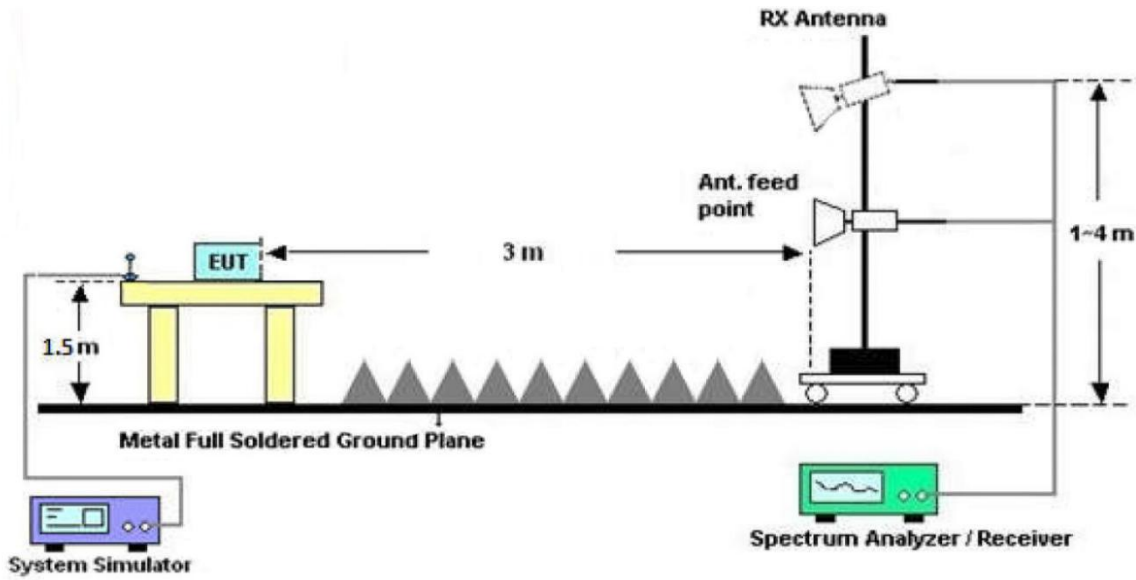


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: 802.11ax(HT40) 5190MHz MIMO
 Power Source: AC 120V, 60Hz for adapter
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 24.8°C/41%RH




No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.1616	33.29	-14.99	18.30	40.00	-21.70	QP			
2	132.2206	46.99	-21.63	25.36	43.50	-18.14	QP			
3	197.8928	45.55	-19.76	25.79	43.50	-17.71	QP			
4	423.5403	44.22	-14.09	30.13	46.00	-15.87	QP			
5	872.1832	36.79	-6.93	29.86	46.00	-16.14	QP			



Test Results (30~1000MHz)

Test Mode: 802.11ax(HT40) 5190MHz MIMO
 Power Source: AC 120V, 60Hz for adapter
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 24.8°C/41%RH

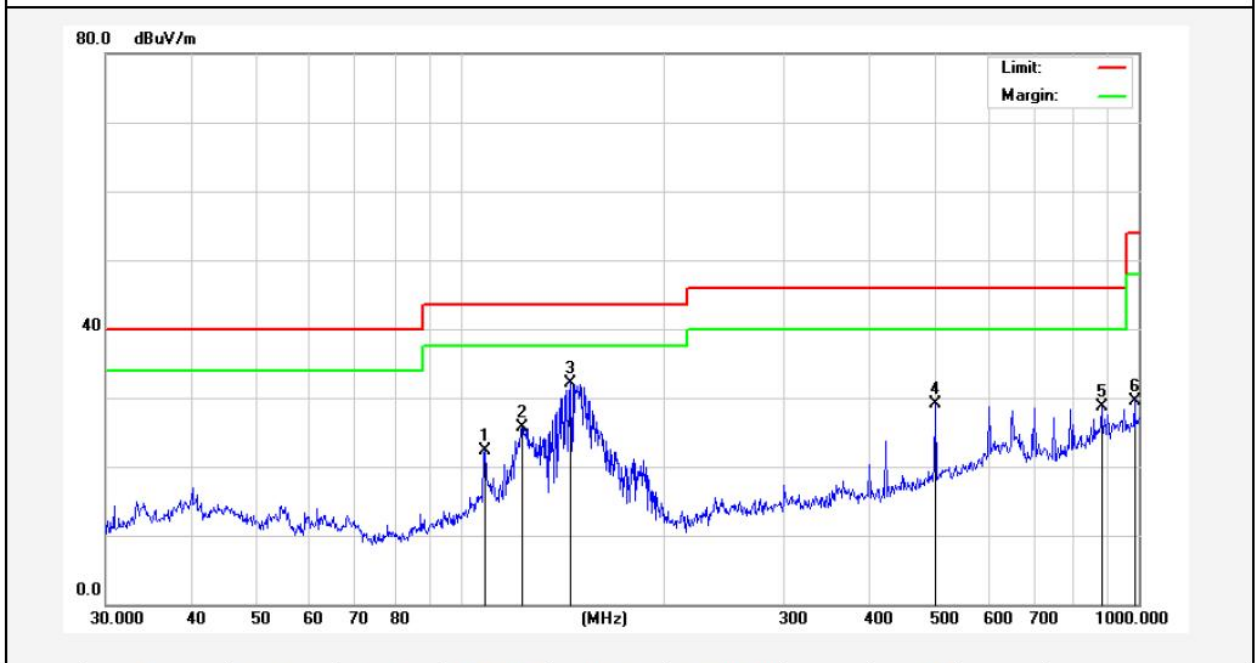

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	108.6470	45.26	-22.94	22.32	43.50	-21.18	QP			
2	123.2655	49.24	-23.48	25.76	43.50	-17.74	QP			
3	145.3506	55.15	-22.95	32.20	43.50	-11.30	QP			
4	501.1790	42.87	-13.72	29.15	46.00	-16.85	QP			
5	881.4067	35.40	-6.68	28.72	46.00	-17.28	QP			
6	986.0717	34.61	-5.01	29.60	54.00	-24.40	QP			



Test Results (Above 1000MHz)

Test Mode: IEEE 802.11ax(HEW40)							
Test channel: Low CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10380.00	29.42	23.81	53.23	68.20	-14.97	V	Peak
15570.00	30.59	28.91	59.50	68.20	-8.70	V	Peak
10380.00	30.35	23.81	54.16	68.20	-14.04	H	Peak
15570.00	31.30	28.91	60.21	68.20	-7.99	H	Peak
10380.00	20.08	23.81	43.89	54.00	-10.11	V	AVG
15570.00	20.50	28.91	49.41	54.00	-4.59	V	AVG
10380.00	20.30	23.81	44.11	54.00	-9.89	H	AVG
15570.00	20.52	28.91	49.43	54.00	-4.57	H	AVG
Test channel: High CH							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
10460.00	29.63	23.80	53.43	68.20	-14.77	V	Peak
15690.00	30.84	30.03	60.87	68.20	-7.33	V	Peak
10460.00	30.35	23.80	54.15	68.20	-14.05	H	Peak
15690.00	31.51	30.03	61.54	68.20	-6.66	H	Peak
10460.00	20.19	23.80	43.99	54.00	-10.01	V	AVG
15690.00	20.45	30.03	50.48	54.00	-3.52	V	AVG
10460.00	20.35	23.80	44.15	54.00	-9.85	H	AVG
15690.00	20.44	30.03	50.47	54.00	-3.53	H	AVG

1. During the test, pre-scan the 802.11a, 802.11n(HT20), ac(VHT20), ax(HEW20), n(HT40), ac(VHT40), ax(HEW40), ac(VHT80), ax(HEW80) SISO and MIMO mode, and found the 802.11ax(HEW40) MIMO mode is worse case , the report only record this mode.
2. Result =Reading + Factor



For ANT1:

Radiated Band Edge:

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.58	15.99	52.57	68.20	-15.63	H	Peak
5150.00	38.58	15.99	54.57	68.20	-13.63	V	Peak
5150.00	26.62	15.99	42.61	54.00	-11.39	H	AVG
5150.00	28.57	15.99	44.56	54.00	-9.44	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.13	16.43	53.56	68.20	-14.64	H	Peak
5250.00	39.82	16.43	56.25	68.20	-11.95	V	Peak
5250.00	28.31	16.43	44.74	54.00	-9.26	H	AVG
5250.00	29.35	16.43	45.78	54.00	-8.22	V	AVG

Remark: 1. Result =Reading + Factor

For ANT2:

Radiated Band Edge:

Test Mode: IEEE 802.11a							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.73	15.99	52.72	68.20	-15.48	H	Peak
5150.00	38.75	15.99	54.74	68.20	-13.46	V	Peak
5150.00	26.73	15.99	42.72	54.00	-11.28	H	AVG
5150.00	28.72	15.99	44.71	54.00	-9.29	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.24	16.43	53.67	68.20	-14.53	H	Peak
5250.00	40.03	16.43	56.46	68.20	-11.74	V	Peak
5250.00	28.47	16.43	44.90	54.00	-9.10	H	AVG
5250.00	29.46	16.43	45.89	54.00	-8.11	V	AVG

Remark: 1. Result =Reading + Factor



For MIMO:

Radiated Band Edge:

Test Mode: IEEE 802.11n(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.76	15.99	51.75	68.20	-16.45	H	Peak
5150.00	37.09	15.99	53.08	68.20	-15.12	V	Peak
5150.00	26.48	15.99	42.47	54.00	-11.53	H	AVG
5150.00	27.50	15.99	43.49	54.00	-10.51	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.54	16.43	53.97	68.20	-14.23	H	Peak
5250.00	38.62	16.43	55.05	68.20	-13.15	V	Peak
5250.00	27.55	16.43	43.98	54.00	-10.02	H	AVG
5250.00	28.93	16.43	45.36	54.00	-8.64	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11n(HT20) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Test Mode: IEEE 802.11n(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.19	15.99	52.18	68.20	-16.02	H	Peak
5150.00	38.07	15.99	54.06	68.20	-14.14	V	Peak
5150.00	26.74	15.99	42.73	54.00	-11.27	H	AVG
5150.00	28.63	15.99	44.62	54.00	-9.38	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.89	16.43	54.32	68.20	-13.88	H	Peak
5250.00	36.83	16.43	53.26	68.20	-14.94	V	Peak
5250.00	27.99	16.43	44.42	54.00	-9.58	H	AVG
5250.00	29.15	16.43	45.58	54.00	-8.42	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11n(HT40) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b

Hotline
400-003-0500
www.anbotek.com.cn



Test Mode: IEEE 802.11ac(HT20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.63	15.99	52.62	68.20	-15.58	H	Peak
5150.00	38.34	15.99	54.33	68.20	-13.87	V	Peak
5150.00	26.39	15.99	42.38	54.00	-11.62	H	AVG
5150.00	28.50	15.99	44.49	54.00	-9.51	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.71	16.43	54.14	68.20	-14.06	H	Peak
5250.00	37.99	16.43	54.42	68.20	-13.78	V	Peak
5250.00	27.58	16.43	44.01	54.00	-9.99	H	AVG
5250.00	28.05	16.43	44.48	54.00	-9.52	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11ac(HT20) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Test Mode: IEEE 802.11ac(HT40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.60	15.99	51.59	68.20	-16.61	H	Peak
5150.00	36.14	15.99	52.13	68.20	-16.07	V	Peak
5150.00	25.67	15.99	41.66	54.00	-12.34	H	AVG
5150.00	26.52	15.99	42.51	54.00	-11.49	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.80	16.43	54.23	68.20	-13.97	H	Peak
5250.00	37.01	16.43	53.44	68.20	-14.76	V	Peak
5250.00	27.32	16.43	43.75	54.00	-10.25	H	AVG
5250.00	27.09	16.43	43.52	54.00	-10.48	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11ac(HT40) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.



Test Mode: IEEE 802.11ac(HT80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.85	15.99	51.84	68.20	-16.36	H	Peak
5150.00	36.08	15.99	52.07	68.20	-16.13	V	Peak
5150.00	26.19	15.99	42.18	54.00	-11.82	H	AVG
5150.00	26.58	15.99	42.57	54.00	-11.43	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.94	16.43	54.37	68.20	-13.83	H	Peak
5250.00	37.15	16.43	53.58	68.20	-14.62	V	Peak
5250.00	28.36	16.43	44.79	54.00	-9.21	H	AVG
5250.00	27.85	16.43	44.28	54.00	-9.72	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11ac(HT80) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Test Mode: IEEE 802.11ax(HEW20)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	36.43	15.99	52.42	68.20	-15.78	H	Peak
5150.00	38.10	15.99	54.09	68.20	-14.11	V	Peak
5150.00	26.29	15.99	42.28	54.00	-11.72	H	AVG
5150.00	28.33	15.99	44.32	54.00	-9.68	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.61	16.43	54.04	68.20	-14.16	H	Peak
5250.00	37.89	16.43	54.32	68.20	-13.88	V	Peak
5250.00	27.44	16.43	43.87	54.00	-10.13	H	AVG
5250.00	27.85	16.43	44.28	54.00	-9.72	V	AVG

Remark:

1. Result = Reading + Factor
2. During the test, pre-scan 802.11ax(HEW20) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.



Test Mode: IEEE 802.11ax(HEW40)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.42	15.99	51.41	68.20	-16.79	H	Peak
5150.00	36.02	15.99	52.01	68.20	-16.19	V	Peak
5150.00	25.41	15.99	41.40	54.00	-12.60	H	AVG
5150.00	26.34	15.99	42.33	54.00	-11.67	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.64	16.43	54.07	68.20	-14.13	H	Peak
5250.00	36.91	16.43	53.34	68.20	-14.86	V	Peak
5250.00	27.22	16.43	43.65	54.00	-10.35	H	AVG
5250.00	26.85	16.43	43.28	54.00	-10.72	V	AVG

Remark:

1. Result =Reading + Factor
2. During the test, pre-scan 802.11ax(HEW40) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Test Mode: IEEE 802.11ax(HEW80)							
Test channel: Lowest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5150.00	35.75	15.99	51.74	68.20	-16.46	H	Peak
5150.00	35.84	15.99	51.83	68.20	-16.37	V	Peak
5150.00	25.95	15.99	41.94	54.00	-12.06	H	AVG
5150.00	26.41	15.99	42.40	54.00	-11.60	V	AVG
Test channel: Highest							
Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over limit (dB)	Antenna Pol.	Detector
5250.00	37.70	16.43	54.13	68.20	-14.07	H	Peak
5250.00	36.97	16.43	53.40	68.20	-14.80	V	Peak
5250.00	28.08	16.43	44.51	54.00	-9.49	H	AVG
5250.00	27.68	16.43	44.11	54.00	-9.89	V	AVG

Remark:

1. Result =Reading + Factor
2. During the test, pre-scan 802.11ax(HEW80) SISO and MIMO modes, and only the worst case (MIMO) is recorded in the report.

Conducted Measurement:

Please refer to Appendix D of the Appendix Test Data.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86) 0755-26066440 Fax: (86) 0755-26014772 Email: service@anbotek.com

Code: AB-RF-05-b



Hotline
400-003-0500

www.anbotek.com.cn




5. Maximum conducted output power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$, then $P_{out} = 30 - (GT_x - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125mW$ (21dBm) 2) Indoor AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$, then $P_{out} = 30 - (GT_x - 6)$. 3) Point-to-point AP The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 23dBi$, then $P_{out} = 30 - (GT_x - 23)$. 4) Client devices The maximum conducted output power (Pout) shall not exceed the lesser of 250W (23.98dBm). if $GT_x > 6dBi$, then $P_{out} = 24 - (GT_x - 6)$.
	5.25 - 5.35GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (24dBm) or $11dBm + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6dBi$, then $P_{out} = 24 - (GT_x - 6)$.
	5.47- 5.725GHz	The maximum conducted output power (Pout) shall not exceed the lesser of 250mW (23.98dBm) or $11dBm + 10 \log B$, where B is the 26dB emission bandwidth in MHz. if $GT_x > 6dBi$, then $P_{out} = 24 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm). if $GT_x > 6dBi$, then $P_{out} = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The maximum conducted output power (Pout) shall not exceed the lesser of 1W (30dBm).

5.2. Test Setup



5.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.



2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

Additional test for duty cycle.

Please refer to Appendix B of the Appendix Test Data.




6. 26dB Bandwidth & 99% Occupied Bandwidth Test

6.1. Test Standard

Test Standard	FCC Part15 C Section 15.407(a) & 2.1049
Test Limit	N/A

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
 - 26 dB & 99% bandwidth**
 - RBW = approximately 1% of the emission bandwidth;
 - Set the VBW > RBW;
 - Detector= Peak
 - Trace mode= Max hold.
 - Sweep- auto couple.
4. Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.

6.4. Test Data

Pass

Please refer to Appendix A1&A2 of the Appendix Test Data.




7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)	
Test Limit	5.15 - 5.25GHz	1) Outdoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6dBi$, then $PSD = 17 - (GT_x - 6)$. 2) Indoor AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 6dBi$, then $PSD = 17 - (GT_x - 6)$. 3) Point-to-point AP The peak power spectral density (PSD) shall not exceed the lesser of 17dBm/MHz. if $GT_x > 23dBi$, then $PSD = 17 - (GT_x - 23)$. 4) Client devices The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6dBi$, then $PSD = 11 - (GT_x - 6)$.
	5.25 - 5.35GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6dBi$, then $PSD = 11 - (GT_x - 6)$.
	5.47- 5.725GHz	The peak power spectral density (PSD) shall not exceed the lesser of 11dBm/MHz. if $GT_x > 6dBi$, then $PSD = 11 - (GT_x - 6)$.
	5.725 - 5.85GHz	1) Point-to-multipoint systems (P2M) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz. if $GT_x > 6dBi$, then $PSD = 30 - (GT_x - 6)$. 2) Point-to-point systems (P2P) The peak power spectral density (PSD) shall not exceed the lesser of 30dBm/500kHz.

7.2. Test Setup



7.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;



3. Set VBW \geq 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;

7.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.




8. Frequency Stability

8.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.407(g)
Test Limit	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

8.2. Test Setup



8.3. Test Procedure

The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

8.4. Test Data

Pass

Please to see the following pages.



Test Mode: 5.2G								
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit	Verdict	
802.11a	SISO	5180	20	102.00	5180.12	5172 to 5188	Pass	
				120.00	5180.10	5172 to 5188	Pass	
				138.00	5180.10	5172 to 5188	Pass	
			-30	120.00	5180.09	5172 to 5188	Pass	
				-20	120.00	5180.07	5150 to 5250	Pass
					-10	120.00	5180.10	5150 to 5250
			0	120.00	5180.09	5150 to 5250	Pass	
				10	120.00	5180.06	5150 to 5250	Pass
			30	120.00	5180.07	5150 to 5250	Pass	
			40	120.00	5180.12	5150 to 5250	Pass	
		50	120.00	5180.02	5172 to 5188	Pass		
		5200	20	102.00	5200.08	5192 to 5208	Pass	
				120.00	5200.11	5192 to 5208	Pass	
				138.00	5200.11	5192 to 5208	Pass	
			-30	120.00	5200.12	5192 to 5208	Pass	
				-20	120.00	5200.11	5150 to 5250	Pass
					-10	120.00	5200.06	5150 to 5250
			0	120.00	5200.11	5150 to 5250	Pass	
				10	120.00	5200.12	5150 to 5250	Pass
			30	120.00	5200.07	5150 to 5250	Pass	
			40	120.00	5200.03	5150 to 5250	Pass	
		50	120.00	5200.10	5192 to 5208	Pass		
		5240	20	102.00	5240.09	5232 to 5248	Pass	
				120.00	5240.11	5232 to 5248	Pass	
				138.00	5240.10	5232 to 5248	Pass	
			-30	120.00	5240.00	5232 to 5248	Pass	
				-20	120.00	5240.08	5150 to 5250	Pass
					-10	120.00	5240.13	5150 to 5250
			0	120.00	5240.06	5150 to 5250	Pass	
				10	120.00	5240.04	5150 to 5250	Pass
30	120.00		5240.13	5150 to 5250	Pass			
40	120.00		5240.10	5150 to 5250	Pass			
50	120.00	5240.13	5232 to 5248	Pass				
802.11n (HT20)	MIMO	5180	20	102.00	5180.13	5172 to 5188	Pass	
				120.00	5180.04	5172 to 5188	Pass	
				138.00	5180.11	5172 to 5188	Pass	
			-30	120.00	5180.01	5172 to 5188	Pass	



			-20	120.00	5180.04	5150 to 5250	Pass	
			-10	120.00	5180.04	5150 to 5250	Pass	
			0	120.00	5180.02	5150 to 5250	Pass	
			10	120.00	5180.10	5150 to 5250	Pass	
			30	120.00	5180.03	5150 to 5250	Pass	
			40	120.00	5180.00	5150 to 5250	Pass	
			50	120.00	5180.11	5172 to 5188	Pass	
		5200	20	102.00	5200.06	5192 to 5208	Pass	
				120.00	5200.09	5192 to 5208	Pass	
				138.00	5200.06	5192 to 5208	Pass	
			-30	120.00	5200.11	5192 to 5208	Pass	
			-20	120.00	5200.07	5150 to 5250	Pass	
			-10	120.00	5200.07	5150 to 5250	Pass	
			0	120.00	5200.06	5150 to 5250	Pass	
			10	120.00	5200.10	5150 to 5250	Pass	
			30	120.00	5200.10	5150 to 5250	Pass	
			40	120.00	5200.11	5150 to 5250	Pass	
			50	120.00	5200.13	5192 to 5208	Pass	
			5240	20	102.00	5240.03	5232 to 5248	Pass
					120.00	5240.05	5232 to 5248	Pass
		138.00			5240.05	5232 to 5248	Pass	
		-30		120.00	5240.02	5232 to 5248	Pass	
		-20		120.00	5240.11	5150 to 5250	Pass	
		-10		120.00	5240.02	5150 to 5250	Pass	
		0		120.00	5240.07	5150 to 5250	Pass	
		10		120.00	5240.06	5150 to 5250	Pass	
		30		120.00	5240.10	5150 to 5250	Pass	
40	120.00	5240.06		5150 to 5250	Pass			
50	120.00	5240.05	5232 to 5248	Pass				
802.11n (HT40)	MIMO	5190	20	102.00	5190.10	5174 to 5206	Pass	
				120.00	5190.08	5174 to 5206	Pass	
				138.00	5190.01	5174 to 5206	Pass	
			-30	120.00	5190.09	5174 to 5206	Pass	
			-20	120.00	5190.01	5150 to 5250	Pass	
			-10	120.00	5190.09	5150 to 5250	Pass	
			0	120.00	5190.06	5150 to 5250	Pass	
			10	120.00	5190.10	5150 to 5250	Pass	
			30	120.00	5190.02	5150 to 5250	Pass	
			40	120.00	5190.09	5150 to 5250	Pass	
50	120.00	5190.09	5174 to 5206	Pass				



5230		5230	20	102.00	5230.05	5214 to 5246	Pass
				120.00	5230.03	5214 to 5246	Pass
				138.00	5230.03	5214 to 5246	Pass
			-30	120.00	5230.08	5214 to 5246	Pass
			-20	120.00	5230.08	5150 to 5250	Pass
			-10	120.00	5230.01	5150 to 5250	Pass
			0	120.00	5230.12	5150 to 5250	Pass
			10	120.00	5230.07	5150 to 5250	Pass
			30	120.00	5230.08	5150 to 5250	Pass
			40	120.00	5230.05	5150 to 5250	Pass
50	120.00	5230.01	5214 to 5246	Pass			
5180		5180	20	102.00	5180.08	5172 to 5188	Pass
				120.00	5180.11	5172 to 5188	Pass
				138.00	5180.10	5172 to 5188	Pass
			-30	120.00	5180.07	5172 to 5188	Pass
			-20	120.00	5180.13	5150 to 5250	Pass
			-10	120.00	5180.09	5150 to 5250	Pass
			0	120.00	5180.13	5150 to 5250	Pass
			10	120.00	5180.03	5150 to 5250	Pass
			30	120.00	5180.13	5150 to 5250	Pass
			40	120.00	5180.10	5150 to 5250	Pass
50	120.00	5180.11	5172 to 5188	Pass			
5200		5200	20	102.00	5200.02	5192 to 5208	Pass
				120.00	5200.03	5192 to 5208	Pass
				138.00	5200.01	5192 to 5208	Pass
			-30	120.00	5200.12	5192 to 5208	Pass
			-20	120.00	5200.03	5150 to 5250	Pass
			-10	120.00	5200.09	5150 to 5250	Pass
			0	120.00	5200.04	5150 to 5250	Pass
			10	120.00	5200.02	5150 to 5250	Pass
			30	120.00	5200.09	5150 to 5250	Pass
			40	120.00	5200.06	5150 to 5250	Pass
50	120.00	5200.07	5192 to 5208	Pass			
5240		5240	20	102.00	5240.09	5232 to 5248	Pass
				120.00	5240.01	5232 to 5248	Pass
				138.00	5240.07	5232 to 5248	Pass
			-30	120.00	5240.07	5232 to 5248	Pass
			-20	120.00	5240.11	5150 to 5250	Pass
			-10	120.00	5240.03	5150 to 5250	Pass
0	120.00	5240.08	5150 to 5250	Pass			

802.11ac
(VHT20)

MIMO



			10	120.00	5240.07	5150 to 5250	Pass
			30	120.00	5240.07	5150 to 5250	Pass
			40	120.00	5240.05	5150 to 5250	Pass
			50	120.00	5240.06	5232 to 5248	Pass
802.11ac (VHT40)	MIMO	5190	20	102.00	5190.04	5174 to 5206	Pass
				120.00	5190.02	5174 to 5206	Pass
				138.00	5190.12	5174 to 5206	Pass
			-30	120.00	5190.07	5174 to 5206	Pass
			-20	120.00	5190.09	5150 to 5250	Pass
			-10	120.00	5190.07	5150 to 5250	Pass
			0	120.00	5190.00	5150 to 5250	Pass
			10	120.00	5190.06	5150 to 5250	Pass
			30	120.00	5190.08	5150 to 5250	Pass
			40	120.00	5190.02	5150 to 5250	Pass
	50	120.00	5190.03	5174 to 5206	Pass		
	5230	20	102.00	5230.11	5214 to 5246	Pass	
			120.00	5230.04	5214 to 5246	Pass	
			138.00	5230.02	5214 to 5246	Pass	
		-30	120.00	5230.01	5214 to 5246	Pass	
		-20	120.00	5230.07	5150 to 5250	Pass	
		-10	120.00	5230.08	5150 to 5250	Pass	
		0	120.00	5230.02	5150 to 5250	Pass	
		10	120.00	5230.10	5150 to 5250	Pass	
		30	120.00	5230.12	5150 to 5250	Pass	
40		120.00	5230.01	5150 to 5250	Pass		
50	120.00	5230.04	5214 to 5246	Pass			
802.11ac (VHT80)	MIMO	5210	20	102.00	5210.01	5178 to 5242	Pass
				120.00	5210.07	5178 to 5242	Pass
				138.00	5210.08	5178 to 5242	Pass
			-30	120.00	5210.05	5178 to 5242	Pass
			-20	120.00	5210.10	5150 to 5250	Pass
			-10	120.00	5210.04	5150 to 5250	Pass
			0	120.00	5210.02	5150 to 5250	Pass
			10	120.00	5210.09	5150 to 5250	Pass
			30	120.00	5210.11	5150 to 5250	Pass
			40	120.00	5210.11	5150 to 5250	Pass
50	120.00	5210.05	5178 to 5242	Pass			
802.11ax (HEW20)	MIMO	5180	20	102.00	5180.02	5172 to 5188	Pass
				120.00	5180.04	5172 to 5188	Pass
				138.00	5180.09	5172 to 5188	Pass



			-30	120.00	5180.06	5172 to 5188	Pass
			-20	120.00	5180.02	5150 to 5250	Pass
			-10	120.00	5180.07	5150 to 5250	Pass
			0	120.00	5180.13	5150 to 5250	Pass
			10	120.00	5180.09	5150 to 5250	Pass
			30	120.00	5180.03	5150 to 5250	Pass
			40	120.00	5180.03	5150 to 5250	Pass
			50	120.00	5180.05	5172 to 5188	Pass
		5200	20	102.00	5200.02	5192 to 5208	Pass
				120.00	5200.07	5192 to 5208	Pass
				138.00	5200.05	5192 to 5208	Pass
			-30	120.00	5200.05	5192 to 5208	Pass
			-20	120.00	5200.01	5150 to 5250	Pass
			-10	120.00	5200.10	5150 to 5250	Pass
			0	120.00	5200.06	5150 to 5250	Pass
			10	120.00	5200.04	5150 to 5250	Pass
			30	120.00	5200.11	5150 to 5250	Pass
			40	120.00	5200.07	5150 to 5250	Pass
			50	120.00	5200.05	5192 to 5208	Pass
			5240	20	102.00	5240.10	5232 to 5248
		120.00			5240.03	5232 to 5248	Pass
		138.00			5240.06	5232 to 5248	Pass
		-30		120.00	5240.08	5232 to 5248	Pass
		-20		120.00	5240.08	5150 to 5250	Pass
		-10		120.00	5240.06	5150 to 5250	Pass
		0		120.00	5240.12	5150 to 5250	Pass
		10		120.00	5240.05	5150 to 5250	Pass
		30		120.00	5240.01	5150 to 5250	Pass
40	120.00	5240.07		5150 to 5250	Pass		
50	120.00	5240.08	5232 to 5248	Pass			
802.11ax (HEW40)	MIMO	5190	20	102.00	5190.06	5174 to 5206	Pass
				120.00	5190.10	5174 to 5206	Pass
				138.00	5190.10	5174 to 5206	Pass
			-30	120.00	5190.02	5174 to 5206	Pass
			-20	120.00	5190.06	5150 to 5250	Pass
			-10	120.00	5190.00	5150 to 5250	Pass
			0	120.00	5190.12	5150 to 5250	Pass
			10	120.00	5190.10	5150 to 5250	Pass
			30	120.00	5190.04	5150 to 5250	Pass
40	120.00	5190.01	5150 to 5250	Pass			



		5230	50	120.00	5190.10	5174 to 5206	Pass	
			20		102.00	5230.00	5214 to 5246	Pass
					120.00	5230.11	5214 to 5246	Pass
					138.00	5230.11	5214 to 5246	Pass
				-30	120.00	5230.08	5214 to 5246	Pass
				-20	120.00	5230.03	5150 to 5250	Pass
				-10	120.00	5230.11	5150 to 5250	Pass
				0	120.00	5230.10	5150 to 5250	Pass
				10	120.00	5230.01	5150 to 5250	Pass
				30	120.00	5230.03	5150 to 5250	Pass
				40	120.00	5230.11	5150 to 5250	Pass
	50	120.00	5230.09	5214 to 5246	Pass			
802.11ax (HEW80)	MIMO	5210	20		102.00	5210.04	5178 to 5242	Pass
					120.00	5210.03	5178 to 5242	Pass
					138.00	5210.06	5178 to 5242	Pass
				-30	120.00	5210.08	5178 to 5242	Pass
				-20	120.00	5210.11	5150 to 5250	Pass
				-10	120.00	5210.05	5150 to 5250	Pass
				0	120.00	5210.00	5150 to 5250	Pass
				10	120.00	5210.01	5150 to 5250	Pass
				30	120.00	5210.10	5150 to 5250	Pass
				40	120.00	5210.03	5150 to 5250	Pass
				50	120.00	5210.02	5178 to 5242	Pass



9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.407 requirement: if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.</p>

9.2. Antenna Connected Construction

The antenna is a FPC Antenna which permanently attached, and the best case gain of the ANT1: 2.39dBi; ANT2: 2.39dBi. It complies with the standard requirement.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

