

承认书

SPECIFICATION FOR APPROVEAL

客户名称(CUSTOMER): BLS TN205

客户料号(PART NO.): BLS0-F19.5×27.5-140-FR

品名(DESCRIPTION): Double coil + magnetic disc

规格(SPECIFICATION): 19.5x27.5,0.08×105P, Edge rise140MM

日期 DATE: 20240327

本司确认 (TRX APPROVAL)		
make	audit	Date of recognition
Zeng Xiaoxian	Qiu Zhihui	20240327
客户确认 (CUSTOMER APPROVAL)		
project	ratify	Date of recognition
确认结果(Result):	<input type="checkbox"/> eligible	<input type="checkbox"/> unqualified <input type="checkbox"/> other

东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

东莞市石碣镇新风西路107号

No. 107, Xinfeng West Road, Shijie Town, Dongguan City

0769-86016320 f a x : 0769-86372427


东莞市德弗力五金电子材料有限公司

Dongguan city DFL Electronic Technology Co.,LTD

SPECIFICATION

产品型号: DESC	BLS0-F19.5×27.5-140-FR	版本 Rev:A	Customer:	BLS TN205
			Description:	Double coil + magnetic disc
			Date:	20240327

一、尺寸DIMENSION:(mm)

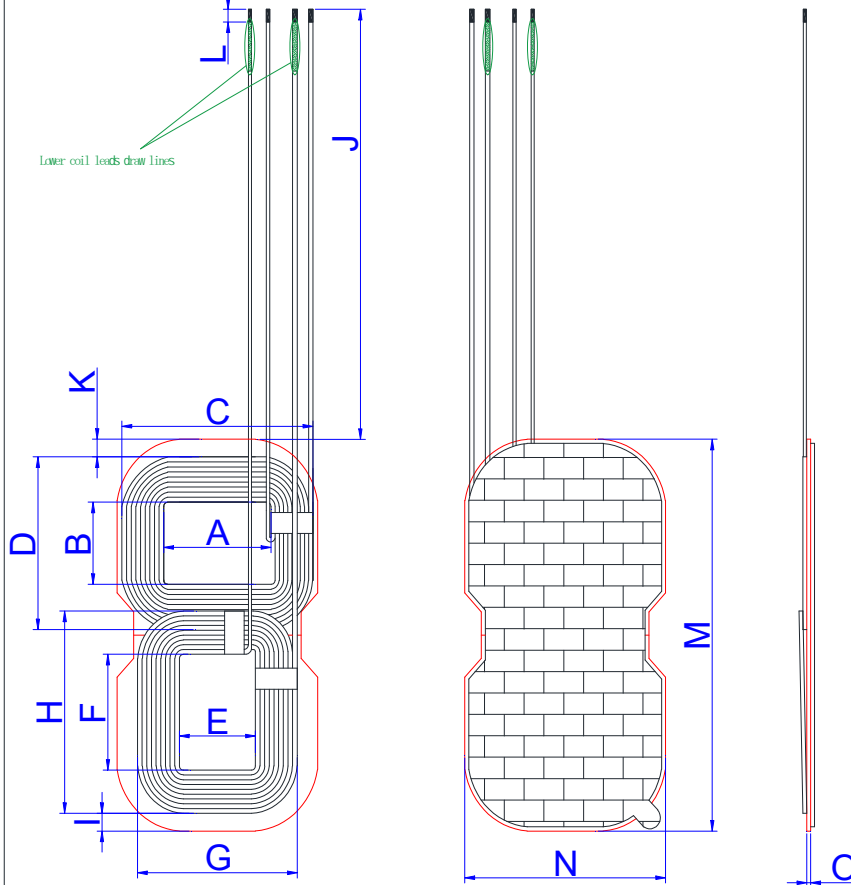

A	27.5±1.0
B	19.5±1.0
C	48.0±1.5
D	41.0±1.5
E	19.5±1.0
F	27.5±1.0
G	41.0±1.5
H	48.0±1.5
I	4.2±1.0
J	140.0±4.0
K	4.2±1.0
L	3.0±2.0
M	93.0±1.0
N	51.5±1.0
O	1.0±0.15
P	

- Coil tape
93 x 51.5 x 1.0 Hard magnetic field
- Wrap 5MM high-temperature tape around the cable outlet position
- Magnetic disc with white double-sided tape with ear
- The upper and lower coils are 4.2mm away from the magnetic edge
- Draw the lead of the lower coil.
- Do not loosen the coil

二、原理图 (schematic diagram:)

三、绕线参数(Winding Specification:)

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		0.08×105#Silk-covered wire	9TS	anticlockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, humidity RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.		7.3uH±10%加磁片	100KHz/1.0V	SHDA 1062
2	IND.		7.0uH±10%加磁片	100KHz/1.0V	SHDA 1062
3	Q值				
4	DCR				

拟制/日期PREPARED BY/DATE 审核/日期CHECKED BY/DATE 客户/日期CUSTOMEU/DATE

--	--	--