



# EMC TEST REPORT

Product Name: Smart LTE Terminal

Model Name: M6L, M6Lite, M6G, M6S, M6X

FCC ID: 2AYEZ-M6L

Issued For : Telo Communication (Shenzhen) Co., Ltd

6/F, No. 42 Liuxian 1st Road, Bao'an District, Shenzhen,  
China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,  
No.177, Renmin West Road, Jinsha, Kengzi Street,  
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT23E077EM01

Sample Received Date: Jun. 01, 2023

Date of Test: Jun. 01, 2023 – Jul. 06, 2023

Date of Issue: Jul. 06, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## TEST REPORT CERTIFICATION

**Applicant:** Telo Communication (Shenzhen) Co., Ltd  
**Address:** 6/F, No. 42 Liuxian 1st Road, Bao'an District, Shenzhen, China

**Manufacturer:** Telo Communication (Shenzhen) Co., Ltd  
**Address:** 6/F, No. 42 Liuxian 1st Road, Bao'an District, Shenzhen, China

**Product Name:** Smart LTE Terminal

**Trademark:** TELOX

**Model Name:** M6L, M6Lite, M6G, M6S, M6X

**Sample Status:** Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

*Terry Zhao*

Terry Zhao  
Engineer

Approved by:

*Vita Li*

Vita Li  
Technical Director





## Table of Contents

<b>1. TEST SUMMARY</b>	<b>5</b>
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
<b>3. EMC EMISSION TEST</b>	<b>10</b>
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	12
<b>APPENDIX I - TEST SETUP</b>	<b>18</b>



**Revision History**

Rev.	Issue Date	Revisions
00	Jul. 06, 2023	Initial Issue



## 1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	N/A	Note 1
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



## 1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

## 1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49

Note: 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.  
2. The measurement uncertainty is not included in the test result.



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Smart LTE Terminal
Trademark:	TELOX
Model Name:	M6L
Series Model:	M6Lite, M6G, M6S, M6X
Model Difference:	Different model names.
Rating:	Input: DC 12V-24V, 2A
Battery:	N/A
Test Voltage:	DC 12V DC 24V
Hardware Version:	M6_EM50_V2
Software Version:	M6L_US_V3.0_20230419

*Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.*



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	GSM link+BT+Wi-Fi+GPS+Earphone
Mode 2	WCDMA link+BT+Wi-Fi+GPS+Earphone
Mode 3	LTE link+BT+Wi-Fi+GPS+Earphone

Note: Only the data of worst-case mode 1 was recorded in this report.

## 2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

### Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	Thinkbook 14	N/A	N/A
Earphone	VESAFE	39630078	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.





## 2.5 MEASUREMENT INSTRUMENTS LIST

<b>Conducted Emission</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Until</b>
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8121	00847	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

<b>Radiated Test equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Until</b>
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2025.06.04
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Pre-amplifier(9kHz-1GHz)	EMtrace	RP01A	02017	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor  
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.



### 3.1.3 TEST SETUP

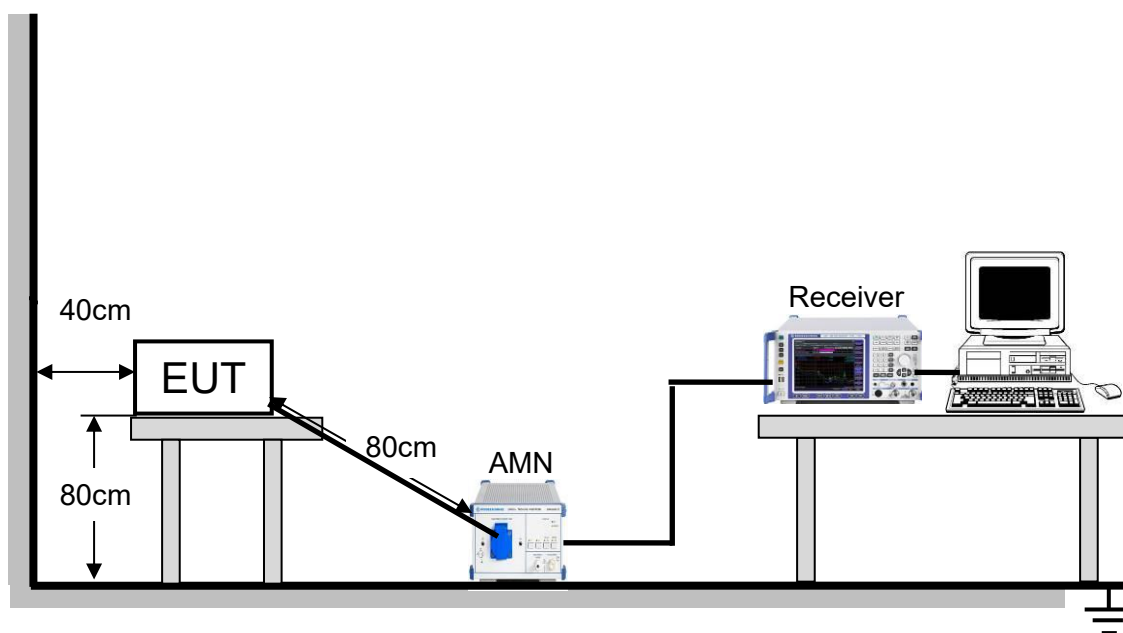

### 3.1.4 TEST RESULTS

N/A



## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 LIMITS

#### Below 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
30 - 88	49.5		40	
88 - 216	53.9		43.5	
216 - 960	56.9		46	
Above 960	60		54	

#### Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

#### Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor,  
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),  
 Margin Level = Measurement Value - Limit Value.


### 3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




### 3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

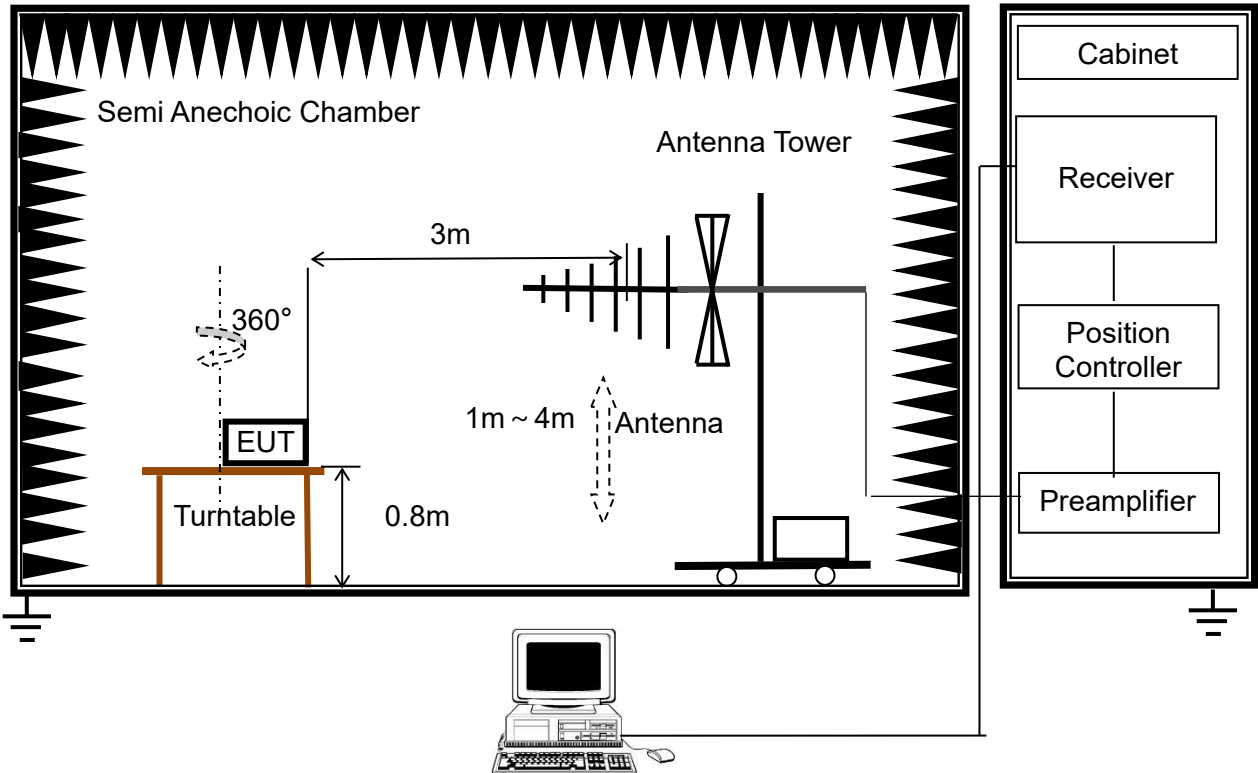


(B) Radiated Emission Test Set-Up Frequency Above 1GHz

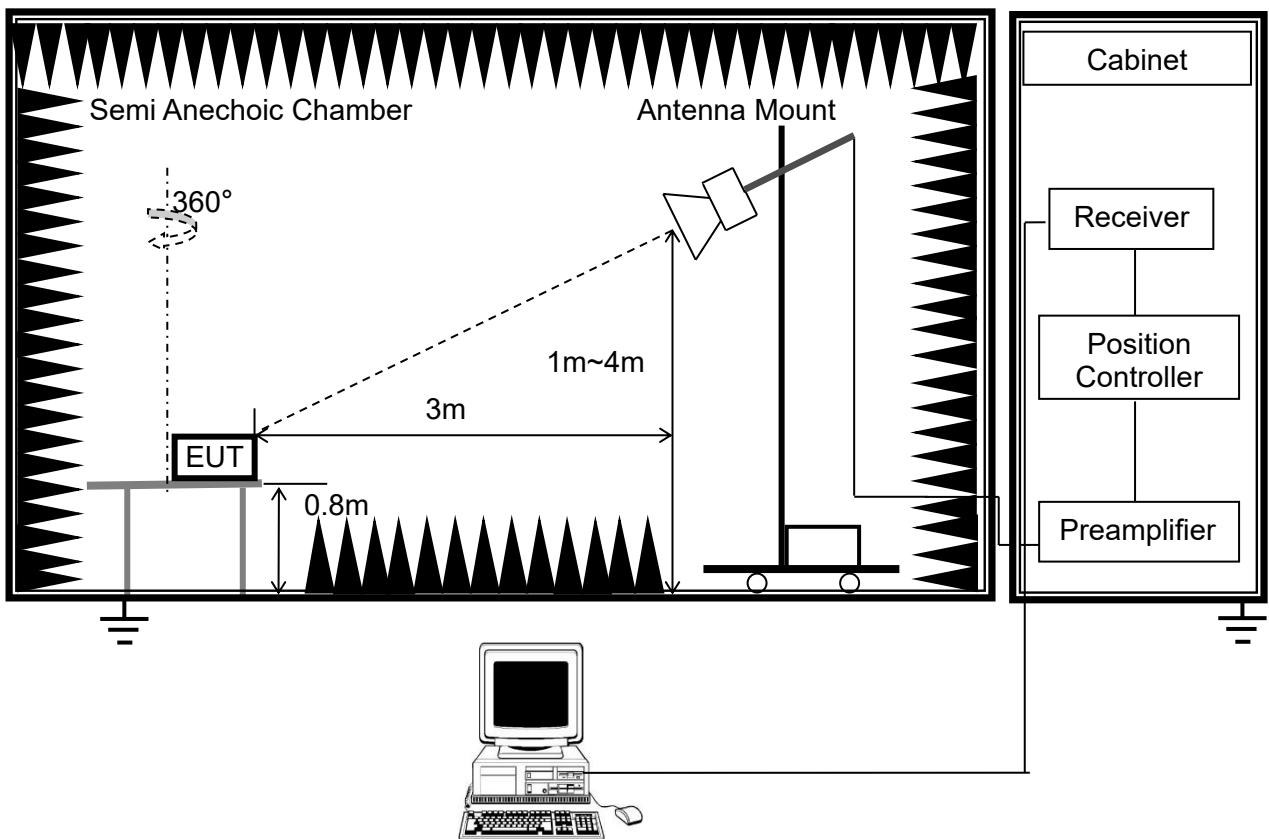




### 3.2.4 TEST RESULTS - BELOW 1GHZ

Project: LGT23E077	Test Engineer: Dylan.shi
EUT: Smart LTE Vehicle Terminal	Temperature: 27.7°C
M/N: M6L	Humidity: 51%RH
Test Voltage: DC 12V	Test Data: 2023-06-27
Test Mode: GSM link+BT+Wi-Fi+GPS+Earphone	
Note:	

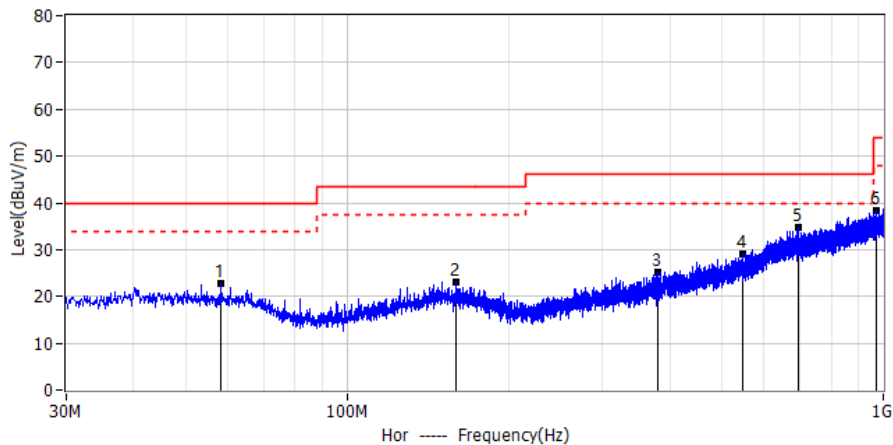


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	58.373MHz	3.92	18.76	22.68	40.00	-17.32	QP	Hor
2*	159.616MHz	3.23	19.84	23.07	43.50	-20.43	QP	Hor
3*	379.200MHz	2.90	22.20	25.10	46.00	-20.90	QP	Hor
4*	547.374MHz	2.89	26.12	29.01	46.00	-16.99	QP	Hor
5*	695.178MHz	4.83	29.81	34.64	46.00	-11.36	QP	Hor
6*	971.628MHz	3.86	34.38	38.24	54.00	-15.76	QP	Hor

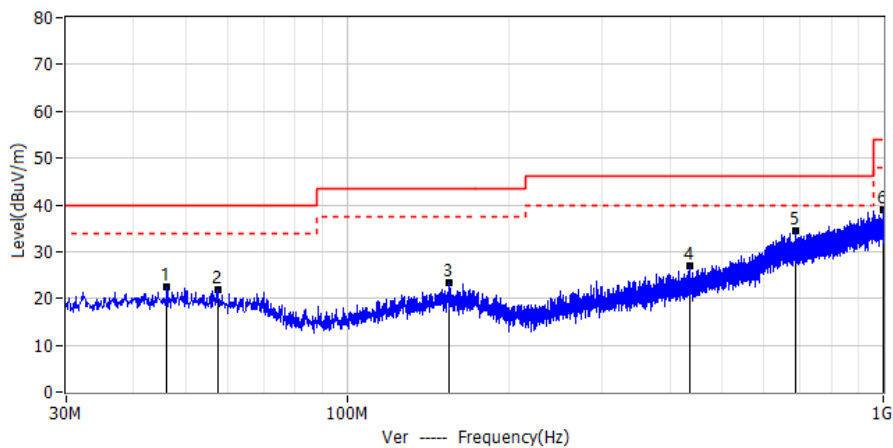


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	46.248MHz	3.12	19.25	22.37	40.00	-17.63	QP	Ver
2*	57.645MHz	3.08	18.81	21.89	40.00	-18.11	QP	Ver
3*	154.888MHz	3.56	19.92	23.48	43.50	-20.02	QP	Ver
4*	436.915MHz	3.46	23.49	26.95	46.00	-19.05	QP	Ver
5*	687.539MHz	4.77	29.69	34.46	46.00	-11.54	QP	Ver
6*	998.909MHz	4.31	34.57	38.88	54.00	-15.12	QP	Ver



Project: LGT23E077	Test Engineer: Dylan.shi
EUT: Smart LTE Vehicle Terminal	Temperature: 27.7°C
M/N: M6L	Humidity: 51%RH
Test Voltage: DC 24V	Test Data: 2023-06-27
Test Mode: GSM link+BT+Wi-Fi+GPS+Earphone	
Note:	

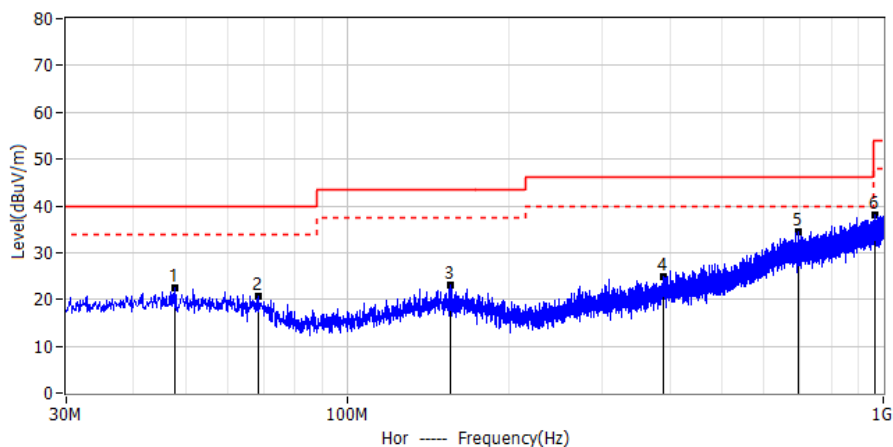

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	47.945MHz	3.12	19.30	22.42	40.00	-17.58	QP	Hor
2*	68.558MHz	2.69	18.11	20.80	40.00	-19.20	QP	Hor
3*	155.736MHz	3.27	19.90	23.17	43.50	-20.33	QP	Hor
4*	390.113MHz	2.22	22.54	24.76	46.00	-21.24	QP	Hor
5*	695.056MHz	4.79	29.81	34.60	46.00	-11.40	QP	Hor
6*	965.929MHz	3.66	34.27	37.93	54.00	-16.07	QP	Hor

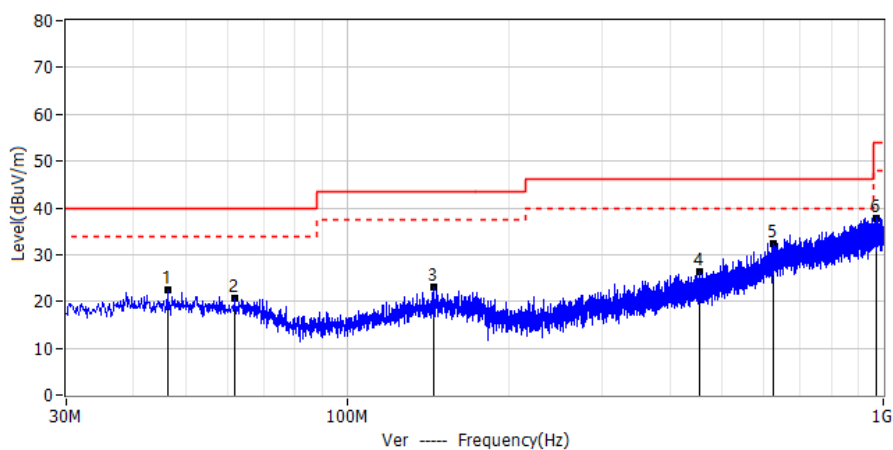


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	46.369MHz	3.23	19.26	22.49	40.00	-17.51	QP	Ver
2*	61.768MHz	2.25	18.53	20.78	40.00	-19.22	QP	Ver
3*	144.824MHz	3.63	19.50	23.13	43.50	-20.37	QP	Ver
4*	453.405MHz	2.43	23.89	26.32	46.00	-19.68	QP	Ver
5*	624.974MHz	3.86	28.59	32.45	46.00	-13.55	QP	Ver
6*	967.748MHz	3.60	34.30	37.90	54.00	-16.10	QP	Ver




### 3.2.5 TEST RESULTS - ABOVE 1GHZ

Project: LGT23E077	Test Engineer: Dylan.shi
EUT: Smart LTE Terminal	Temperature: 25.8°C
M/N: M6L	Humidity: 59%RH
Test Voltage: DC 12V	Test Data: 2023-06-10
Test Mode: GSM link+BT+Wi-Fi+GPS+Earphone	
Note:	

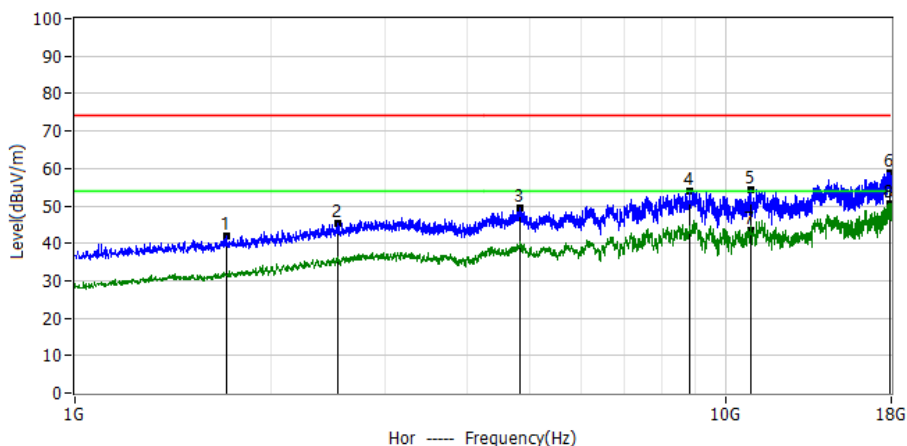

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.7076GHz	61.14	-19.14	42.00	74.00	-32.00	PK	Hor
2*	2.5406GHz	56.22	-10.77	45.45	74.00	-28.55	PK	Hor
3*	4.8314GHz	55.43	-6.01	49.42	74.00	-24.58	PK	Hor
4*	8.8136GHz	55.54	-1.70	53.84	74.00	-20.16	PK	Hor
5*	10.9556GHz	52.85	1.51	54.36	74.00	-19.64	PK	Hor
6*	17.9490GHz	50.49	8.48	58.97	74.00	-15.03	PK	Hor
7*	10.9556GHz	41.89	1.51	43.40	54.00	-10.60	AV	Hor
8*	17.9490GHz	42.22	8.48	50.70	54.00	-3.30	AV	Hor

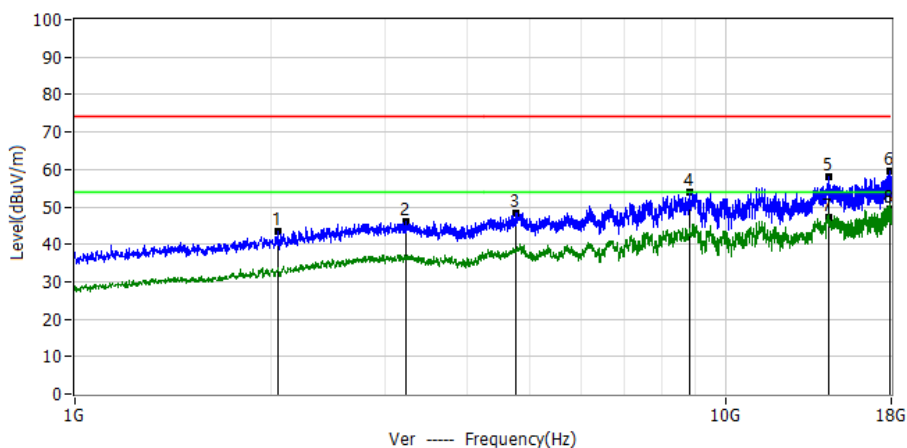


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.0519GHz	59.09	-15.69	43.40	74.00	-30.60	PK	Ver
2*	3.2206GHz	54.46	-8.41	46.05	74.00	-27.95	PK	Ver
3*	4.7676GHz	54.14	-5.96	48.18	74.00	-25.82	PK	Ver
4*	8.8285GHz	55.47	-1.66	53.81	74.00	-20.19	PK	Ver
5*	14.4002GHz	52.09	5.91	58.00	74.00	-16.00	PK	Ver
6*	17.9405GHz	51.21	8.48	59.69	74.00	-14.31	PK	Ver
7*	14.4002GHz	41.19	5.91	47.10	54.00	-6.90	AV	Ver
8*	17.9405GHz	41.02	8.48	49.50	54.00	-4.50	AV	Ver






Project: LGT23E077	Test Engineer: Dylan.shi
EUT: Smart LTE Terminal	Temperature: 25.8°C
M/N: M6L	Humidity: 59%RH
Test Voltage: DC 24V	Test Data: 2023-06-10
Test Mode: GSM link+BT+Wi-Fi+GPS+Earphone	
Note:	

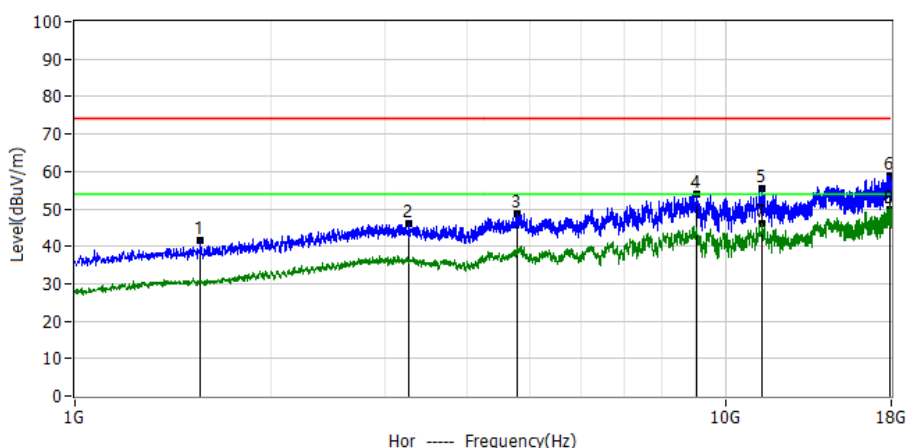

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5610GHz	62.02	-20.44	41.58	74.00	-32.42	PK	Hor
2*	3.2589GHz	54.66	-8.43	46.23	74.00	-27.77	PK	Hor
3*	4.7782GHz	54.70	-5.97	48.73	74.00	-25.27	PK	Hor
4*	9.0452GHz	55.17	-1.17	54.00	74.00	-20.00	PK	Hor
5*	11.3955GHz	53.56	1.86	55.42	74.00	-18.58	PK	Hor
6*	17.9511GHz	50.23	8.49	58.72	74.00	-15.28	PK	Hor
7*	11.3955GHz	44.14	1.86	46.00	54.00	-8.00	AV	Hor
8*	17.9511GHz	41.51	8.49	50.00	54.00	-4.00	AV	Hor

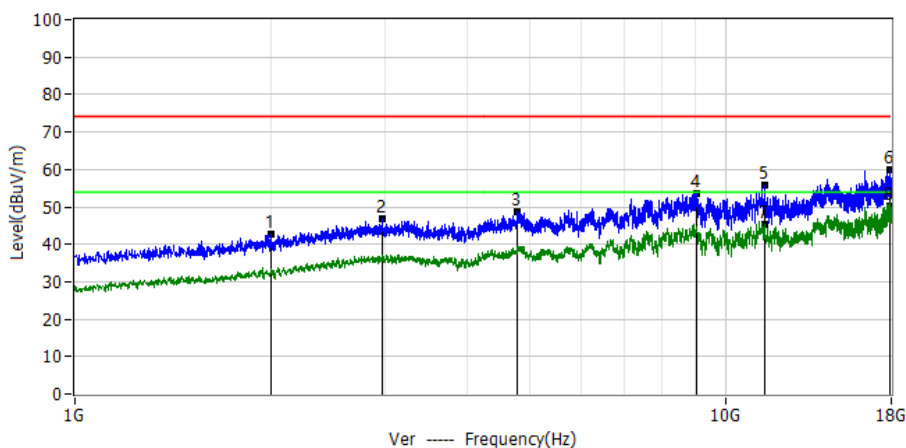


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.0009GHz	59.01	-16.22	42.79	74.00	-31.21	PK	Ver
2*	2.9699GHz	55.42	-8.50	46.92	74.00	-27.08	PK	Ver
3*	4.7952GHz	54.61	-5.98	48.63	74.00	-25.37	PK	Ver
4*	9.0261GHz	54.74	-1.17	53.57	74.00	-20.43	PK	Ver
5*	11.5017GHz	53.74	1.93	55.67	74.00	-18.33	PK	Ver
6*	17.9490GHz	51.52	8.48	60.00	74.00	-14.00	PK	Ver
7*	11.5017GHz	43.27	1.93	45.20	54.00	-8.80	AV	Ver
8*	17.9490GHz	41.72	8.48	50.20	54.00	-3.80	AV	Ver




## APPENDIX I - TEST SETUP

### Set-up for Radiated Emission (RE), Below 1GHz

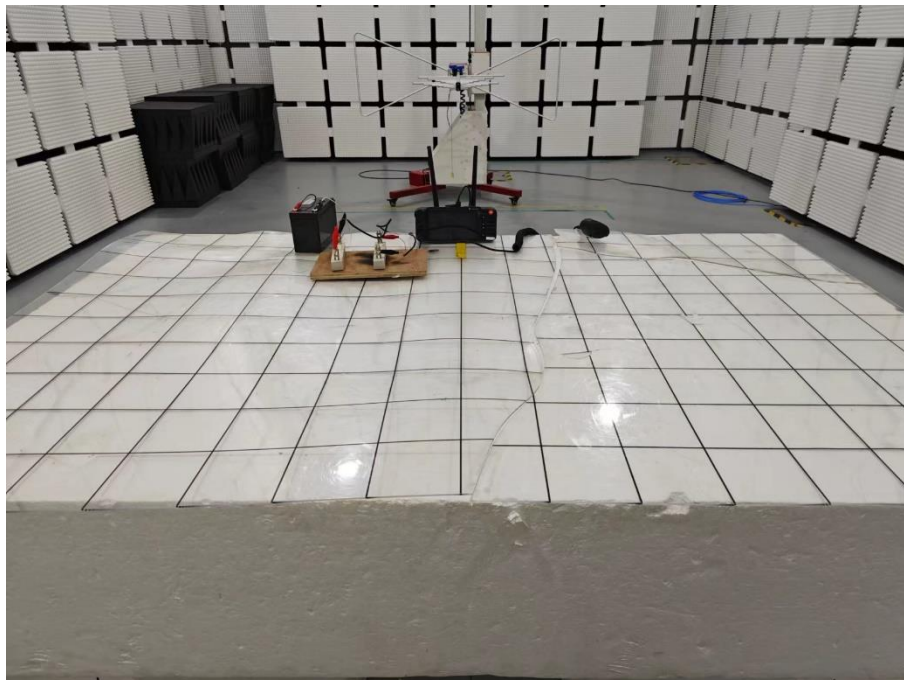

### Set-up for Radiated Emission (RE), Above 1GHz

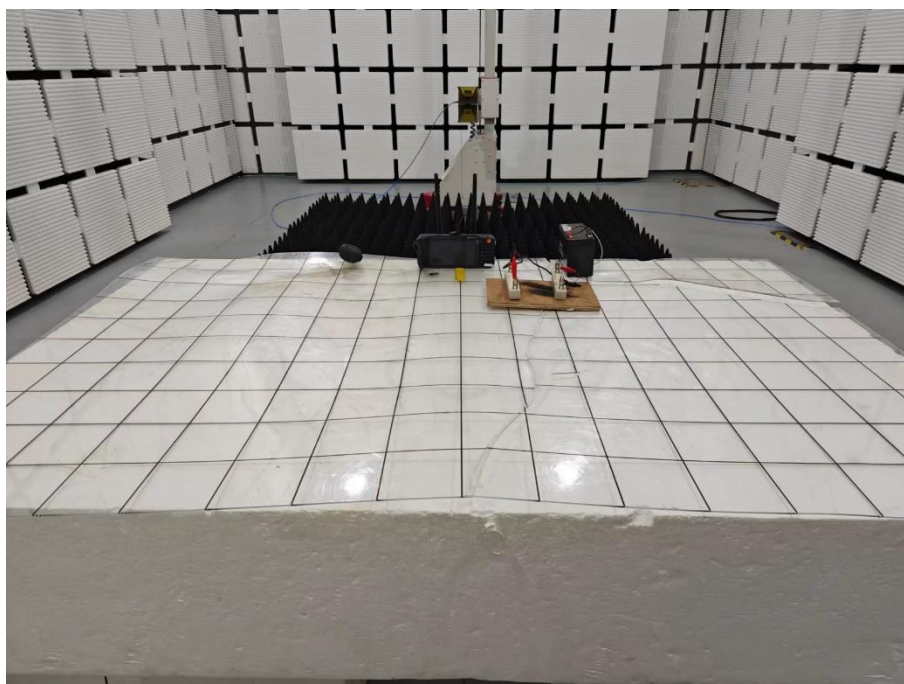

\*\*\*\*\* END OF THE REPORT \*\*\*\*\*