



TEST REPORT

For WiFi-2.4GHz Band



Report No. : **CHTW24100050** Report Verification:

Project No...... : **SHT2407073401W**

FCC ID..... : **2AYEZ-MT-100**

Applicant's name..... : **Telo Communication (Shenzhen) Co., Ltd**

Address..... : 13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China

Product Name : **Smart LTE Terminal**

Trade Mark : TELOX

Model No. : MT-100

Listed Model(s) : MT-100L, MT-100M, MT-100X, MT-100P, MT-100K

Standard : **FCC CFR Title 47 Part 15 Subpart C § 15.247**

Date of receipt of test sample..... : Aug. 15, 2024

Date of testing..... : Aug. 20, 2024- Sep. 30, 2024

Date of issue..... : Oct. 17, 2024

Result..... : **PASS**

Compiled by (Position+Printed name+Signature):	File administrators Xiaodong Zhao	<i>Xiaodong Zhao</i>
Supervised by (Position+Printed name+Signature):	Project Engineer Xiaodong Zhao	<i>Xiaodong Zhao</i>
Approved by (Position+Printed name+Signature):	RF Manager Xu yang	<i>Xu Yang</i>

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Test mode	7
4.3.	Test sample information	8
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	9
4.7.	Equipment Used during the Test	10
5.	TEST CONDITIONS AND RESULTS	12
5.1.	Antenna Requirement	12
5.2.	AC Conducted Emission	13
5.3.	Peak Output Power	16
5.4.	Power Spectral Density	17
5.5.	6dB bandwidth	18
5.6.	99% Occupied Bandwidth	19
5.7.	Duty Cycle	20
5.8.	Conducted Band edge and Spurious Emission	21
5.9.	Radiated Band edge Emission	23
5.10.	Radiated Spurious Emission	28
6.	TEST SETUP PHOTOS	36
7.	EXTERNAL AND INTERNAL PHOTOS	36
8.	APPENDIX REPORT	36

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2024-10-17	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Chenxin Ling
5.2	AC Conducted Emission	15.207	PASS	Yating Chen
5.3	Peak Output Power	15.247(b)(3)	PASS	Chenxin Ling
5.4	Power Spectral Density	15.247(e)	PASS	Chenxin Ling
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Chenxin Ling
5.6	99% Occupied Bandwidth	-	PASS*1	Chenxin Ling
5.7	Duty cycle	-	PASS*1	Chenxin Ling
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Chenxin Ling
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:

- The measurement uncertainty is not included in the test result.
- *1: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Manufacturer:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China
Factory:	Telo Communication (Shenzhen) Co., Ltd
Address:	13th Floor, Building B, Union RSD Center, No. 287 Guangshen Rd., Bao'an District, Shenzhen, China

3.2. Product Description

Main unit information:	
Product Name:	Smart LTE Terminal
Trade Mark:	TELOX
Model No.:	MT-100
Listed Model(s):	MT-100L, MT-100M, MT-100X, MT-100P, MT-100K
Power supply:	DC 3.87V from Battery
Hardware version:	V1.0
Software version:	MT100_US_V1P_20240531
Accessory unit information:	
Battery information:	3.87V 4000mAh 15.48Wh Model: TEB-4000T Limited Charge Voltage: 4.45V
Adapter information:	MODEL: MR-0502000US INPUT:100-240V~50/60Hz 0.3A OUTPUT:DC 5V 2.0A Shen zhen Mao Two Power Co., Ltd

3.3. Radio Specification Description

Support type:	<input checked="" type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n
Support bandwidth:	<input checked="" type="checkbox"/> 20MHz	<input checked="" type="checkbox"/> 40MHz	
Modulation:	802.11b:	DBPSK, DQPSK, BPSK, QPSK	
	802.11g/n:	BPSK, QPSK, 16QAM, 64QAM	
Operation frequency:	802.11b/g/n(HT20):	2412MHz~2462MHz	
	802.11n(HT40)	2422MHz~2452MHz	
Channel number:	802.11b/g/n(HT20):	11	
	802.11n(HT40)	7	
Channel separation:	5MHz		
Antenna technology:	<input checked="" type="checkbox"/> SISO	<input type="checkbox"/> MIMO	
Antenna type:	PIFA Antenna		
Antenna gain:	0.56dBi		

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
· : · : · :	· : · : · :	· : · : · :	· : · : · :
06	2437	06	2437
· : · : · :	· : · : · :	· : · : · :	· : · : · :
10	2457	08	2447
11	2462	09	2452

4.2. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT24070734001
EMI test items	YPHT24070734001

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.7. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2024/08/27	2025/08/26
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2024/08/21	2025/08/20
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2024/5/25	2025/5/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2024/08/12	2025/08/11
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2024/08/12	2025/08/11
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2024/08/12	2025/08/11
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2024/08/12	2025/08/11
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2024/04/08	2027/04/07
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz 3M							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/04/06	2026/04/05
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2024/08/12	2025/08/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2024/5/24	2025/5/23
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/04/17	2026/04/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2024/08/12	2025/08/11
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2024/08/12	2025/0811
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/02/14	2026/02/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2024/06/06	2025/06/05
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2024/06/06	2025/06/05
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT

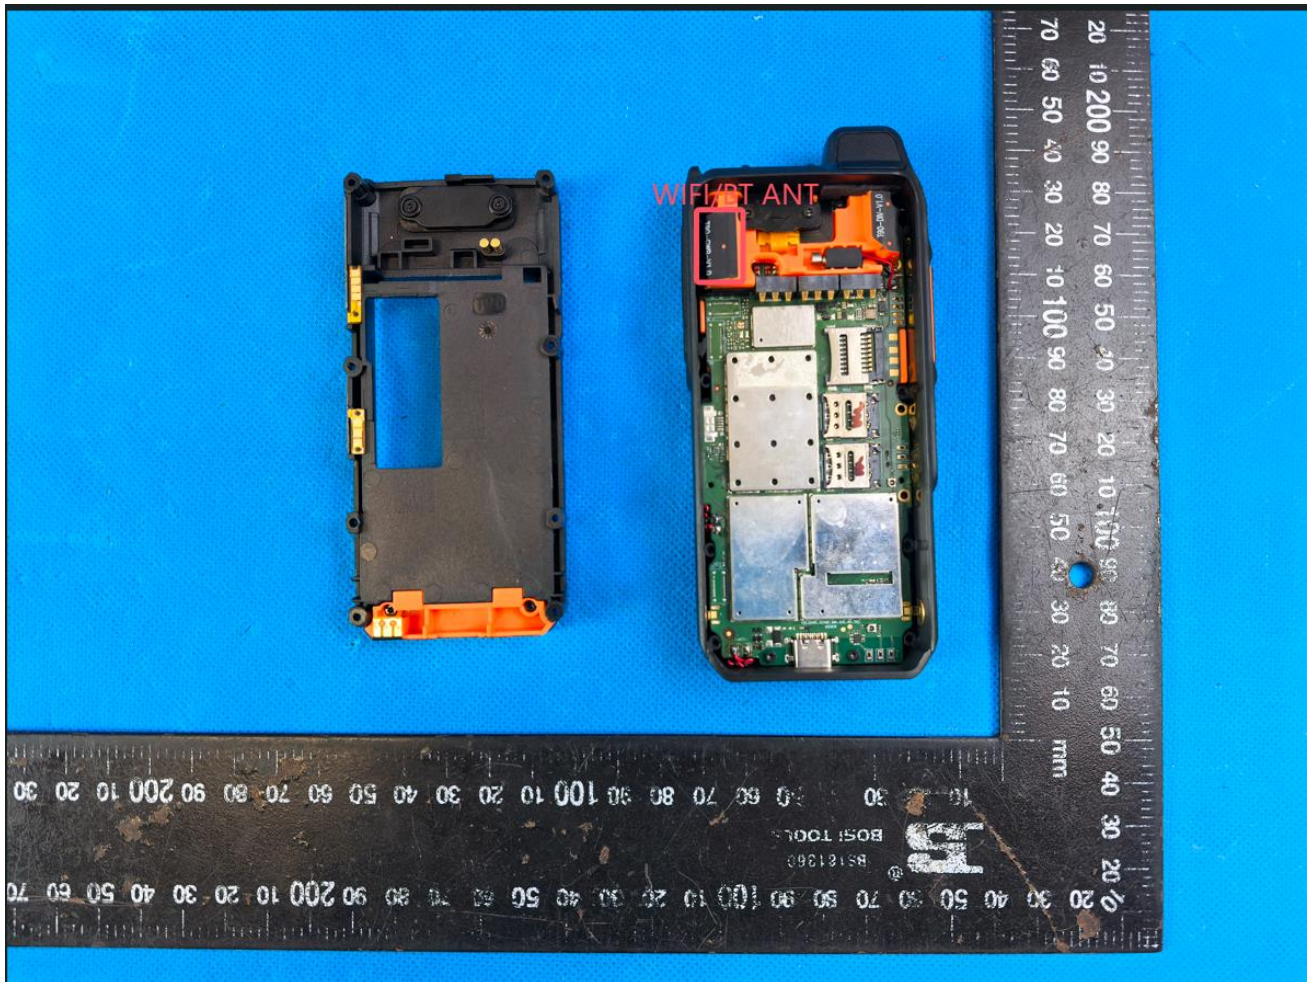
FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

Passed Not Applicable

The antenna type is a PIFA antenna, please refer to the below antenna photo.



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

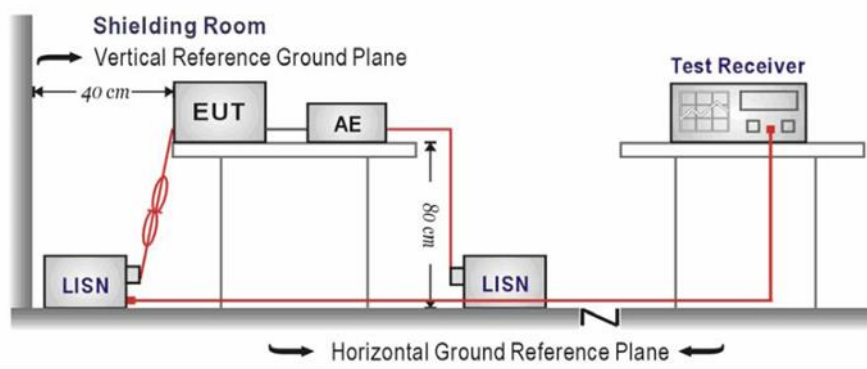TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

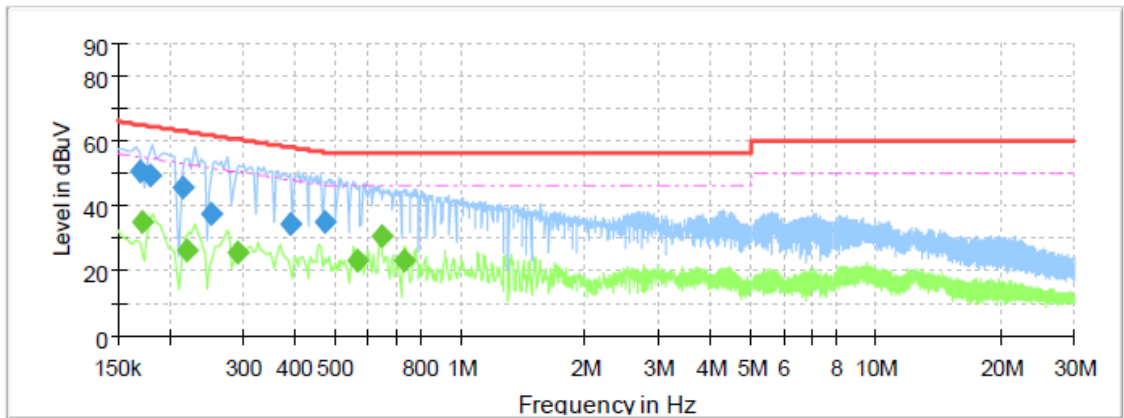
Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Test Line:

L




Serif;

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1700	50.50	---	64.96	14.46	L1	10.9
0.1715	---	34.98	54.89	19.91	L1	10.9
0.1795	49.37	---	64.51	15.14	L1	10.9
0.2155	45.69	---	62.99	17.30	L1	10.9
0.2195	---	26.24	52.84	26.60	L1	10.9
0.2515	37.79	---	61.71	23.92	L1	10.9
0.2915	---	25.60	50.48	24.88	L1	10.9
0.3915	34.23	---	58.03	23.81	L1	10.9
0.4715	35.04	---	56.49	21.44	L1	11.0
0.5675	---	22.92	46.00	23.08	L1	11.0
0.6475	---	30.86	46.00	15.14	L1	11.0
0.7355	---	22.92	46.00	23.08	L1	11.0

Test Line:

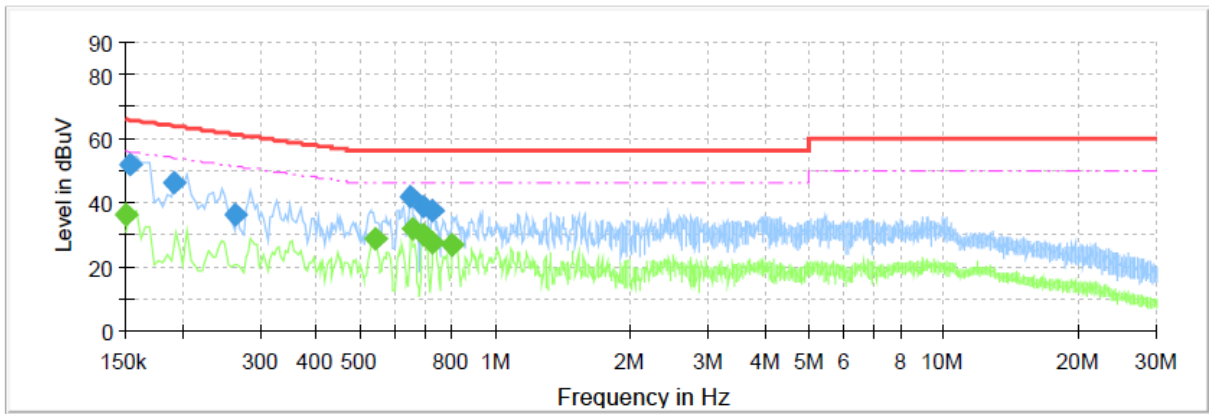N



Final Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1500	---	36.28	56.00	19.72	N	10.7
0.1540	52.04	---	65.78	13.75	N	10.7
0.1915	46.17	---	63.97	17.80	N	10.7
0.2635	36.30	---	61.32	25.02	N	10.7
0.5435	---	28.74	46.00	17.26	N	10.7
0.6475	42.13	---	56.00	13.87	N	10.8
0.6555	---	31.58	46.00	14.42	N	10.8
0.6915	---	30.04	46.00	15.96	N	10.8
0.6915	38.61	---	56.00	17.39	N	10.8
0.7235	---	27.37	46.00	18.63	N	10.8
0.7235	37.42	---	56.00	18.58	N	10.8
0.7995	---	27.08	46.00	18.92	N	10.8

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

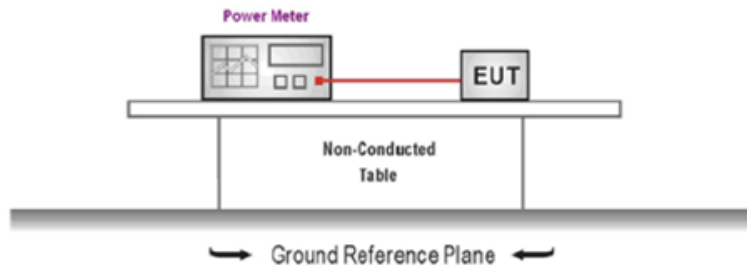TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

Refer to the appendix report

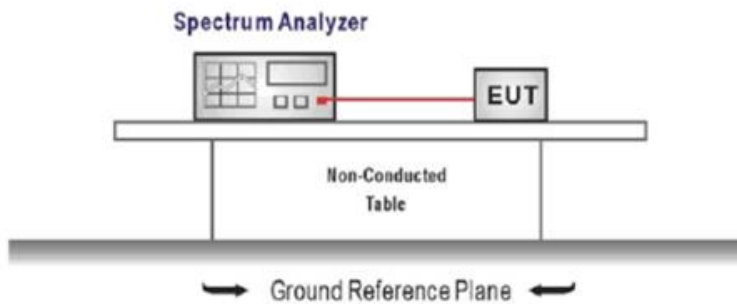
5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

Refer to the appendix report

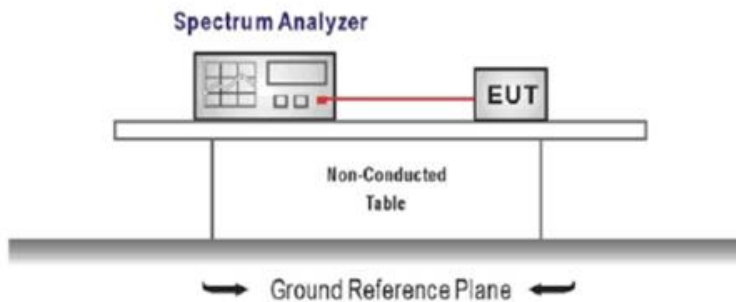
5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency =DTS channel center frequency
Span=2 x DTS bandwidth
RBW = 100 kHz, VBW \geq 3 x RBW
Sweep time= auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

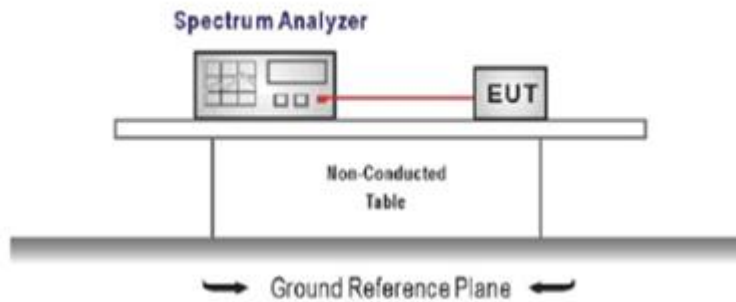
Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times$ OBW
RBW = 1%~5%OBW
VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

TEST DATA

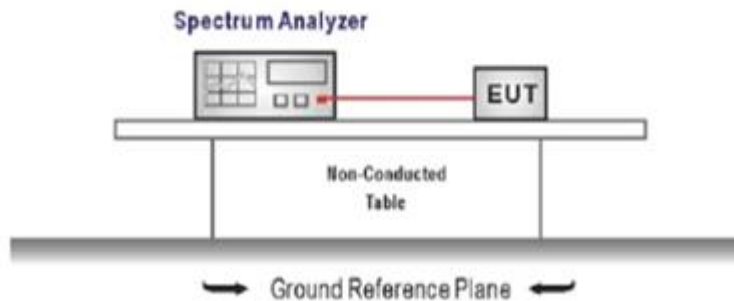
Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW \geq RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Refer to the clause 4.2

TEST DATA

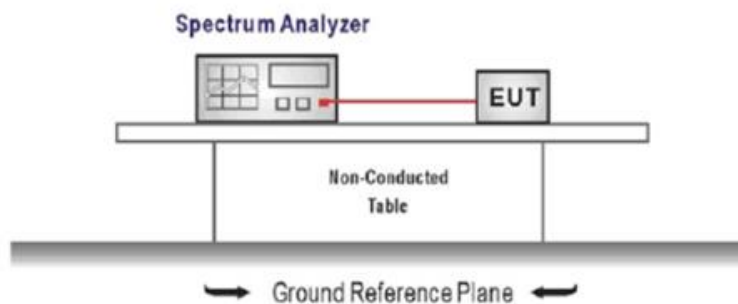
Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed **Not Applicable**

TEST DATA

Refer to the appendix report

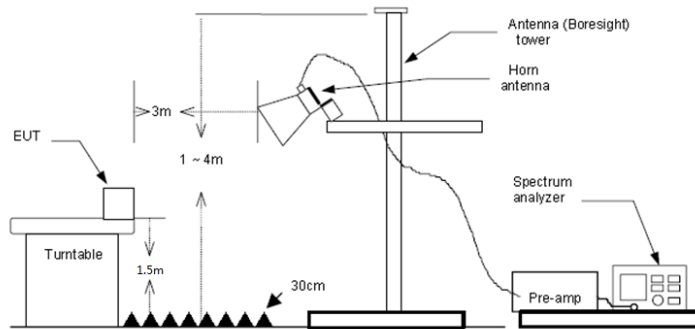
5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.7 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Type	802.11b		Test channel		CH01		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	44.96	27.86	3.95	41.18	20.00	55.59	74.00	-18.41	Peak
2	2390.01	45.01	27.54	4.08	41.11	20.00	55.52	74.00	-18.48	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	33.01	27.86	3.95	41.18	20.00	43.64	54.00	-10.36	Average
2	2390.01	33.15	27.54	4.08	41.11	20.00	43.66	54.00	-10.34	Average
Type	802.11b		Test channel		CH01		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	44.94	27.86	3.95	41.18	20.00	55.57	74.00	-18.43	Peak
2	2390.01	45.02	27.54	4.08	41.11	20.00	55.53	74.00	-18.47	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	33.03	27.86	3.95	41.18	20.00	43.66	54.00	-10.34	Average
2	2390.01	33.83	27.54	4.08	41.11	20.00	44.34	54.00	-9.66	Average

Type	802.11b		Test channel		CH11		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	44.94	27.33	4.18	41.04	20.00	55.41	74.00	-18.59	Peak
2	2500.00	44.38	27.30	4.20	41.02	20.00	54.86	74.00	-19.14	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	32.82	27.33	4.18	41.04	20.00	43.29	54.00	-10.71	Average
2	2500.00	32.72	27.30	4.20	41.02	20.00	43.20	54.00	-10.80	Average
Type	802.11b		Test channel		CH11		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	43.90	27.33	4.18	41.04	20.00	54.37	74.00	-19.63	Peak
2	2500.00	44.61	27.30	4.20	41.02	20.00	55.09	74.00	-18.91	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	32.71	27.33	4.18	41.04	20.00	43.18	54.00	-10.82	Average
2	2500.00	32.72	27.30	4.20	41.02	20.00	43.20	54.00	-10.80	Average

Type	802.11g		Test channel		CH01	Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	44.17	27.86	3.95	41.18	20.00	54.80	74.00	-19.20	Peak
2	2390.01	53.92	27.54	4.08	41.11	20.00	64.43	74.00	-9.57	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	32.79	27.86	3.95	41.18	20.00	43.42	54.00	-10.58	Average
2	2390.01	37.75	27.54	4.08	41.11	20.00	48.26	54.00	-5.74	Average
Type	802.11g		Test channel		CH01	Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	43.81	27.86	3.95	41.18	20.00	54.44	74.00	-19.56	Peak
2	2390.01	57.00	27.54	4.08	41.11	20.00	67.51	74.00	-6.49	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	32.75	27.86	3.95	41.18	20.00	43.38	54.00	-10.62	Average
2	2390.01	39.47	27.54	4.08	41.11	20.00	49.98	54.00	-4.02	Average

Type	802.11g		Test channel		CH11	Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	53.41	27.33	4.18	41.04	20.00	63.88	74.00	-10.12	Peak
2	2500.00	43.71	27.30	4.20	41.02	20.00	54.19	74.00	-19.81	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	36.52	27.33	4.18	41.04	20.00	46.99	54.00	-7.01	Average
2	2500.00	32.47	27.30	4.20	41.02	20.00	42.95	54.00	-11.05	Average
Type	802.11g		Test channel		CH11	Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	54.90	27.33	4.18	41.04	20.00	65.37	74.00	-8.63	Peak
2	2500.00	44.24	27.30	4.20	41.02	20.00	54.72	74.00	-19.28	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	36.41	27.33	4.18	41.04	20.00	46.88	54.00	-7.12	Average
2	2500.00	32.27	27.30	4.20	41.02	20.00	42.75	54.00	-11.25	Average

Type		802.11n(HT20)		Test channel		CH01		Polarity		Horizontal	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2310.00	44.28	27.86	3.95	41.18	20.00	54.91	74.00	-19.09	Peak	
2	2390.01	57.25	27.54	4.08	41.11	20.00	67.76	74.00	-6.24	Peak	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2310.00	33.07	27.86	3.95	41.18	20.00	43.70	54.00	-10.30	Average	
2	2390.01	40.47	27.54	4.08	41.11	20.00	50.98	54.00	-3.02	Average	
Type		802.11n(HT20)		Test channel		CH01		Polarity		Vertical	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2310.00	43.80	27.86	3.95	41.18	20.00	54.43	74.00	-19.57	Peak	
2	2390.01	60.74	27.54	4.08	41.11	20.00	71.25	74.00	-2.75	Peak	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2310.00	33.03	27.86	3.95	41.18	20.00	43.66	54.00	-10.34	Average	
2	2390.01	42.70	27.54	4.08	41.11	20.00	53.21	54.00	-0.79	Average	

Type		802.11n(HT20)		Test channel		CH11		Polarity		Horizontal	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2483.49	54.56	27.33	4.18	41.04	20.00	65.03	74.00	-8.97	Peak	
2	2500.00	44.03	27.30	4.20	41.02	20.00	54.51	74.00	-19.49	Peak	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2483.49	38.89	27.33	4.18	41.04	20.00	49.36	54.00	-4.64	Average	
2	2500.00	32.14	27.30	4.20	41.02	20.00	42.62	54.00	-11.38	Average	
Type		802.11n(HT20)		Test channel		CH11		Polarity		Vertical	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2483.49	56.01	27.33	4.18	41.04	20.00	66.48	74.00	-7.52	Peak	
2	2500.00	43.97	27.30	4.20	41.02	20.00	54.45	74.00	-19.55	Peak	
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark	
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit		
1	2483.49	38.52	27.33	4.18	41.04	20.00	48.99	54.00	-5.01	Average	
2	2500.00	32.10	27.30	4.20	41.02	20.00	42.58	54.00	-11.42	Average	

Type	802.11n(HT40)			Test channel	CH03	Polarity	Horizontal			
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2310.00	43.82	27.86	3.95	41.18	20.00	54.45	74.00	-19.55	Peak
2	2389.99	57.28	27.54	4.08	41.11	20.00	67.79	74.00	-6.21	Peak
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2310.00	33.20	27.86	3.95	41.18	20.00	43.83	54.00	-10.17	Average
2	2389.99	37.83	27.54	4.08	41.11	20.00	48.34	54.00	-5.66	Average

Type	802.11n(HT40)			Test channel	CH03	Polarity	Vertical			
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2310.00	43.95	27.86	3.95	41.18	20.00	54.58	74.00	-19.42	Peak
2	2389.99	50.70	27.54	4.08	41.11	20.00	61.21	74.00	-12.79	Peak
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2310.00	33.29	27.86	3.95	41.18	20.00	43.92	54.00	-10.08	Average
2	2389.99	34.30	27.54	4.08	41.11	20.00	44.81	54.00	-9.19	Average

Type	802.11n(HT40)			Test channel	CH09	Polarity	Horizontal			
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2483.50	55.15	27.33	4.18	41.04	20.00	65.62	74.00	-8.38	Peak
2	2500.00	43.72	27.30	4.20	41.02	20.00	54.20	74.00	-19.80	Peak
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2483.50	41.66	27.33	4.18	41.04	20.00	52.13	54.00	-1.87	Average
2	2500.00	32.84	27.30	4.20	41.02	20.00	43.32	54.00	-10.68	Average

Type	802.11n(HT40)			Test channel	CH09	Polarity	Vertical			
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2483.50	53.52	27.33	4.18	41.04	20.00	63.99	74.00	-10.01	Peak
2	2500.00	42.62	27.30	4.20	41.02	20.00	53.10	74.00	-20.90	Peak
Mark	Frequency	Reading	Antenna	Cable	Preamp	Aux	Level	Limit	Over	Remark
	MHz	dBuV/m	dB	dB	dB	dB	dBuV/m	dBuV/m	limit	
1	2483.50	34.23	27.33	4.18	41.04	20.00	44.70	54.00	-9.30	Average
2	2500.00	32.87	27.30	4.20	41.02	20.00	43.35	54.00	-10.65	Average

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

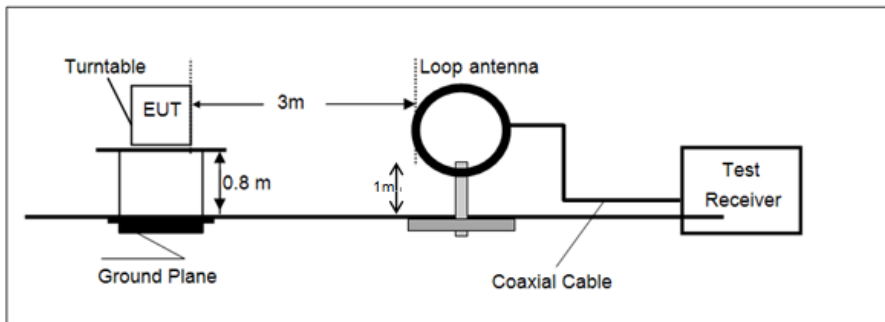
- 9 kHz ~ 30 MHz



- 30 MHz ~ 1 GHz

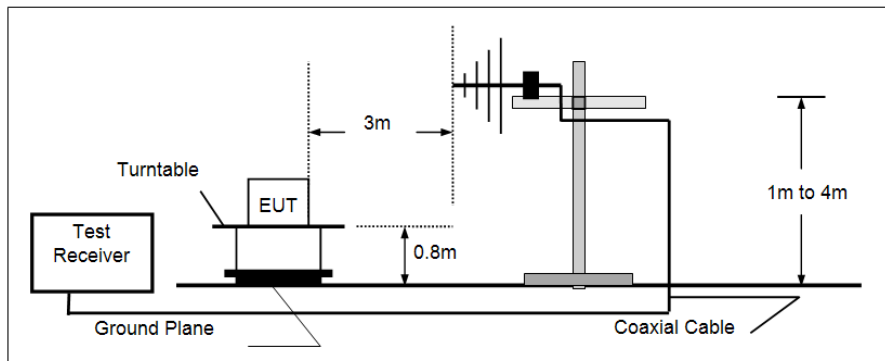

- Above 1 GHz

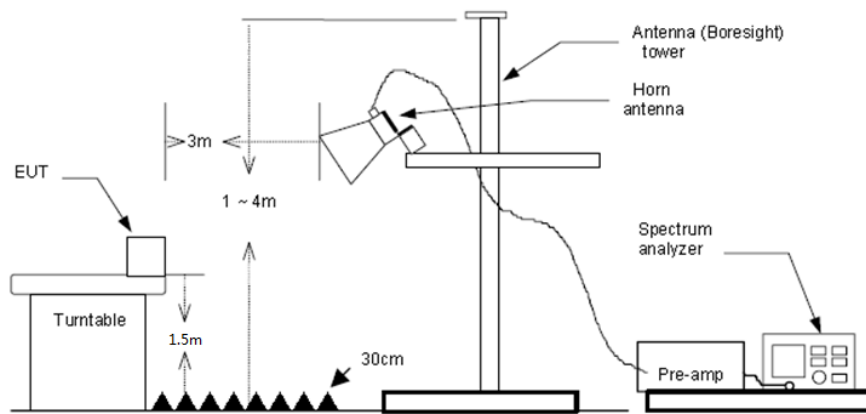

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 - For average measurement:
 - VBW=10Hz, When duty cycle is no less than 98 percent
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.7 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

Passed **Not Applicable**

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

For 9 kHz ~ 30 MHz

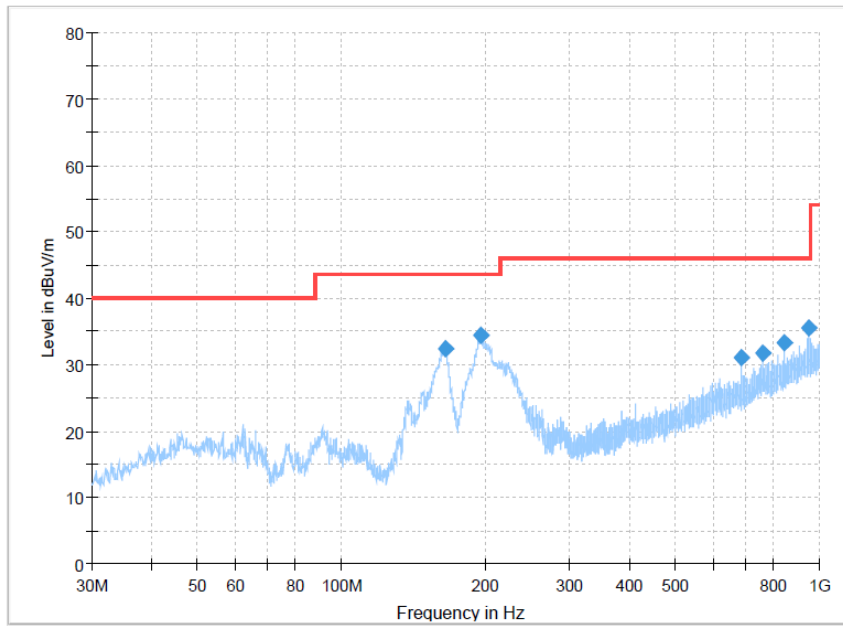
The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH06 of 802.11n(HT20) which it was worst case, so only show the worst case's data on this report.

Polarization:

Horizontal




Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
164.9513	32.39	43.50	11.11	100.0	H	135.0	-12.9
196.1125	34.40	43.50	9.10	100.0	H	277.0	-9.7
687.5388	31.11	46.00	14.89	100.0	H	166.0	2.5
763.0775	31.70	46.00	14.30	100.0	H	0.0	4.4
844.0725	33.33	46.00	12.67	100.0	H	0.0	5.6
948.4688	35.42	46.00	10.58	100.0	H	261.0	7.5

Polarization:

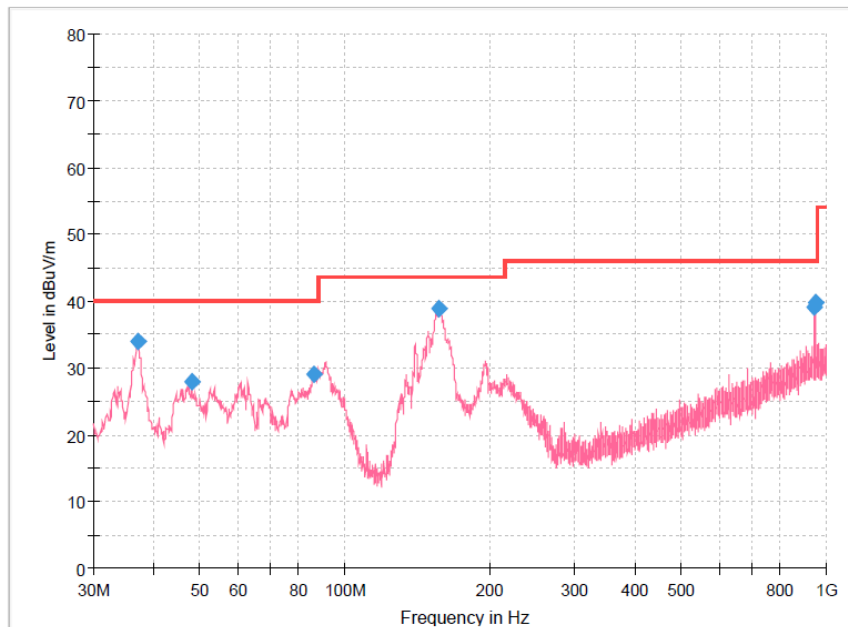Vertical



Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.0325	34.06	40.00	5.94	100.0	V	8.0	-10.5
47.9450	27.97	40.00	12.03	100.0	V	61.0	-8.4
86.1388	29.08	40.00	10.92	100.0	V	299.0	-13.9
157.3125	38.88	43.50	4.62	100.0	V	103.0	-13.3
945.1950	39.19	46.00	6.81	100.0	V	0.0	7.5
948.4688	39.88	46.00	6.12	100.0	V	247.0	7.5

For 1 GHz ~ 25 GHz

Type	802.11b	Test channel	CH01	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	58.60	28.50	4.53	40.95	50.68	74.00	-23.32	Peak
2	4821.76	47.59	31.26	5.89	40.28	44.46	74.00	-29.54	Peak
3	8996.12	44.04	37.99	8.40	40.00	50.43	74.00	-23.57	Peak
4	11486.41	40.74	40.49	9.19	40.21	50.21	74.00	-23.79	Peak
Type	802.11b	Test channel	CH01	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	57.64	28.50	4.53	40.95	49.72	74.00	-24.28	Peak
2	4821.76	46.38	31.26	5.89	40.28	43.25	74.00	-30.75	Peak
3	4983.99	54.49	31.34	5.99	40.21	51.61	74.00	-22.39	Peak
4	8859.77	44.57	37.90	8.36	40.06	50.77	74.00	-23.23	Peak
Type	802.11b	Test channel	CH06	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2987.92	58.70	28.50	4.53	40.96	50.77	74.00	-23.23	Peak
2	4983.99	53.00	31.34	5.99	40.21	50.12	74.00	-23.88	Peak
3	8859.77	43.56	37.90	8.36	40.06	49.76	74.00	-24.24	Peak
4	8996.12	44.04	37.99	8.40	40.00	50.43	74.00	-23.57	Peak
Type	802.11b	Test channel	CH06	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3316.62	47.68	28.30	4.84	40.80	40.02	74.00	-33.98	Peak
2	3983.75	50.01	29.77	5.41	40.33	44.86	74.00	-29.14	Peak
3	4664.81	45.39	31.03	5.86	40.34	41.94	74.00	-32.06	Peak
4	5338.58	49.16	31.38	6.28	39.83	46.99	74.00	-27.01	Peak
Type	802.11b	Test channel	CH11	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	46.24	29.77	5.41	40.33	41.09	74.00	-32.91	Peak
2	4920.96	44.51	31.20	5.95	40.23	41.43	74.00	-32.57	Peak
3	4983.99	50.28	31.34	5.99	40.21	47.40	74.00	-26.60	Peak
4	8837.24	45.21	37.87	8.35	40.07	51.36	74.00	-22.64	Peak
Type	802.11b	Test channel	CH11	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3993.90	50.18	29.79	5.43	40.32	45.08	74.00	-28.92	Peak
2	4664.81	46.43	31.03	5.86	40.34	42.98	74.00	-31.02	Peak
3	4920.96	44.87	31.20	5.95	40.23	41.79	74.00	-32.21	Peak
4	6992.14	46.15	35.07	7.37	39.47	49.12	74.00	-24.88	Peak

Type	802.11g		Test channel	CH01		Polarity	Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3143.98	50.99	28.89	4.67	40.85	43.70	74.00	-30.30	Peak
2	3993.90	47.23	29.79	5.43	40.32	42.13	74.00	-31.87	Peak
3	4834.05	45.05	31.23	5.90	40.27	41.91	74.00	-32.09	Peak
4	4996.69	50.90	31.39	6.00	40.20	48.09	74.00	-25.91	Peak
Type	802.11g		Test channel	CH01		Polarity	Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	51.13	29.77	5.41	40.33	45.98	74.00	-28.02	Peak
2	4652.95	46.09	31.01	5.86	40.35	42.61	74.00	-31.39	Peak
3	4821.76	44.11	31.26	5.89	40.28	40.98	74.00	-33.02	Peak
4	5325.01	48.38	31.35	6.26	39.85	46.14	74.00	-27.86	Peak
Type	802.11g		Test channel	CH06		Polarity	Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3325.07	47.25	28.30	4.84	40.80	39.59	74.00	-34.41	Peak
2	3993.90	46.12	29.79	5.43	40.32	41.02	74.00	-32.98	Peak
3	6561.03	41.99	34.12	7.19	39.26	44.04	74.00	-29.96	Peak
4	8527.85	41.94	37.26	8.25	40.19	47.26	74.00	-26.74	Peak
Type	802.11g		Test channel	CH06		Polarity	Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	49.05	29.77	5.41	40.33	43.90	74.00	-30.10	Peak
2	4652.95	45.95	31.01	5.86	40.35	42.47	74.00	-31.53	Peak
3	5311.47	47.60	31.32	6.25	39.86	45.31	74.00	-28.69	Peak
4	7941.19	42.07	36.85	8.03	39.95	47.00	74.00	-27.00	Peak
Type	802.11g		Test channel	CH11		Polarity	Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3151.99	50.18	28.90	4.69	40.85	42.92	74.00	-31.08	Peak
2	4920.96	44.49	31.20	5.95	40.23	41.41	74.00	-32.59	Peak
3	6478.05	43.04	33.77	7.05	39.23	44.63	74.00	-29.37	Peak
4	9204.60	41.30	38.83	8.48	39.92	48.69	74.00	-25.31	Peak
Type	802.11g		Test channel	CH11		Polarity	Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3993.90	49.50	29.79	5.43	40.32	44.40	74.00	-29.60	Peak
2	4652.95	45.24	31.01	5.86	40.35	41.76	74.00	-32.24	Peak
3	5311.47	46.30	31.32	6.25	39.86	44.01	74.00	-29.99	Peak
4	6974.36	43.58	35.00	7.38	39.46	46.50	74.00	-27.50	Peak

Type	802.11n(HT20)		Test channel		CH01	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	48.53	29.77	5.41	40.33	43.38	74.00	-30.62	Peak
2	4983.99	47.46	31.34	5.99	40.21	44.58	74.00	-29.42	Peak
3	7009.96	42.99	35.14	7.37	39.48	46.02	74.00	-27.98	Peak
4	10348.05	42.49	39.74	8.88	40.11	51.00	74.00	-23.00	Peak
Type	802.11n(HT20)		Test channel		CH01	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3983.75	49.24	29.77	5.41	40.33	44.09	74.00	-29.91	Peak
2	4821.76	44.45	31.26	5.89	40.28	41.32	74.00	-32.68	Peak
3	6974.36	44.26	35.00	7.38	39.46	47.18	74.00	-26.82	Peak
4	11486.41	41.25	40.49	9.19	40.21	50.72	74.00	-23.28	Peak
Type	802.11n(HT20)		Test channel		CH06	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3993.90	46.02	29.79	5.43	40.32	40.92	74.00	-33.08	Peak
2	4983.99	49.35	31.34	5.99	40.21	46.47	74.00	-27.53	Peak
3	7413.73	42.32	36.20	7.72	39.91	46.33	74.00	-27.67	Peak
4	9251.58	41.41	39.10	8.50	39.90	49.11	74.00	-24.89	Peak
Type	802.11n(HT20)		Test channel		CH06	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3747.66	49.86	29.39	5.24	40.68	43.81	74.00	-30.19	Peak
2	4004.08	50.91	29.81	5.44	40.31	45.85	74.00	-28.15	Peak
3	5325.01	48.03	31.35	6.26	39.85	45.79	74.00	-28.21	Peak
4	6974.36	44.76	35.00	7.38	39.46	47.68	74.00	-26.32	Peak
Type	802.11n(HT20)		Test channel		CH11	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2995.54	58.19	28.50	4.53	40.95	50.27	74.00	-23.73	Peak
2	3983.75	47.64	29.77	5.41	40.33	42.49	74.00	-31.51	Peak
3	4996.69	50.73	31.39	6.00	40.20	47.92	74.00	-26.08	Peak
4	7527.83	42.96	36.14	7.81	39.94	46.97	74.00	-27.03	Peak
Type	802.11n(HT20)		Test channel		CH11	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3993.90	51.51	29.79	5.43	40.32	46.41	74.00	-27.59	Peak
2	4501.49	46.11	30.60	5.87	40.43	42.15	74.00	-31.85	Peak
3	4920.96	43.80	31.20	5.95	40.23	40.72	74.00	-33.28	Peak
4	5325.01	49.14	31.35	6.26	39.85	46.90	74.00	-27.10	Peak

Type	802.11n(HT40)		Test channel		CH03	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4004.08	47.70	29.81	5.44	40.31	42.64	74.00	-31.36	Peak
2	4996.69	48.76	31.39	6.00	40.20	45.95	74.00	-28.05	Peak
3	7470.56	43.21	36.20	7.76	39.92	47.25	74.00	-26.75	Peak
4	10587.85	40.78	40.00	8.96	40.29	49.45	74.00	-24.55	Peak
Type	802.11n(HT40)		Test channel		CH03	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3993.90	49.78	29.79	5.43	40.32	44.68	74.00	-29.32	Peak
2	4652.95	46.62	31.01	5.86	40.35	43.14	74.00	-30.86	Peak
3	5338.58	47.43	31.38	6.28	39.83	45.26	74.00	-28.74	Peak
4	6992.14	44.92	35.07	7.37	39.47	47.89	74.00	-26.11	Peak
Type	802.11n(HT40)		Test channel		CH06	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3143.98	50.40	28.89	4.67	40.85	43.11	74.00	-30.89	Peak
2	4983.99	45.49	31.34	5.99	40.21	42.61	74.00	-31.39	Peak
3	7451.57	42.38	36.20	7.75	39.92	46.41	74.00	-27.59	Peak
4	10916.26	42.11	40.50	8.83	40.62	50.82	74.00	-23.18	Peak
Type	802.11n(HT40)		Test channel		CH06	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4004.08	51.83	29.81	5.44	40.31	46.77	74.00	-27.23	Peak
2	4664.81	44.97	31.03	5.86	40.34	41.52	74.00	-32.48	Peak
3	5325.01	48.38	31.35	6.26	39.85	46.14	74.00	-27.86	Peak
4	10427.37	42.71	39.93	8.94	40.16	51.42	74.00	-22.58	Peak
Type	802.11n(HT40)		Test channel		CH09	Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3143.98	47.69	28.89	4.67	40.85	40.40	74.00	-33.60	Peak
2	3445.70	49.75	28.67	4.97	40.87	42.52	74.00	-31.48	Peak
3	3983.75	47.25	29.77	5.41	40.33	42.10	74.00	-31.90	Peak
4	4996.69	50.23	31.39	6.00	40.20	47.42	74.00	-26.58	Peak
Type	802.11n(HT40)		Test channel		CH09	Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3143.98	56.52	28.89	4.67	40.85	49.23	74.00	-24.77	Peak
2	3983.75	49.22	29.77	5.41	40.33	44.07	74.00	-29.93	Peak
3	4664.81	45.82	31.03	5.86	40.34	42.37	74.00	-31.63	Peak
4	5325.01	50.03	31.35	6.26	39.85	47.79	74.00	-26.21	Peak

6. TEST SETUP PHOTOS

Refer to the test report No.: CHTW24100048

7. EXTERNAL AND INTERNAL PHOTOS

Refer to the test report No.: CHTW24100045

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2407073401W	Radio Specification	WIFI 2.4G
Test sample No.	YPHT24070734003	Model No.	MT-100
Start test date	2024-08-22	Finish date	2024-09-30
Temperature	24.9°C	Humidity	54%
Test Engineer	Chenxin Ling	Auditor	Xiaodong Zheo




Appendix clause	Test item	Result
A	Conducted Peak Output Power	Pass
B	Power Spectral Density	Pass
C	6 dB Bandwidth	Pass
D	99% Occupied Bandwidth	Pass
E	Duty Cycle	Pass
F	Band edge and Spurious Emissions (conducted)	Pass




Appendix A: Conducted Peak Output Power




Type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	01	16.52	14.84	≤ 30.00	Pass
	06	16.98	15.23		
	11	16.99	15.25		
802.11g	01	18.31	16.60	≤ 30.00	Pass
	06	18.63	16.94		
	11	17.98	16.29		
802.11n (HT20)	01	18.37	16.68	≤ 30.00	Pass
	06	18.56	16.86		
	11	18.03	16.37		
802.11n(HT40)	03	17.87	16.15	≤ 30.00	Pass
	06	17.30	15.63		
	09	17.53	15.80		

Appendix B: Power Spectral Density

Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	0.61	≤8.00	Pass
	06	5.75		
	11	1.08		
802.11g	01	-4.91	≤8.00	Pass
	06	-5.06		
	11	-5.58		
802.11n(HT20)	01	-5.49	≤8.00	Pass
	06	-4.73		
	11	-5.29		
802.11n(HT40)	03	-7.10	≤8.00	Pass
	06	-8.60		
	09	-9.18		

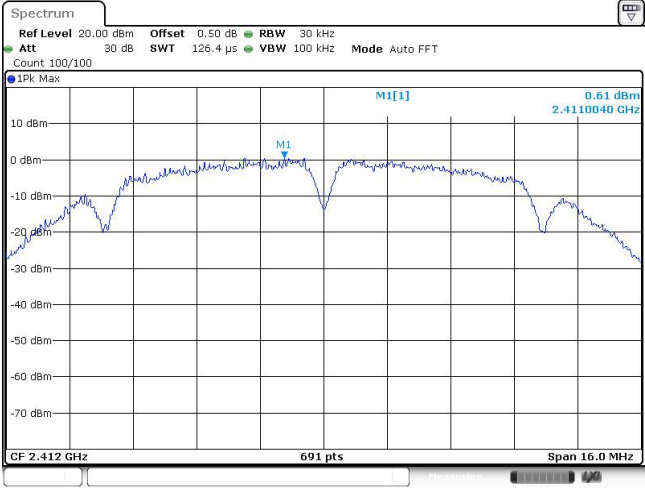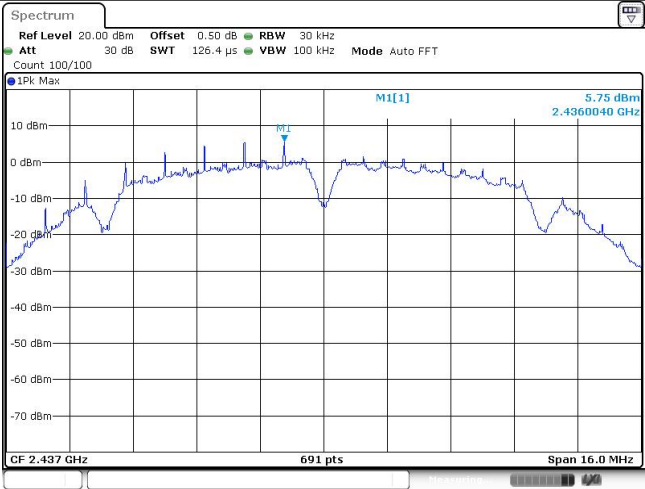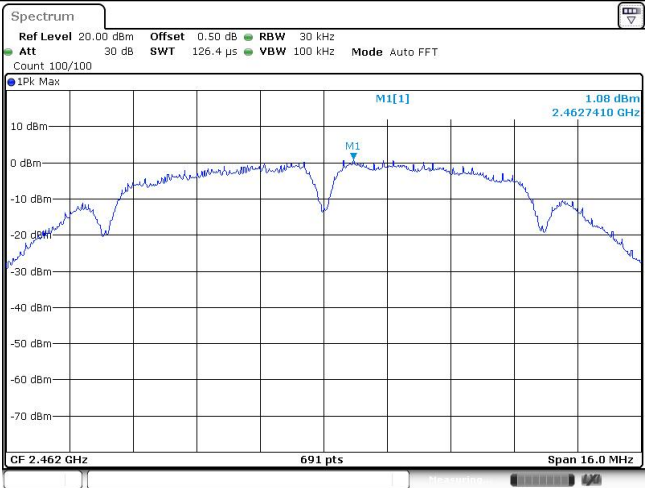Type:		802.11 b
CH01	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 126.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] 0.61 dBm 2.4110040 GHz</p> <p>CF 2.412 GHz 691 pts Span 16.0 MHz</p> <p>Date: 22 AUG 2024 14:54:45</p>	
CH06	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 126.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] 5.75 dBm 2.4360040 GHz</p> <p>CF 2.437 GHz 691 pts Span 16.0 MHz</p> <p>Date: 22 AUG 2024 14:57:24</p>	
CH11	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 126.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] 1.08 dBm 2.4627410 GHz</p> <p>CF 2.462 GHz 691 pts Span 16.0 MHz</p> <p>Date: 22 AUG 2024 14:59:40</p>	

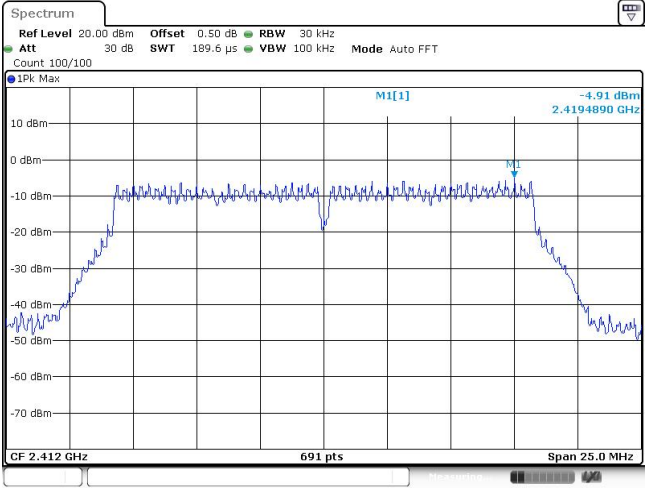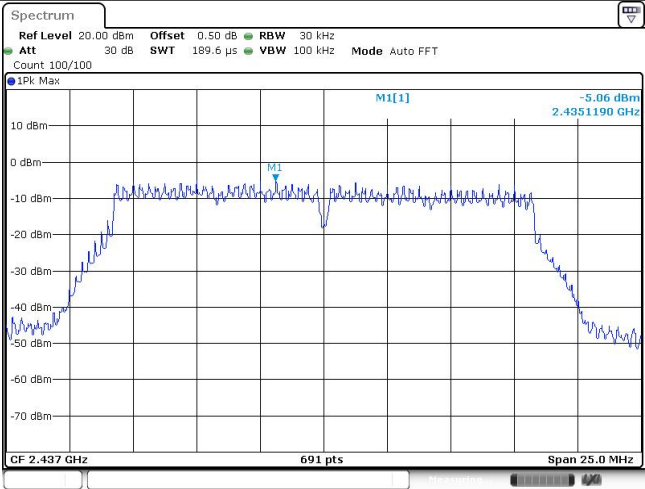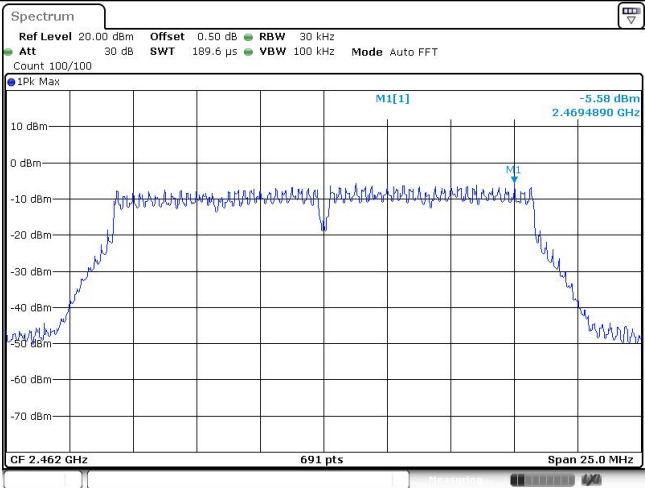Type:		802.11 g
CH01	 <p>Date: 30.SEP.2024 10:20:03</p>	
CH06	 <p>Date: 30.SEP.2024 10:21:57</p>	
CH11	 <p>Date: 30.SEP.2024 10:23:33</p>	

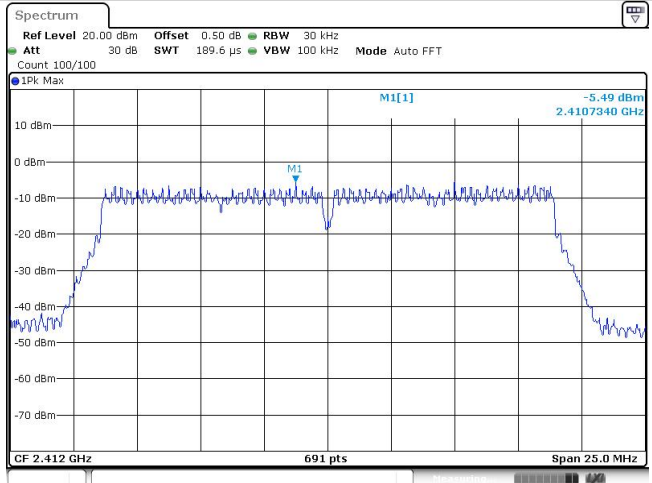
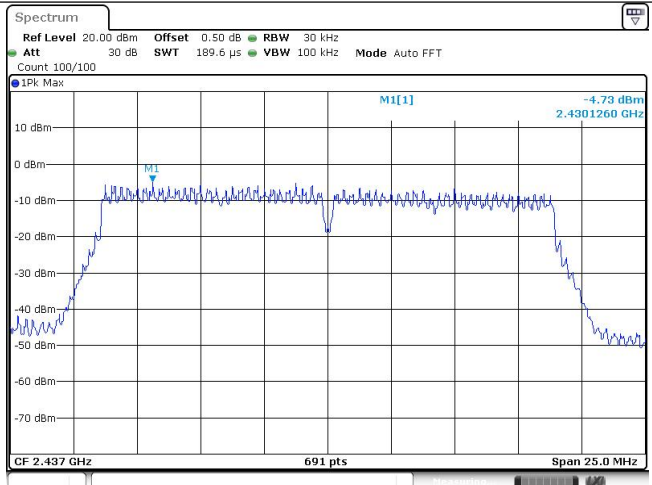
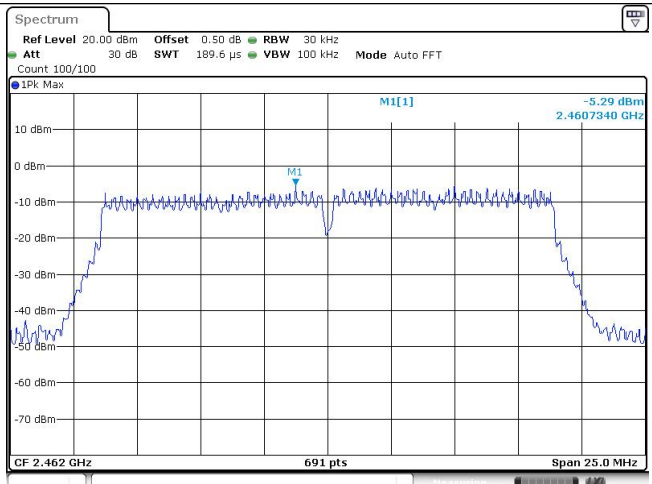
Type:		802.11n(HT20)
CH01	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 189.6 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -5.49 dBm 2.4107340 GHz</p> <p>CF 2.412 GHz 691 pts Span 25.0 MHz</p> <p>Date: 30.SEP.2024 10:25:33</p>	
CH06	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 189.6 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -4.73 dBm 2.4301260 GHz</p> <p>CF 2.437 GHz 691 pts Span 25.0 MHz</p> <p>Date: 30.SEP.2024 10:27:33</p>	
CH11	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 189.6 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -5.29 dBm 2.4607340 GHz</p> <p>CF 2.462 GHz 691 pts Span 25.0 MHz</p> <p>Date: 30.SEP.2024 10:29:09</p>	




Type:		802.11n(HT40)
CH03		<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 442.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -7.10 dBm 2.4307550 GHz</p> <p>CF 2.422 GHz 691 pts Span 55.0 MHz</p> <p>Date: 30.SEP.2024 10:31:11</p>
CH06		<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 442.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -8.60 dBm 2.4319860 GHz</p> <p>CF 2.437 GHz 691 pts Span 55.0 MHz</p> <p>Date: 30.SEP.2024 10:33:00</p>
CH09		<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 30 kHz Att 30 dB SWT 442.4 μs VBW 100 kHz Mode Auto FFT Count 100/100</p> <p>IPK Max</p> <p>M1[1] -9.18 dBm 2.4607550 GHz</p> <p>CF 2.452 GHz 691 pts Span 55.0 MHz</p> <p>Date: 30.SEP.2024 10:34:27</p>




Appendix C: 6dB bandwidth

Type	Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	01	9.60	≥0.5	Pass
	06	8.64		
	11	9.09		
802.11g	01	16.41	≥0.5	Pass
	06	16.41		
	11	16.35		
802.11n(HT20)	01	17.64	≥0.5	Pass
	06	16.98		
	11	17.64		
802.11n(HT40)	03	35.28	≥0.5	Pass
	06	35.22		
	09	35.76		

Type:	802.11 b																												
CH01	<p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40744 GHz</td> <td>-1.52 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41251 GHz</td> <td>4.88 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.6 MHz</td> <td>-0.08 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 22 AUG 2024 14:54:26</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40744 GHz	-1.52 dBm			M2		1	2.41251 GHz	4.88 dBm			D3	M1	1	9.6 MHz	-0.08 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40744 GHz	-1.52 dBm																									
M2		1	2.41251 GHz	4.88 dBm																									
D3	M1	1	9.6 MHz	-0.08 dB																									
CH06	<p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.43244 GHz</td> <td>-1.58 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43601 GHz</td> <td>5.23 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>8.64 MHz</td> <td>-0.29 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 22 AUG 2024 14:57:06</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43244 GHz	-1.58 dBm			M2		1	2.43601 GHz	5.23 dBm			D3	M1	1	8.64 MHz	-0.29 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.43244 GHz	-1.58 dBm																									
M2		1	2.43601 GHz	5.23 dBm																									
D3	M1	1	8.64 MHz	-0.29 dB																									
CH11	<p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45795 GHz</td> <td>-0.81 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46299 GHz</td> <td>5.62 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.09 MHz</td> <td>0.27 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 22 AUG 2024 14:59:22</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45795 GHz	-0.81 dBm			M2		1	2.46299 GHz	5.62 dBm			D3	M1	1	9.09 MHz	0.27 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45795 GHz	-0.81 dBm																									
M2		1	2.46299 GHz	5.62 dBm																									
D3	M1	1	9.09 MHz	0.27 dB																									

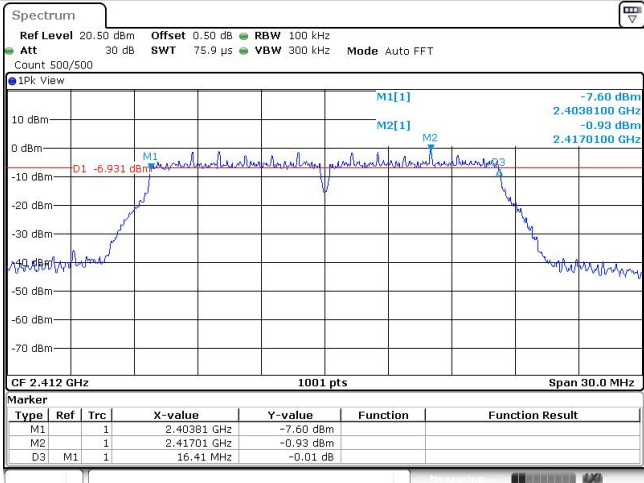
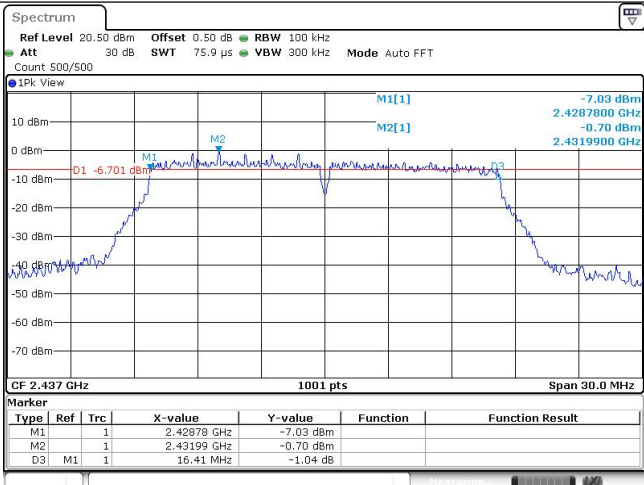
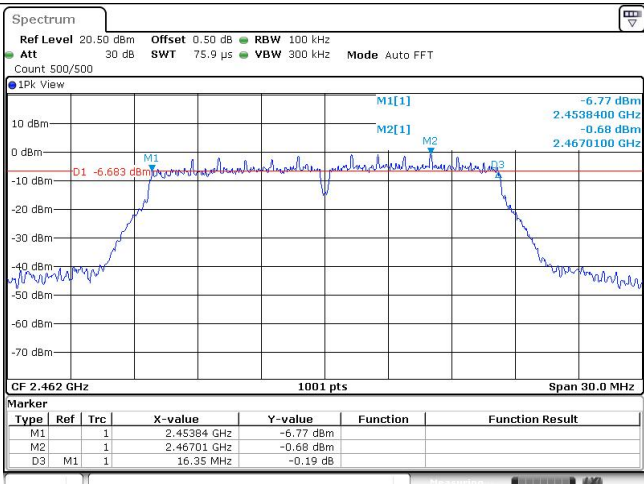
Type:	802.11 g																												
CH01	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -7.60 dBm 2.4038100 GHz M2[1] -0.93 dBm 2.4170100 GHz</p> <p>D1 -6.931 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40381 GHz</td> <td>-7.60 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41701 GHz</td> <td>-0.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.41 MHz</td> <td>-0.01 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:19:40</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40381 GHz	-7.60 dBm			M2		1	2.41701 GHz	-0.93 dBm			D3	M1	1	16.41 MHz	-0.01 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40381 GHz	-7.60 dBm																									
M2		1	2.41701 GHz	-0.93 dBm																									
D3	M1	1	16.41 MHz	-0.01 dB																									
CH06	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -7.03 dBm 2.4287800 GHz M2[1] -0.70 dBm 2.4319900 GHz</p> <p>D1 -6.701 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.42878 GHz</td> <td>-7.03 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43199 GHz</td> <td>-0.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.41 MHz</td> <td>-1.04 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:21:09</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.42878 GHz	-7.03 dBm			M2		1	2.43199 GHz	-0.70 dBm			D3	M1	1	16.41 MHz	-1.04 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.42878 GHz	-7.03 dBm																									
M2		1	2.43199 GHz	-0.70 dBm																									
D3	M1	1	16.41 MHz	-1.04 dB																									
CH11	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -6.77 dBm 2.4538400 GHz M2[1] -0.68 dBm 2.4670100 GHz</p> <p>D1 -6.683 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45384 GHz</td> <td>-6.77 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46701 GHz</td> <td>-0.68 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.35 MHz</td> <td>-0.19 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:23:15</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45384 GHz	-6.77 dBm			M2		1	2.46701 GHz	-0.68 dBm			D3	M1	1	16.35 MHz	-0.19 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45384 GHz	-6.77 dBm																									
M2		1	2.46701 GHz	-0.68 dBm																									
D3	M1	1	16.35 MHz	-0.19 dB																									

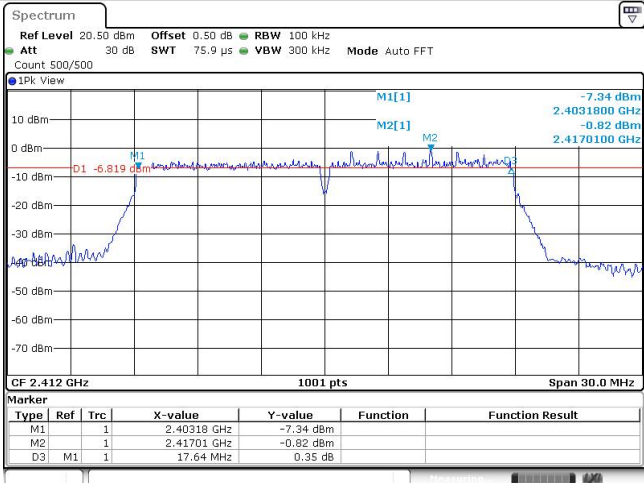
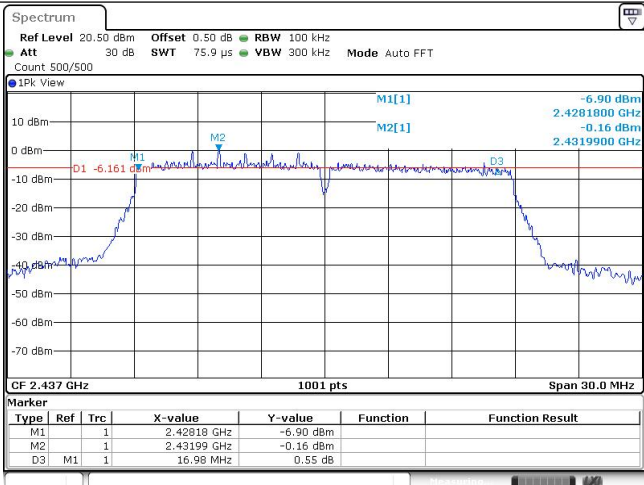
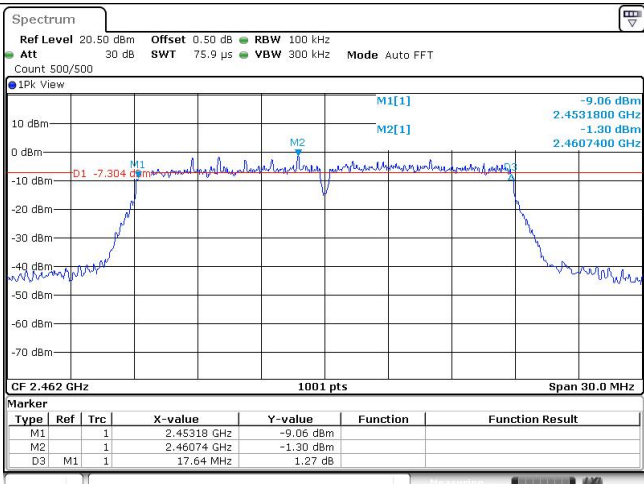
Type:	802.11n(HT20)																												
CH01	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40318 GHz</td> <td>-7.34 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41701 GHz</td> <td>-0.82 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.64 MHz</td> <td>0.35 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz Date: 30.SEP.2024 10:25:14</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40318 GHz	-7.34 dBm			M2		1	2.41701 GHz	-0.82 dBm			D3	M1	1	17.64 MHz	0.35 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40318 GHz	-7.34 dBm																									
M2		1	2.41701 GHz	-0.82 dBm																									
D3	M1	1	17.64 MHz	0.35 dB																									
CH06	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.42819 GHz</td> <td>-6.90 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43199 GHz</td> <td>-0.16 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.98 MHz</td> <td>0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz Date: 30.SEP.2024 10:27:14</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.42819 GHz	-6.90 dBm			M2		1	2.43199 GHz	-0.16 dBm			D3	M1	1	16.98 MHz	0.55 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.42819 GHz	-6.90 dBm																									
M2		1	2.43199 GHz	-0.16 dBm																									
D3	M1	1	16.98 MHz	0.55 dB																									
CH11	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>IPK View</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45318 GHz</td> <td>-9.06 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46074 GHz</td> <td>-1.30 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.64 MHz</td> <td>1.27 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz Date: 30.SEP.2024 10:28:50</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45318 GHz	-9.06 dBm			M2		1	2.46074 GHz	-1.30 dBm			D3	M1	1	17.64 MHz	1.27 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45318 GHz	-9.06 dBm																									
M2		1	2.46074 GHz	-1.30 dBm																									
D3	M1	1	17.64 MHz	1.27 dB																									

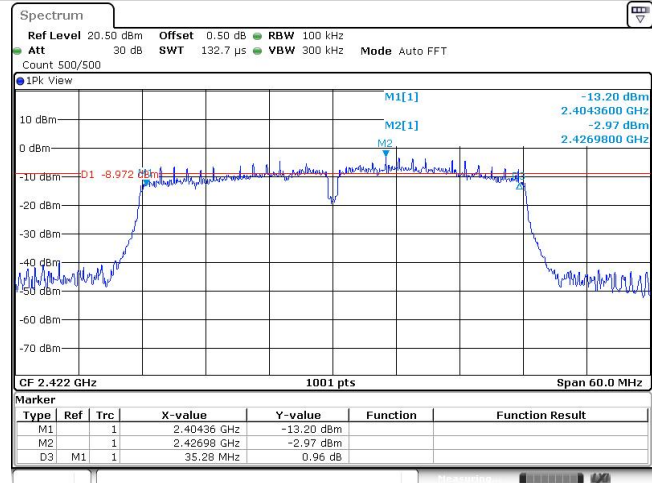
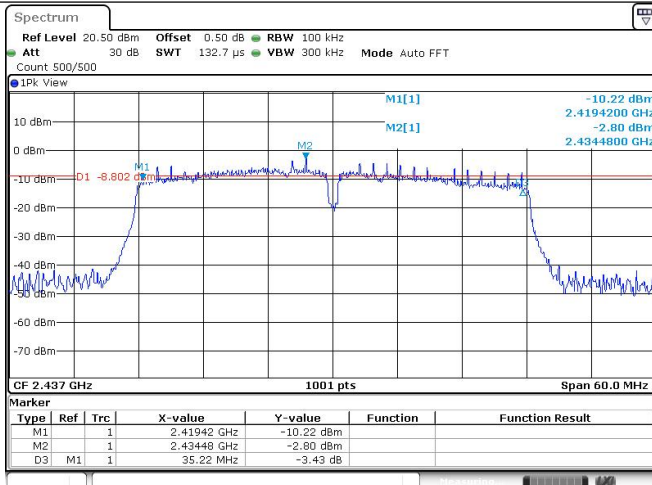
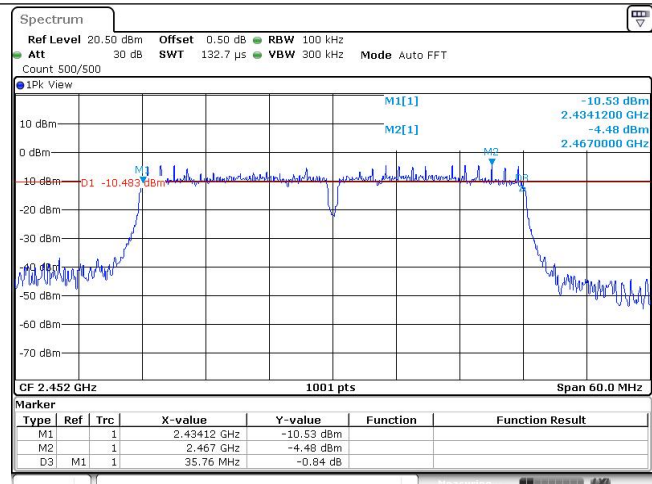
Type:	802.11n(HT40)																												
CH03	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -13.20 dBm 2.4043600 GHz M2[1] -2.97 dBm 2.4269800 GHz M2</p> <p>CF 2.422 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40436 GHz</td> <td>-13.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.42698 GHz</td> <td>-2.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.28 MHz</td> <td>0.96 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:30:53</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40436 GHz	-13.20 dBm			M2		1	2.42698 GHz	-2.97 dBm			D3	M1	1	35.28 MHz	0.96 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40436 GHz	-13.20 dBm																									
M2		1	2.42698 GHz	-2.97 dBm																									
D3	M1	1	35.28 MHz	0.96 dB																									
CH06	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -10.22 dBm 2.4194200 GHz M2[1] -2.80 dBm 2.4344800 GHz M2</p> <p>CF 2.437 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.41942 GHz</td> <td>-10.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43448 GHz</td> <td>-2.80 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.22 MHz</td> <td>-3.43 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:36:17</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.41942 GHz	-10.22 dBm			M2		1	2.43448 GHz	-2.80 dBm			D3	M1	1	35.22 MHz	-3.43 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.41942 GHz	-10.22 dBm																									
M2		1	2.43448 GHz	-2.80 dBm																									
D3	M1	1	35.22 MHz	-3.43 dB																									
CH09	 <p>Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -10.53 dBm 2.4341200 GHz M2[1] -4.48 dBm 2.4670000 GHz M2</p> <p>CF 2.452 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.43412 GHz</td> <td>-10.53 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.467 GHz</td> <td>-4.48 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.76 MHz</td> <td>-0.84 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 30.SEP.2024 10:34:09</p>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43412 GHz	-10.53 dBm			M2		1	2.467 GHz	-4.48 dBm			D3	M1	1	35.76 MHz	-0.84 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.43412 GHz	-10.53 dBm																									
M2		1	2.467 GHz	-4.48 dBm																									
D3	M1	1	35.76 MHz	-0.84 dB																									




Appendix D: 99% Occupied Bandwidth

Type	Channel	99% Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	12.56	-	Pass
	06	12.26		
	11	12.47		
802.11g	01	16.96	-	Pass
	06	16.90		
	11	16.90		
802.11n(HT20)	01	17.86	-	Pass
	06	17.77		
	11	17.80		
802.11n(HT40)	03	35.84	-	Pass
	06	35.96		
	09	36.20		

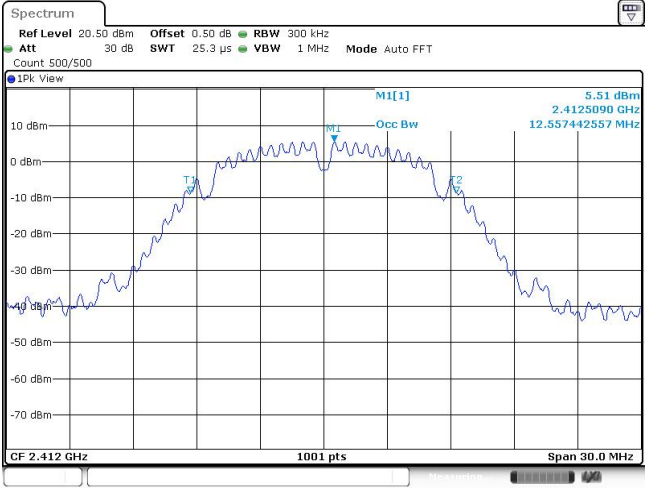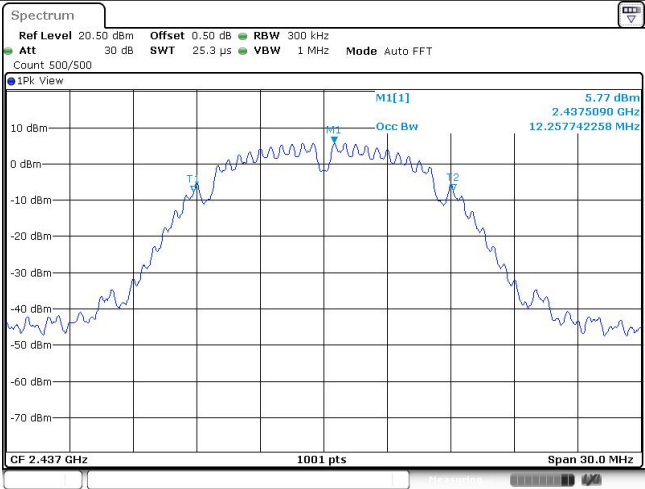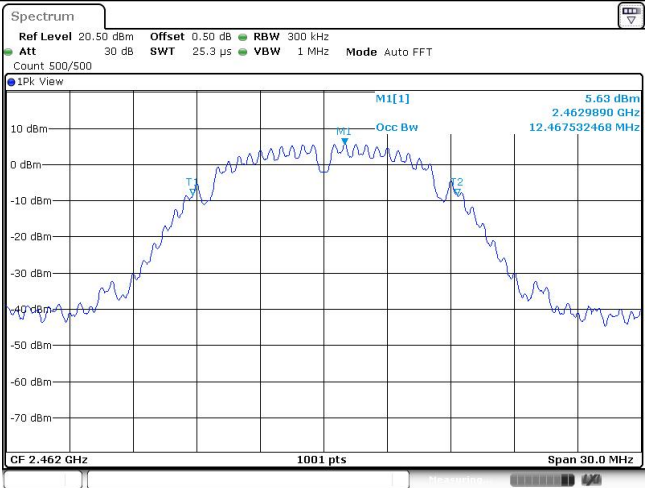Type:		802.11 b
CH01	 <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>5.51 dBm 2.4125090 GHz 12.557442557 MHz</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 22 AUG 2024 14:54:34</p>	
CH06	 <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>5.77 dBm 2.4375090 GHz 12.257742258 MHz</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 22 AUG 2024 14:57:13</p>	
CH11	 <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>5.63 dBm 2.4629890 GHz 12.467532468 MHz</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 22 AUG 2024 14:59:29</p>	

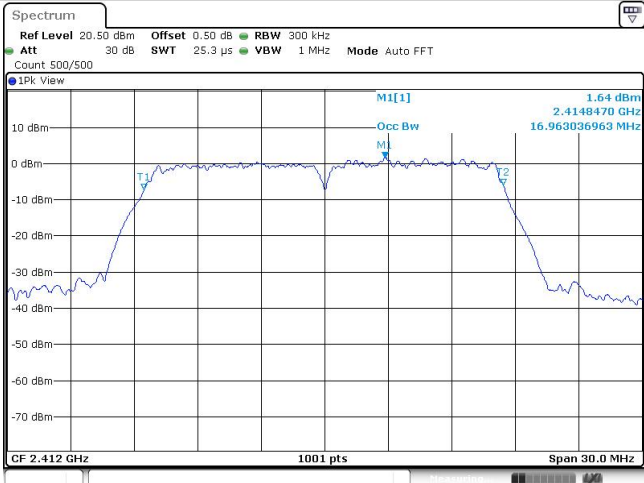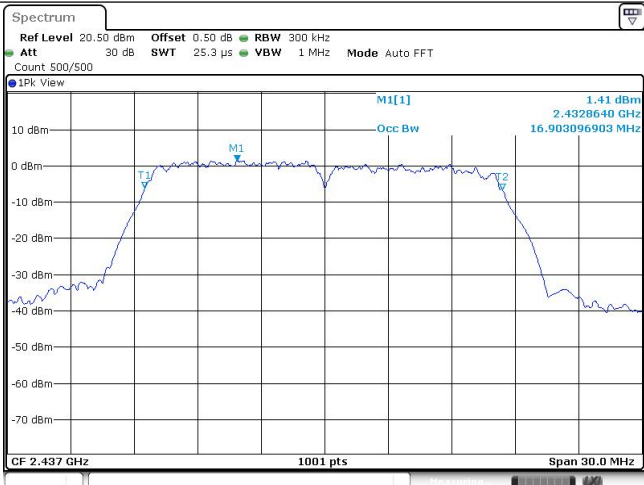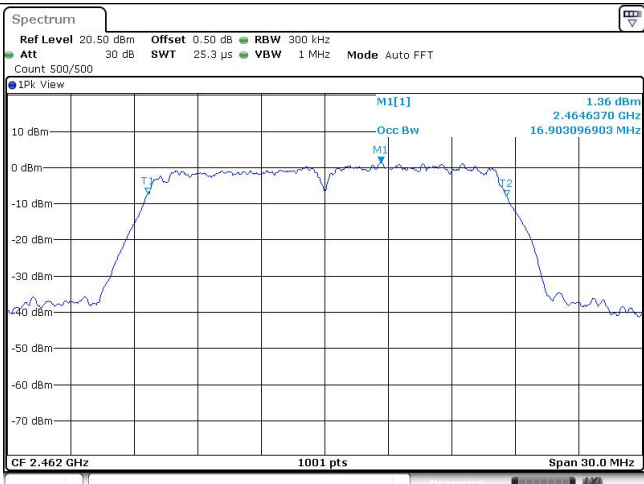Type:		802.11 g
CH01	 <p>Spectrum plot for CH01. The plot shows a signal peak at 2.4148470 GHz with a power level of 1.64 dBm. The plot includes parameters like Ref Level, Att, Offset, RBW, and Span.</p>	
CH06	 <p>Spectrum plot for CH06. The plot shows a signal peak at 2.4328640 GHz with a power level of 1.41 dBm. The plot includes parameters like Ref Level, Att, Offset, RBW, and Span.</p>	
CH11	 <p>Spectrum plot for CH11. The plot shows a signal peak at 2.4646370 GHz with a power level of 1.36 dBm. The plot includes parameters like Ref Level, Att, Offset, RBW, and Span.</p>	

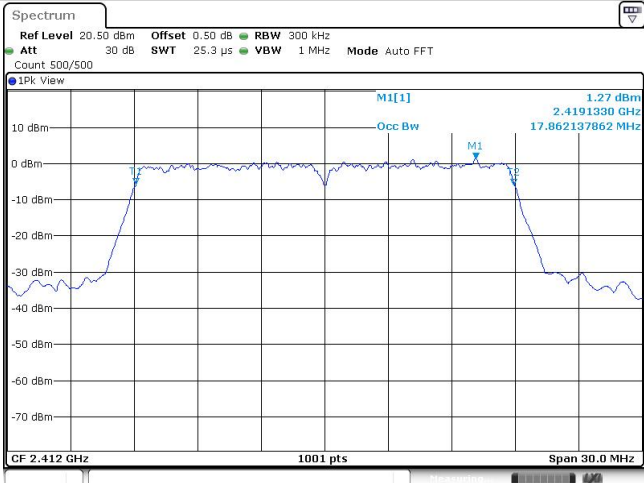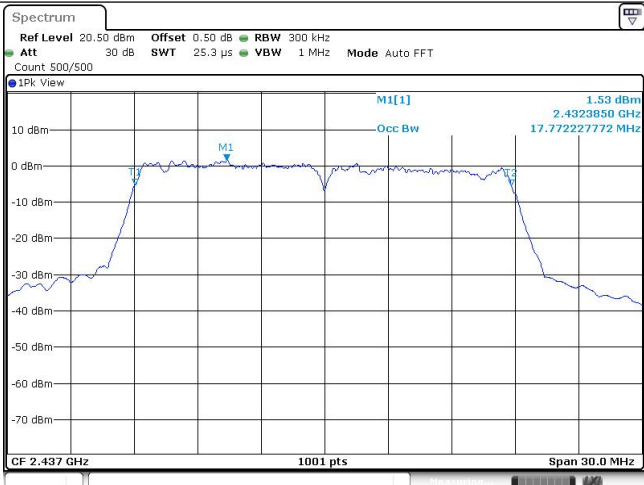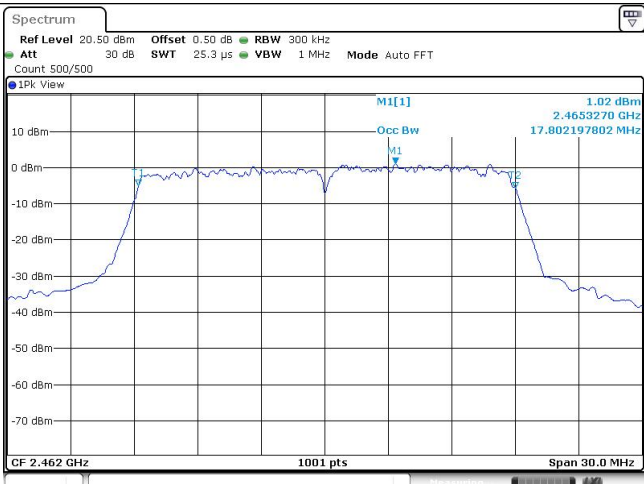Type:		802.11n(HT20)
CH01	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>M1[1] 1.27 dBm 2.4191330 GHz 17.862137862 MHz</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 30.SEP.2024 10:25:22</p>	
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>M1[1] 1.53 dBm 2.4323850 GHz 17.772227772 MHz</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 30.SEP.2024 10:27:22</p>	
CH11	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 300 kHz Att 30 dB SWT 25.3 μs VBW 1 MHz Mode Auto FFT Count 500/500</p> <p>1PK View</p> <p>M1[1] 1.02 dBm 2.4653270 GHz 17.802197802 MHz</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <p>Date: 30.SEP.2024 10:28:58</p>	

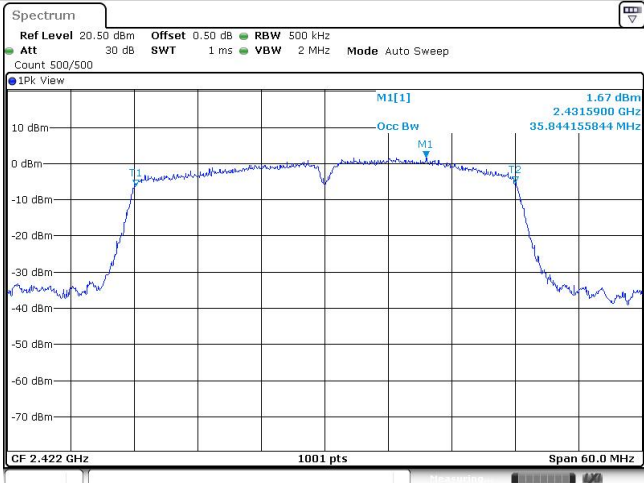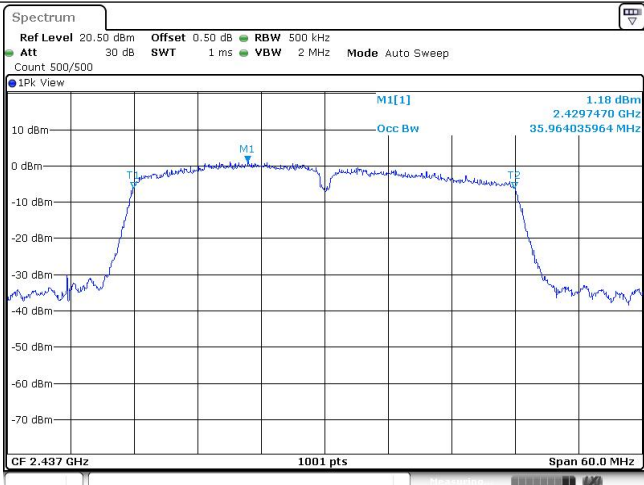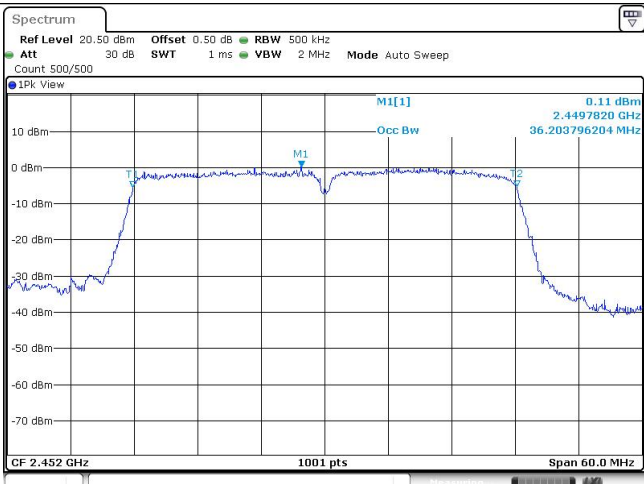Type:		802.11n(HT40)
CH03	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 500 kHz Att 30 dB SWT 1 ms VBW 2 MHz Mode Auto Sweep Count 500/500</p> <p>1PK View</p> <p>M1[1] 1.67 dBm 2.4315900 GHz Occ Bw 35.844155844 MHz</p> <p>CF 2.422 GHz 1001 pts Span 60.0 MHz</p> <p>Date: 30.SEP.2024 10:31:01</p>	
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 500 kHz Att 30 dB SWT 1 ms VBW 2 MHz Mode Auto Sweep Count 500/500</p> <p>1PK View</p> <p>M1[1] 1.18 dBm 2.4297470 GHz Occ Bw 35.964035964 MHz</p> <p>CF 2.437 GHz 1001 pts Span 60.0 MHz</p> <p>Date: 30.SEP.2024 10:32:49</p>	
CH09	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 0.50 dB RBW 500 kHz Att 30 dB SWT 1 ms VBW 2 MHz Mode Auto Sweep Count 500/500</p> <p>1PK View</p> <p>M1[1] 0.11 dBm 2.4497820 GHz Occ Bw 36.203796204 MHz</p> <p>CF 2.452 GHz 1001 pts Span 60.0 MHz</p> <p>Date: 30.SEP.2024 10:34:16</p>	

Appendix E: Duty Cycle

Modulation Type	Test Frequency (MHz)	T _{on} time for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on} time (kHz)
11b	2437	8.36	8.52	98.12	0.12
11g	2437	1.38	1.55	89.03	0.72
11n20	2437	1.28	1.45	88.28	0.78
11n40	2437	0.59	0.78	75.64	1.69

