

## FCC - TEST REPORT

Report Number : **68.950.21.0820.01** Date of Issue: **2022-04-12**

Model : **GL35R, A10-LRF**

Product Type : **Geni Thermal Imaging Monocular**

Applicant : **IRay Technology Co., Ltd.**

Address : **11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P. R. CHINA**

Manufacturer : **IRay Technology Co., Ltd.**

Address : **11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P. R. CHINA**

Test Result :  **Positive**     **Negative**

Total pages including Appendices : **60**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation, chapter A-3.4.



# 1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards .....	5
5	Summary of Test Results .....	6
6	General Remarks.....	7
7	Test Setups.....	8
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Emission.....	10
9.2	Conducted peak output power .....	13
9.3	6dB bandwidth and 99% Occupied Bandwidth.....	15
9.4	Power spectral density.....	24
9.5	Spurious RF conducted emissions.....	28
9.6	Band edge testing .....	39
9.7	Spurious radiated emissions for transmitter .....	43
10	Test Equipment List .....	59
11	System Measurement Uncertainty .....	60

## 2 Details about the Test Laboratory

### Details about the Test Laboratory

#### Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch  
Building 12 & 13, Zhiheng Wisdomland Business Park, Nantou Checkpoint  
Road 2, Nanshan District  
Shenzhen 518052  
P.R. China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CA5009

### 3 Description of the Equipment Under Test

Product:	Geni Thermal Imaging Monocular
Model no.:	GL35R, A10-LRF
FCC ID:	2AYGT-2H-00
Rating:	5VDC Or 3.7VDC by Rechargeable Lithium-ion battery
Options and accessories:	USB Cable
RF Transmission Frequency:	2412MHz-2462MHz
No. of Operated Channel:	11
Modulation:	DSSS, OFDM
Antenna Type:	Integrated antenna
Antenna Gain:	3.0dbi
Description of the EUT:	The Equipment Under Test (EUT) is a Geni Thermal Imaging Monocular which support Wi-Fi. The TX and RX range is 2412MHz – 2462MHz for 2.4GHz Wi-Fi

## 4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2020 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to  
KDB 558074 D01 15.247 Meas Guidance v05r02,  
ANSI C63.10 (2013).

## 5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	10	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	13	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	15	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(e)	Power spectral density	24	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	28	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Band edge	39	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious radiated emissions for transmitter	43	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 2		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note 1: N/A=Not Applicable.

Note 2: The EUT uses an internal antenna, which gain is 3.0 dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

Remark: The EUT power by battery

## 6 General Remarks

### Remarks

This submittal(s) (test report) is intended for FCC ID: 2AYGT-2H-00, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

The EUT RF module as same as FCC ID: 2AYGT-26-00 and the antenna position different, and the RF Conducted test data refer to report no: 68.950.21.0744.01, the other data need to update.

the A10-LRF have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with Geni Thermal Imaging Monocular, GL35R. The difference please only in the color of the different models.

### SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: 2021-11-09

Testing Start Date: 2021-11-09

Testing End Date: 2021-12-13

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch


Reviewed by:

  
John Zhi  
Project Manager

Prepared by:

  
Warlen Song  
Project Engineer


Tested by:

  
Carry Cai  
Test Engineer




## 7 Test Setups

### 7.1 AC Power Line Conducted Emission test setups

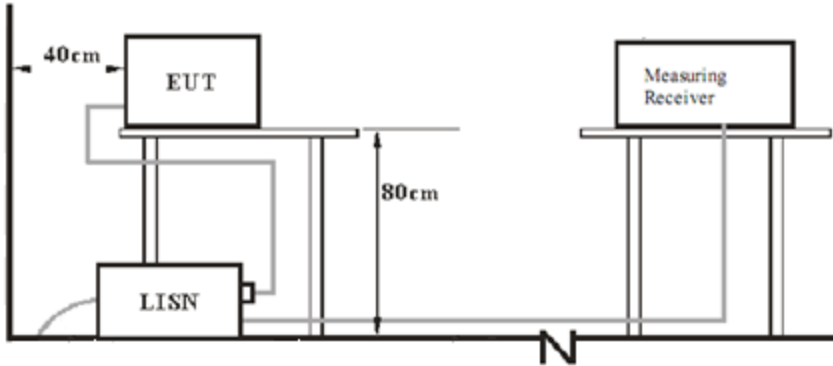


### 7.2 Radiated test setups


#### Below 1GHz

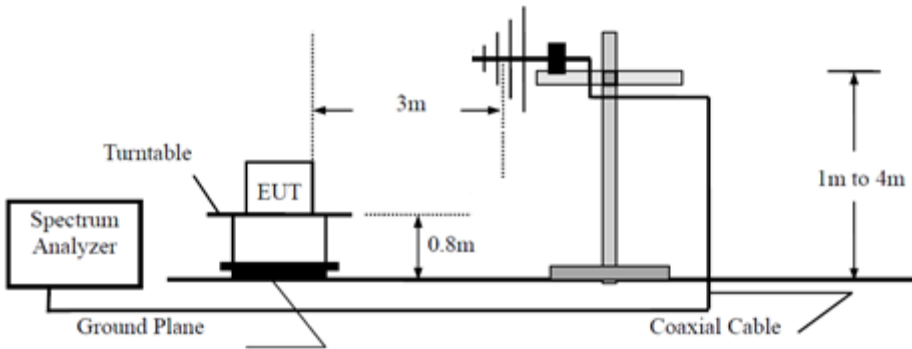

#### Above 1GHz

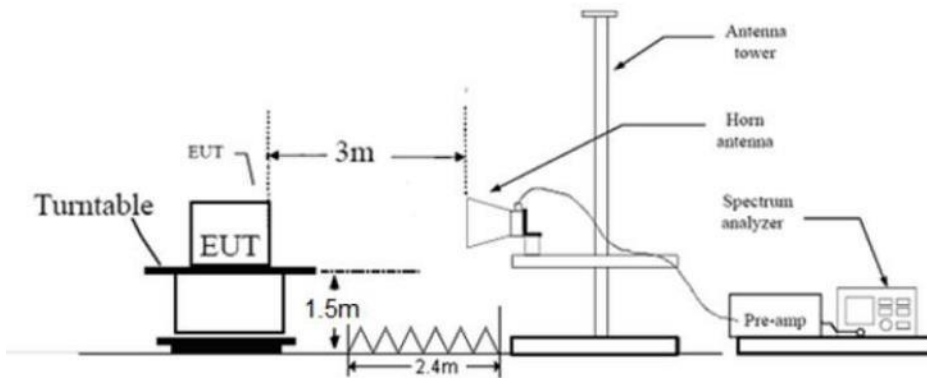

### 7.3 Conducted RF test setups





## 8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
PC	Lenovo	X240	---

The system was configured to non-hopping mode.

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power.

## 9 Technical Requirement

### 9.1 Conducted Emission

#### Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


#### Limit

Frequency MHz	QP Limit dB $\mu$ V	AV Limit dB $\mu$ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

## Conducted Emission

Product Type : Geni Thermal Imaging Monocular  
 M/N : GL35R  
 Operating Condition : Charging + Transmit  
 Test Specification : Power Line, Live  
 Comment : AC 120V/60Hz

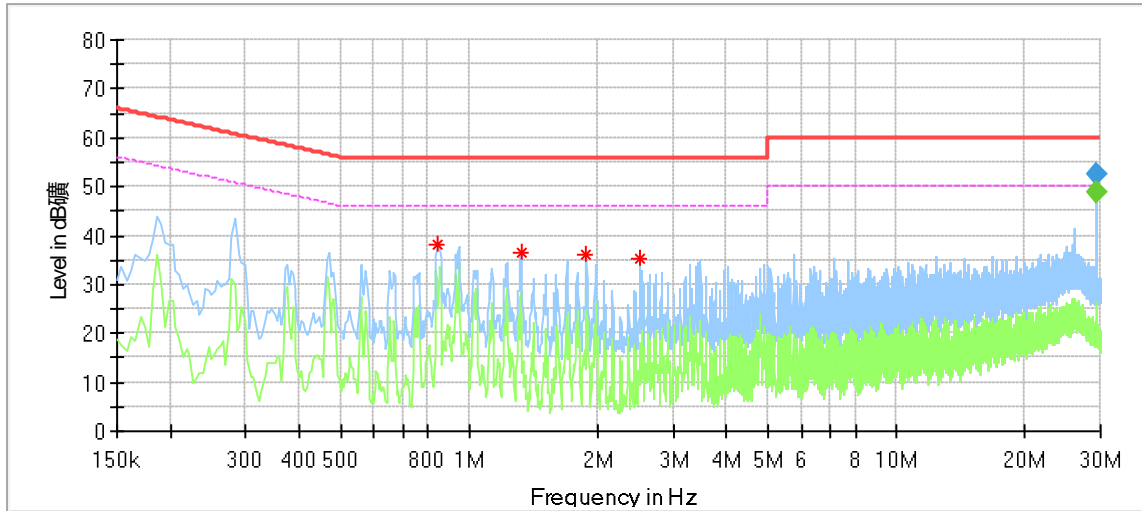

### Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
---	43.32	---	60.76	17.44	L1	9.22
0.846000	38.05	---	56.00	17.95	L1	9.20
1.322000	36.56	---	56.00	19.44	L1	9.21
1.882000	35.96	---	56.00	20.04	L1	9.22
2.510000	35.17	---	56.00	20.83	L1	9.24
29.501500	52.58	---	60.00	7.42	L1	9.48

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
29.501500	52.34	---	60.00	7.66	L1	9.48
29.501500	---	48.92	50.00	1.08	L1	9.48

Remark :


Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## Conducted Emission

Product Type : Geni Thermal Imaging Monocular  
 M/N : GL35R  
 Operating Condition : Charging + Transmit  
 Test Specification : Power Line, Neutral  
 Comment : AC 120V/60Hz (External adapter)

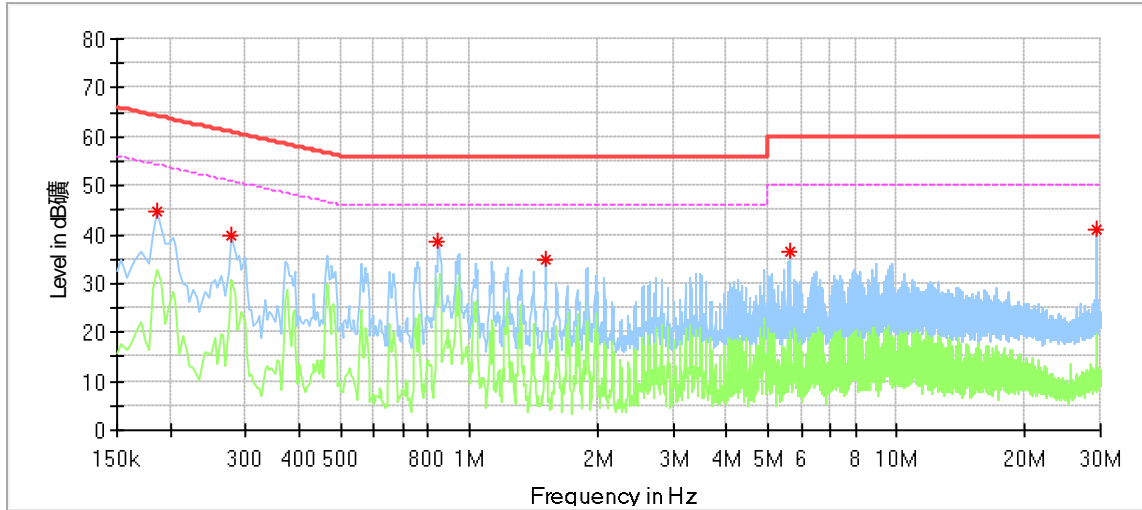

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.186000	44.59	---	64.21	19.63	N	9.40
0.278000	39.60	---	60.88	21.27	N	9.39
0.846000	38.59	---	56.00	17.41	N	9.39
1.506000	34.71	---	56.00	21.29	N	9.41
5.654000	36.54	---	60.00	23.46	N	9.52
29.498000	41.00	---	60.00	19.00	N	9.85

### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
---	---	---	---	---		---

Remark :

Level=Reading Level + Correction Factor

Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

## 9.2 Conducted peak output power

### Test Method

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the power meter by RF cable. The path loss was compensated to the results for each measurement.
2. Setting the highest output power level of the EUT
3. Record the power value.

### Limits

According to §15.247 (b) (3), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

802.11b\_ modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Result
	Ant 0	
Low channel 2412MHz	13.9	Pass
Middle channel 2437MHz	13.8	Pass
High channel 2462MHz	13.9	Pass

802.11g\_ modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Result
	Ant 0	
Low channel 2412MHz	14.2	Pass
Middle channel 2437MHz	13.9	Pass
High channel 2462MHz	13.9	Pass



802.11n20\_modulation Test Result

Frequency (MHz)	Conducted Peak Output Power (dBm)	Result
	Ant0	
Low channel 2412MHz	13.9	Pass
Middle channel 2437MHz	14.0	Pass
High channel 2462MHz	12.9	Pass

### 9.3 6dB bandwidth and 99% Occupied Bandwidth

#### Test Method for 6 dB Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=100K, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Test Method for 99 % Bandwidth

1. Use the following spectrum analyzer settings:  
RBW=1% to 5% of the actual occupied, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

#### Limit




Limit [kHz]

---


$\geq$ 500

### 6dB Bandwidth

TestMode	Antenna	Channel [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
11B	Ant0	2412	7.600	2408.080	2415.680	0.5	PASS
	Ant0	2437	9.320	2432.240	2441.560	0.5	PASS
	Ant0	2462	7.400	2458.280	2465.680	0.5	PASS
11G	Ant0	2412	16.480	2403.760	2420.240	0.5	PASS
	Ant0	2437	16.520	2428.760	2445.280	0.5	PASS
	Ant0	2462	16.160	2453.800	2469.960	0.5	PASS
11N20	Ant0	2412	15.880	2404.080	2419.960	0.5	PASS
	Ant0	2437	15.240	2429.400	2444.640	0.5	PASS
	Ant0	2462	16.760	2453.200	2469.960	0.5	PASS

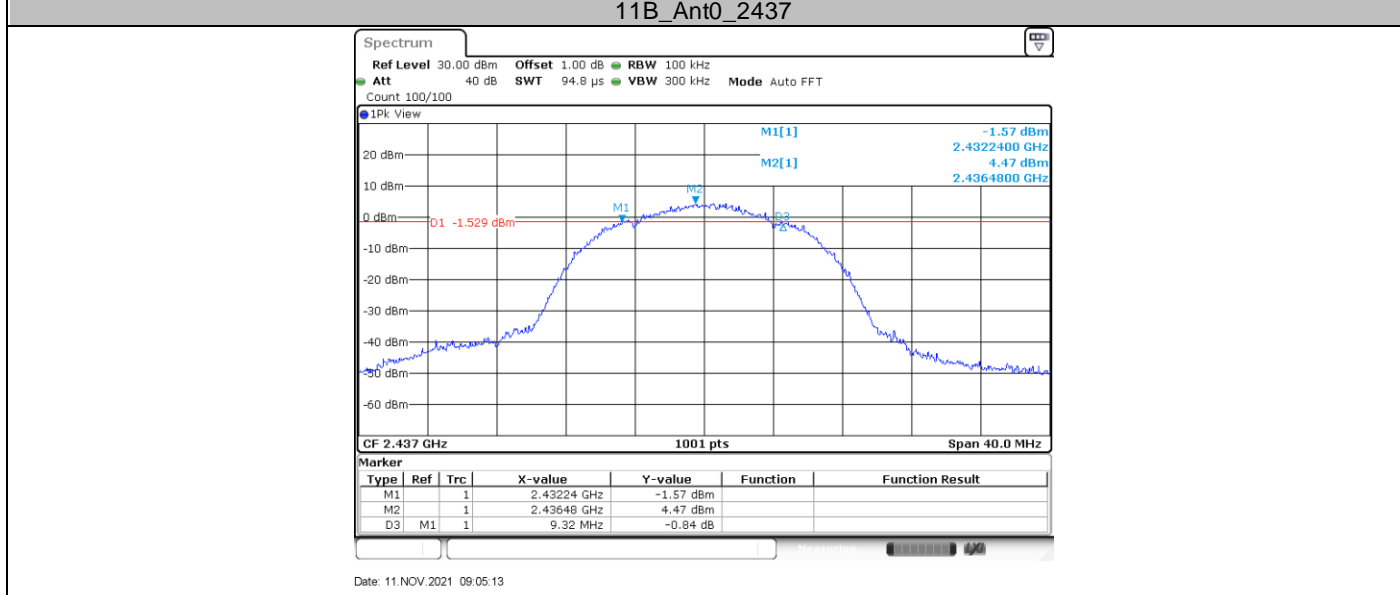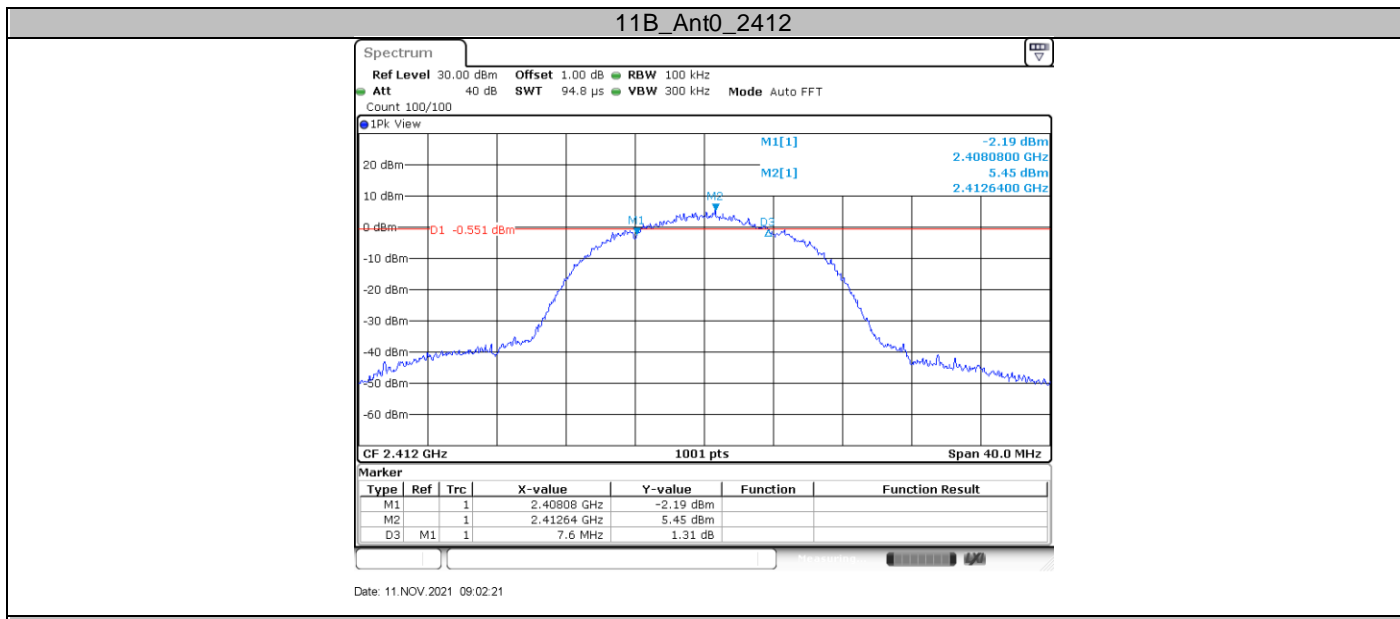




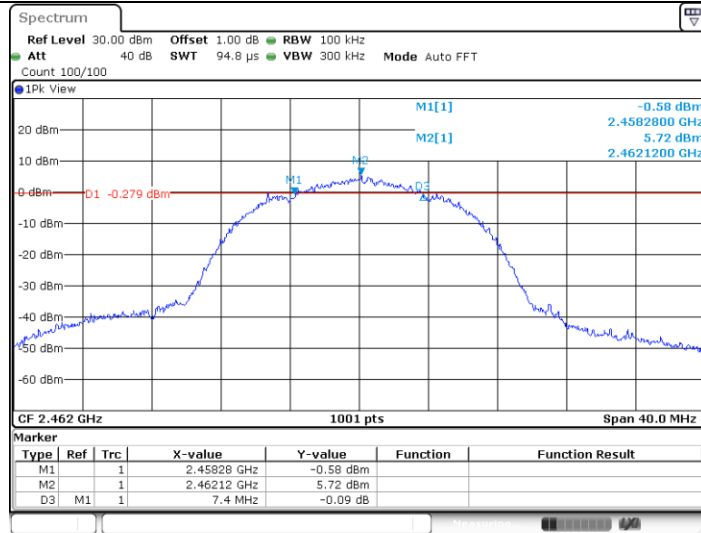


Date: 11.NOV.2021 09:07:27

11G\_Ant0\_2412

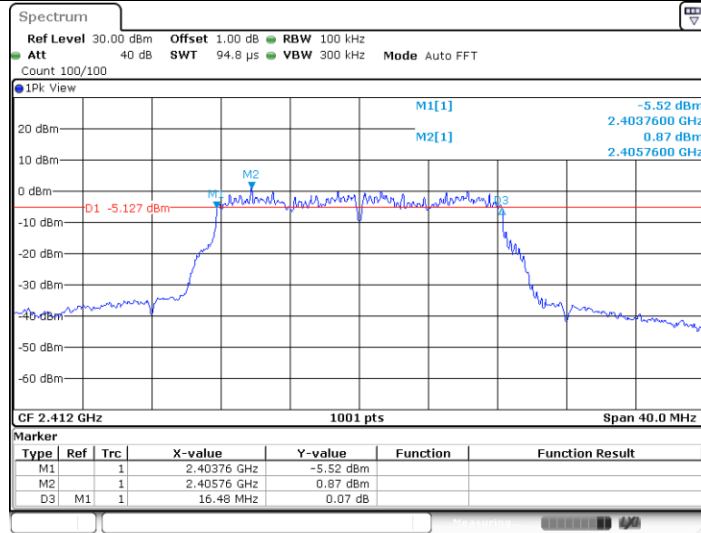


Date: 11.NOV.2021 09:09:59

11G\_Ant0\_2437

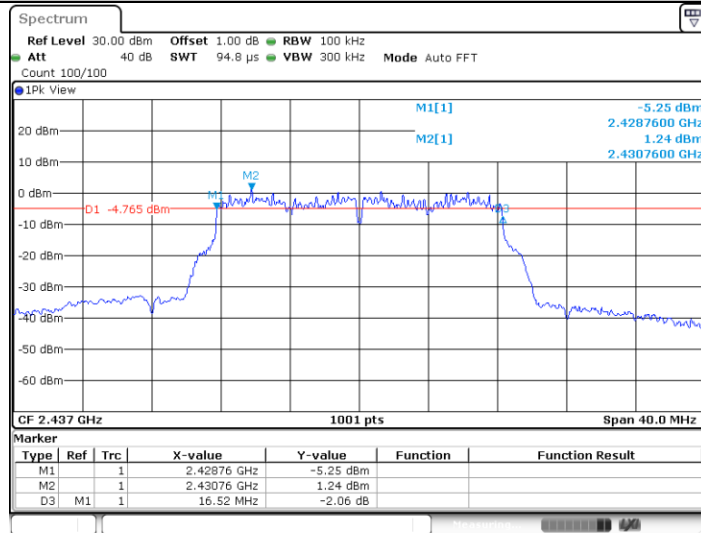


Date: 11.NOV.2021 09:15:03

11G\_Ant0\_2462

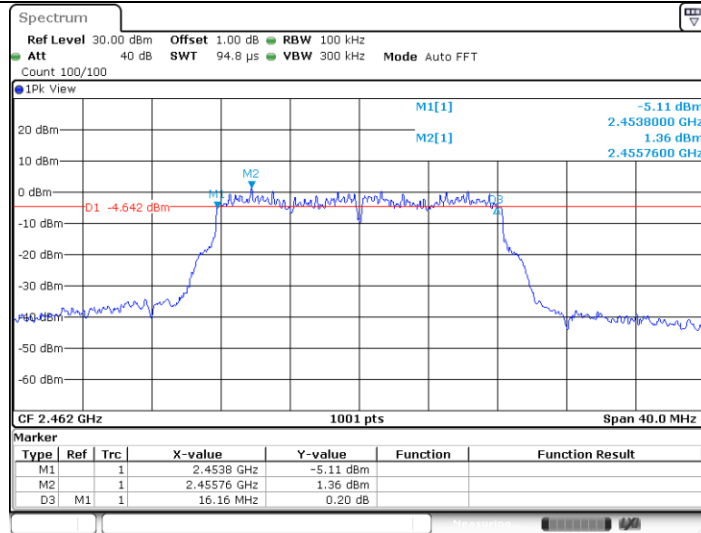


Date: 11.NOV.2021 09:17:52

11N20SISO\_Ant0\_2412

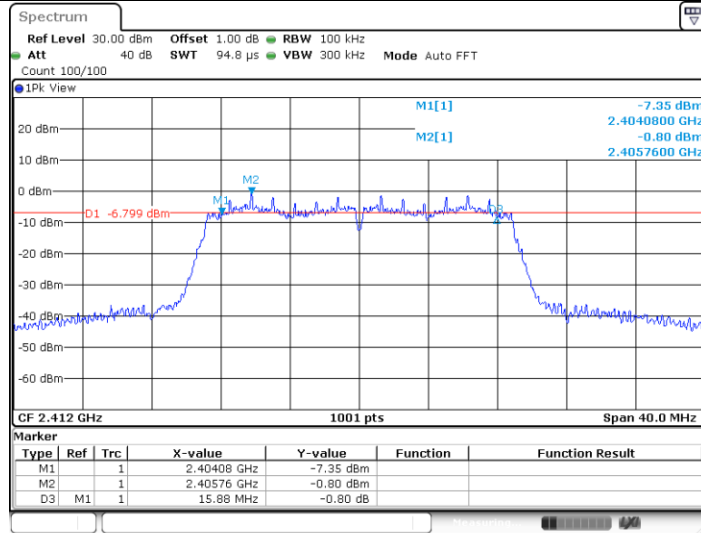


Date: 11.NOV.2021 09:21:42

11N20SISO\_Ant0\_2437

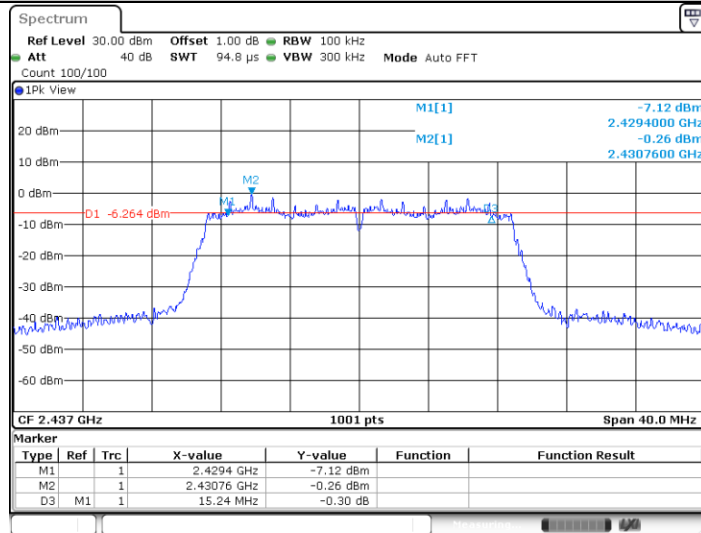

Date: 11.NOV.2021 09:25:28



11N20SISO\_Ant0\_2462

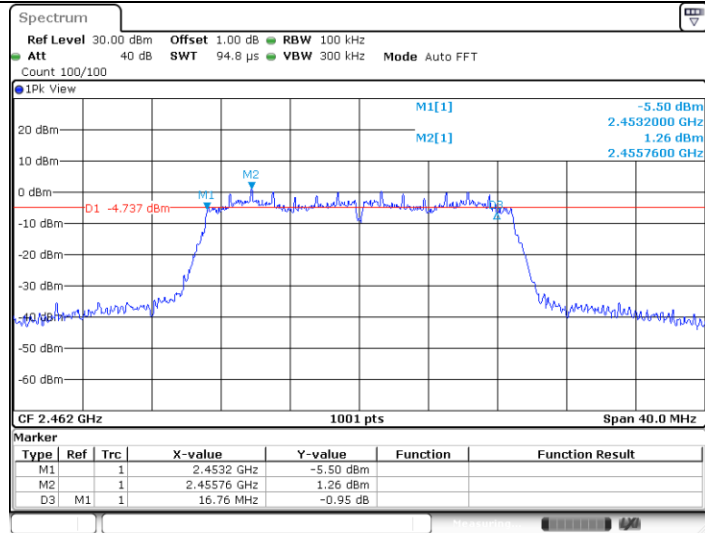


Date: 11.NOV.2021 09:28:28

**99% Bandwidth**

TestMode	Antenna	Channel [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	13.866	2405.087	2418.953	---	PASS
		2437	13.866	2430.087	2443.953	---	PASS
		2462	13.826	2455.087	2468.913	---	PASS
11G	Ant0	2412	17.383	2403.289	2420.671	---	PASS
		2437	17.463	2428.249	2445.711	---	PASS
		2462	17.463	2453.289	2470.751	---	PASS
11N20SISO	Ant0	2412	18.382	2402.809	2421.191	---	PASS
		2437	18.382	2427.809	2446.191	---	PASS
		2462	18.422	2452.809	2471.231	---	PASS

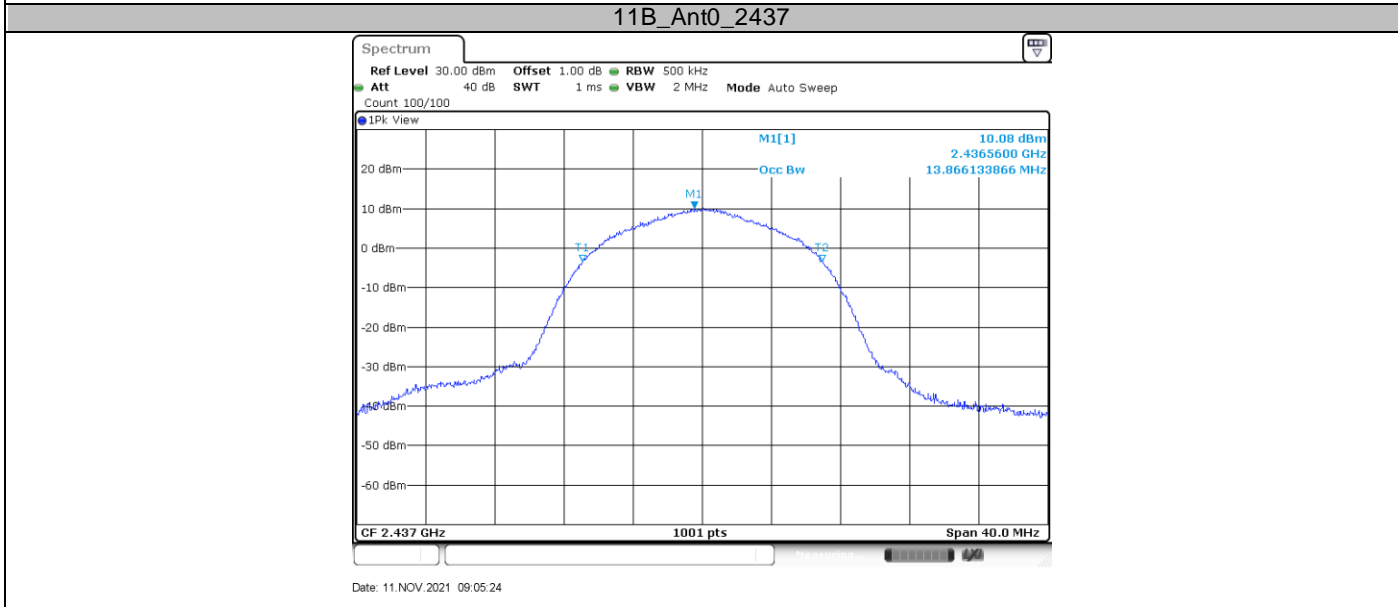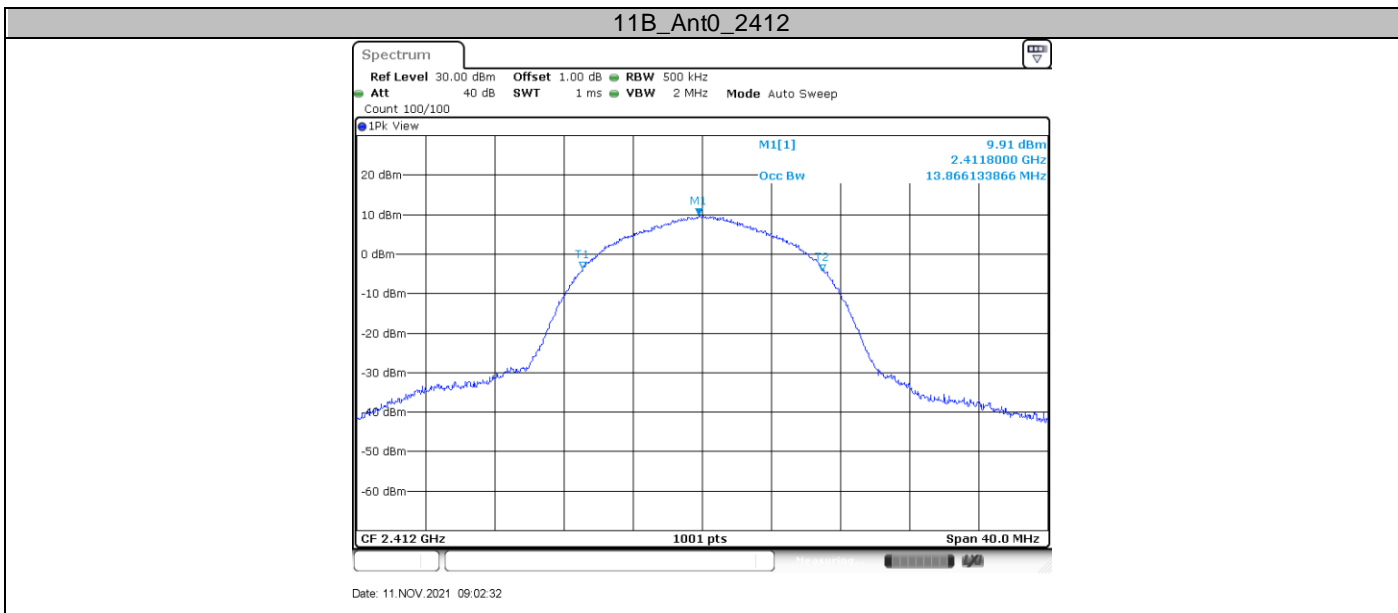


**11B\_Ant0\_2462**

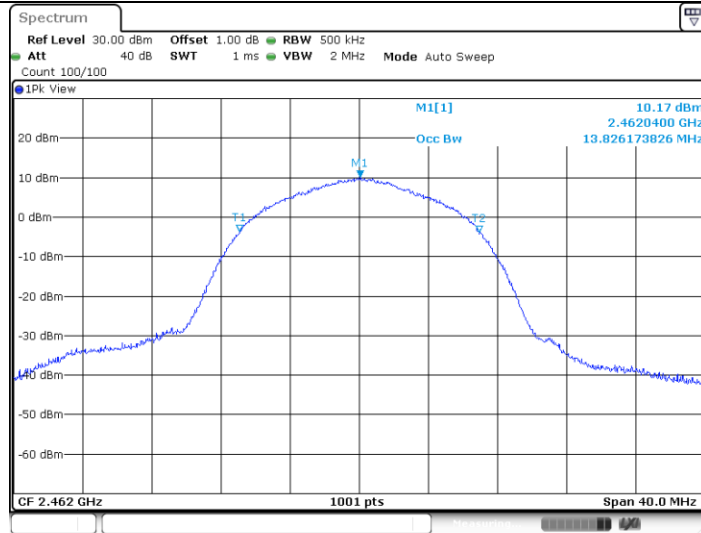


Date: 11.NOV.2021 09:07:38

11G\_Ant0\_2412

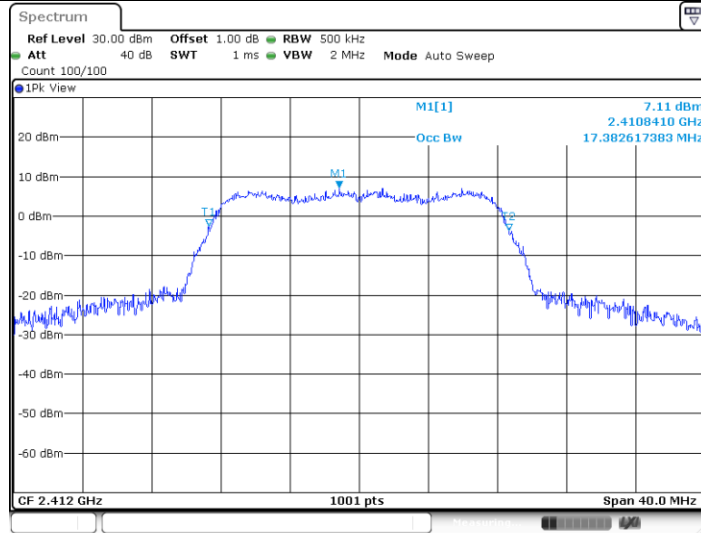


Date: 11.NOV.2021 09:10:10

11G\_Ant0\_2437

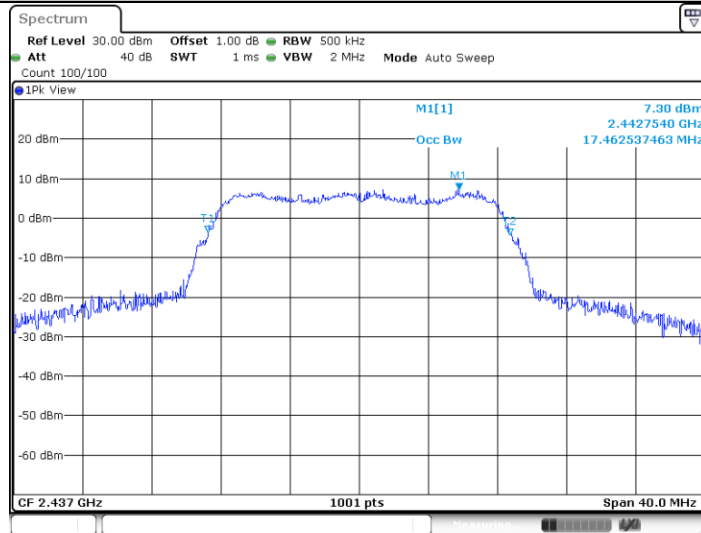


Date: 11.NOV.2021 09:15:14

11G\_Ant0\_2462

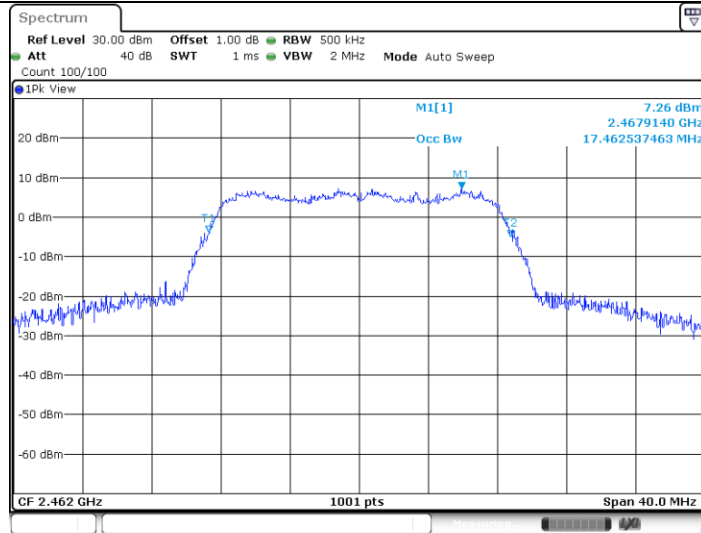


Date: 11.NOV.2021 09:18:02

11N20SISO\_Ant0\_2412

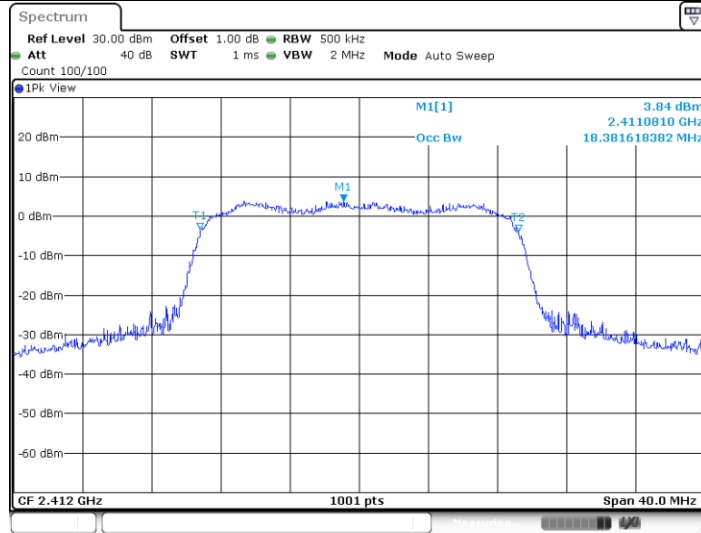


Date: 11.NOV.2021 09:21:52

11N20SISO\_Ant0\_2437

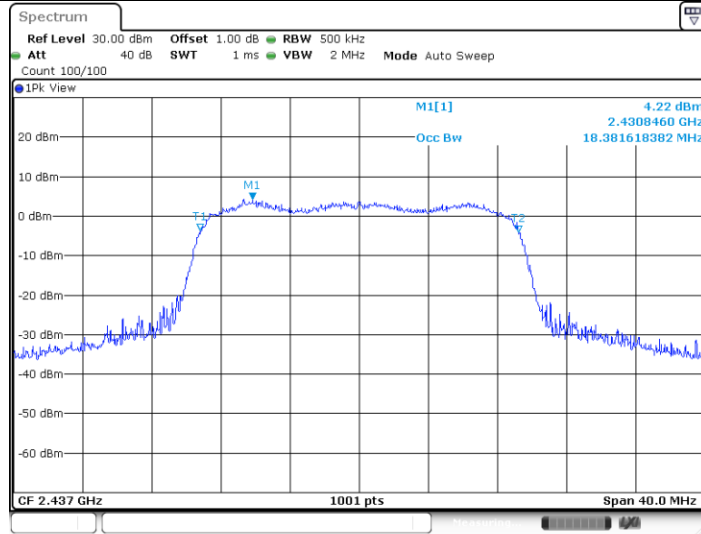

Date: 11.NOV.2021 09:25:39

11N20SISO\_Ant0\_2462

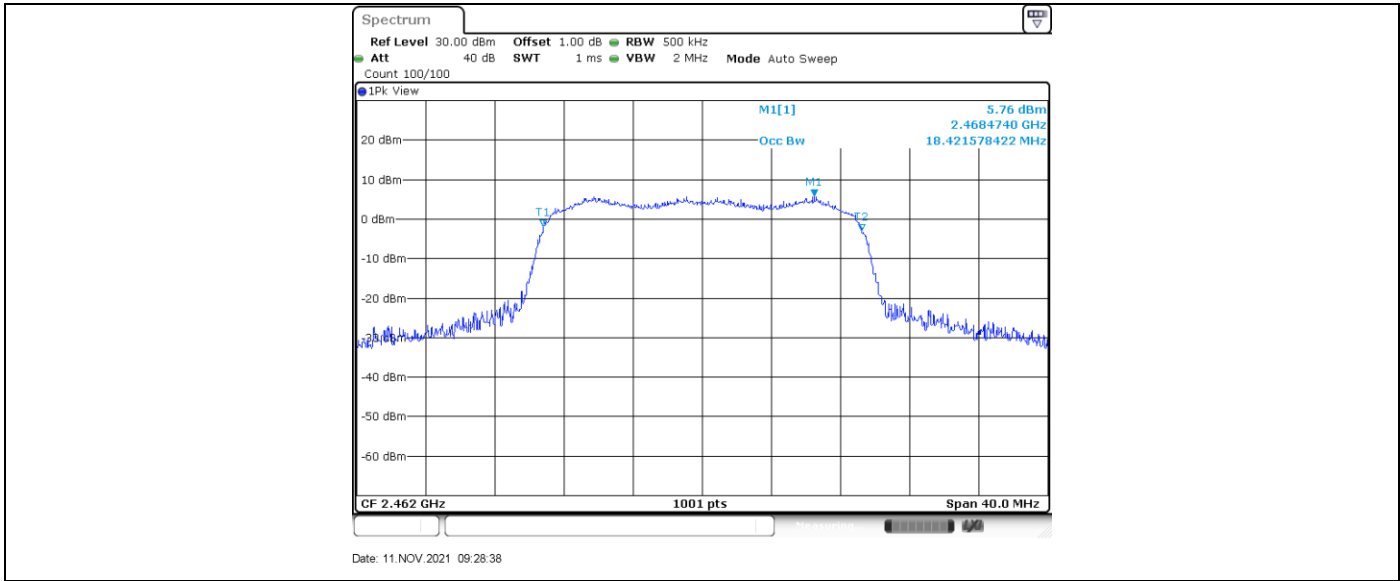

## 9.4 Power spectral density

### Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

### Limit

Limit [dBm/3KHz]

≤8

#### 802.11b modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3KHz)	Result
	Ant 0		
Low channel 2412MHz	-8.56	8	Pass
Middle channel 2437MHz	-8.48	8	Pass
High channel 2462MHz	-9.46	8	Pass

#### 802.11g modulation Test Result


Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3KHz)	Result
	Ant 0		
Low channel 2412MHz	-13.87	8	Pass
Middle channel 2437MHz	-12.85	8	Pass
High channel 2462MHz	-13.83	8	Pass

#### 802.11n\_HT20 modulation Test Result

Frequency (MHz)	Power spectral density (dBm/3KHz)	Limit (dBm/3KHz)	Result
	Ant 0		
Low channel 2412MHz	-14.93	8	Pass
Middle channel 2437MHz	-14.48	8	Pass
High channel 2462MHz	-13.05	8	Pass




### 11B\_Ant0\_2412

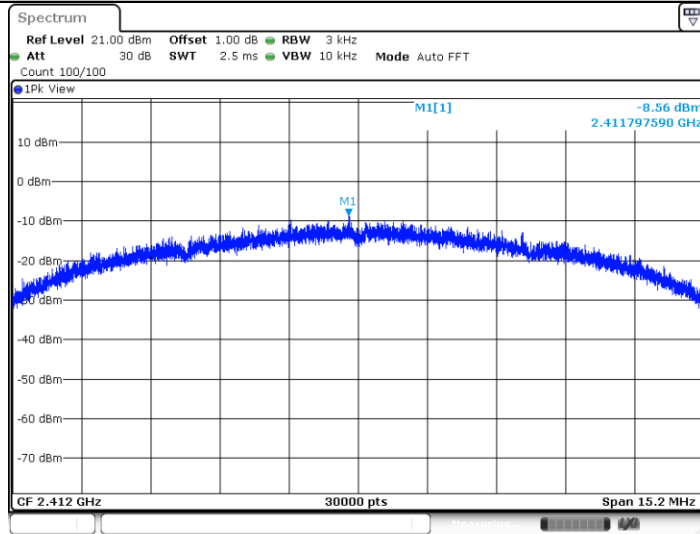


Date: 11.NOV.2021 09:02:44

### 11B\_Ant0\_2437

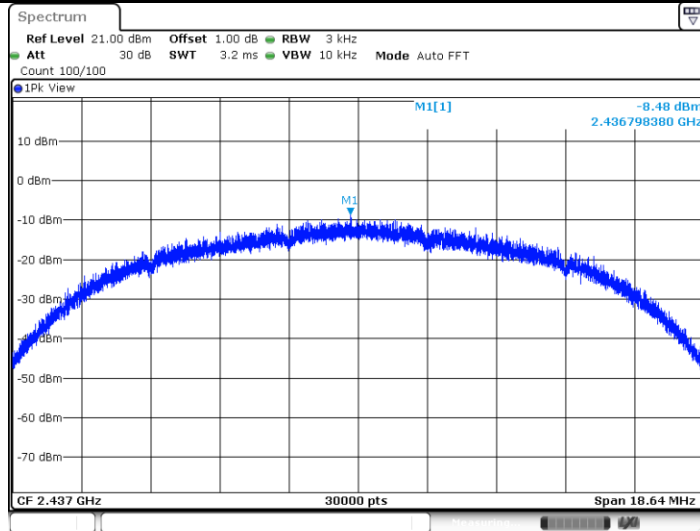


Date: 11.NOV.2021 09:05:36

### 11B\_Ant0\_2462

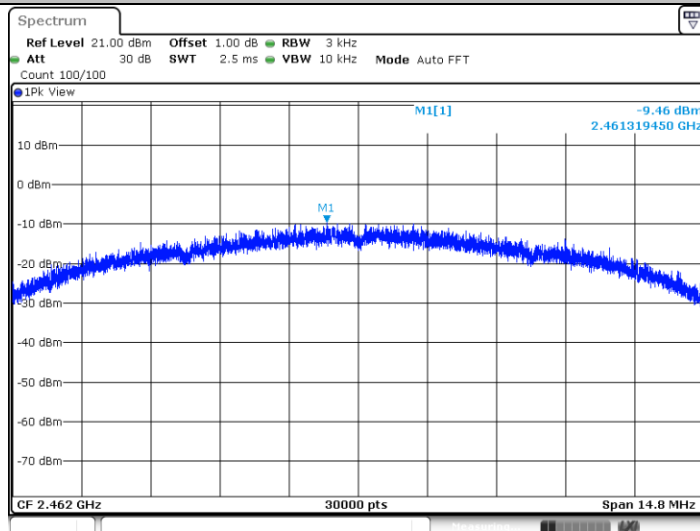


Date: 11.NOV.2021 09:07:49

### 11G\_Ant0\_2412

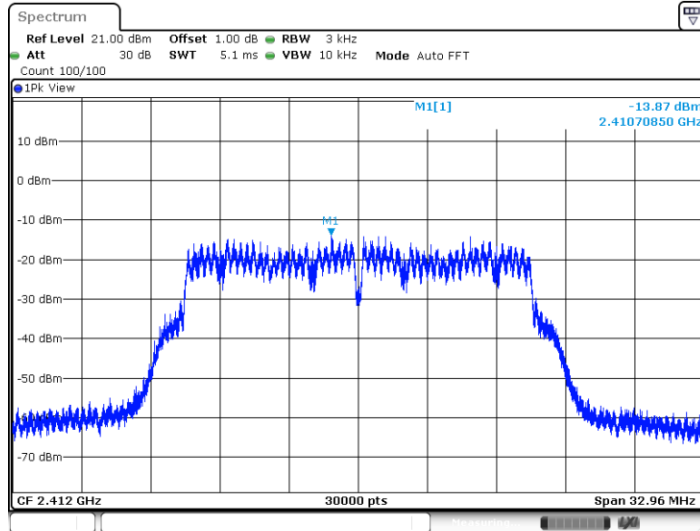


Date: 11.NOV.2021 09:10:22

### 11G\_Ant0\_2437

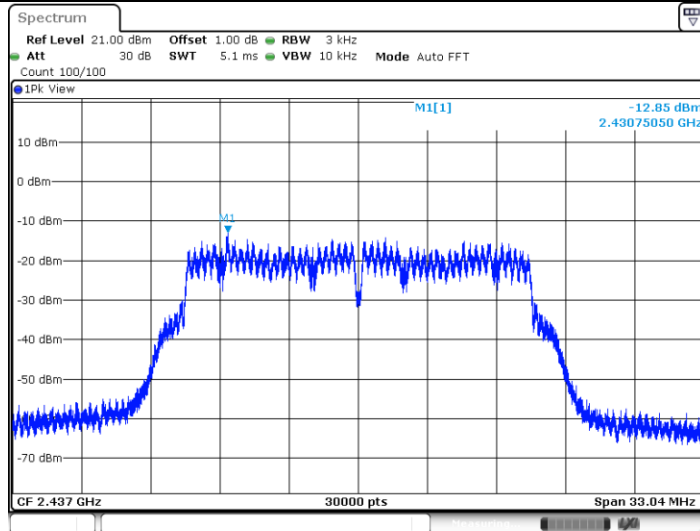


Date: 11.NOV.2021 09:15:26

### 11G\_Ant0\_2462

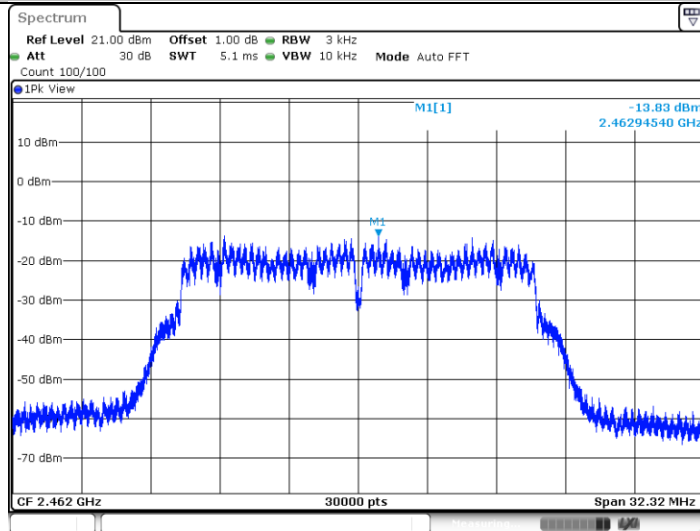


Date: 11.NOV.2021 09:18:14

### 11N20SISO\_Ant0\_2412

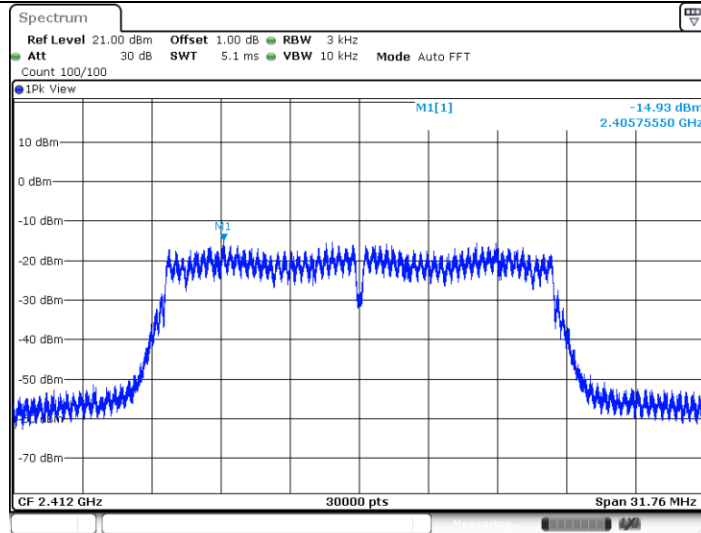


Date: 11.NOV.2021 09:22:04

11N20SISO\_Ant0\_2437

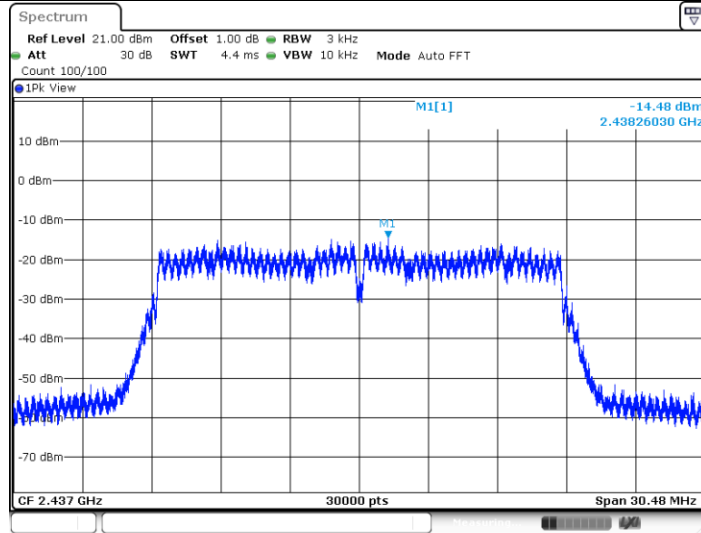

Date: 11.NOV.2021 09:25:50

11N20SISO\_Ant0\_2462

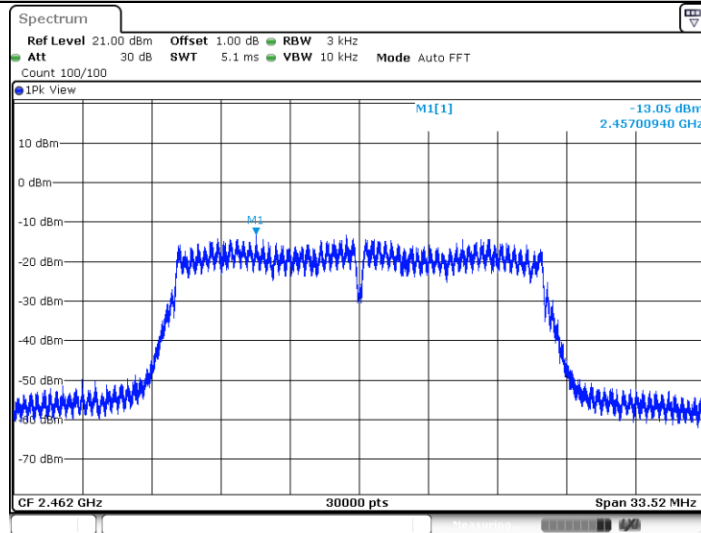

Date: 11.NOV.2021 09:28:50

## 9.5 Spurious RF conducted emissions

### Test Method




1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW ≥ RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
4. The level displayed must comply with the limit specified in this Section. Submit these plots.
5. Repeat above procedures until all frequencies measured were complete.


### Limit

Frequency Range MHz	Limit (dBm)
30-25000	-20


## Spurious RF conducted emissions

TestMode	Antenna	Channel(MHz)	FreqRange(MHz)	RefLevel	Result(dBm)	Limit(dBm)	Verdict
11B	Ant0	2412	Reference	4.57 dBm	4.57	---	PASS
			30~1000	30~1000 MHz	-66.63	<=-16.92	PASS
			1000~26500	1000~26500 MHz	-38.6	<=-16.92	PASS
	Ant0	2437	Reference	4.15 dBm	4.15	---	PASS
			30~1000	30~1000 MHz	-67.7	<=-16.99	PASS
			1000~26500	1000~26500 MHz	-51.84	<=-16.99	PASS
	Ant0	2462	Reference	4.24 dBm	4.24	---	PASS
			30~1000	30~1000 MHz	-67.83	<=-17.1	PASS
			1000~26500	1000~26500 MHz	-51.65	<=-17.1	PASS
11G	Ant0	2412	Reference	0.83 dBm	0.83	---	PASS
			30~1000	30~1000 MHz	-67.06	<=-19.35	PASS
			1000~26500	1000~26500 MHz	-42.32	<=-19.35	PASS
	Ant0	2437	Reference	1.37 dBm	1.37	---	PASS
			30~1000	30~1000 MHz	-68.22	<=-18.79	PASS
			1000~26500	1000~26500 MHz	-50.01	<=-18.79	PASS
	Ant0	2462	Reference	1.00 dBm	1.00	---	PASS
			30~1000	30~1000 MHz	-68.27	<=-19.23	PASS
			1000~26500	1000~26500 MHz	-51.45	<=-19.23	PASS
11N20SISO	Ant0	2412	Reference	-2.31 dBm	-2.31	---	PASS
			30~1000	30~1000 MHz	-68.65	<=-19.11	PASS
			1000~26500	1000~26500 MHz	-39.35	<=-19.11	PASS
	Ant0	2437	Reference	-1.13 dBm	-1.13	---	PASS
			30~1000	30~1000 MHz	-68.36	<=-18.49	PASS
			1000~26500	1000~26500 MHz	-51.7	<=-18.49	PASS
	Ant0	2462	Reference	0.91 dBm	0.91	---	PASS
			30~1000	30~1000 MHz	-67.45	<=-19.17	PASS
			1000~26500	1000~26500 MHz	-50.2	<=-19.17	PASS

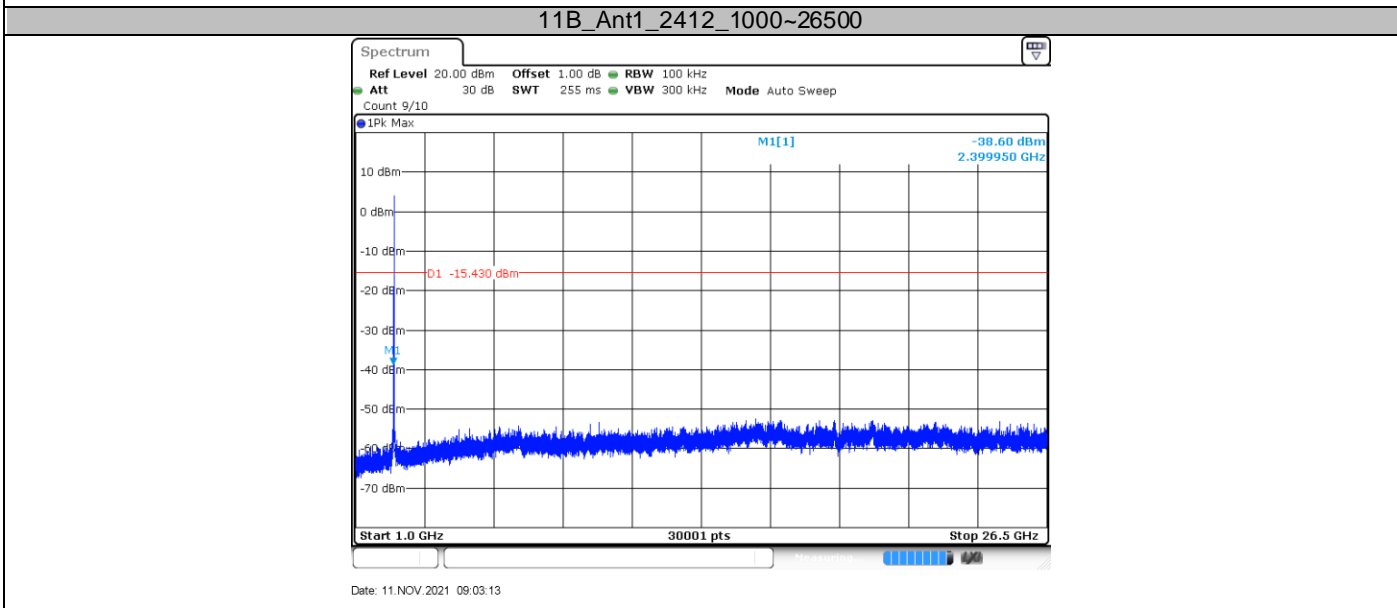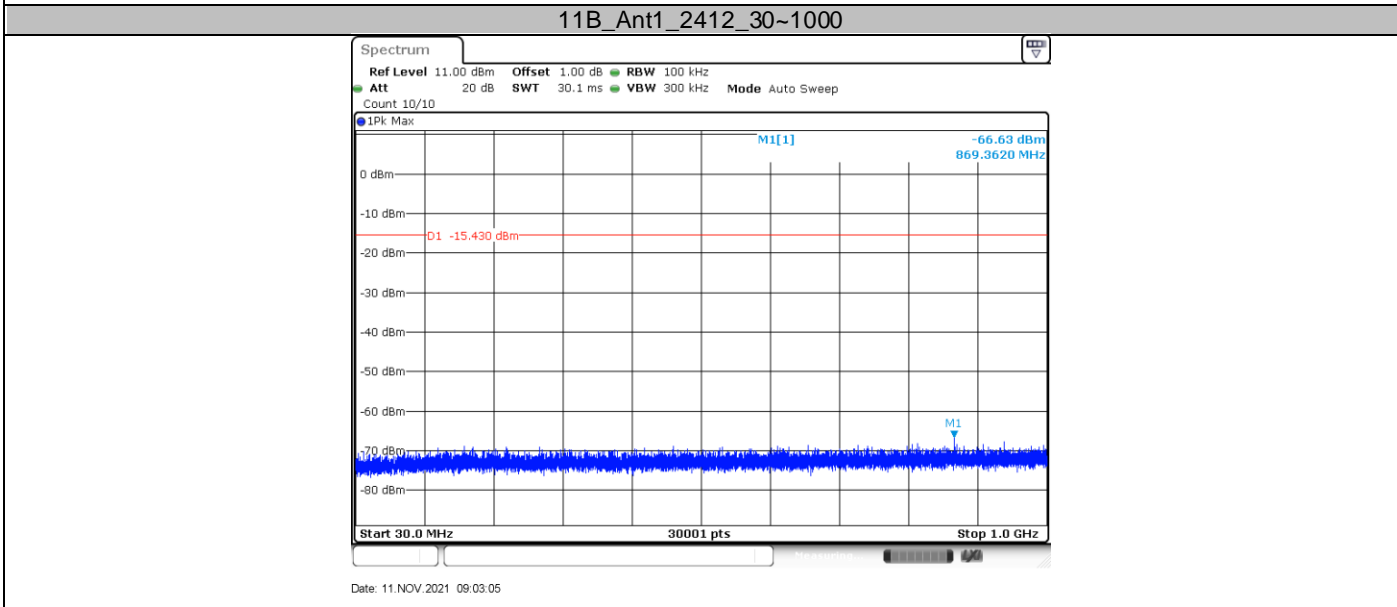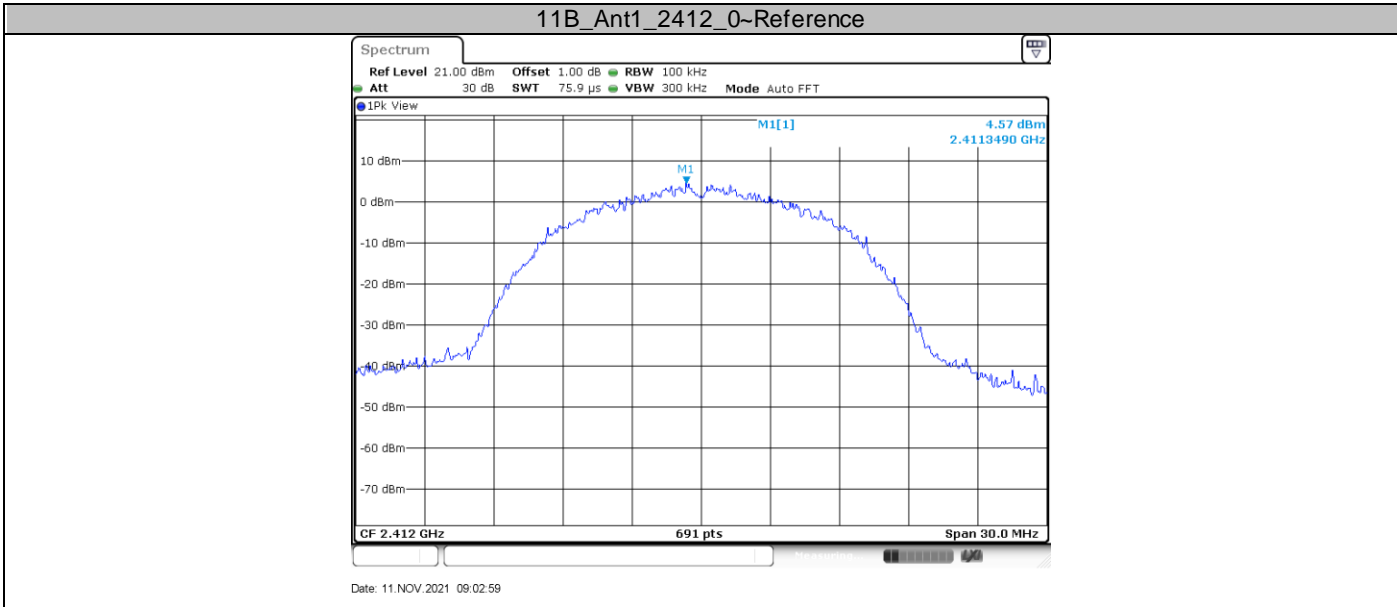


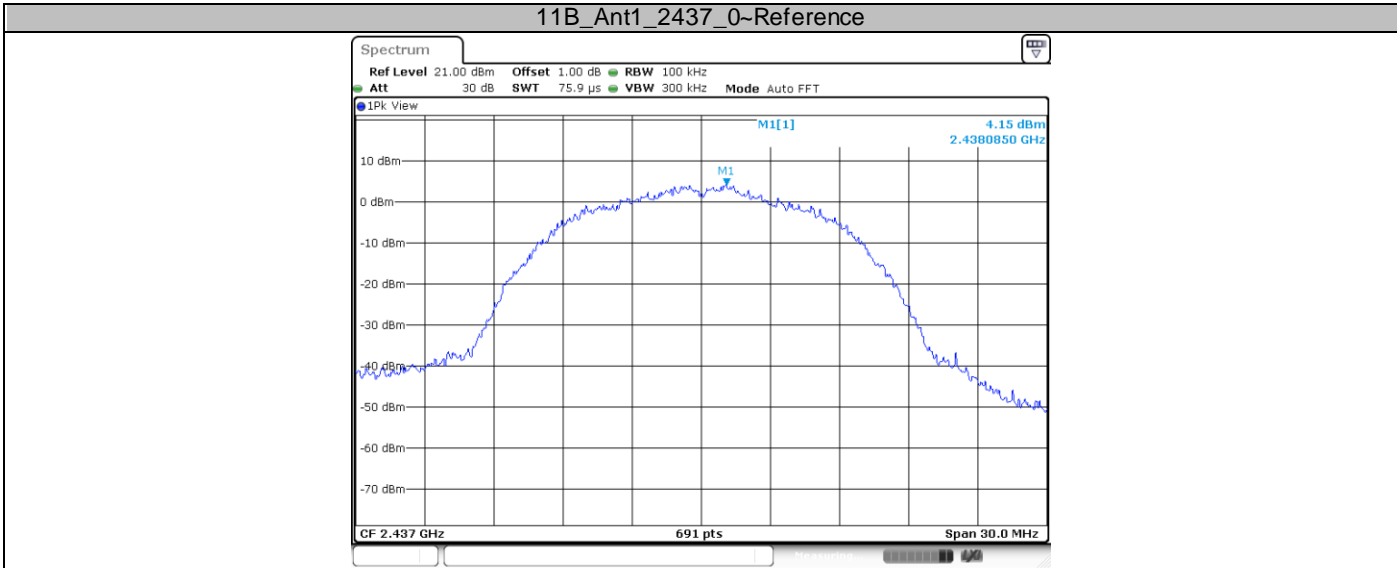


Date: 11.NOV.2021 09:05:41

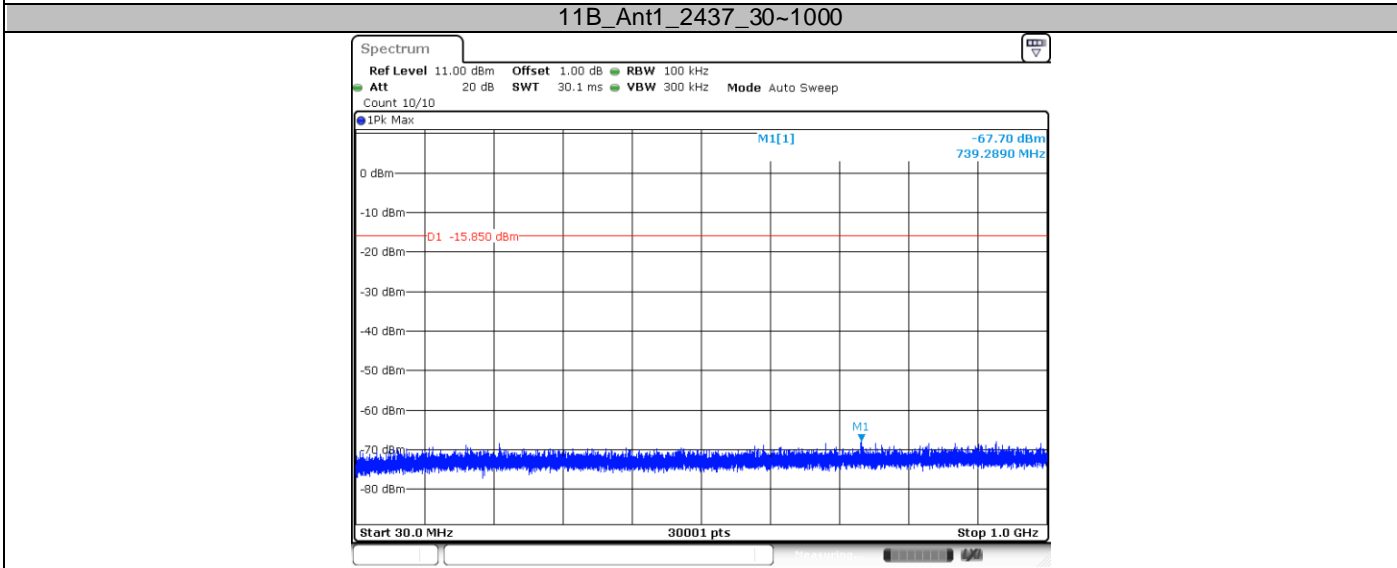


Date: 11.NOV.2021 09:05:47

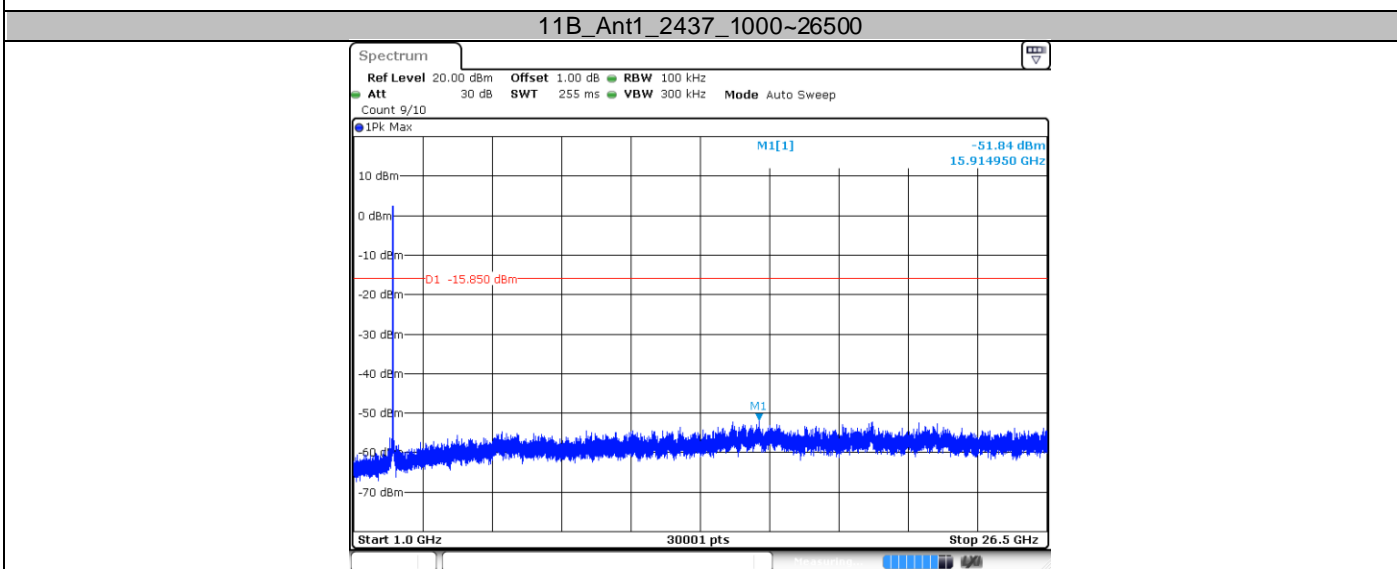


Date: 11.NOV.2021 09:05:55



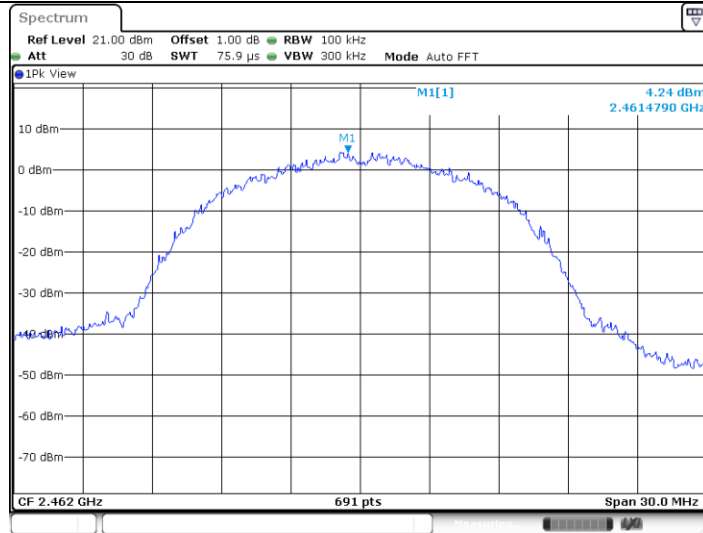


Date: 11.NOV.2021 09:08:04

11B\_Ant1\_2462\_30~1000

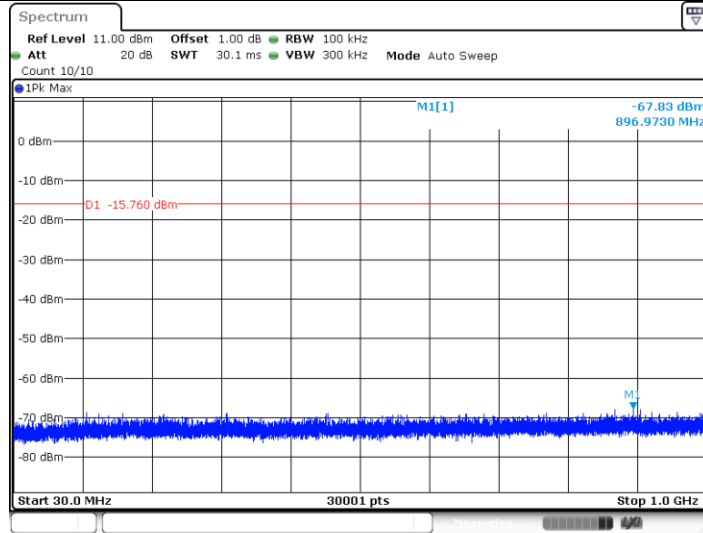

Date: 11.NOV.2021 09:08:10


11B\_Ant1\_2462\_1000~26500

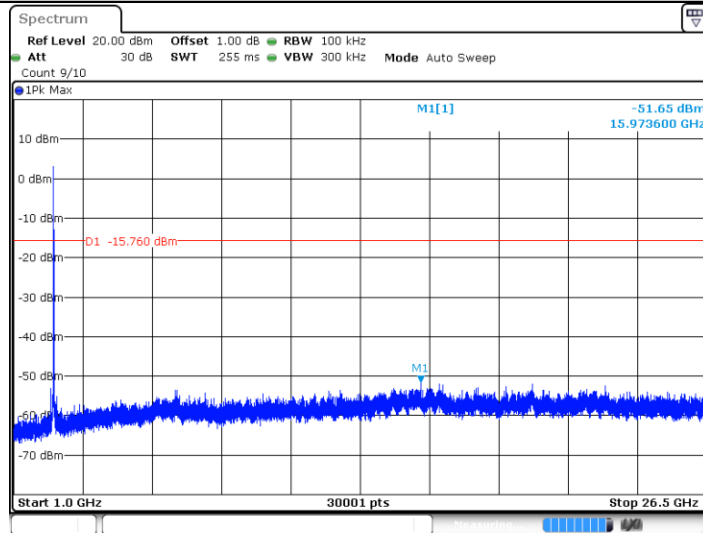

Date: 11.NOV.2021 09:08:18


11G\_Ant1\_2412\_0~Reference



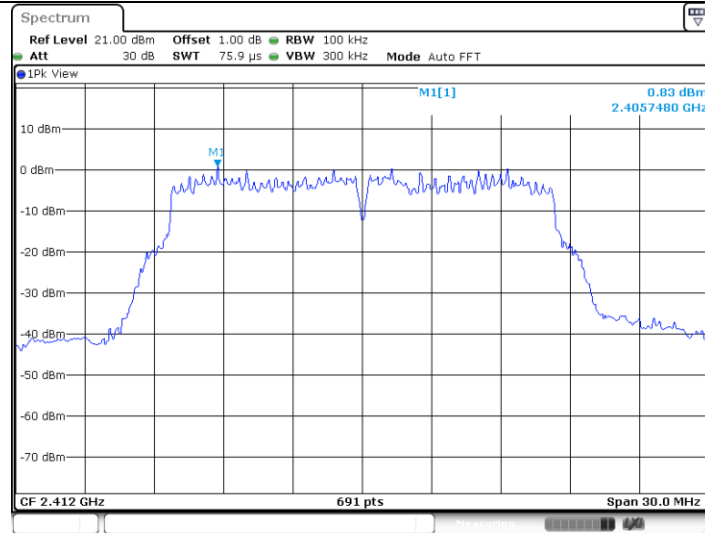


Date: 11.NOV.2021 09:10:37

11G\_Ant1\_2412\_30-1000

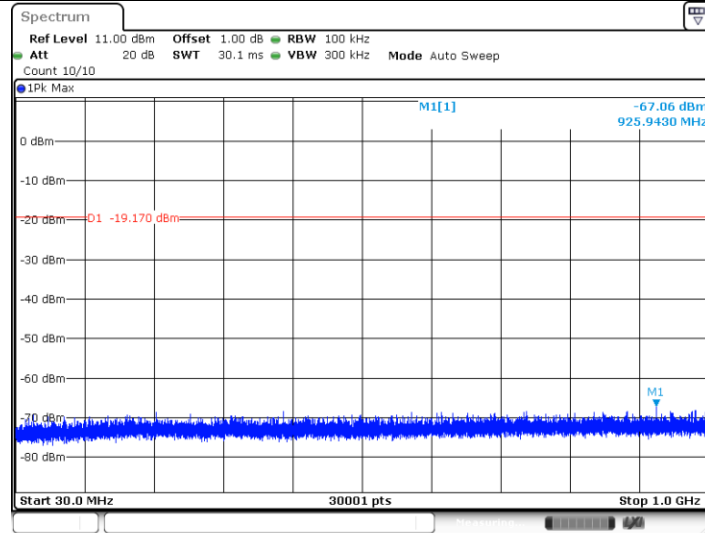


Date: 11.NOV.2021 09:10:43

11G\_Ant1\_2412\_1000-26500

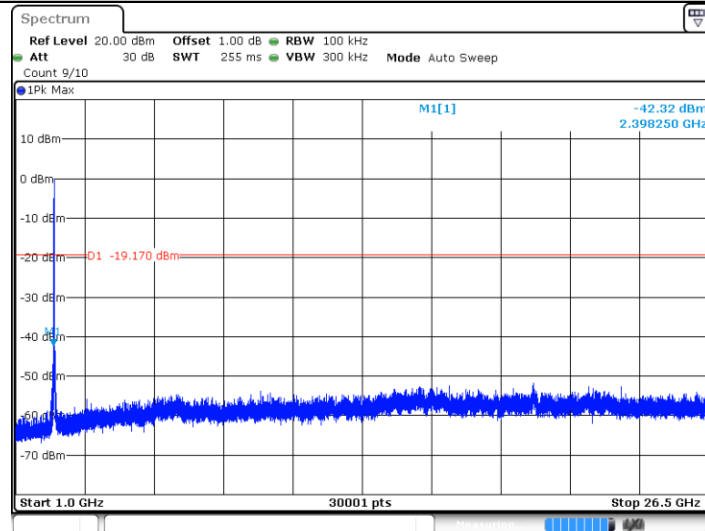


Date: 11.NOV.2021 09:10:50

11G\_Ant1\_2437\_0-Reference

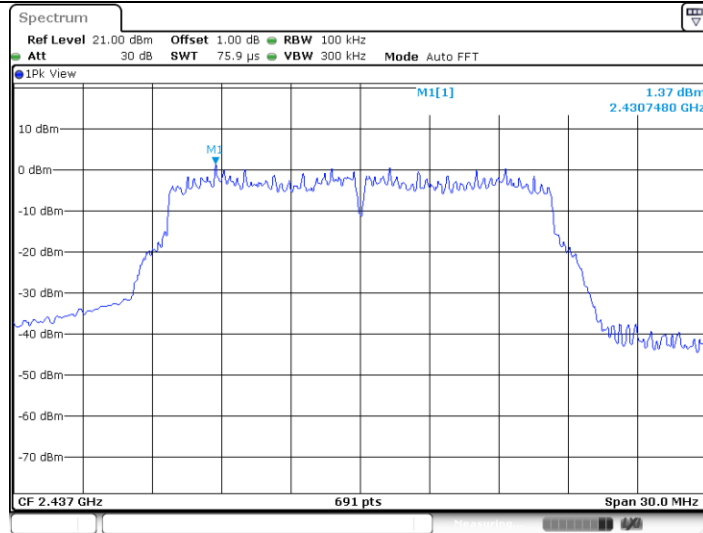


Date: 11.NOV.2021 09:15:31

11G\_Ant1\_2437\_30-1000

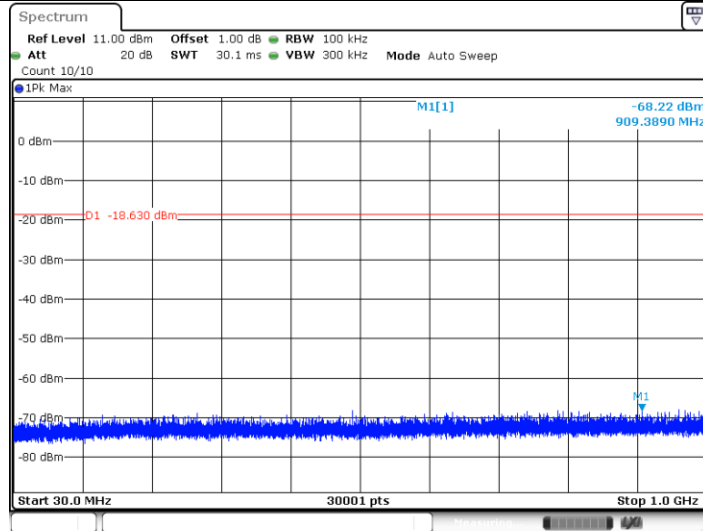


Date: 11.NOV.2021 09:15:37

11G\_Ant1\_2437\_1000-26500

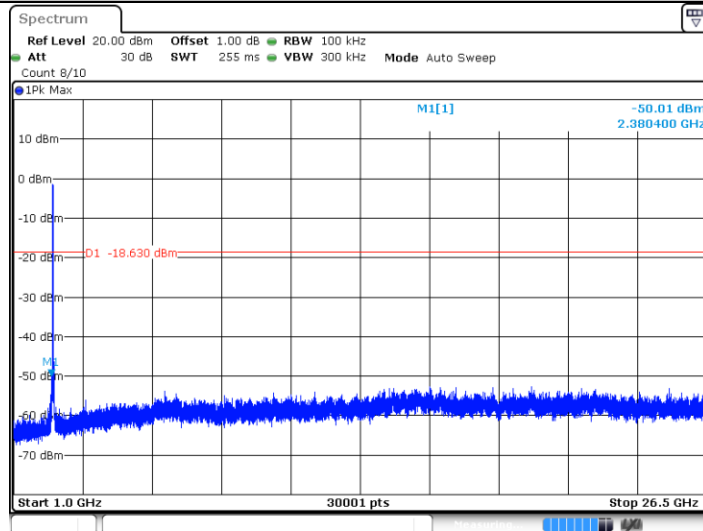


Date: 11.NOV.2021 09:15:45

11G\_Ant1\_2462\_0-Reference

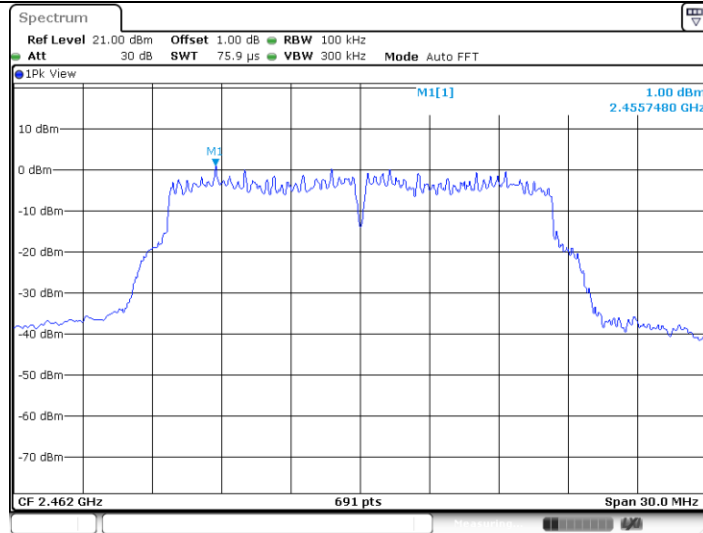


Date: 11.NOV.2021 09:18:29

11G\_Ant1\_2462\_30~1000

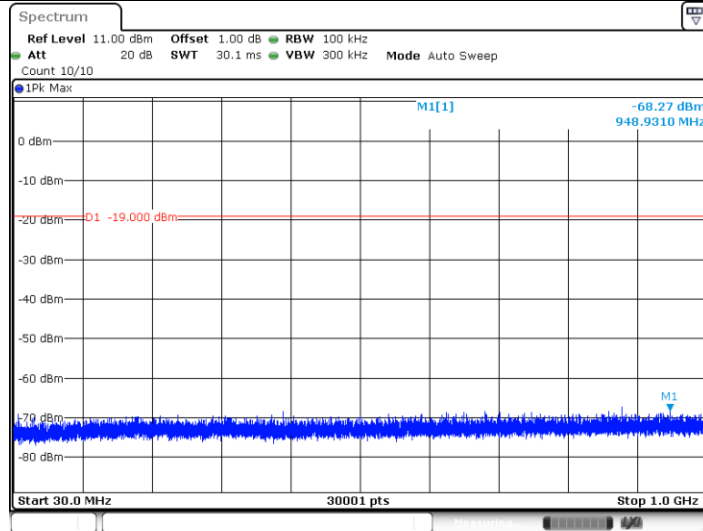


Date: 11.NOV.2021 09:18:35

11G\_Ant1\_2462\_1000~26500

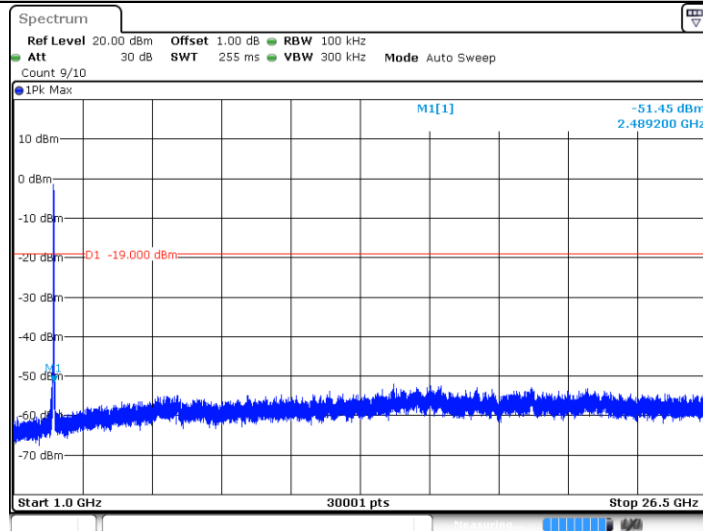


Date: 11.NOV.2021 09:18:43

11N20SISO\_Ant1\_2412\_0~Reference

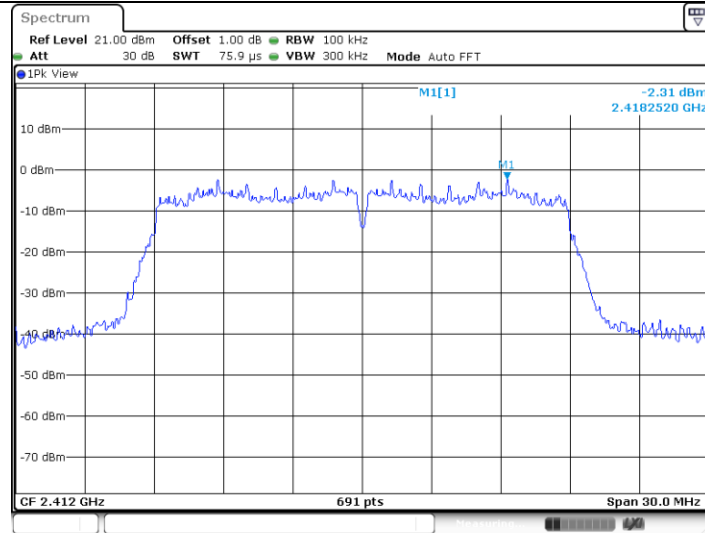


Date: 11.NOV.2021 09:22:19

11N20SISO\_Ant1\_2412\_30~1000

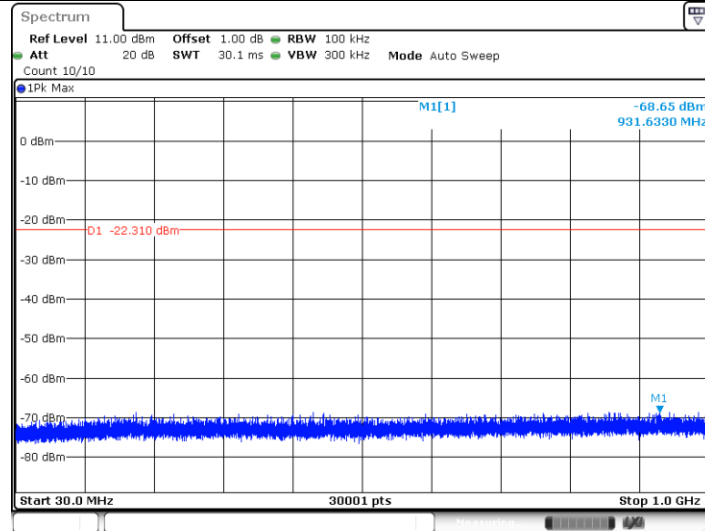


Date: 11.NOV.2021 09:22:25

11N20SISO\_Ant1\_2412\_1000~26500

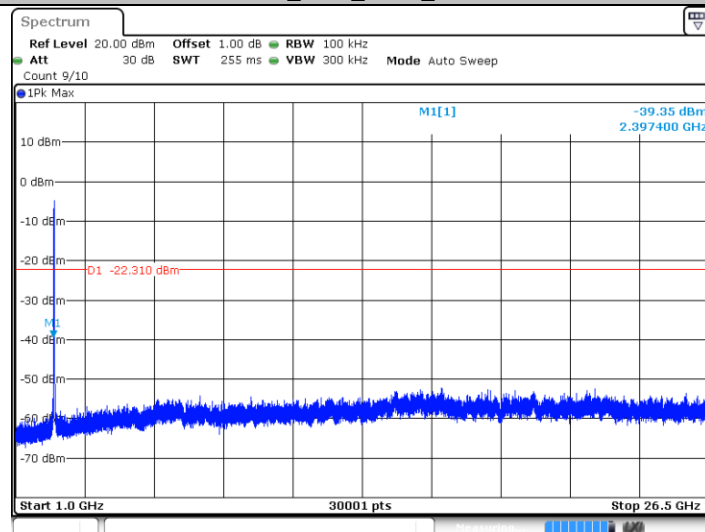


Date: 11.NOV.2021 09:22:33

11N20SISO\_Ant1\_2437\_0~Reference

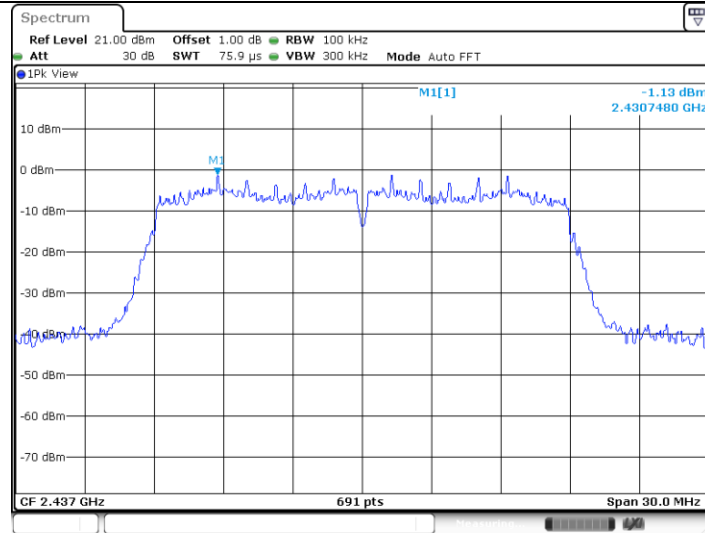


Date: 11.NOV.2021 09:25:56

11N20SISO\_Ant1\_2437\_30~1000

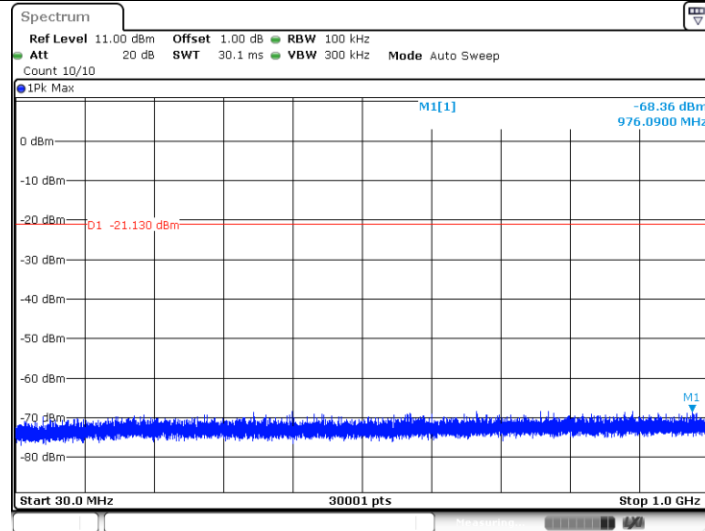


Date: 11.NOV.2021 09:26:02

11N20SISO\_Ant1\_2437\_1000~26500

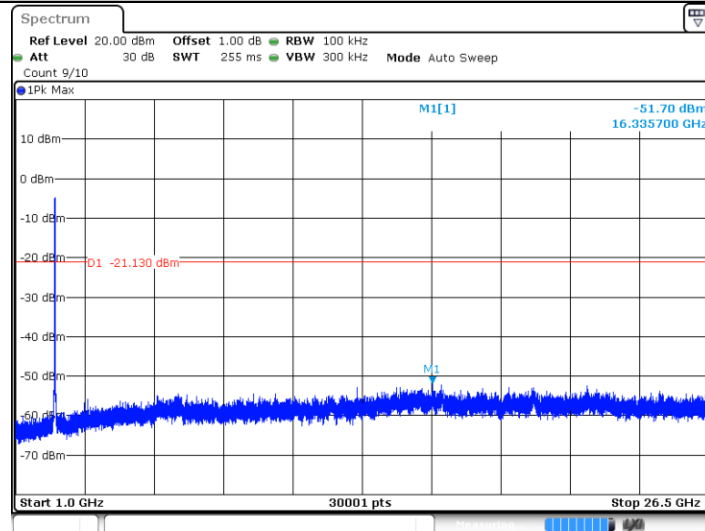


Date: 11.NOV.2021 09:26:10


11N20SISO\_Ant1\_2462\_0~Reference

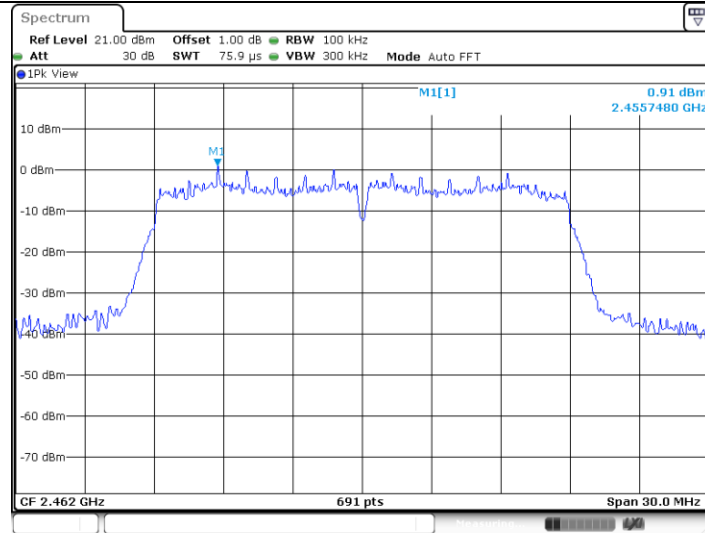

11N20SISO Ant1\_2462\_30~1000

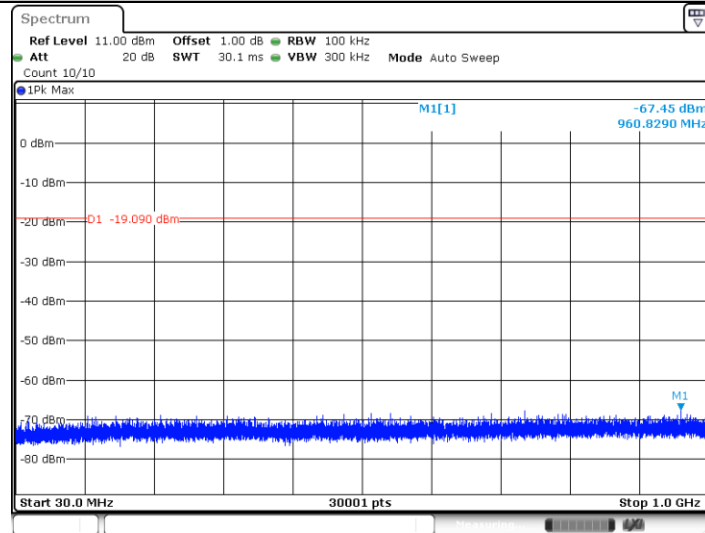

11N20SISO Ant1\_2462\_1000~26500

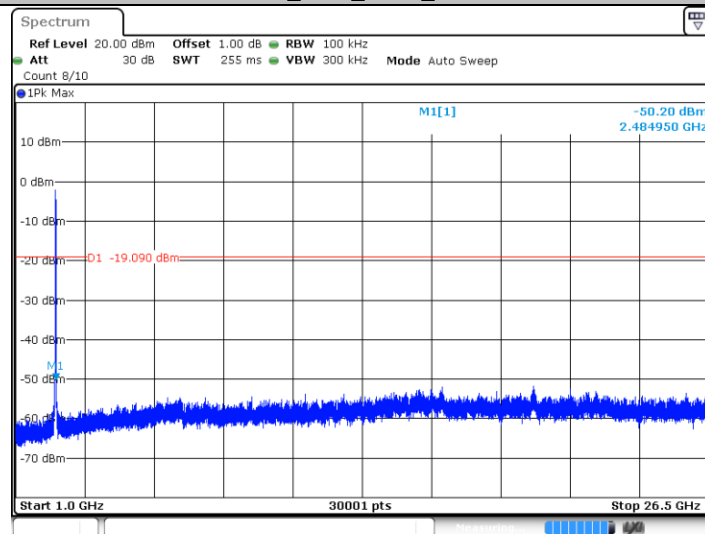

## 9.6 Band edge testing

### Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize, use the peak and delta measurement to record the result.
4. The level displayed must comply with the limit specified in this Section.
5. Repeat the test at the hopping off and hopping on mode, submit all the plots.



### Limit:

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Frequency Range MHz	Limit (dBc)
30-25000	-20


### Band edge testing

TestMode	Antenna	ChName	Channel (MHz)	RefLevel (dBm)	Result (dBm)	Limit(dBm)	Verdict
11B	Ant0	Low	2412	4.60	-38.1	<=-15.4	PASS
	Ant0	High	2462	4.37	-52.33	<=-15.63	PASS
11G	Ant0	Low	2412	0.19	-37.12	<=-19.81	PASS
	Ant0	High	2462	0.93	-45.6	<=-19.07	PASS
11N20	Ant0	Low	2412	-1.38	-37.6	<=-21.38	PASS
	Ant0	Low	2462	1.18	-44.04	<=-18.82	PASS

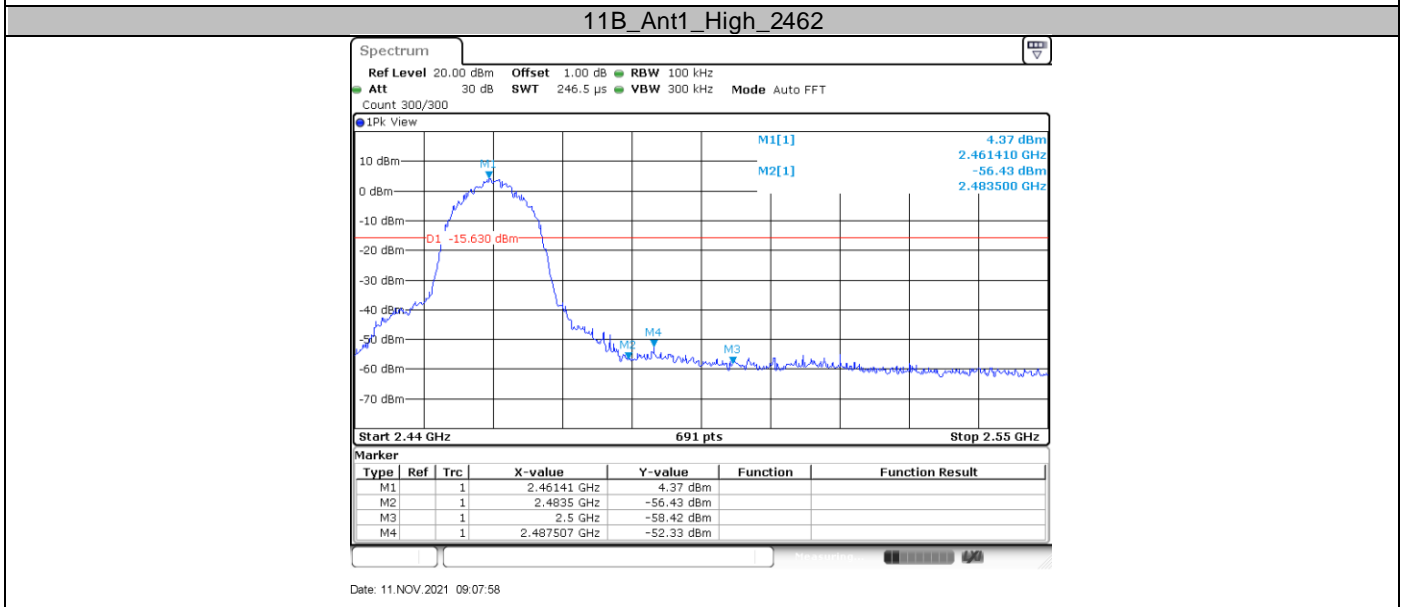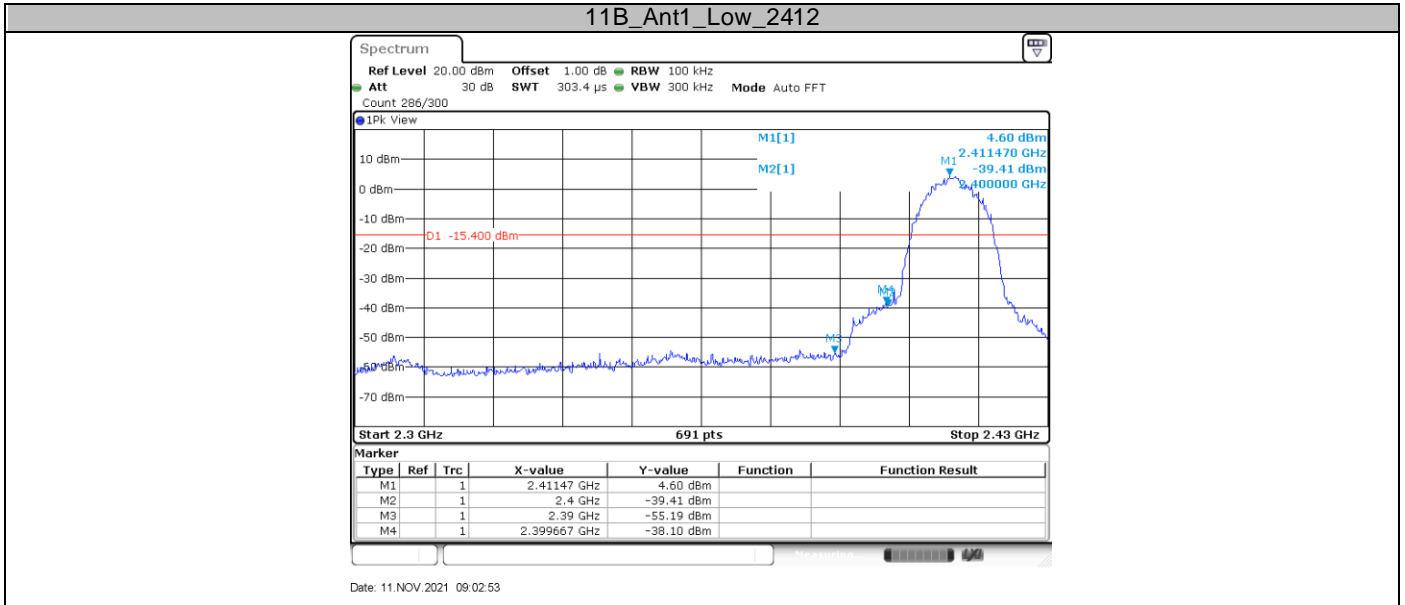

**11G\_Ant1\_Low\_2412**



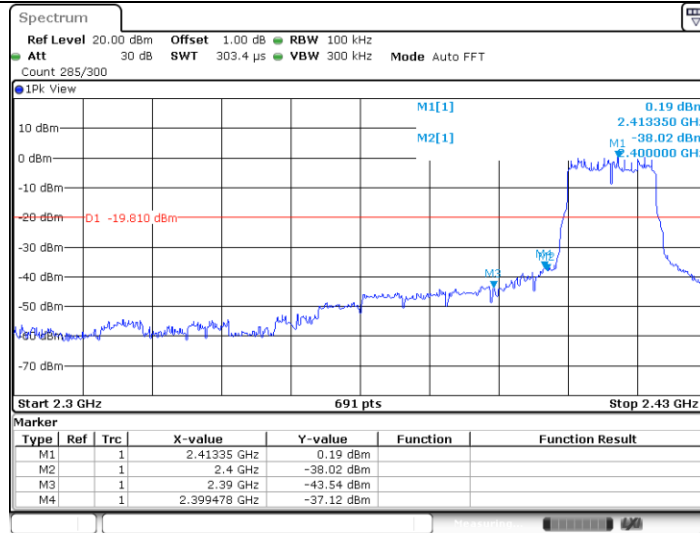


Date: 11.NOV.2021 09:10:31

11G Ant1\_High\_2462




Date: 11.NOV.2021 09:18:23

11N20SISO\_Ant1\_Low\_2412

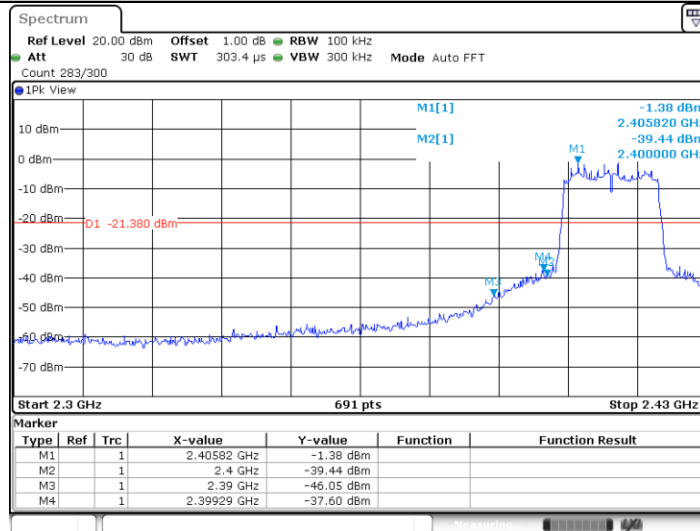

Date: 11.NOV.2021 09:22:13

11N20SISO\_Ant1\_High\_2462

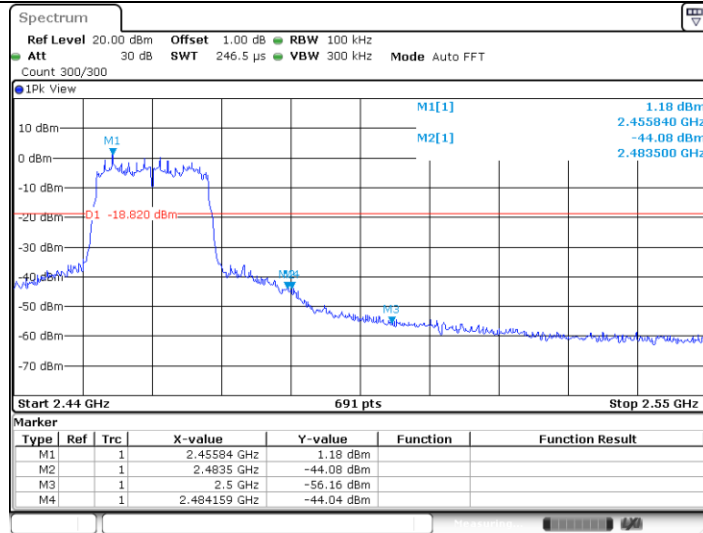

Date: 11.NOV.2021 09:28:59

## 9.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
4. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. Use the following spectrum analyzer settings According to C63.10:  
For Below 1GHz  
Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 KHz to 120KHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW $\geq$ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3  $\times$  RBW].

c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

## Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.


Frequency MHz	Field Strength $\mu$ V/m	Field Strength dB $\mu$ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

### Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

30MHz to 1000MHz:

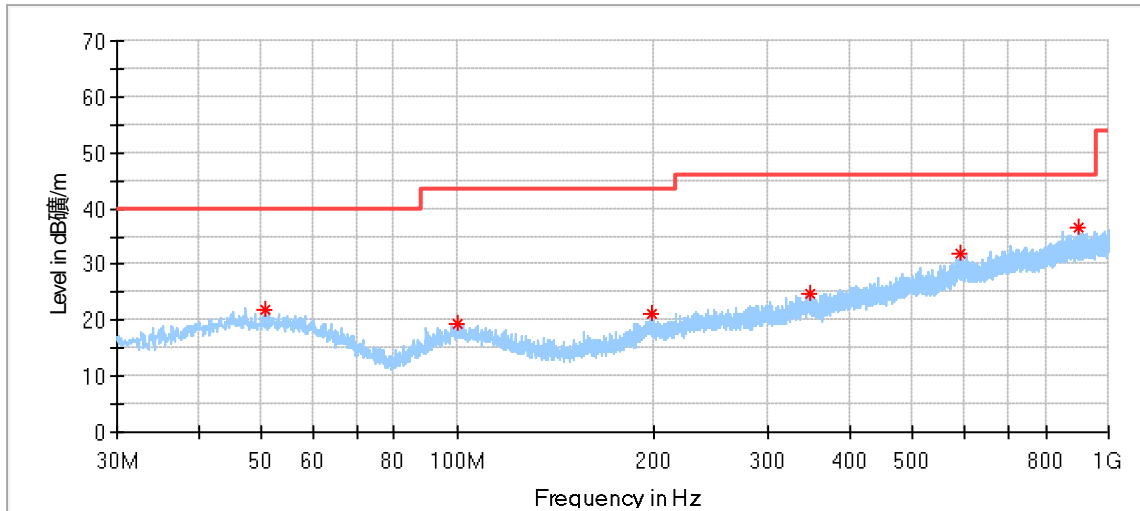


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.747222	21.92	40.00	18.08	100.0	H	251.0	20.86
100.378889	19.27	43.50	24.23	100.0	H	190.0	18.53
198.833889	21.15	43.50	22.35	200.0	H	272.0	18.61
346.974444	24.91	46.00	21.09	100.0	H	358.0	22.41
591.845556	32.01	46.00	13.99	200.0	H	74.0	27.45
899.173889	36.58	46.00	9.42	100.0	H	19.0	31.50

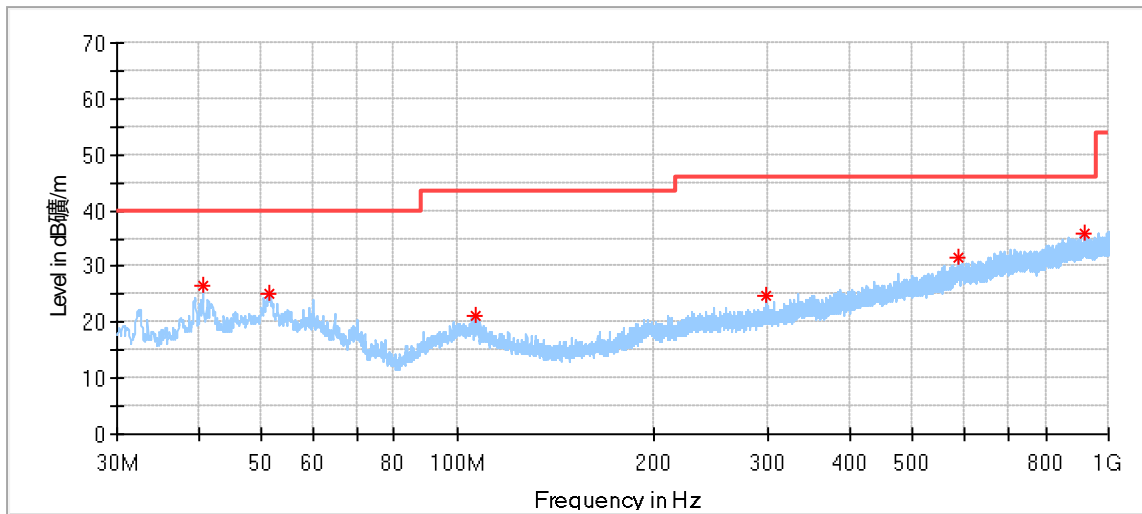

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.670000	26.68	40.00	13.32	100.0	V	0.0	19.77
51.555556	25.24	40.00	14.76	100.0	V	197.0	20.79
106.737778	21.29	43.50	22.21	100.0	V	100.0	18.44
296.911667	24.65	46.00	21.35	100.0	V	1.0	20.72
588.881667	31.46	46.00	14.54	100.0	V	33.0	27.37
916.903333	35.93	46.00	10.07	100.0	V	78.0	31.86


**1GHz -18GHz:**

11B-Ant0\_2412MHz  
Horizontal:

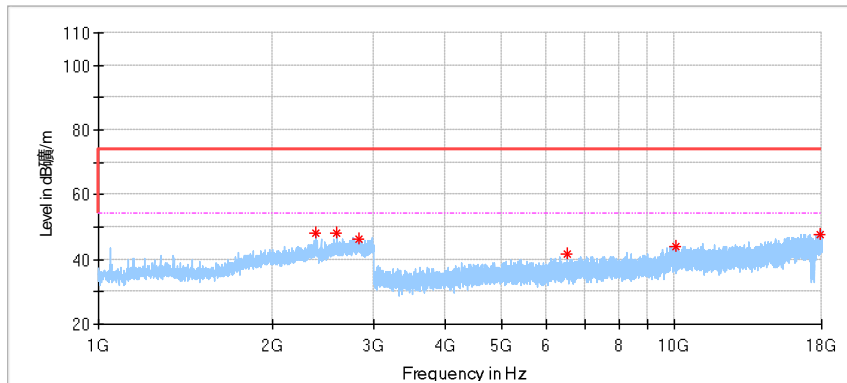


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2386.666667	48.16	74.00	25.84	150.0	H	158.0	-2.24
2596.666667	47.94	74.00	26.06	150.0	H	136.0	-1.51
2839.523810	46.14	74.00	27.86	150.0	H	187.0	-1.06
6515.000000	41.73	74.00	32.27	150.0	H	204.0	6.94
10039.500000	44.09	74.00	29.91	150.0	H	65.0	10.27
17840.500000	47.69	74.00	26.31	150.0	H	356.0	20.32

Vertical

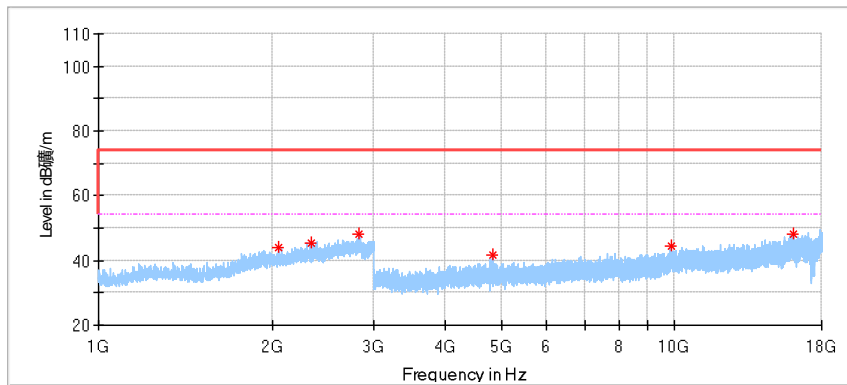


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2051.428571	44.14	74.00	29.86	150.0	V	82.0	-3.67
2346.666667	45.59	74.00	28.41	150.0	V	0.0	-2.36
2824.761905	48.01	74.00	25.99	150.0	V	38.0	-1.05
4821.500000	41.62	74.00	32.38	150.0	V	94.0	3.53
9843.000000	44.51	74.00	29.49	150.0	V	211.0	11.52
16110.500000	48.18	74.00	25.82	150.0	V	0.0	17.90

11B-Ant0\_2437MHz  
Horizontal:

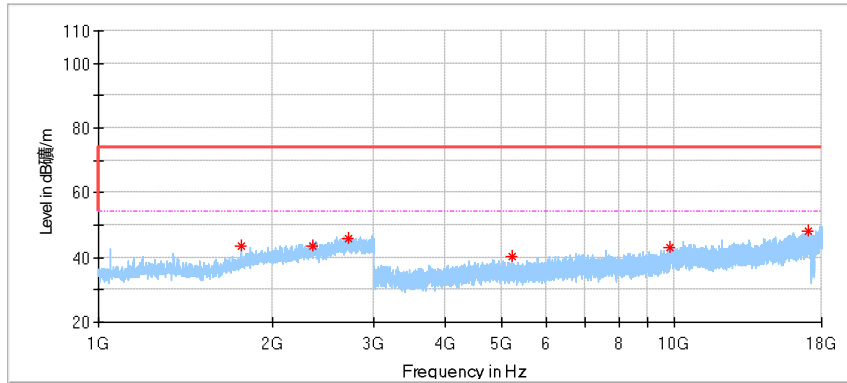

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1766.190476	43.50	74.00	30.50	150.0	H	216.0	-5.75
2354.761905	43.59	74.00	30.41	150.0	H	55.0	-2.38
2722.380952	45.78	74.00	28.22	150.0	H	106.0	-1.29
5234.000000	40.32	74.00	33.68	150.0	H	356.0	4.49
9838.000000	43.27	74.00	30.73	150.0	H	295.0	11.43
17023.000000	47.96	74.00	26.04	150.0	H	236.0	19.20


Vertical

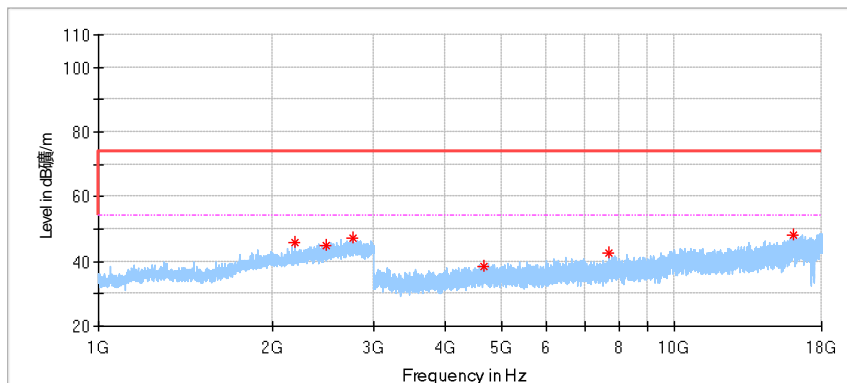

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2192.857143	45.81	74.00	28.19	150.0	V	180.0	-3.03
2477.619048	45.06	74.00	28.94	150.0	V	25.0	-1.83
2759.523810	47.23	74.00	26.77	150.0	V	172.0	-1.19
4668.000000	38.64	74.00	35.36	150.0	V	7.0	3.26
7701.500000	42.60	74.00	31.40	150.0	V	268.0	8.28
16072.500000	48.32	74.00	25.68	150.0	V	61.0	17.91




11B-Ant0\_2462MHz  
Horizontal:

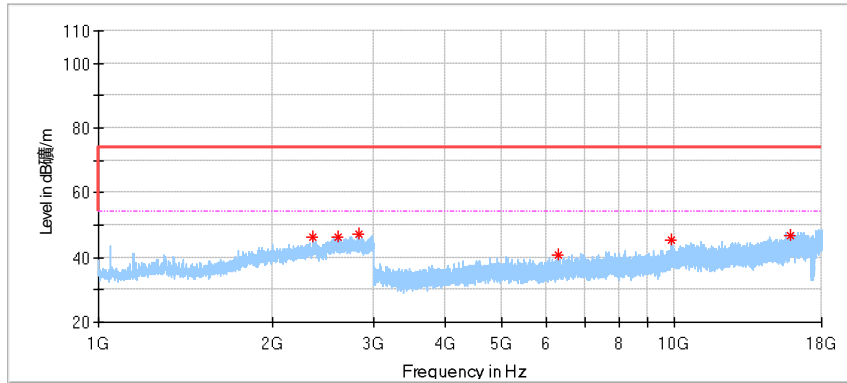


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.095238	46.35	74.00	27.65	150.0	H	117.0	-2.36
2601.428571	46.16	74.00	27.84	150.0	H	212.0	-1.50
2825.714286	47.02	74.00	26.98	150.0	H	21.0	-1.05
6297.500000	40.88	74.00	33.12	150.0	H	59.0	7.10
9848.000000	45.34	74.00	28.66	150.0	H	59.0	11.60
15910.000000	46.73	74.00	27.27	150.0	H	59.0	17.04

Vertical

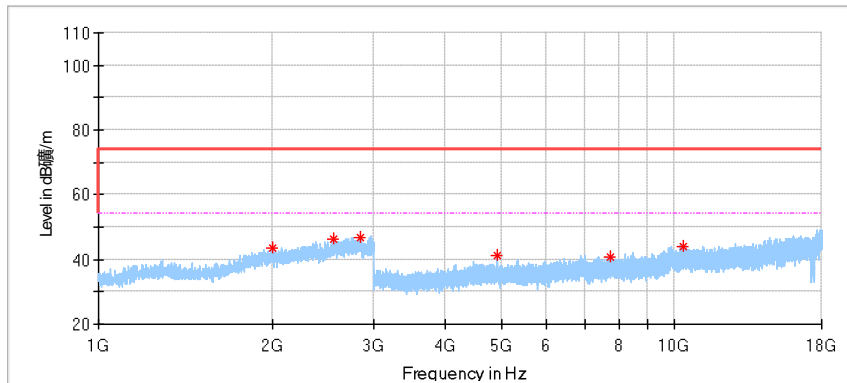


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2000.476191	43.51	74.00	30.49	150.0	V	202.0	-3.80
2564.761905	46.17	74.00	27.83	150.0	V	150.0	-1.55
2844.285714	46.93	74.00	27.07	150.0	V	216.0	-1.05
4922.000000	41.05	74.00	32.95	150.0	V	33.0	3.56
7719.500000	40.63	74.00	33.37	150.0	V	0.0	8.21
10372.000000	43.85	74.00	30.15	150.0	V	356.0	10.81

11G-Ant0\_2412MHz  
Horizontal:

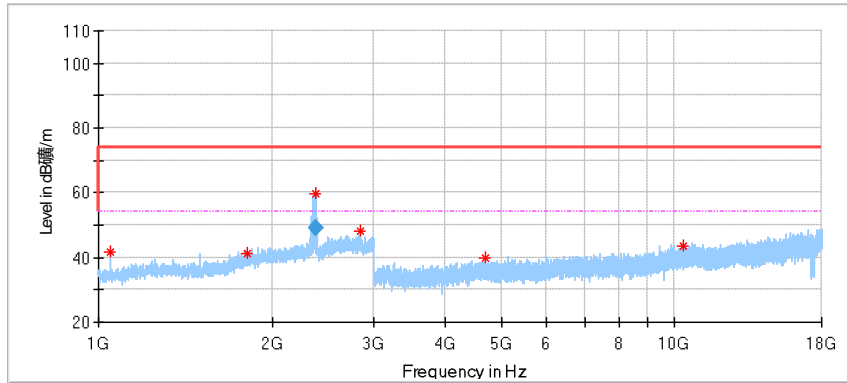


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1050.000000	41.64	74.00	32.36	150.0	H	33.0	-10.60
1811.428571	41.31	74.00	32.69	150.0	H	77.0	-5.15
2378.095238	59.49	74.00	14.51	150.0	H	91.0	-2.28
2841.428571	48.21	74.00	25.79	150.0	H	268.0	-1.06
4681.000000	39.63	74.00	34.37	150.0	H	0.0	3.29
10323.500000	43.53	74.00	30.47	150.0	H	0.0	10.75
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2378.095238	49.00	54.00	5.00	150.0	H	91.0	-2.28

Vertical

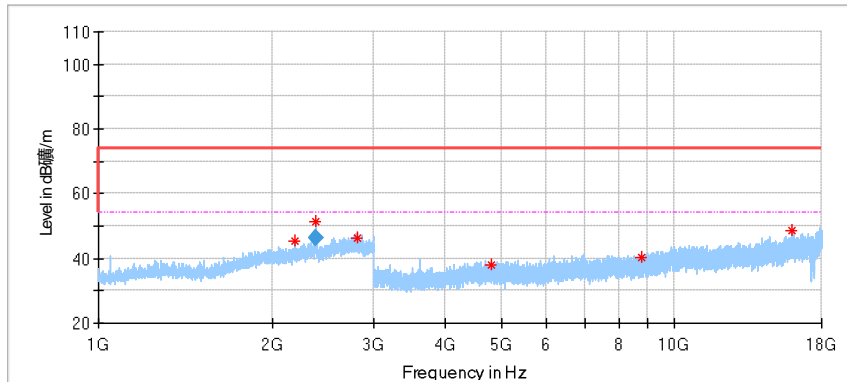


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2192.380952	45.26	74.00	28.74	150.0	V	164.0	-3.03
2376.666667	51.56	74.00	22.44	150.0	V	54.0	-2.29
2816.666667	46.29	74.00	27.71	150.0	V	245.0	-1.05
4820.000000	38.16	74.00	35.84	150.0	V	92.0	3.52
8768.000000	40.48	74.00	33.52	150.0	V	4.0	9.02
16008.500000	48.63	74.00	25.37	150.0	V	181.0	17.60
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2376.666667	46.50	54.00	7.50	150.0	V	54.0	-2.29

11G-Ant0\_2437MHz  
Horizontal:

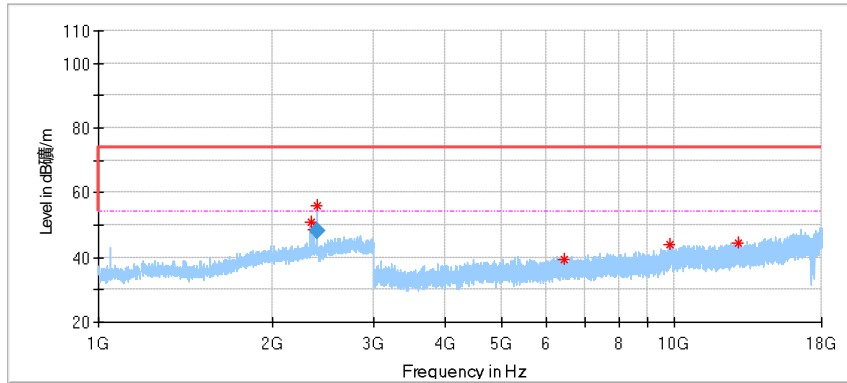


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.619048	50.97	74.00	23.03	150.0	H	85.0	-2.30
2367.142857	48.69	74.00	25.31	150.0	H	158.0	-2.33
2390.476191	55.89	74.00	18.11	150.0	H	129.0	-2.22
6423.000000	39.43	74.00	34.57	150.0	H	324.0	6.68
9835.500000	43.83	74.00	30.17	150.0	H	32.0	11.39
12882.500000	44.34	74.00	29.66	150.0	H	240.0	12.80
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2390.476191	48.00	54.00	6.00	150.0	H	129.0	-2.22

Vertical

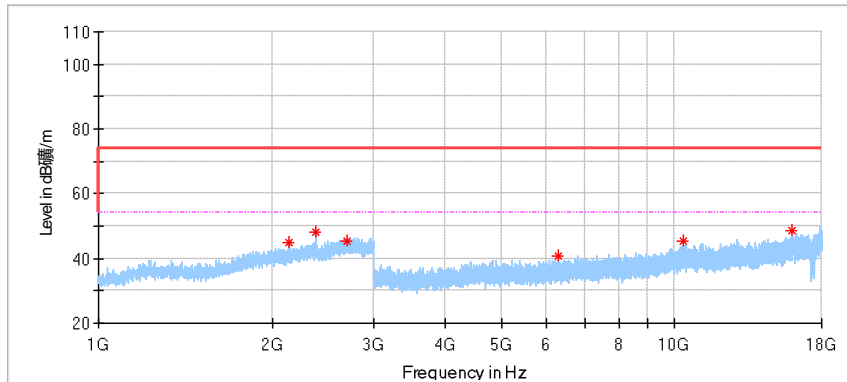


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2136.666667	44.82	74.00	29.18	150.0	V	0.0	-3.45
2380.476191	48.22	74.00	25.78	150.0	V	62.0	-2.27
2696.666667	45.26	74.00	28.74	150.0	V	190.0	-1.34
6294.000000	40.92	74.00	33.08	150.0	V	297.0	7.09
10375.500000	45.20	74.00	28.80	150.0	V	123.0	10.81
16020.000000	48.40	74.00	25.60	150.0	V	39.0	17.67

11G-Ant0\_2462MHz  
Horizontal:

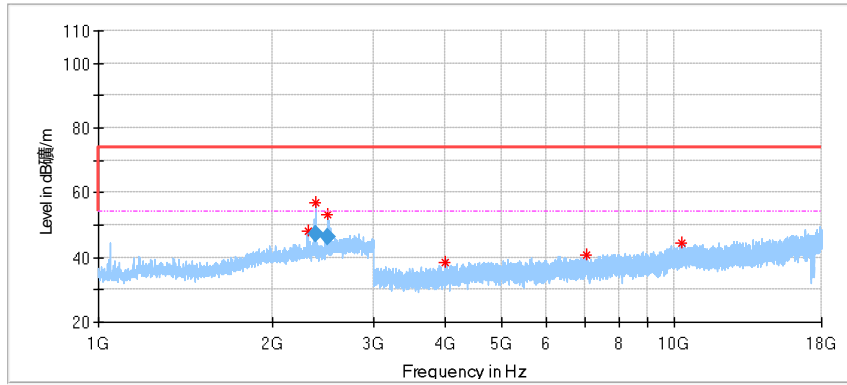


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2311.904762	48.15	74.00	25.85	150.0	H	136.0	-2.41
2379.523810	57.01	74.00	16.99	150.0	H	121.0	-2.27
2502.857143	53.10	74.00	20.90	150.0	H	114.0	-1.81
3999.500000	38.48	74.00	35.52	150.0	H	356.0	1.06
7033.000000	40.88	74.00	33.12	150.0	H	122.0	7.40
10296.000000	44.67	74.00	29.33	150.0	H	266.0	10.70
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2379.523810	47.13	54.00	6.87	150.0	H	121.0	-2.27
2502.857143	46.49	54.00	7.51	150.0	H	114.0	-1.81

Vertical

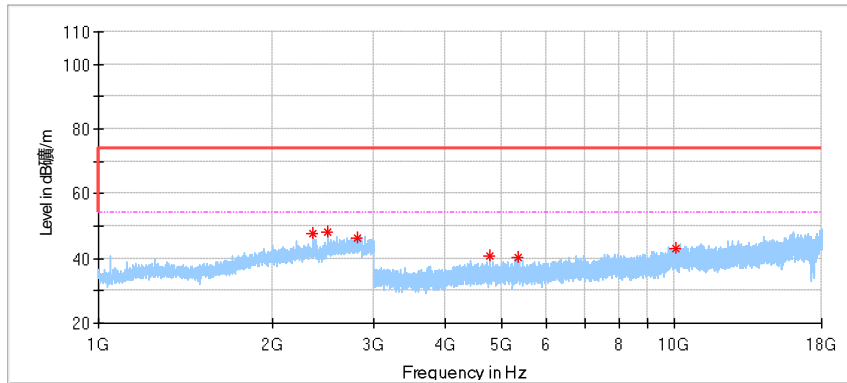


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2353.809524	47.57	74.00	26.43	150.0	V	0.0	-2.38
2504.761905	48.09	74.00	25.91	150.0	V	121.0	-1.80
2811.904762	46.28	74.00	27.72	150.0	V	304.0	-1.07
4785.500000	40.78	74.00	33.22	150.0	V	179.0	3.54
5343.500000	40.29	74.00	33.71	150.0	V	208.0	4.74
10023.000000	43.21	74.00	30.79	150.0	V	122.0	10.22

11N-HT20-Ant 0\_2412MHz  
Horizontal:

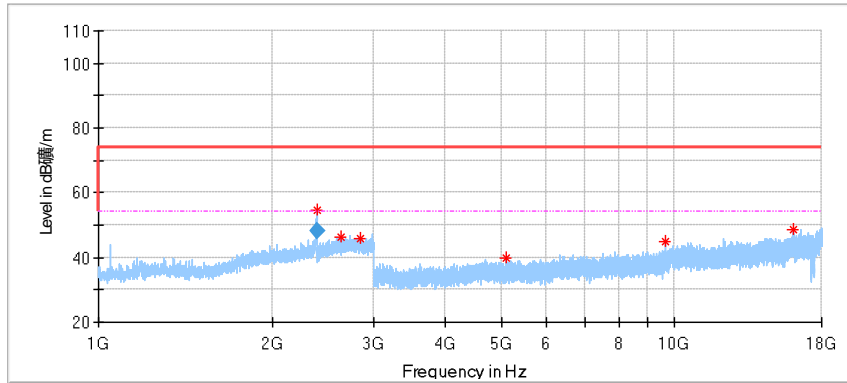


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2391.428571	54.52	74.00	19.48	150.0	H	113.0	-2.22
2638.095238	46.34	74.00	27.66	150.0	H	194.0	-1.39
2855.714286	45.82	74.00	28.18	150.0	H	223.0	-1.02
5116.500000	39.82	74.00	34.18	150.0	H	211.0	4.09
9648.000000	44.79	74.00	29.21	150.0	H	32.0	9.75
16107.500000	48.78	74.00	25.22	150.0	H	0.0	17.91
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2391.428571	48.04	54.00	5.96	150.0	H	113.0	-2.22

Vertical

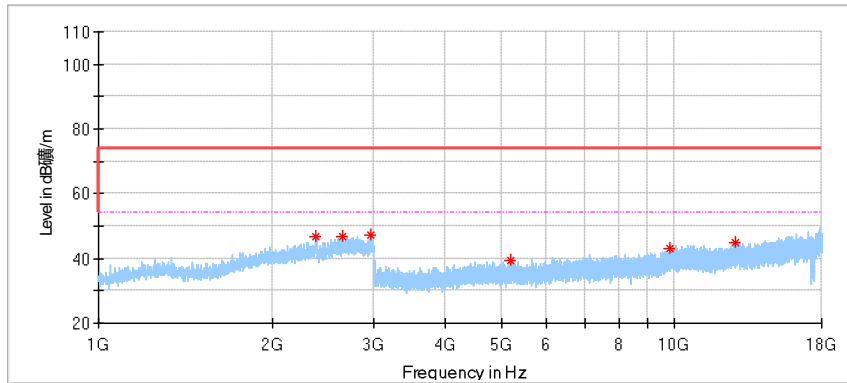


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.571429	46.79	74.00	27.21	150.0	V	188.0	-2.23
2648.095238	46.61	74.00	27.39	150.0	V	269.0	-1.37
2963.809524	47.34	74.00	26.66	150.0	V	0.0	-0.41
5207.500000	39.40	74.00	34.60	150.0	V	348.0	4.47
9835.500000	43.20	74.00	30.80	150.0	V	181.0	11.39
12758.500000	44.96	74.00	29.04	150.0	V	152.0	12.89

11N-HT20-Ant 0\_2437MHz  
Horizontal:

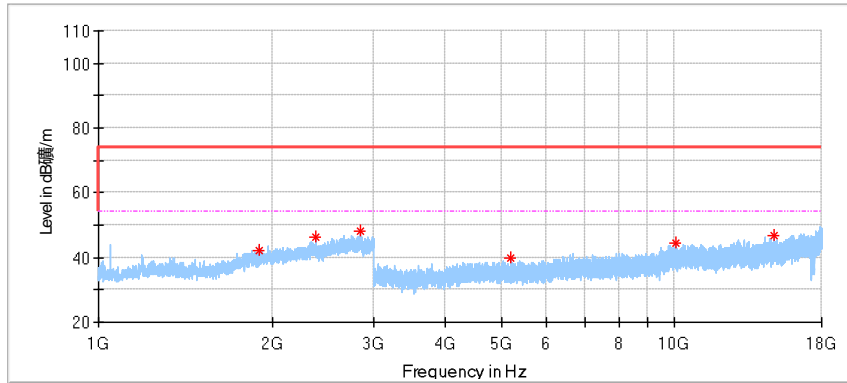


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1897.142857	42.03	74.00	31.97	150.0	H	342.0	-4.22
2381.428571	46.51	74.00	27.49	150.0	H	148.0	-2.26
2854.285714	48.14	74.00	25.86	150.0	H	352.0	-1.02
5202.500000	39.90	74.00	34.10	150.0	H	94.0	4.44
10062.000000	44.47	74.00	29.53	150.0	H	327.0	10.31
14901.000000	46.69	74.00	27.31	150.0	H	124.0	14.64

Vertical

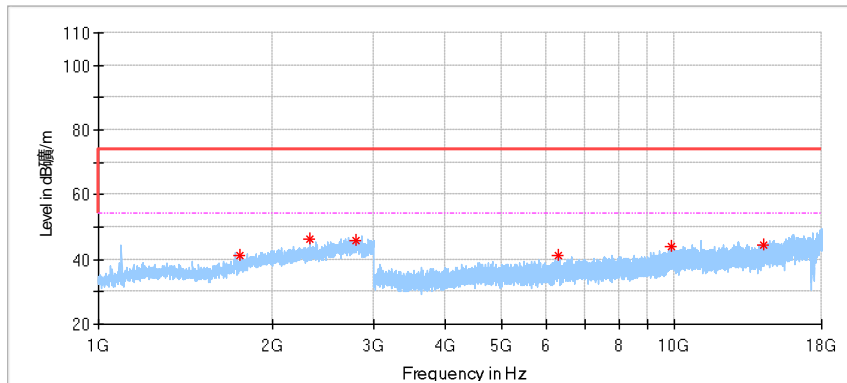


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1760.476191	41.24	74.00	32.76	150.0	V	92.0	-5.84
2330.476191	46.22	74.00	27.78	150.0	V	188.0	-2.26
2796.190476	46.04	74.00	27.96	150.0	V	188.0	-1.19
6299.500000	41.31	74.00	32.69	150.0	V	268.0	7.11
9870.500000	43.80	74.00	30.20	150.0	V	4.0	11.67
14279.500000	44.59	74.00	29.41	150.0	V	324.0	13.12

11N-HT20-Ant 0\_2462MHz  
Horizontal:

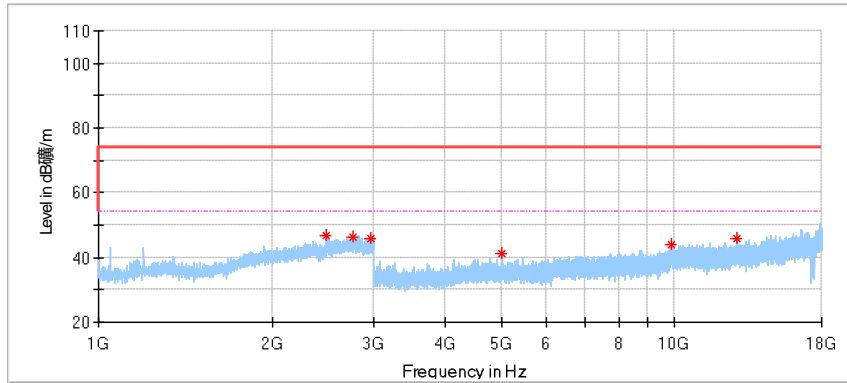

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2490.476191	46.90	74.00	27.10	150.0	H	151.0	-1.82
2768.095238	46.14	74.00	27.86	150.0	H	232.0	-1.20
2977.142857	46.04	74.00	27.96	150.0	H	144.0	-0.41
5015.000000	41.13	74.00	32.87	150.0	H	4.0	3.84
9899.000000	44.20	74.00	29.80	150.0	H	237.0	11.16
12831.000000	45.70	74.00	28.30	150.0	H	4.0	12.86


Vertical

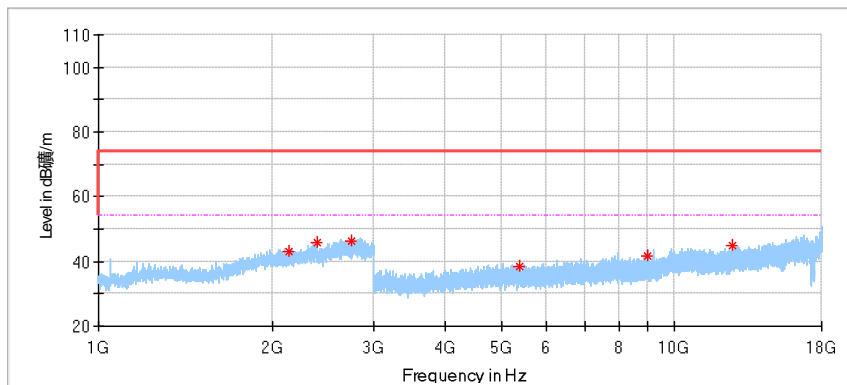

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2138.095238	43.27	74.00	30.73	150.0	V	76.0	-3.45
2392.857143	45.82	74.00	28.18	150.0	V	210.0	-2.21
2743.809524	46.09	74.00	27.91	150.0	V	269.0	-1.23
5387.000000	38.47	74.00	35.53	150.0	V	33.0	4.75
8989.000000	41.49	74.00	32.51	150.0	V	183.0	9.05
12585.000000	45.08	74.00	28.92	150.0	V	0.0	12.43


**Above 18GHz:**

11B \_2412MHz  
Horizontal:

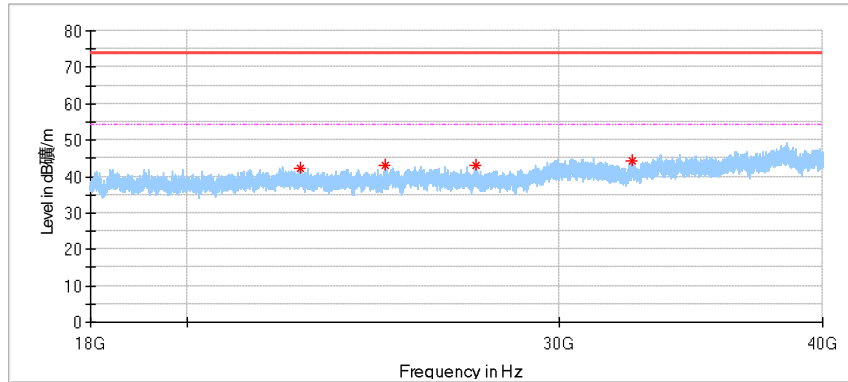

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22619.312500	42.40	74.00	31.60	150.0	H	0.0	0.33
24816.562500	43.11	74.00	30.89	150.0	H	312.0	0.83
27403.625000	42.92	74.00	31.08	150.0	H	329.0	1.75
32507.625000	44.48	74.00	29.52	150.0	H	203.0	1.92


Vertical

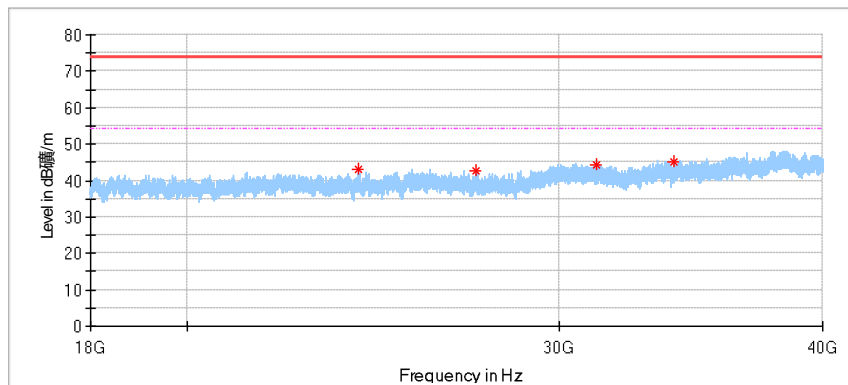

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24090.562500	43.24	74.00	30.76	150.0	V	0.0	0.58
27407.750000	42.53	74.00	31.47	150.0	V	294.0	1.74
31269.437500	44.15	74.00	29.85	150.0	V	48.0	1.59
33999.500000	45.29	74.00	28.71	150.0	V	279.0	3.20




11B\_2437MHz  
Horizontal:

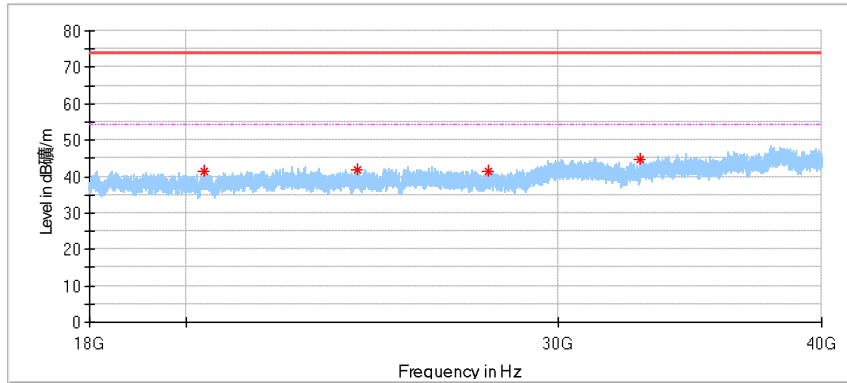


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20398.000000	41.53	74.00	32.47	150.0	H	218.0	-1.57
24096.062500	41.94	74.00	32.06	150.0	H	218.0	0.57
27818.875000	41.54	74.00	32.46	150.0	H	65.0	1.38
32806.000000	44.90	74.00	29.10	150.0	H	218.0	2.05

Vertical

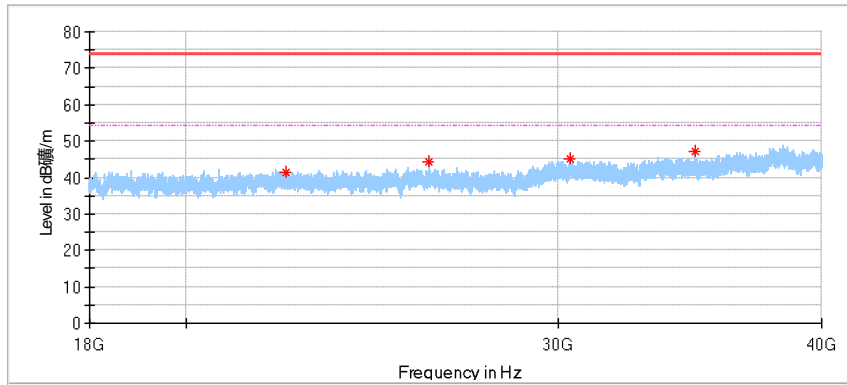


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22284.500000	41.45	74.00	32.55	150.0	V	51.0	0.31
26070.562500	44.38	74.00	29.62	150.0	V	97.0	1.55
30416.937500	44.95	74.00	29.05	150.0	V	264.0	2.05
34827.937500	47.01	74.00	26.99	150.0	V	36.0	3.74

11B\_2462MHz  
Horizontal:

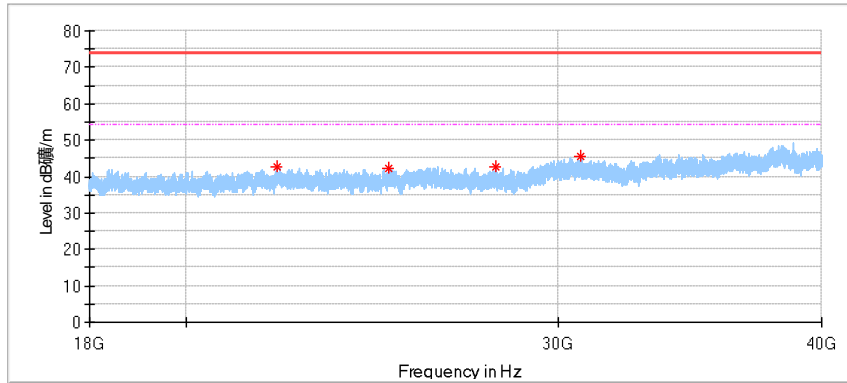

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22096.812500	42.60	74.00	31.40	150.0	H	0.0	0.11
24951.312500	42.32	74.00	31.68	150.0	H	356.0	1.14
28016.875000	42.77	74.00	31.23	150.0	H	0.0	1.23
30734.562500	45.46	74.00	28.54	150.0	H	7.0	1.87

Vertical

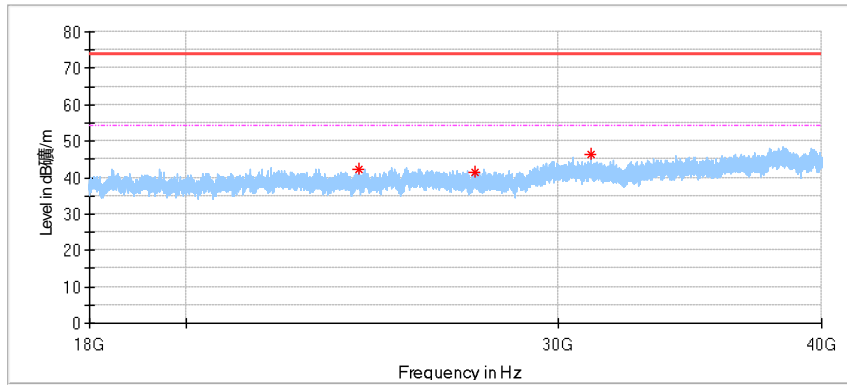

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
24153.812500	42.34	74.00	31.66	150.0	V	294.0	0.51
27423.562500	41.64	74.00	32.36	150.0	V	294.0	1.71
31094.125000	46.18	74.00	27.82	150.0	V	0.0	1.48

## 10 Test Equipment List

### Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2022-6-4
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2023-1-17
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2022-5-24
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2022-10-24
Pre-amplifier	Rohde & Schwarz	SCU 08F2	68-4-29-19-004	08400018	1	2022-10-24
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2022-7-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2022-7-27
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	2	2023-5-28
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.3 5.02	N/A	N/A

### Conducted Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2022-6-4
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2022-6-5
ISN	Rohde & Schwarz	ENY81	68-4-87-14-003	100177	1	2022-6-5
ISN	Rohde & Schwarz	ENY81-CA6	68-4-87-14-004	101664	1	2022-6-5
High Voltage Probe	Schwarzbeck	TK9420(VT 9420)	68-4-27-14-001	9420-584	1	2022-6-5
RF Current Probe	Rohde & Schwarz	EZ-17	68-4-27-14-002	100816	1	2022-6-5
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2022-6-3
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.3 5.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	1	2022-11-07

### Conducted RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2022-6-3
RF Switch Module	Rohde & Schwarz	OSP120/OS P-B157	68-4-93-14-003	101226/100851	1	2022-6-3
Power Splitter	Weinschel	1580	68-4-85-14-001	SC319	1	2022-6-3
10dB Attenuator	Weinschel	4M-10	68-4-81-14-003	43152	1	2022-6-3
10dB Attenuator	R&S	DNF	68-4-81-14-004	DNF-001	1	2022-6-3
10dB Attenuator	R&S	DNF	68-4-81-14-005	DNF-002	1	2022-6-3
10dB Attenuator	R&S	DNF	68-4-81-14-006	DNF-003	1	2022-6-3
10dB Attenuator	R&S	DNF	68-4-81-14-007	DNF-004	1	2022-6-3
Test software	Tonscend	System for BT/WIFI	68-4-74-14-006-A13	Version 2.6.77.0518	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	1	2022-11-07

## 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV432 or ENV4200)	3.62dB
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.70dB; Vertical: 4.67dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.65dB; Vertical: 4.63dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.05dB; Vertical: 5.04dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: $0.6 \times 10^{-7}$ or 1%
Uncertainty Evaluation for Humidity	0.936%
Uncertainty Evaluation for Temperature	0.195 °C