



# RF TEST REPORT

**Report No.:** 20230517G05486X-W2

**Product Name:** InfiRay Laser Rangefinder

**Model No.:** ILR-1200-3

**FCC ID:** 2AYGT-41-ILR

**Applicant:** IRay Technology Co., Ltd.

**Address:** 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.

**Dates of Testing:** 06/08/2023 - 06/16/2023

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338      **Fax:** 86 755 26627238

This test report consists of 32 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



### Test Report

**Product** .....: InfiRay Laser Rangefinder  
**Brand Name** .....: InfiRay  
**Trade Name** .....: InfiRay  
**Applicant**.....: IRay Technology Co., Ltd.  
**Applicant Address**.....: 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.  
**Manufacturer** .....: IRay Technology Co., Ltd.  
**Manufacturer Address** .....: 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA.  
**Test Standards**.....: 47 CFR Part 15 Subpart C  
ANSI C63.10-2013  
**Test Result**.....: Pass

**Tested by** .....: kim li 2023.06.20  


---

Kim Li, Test Engineer

**Reviewed by** .....: Chris You 2023.06.20  


---

Chris You, Senior Engineer

**Approved by** .....: Yang Fan 2023.06.20  


---

Yang Fan, Manager



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description .....	5
1.2. Test Standards and Results.....	6
1.3. Table for Supporting Units.....	7
1.4. EUT Operation Test Setup .....	7
1.5. Test environment and mode .....	7
1.6. Laboratory Facilities .....	8
<b>2. TEST REQUIREMENTS .....</b>	<b>9</b>
2.1. Antenna requirement.....	9
2.2. Maximum Conducted Output Power .....	10
2.3. 6dB and 99% Bandwidth .....	12
2.4. Power spectral density (PSD) .....	14
2.5. Conducted Band Edges and Spurious Emissions.....	16
2.6. Radiated Band Edge and Spurious Emission.....	18
<b>3. LIST OF MEASURING EQUIPMENT .....</b>	<b>25</b>
<b>4. UNCERTAINTY OF EVALUATION .....</b>	<b>26</b>
<b>APPENDIX A .....</b>	<b>27</b>



Change History		
Issue	Date	Reason for change
1.0	2023.06.20	First edition



## 1. General Information

### 1.1. EUT Description

Product Name	InfiRay Laser Rangefinder
Model No.	ILR-1200-3
Hardware Version	1-1
Software Version	V1.0
EUT supports Radios application	2.4GHz 802.15.4 ZigBee
Frequency Range	2405MHz~2480MHz
Channel Number	16
Bit Rate of Transmitter	250kbps
Modulation Type	OQPSK
Antenna Type	Internal Antenna
Antenna Gain	2.47dBi
Power supply	DC 3.0V

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.



## 1.2. Test Standards and Results

The purpose of the report is to conduct testing according to the following FCC certification standards:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Cuidance for Compliance Measurement on Digital Transmission Systems, Frequency Hopping Spread Spectrum Systems, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203 15.247(c)	Antenna Requirement	PASS
2	15.247(b)(3)	Peak Conducted Output Power	PASS
3	15.247(a)(2)	6dB and 99% Bandwidth	PASS
4	15.247(d)	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	Power spectral density (PSD)	PASS
6	15.209 15.205 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB 558074 D01 15.247 Meas Guidance v05r02.

16 channels are provided for Zigbee.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

Note: Channels 11, 18 and 26 were selected for OQPSK as the low, mid and high channels for testing.

Test Items	Modulation Type	Data Rate	Channel
Peak Conducted Output Power Power Spectral Density 6dB and 99% Bandwidth Conducted Spurious Emission Radiated Spurious Emission	OQPSK	250kbps	11/18/26
Band Edge	OQPSK	250kbps	11/26

### 1.3. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Laptop	HP	TPN-Q221	HP	5CD14347QB	FCC DOC

### 1.4. EUT Operation Test Setup

For RF test items, an engineering test program was provided and enable to make EUT transmitting.

### 1.5. Test environment and mode

During the measurement, the environmental conditions were within the listed ranges:

Operating Environment	
Temperature	15°C - 35°C
Humidity	30% -60%
Atmospheric Pressure	86KPa-106KPa
Test mode:	
Continuously transmitting mode	Keep the EUT in continuous transmitting with modulation



## **1.6. Laboratory Facilities**

### **FCC-Registration No.: 406086**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Sep. 30, 2023.

### **ISED Registration: 11185A-1**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Sep. 30, 2023.

### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.





## 2. Test Requirements

### 2.1. Antenna requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### 2.1.2. Antenna Information

**Antenna Category:** Internal Antenna

The internal antenna is connected to the antenna port of the EUT through an RF cable.

##### Antenna General Information:

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain
1	LTE Flip Feature Phone	2405-2480MHz	Internal	2.47dBi

#### 2.1.3. Result: comply

Please refer to the internal photos of EUT for antenna photos.

## 2.2. Maximum Conducted Output Power


### 2.2.1. Limit of Maximum Conducted Output Power

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W.

### 2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.2.3. Test Setup

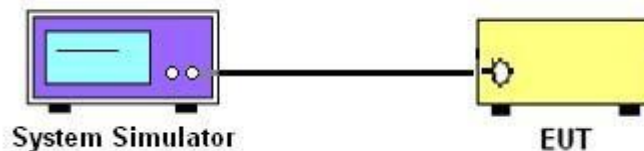

### 2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.9.1.1.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:  
RBW  $\geq$  DTS bandwidth / VBW  $\geq$  3\*RBW / Sweep time: Auto couple / Detector mode: Peak /  
Trace mode: Max hold / Allow trace to fully stabilize / Use peak marker function to determine the peak amplitude level.
5. Record the measurement results in the test report.



### **2.2.5. Test Result of Maximum Conducted Output Power**

Please refer to Appendix A for detail.

## 2.3. 6dB and 99% Bandwidth


### 2.3.1. Limit of 6dB and 99% Bandwidth

The minimum 6 dB Occupied bandwidth shall be at least 500 kHz.

### 2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.3.3. Test Setup

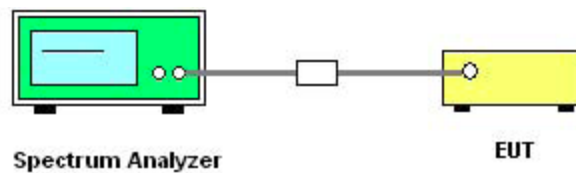

### 2.3.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the spectrum analyzer “Channel Bandwidth” function to easurement the 6dB EBW and 99% OBW.
5. For 6dB EBW Use the following spectrum analyzer settings:  
RBW: 100kHz / VBW: 300kHz / Detector: Peak / Trace mode: Max hold / Sweep time: Auto couple / Allow trace to fully stabilize.
6. For 99% OBW Use the following spectrum analyzer settings:  
Set RBW = approximately 1% EBW or 1.5 times to 5.0 times the OBW,  $VBW \geq 3 \times RBW$ .
7. Record the measurement results in the test report.



### **2.3.5. Test Results of 6dB and 99% Bandwidth**

Please refer to Appendix A for detail.

## 2.4. Power spectral density (PSD)


### 2.4.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

### 2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.4.3. Test Setup

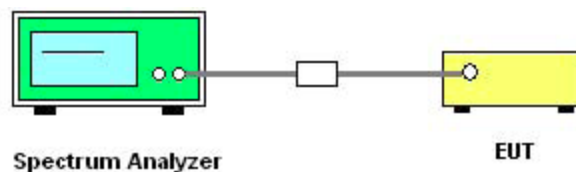

### 2.4.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.10.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:  
Set instrument center frequency to DTS channel center frequency / Set the span to 1.5 times the DTS bandwidth / RBW: 3kHz / VBW: 10kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum power level.
5. Record the measurement results in the test report.



#### **2.4.5. Test Results of Power spectral density**

Please refer to Appendix A for detail.

## 2.5. Conducted Band Edges and Spurious Emissions


### 2.5.1. Limit of Conducted Band Edges and Spurious Emissions

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that.

### 2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

### 2.5.3. Test Setup

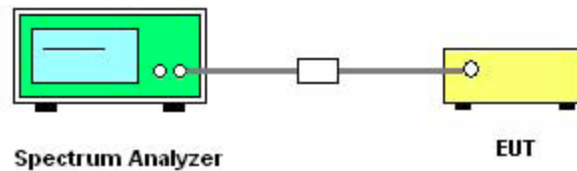

### 2.5.4. Test Procedure

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.11 and 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:

Reference level measurement: Set spectrum analyzer center frequency to DTS channel center frequency / Set the span to  $\geq 1.5$  times the DTS bandwidth / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum PSD level and attenuate it by 20dB.

Emission level measurement: Set the center frequency and span to encompass frequency range to be measured / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum amplitude level.

5. Record the measurement results in the test report.





### **2.5.5. Test Results of Conducted Band Edges and Spurious Emissions**

Please refer to Appendix A for detail.



## 2.6. Radiated Band Edge and Spurious Emission

### 2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level. If the transmitter uses an RMS average conducted power limit, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

§15.209(a) Radiated emission limits:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Restricted bands of operation refer to §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41	/	/	/

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


<sup>2</sup>Above 38.6.

## 2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

## 2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

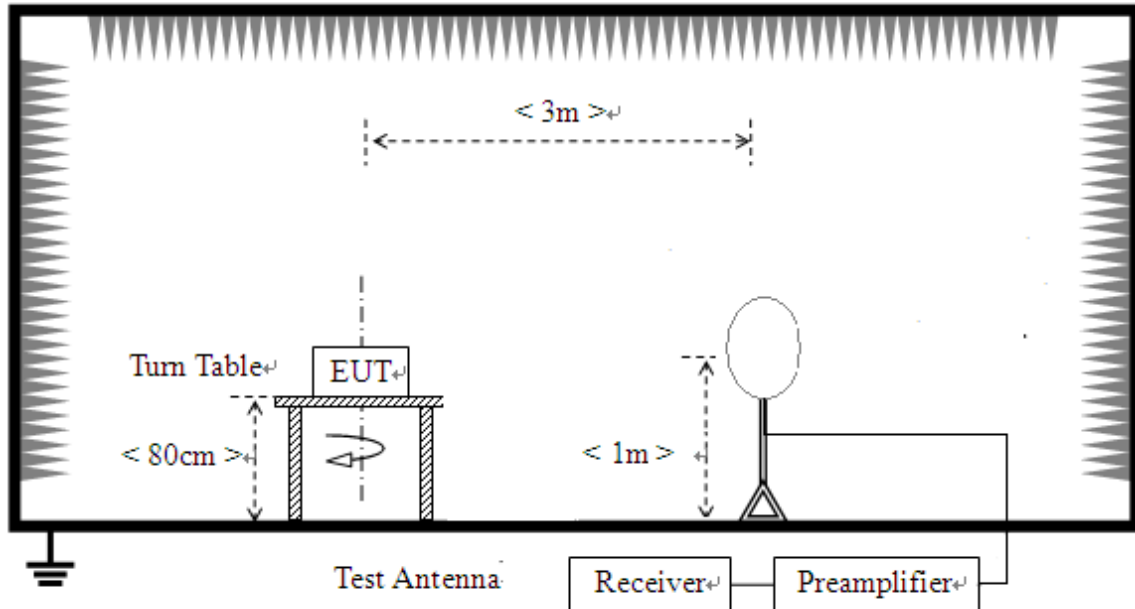

For radiated emissions from 30MHz to 1GHz

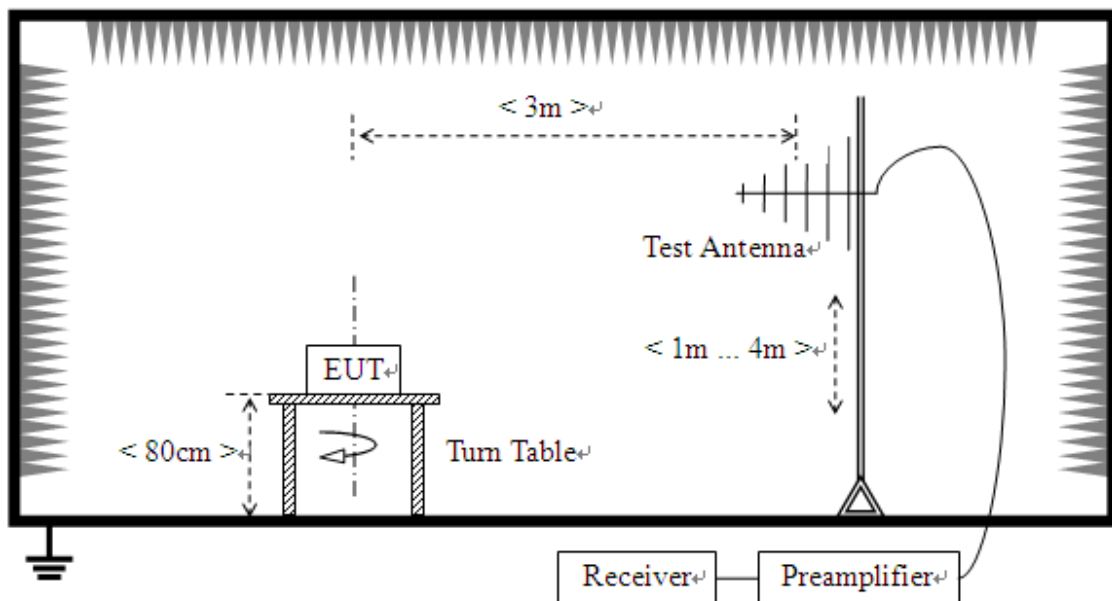

### For radiated emissions above 1GHz

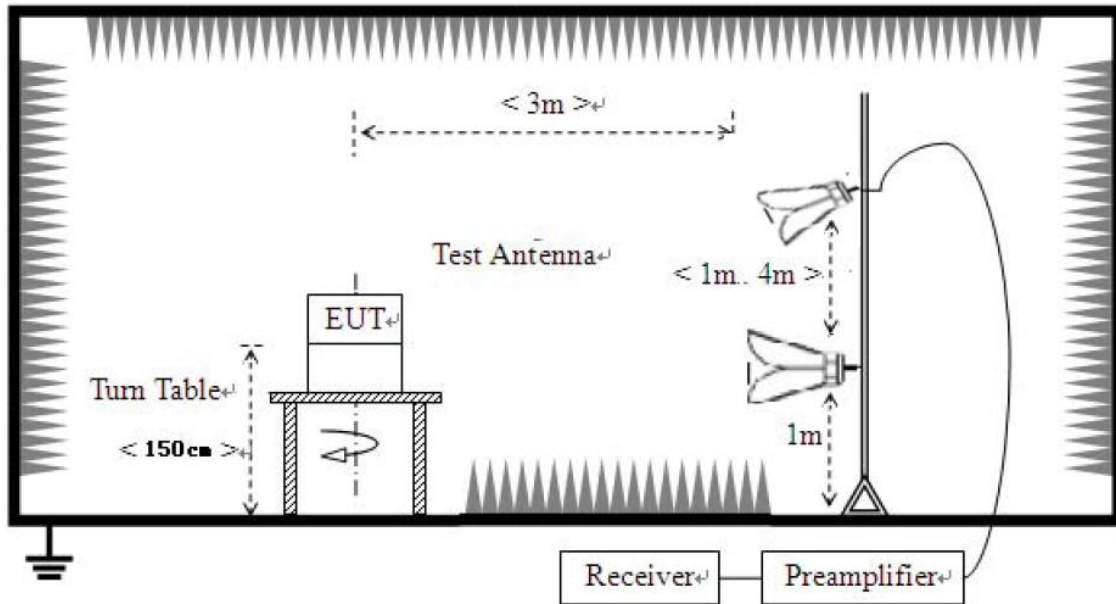

#### 2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8m for below 1GHz and 1.5m for above 1GHz above the ground at a 3 meters semi-anechoic chamber.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then



reported in a data sheet.

7. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

### **2.6.5. Test Results of Radiated Band Edge and Spurious Emission**


NOTE 1: For 9 kHz to 30MHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

NOTE 2: For 30MHz to 1GHz, All of the EUT Configure mode were tested and found 2480MHz channel is the worst mode, the worst case is recorded in this report.

NOTE 3: Antenna height and turntable angle are the worst positions, the worst case is recorded in this report.



**For 30MHz to 1000MHz**

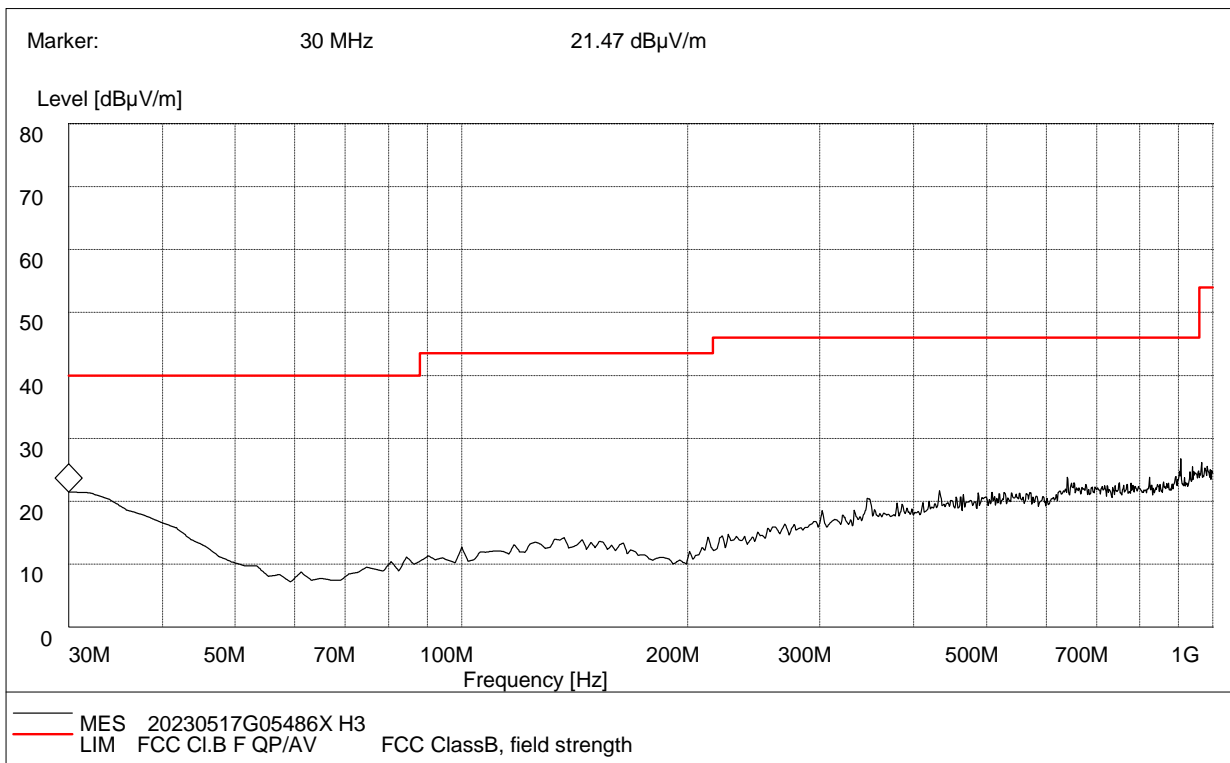


Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Polarity
30.120000	20.47	120.000	19.3	100.0	40.0	19.53	Horizontal
37.770000	17.77	120.000	16.7	100.0	40.0	22.23	Horizontal
99.970000	12.74	120.000	9.9	100.0	43.5	30.76	Horizontal
136.910000	14.20	120.000	12.6	100.0	43.5	29.30	Horizontal
432.380000	20.68	120.000	17.9	100.0	46.0	25.32	Horizontal
640.380000	22.80	120.000	19.9	100.0	46.0	23.20	Horizontal

**Test Result : Pass**

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

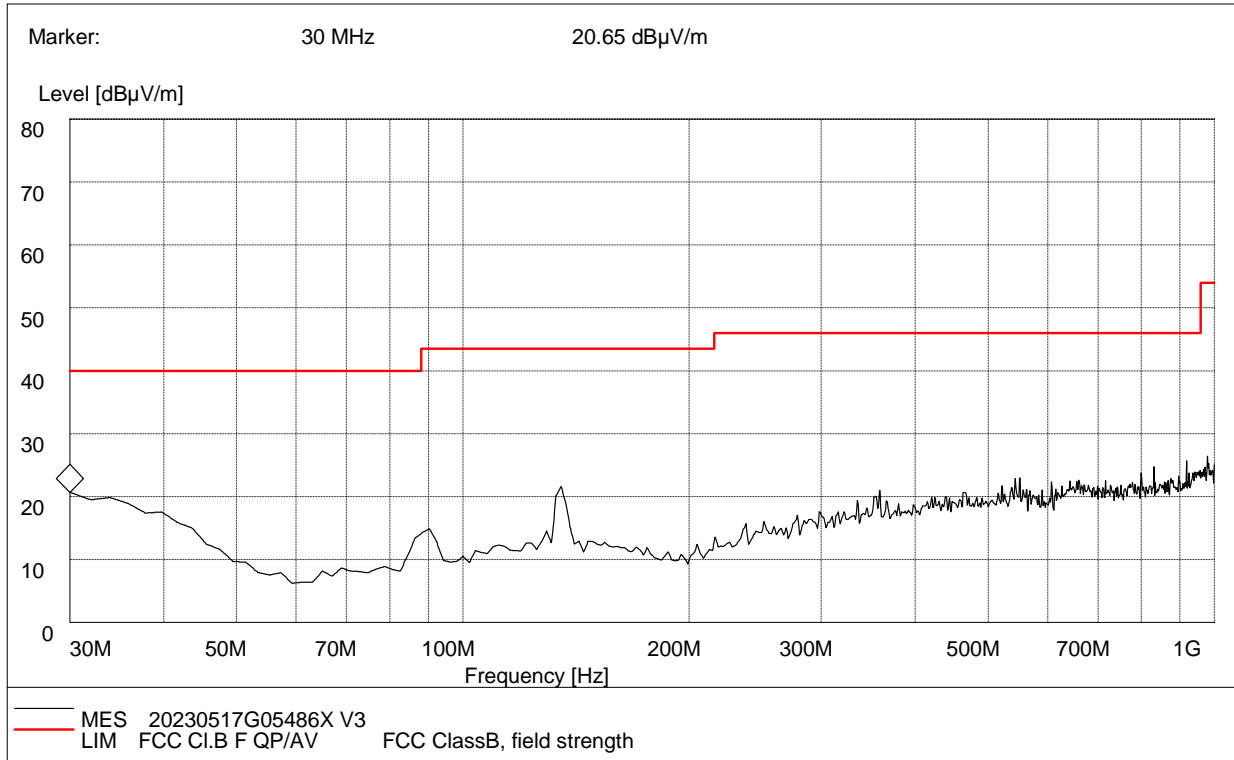

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Polarity
30.210000	19.65	120.000	19.3	100.0	40.0	20.35	Vertical
34.120000	19.95	120.000	19.3	100.0	40.0	20.05	Vertical
90.260000	14.88	120.000	9.9	100.0	43.5	28.62	Vertical
134.960000	20.61	120.000	12.6	100.0	43.5	22.89	Vertical
358.510000	20.23	120.000	16.9	100.0	46.0	25.77	Vertical
543.160000	21.89	120.000	19.5	100.0	46.0	24.11	Vertical

**Test Result : Pass**

**Remark:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

**For 1GHz to 25GHz**

OQPSK_2405MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
2390.00	56.78	74.00	-17.22	1.70	220	59.87	-3.09	Horizontal	Peak
2390.00	48.19	54.00	-5.81	1.70	220	51.28	-3.09	Horizontal	Average
4810.00	58.33	74.00	-15.67	1.70	220	57.07	1.26	Horizontal	Peak
4810.00	51.63	54.00	-2.37	1.70	220	51.37	1.26	Horizontal	Average
7215.00	55.13	74.00	-18.87	1.70	220	48.96	6.17	Horizontal	Peak
7215.00	46.48	54.00	-7.52	1.70	220	40.31	6.17	Horizontal	Average
2390.00	56.75	74.00	-17.25	1.50	190	59.84	-3.09	Vertical	Peak
2390.00	48.32	54.00	-5.68	1.50	190	51.41	-3.09	Vertical	Average
4810.00	59.01	74.00	-14.99	1.50	190	57.75	1.26	Vertical	Peak
4810.00	52.50	54.00	-1.50	1.50	190	52.24	1.26	Vertical	Average
7215.00	55.69	74.00	-18.31	1.50	190	49.52	6.17	Vertical	Peak
7215.00	46.83	54.00	-7.17	1.50	190	40.66	6.17	Vertical	Average

OQPSK_2480MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
2483.50	57.78	74.00	-16.22	1.70	220	62.53	-4.75	Horizontal	Peak
2483.50	50.29	54.00	-3.71	1.70	220	55.04	-4.75	Horizontal	Average
4960.00	51.66	74.00	-22.34	1.70	220	51.42	0.24	Horizontal	Peak
4960.00	44.27	54.00	-9.73	1.70	220	44.03	0.24	Horizontal	Average
7440.00	54.06	74.00	-19.94	1.70	220	48.24	5.82	Horizontal	Peak
7440.00	45.87	54.00	-8.13	1.70	220	40.05	5.82	Horizontal	Average
2483.50	59.88	74.00	-14.12	1.50	190	64.63	-4.75	Vertical	Peak
2483.50	51.82	54.00	-2.18	1.50	190	56.57	-4.75	Vertical	Average
4960.00	55.79	74.00	-18.21	1.50	190	55.55	0.24	Vertical	Peak
4960.00	49.66	54.00	-4.34	1.50	190	49.42	0.24	Vertical	Average
7440.00	54.30	74.00	-19.70	1.50	190	48.48	5.82	Vertical	Peak
7440.00	46.71	54.00	-7.29	1.50	190	40.89	5.82	Vertical	Average

*Remark:*

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.





### 3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2022.07.21	2023.07.20
2	5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.06.09	2027.06.08
3	Loop Antenna	Schwarz beck	HFH2-Z2	A0304220	2022.05.02	2025.05.01
4	Broadband antenna (30MHz~1GHz)	R&S	HL562	A0304224	2020.06.19	2023.06.18
5	EMI Horn Ant. (1-18G)	ETC	1209	A150402241	2021.01.02	2024.01.01
6	Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2020.06.19	2023.06.18
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2022.12.13	2023.12.12
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2022.12.13	2023.12.12
9	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2023.02.20	2024.02.19
10	Test Receiver	R&S	ESIB7	A0501375	2023.03.16	2024.03.15
11	Broadband Ant.	2786	ETC	A150402240	2021.09.16	2024.03.03
12	3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2024.03.25
13	Test Receiver	KEYSIGHT	N9038A	A141202036	2022.07.21	2023.07.20
14	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2022.07.21	2023.07.20
15	Cable	MATCHING PAD	W7	/	2022.07.21	2023.07.20



#### 4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (9kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	3.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	3.91dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	4.9dB
--	-------

Uncertainty of RF Conducted Measurement (9kHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%( $U=2Uc(y)$ )	1.3dB
--	-------




# Appendix A

## RF Output Power


### Test Result and Data

ZigBee Maximum Output Power			
Test Frequency	Power (dBm)	Limit (dBm)	Result
2405	4.026	30	Pass
2440	4.433	30	Pass
2480	4.368	30	Pass


Output Power: 2405MHz

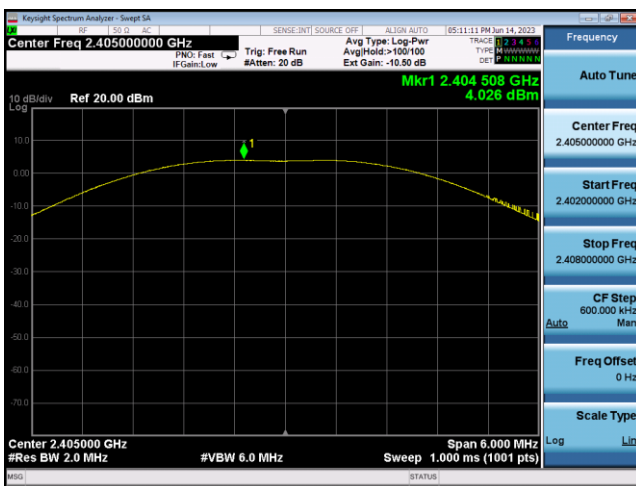

Output Power: 2440MHz

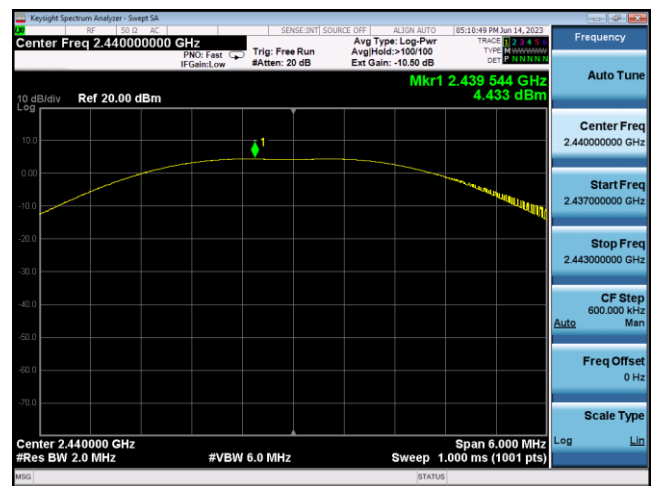

Output Power: 2480MHz

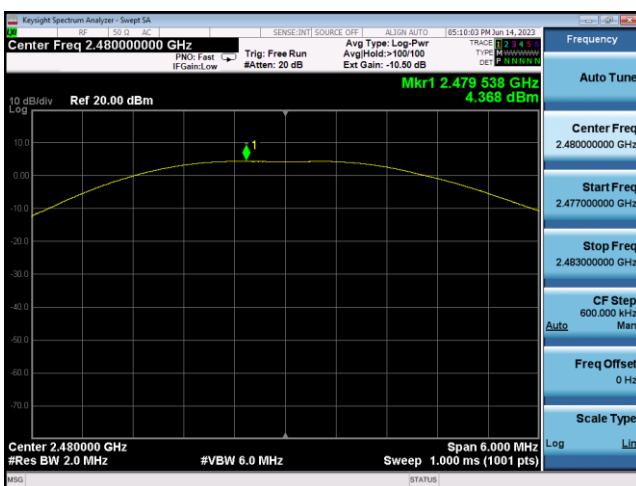





# Power Spectral Density Test Result and Data

ZigBee			
Test Frequency	PSD(dBm/3KHz)	Limit(dBm/3KHz)	Result
2405	-10.924	8	Pass
2440	-10.476		Pass
2480	-10.782		Pass


Power spectral density: 2405MHz

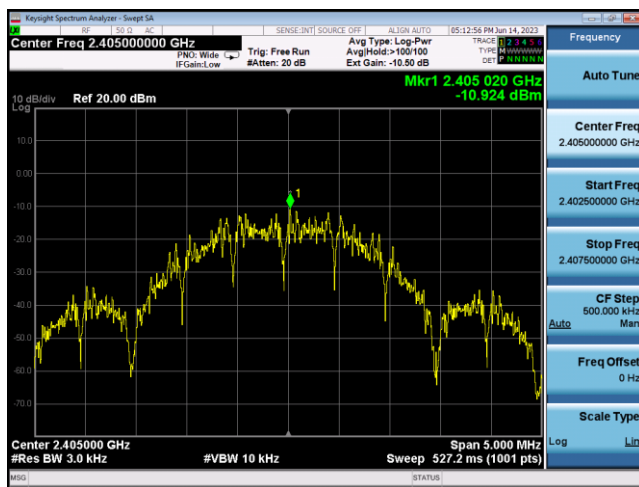

Power spectral density: 2440MHz

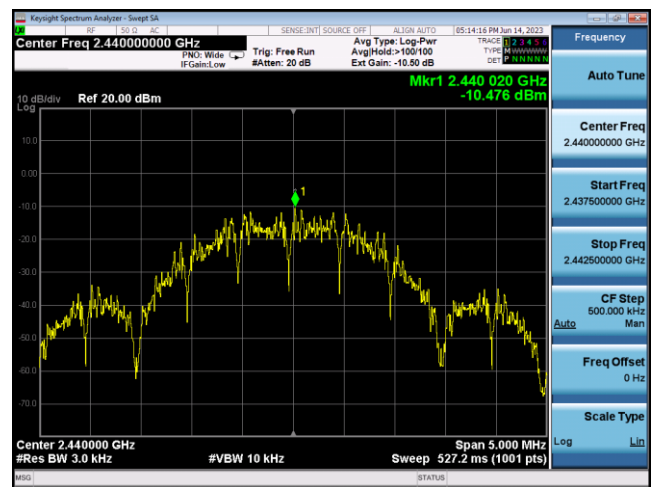

Power spectral density: 2480MHz

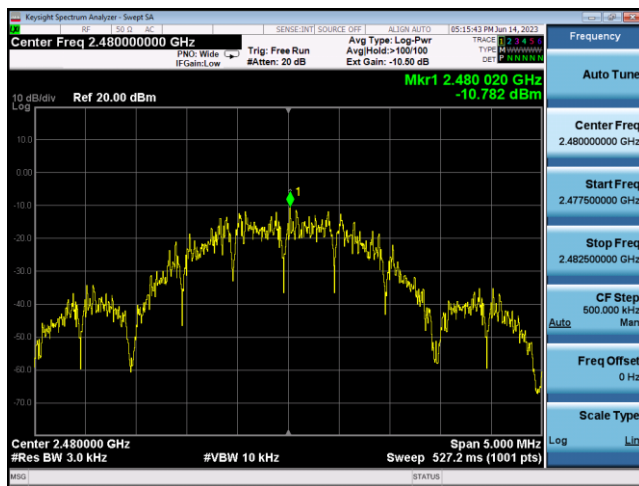

**6dB and 99% Occupied BandWidth  
Test Result and Data**

ZigBee 6dB Bandwidth			
Test Frequency	6dB Emission Bandwidth(kHz)	Limit(kHz)	Result
2405	1622.0	> 500	Pass
2440	1587.0		Pass
2480	1602.0		Pass


ZigBee 99% Occupied Bandwidth			
Test Frequency	99% Occupy Bandwidth(MHz)	Limit(kHz)	Result
2405	2.3359	N/A	Pass
2440	2.3255		Pass
2480	2.3363		Pass




6dB Bandwidth: 2405MHz




99% Bandwidth: 2405MHz

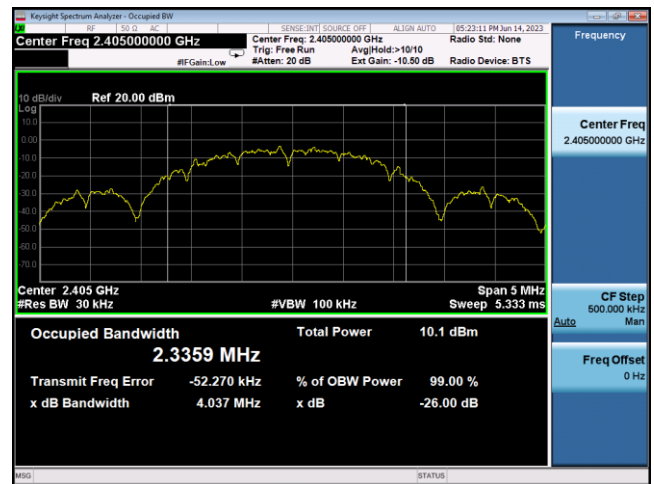


6dB Bandwidth: 2440MHz

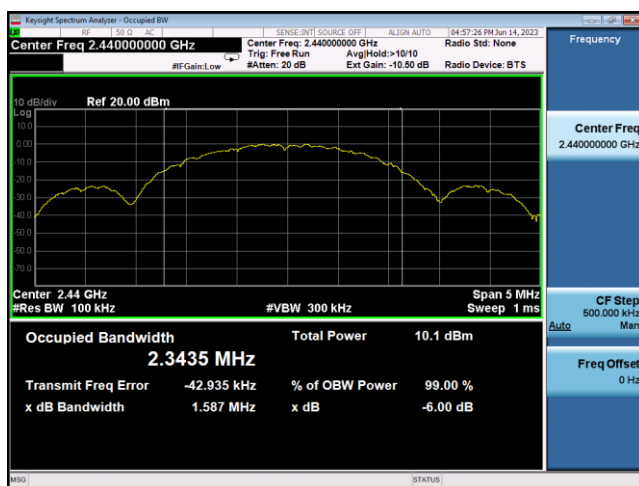


99% Bandwidth: 2440MHz

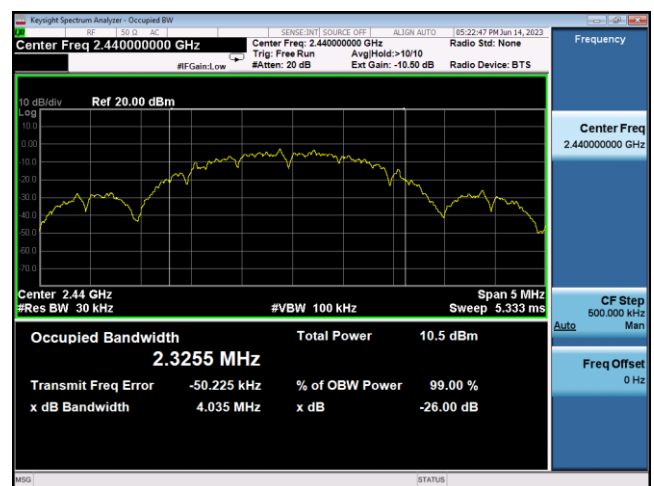

6dB Bandwidth: 2480MHz

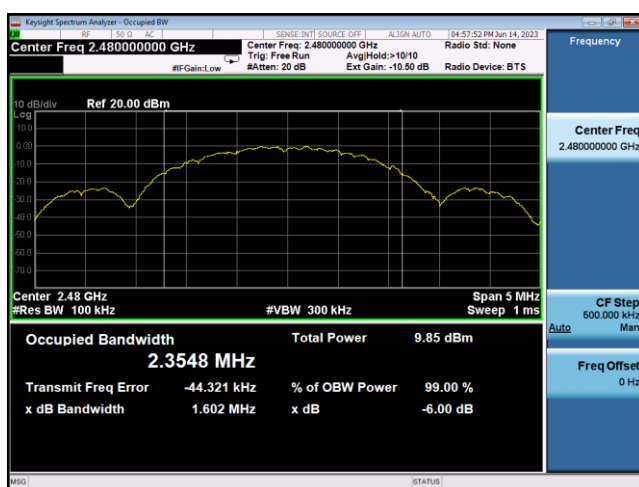


99% Bandwidth: 2480MHz

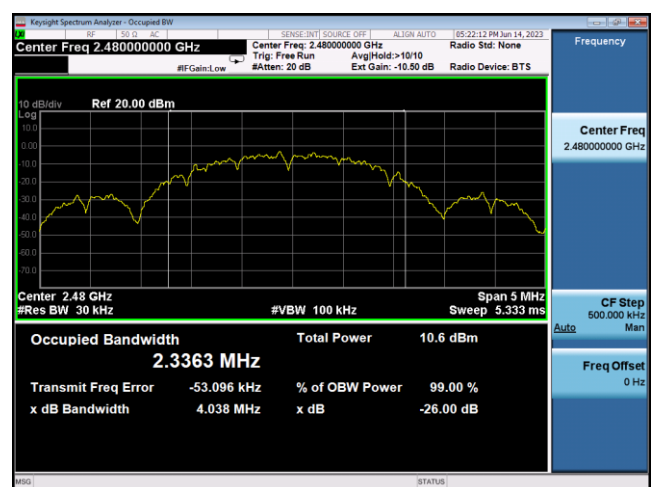



### Conducted Band Edges and Spurious Emissions


,Plot ,1 Transmitter Spurious Emission : 2405,Referecy Level

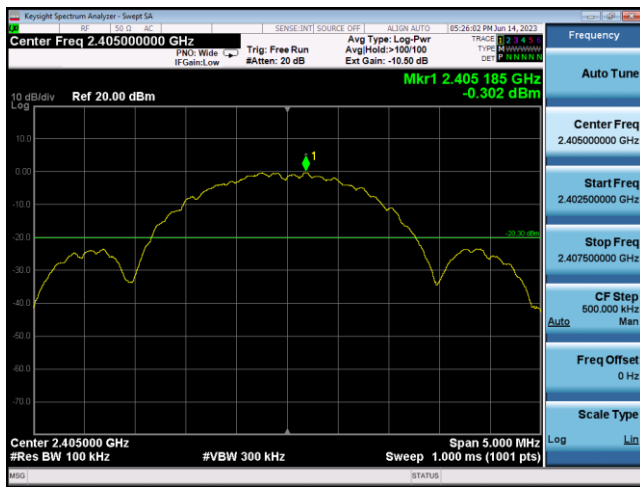

,Plot ,1 Transmitter Spurious Emission : 2440,Referecy Level



,Plot ,1 Transmitter Spurious Emission : 2480,Referecy Level

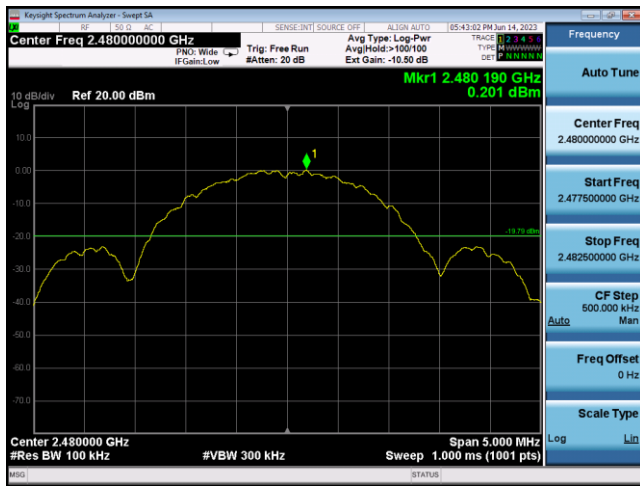

,Plot ,2 Conducted Emission: 2405 ,Band Edge



,Plot ,2 Conducted Emission: 2480 ,Band Edge





,Plot ,3 Transmitter Spurious Emission : 2405,30MHz~25000MHz





,Plot ,3Transmitter Spurious Emission  
: 2440,30MHz~25000MHz

,Plot ,3Transmitter Spurious Emission  
: 2480,30MHz~25000MHz

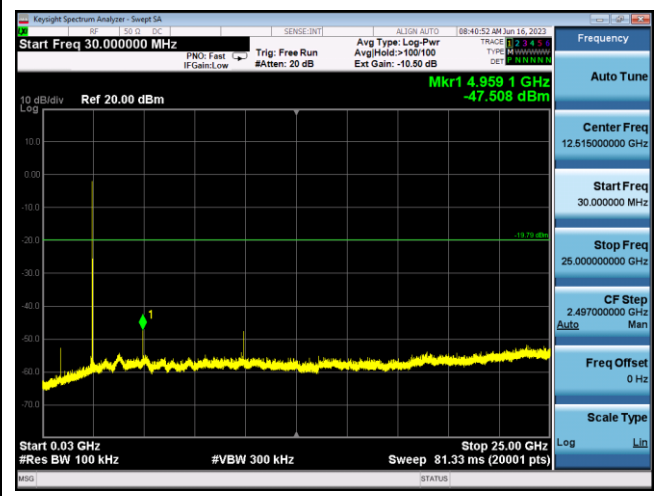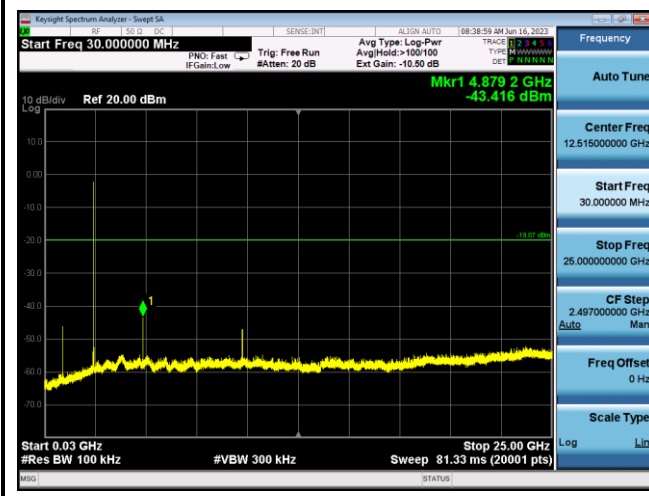

\*\*END OF REPORT\*\*