



Report No.: AGC11143221003FE06 Page 180 of 190

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement

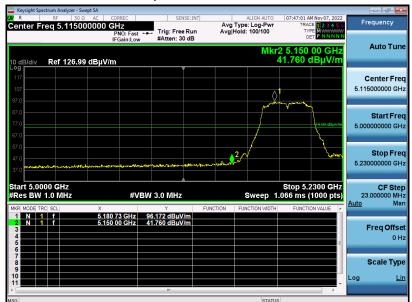

Test Graph for Average Measurement

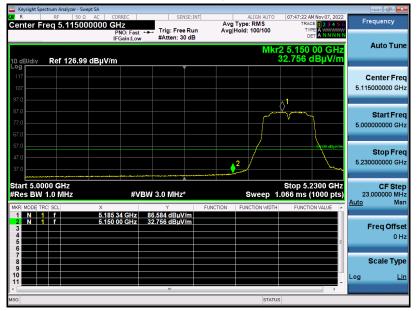

RESULT: PASS




Report No.: AGC11143221003FE06 Page 181 of 190

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

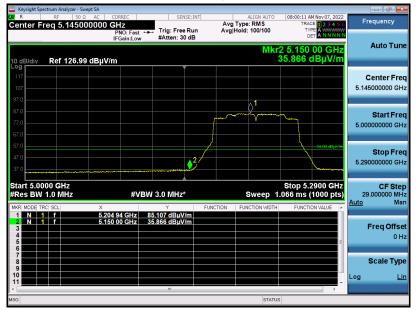

RESULT: PASS




Report No.: AGC11143221003FE06 Page 182 of 190

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

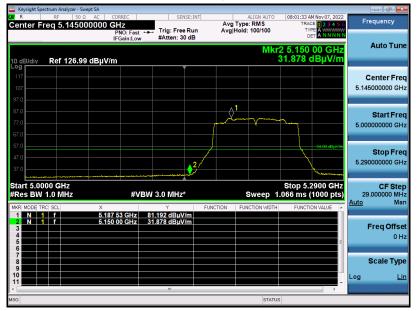

RESULT: PASS




Report No.: AGC11143221003FE06 Page 183 of 190

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

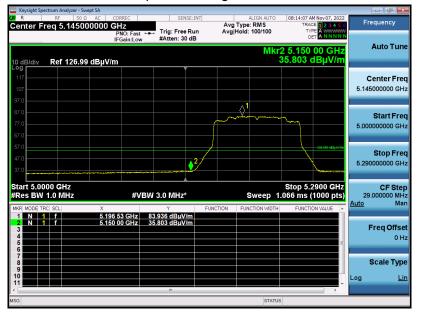

RESULT: PASS



Report No.: AGC11143221003FE06 Page 184 of 190

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



Note: 1. All the antennas have been pre-tested, and all modes of each antenna are tested. All the 20MHz bandwidth modulation had been tested, the antenna 1 in 802.11a20and 802.11ax20 at 5180MHz was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the antenna 1 and antenna 2 in 802.11N40 at 5190MHz was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the antenna 1 and antenna 2 in 802.11N40 at 5190MHz was the antenna 1 and antenna 2 in 802.11N40 at 5190MHz was the worst case and record in his test report. All the 20MHz bandwidth modulation had been tested, the antenna 1 and antenna 2 in 802.11N40 at 5190MHz was the worst case and record in his test report.

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.

4. The sideband standard of U NII-3 frequency band is not defined, the transmitted signal does not fall in the restricted band, and the edge signal is far away from the edge of other restricted bands, and it is not recorded in the report.



11. AC POWER LINE CONDUCTED EMISSION TEST

11.1. LIMITS OF LINE CONDUCTED EMISSION TEST


Francisco	Maximum RF Line Voltage				
Frequency	Q.P (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

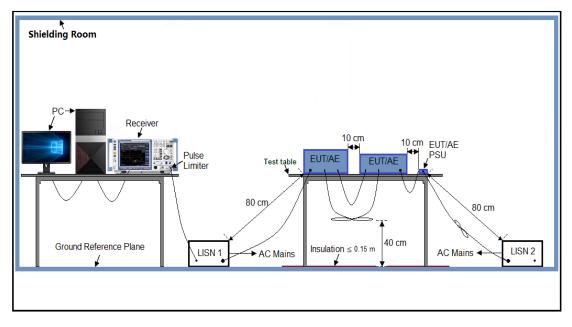



11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.
- 4. The worst mode is 802.11n40 5180MHz, antenna 1 and antenna 2 work together.



11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



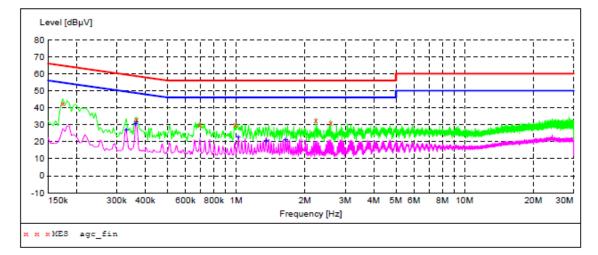

MEASUREMENT RESULT: "agc fin"

2022/10/26 1	9:09					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.174000	42.70	6.7	65	22.1	QP	L1
0.366000	33.00	5.8	59	25.6	QP	L1
0.694000	30.30	5.4	56	25.7	QP	L1
0.994000	30.00	5.4	56	26.0	QP	L1
2.230000	32.70	6.5	56	23.3	QP	L1
2.590000	31.00	6.5	56	25.0	QP	L1

MEASUREMENT RESULT: "agc fin2"

2022/10/26 19	:08					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.330000 0.362000 1.022000 1.354000 1.642000	27.00 30.70 31.90 23.00 20.50 21.00	5.9 5.8 5.5 5.9 6.2	50 49 46 46 46	22.5 18.0 16.7 23.0 25.5 25.0	AV AV AV	L1 L1 L1 L1 L1 L1

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com
 Web: http://www.agccert.com/



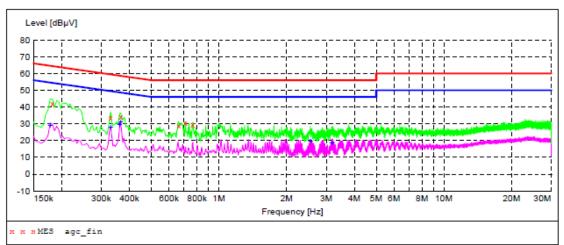

AC POWER LINE CONDUCTED EMISSION TEST-N

MEASUREMENT RESULT: "agc_fin"

2022/10/26 19	9:13					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.182000	42.40	6.7	64	22.0	QP	Ν
0.330000	33.60	5.9	60	25.9	QP	Ν
0.366000	34.50	5.8	59	24.1	QP	Ν
0.662000	28.80	5.4	56	27.2	QP	Ν
0.710000	30.40	5.4	56	25.6	QP	Ν
0.766000	29.80	5.4	56	26.2	QP	N

MEASUREMENT RESULT: "agc fin2"

:12					
Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
28.80	6.7	55	25.8	AV	N
27.80	5.9	50	21.7	AV	Ν
29.70	5.8	49	19.0	AV	Ν
30.90	5.8	49	17.7	AV	Ν
19.70	6.5	46	26.3	AV	Ν
18.70	6.5	46	27.3	AV	Ν
	dBµV 28.80 27.80 29.70 30.90 19.70	Level Transd dBµV dB 28.80 6.7 27.80 5.9 29.70 5.8 30.90 5.8 19.70 6.5	Level Transd Limit dBµV dB dBµV 28.80 6.7 55 27.80 5.9 50 29.70 5.8 49 30.90 5.8 49 19.70 6.5 46	Level Transd Limit Margin dBμV dB dBμV dB 28.80 6.7 55 25.8 27.80 5.9 50 21.7 29.70 5.8 49 19.0 30.90 5.8 49 17.7 19.70 6.5 46 26.3	Level Transd Limit Margin Detector dBμV dB dBμV dB dB dB 28.80 6.7 55 25.8 AV 27.80 5.9 50 21.7 AV 29.70 5.8 49 19.0 AV 30.90 5.8 49 17.7 AV 19.70 6.5 46 26.3 AV

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



Report No.: AGC11143221003FE06 Page 190 of 190

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC11143221003AP01

APPENDIX II: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11143221003AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

 All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
 Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.