

# TEST REPORT

**Applicant:** HANSHOW TECHNOLOGY CO.,LTD.

**Address of Applicant:** Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China

**Manufacturer:** HANSHOW TECHNOLOGY CO.,LTD.

**Address of Manufacturer:** Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China

**Equipment Under Test (EUT)**

Product Name: electronic shelf label

Model No.: Nebular Pro-583Q-N, Nebular Pro-583F-N, Nebular Pro-583QO-N, Nebular Pro-583QP-N, Nebular Pro-583H-N, Nebular-583R-N, Nebular-583Y-N, Nebular-583F-N

**FCC ID:** 2AYMH-NP-583

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249

**Date of sample receipt:** June 13, 2024

**Date of Test:** June 13, 2024-July 01, 2024

**Date of report issued:** July 01, 2024

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




**Robinson Luo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	July 01, 2024	Original

Prepared By:




Date:

July 01, 2024

Project Engineer

Check By:

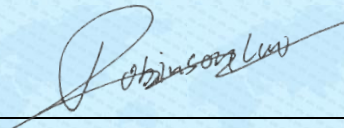

Date:

July 01, 2024

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	8
5.3 DESCRIPTION OF SUPPORT UNITS .....	8
5.4 DEVIATION FROM STANDARDS.....	8
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
5.6 TEST FACILITY.....	8
5.7 TEST LOCATION .....	8
5.8 ADDITIONAL INSTRUCTIONS.....	8
6 TEST INSTRUMENTS LIST .....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 ANTENNA REQUIREMENT.....	11
7.2 RADIATED EMISSION METHOD .....	12
7.2.1 <i>Field Strength of The Fundamental Signal</i> .....	14
7.2.2 <i>Spurious emissions</i> .....	15
7.2.3 <i>Bandedge emissions</i> .....	20
7.3 20dB OCCUPY BANDWIDTH .....	21
8 TEST SETUP PHOTO.....	23
9 EUT CONSTRUCTIONAL DETAILS .....	23

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

*Remarks:*

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	electronic shelf label
Model No.:	Nebular Pro-583Q-N, Nebular Pro-583F-N, Nebular Pro-583QO-N, Nebular Pro-583QP-N, Nebular Pro-583H-N, Nebular-583R-N, Nebular-583Y-N, Nebular-583F-N
Test Model No.:	Nebular Pro-583Q-N
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only differences are appearance color and model name for commercial purpose.	
S/N:	N/A
Test sample(s) ID:	GTS2024060118-1
Sample(s) Status	Engineered sample
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	157
Channel Separation:	0.5MHz
Modulation Type:	GFSK
Antenna Type:	PCB Antenna
Antenna gain:	-1.0dBi(declare by applicant)
Power supply:	DC 3.0V, 1050mAh for Li-ion battery

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402.0	41	2422.0	81	2442.0	121	2462.0
2	2402.5	42	2422.5	82	2442.5	122	2462.5
3	2403.0	43	2423.0	83	2443.0	123	2463.0
4	2403.5	44	2423.5	84	2443.5	124	2463.5
5	2404.0	45	2424.0	85	2444.0	125	2464.0
6	2404.5	46	2424.5	86	2444.5	126	2464.5
7	2405.0	47	2425.0	87	2445.0	127	2465.0
8	2405.5	48	2425.5	88	2445.5	128	2465.5
9	2406.0	49	2426.0	89	2446.0	129	2466.0
10	2406.5	50	2426.5	90	2446.5	130	2466.5
11	2407.0	51	2427.0	91	2447.0	131	2467.0
12	2407.5	52	2427.5	92	2447.5	132	2467.5
13	2408.0	53	2428.0	93	2448.0	133	2468.0
14	2408.5	54	2428.5	94	2448.5	134	2468.5
15	2409.0	55	2429.0	95	2449.0	135	2469.0
16	2409.5	56	2429.5	96	2449.5	136	2469.5
17	2410.0	57	2430.0	97	2450.0	137	2470.0
18	2410.5	58	2430.5	98	2450.5	138	2470.5
19	2411.0	59	2431.0	99	2451.0	139	2471.0
20	2411.5	60	2431.5	100	2451.5	140	2471.5
21	2412.0	61	2432.0	101	2452.0	141	2472.0
22	2412.5	62	2432.5	102	2452.5	142	2472.5
23	2413.0	63	2433.0	103	2453.0	143	2473.0
24	2413.5	64	2433.5	104	2453.5	144	2473.5
25	2414.0	65	2434.0	105	2454.0	145	2474.0
26	2414.5	66	2434.5	106	2454.5	146	2474.5
27	2415.0	67	2435.0	107	2455.0	147	2475.0
28	2415.5	68	2435.5	108	2455.5	148	2475.5
29	2416.0	69	2436.0	109	2456.0	149	2476.0
30	2416.5	70	2436.5	110	2456.5	150	2476.5
31	2417.0	71	2437.0	111	2457.0	151	2477.0
32	2417.5	72	2437.5	112	2457.5	152	2477.5
33	2418.0	73	2438.0	113	2458.0	153	2478.0
34	2418.5	74	2438.5	114	2458.5	154	2478.5
35	2419.0	75	2439.0	115	2459.0	155	2479.0
36	2419.5	76	2439.5	116	2459.5	156	2479.5
37	2420.0	77	2440.0	117	2460.0	157	2480.0
38	2420.5	78	2440.5	118	2460.5		
39	2421.0	79	2441.0	119	2461.0		
40	2421.5	80	2441.5	120	2461.5		

The test frequencies are below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	92.56	92.89	92.44

## 5.3 Description of Support Units

None.
-------

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>ISED—Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

## 5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default



## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 11, 2024	April 10, 2025
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 11, 2024	April 10, 2025
8	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 13, 2023	Nov.12, 2024
9	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 11, 2024	April 10, 2025
10	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 11, 2024	April 10, 2025
11	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 29, 2023	Oct. 28, 2024
12	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 29, 2023	Oct. 28, 2024
13	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 12, 2024	March 11, 2025
14	Amplifier	/	LNA-1000-30S	GTS650	April 11, 2024	April 10, 2025
15	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 08, 2023	Nov.07, 2024
16	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	April 11, 2024	April 10, 2025
17	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 18, 2024	April 17, 2025
18	RE cable 1	GTS	N/A	GTS675	July 31. 2023	July 30. 2024
19	RE cable 2	GTS	N/A	GTS676	July 31. 2023	July 30. 2024
20	RE cable 3	GTS	N/A	GTS677	July 31. 2023	July 30. 2024
21	RE cable 4	GTS	N/A	GTS678	July 31. 2023	July 30. 2024
22	RE cable 5	GTS	N/A	GTS679	July 31. 2023	July 30. 2024
23	RE cable 6	GTS	N/A	GTS680	July 31. 2023	July 30. 2024
24	RE cable 7	GTS	N/A	GTS681	July 31. 2023	July 30. 2024
25	RE cable 8	GTS	N/A	GTS682	July 31. 2023	July 30. 2024

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 11, 2024	April 10, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 11, 2024	April 10, 2025
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	April 11, 2024	April 10, 2025
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 11, 2024	April 10, 2025
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 11, 2024	April 10, 2025
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 11, 2024	April 10, 2025
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 11, 2024	April 10, 2025
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 11, 2024	April 10, 2025
9	Thermo meter	JINCHUANG	GSP-8A	GTS641	April 18, 2024	April 17, 2025


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 18, 2024	April 17, 2025



## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>EUT Antenna:</b>	
The antenna is PCB antenna, reference to the appendix II for details.	

## 7.2 Radiated Emission Method

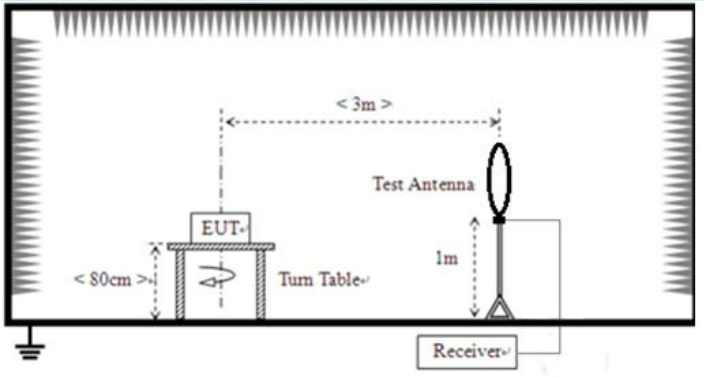Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
	5000 @3m		Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>				

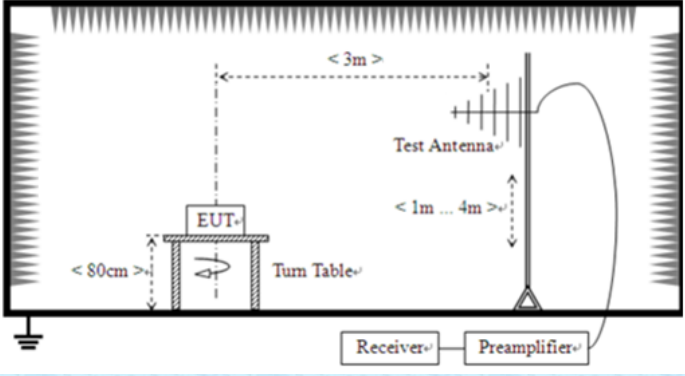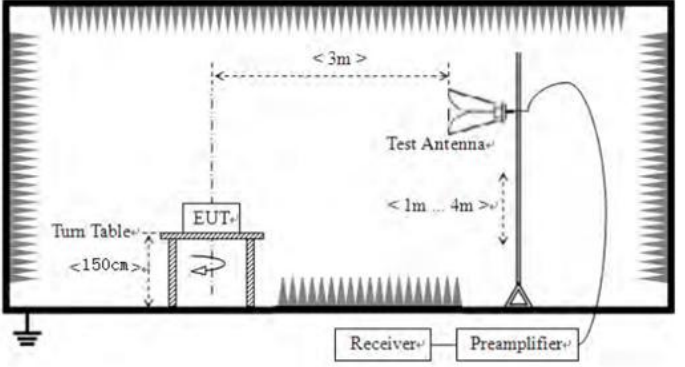	 <p>For radiated emissions above 1GHz</p> 						
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>						
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
<p>Test voltage:</p>	<p>DC 3V</p>						
<p>Test results:</p>	<p>Pass</p>						

**Measurement data:**

**7.2.1 Field Strength of The Fundamental Signal**

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	99.33	27.43	2.93	38.88	90.81	114.00	-23.19	Vertical
2402.00	91.71	27.43	2.93	38.88	83.19	114.00	-30.81	Horizontal
2441.00	101.36	27.55	2.96	38.98	92.89	114.00	-21.11	Vertical
2441.00	94.98	27.55	2.96	38.98	86.51	114.00	-27.49	Horizontal
2480.00	97.10	27.64	2.99	39.05	88.68	114.00	-25.32	Vertical
2480.00	89.04	27.64	2.99	39.05	80.62	114.00	-33.38	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	84.15	27.43	2.93	38.88	75.63	94.00	-18.37	Vertical
2402.00	80.86	27.43	2.93	38.88	72.34	94.00	-21.66	Horizontal
2441.00	88.17	27.55	2.96	38.98	79.70	94.00	-14.30	Vertical
2441.00	83.42	27.55	2.96	38.98	74.95	94.00	-19.05	Horizontal
2480.00	87.64	27.64	2.99	39.05	79.22	94.00	-14.78	Vertical
2480.00	85.10	27.64	2.99	39.05	76.68	94.00	-17.32	Horizontal

Note: For fundamental frequency , RBW>20dB BW, VBW>=RBW, PK detector for PK value, RMS detector for AV value


## 7.2.2 Spurious emissions

### ■ Below 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

### ■ Below 1GHz

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of it  
Horizontal

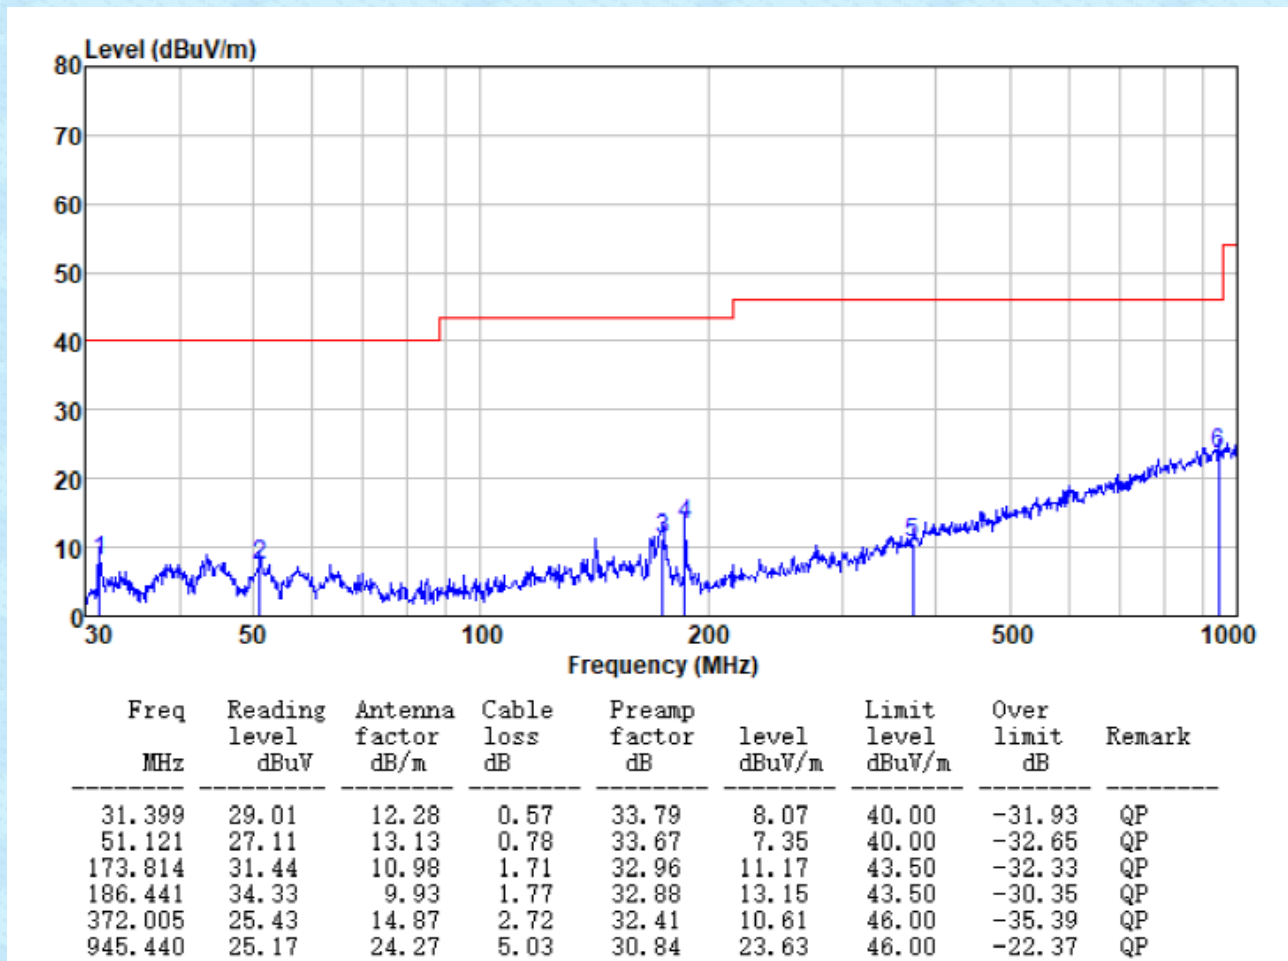

Vertical

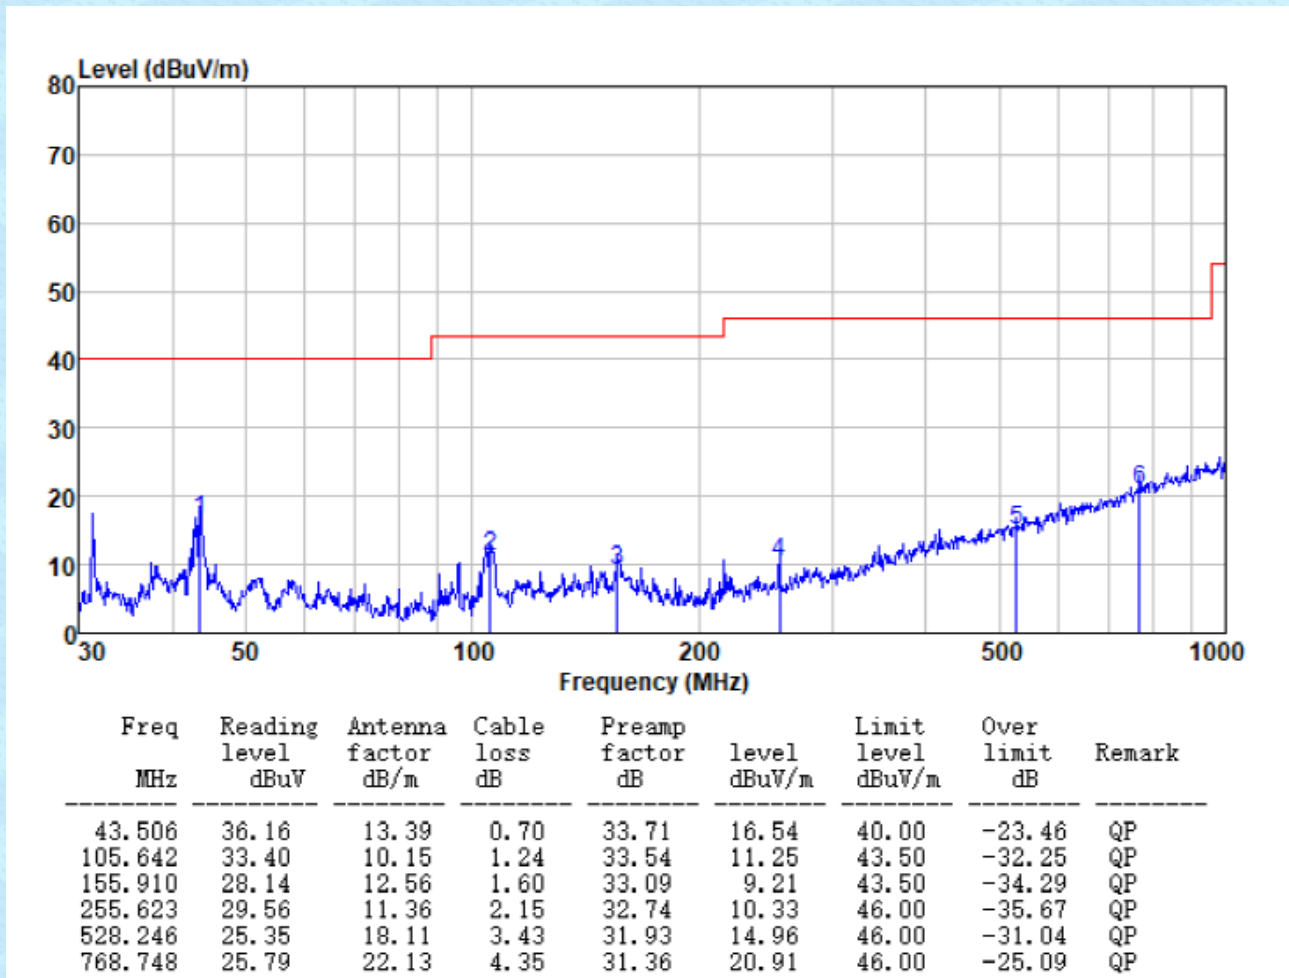



■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	37.47	31.22	4.63	37.68	35.64	74.00	-38.36	Vertical
7206.00	31.94	36.25	6.52	37.81	36.90	74.00	-37.10	Vertical
9608.00	31.56	37.97	7.98	37.93	39.58	74.00	-34.42	Vertical
4804.00	41.78	31.22	4.63	37.68	39.95	74.00	-34.05	Horizontal
7206.00	33.71	36.25	6.52	37.81	38.67	74.00	-35.33	Horizontal
9608.00	31.00	37.97	7.98	37.93	39.02	74.00	-34.98	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	26.25	31.22	4.63	37.68	24.42	54.00	-29.58	Vertical
7206.00	20.60	36.25	6.52	37.81	25.56	54.00	-28.44	Vertical
9608.00	19.67	37.97	7.98	37.93	27.69	54.00	-26.31	Vertical
4804.00	30.49	31.22	4.63	37.68	28.66	54.00	-25.34	Horizontal
7206.00	22.79	36.25	6.52	37.81	27.75	54.00	-26.25	Horizontal
9608.00	19.41	37.97	7.98	37.93	27.43	54.00	-26.57	Horizontal

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	37.31	31.33	4.69	37.62	35.71	74.00	-38.29	Vertical
7323.00	31.83	36.43	6.63	37.77	37.12	74.00	-36.88	Vertical
9764.00	31.47	38.10	8.03	37.95	39.65	74.00	-34.35	Vertical
4882.00	41.59	31.33	4.69	37.62	39.99	74.00	-34.01	Horizontal
7323.00	33.59	36.43	6.63	37.77	38.88	74.00	-35.12	Horizontal
9764.00	30.89	38.10	8.03	37.95	39.07	74.00	-34.93	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.13	31.33	4.69	37.62	24.53	54.00	-29.47	Vertical
7323.00	20.53	36.43	6.63	37.77	25.82	54.00	-28.18	Vertical
9764.00	19.60	38.10	8.03	37.95	27.78	54.00	-26.22	Vertical
4882.00	30.36	31.33	4.69	37.62	28.76	54.00	-25.24	Horizontal
7323.00	22.70	36.43	6.63	37.77	27.99	54.00	-26.01	Horizontal
9764.00	19.33	38.10	8.03	37.95	27.51	54.00	-26.49	Horizontal

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	38.07	31.41	4.77	37.56	36.69	74.00	-37.31	Vertical
7440.00	32.34	36.62	6.73	37.73	37.96	74.00	-36.04	Vertical
9920.00	31.92	38.27	8.08	37.98	40.29	74.00	-33.71	Vertical
4960.00	42.51	31.41	4.77	37.56	41.13	74.00	-32.87	Horizontal
7440.00	34.16	36.62	6.73	37.73	39.78	74.00	-34.22	Horizontal
9920.00	31.42	38.27	8.08	37.98	39.79	74.00	-34.21	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	26.85	31.41	4.77	37.56	25.47	54.00	-28.53	Vertical
7440.00	21.01	36.62	6.73	37.73	26.63	54.00	-27.37	Vertical
9920.00	20.03	38.27	8.08	37.98	28.40	54.00	-25.60	Vertical
4960.00	31.18	31.41	4.77	37.56	29.80	54.00	-24.20	Horizontal
7440.00	23.25	36.62	6.73	37.73	28.87	54.00	-25.13	Horizontal
9920.00	19.84	38.27	8.08	37.98	28.21	54.00	-25.79	Horizontal

*Remarks:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

### 7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	67.03	27.14	2.81	38.64	58.34	74.00	-15.66	Horizontal
2390.00	74.27	27.37	2.91	38.84	65.71	74.00	-8.29	Horizontal
2400.00	76.27	27.41	2.92	38.86	67.74	74.00	-6.26	Horizontal
2310.00	69.88	27.14	2.81	38.64	61.19	74.00	-12.81	Vertical
2390.00	77.89	27.37	2.91	38.84	69.33	74.00	-4.67	Vertical
2400.00	80.99	27.41	2.92	38.86	72.46	74.00	-1.54	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	52.12	27.14	2.81	38.64	43.43	54.00	-10.57	Horizontal
2390.00	54.79	27.37	2.91	38.84	46.23	54.00	-7.77	Horizontal
2400.00	59.96	27.41	2.92	38.86	51.43	54.00	-2.57	Horizontal
2310.00	53.79	27.14	2.81	38.64	45.10	54.00	-8.90	Vertical
2390.00	57.74	27.37	2.91	38.84	49.18	54.00	-4.82	Vertical
2400.00	57.75	27.41	2.92	38.86	49.22	54.00	-4.78	Vertical

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	72.01	27.82	2.99	39.05	63.77	74.00	-10.23	Horizontal
2500.00	66.58	27.70	3.01	39.10	58.19	74.00	-15.81	Horizontal
2483.50	76.88	27.82	2.99	39.05	68.64	74.00	-5.36	Vertical
2500.00	69.88	27.70	3.01	39.10	61.49	74.00	-12.51	Vertical


**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.23	27.82	2.99	39.05	44.99	54.00	-9.01	Horizontal
2500.00	49.78	27.70	3.01	39.10	41.39	54.00	-12.61	Horizontal
2483.50	47.31	27.82	2.99	39.05	39.07	54.00	-14.93	Vertical
2500.00	51.72	27.70	3.01	39.10	43.33	54.00	-10.67	Vertical

Remark:

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor


### 7.3 20dB Occupy Bandwidth

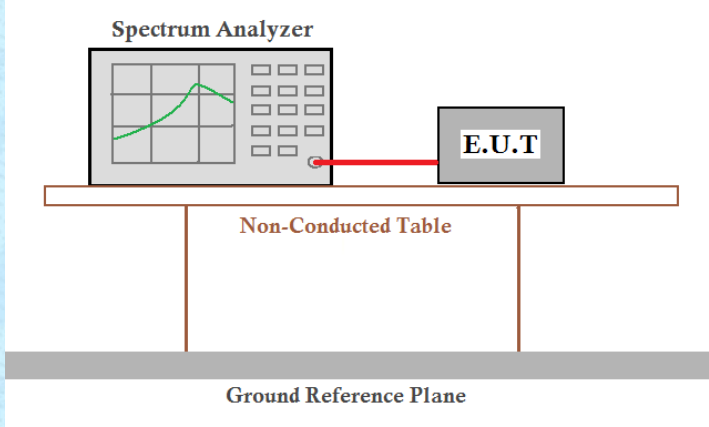Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	1.063	Pass
Middle	1.067	Pass
Highest	1.064	Pass


Test plot as follows:

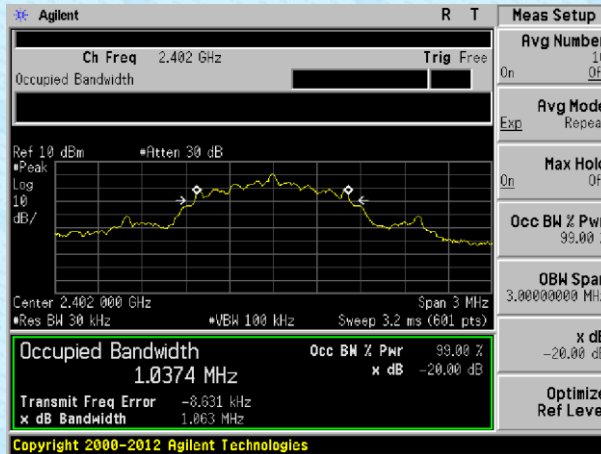

Lowest channel

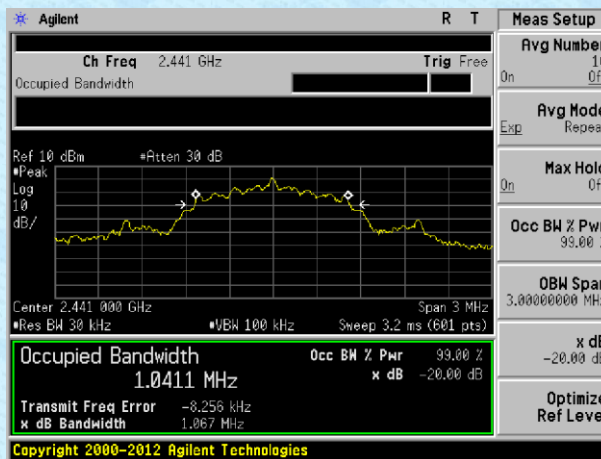

Middle channel

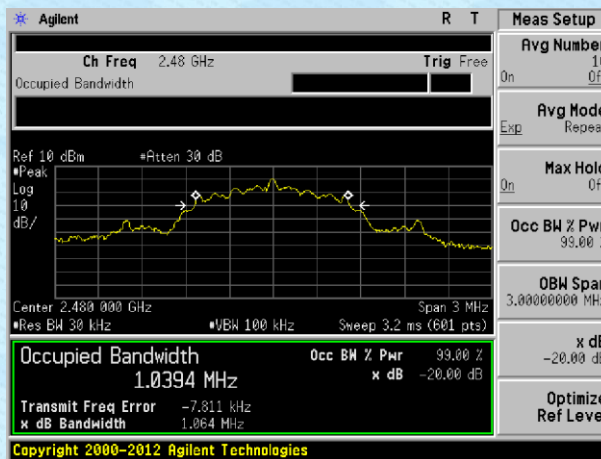

Highest channel

## **8 Test Setup Photo**

Reference to the **appendix I** for details.

## **9 EUT Constructional Details**

Reference to the **appendix II** for details.

-----End-----