

TEST REPORT

Applicant: HANSHOW TECHNOLOGY CO.,LTD.

Address of Applicant: Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China

Manufacturer/Factory: HANSHOW TECHNOLOGY CO.,LTD.

Address of Manufacturer/Factory: Building 1(IF podium building and 4F) and Building 5 (7F) in Jiaxing Photovolta High-tech Park, No. 1288 Kanghe Rd., Xiuzhou District, Jiaxing, Zhejiang, China

Equipment Under Test (EUT)

Product Name: electronic shelf label

Model No.: Stellar Pro-213Q-N, Stellar Pro-213QO-N, Stellar Pro-213H-N, Stellar Pro-266Q-N, Stellar Pro-266QO-N, Stellar Pro-266H-N

FCC ID: 2AYMH-STELLARPH-213

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: August 15, 2023

Date of Test: August 16, 2023-September 21, 2023

Date of report issued: September 21, 2023

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

| Version No. | Date | Description |
|-------------|--------------------|-------------|
| 00 | September 21, 2023 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:




Date:

September 21, 2023

Project Engineer

Check By:



Date:

September 21, 2023

Reviewer

3 Contents

| | Page |
|---|------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 4.1 MEASUREMENT UNCERTAINTY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 GENERAL DESCRIPTION OF EUT | 5 |
| 5.2 TEST MODE | 8 |
| 5.3 DESCRIPTION OF SUPPORT UNITS | 8 |
| 5.4 DEVIATION FROM STANDARDS..... | 8 |
| 5.5 ABNORMALITIES FROM STANDARD CONDITIONS | 8 |
| 5.6 TEST FACILITY..... | 8 |
| 5.7 TEST LOCATION | 8 |
| 5.8 ADDITIONAL INSTRUCTIONS..... | 8 |
| 6 TEST INSTRUMENTS LIST | 9 |
| 7 TEST RESULTS AND MEASUREMENT DATA..... | 11 |
| 7.1 ANTENNA REQUIREMENT | 11 |
| 7.2 RADIATED EMISSION METHOD | 12 |
| 7.2.1 <i>Field Strength of The Fundamental Signal</i> | 14 |
| 7.2.2 <i>Spurious emissions</i> | 15 |
| 7.2.3 <i>Bandedge emissions</i> | 20 |
| 7.3 20dB OCCUPY BANDWIDTH | 21 |
| 8 TEST SETUP PHOTO | 23 |
| 9 EUT CONSTRUCTIONAL DETAILS | 23 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--|-----------------------|--------|
| Antenna requirement | 15.203 | Pass |
| AC Power Line Conducted Emission | 15.207 | N/A |
| Field strength of the fundamental signal | 15.249 (a) | Pass |
| Spurious emissions | 15.249 (a) (d)/15.209 | Pass |
| Band edge | 15.249 (d)/15.205 | Pass |
| 20dB Occupied Bandwidth | 15.215 (c) | Pass |

Remarks:

1. Test according to ANSI C63.10:2013.
2. Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 9kHz-30MHz | 3.1dB | (1) |
| Radiated Emission | 30MHz-200MHz | 3.8039dB | (1) |
| Radiated Emission | 200MHz-1GHz | 3.9679dB | (1) |
| Radiated Emission | 1GHz-18GHz | 4.29dB | (1) |
| Radiated Emission | 18GHz-40GHz | 3.30dB | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | 3.44dB | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

| | |
|---|--|
| Product Name: | electronic shelf label |
| Model No.: | Stellar Pro-213Q-N, Stellar Pro-213QO-N, Stellar Pro-213H-N, Stellar Pro-266Q-N, Stellar Pro-266QO-N, Stellar Pro-266H-N |
| Test Model No.: | Stellar Pro-213Q-N |
| Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance colour and model name for commercial purpose. | |
| Serial No.: | N/A |
| Test sample(s) ID: | GTS2023080194-1 |
| Sample(s) Status | Engineered sample |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel Numbers: | 157 |
| Channel Separation: | 0.5MHz |
| Modulation Type: | GFSK |
| Antenna Type: | PCB Antenna |
| Antenna Gain: | -0.6dBi(declare by applicant) |
| Power supply: | DC 3V by battery |

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 2402.0 | 41 | 2422.0 | 81 | 2442.0 | 121 | 2462.0 |
| 2 | 2402.5 | 42 | 2422.5 | 82 | 2442.5 | 122 | 2462.5 |
| 3 | 2403.0 | 43 | 2423.0 | 83 | 2443.0 | 123 | 2463.0 |
| 4 | 2403.5 | 44 | 2423.5 | 84 | 2443.5 | 124 | 2463.5 |
| 5 | 2404.0 | 45 | 2424.0 | 85 | 2444.0 | 125 | 2464.0 |
| 6 | 2404.5 | 46 | 2424.5 | 86 | 2444.5 | 126 | 2464.5 |
| 7 | 2405.0 | 47 | 2425.0 | 87 | 2445.0 | 127 | 2465.0 |
| 8 | 2405.5 | 48 | 2425.5 | 88 | 2445.5 | 128 | 2465.5 |
| 9 | 2406.0 | 49 | 2426.0 | 89 | 2446.0 | 129 | 2466.0 |
| 10 | 2406.5 | 50 | 2426.5 | 90 | 2446.5 | 130 | 2466.5 |
| 11 | 2407.0 | 51 | 2427.0 | 91 | 2447.0 | 131 | 2467.0 |
| 12 | 2407.5 | 52 | 2427.5 | 92 | 2447.5 | 132 | 2467.5 |
| 13 | 2408.0 | 53 | 2428.0 | 93 | 2448.0 | 133 | 2468.0 |
| 14 | 2408.5 | 54 | 2428.5 | 94 | 2448.5 | 134 | 2468.5 |
| 15 | 2409.0 | 55 | 2429.0 | 95 | 2449.0 | 135 | 2469.0 |
| 16 | 2409.5 | 56 | 2429.5 | 96 | 2449.5 | 136 | 2469.5 |
| 17 | 2410.0 | 57 | 2430.0 | 97 | 2450.0 | 137 | 2470.0 |
| 18 | 2410.5 | 58 | 2430.5 | 98 | 2450.5 | 138 | 2470.5 |
| 19 | 2411.0 | 59 | 2431.0 | 99 | 2451.0 | 139 | 2471.0 |
| 20 | 2411.5 | 60 | 2431.5 | 100 | 2451.5 | 140 | 2471.5 |
| 21 | 2412.0 | 61 | 2432.0 | 101 | 2452.0 | 141 | 2472.0 |
| 22 | 2412.5 | 62 | 2432.5 | 102 | 2452.5 | 142 | 2472.5 |
| 23 | 2413.0 | 63 | 2433.0 | 103 | 2453.0 | 143 | 2473.0 |
| 24 | 2413.5 | 64 | 2433.5 | 104 | 2453.5 | 144 | 2473.5 |
| 25 | 2414.0 | 65 | 2434.0 | 105 | 2454.0 | 145 | 2474.0 |
| 26 | 2414.5 | 66 | 2434.5 | 106 | 2454.5 | 146 | 2474.5 |
| 27 | 2415.0 | 67 | 2435.0 | 107 | 2455.0 | 147 | 2475.0 |
| 28 | 2415.5 | 68 | 2435.5 | 108 | 2455.5 | 148 | 2475.5 |
| 29 | 2416.0 | 69 | 2436.0 | 109 | 2456.0 | 149 | 2476.0 |
| 30 | 2416.5 | 70 | 2436.5 | 110 | 2456.5 | 150 | 2476.5 |
| 31 | 2417.0 | 71 | 2437.0 | 111 | 2457.0 | 151 | 2477.0 |
| 32 | 2417.5 | 72 | 2437.5 | 112 | 2457.5 | 152 | 2477.5 |
| 33 | 2418.0 | 73 | 2438.0 | 113 | 2458.0 | 153 | 2478.0 |
| 34 | 2418.5 | 74 | 2438.5 | 114 | 2458.5 | 154 | 2478.5 |
| 35 | 2419.0 | 75 | 2439.0 | 115 | 2459.0 | 155 | 2479.0 |
| 36 | 2419.5 | 76 | 2439.5 | 116 | 2459.5 | 156 | 2479.5 |
| 37 | 2420.0 | 77 | 2440.0 | 117 | 2460.0 | 157 | 2480.0 |
| 38 | 2420.5 | 78 | 2440.5 | 118 | 2460.5 | | |

| | | | | | | | |
|----|--------|----|--------|-----|--------|--|--|
| 39 | 2421.0 | 79 | 2441.0 | 119 | 2461.0 | | |
| 40 | 2421.5 | 80 | 2441.5 | 120 | 2461.5 | | |

The test frequencies are below:

| Channel | Frequency |
|---------------------|-----------|
| The lowest channel | 2402MHz |
| The middle channel | 2441MHz |
| The Highest channel | 2480MHz |

5.2 Test mode

| | |
|--|---|
| Transmitting mode | Keep the EUT in continuously transmitting mode. |
| Remark: New battery is used during all test. | |

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

| Axis | X | Y | Z |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 84.55 | 85.04 | 83.14 |

5.3 Description of Support Units

| |
|-------|
| None. |
|-------|

5.4 Deviation from Standards

| |
|-------|
| None. |
|-------|

5.5 Abnormalities from Standard Conditions

| |
|-------|
| None. |
|-------|

5.6 Test Facility

| |
|--|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). |
|--|

5.7 Test Location

| |
|--|
| All tests were performed at: |
| Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960 |

5.8 Additional Instructions

| | |
|-------------------|---|
| Test Software | Special test command provided by manufacturer |
| Power level setup | Default |

6 Test Instruments list

| Radiated Emission: | | | | | | |
|--------------------|-------------------------------------|-----------------------------|-----------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | June 23, 2021 | June 22, 2024 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | April 14, 2023 | April 13, 2024 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9168 | GTS640 | March 19, 2023 | March 18, 2025 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120 D | GTS208 | April 17, 2023 | April 16, 2025 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 7 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | GTS575 | April 14, 2023 | April 13, 2024 |
| 8 | Loop Antenna | ZHINAN | ZN30900A | GTS534 | Nov. 29, 2022 | Nov. 28, 2023 |
| 9 | Broadband Pre-amplifier | SCHWARZBECK | BBV9718 | GTS535 | April 14, 2023 | April 13, 2024 |
| 10 | Amplifier(1GHz-26.5GHz) | HP | 8449B | GTS601 | April 14, 2023 | April 13, 2024 |
| 11 | Horn Antenna (18-26.5GHz) | / | UG-598A/U | GTS664 | Oct. 30, 2022 | Oct. 29, 2023 |
| 12 | Horn Antenna (26.5-40GHz) | A.H Systems | SAS-573 | GTS665 | Oct. 30, 2022 | Oct. 29, 2023 |
| 13 | FSV-Signal Analyzer (10Hz-40GHz) | Keysight | FSV-40-N | GTS666 | March 13, 2023 | March 12, 2024 |
| 14 | Amplifier | / | LNA-1000-30S | GTS650 | April 14, 2023 | April 13, 2024 |
| 15 | CDNE M2+M3-16A | HCT | 30MHz-300MHz | GTS668 | Dec. 20, 2022 | Dec.19, 2023 |
| 16 | Wideband Amplifier | / | WDA-01004000-15P35 | GTS602 | April 14, 2023 | April 13, 2024 |
| 17 | Thermo meter | JINCHUANG | GSP-8A | GTS643 | April 19, 2023 | April 18, 2024 |
| 18 | RE cable 1 | GTS | N/A | GTS675 | July 31. 2023 | July 30. 2024 |
| 19 | RE cable 2 | GTS | N/A | GTS676 | July 31. 2023 | July 30. 2024 |
| 20 | RE cable 3 | GTS | N/A | GTS677 | July 31. 2023 | July 30. 2024 |
| 21 | RE cable 4 | GTS | N/A | GTS678 | July 31. 2023 | July 30. 2024 |
| 22 | RE cable 5 | GTS | N/A | GTS679 | July 31. 2023 | July 30. 2024 |
| 23 | RE cable 6 | GTS | N/A | GTS680 | July 31. 2023 | July 30. 2024 |
| 24 | RE cable 7 | GTS | N/A | GTS681 | July 31. 2023 | July 30. 2024 |
| 25 | RE cable 8 | GTS | N/A | GTS682 | July 31. 2023 | July 30. 2024 |

| RF Conducted Test: | | | | | | |
|--------------------|--|--------------|------------------|------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | MXA Signal Analyzer | Agilent | N9020A | GTS566 | April 14, 2023 | April 13, 2024 |
| 2 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | April 14, 2023 | April 13, 2024 |
| 3 | PSA Series Spectrum Analyzer | Agilent | E4440A | GTS536 | April 14, 2023 | April 13, 2024 |
| 4 | MXG vector Signal Generator | Agilent | N5182A | GTS567 | April 14, 2023 | April 13, 2024 |
| 5 | ESG Analog Signal Generator | Agilent | E4428C | GTS568 | April 14, 2023 | April 13, 2024 |
| 6 | USB RF Power Sensor | DARE | RPR3006W | GTS569 | April 14, 2023 | April 13, 2024 |
| 7 | RF Switch Box | Shongyi | RFSW3003328 | GTS571 | April 14, 2023 | April 13, 2024 |
| 8 | Programmable Constant Temp & Humi Test Chamber | WEWON | WHTH-150L-40-880 | GTS572 | April 14, 2023 | April 13, 2024 |
| 9 | Thermo meter | JINCHUANG | GSP-8A | GTS641 | April 19, 2023 | April 18, 2024 |


| General used equipment: | | | | | | |
|-------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Barometer | KUMAO | SF132 | GTS647 | April 19, 2023 | April 18, 2024 |


7 Test results and Measurement Data

7.1 Antenna requirement

| | |
|--|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> | |
| EUT Antenna: | |
| The antenna is PCB antenna, reference to the appendix II for details. | |

7.2 Radiated Emission Method
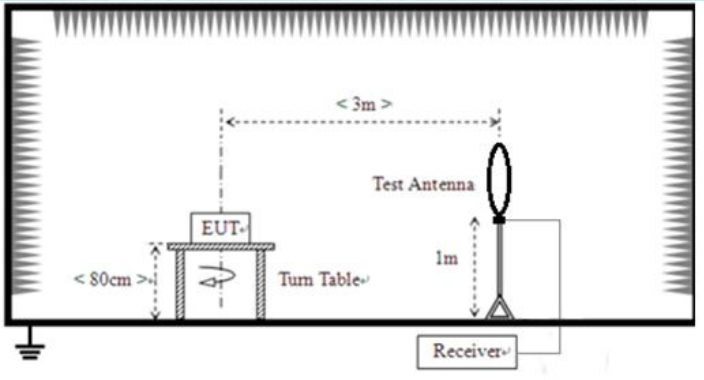
| | | | | | |
|--|--|--------------------|--------|------------------|------------------|
| Test Requirement: | FCC Part15 C Section 15.209 | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | 9kHz to 25GHz | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 9kHz-150kHz | Quasi-peak | 200Hz | 300Hz | Quasi-peak Value |
| | 150kHz-30MHz | Quasi-peak | 9kHz | 10kHz | Quasi-peak Value |
| | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| Peak | | 1MHz | 10Hz | Average Value | |
| Limit: (Field strength of the fundamental signal) | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 2400MHz-2483.5MHz | 94.00 | | Average Value | |
| | | 114.00 | | Peak Value | |
| Limit: (Spurious Emissions) | Frequency | Limit (uV/m) | | Remark | |
| | 0.009MHz-0.490MHz | 2400/F(kHz) @300m | | Quasi-peak Value | |
| | 0.490MHz-1.705MHz | 24000/F(kHz) @30m | | Quasi-peak Value | |
| | 1.705MHz-30.0MHz | 30 @30m | | Quasi-peak Value | |
| | 30MHz-88MHz | 100 @3m | | Quasi-peak Value | |
| | 88MHz-216MHz | 150 @3m | | Quasi-peak Value | |
| | 216MHz-960MHz | 200 @3m | | Quasi-peak Value | |
| | 960MHz-1GHz | 500 @3m | | Quasi-peak Value | |
| | Above 1GHz | 500 @3m | | Average Value | |
| 5000 @3m | | Peak Value | | | |
| Limit: (band edge) | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | |
| Test setup: | <p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p> | | | | |
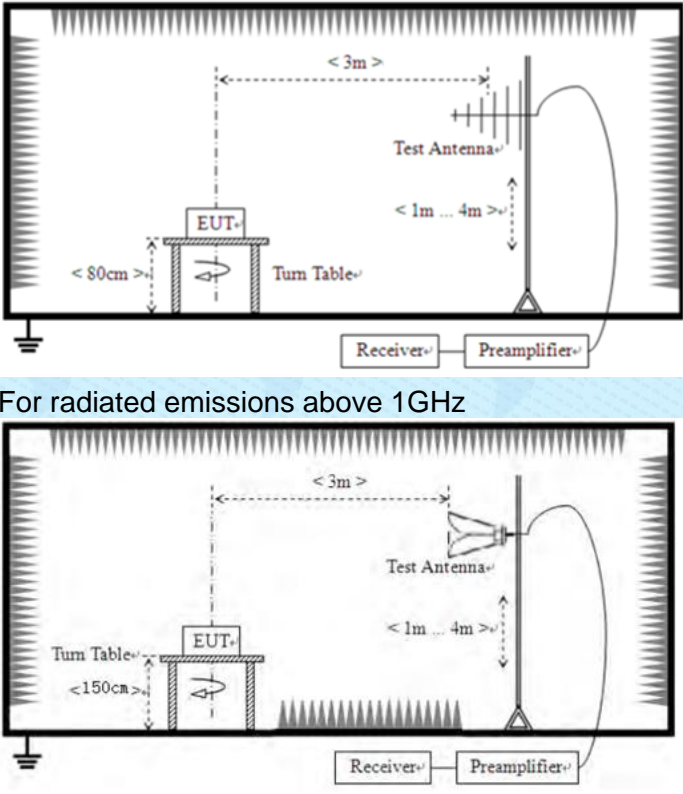
| | | | | | | | |
|--------------------------|--|---------|-------|---------|----------|---------|----------|
| |  <p>For radiated emissions above 1GHz</p> | | | | | | |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | | |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p> | | | | | | |
| <p>Test mode:</p> | <p>Refer to section 5.2 for details</p> | | | | | | |
| <p>Test environment:</p> | <table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table> | Temp.: | 25 °C | Humid.: | 52% | Press.: | 1012mbar |
| Temp.: | 25 °C | Humid.: | 52% | Press.: | 1012mbar | | |
| <p>Test voltage:</p> | <p>DC 3V</p> | | | | | | |
| <p>Test results:</p> | <p>Pass</p> | | | | | | |

Measurement data:

7.2.1 Field Strength of The Fundamental Signal

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2402.00 | 93.05 | 27.43 | 2.93 | 38.88 | 84.53 | 114.00 | -29.47 | Vertical |
| 2402.00 | 91.87 | 27.43 | 2.93 | 38.88 | 83.35 | 114.00 | -30.65 | Horizontal |
| 2441.00 | 93.40 | 27.55 | 2.96 | 38.98 | 84.93 | 114.00 | -29.07 | Vertical |
| 2441.00 | 91.40 | 27.55 | 2.96 | 38.98 | 82.93 | 114.00 | -31.07 | Horizontal |
| 2480.00 | 93.46 | 27.64 | 2.99 | 39.05 | 85.04 | 114.00 | -28.96 | Vertical |
| 2480.00 | 91.50 | 27.64 | 2.99 | 39.05 | 83.08 | 114.00 | -30.92 | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2402.00 | 83.53 | 27.43 | 2.93 | 38.88 | 75.01 | 94.00 | -18.99 | Vertical |
| 2402.00 | 81.79 | 27.43 | 2.93 | 38.88 | 73.27 | 94.00 | -20.73 | Horizontal |
| 2441.00 | 83.18 | 27.55 | 2.96 | 38.98 | 74.71 | 94.00 | -19.29 | Vertical |
| 2441.00 | 81.18 | 27.55 | 2.96 | 38.98 | 72.71 | 94.00 | -21.29 | Horizontal |
| 2480.00 | 82.71 | 27.64 | 2.99 | 39.05 | 74.29 | 94.00 | -19.71 | Vertical |
| 2480.00 | 80.45 | 27.64 | 2.99 | 39.05 | 72.03 | 94.00 | -21.97 | Horizontal |

Note: RBW>20dB BW, VBW> RBW, PK detector is for PK value, AV detector is for AV value .

7.2.2 Spurious emissions


■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of it.

Horizontal:

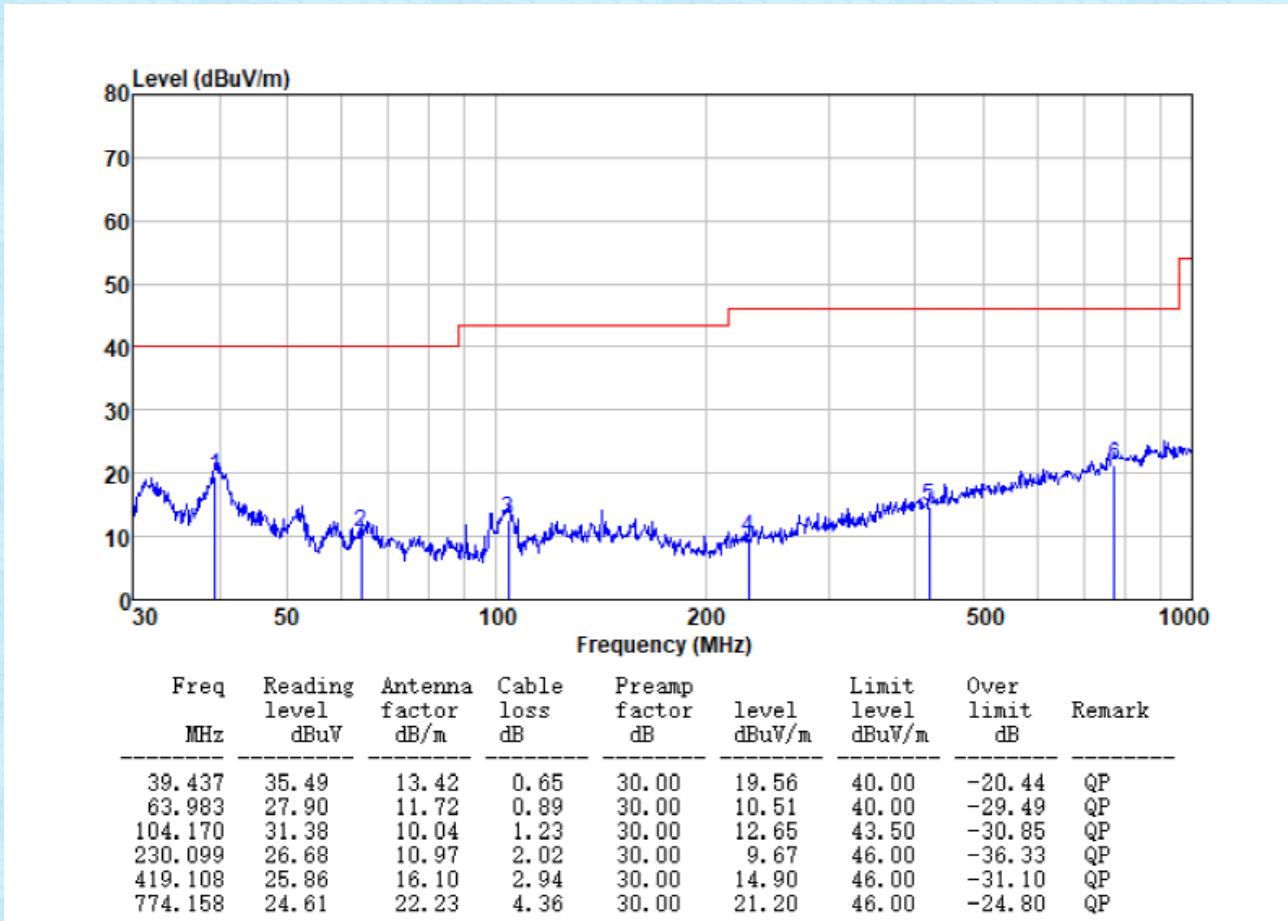

Vertical:

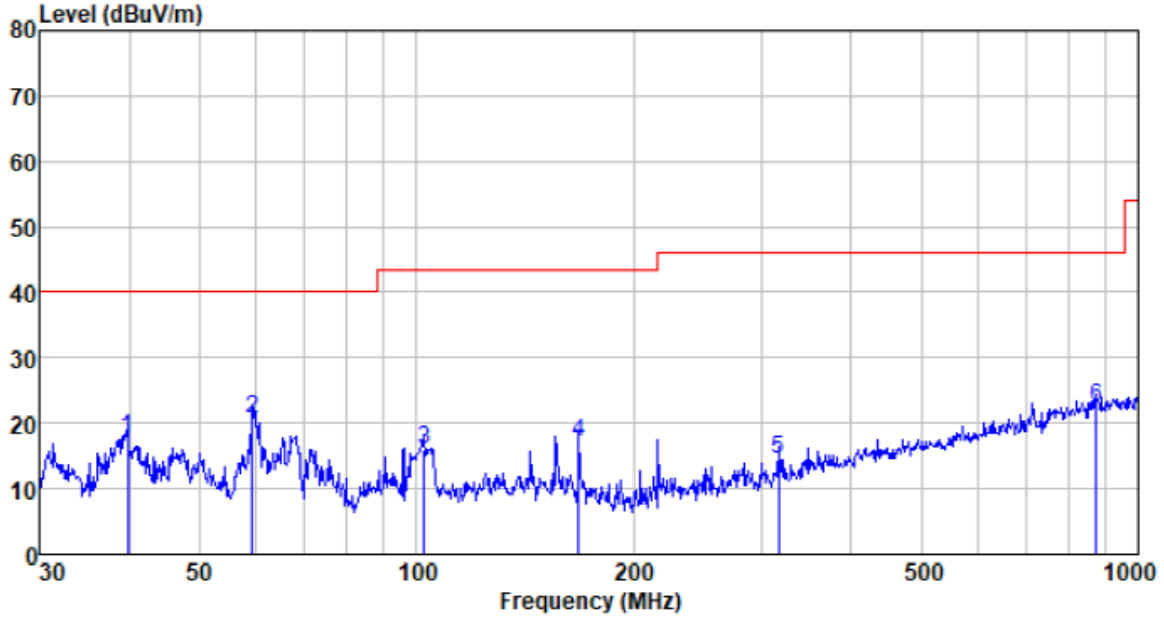

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 39.715 | 33.53 | 13.46 | 0.66 | 30.00 | 17.65 | 40.00 | -22.35 | QP |
| 59.232 | 37.25 | 12.64 | 0.85 | 30.00 | 20.74 | 40.00 | -19.26 | QP |
| 102.360 | 34.92 | 9.89 | 1.21 | 30.00 | 16.02 | 43.50 | -27.48 | QP |
| 167.824 | 33.69 | 11.67 | 1.67 | 30.00 | 17.03 | 43.50 | -26.47 | QP |
| 317.701 | 29.09 | 13.06 | 2.45 | 30.00 | 14.60 | 46.00 | -31.40 | QP |
| 875.247 | 24.10 | 23.62 | 4.76 | 30.00 | 22.48 | 46.00 | -23.52 | QP |

■ Above 1GHz

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 34.93 | 31.78 | 8.60 | 32.09 | 43.22 | 74.00 | -30.78 | Vertical |
| 7206.00 | 30.25 | 36.15 | 11.65 | 32.00 | 46.05 | 74.00 | -27.95 | Vertical |
| 9608.00 | 30.07 | 37.95 | 14.14 | 31.62 | 50.54 | 74.00 | -23.46 | Vertical |
| 4804.00 | 38.73 | 31.78 | 8.60 | 32.09 | 47.02 | 74.00 | -26.98 | Horizontal |
| 7206.00 | 31.80 | 36.15 | 11.65 | 32.00 | 47.60 | 74.00 | -26.40 | Horizontal |
| 9608.00 | 29.26 | 37.95 | 14.14 | 31.62 | 49.73 | 74.00 | -24.27 | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 24.19 | 31.78 | 8.60 | 32.09 | 32.48 | 54.00 | -21.52 | Vertical |
| 7206.00 | 19.21 | 36.15 | 11.65 | 32.00 | 35.01 | 54.00 | -18.99 | Vertical |
| 9608.00 | 18.43 | 37.95 | 14.14 | 31.62 | 38.90 | 54.00 | -15.10 | Vertical |
| 4804.00 | 28.16 | 31.78 | 8.60 | 32.09 | 36.45 | 54.00 | -17.55 | Horizontal |
| 7206.00 | 21.23 | 36.15 | 11.65 | 32.00 | 37.03 | 54.00 | -16.97 | Horizontal |
| 9608.00 | 17.97 | 37.95 | 14.14 | 31.62 | 38.44 | 54.00 | -15.56 | Horizontal |

| | |
|---------------|----------------|
| Test channel: | Middle channel |
|---------------|----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 35.46 | 31.85 | 8.67 | 32.12 | 43.86 | 74.00 | -30.14 | Vertical |
| 7323.00 | 30.60 | 36.37 | 11.72 | 31.89 | 46.80 | 74.00 | -27.20 | Vertical |
| 9764.00 | 30.38 | 38.35 | 14.25 | 31.62 | 51.36 | 74.00 | -22.64 | Vertical |
| 4882.00 | 39.36 | 31.85 | 8.67 | 32.12 | 47.76 | 74.00 | -26.24 | Horizontal |
| 7323.00 | 32.20 | 36.37 | 11.72 | 31.89 | 48.40 | 74.00 | -25.60 | Horizontal |
| 9764.00 | 29.62 | 38.35 | 14.25 | 31.62 | 50.60 | 74.00 | -23.40 | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 24.62 | 31.85 | 8.67 | 32.12 | 33.02 | 54.00 | -20.98 | Vertical |
| 7323.00 | 19.50 | 36.37 | 11.72 | 31.89 | 35.70 | 54.00 | -18.30 | Vertical |
| 9764.00 | 18.69 | 38.35 | 14.25 | 31.62 | 39.67 | 54.00 | -14.33 | Vertical |
| 4882.00 | 28.65 | 31.85 | 8.67 | 32.12 | 37.05 | 54.00 | -16.95 | Horizontal |
| 7323.00 | 21.55 | 36.37 | 11.72 | 31.89 | 37.75 | 54.00 | -16.25 | Horizontal |
| 9764.00 | 18.27 | 38.35 | 14.25 | 31.62 | 39.25 | 54.00 | -14.75 | Horizontal |

| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 36.09 | 31.93 | 8.73 | 32.16 | 44.59 | 74.00 | -29.41 | Vertical |
| 7440.00 | 31.02 | 36.59 | 11.79 | 31.78 | 47.62 | 74.00 | -26.38 | Vertical |
| 9920.00 | 30.75 | 38.81 | 14.38 | 31.88 | 52.06 | 74.00 | -21.94 | Vertical |
| 4960.00 | 40.12 | 31.93 | 8.73 | 32.16 | 48.62 | 74.00 | -25.38 | Horizontal |
| 7440.00 | 32.67 | 36.59 | 11.79 | 31.78 | 49.27 | 74.00 | -24.73 | Horizontal |
| 9920.00 | 30.06 | 38.81 | 14.38 | 31.88 | 51.37 | 74.00 | -22.63 | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 25.18 | 31.93 | 8.73 | 32.16 | 33.68 | 54.00 | -20.32 | Vertical |
| 7440.00 | 19.88 | 36.59 | 11.79 | 31.78 | 36.48 | 54.00 | -17.52 | Vertical |
| 9920.00 | 19.03 | 38.81 | 14.38 | 31.88 | 40.34 | 54.00 | -13.66 | Vertical |
| 4960.00 | 29.28 | 31.93 | 8.73 | 32.16 | 37.78 | 54.00 | -16.22 | Horizontal |
| 7440.00 | 21.98 | 36.59 | 11.79 | 31.78 | 38.58 | 54.00 | -15.42 | Horizontal |
| 9920.00 | 18.66 | 38.81 | 14.38 | 31.88 | 39.97 | 54.00 | -14.03 | Horizontal |

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

7.2.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 43.20 | 27.14 | 2.81 | 38.64 | 34.51 | 74.00 | -39.49 | Horizontal |
| 2390.00 | 44.52 | 27.37 | 2.91 | 38.84 | 35.96 | 74.00 | -38.04 | Horizontal |
| 2400.00 | 61.54 | 27.41 | 2.92 | 38.86 | 53.01 | 74.00 | -20.99 | Horizontal |
| 2310.00 | 44.05 | 27.14 | 2.81 | 38.64 | 35.36 | 74.00 | -38.64 | Vertical |
| 2390.00 | 45.22 | 27.37 | 2.91 | 38.84 | 36.66 | 74.00 | -37.34 | Vertical |
| 2400.00 | 63.75 | 27.41 | 2.92 | 38.86 | 55.22 | 74.00 | -18.78 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 33.27 | 27.14 | 2.81 | 38.64 | 24.58 | 54.00 | -29.42 | Horizontal |
| 2390.00 | 34.70 | 27.37 | 2.91 | 38.84 | 26.14 | 54.00 | -27.86 | Horizontal |
| 2400.00 | 46.03 | 27.41 | 2.92 | 38.86 | 37.50 | 54.00 | -16.50 | Horizontal |
| 2310.00 | 34.49 | 27.14 | 2.81 | 38.64 | 25.80 | 54.00 | -28.20 | Vertical |
| 2390.00 | 34.76 | 27.37 | 2.91 | 38.84 | 26.20 | 54.00 | -27.80 | Vertical |
| 2400.00 | 47.84 | 27.41 | 2.92 | 38.86 | 39.31 | 54.00 | -14.69 | Vertical |

| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 46.82 | 27.82 | 2.99 | 39.05 | 38.58 | 74.00 | -35.42 | Horizontal |
| 2500.00 | 45.68 | 27.70 | 3.01 | 39.10 | 37.29 | 74.00 | -36.71 | Horizontal |
| 2483.50 | 47.94 | 27.82 | 2.99 | 39.05 | 39.70 | 74.00 | -34.30 | Vertical |
| 2500.00 | 46.83 | 27.70 | 3.01 | 39.10 | 38.44 | 74.00 | -35.56 | Vertical |


Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 37.55 | 27.82 | 2.99 | 39.05 | 29.31 | 54.00 | -24.69 | Horizontal |
| 2500.00 | 35.31 | 27.70 | 3.01 | 39.10 | 26.92 | 54.00 | -27.08 | Horizontal |
| 2483.50 | 38.89 | 27.82 | 2.99 | 39.05 | 30.65 | 54.00 | -23.35 | Vertical |
| 2500.00 | 35.37 | 27.70 | 3.01 | 39.10 | 26.98 | 54.00 | -27.02 | Vertical |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


7.3 20dB Occupy Bandwidth
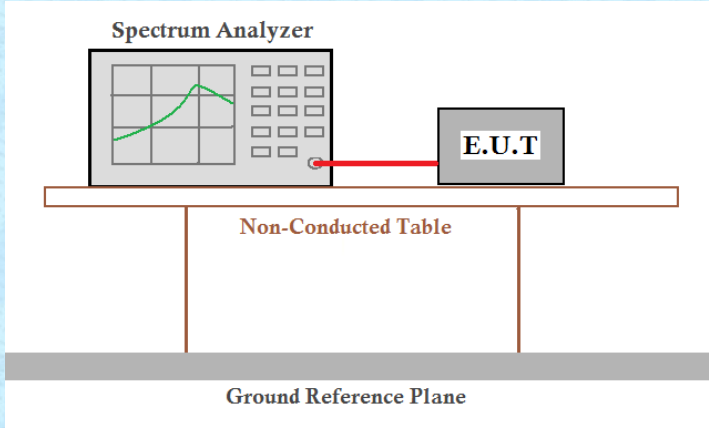
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.249/15.215 |
| Test Method: | ANSI C63.10:2013 |
| Limit: | Operation Frequency range 2400MHz~2483.5MHz |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Data

| Test channel | 20dB bandwidth(MHz) | Result |
|--------------|---------------------|--------|
| Lowest | 0.531 | Pass |
| Middle | 0.532 | Pass |
| Highest | 0.532 | Pass |


Test plot as follows:

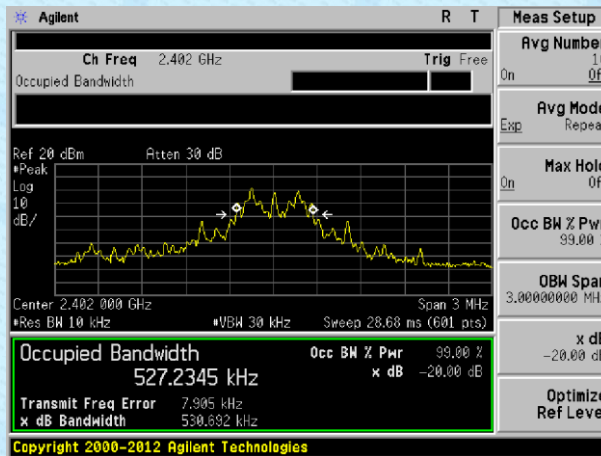

Lowest channel

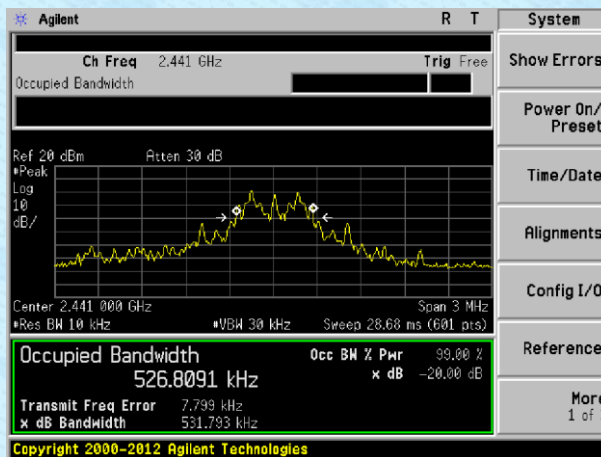

Middle channel

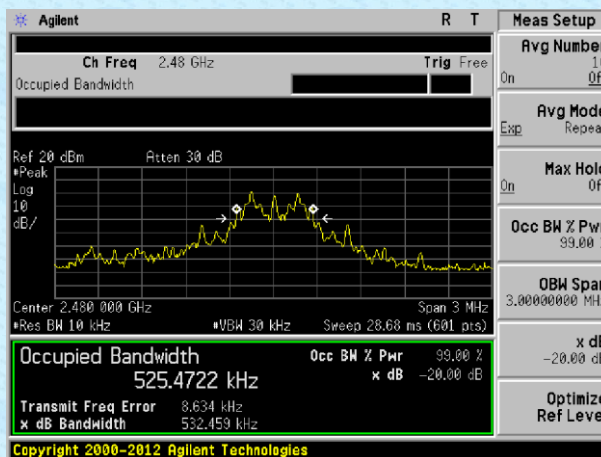

Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----