



RF Test Report

For

Applicant Name: Dongguan Sunhans Technology Company Limited
Address: Room 1103, Building 8, Gemdale Wisdom Park, No. 95 Jiaoping Road, 523722 Tangxia, Dongguan, China
EUT Name: eSIM 4G portable router
Brand Name: eSunFi
Model Number: SHFiEL40
Series Model Number: Refer to section 2

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF230628R00103
Test Standards: 47 CFR Part 15.247

Test Conclusion: Pass
FCC ID: 2AYN6-SHFiEL40
Test Date: 2023-06-28 to 2023-07-13
Date of Issue: 2023-07-14

Prepared By: Elma.Yang

Date: 2023-07-14

Approved By: Ryan.CJ

Date: 2023-07-14



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2023-07-14	Original

Note: Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1	INTRODUCTION	5
1.1	Identification of Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Announcement	5
2	PRODUCT INFORMATION	6
2.1	Application Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description of Equipment under Test (EUT)	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Uncertainty of Test	7
3.3	Summary of Test Result	7
4	TEST CONFIGURATION	8
4.1	Test Equipment List	8
4.2	Test Auxiliary Equipment	12
4.3	Test Modes	12
5	EVALUATION RESULTS (EVALUATION)	13
5.1	Antenna requirement	13
6	RADIO SPECTRUM MATTER TEST RESULTS (RF)	13
6.1	Conducted Emission at AC power line	13
6.1.1	E.U.T. Operation:	13
6.1.2	Test Setup Diagram:	14
6.1.3	Test Data:	15
6.2	Occupied Bandwidth	17
6.2.1	E.U.T. Operation:	17
6.2.2	Test Data:	17
6.3	Maximum Conducted Output Power	18
6.3.1	E.U.T. Operation:	18
6.3.2	Test Data:	18
6.4	Power Spectral Density	19
6.4.1	E.U.T. Operation:	19
6.4.2	Test Data:	19
6.5	Emissions in non-restricted frequency bands	20
6.5.1	E.U.T. Operation:	20
6.5.2	Test Data:	20
6.6	Band edge emissions (Radiated)	21
6.6.1	E.U.T. Operation:	21
6.6.2	Test Data:	22
6.7	Emissions in restricted frequency bands (below 1GHz)	26
6.7.1	E.U.T. Operation:	26
6.7.2	Test Data:	27
6.8	Emissions in restricted frequency bands (above 1GHz)	29
6.8.1	E.U.T. Operation:	29
6.8.2	Test Data:	30
7	TEST SETUP PHOTOS	36



8 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) 38
APPENDIX 39

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Dongguan Sunhans Technology Company Limited
Address:	Room 1103, Building 8, Gemdale Wisdom Park, No. 95 Jiaoping Road, 523722 Tangxia, Dongguan, China

2.2 Manufacturer Information

Company Name:	Dongguan Sunhans Technology Company Limited
Address:	Room 1103, Building 8, Gemdale Wisdom Park, No. 95 Jiaoping Road, 523722 Tangxia, Dongguan, China

2.3 Factory Information

Company Name:	Dongguan Sunhans Technology Company Limited
Address:	Room 1103, Building 8, Gemdale Wisdom Park, No. 95 Jiaoping Road, 523722 Tangxia, Dongguan, China

2.4 General Description of Equipment under Test (EUT)

EUT Name:	eSIM 4G portable router
Test Model Number:	SHFiEL40
Series Model Number:	SHFiEL40X, SHFiEL40Pro, SHFiE SIMX, SHFi9X6
Description of Model name differentiation:	Only the model name is different, the others are the same.

2.5 Technical Information

Power Supply:	DC 5V from adapter
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz
Number of Channels:	802.11b/g/n(HT20): 11 Channels; 802.11n(HT40): 7 Channels
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	PCB ANT
Antenna Gain#:	0 dBi

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:
47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	±2.64dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Emissions in restricted frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2022-11-24	2023-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2022-11-24	2023-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2022-11-24	2023-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2022-11-24	2023-11-23

Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Maximum Conducted Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Power Spectral Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date

RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2022-11-24	2023-11-23
RF Sensor Unit	Techy	TR1029-2	/	2022-11-24	2023-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2022-11-24	2023-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2022-11-24	2023-11-23
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2022-11-24	2023-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2022-11-24	2023-11-23

Band edge emissions (Radiated)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23

SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (below 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESC17	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

Emissions in restricted frequency bands (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2022-11-24	2023-11-23

RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2022-11-24	2023-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2021-11-28	2023-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2022-11-24	2023-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2022-11-24	2023-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2023-11-27

4.2 Test Auxiliary Equipment

Title	Manufacturer	Model No.	Serial No.
Adapter	Huawei	HW-059200CHQ	/

4.3 Test Modes

No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode.

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	22.3 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Setup Diagram:

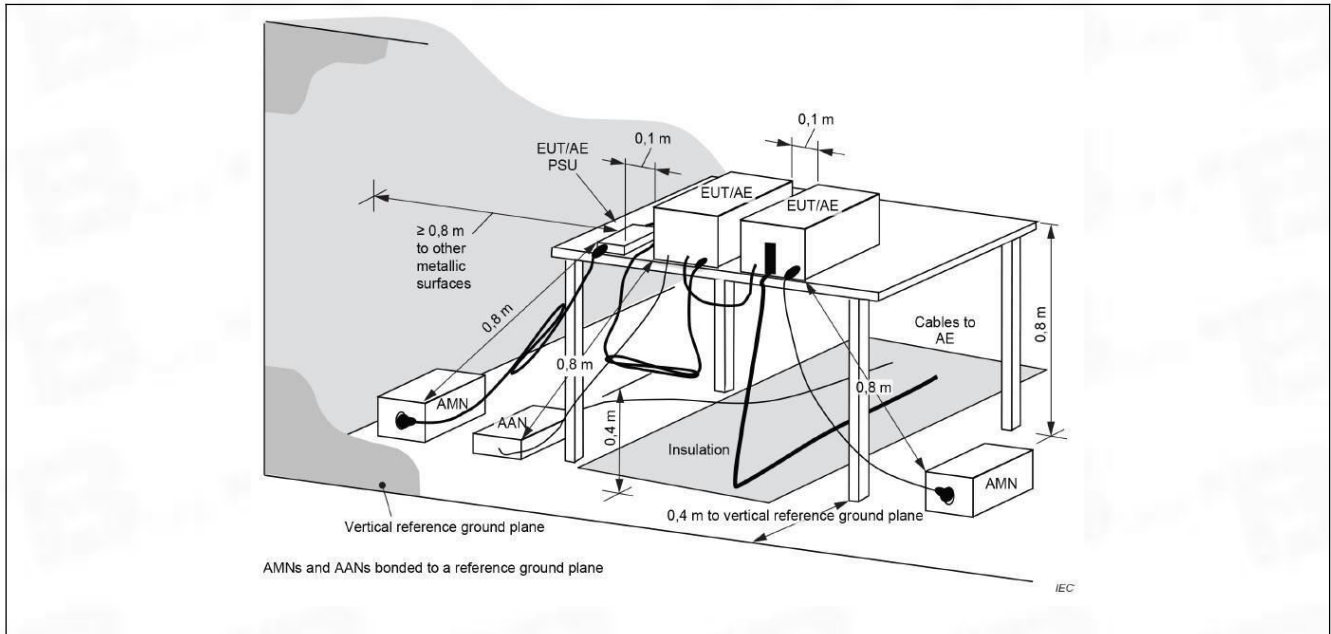


6.1.3 Test Data:

TM1 / Line: Line / Band: 2.4G / BW: 20 / CH: M

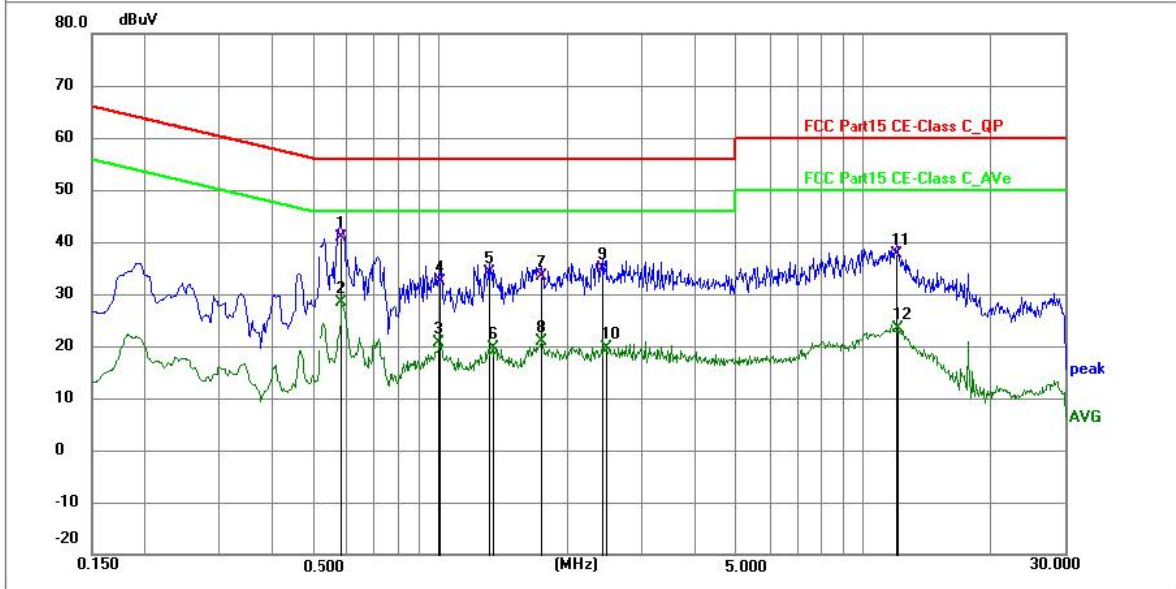

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.5820	30.34	10.66	41.00	56.00	-15.00	QP	P	
2	0.5865	17.67	10.66	28.33	46.00	-17.67	AVG	P	
3	0.9960	9.76	10.78	20.54	46.00	-25.46	AVG	P	
4	1.0004	21.52	10.78	32.30	56.00	-23.70	QP	P	
5	1.3064	23.35	10.75	34.10	56.00	-21.90	QP	P	
6	1.3425	8.85	10.75	19.60	46.00	-26.40	AVG	P	
7	1.7384	22.79	10.71	33.50	56.00	-22.50	QP	P	
8	1.7384	10.21	10.71	20.92	46.00	-25.08	AVG	P	
9	2.4090	24.20	10.70	34.90	56.00	-21.10	QP	P	
10	2.4855	8.97	10.70	19.67	46.00	-26.33	AVG	P	
11	12.0165	26.76	10.94	37.70	60.00	-22.30	QP	P	
12	12.1425	12.44	10.93	23.37	50.00	-26.63	AVG	P	

TM1 / Line: Neutral / Band: 2.4G / BW: 20 / CH: M

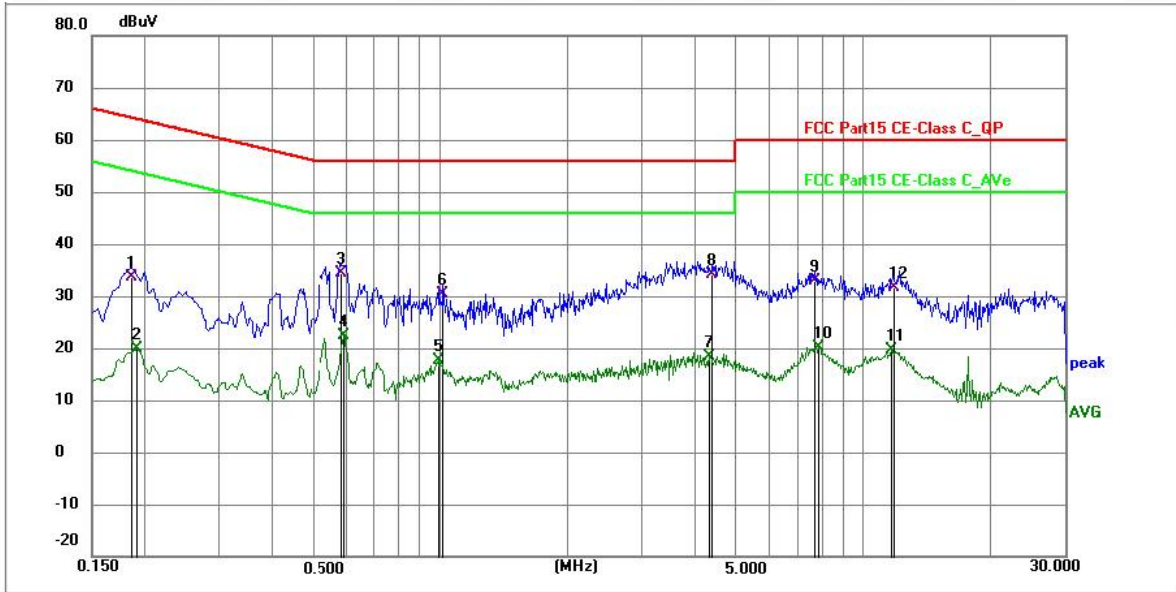

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	23.13	10.57	33.70	64.21	-30.51	QP	P	
2	0.1905	9.19	10.58	19.77	54.01	-34.24	AVG	P	
3 *	0.5820	23.74	10.66	34.40	56.00	-21.60	QP	P	
4	0.5910	11.73	10.67	22.40	46.00	-23.60	AVG	P	
5	0.9960	6.90	10.78	17.68	46.00	-28.32	AVG	P	
6	1.0184	19.72	10.78	30.50	56.00	-25.50	QP	P	
7	4.3304	7.62	10.76	18.38	46.00	-27.62	AVG	P	
8	4.4024	23.43	10.77	34.20	56.00	-21.80	QP	P	
9	7.6560	22.12	10.78	32.90	60.00	-27.10	QP	P	
10	7.8135	9.28	10.80	20.08	50.00	-29.92	AVG	P	
11	11.7240	8.63	10.91	19.54	50.00	-30.46	AVG	P	
12	11.8185	20.80	10.90	31.70	60.00	-28.30	QP	P	

6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<ul style="list-style-type: none"> a) Set RBW = 100 kHz. b) Set the VBW \geq [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.4 °C
Humidity:	49.1 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Data:

Please Refer to Appendix for Details.

6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.4 °C
Humidity:	49.1 %
Atmospheric Pressure:	1010 mbar

6.3.2 Test Data:

Please Refer to Appendix for Details.

6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.4 °C
Humidity:	49.1 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Data:

Please Refer to Appendix for Details.

6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.4 °C
Humidity:	49.1 %
Atmospheric Pressure:	1010 mbar

6.5.2 Test Data:

Please Refer to Appendix for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.3 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.6.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	68.06	-30.59	37.47	74.00	-36.53	peak	P
2	2390.000	71.38	-30.49	40.89	74.00	-33.11	peak	P
3 *	2400.000	78.34	-30.48	47.86	74.00	-26.14	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	72.06	-30.59	41.47	74.00	-32.53	peak	P
2	2390.000	72.88	-30.49	42.39	74.00	-31.61	peak	P
3 *	2400.000	78.84	-30.48	48.36	74.00	-25.64	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	77.60	-30.39	47.21	74.00	-26.79	peak	P
2	2500.000	69.87	-30.37	39.50	74.00	-34.50	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	75.10	-30.39	44.71	74.00	-29.29	peak	P
2	2500.000	71.37	-30.37	41.00	74.00	-33.00	peak	P

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	67.93	-30.59	37.34	74.00	-36.66	peak	P
2	2390.000	71.61	-30.49	41.12	74.00	-32.88	peak	P
3 *	2400.000	79.18	-30.48	48.70	74.00	-25.30	peak	P

TM2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	70.43	-30.59	39.84	74.00	-34.16	peak	P
2	2390.000	71.11	-30.49	41.12	74.00	-32.88	peak	P
3 *	2400.000	77.68	-30.48	47.20	74.00	-26.80	peak	P

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	78.75	-30.39	48.36	74.00	-25.64	peak	P
2	2500.000	70.25	-30.37	39.88	74.00	-34.12	peak	P

TM2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	80.25	-30.39	49.86	74.00	-24.14	peak	P
2	2500.000	69.25	-30.37	38.88	74.00	-35.12	peak	P

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	68.84	-30.59	38.25	74.00	-35.75	peak	P
2	2390.000	76.84	-30.49	46.35	74.00	-27.65	peak	P
3 *	2400.000	84.13	-30.48	53.65	74.00	-20.35	peak	P

TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	68.84	-30.59	38.25	74.00	-35.75	peak	P
2	2390.000	72.84	-30.49	42.35	74.00	-31.65	peak	P
3 *	2400.000	80.63	-30.48	50.15	74.00	-23.85	peak	P

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	82.41	-30.39	52.02	74.00	-21.98	peak	P
2	2500.000	70.85	-30.37	40.48	74.00	-33.52	peak	P

TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	81.41	-30.39	52.02	74.00	-21.98	peak	P
2	2500.000	69.35	-30.37	38.98	74.00	-35.02	peak	P

TM4 / Polarization: Horizontal / Band: 2.4G / BW: 40 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	70.69	-30.59	40.10	74.00	-33.90	peak	P
2	2390.000	71.78	-30.49	41.29	74.00	-32.71	peak	P
3 *	2400.000	80.07	-30.48	49.59	74.00	-24.41	peak	P

TM4 / Polarization: Vertical / Band: 2.4G / BW: 40 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2310.000	68.69	-30.59	38.10	74.00	-35.90	peak	P
2	2390.000	73.78	-30.49	43.29	74.00	-30.71	peak	P
3 *	2400.000	82.07	-30.48	51.59	74.00	-22.41	peak	P

TM4 / Polarization: Horizontal / Band: 2.4G / BW: 40 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	80.91	-30.39	50.52	74.00	-23.48	peak	P
2	2500.000	67.85	-30.37	37.48	74.00	-36.52	peak	P

TM4 / Polarization: Vertical / Band: 2.4G / BW: 40 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	2483.500	82.41	-30.39	52.02	74.00	-21.98	peak	P
2	2500.000	68.85	-30.37	38.48	74.00	-35.52	peak	P

6.7 Emissions in restricted frequency bands (below 1GHz)


Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.3 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar


6.7.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

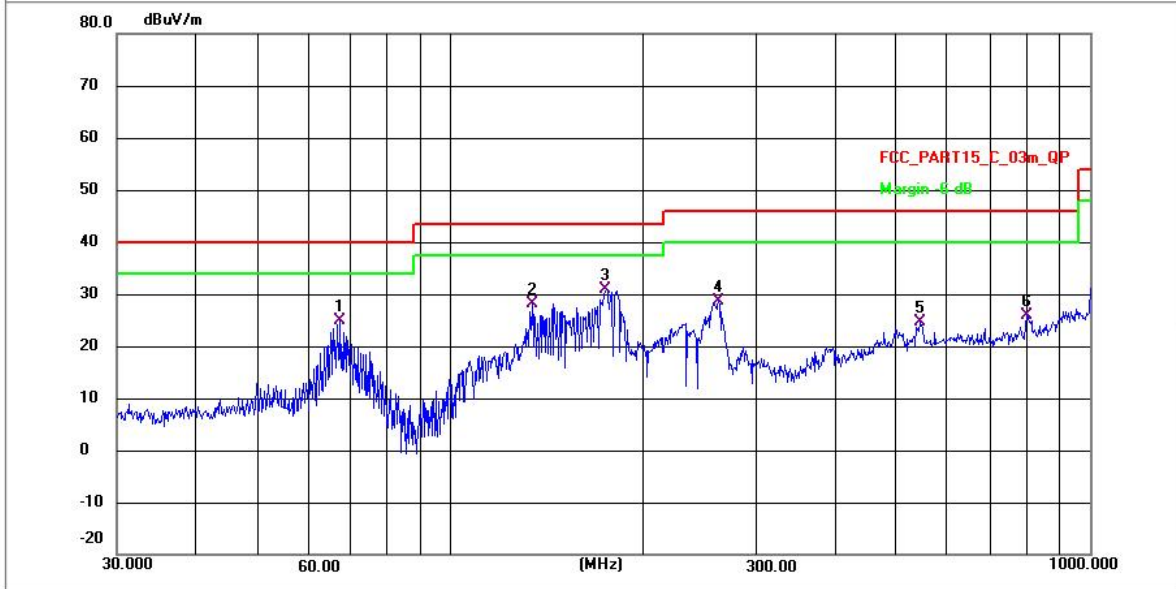

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	67.0845	42.92	-18.13	24.79	40.00	-15.21	QP	P
2	134.3235	56.11	-27.92	28.19	43.50	-15.31	QP	P
3 *	175.3439	58.46	-27.55	30.91	43.50	-12.59	QP	P
4	262.4350	54.42	-25.74	28.68	46.00	-17.32	QP	P
5	545.1826	46.26	-21.61	24.65	46.00	-21.35	QP	P
6	797.5801	49.56	-23.73	25.83	46.00	-20.17	QP	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

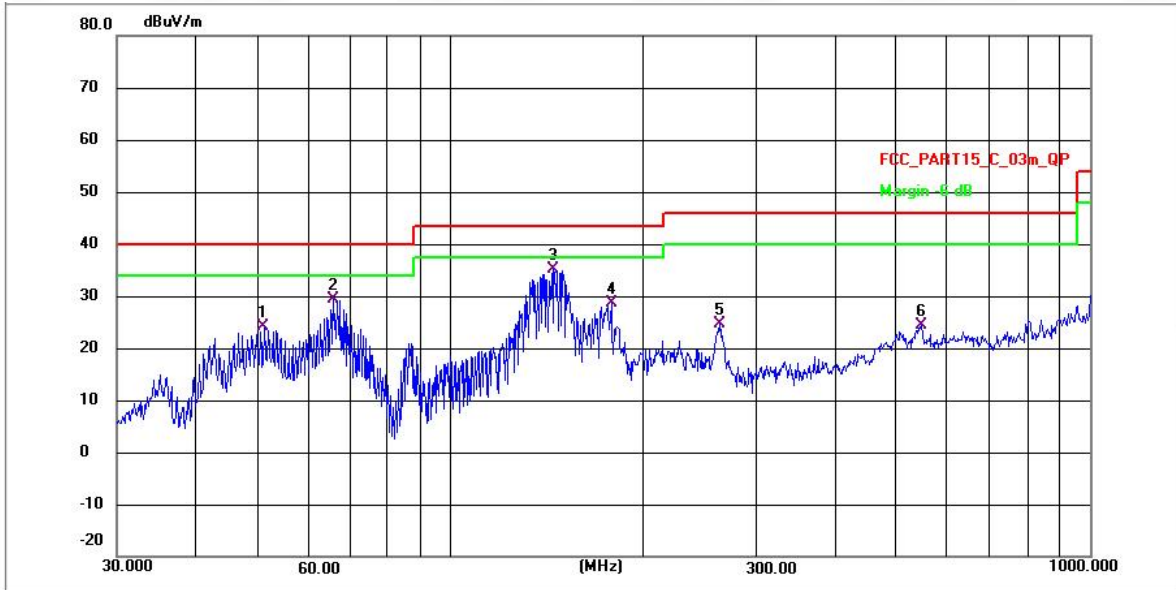

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	51.1209	44.38	-20.30	24.08	40.00	-15.92	QP	P
2	65.5727	49.45	-20.06	29.39	40.00	-10.61	QP	P
3 *	144.8418	62.88	-27.83	35.05	43.50	-8.45	QP	P
4	178.4453	56.15	-27.52	28.63	43.50	-14.87	QP	P
5	263.3569	50.28	-25.74	24.54	46.00	-21.46	QP	P
6	546.1393	46.08	-21.62	24.46	46.00	-21.54	QP	P

6.8 Emissions in restricted frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2013 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.3 °C
Humidity:	45.6 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Data:

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2434.997	63.64	-30.45	33.19	125.20	-92.01	peak	P
2	3021.811	66.99	-29.49	37.50	74.00	-36.50	peak	P
3	4647.050	67.58	-28.37	39.21	74.00	-34.79	peak	P
4	6568.005	68.75	-25.32	43.43	74.00	-30.57	peak	P
5	8019.971	71.03	-25.52	45.51	74.00	-28.49	peak	P
6 *	11978.560	71.11	-22.23	48.88	74.00	-25.12	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2678.690	64.09	-30.06	34.03	74.00	-39.97	peak	P
2	4254.921	65.12	-28.89	36.23	74.00	-37.77	peak	P
3	5277.270	66.14	-27.13	39.01	74.00	-34.99	peak	P
4	6719.703	69.72	-25.18	44.54	74.00	-29.46	peak	P
5	7525.871	68.02	-24.82	43.20	74.00	-30.80	peak	P
6 *	11971.637	70.59	-22.24	48.35	74.00	-25.65	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2756.447	63.73	-29.93	33.80	74.00	-40.20	peak	P
2	4025.226	66.82	-28.99	37.83	74.00	-36.17	peak	P
3	4733.813	63.90	-28.13	35.77	74.00	-38.23	peak	P
4	6634.786	69.85	-25.26	44.59	74.00	-29.41	peak	P
5	8167.347	72.20	-25.46	46.74	74.00	-27.26	peak	P
6 *	11813.519	72.95	-22.51	50.44	74.00	-23.56	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2951.033	65.38	-29.60	35.78	74.00	-38.22	peak	P
2	4383.498	67.40	-28.84	38.56	74.00	-35.44	peak	P
3	5430.459	68.35	-27.00	41.35	74.00	-32.65	peak	P
4	6746.950	69.06	-25.16	43.90	74.00	-30.10	peak	P
5	7675.252	69.31	-25.05	44.26	74.00	-29.74	peak	P
6 *	14626.619	68.54	-21.00	47.54	74.00	-26.46	peak	P

TM1 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2497.726	61.89	-30.37	31.52	74.00	-42.48	peak	P
2	3932.082	64.08	-29.01	35.07	74.00	-38.93	peak	P
3	4622.936	63.77	-28.44	35.33	74.00	-38.67	peak	P
4	7567.315	68.01	-24.88	43.13	74.00	-30.87	peak	P
5	10348.748	69.34	-24.45	44.89	74.00	-29.11	peak	P
6 *	14955.796	66.46	-20.47	45.99	74.00	-28.01	peak	P

TM1 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2670.187	59.89	-30.08	29.81	74.00	-44.19	peak	P
2	3852.212	61.93	-29.02	32.91	74.00	-41.09	peak	P
3	5174.561	66.07	-27.23	38.84	74.00	-35.16	peak	P
4	7411.461	65.75	-24.81	40.94	74.00	-33.06	peak	P
5	10989.995	69.90	-23.47	46.43	74.00	-27.57	peak	P
6 *	12629.207	70.58	-21.55	49.03	74.00	-24.97	peak	P

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2944.217	61.58	-29.61	31.97	74.00	-42.03	peak	P
2	4939.279	62.39	-27.54	34.85	74.00	-39.15	peak	P
3	7043.865	65.77	-24.92	40.85	74.00	-33.15	peak	P
4	10348.748	64.84	-24.45	40.39	74.00	-33.61	peak	P
5	13276.766	67.72	-21.13	46.59	74.00	-27.41	peak	P
6 *	14994.752	68.84	-20.41	48.43	74.00	-25.57	peak	P

TM2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2818.481	63.25	-29.82	33.43	74.00	-40.57	peak	P
2	3572.297	62.48	-29.04	33.44	74.00	-40.56	peak	P
3	4583.023	66.23	-28.55	37.68	74.00	-36.32	peak	P
4	5277.270	67.64	-27.13	40.51	74.00	-33.49	peak	P
5	6208.056	69.52	-25.35	44.17	74.00	-29.83	peak	P
6 *	13396.263	70.17	-21.04	49.13	74.00	-24.87	peak	P

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2828.274	66.68	-29.80	36.88	74.00	-37.12	peak	P
2	3535.318	67.69	-29.05	38.64	74.00	-35.36	peak	P
3	4874.043	66.63	-27.73	38.90	74.00	-35.10	peak	P
4	7292.464	68.72	-24.84	43.88	74.00	-30.12	peak	P
5	9266.941	67.46	-23.72	43.74	74.00	-30.26	peak	P
6 *	12607.325	69.42	-21.56	47.86	74.00	-26.14	peak	P

TM2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3276.535	67.89	-29.25	38.64	74.00	-35.36	peak	P
2	3915.071	66.56	-29.01	37.55	74.00	-36.45	peak	P
3	5547.861	67.66	-26.80	40.86	74.00	-33.14	peak	P
4	6619.462	69.73	-25.27	44.46	74.00	-29.54	peak	P
5 *	7854.794	70.80	-25.31	45.49	74.00	-28.51	peak	P
6	8935.523	67.26	-24.44	42.82	74.00	-31.18	peak	P

TM2 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2555.415	63.32	-30.27	33.05	74.00	-40.95	peak	P
2	3288.870	67.05	-29.24	37.81	74.00	-36.19	peak	P
3	4412.736	67.67	-28.82	38.85	74.00	-35.15	peak	P
4	6367.985	70.49	-25.37	45.12	74.00	-28.88	peak	P
5	7499.813	70.95	-24.78	46.17	74.00	-27.83	peak	P
6 *	13949.462	69.35	-21.08	48.27	74.00	-25.73	peak	P

TM2 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2545.095	60.60	-30.29	30.31	74.00	-43.69	peak	P
2	3600.284	63.70	-29.04	34.66	74.00	-39.34	peak	P
3	5667.801	66.81	-26.40	40.41	74.00	-33.59	peak	P
4	7920.911	69.71	-25.41	44.30	74.00	-29.70	peak	P
5	10633.773	68.82	-24.23	44.59	74.00	-29.41	peak	P
6 *	12805.643	69.14	-21.45	47.69	74.00	-26.31	peak	P

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3125.748	62.67	-29.39	33.28	74.00	-40.72	peak	P
2	3679.182	64.90	-29.04	35.86	74.00	-38.14	peak	P
3	5594.559	68.22	-26.64	41.58	74.00	-32.42	peak	P
4	6213.442	69.36	-25.36	44.00	74.00	-30.00	peak	P
5	11480.270	69.47	-23.08	46.39	74.00	-27.61	peak	P
6 *	13729.460	68.88	-21.02	47.86	74.00	-26.14	peak	P

TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2729.491	63.51	-29.97	33.54	74.00	-40.46	peak	P
2	3434.597	65.45	-29.11	36.34	74.00	-37.66	peak	P
3	4375.903	66.58	-28.84	37.74	74.00	-36.26	peak	P
4	5692.427	65.25	-26.33	38.92	74.00	-35.08	peak	P
5	6847.143	68.40	-25.07	43.33	74.00	-30.67	peak	P
6 *	11871.710	69.62	-22.41	47.21	74.00	-26.79	peak	P

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2686.443	62.35	-30.05	32.30	74.00	-41.70	peak	P
2	3666.443	65.33	-29.04	36.29	74.00	-37.71	peak	P
3	4600.276	66.91	-28.50	38.41	74.00	-35.59	peak	P
4	6451.352	68.46	-25.37	43.09	74.00	-30.91	peak	P
5	11069.695	68.94	-23.39	45.55	74.00	-28.45	peak	P
6 *	13415.637	72.09	-21.03	51.06	74.00	-22.94	peak	P

TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2870.274	63.00	-29.73	33.27	74.00	-40.73	peak	P
2	3860.014	65.34	-29.02	36.32	74.00	-37.68	peak	P
3	4744.771	65.88	-28.09	37.79	74.00	-36.21	peak	P
4	6598.449	70.16	-25.29	44.87	74.00	-29.13	peak	P
5	11137.090	70.48	-23.33	47.15	74.00	-26.85	peak	P
6 *	14337.801	72.24	-21.16	51.08	74.00	-22.92	peak	P

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2729.491	63.51	-29.97	33.54	74.00	-40.46	peak	P
2	3642.150	65.31	-29.04	36.27	74.00	-37.73	peak	P
3	4665.892	66.38	-28.32	38.06	74.00	-35.94	peak	P
4	6657.838	69.57	-25.24	44.33	74.00	-29.67	peak	P
5	7836.653	67.57	-25.29	42.28	74.00	-31.72	peak	P
6 *	12805.643	68.64	-21.45	47.19	74.00	-26.81	peak	P

TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3402.977	64.02	-29.14	34.88	74.00	-39.12	peak	P
2	5304.797	67.01	-27.11	39.90	74.00	-34.10	peak	P
3	6443.898	68.73	-25.38	43.35	74.00	-30.65	peak	P
4	8784.436	69.55	-24.74	44.81	74.00	-29.19	peak	P
5	10456.993	71.35	-24.50	46.85	74.00	-27.15	peak	P
6 *	14668.956	70.47	-20.93	49.54	74.00	-24.46	peak	P

TM4 / Polarization: Horizontal / Band: 2.4G / BW: 40 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2828.274	62.68	-29.80	32.88	74.00	-41.12	peak	P
2	3554.787	66.13	-29.05	37.08	74.00	-36.92	peak	P
3	4007.812	67.14	-29.00	38.14	74.00	-35.86	peak	P
4	5411.656	66.19	-27.03	39.16	74.00	-34.84	peak	P
5	7043.865	69.27	-24.92	44.35	74.00	-29.65	peak	P
6 *	11813.519	70.45	-22.51	47.94	74.00	-26.06	peak	P

TM4 / Polarization: Vertical / Band: 2.4G / BW: 40 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2805.477	62.47	-29.84	32.63	74.00	-41.37	peak	P
2	4529.032	66.40	-28.71	37.69	74.00	-36.31	peak	P
3	6518.831	67.43	-25.36	42.07	74.00	-31.93	peak	P
4	10744.998	67.51	-23.99	43.52	74.00	-30.48	peak	P
5	12876.162	69.38	-21.41	47.97	74.00	-26.03	peak	P
6 *	15447.869	71.14	-21.38	49.76	74.00	-24.24	peak	P

TM4 / Polarization: Horizontal / Band: 2.4G / BW: 40 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2902.812	64.30	-29.68	34.62	74.00	-39.38	peak	P
2	3717.665	63.72	-29.03	34.69	74.00	-39.31	peak	P
3	4447.308	64.72	-28.81	35.91	74.00	-38.09	peak	P
4	5391.360	65.99	-27.04	38.95	74.00	-35.05	peak	P
5	6793.916	68.99	-25.11	43.88	74.00	-30.12	peak	P
6 *	11796.459	69.95	-22.54	47.41	74.00	-26.59	peak	P

TM4 / Polarization: Vertical / Band: 2.4G / BW: 40 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2794.148	64.46	-29.87	34.59	74.00	-39.41	peak	P
2	4733.813	67.90	-28.13	39.77	74.00	-34.23	peak	P
3	6092.512	68.65	-25.34	43.31	74.00	-30.69	peak	P
4	9081.331	69.49	-24.13	45.36	74.00	-28.64	peak	P
5	13162.140	69.91	-21.22	48.69	74.00	-25.31	peak	P
6 *	17568.238	67.56	-16.39	51.17	74.00	-22.83	peak	P

TM4 / Polarization: Horizontal / Band: 2.4G / BW: 40 / CH: H


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2813.598	64.44	-29.83	34.61	74.00	-39.39	peak	P
2	4483.446	66.87	-28.80	38.07	74.00	-35.93	peak	P
3	6772.349	69.05	-25.14	43.91	74.00	-30.09	peak	P
4	9245.538	71.04	-23.77	47.27	74.00	-26.73	peak	P
5	12265.855	69.58	-21.88	47.70	74.00	-26.30	peak	P
6 *	14873.888	71.20	-20.60	50.60	74.00	-23.40	peak	P

TM4 / Polarization: Vertical / Band: 2.4G / BW: 40 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2991.395	62.98	-29.53	33.45	74.00	-40.55	peak	P
2	4701.088	66.46	-28.22	38.24	74.00	-35.76	peak	P
3	7360.227	69.27	-24.82	44.45	74.00	-29.55	peak	P
4	10188.479	68.98	-24.38	44.60	74.00	-29.40	peak	P
5	14197.590	70.27	-21.13	49.14	74.00	-24.86	peak	P
6 *	17568.238	68.06	-16.39	51.67	74.00	-22.33	peak	P

7 Test Setup Photos


Conducted Emission at AC power line

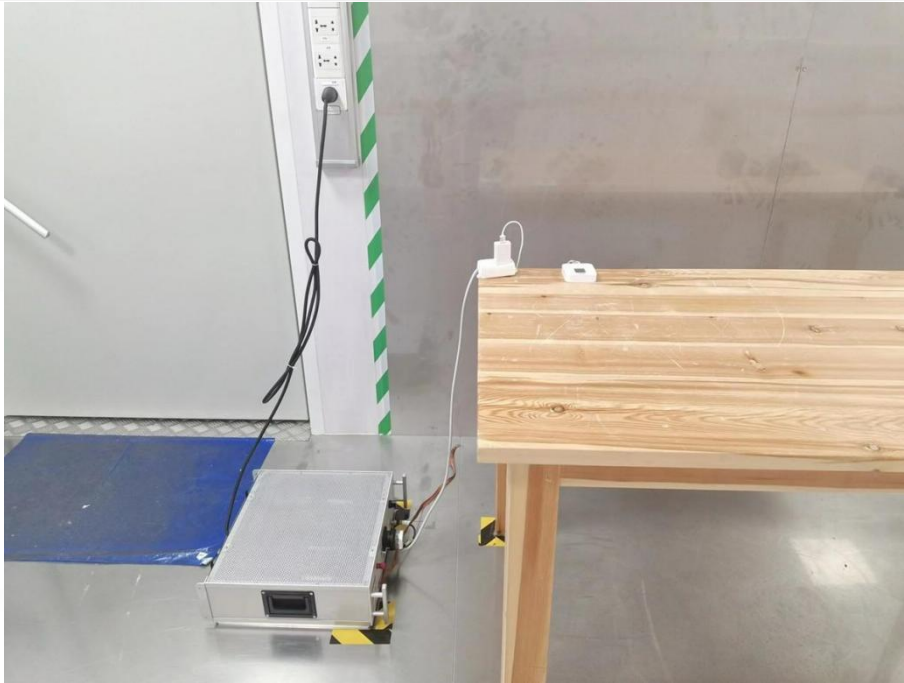


Occupied Bandwidth
Maximum Conducted Output Power
Power Spectral Density
Emissions in non-restricted frequency bands



Band edge emissions (Radiated)
Emissions in restricted frequency bands (above 1GHz)

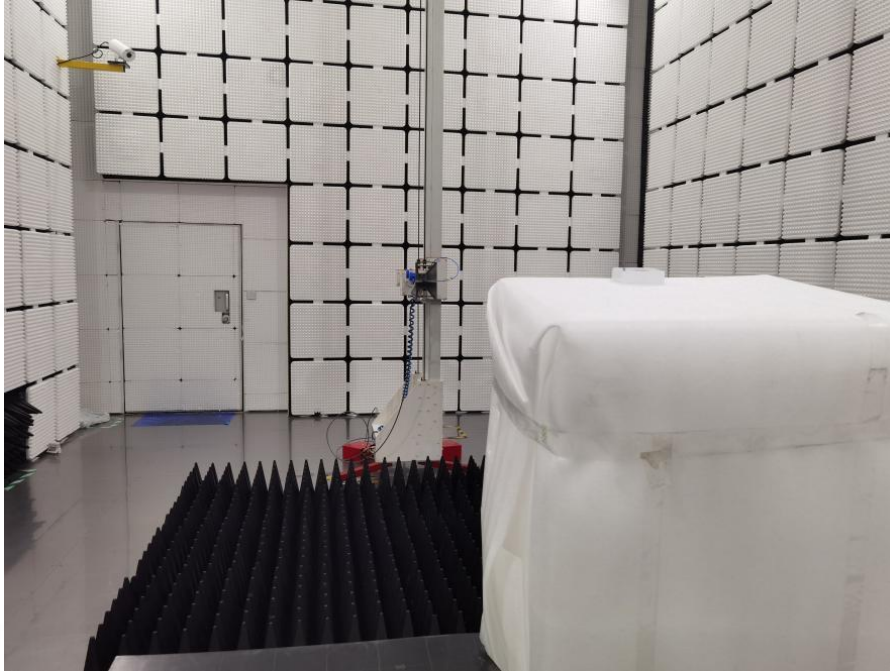

Emissions in restricted frequency bands (below 1GHz)

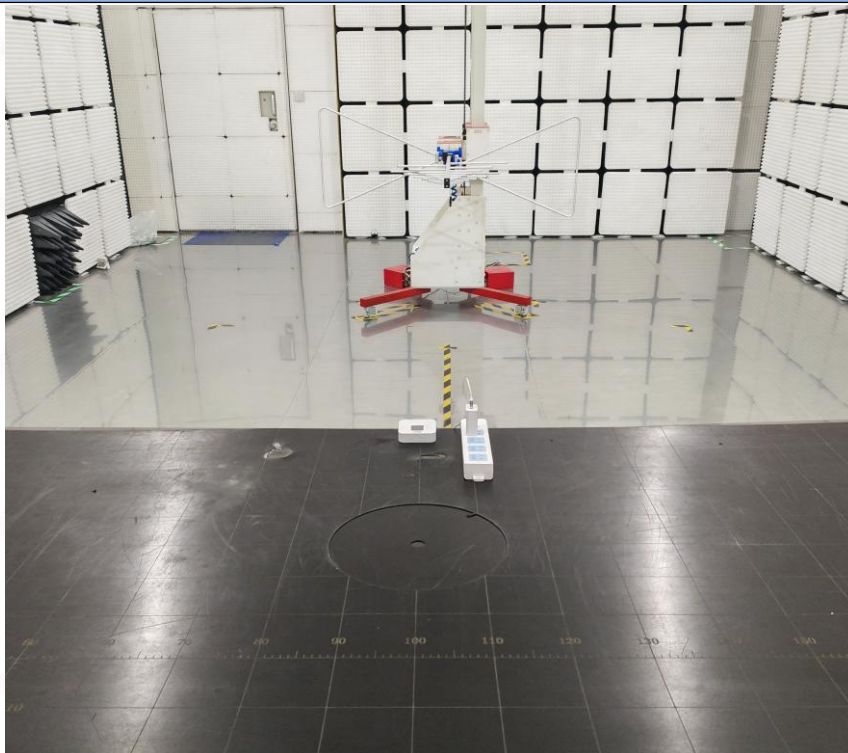

8 EUT Constructional Details (EUT Photos)

Please refer to Report BTF230628R00101

Appendix


1. Duty Cycle

1.1 Ant1


1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	8.384	8.414	99.64	0.02	0.04
		2437	8.384	8.414	99.64	0.02	0.04
		2462	8.383	8.413	99.64	0.02	0.04
802.11g	SISO	2412	1.392	1.428	97.48	0.11	0.03
		2437	1.394	1.428	97.62	0.10	0.06
		2462	1.392	1.428	97.48	0.11	0.03
802.11n (HT20)	SISO	2412	1.300	1.336	97.31	0.12	0.03
		2437	1.300	1.336	97.31	0.12	0.03
		2462	1.301	1.336	97.38	0.12	0.03
802.11n (HT40)	SISO	2422	0.648	0.683	94.88	0.23	0.04
		2437	0.648	0.682	95.01	0.22	0.04
		2452	0.649	0.683	95.02	0.22	0.03


1.1.2 Test Graph

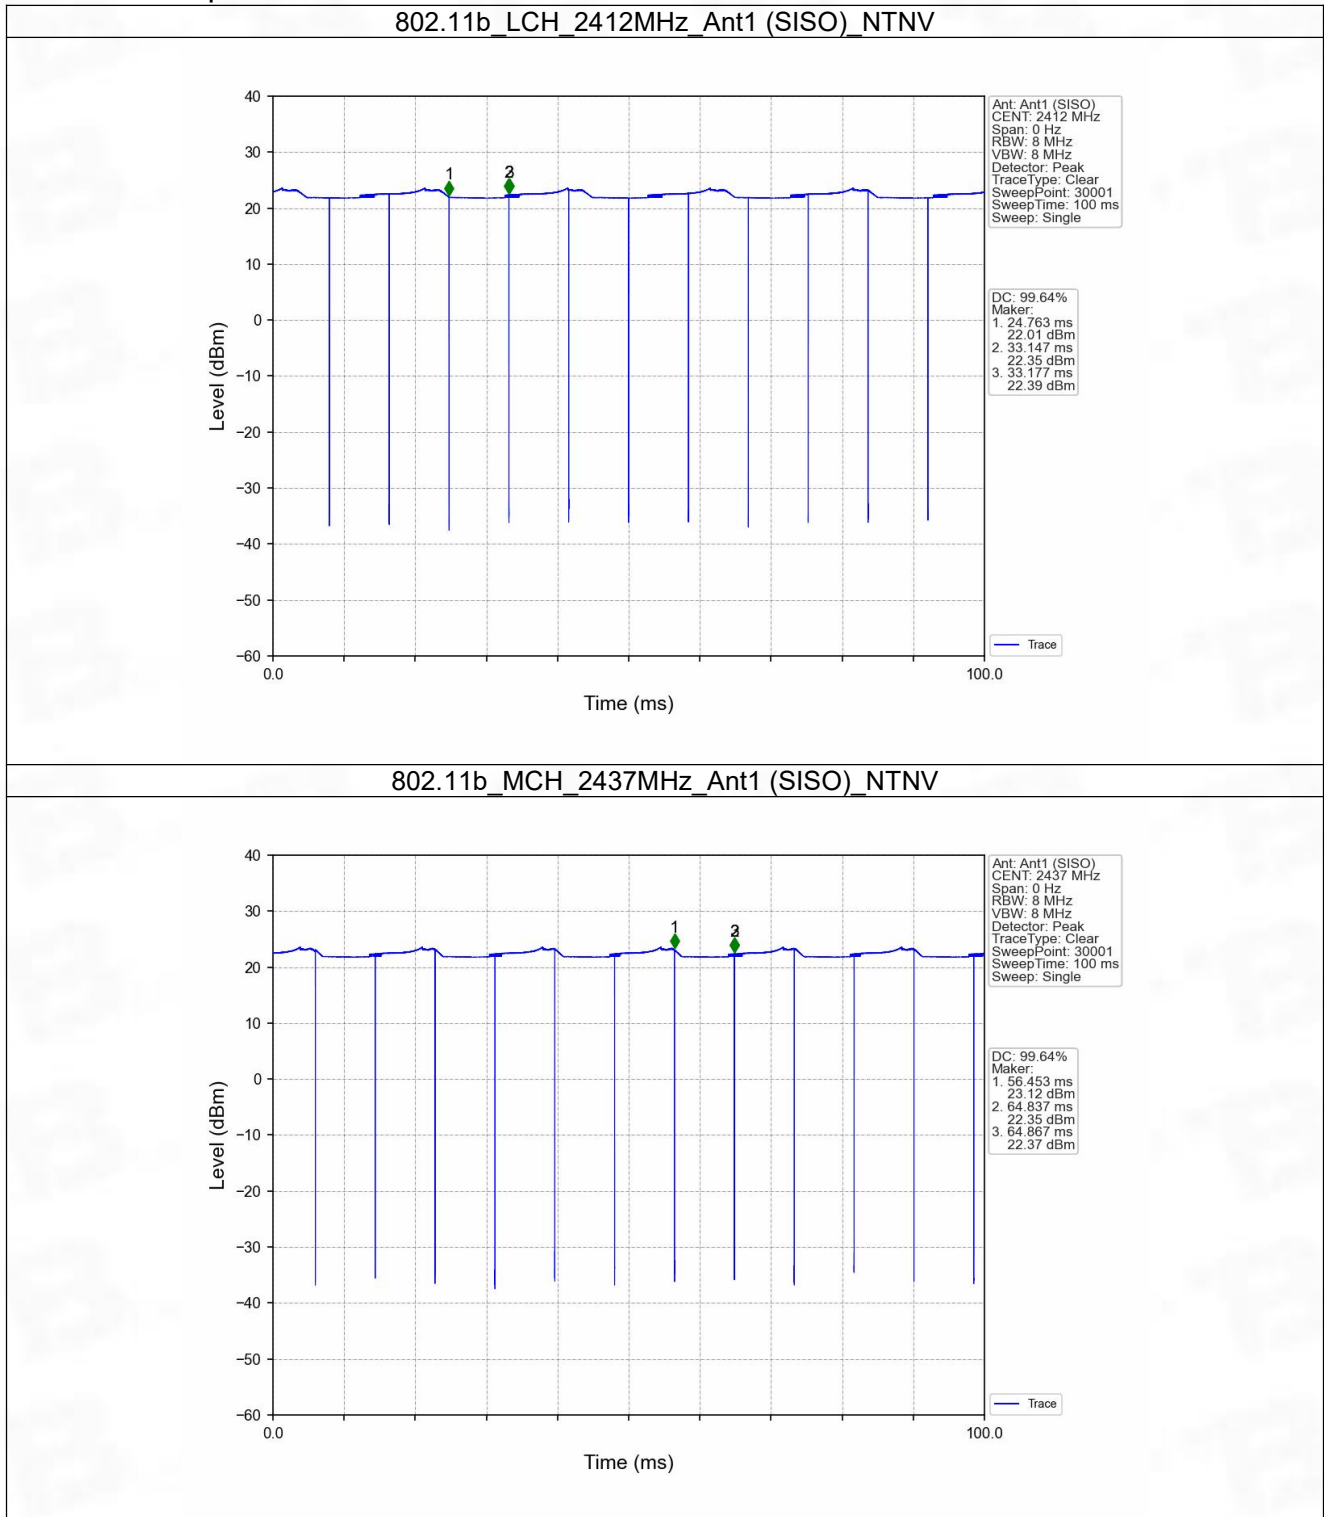


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

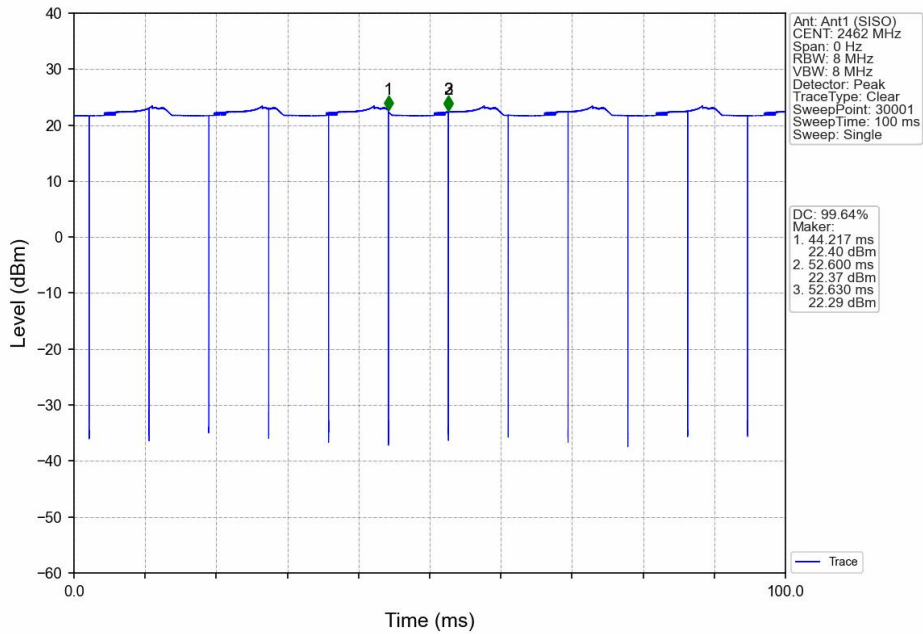


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV


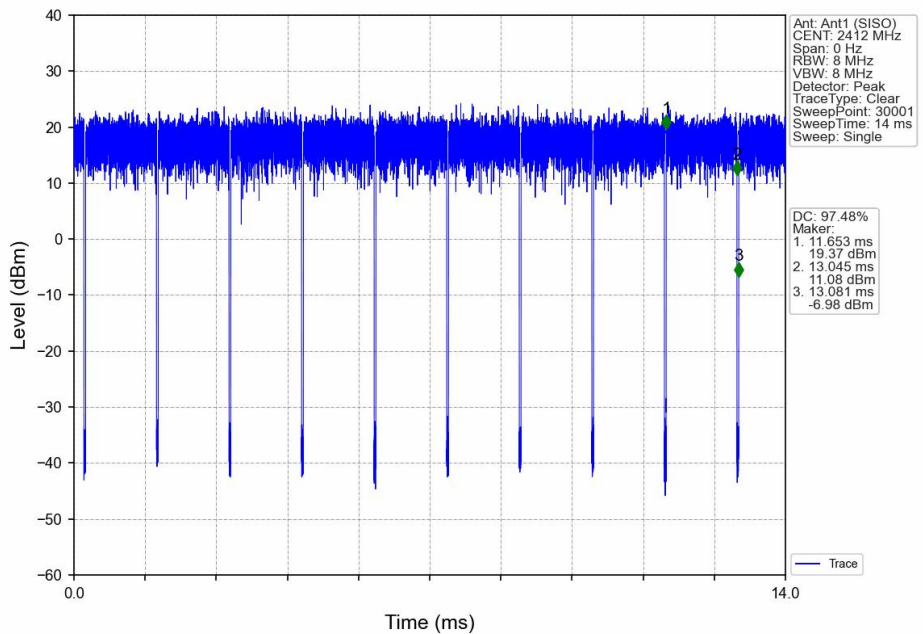


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

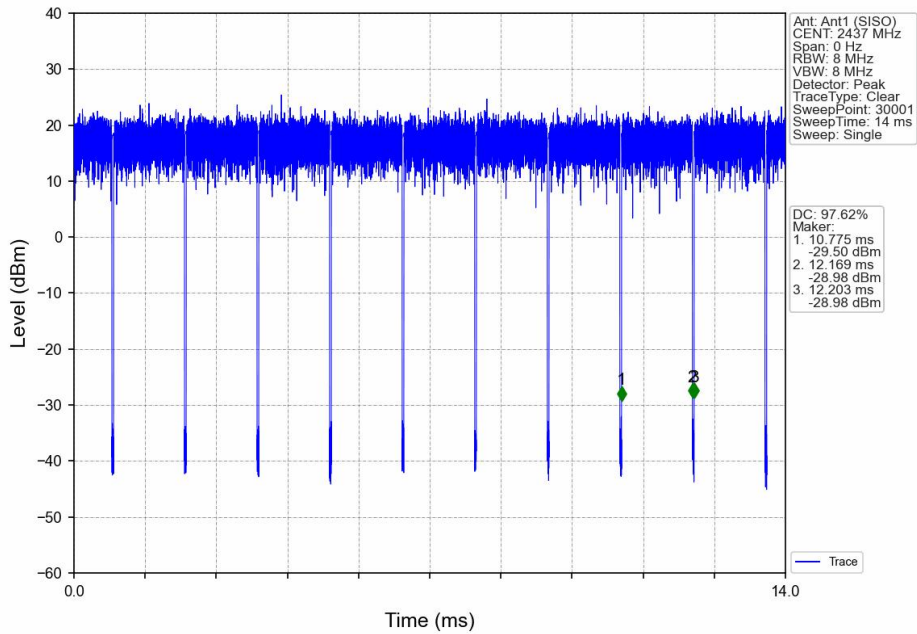


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

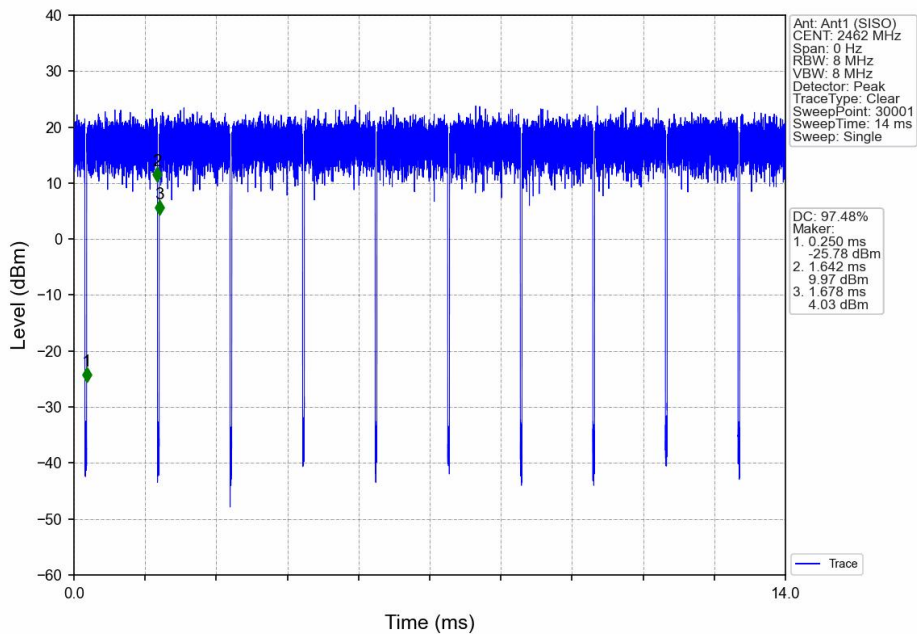


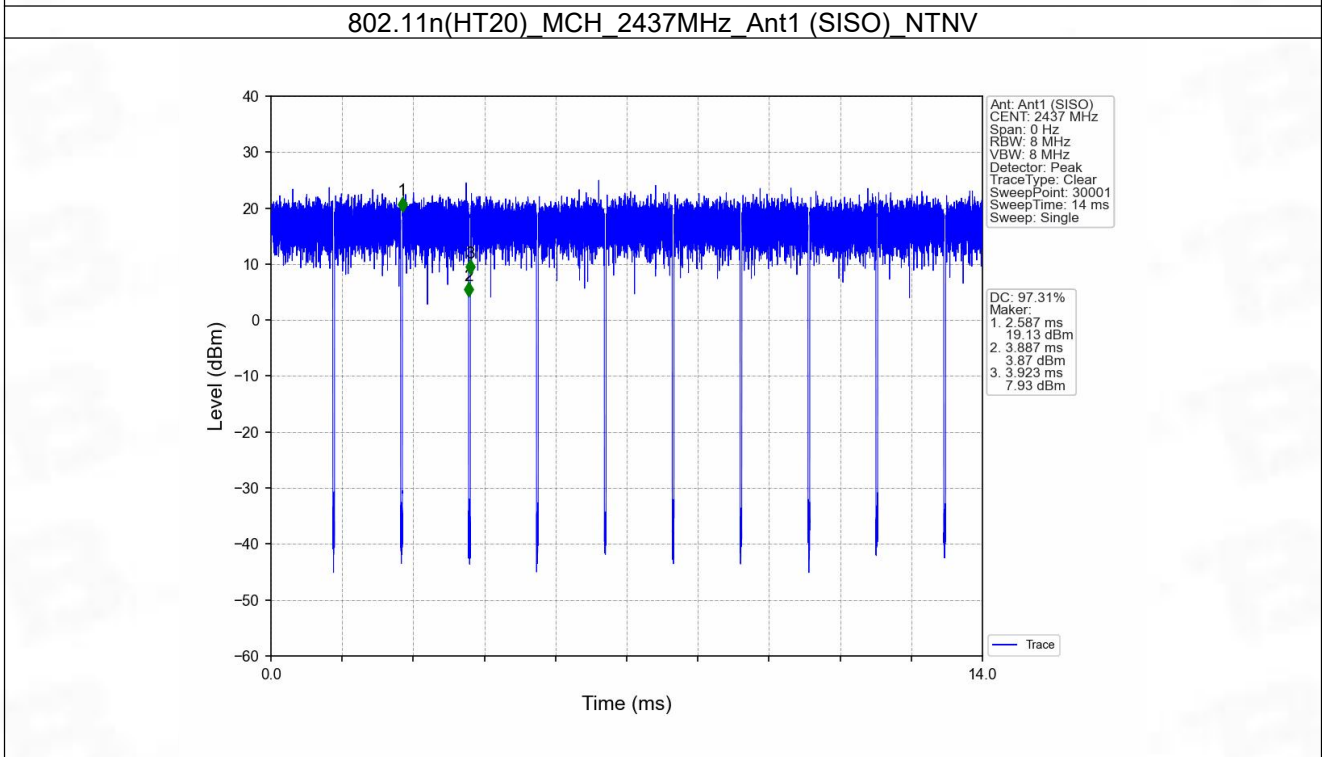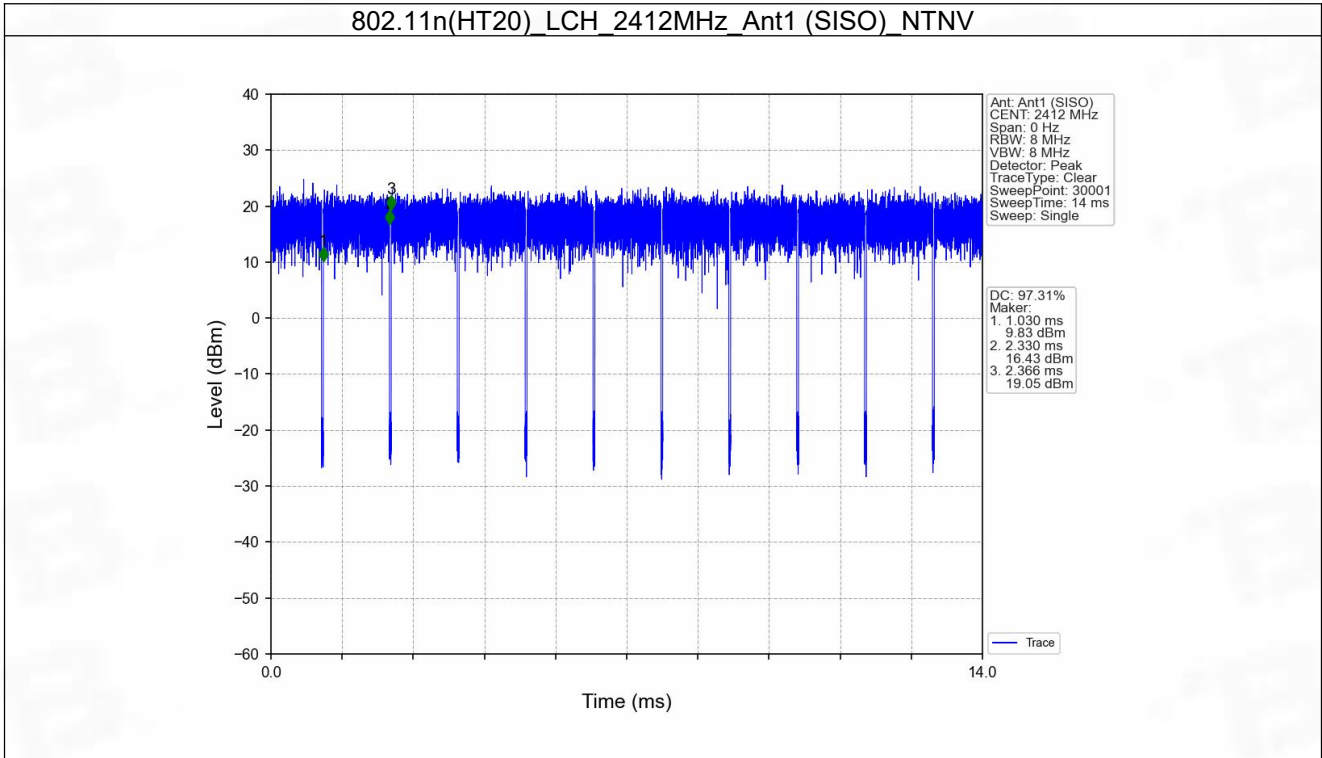


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

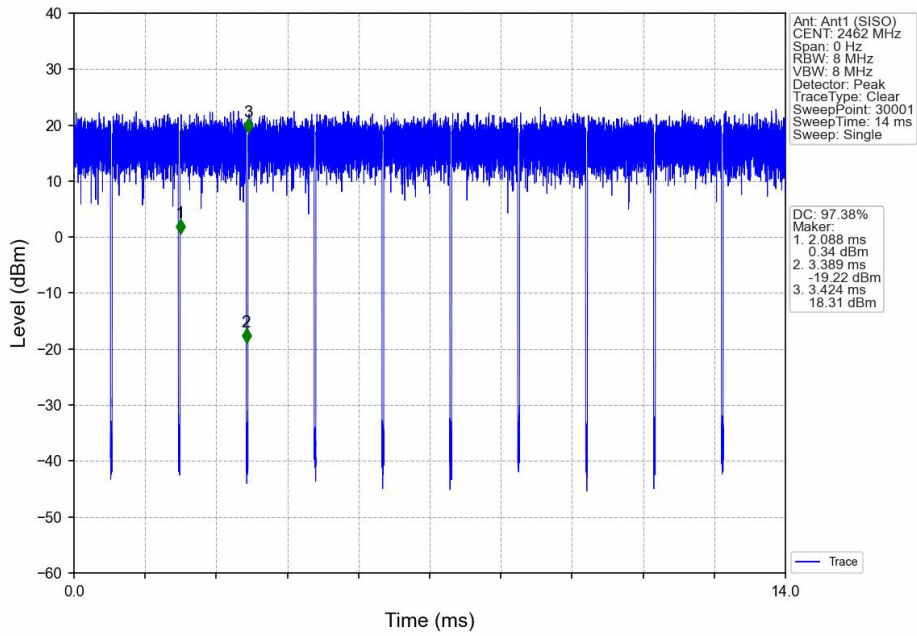


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

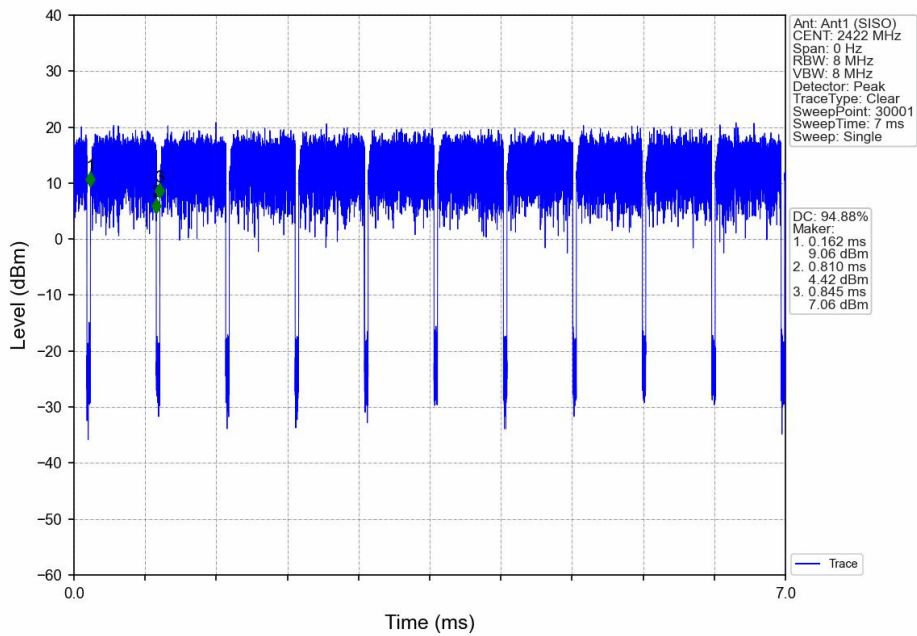

802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

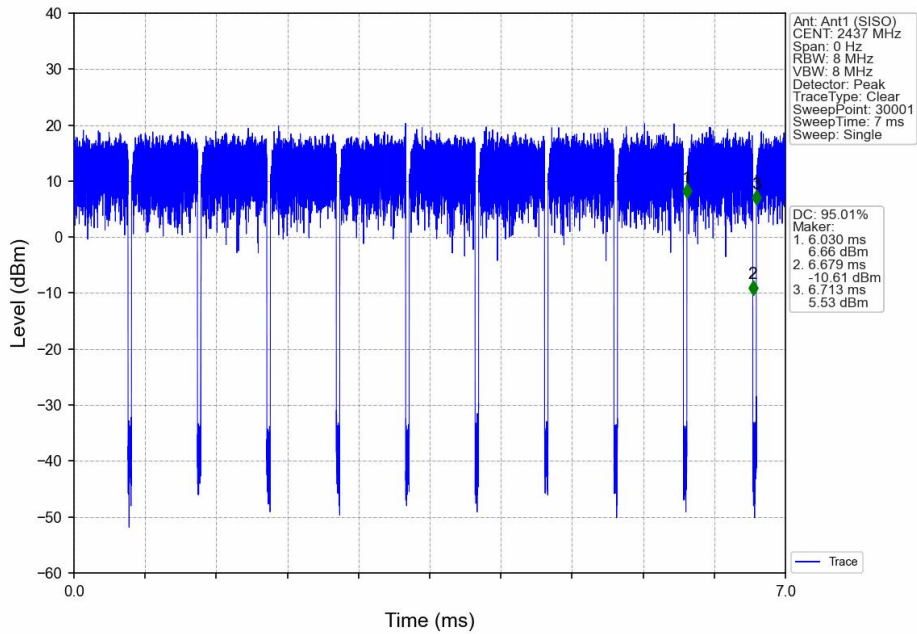

802.11n(HT40) HCH_2452MHz_Ant1 (SISO) NTN

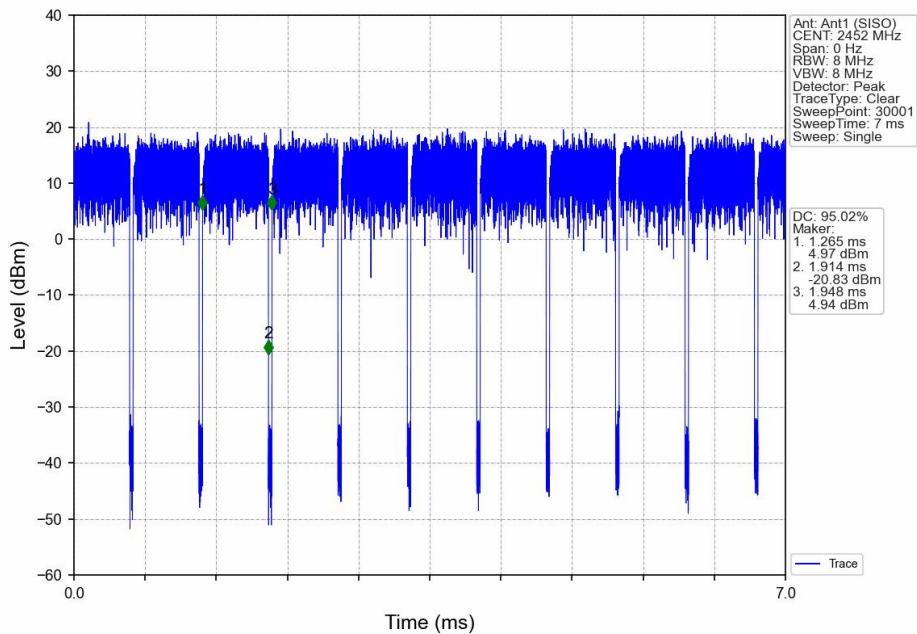


2. Bandwidth

2.1 OBW


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
802.11b	SISO	2412	1	13.010	Pass
		2437	1	12.974	Pass
		2462	1	12.948	Pass
802.11g	SISO	2412	1	17.505	Pass
		2437	1	17.534	Pass
		2462	1	17.602	Pass
802.11n (HT20)	SISO	2412	1	18.433	Pass
		2437	1	18.413	Pass
		2462	1	18.439	Pass
802.11n (HT40)	SISO	2422	1	36.870	Pass
		2437	1	36.858	Pass
		2452	1	36.838	Pass


2.1.2 Test Graph

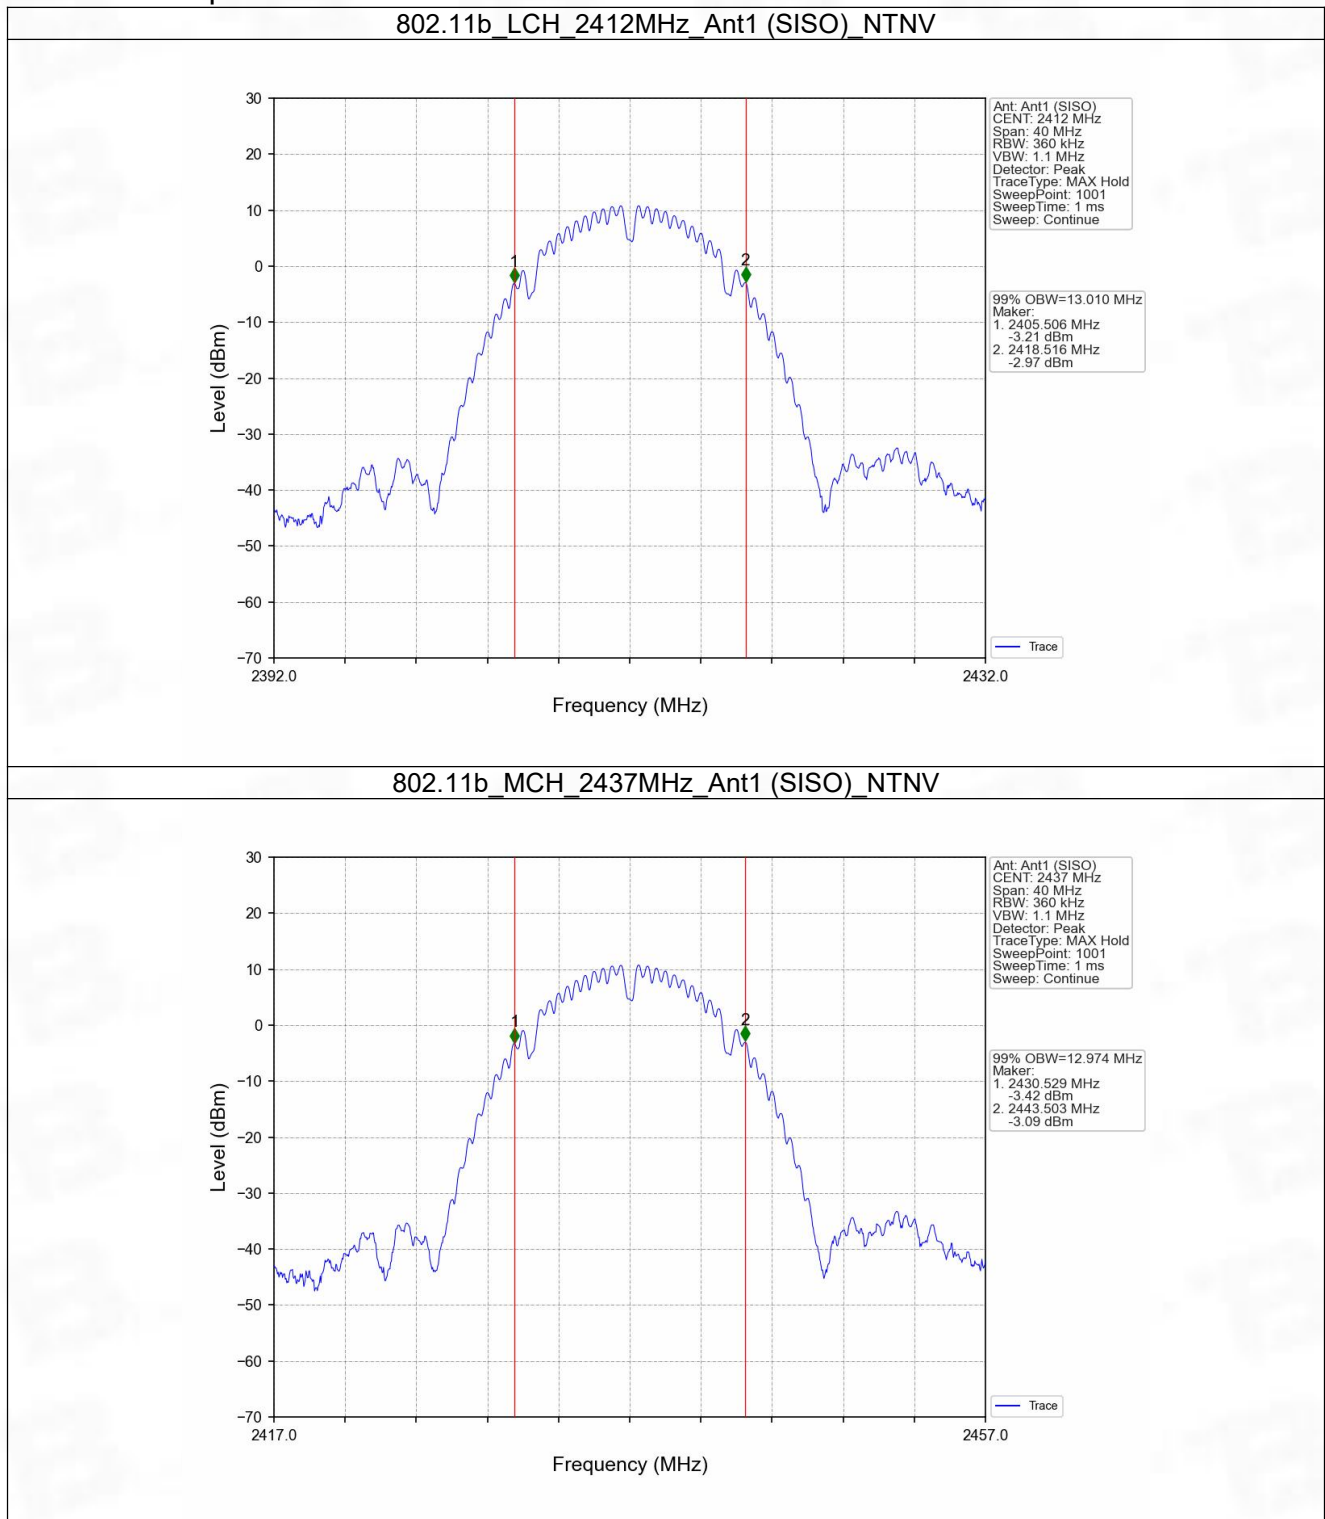


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

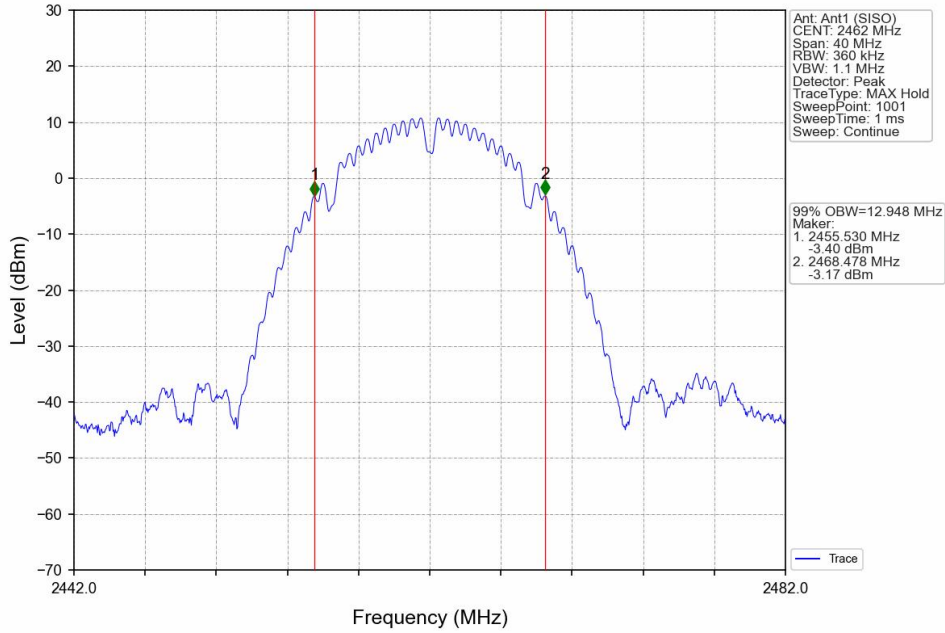


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV


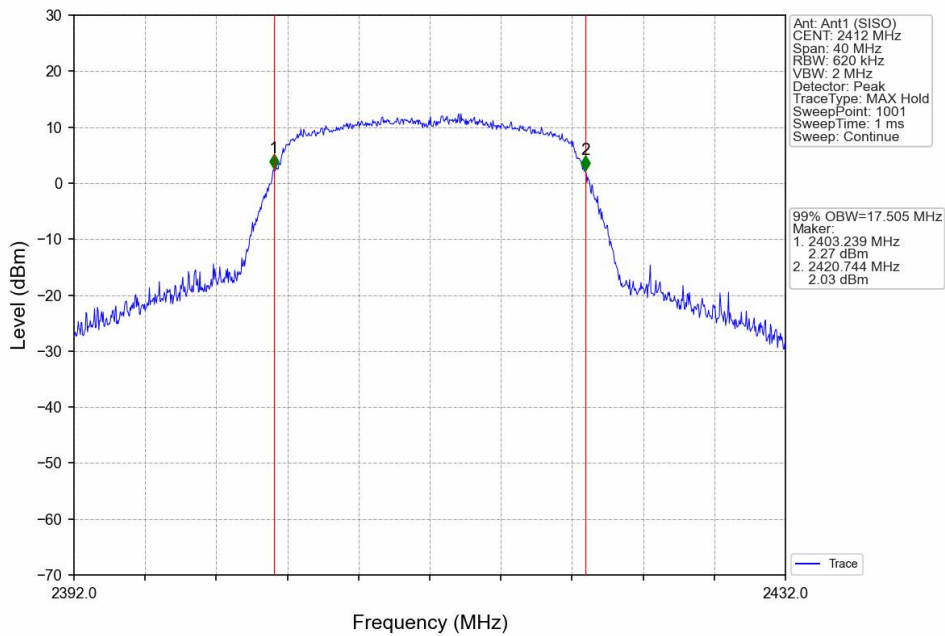




802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV


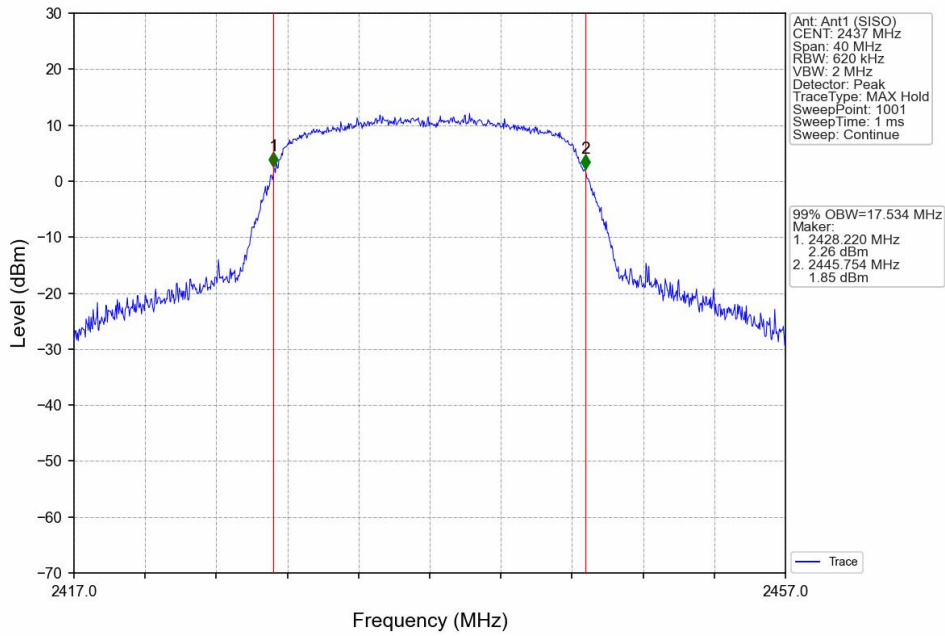


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

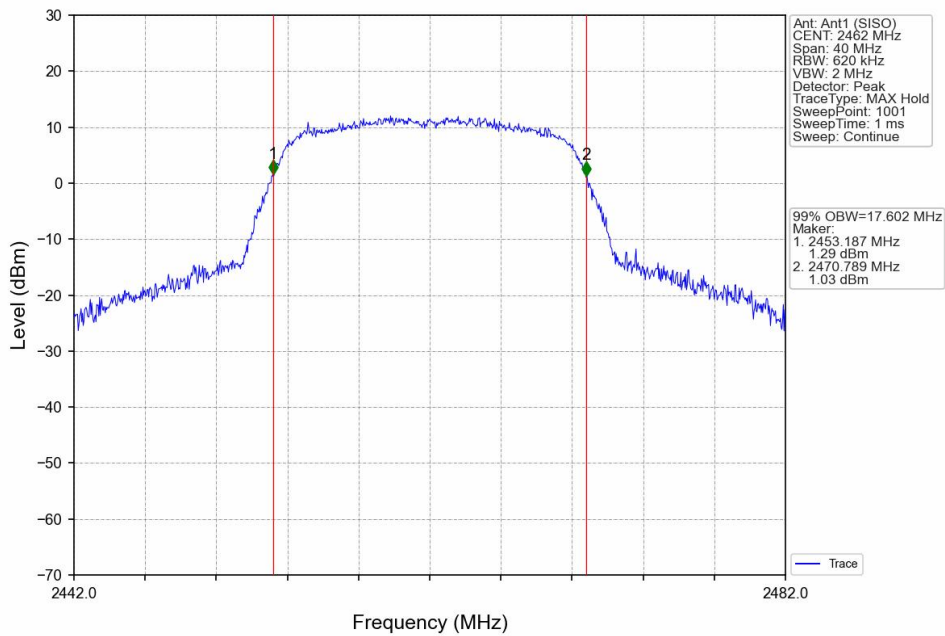

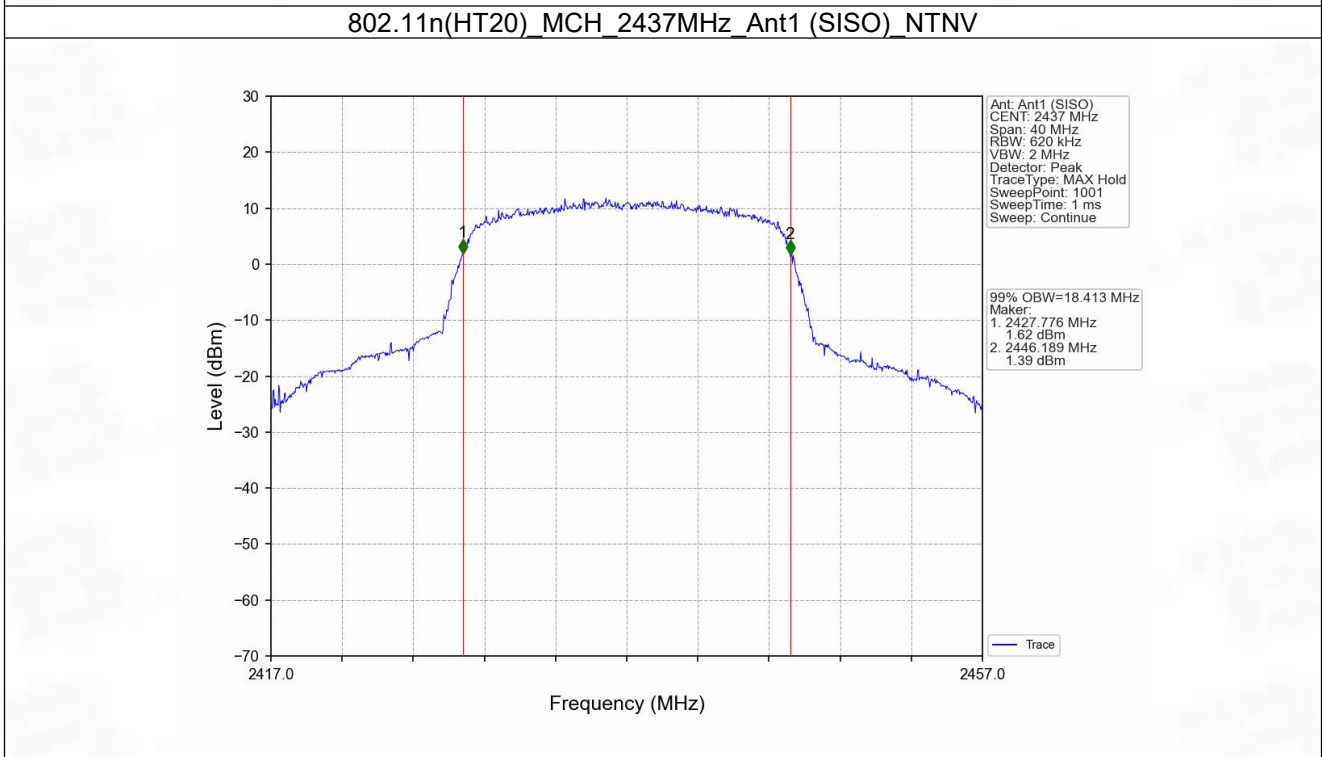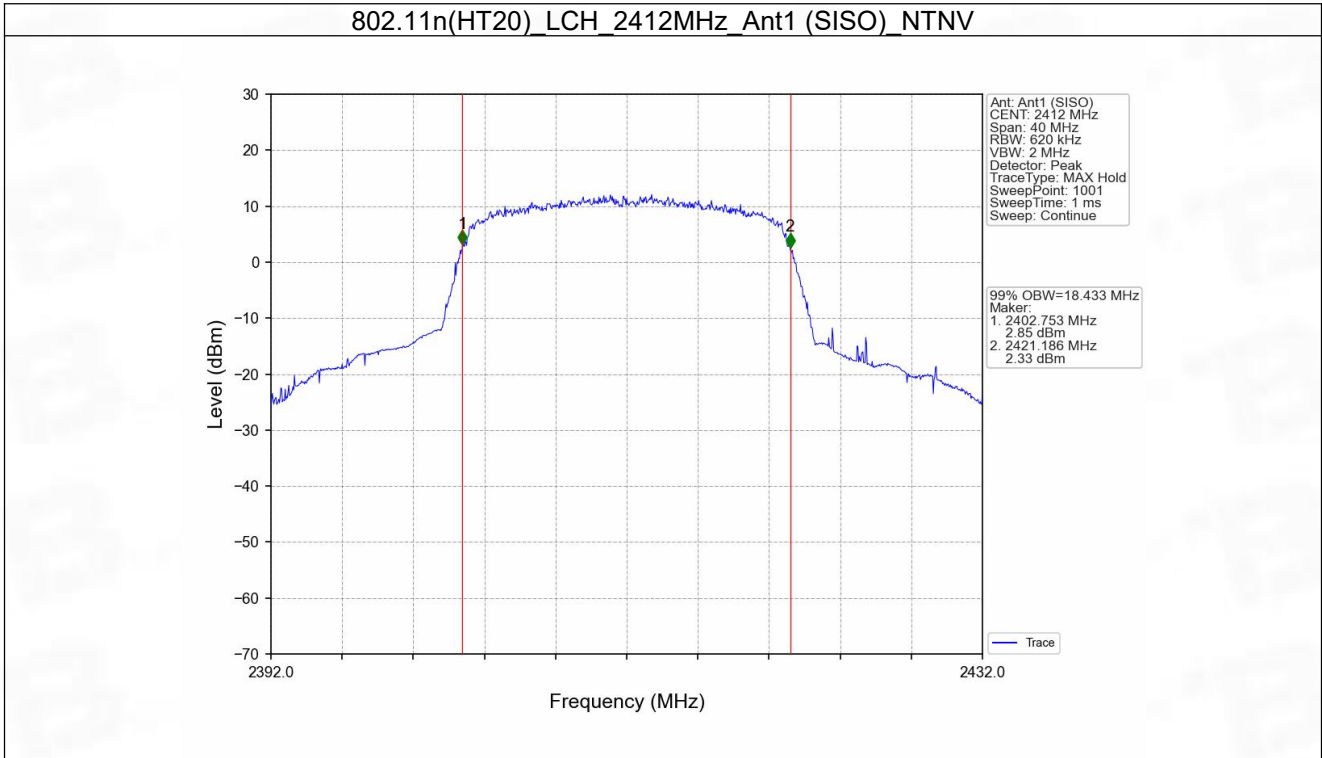

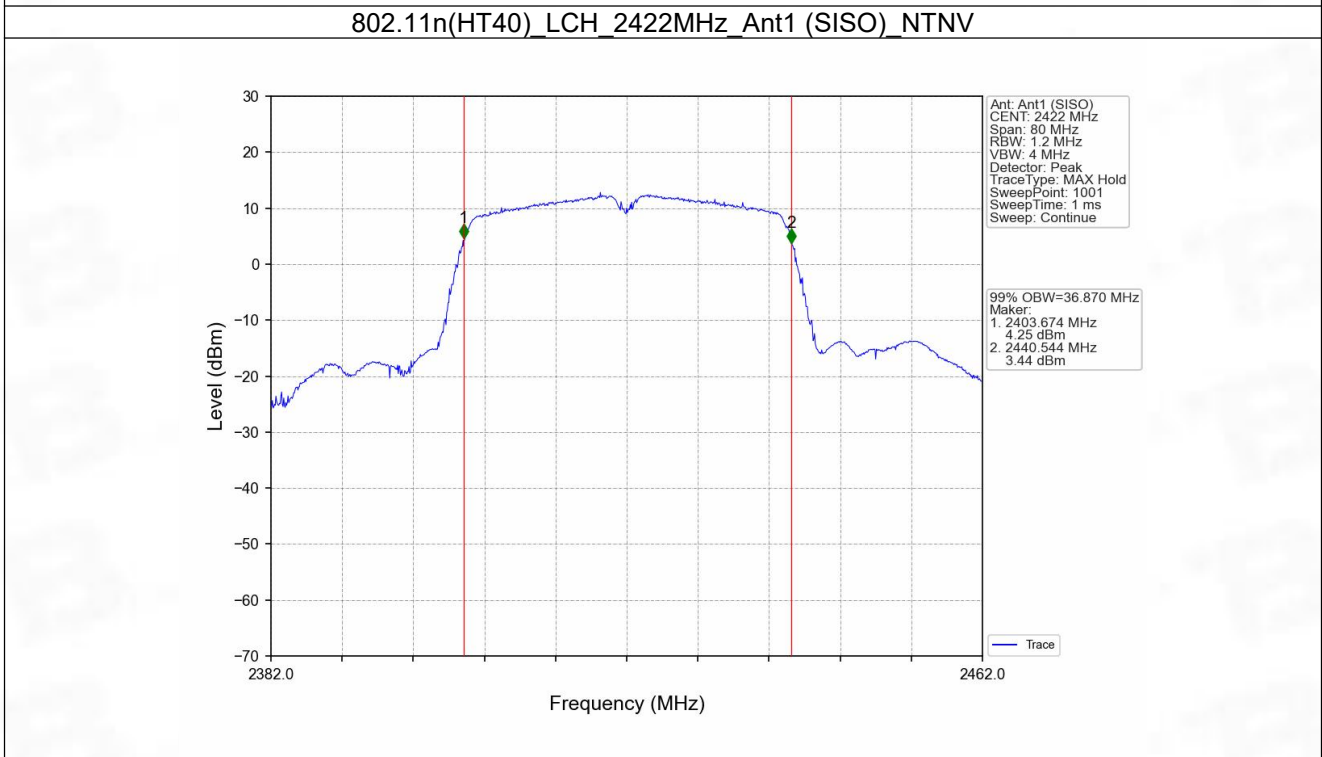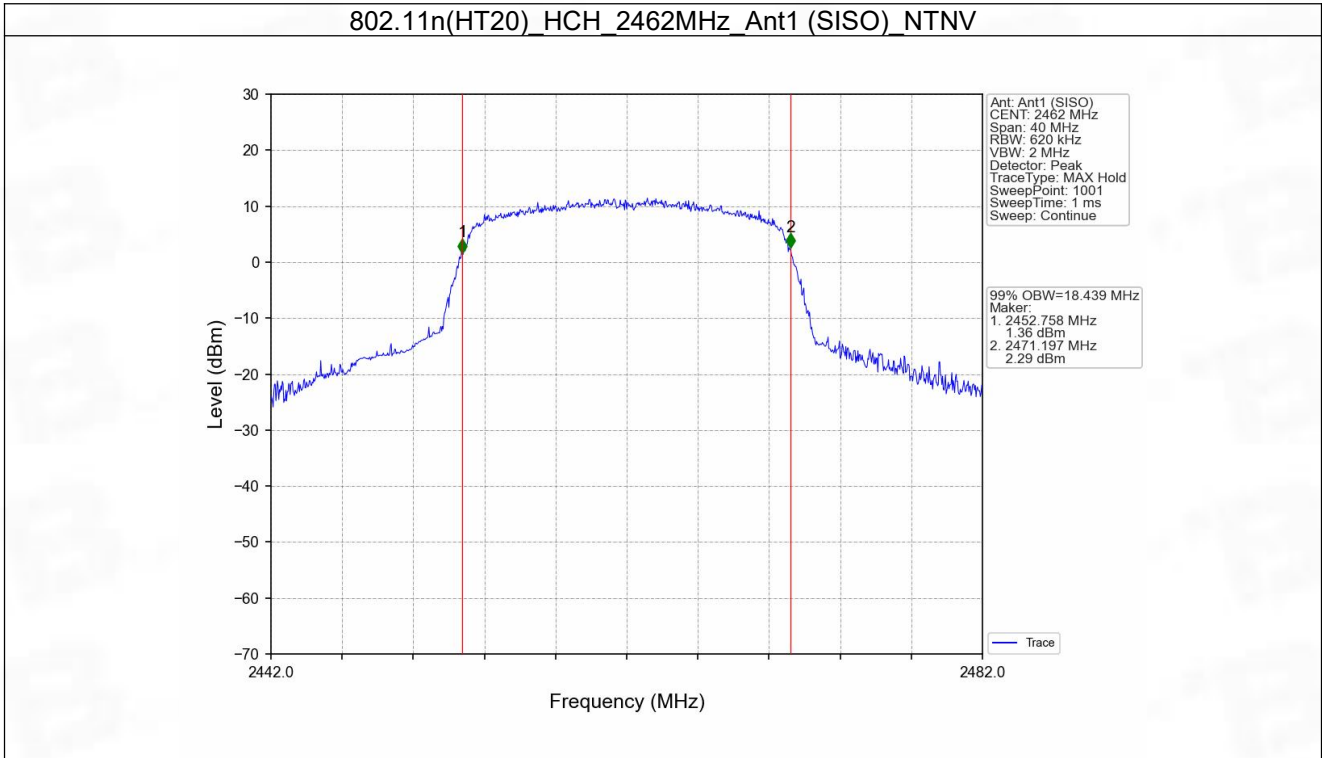

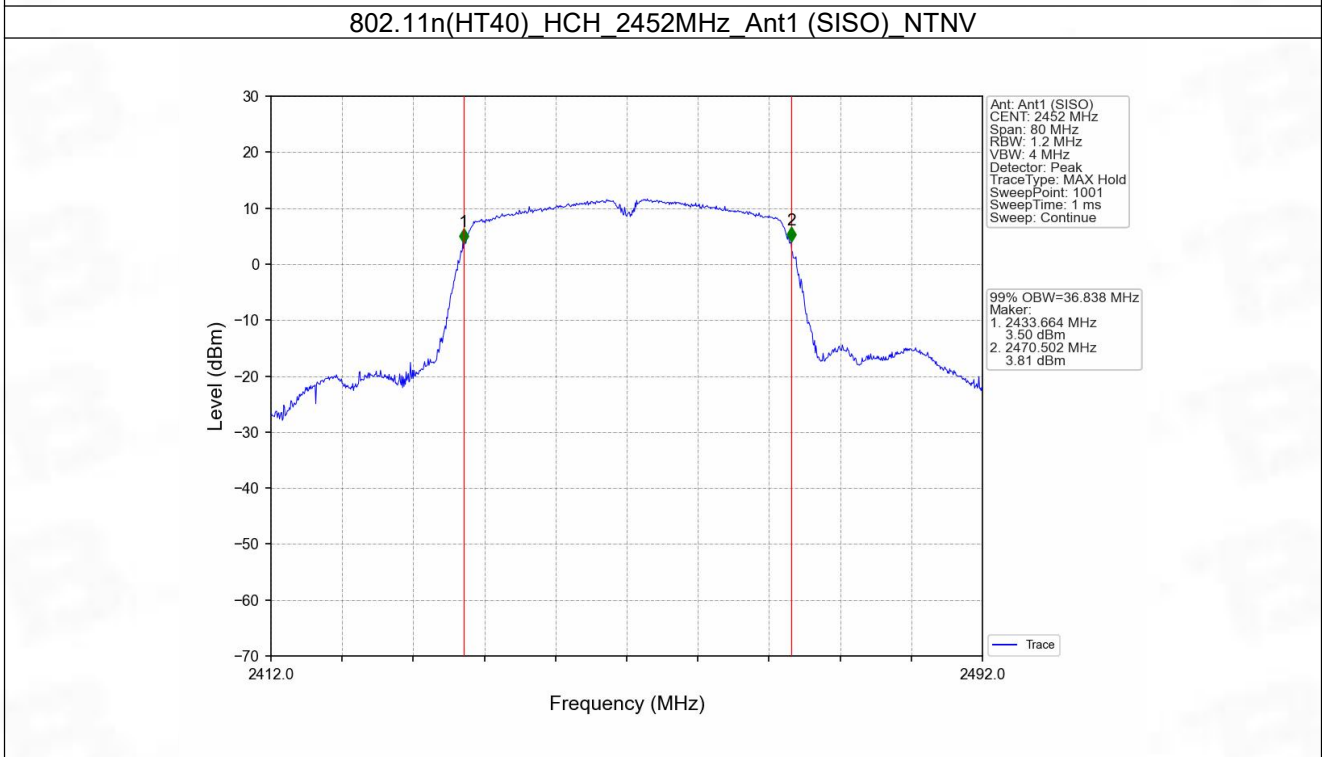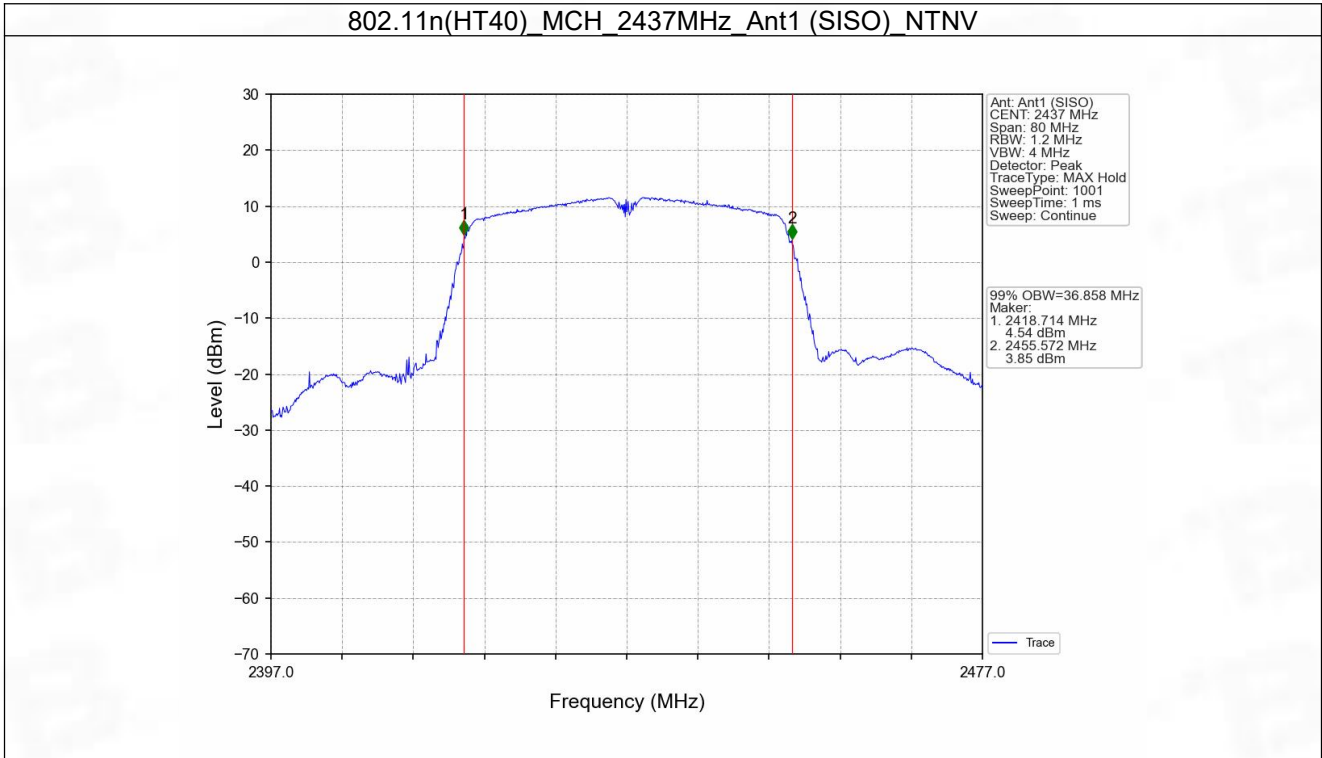

2.2 6dB BW

2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11b	SISO	2412	1	8.099	≥ 0.5	Pass
		2437	1	8.079	≥ 0.5	Pass
		2462	1	8.087	≥ 0.5	Pass
802.11g	SISO	2412	1	15.172	≥ 0.5	Pass
		2437	1	15.174	≥ 0.5	Pass
		2462	1	15.176	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	1	15.179	≥ 0.5	Pass
		2437	1	15.167	≥ 0.5	Pass
		2462	1	15.170	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	1	35.166	≥ 0.5	Pass
		2437	1	35.156	≥ 0.5	Pass
		2452	1	35.168	≥ 0.5	Pass

2.2.2 Test Graph

