

# FCC Co-Location Test Report

**FCC ID** : 2AYRA-03749  
**Equipment** : AX4200 WiFi 6 Mesh Router  
**Model No.** : MX4200 V2  
(Refer to item 1.1.1 for more details)  
**Brand Name** : LINKSYS  
**Applicant** : Linksys USA, Inc.  
**Address** : 121 Theory, Irvine, CA 92617, USA  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Mar. 09, 2022  
**Tested Date** : Mar. 19 ~ Apr. 07, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager

---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	7
1.3	Test Standards .....	8
1.4	Reference Guidance .....	8
1.5	Deviation from Test Standard and Measurement Procedure.....	8
1.6	Measurement Uncertainty .....	8
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>9</b>
2.1	Testing Facility .....	9
2.2	The Worst Test Modes and Channel Details .....	9
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>10</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	10
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>13</b>

### APPENDIX A. UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS

---

## Release Record

Report No.	Version	Description	Issued Date
FR230904CO	Rev. 01	Initial issue	May 11, 2022

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 45.78MHz 36.90 (Margin -3.10dB) - QP	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
LINKSYS	MX4200 V2	AX4200 WiFi 6 Mesh Router	For Marketing purpose
	MX4050 V2		
	MX4000 V2		
	MX4200C V2		
	SPNMX42		
<ul style="list-style-type: none"> <li>✦ All models are electrically identical, different model names are for marketing purpose.</li> <li>✦ The above models, model <b>MX4200 V2</b> was selected as a representative one for the final test and only its data was recorded in this report.</li> </ul>			

### 1.1.2 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 ~ 5825 MHz
Modulation Type	802.11b: DBPSK / DQPSK / CCK 802.11a/g/n/ac/ax: BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)
BT	
Operating Frequency	2402 MHz ~ 2480 MHz
Modulation Type	Bluetooth 5.0 LE: GFSK

### 1.1.3 Antenna Details

For WLAN

Ant. No.	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
			2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	Dipole	UFL	2.45	4	4.07	--	--
2	Dipole	UFL	2.45	4	4.07	--	--
3	Monopole	UFL	--	--	--	5.01	5.13
4	Monopole	UFL	--	--	--	5.12	5.09
5	Monopole	UFL	--	--	--	5.2	5.65
6	Monopole	UFL	--	--	--	5.2	5.65

---

For BT

Ant. No.	Type	Connector	Gain (dBi)
1	PIFA	No	5.3

#### 1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12Vdc from adapter
-------------------	--------------------

## 1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Mar. 19 ~ Apr. 07, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101063	Apr. 19, 2021	Apr. 18, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Mar. 24, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_DTS	V5.10	NA	NA

Note: Calibration Interval of instruments listed above is one year.

### 1.3 Test Standards

47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
ANSI C63.10-2013

### 1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
FCC KDB 412172 D01 Determining ERP and EIRP v01r01  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### 1.5 Deviation from Test Standard and Measurement Procedure

None

### 1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	$\pm 3.41$ dB
Unwanted Emission $>$ 1GHz	$\pm 4.59$ dB



## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions	11B CH06 + 11A CH40 + 11AX40 CH151 + BLE 1M CH0
Conducted Emissions	
<b>NOTE:</b> The selected channel is the maximum power channel of Wi-Fi & BT mode.	

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup


#### Radiated Emissions below 1 GHz

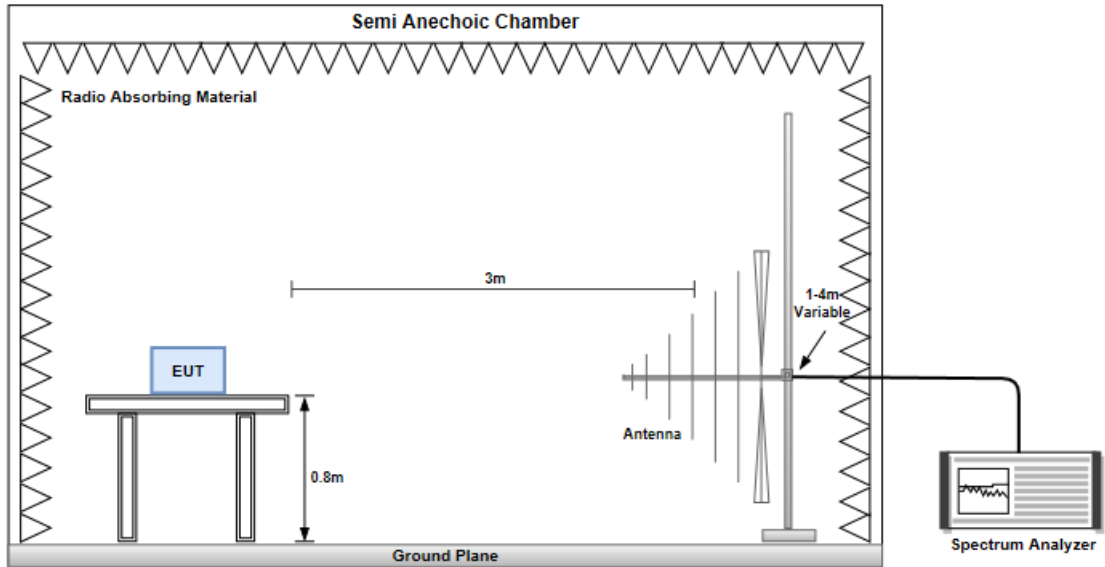

#### Radiated Emissions above 1 GHz

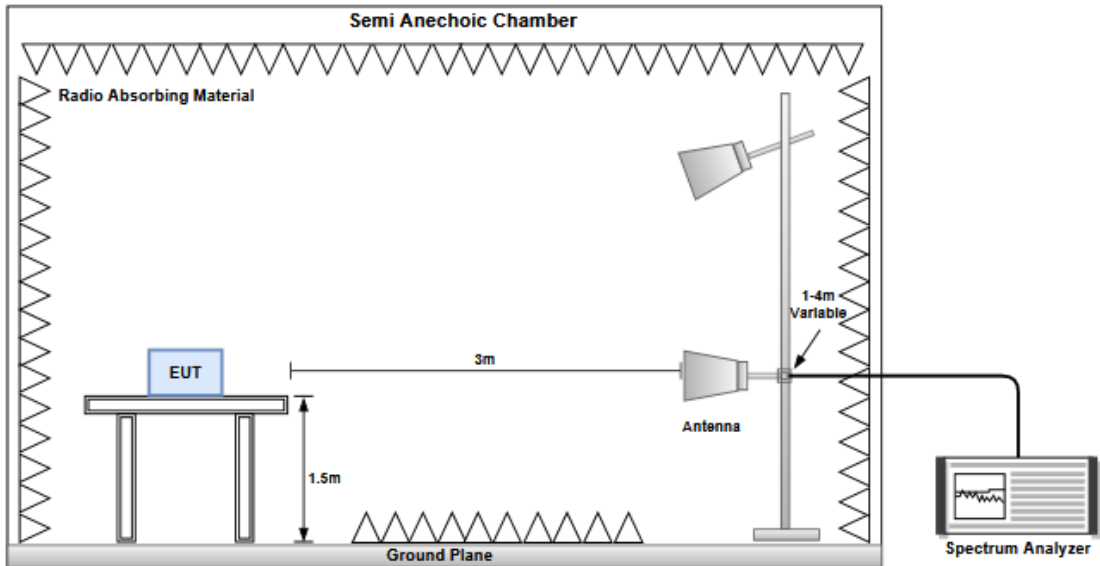

#### Transmitter Conducted Unwanted Emissions (30MHz~40GHz)



### **3.1.4 Test Results**

Refer to Appendix A.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==



Emission Below 1GHz

Test Mode	11B CH06 + 11A CH40 + 11AX40 CH151 + BLE 1M CH0								
Polarization	Horizontal								
Test By	:Roger Lu		Temperature(°C):	24		Humidity(%):	65		

The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the CLASS-B emission limit, which is constant at 40 dBuV/m until approximately 100 MHz, then steps up to 45 dBuV/m at 200 MHz, and finally to 55 dBuV/m at 950 MHz. Six specific peaks are identified with blue vertical lines and numbered 1 through 6. Peak 1 is at 95.96 MHz (31.38 dBuV/m), peak 2 at 124.09 MHz (37.29 dBuV/m), peak 3 at 207.51 MHz (31.99 dBuV/m), peak 4 at 360.77 MHz (34.56 dBuV/m), peak 5 at 480.08 MHz (41.94 dBuV/m), and peak 6 at 625.58 MHz (34.16 dBuV/m). All peaks are well below the CLASS-B limit.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	95.96	31.38	43.50	-12.12	45.56	-14.18	Peak	---	---
2	124.09	37.29	43.50	-6.21	47.58	-10.29	Peak	---	---
3	207.51	31.99	43.50	-11.51	43.95	-11.96	Peak	---	---
4	360.77	34.56	46.00	-11.44	41.20	-6.64	Peak	---	---
5	480.08	41.94	46.00	-4.06	45.69	-3.75	Peak	---	---
6	625.58	34.16	46.00	-11.84	34.61	-0.45	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Test Mode</b>	11B CH06 + 11A CH40 + 11AX40 CH151 + BLE 1M CH0									
<b>Polarization</b>	Vertical									
Test By : Roger Lu			Temperature(°C): 24			Humidity(%): 65				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B limit. Six peaks are identified with blue vertical lines and numbered 1 through 6. Peak 1 is at 45.78 MHz, peak 2 at 124.09 MHz, peak 3 at 249.22 MHz, peak 4 at 360.77 MHz, peak 5 at 480.08 MHz, and peak 6 at 955.38 MHz.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
								cm	deg	
	1	45.78	36.90	40.00	-3.10	45.45	-8.55	QP	100	
	2	124.09	29.70	43.50	-13.80	39.99	-10.29	Peak	---	
	3	249.22	28.61	46.00	-17.39	38.69	-10.08	Peak	---	
	4	360.77	32.27	46.00	-13.73	38.91	-6.64	Peak	---	
	5	480.08	40.03	46.00	-5.97	43.78	-3.75	Peak	---	
	6	955.38	37.45	46.00	-8.55	33.02	4.43	Peak	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Emission Above 1GHz

Test Mode	11B CH06 + 11A CH40 + 11AX40 CH151 + BLE 1M CH0								
Polarization	Horizontal								
Test By	:Roger Lu		Temperature(°C)	:23		Humidity(%)	:67		

The graph displays the emission level in dBuV/m against frequency in MHz. Two horizontal red lines represent the limits for CLASS-B (at approximately 74 dBuV/m) and CLASS-B (AVG) (at approximately 54 dBuV/m). Several peaks are identified with blue vertical lines and numbered 2, 4, 5, and 6. Peak 2 is at 2367 MHz, peak 4 is at 3318 MHz, peak 5 is at 7637 MHz, and peak 6 is at 7637 MHz. The emission levels for these peaks are 59.40, 41.75, 37.89, and 50.38 dBuV/m respectively.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2367.00	47.15	54.00	-6.85	49.84	-2.69	Average	368	6
2	2367.00	59.40	74.00	-14.60	62.09	-2.69	Peak	368	6
3	3318.00	28.74	54.00	-25.26	29.45	-0.71	Average	100	80
4	3318.00	41.75	74.00	-32.25	42.46	-0.71	Peak	100	80
5	7637.00	37.89	54.00	-16.11	29.10	8.79	Average	100	60
6	7637.00	50.38	74.00	-23.62	41.59	8.79	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).






<b>Test Mode</b>	11B CH06 + 11A CH40 + 11AX40 CH151 + BLE 1M CH0									
<b>Polarization</b>	Vertical									
Test By : Roger Lu			Temperature(°C): 23			Humidity(%): 67				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	2367.00	48.56	54.00	-5.44	51.25	-2.69	Average	339	278	
2	2367.00	61.06	74.00	-12.94	63.75	-2.69	Peak	339	278	
3	3318.00	28.84	54.00	-25.16	29.55	-0.71	Average	100	70	
4	3318.00	41.93	74.00	-32.07	42.64	-0.71	Peak	100	70	
5	7637.00	37.66	54.00	-16.34	28.87	8.79	Average	100	55	
6	7637.00	50.21	74.00	-23.79	41.42	8.79	Peak	100	55	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										



Conducted Emissions (30MHz~40GHz)

Ambient Condition	20°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Conducted Emission Plots of Antenna port 0

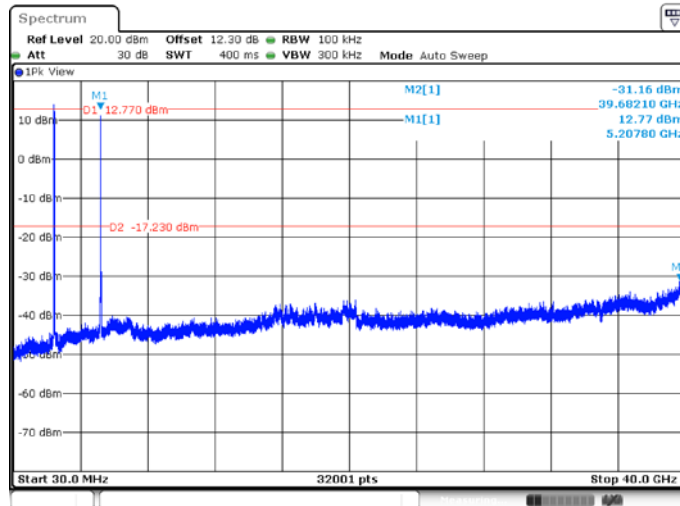

Conducted Emission Plots of Antenna port 1

