FCC Test Report

Report No.: AGC01741230301FE10A

FCC ID	:	2AYT3-AC180
APPLICATION PURPOSE	:	Class II Permissive Change
PRODUCT DESIGNATION	:	Portable Power Station
BRAND NAME	:	BLUETTI
MODEL NAME	:	AC180
APPLICANT	:	SHENZHEN POWEROAK NEWENER CO., LTD
DATE OF ISSUE	:	Oct. 19, 2023
STANDARD(S)	:	FCC Part 15 Subpart C
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 19, 2023	Valid	Initial Release

Note: The original test report AGC01741230301FE10 (dated Jul. 05, 2023 and tested from Mar. 07, 2023 to Apr. 21, 2023) was modified on Oct. 19, 2023 to include the following changes and additions for:

-Hardware Version change from AC180_U2 V3.0 to AC180_U2 V6.0

-The A3 motherboard has replaced the plug-in differential mode inductor (the inductance has been changed from 520uH Min to 1.3mH Min)

-The A3 motherboard replaced Y1 capacitor (100pF/400Vac changed to 2.2nF/400Vac)

-Add a grounding wire to the A3 motherboard

-Solution for replacing USB-C with U2 motherboard (changed from SC9711QDMR to SC8002QDKR+SC2151AQDER)

-M1 motherboard adds magnetic rings and beads for optimization

-The M1 motherboard has added a cement resistor (47 Ω), a SMD common mode inductance (700 Ω @ 100MHz), a SMD N-MOS transistor (NCE6003M, 60V/3A, SOT-89), and a SMD magnetic bead (600 Ω)

-The battery motherboard has added an insulation strip for connecting the metal plate mounting bracket, providing insulation effect

For above described change(s), Updated Radiated Emission and Line Conducted Emission Test.

Table of Contents

1. General Information

Applicant	SHENZHEN POWEROAK NEWENER CO., LTD
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China
Manufacturer	SHENZHEN POWEROAK NEWENER CO., LTD
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China
Factory	Huizhou PowerOak Innovation Co., Ltd
Address	（No.1 Workshop）Longsheng 5th Road, Laoshe Village, Dayawan West Zone, Huizhou, Guangdong, China
Product Designation	Portable Power Station
Brand Name	BLUETTI
Test Model	AC180
Date of receipt of test item	Sep. 28, 2023
Date of Test	Sep. 28, 2023 to Oct. 19, 2023
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER -FCC-WPT-V1

The test results of this report relate only to the tested sample identified in this report.

Prepared By	Alan Duan (Project Engineer)	Oct. 19, 2023
Reviewed By	Calvin Liu (Reviewer)	Oct. 19, 2023
Approved By	Max Zhang Authorized Officer	Oct. 19, 2023

2. Product Information

2.1 Product Technical Description

Hardware Version	AC180_U2 V6.0
Software Version	V2071
Frequency Band	110.5KHz-205KHz
Operation Frequency	130KHz
Modulation Type	ASF/FSK
Number of channels	1
Field Strength of Fundamental	63.36 dBuV/m (Max)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Input Rating	➢ AC: 120V~50/60Hz, 15A Max. ➢ DC/PV: 12V-60V⎓10A, 500W Max.
Output Rating	➢ AC: 120V~50/60Hz, 1800W/1800VA Max. ➢ USB-A: 5V⎓3A, 15W Total x2 ➢ USB-C: 5/9/12/15/20V⎓3A; 20V⎓5A(E-Marker chip built-in) ➢ Wireless Charge: 5/7.5/10/15W ➢ Cigarette Lighter Socket: 12V⎓10A ➢ AC and DC output: 1800W Total

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency
110.5KHz-205KHz	01	130KHz

2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AYT3-AC180,** filing to comply with Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:
The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0 dBi.

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to FOLLOW CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	U_c = ±2.9 dB
Uncertainty of Radiated Emission below 150kHz	U_c = ±4.2 dB
Uncertainty of Radiated Emission below 30MHz	U_c = ±3.9 dB
Uncertainty of Radiated Emission below 1GHz	U_c = ±4.9 dB
Uncertainty of Occupied Channel Bandwidth	U_c = ±0.8 dB

3.5 List of Equipment Used

● RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31
☒	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A

● Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17
☐	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31
☒	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11
☒	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
☒	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22
☒	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2021-10-31	2023-10-30
☒	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
☒	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31
☒	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08
☐	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08

● AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023/06/03	2024/06/02
☒	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08
☒	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023/06/03	2024/06/02

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71
☒	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A
☐	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0

4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

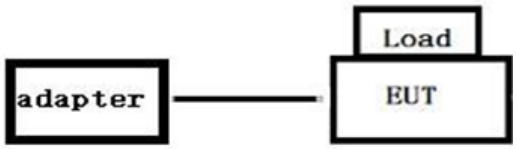

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☒ Test Accessories Come From The Laboratory

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	wireless charging load	N/A	Huawei	Support 5W,7.5W,10W,15W	--

4.5 Summary of Test Results

Item	FCC Rules	Description Of Test	Result
1	§15.209(a)(f)	Radiated Spurious Emission	Pass
2	§15.207	AC Power Line Conducted Emission	Pass

5. Description of Test Modes

Summary table of Test Cases	
Test Item	Equipment type / Modulation
	WPT_ ASK
Radiated&Conducted Test Cases	Mode 1: AC/DC Adapter + EUT + Wireless load (Full Load) Mode 2: AC/DC Adapter + EUT + Wireless load (Half Load) Mode 3: AC/DC Adapter + EUT + Wireless load (Null Load) Mode 4: AC/DC Adapter + EUT (Null Load)
AC Conducted Emission	Mode 1: AC/DC Adapter + EUT + Wireless load (Full Load) Mode 2: AC/DC Adapter + EUT + Wireless load (Half Load) Mode 3: AC/DC Adapter + EUT + Wireless load (Null Load) Mode 4: AC/DC Adapter + EUT (Null Load)
Note: 1. Only the result of the worst case was recorded in the report, if no other cases. 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.	

6. Field Strength of Fundamental

6.1 Provisions Applicable

Test Requirement:	FCC Part15 C Section 15.209
Test Method:	ANSI C63.10:2013
Test Frequency Range:	9kHz to 1GHz
Test site:	Measurement Distance: 3m
Receiver setup:	See table below

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

Remark： (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance Is The Distance In Meters Between The Measuring Instrument, Antenna And The Closest Point Of Any Part Of The Device Or System.

6.2 Measurement Procedure

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where FS = Field Strength in dBμV/m
RA = Receiver Amplitude (including preamplifier) in dBμV
CF = Cable Attenuation Factor in dB
AF = Antenna Factor in dB/m
AG = Amplifier Gain in dB
AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF

where FS = Field Strength in dBμV/m
RR = RA - AG - AV in dBμV
LF = CF + AF in dB

Assume a receiver reading of 52.0 dBμV is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dBμV/m.
This value in dBμV/m was converted to its corresponding level in μV/m.

RA = 52.0 dBμV/m
AF = 7.4 dB/m RR = 18.0 dBμV
CF = 1.6 dB LF = 9.0 dB
AG = 29.0 dB
AV = 5.0 dB
FS = RR + LF
FS = 18 + 9 = 27 dBμV/m

Level in μV/m = Common Antilogarithm [(27 dBμV/m)/20] = 22.4 μV/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

H[dB(μA/m)] = V[dB(μV)] + LC [dB] - GPA [dB]+ AFH [dB(S/m)]

Where,
H is the magnetic field strength (to be compared with the limit),
V is the voltage level measured by the receiver or spectrum analyzer,
LC is the cable loss,
GPA is the gain of the preamplifier (if used), and
AFH is the magnetic antenna factor.

If the “electrical” antenna factor is used instead, the above equation becomes:

H[dB(μA/m)] =V[dB(μV)] + LC [dB] – GPA [dB] + AFE [dB(m-1)] - 51.5 [dBΩ]

where AFE is the “electric” antenna factor, as provided by the antenna calibration laboratory.

6.4 Measurement Setup (Block Diagram of Configuration)

Radiated Emission Test Setup 9KHz-30MHz

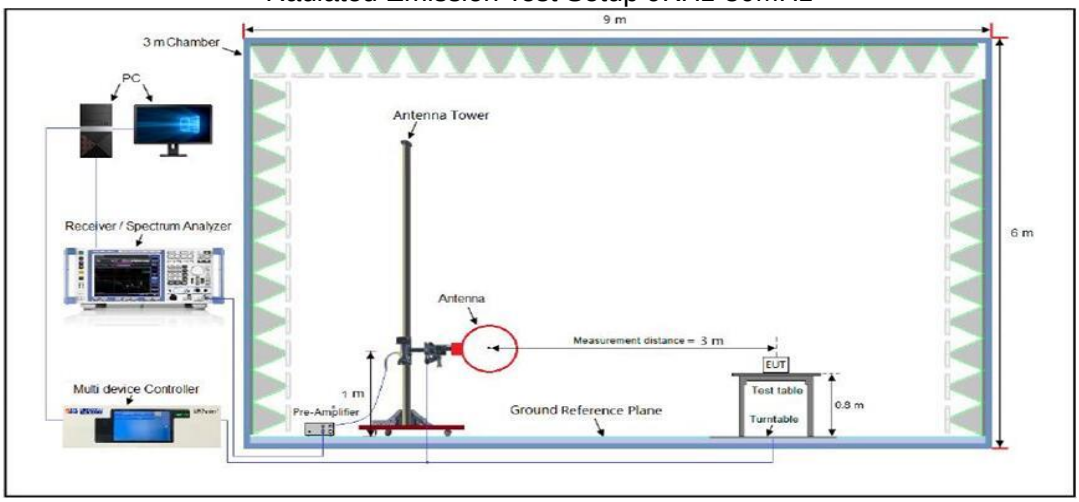

Radiated Emission Test Setup 30MHz-1000MHz

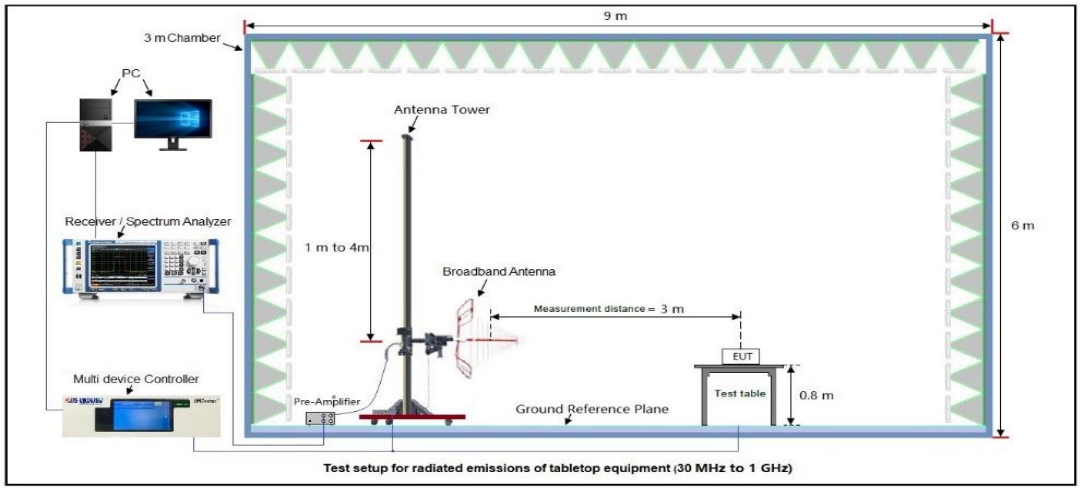

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.5 Measurement Results

Radiated Emission Below 1GHz Test Result

EUT	Portable Power Station	**Model Name**	AC180
Temperature	23.3° C	**Relative Humidity**	60.7%
Pressure	960hPa	**Test Voltage**	AC 120V
Test Mode	Mode 1	**Antenna**	Horizontal

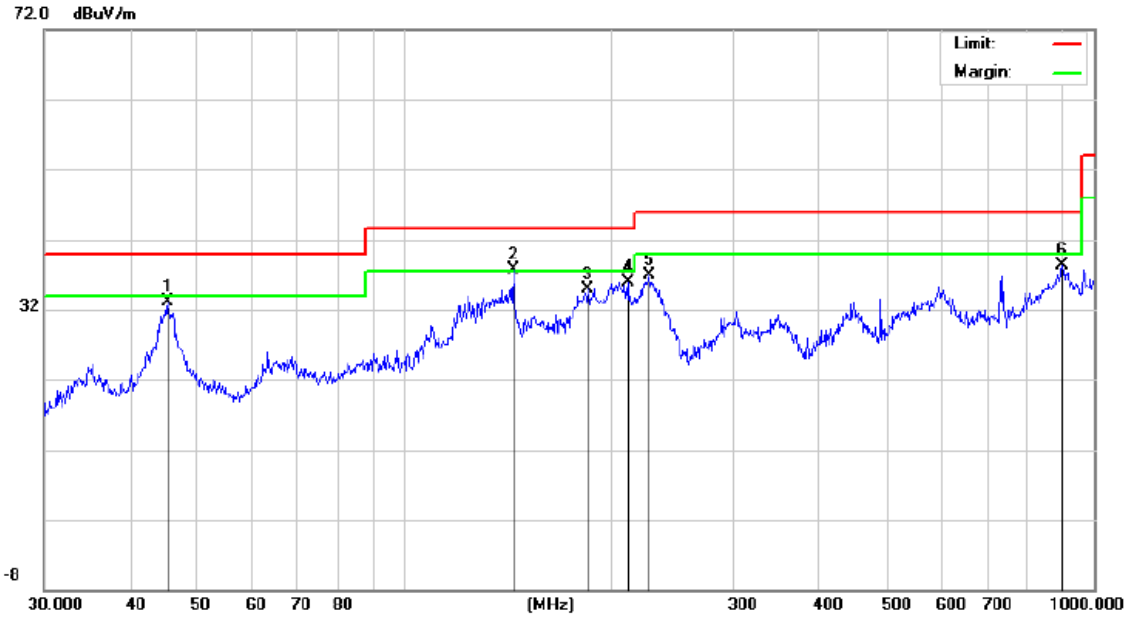

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		45.3755	19.51	13.52	33.03	40.00	-6.97	peak
2	*	143.8293	23.14	14.63	37.77	43.50	-5.73	peak
3		184.4898	22.26	12.72	34.98	43.50	-8.52	peak
4		210.7860	21.51	14.45	35.96	43.50	-7.54	peak
5		226.0994	22.13	14.70	36.83	46.00	-9.17	peak
6		900.1472	6.53	31.78	38.31	46.00	-7.69	peak

Result: Pass

Radiated Emission Below 1GHz Test Result

EUT	Portable Power Station	**Model Name**	AC180
Temperature	23.3° C	**Relative Humidity**	60.7%
Pressure	960hPa	**Test Voltage**	AC 120V
Test Mode	Mode 1	**Antenna**	Vertical

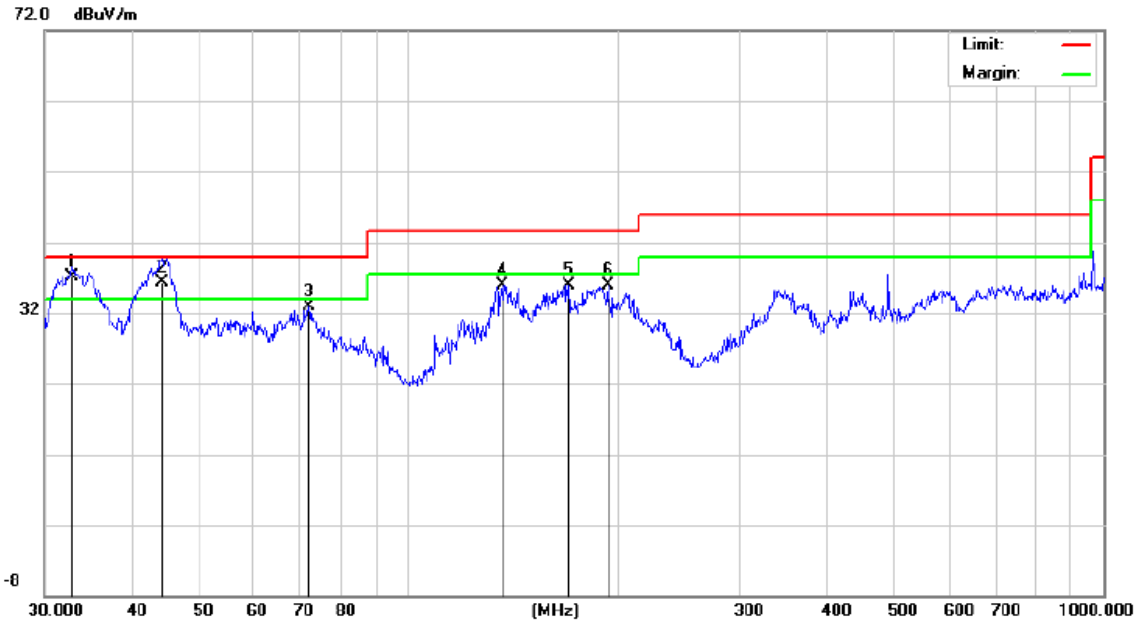

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	32.8637	22.59	14.54	37.13	40.00	-2.87	QP
2	!	44.2752	19.40	16.94	36.34	40.00	-3.66	QP
3		72.0841	15.89	16.98	32.87	40.00	-7.13	peak
4		136.4598	17.88	18.11	35.99	43.50	-7.51	peak
5		170.1947	17.53	18.35	35.88	43.50	-7.62	peak
6		193.7726	17.77	18.09	35.86	43.50	-7.64	peak

Result: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.

3. The “Factor” value can be calculated automatically by software of measurement system.

7. AC Power Line Conducted Emission Test

7.1 Limits of Line Conducted Emission Test

Frequency	Maximum RF Line Voltage	
	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

7.2 Measurement Setup (Block Diagram of Configuration)

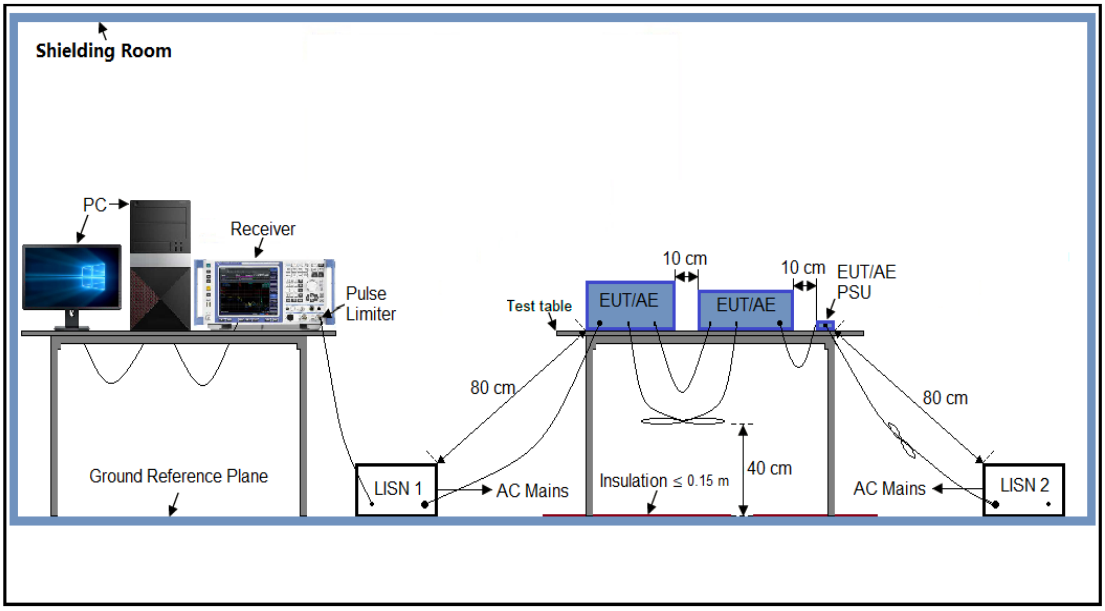

7.3 Preliminary Procedure of Line Conducted Emission Test

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipment received AC120V/60Hz power from a LISN, if any.
5. The EUT received AC120V/60Hz power from the LISN by connecting the adapter.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

7.4 Final Procedure of Line Conducted Emission Test

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

7.5 Measurement Results

AC Power Line Conducted Emission Test			
Test Mode	Mode 1	LISN Line	Hot Side

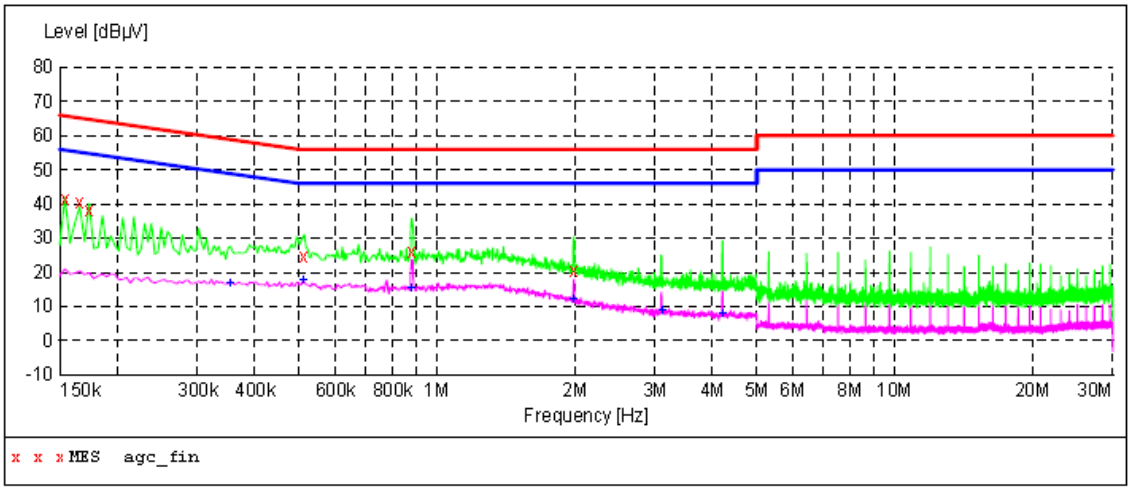

MEASUREMENT RESULT: "agc_fin"

2023/10/18 15:07

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	41.20	6.1	66	24.6	QP	L1
0.166000	40.50	6.1	65	24.7	QP	L1
0.174000	38.20	6.1	65	26.6	QP	L1
0.514000	24.50	6.2	56	31.5	QP	L1
0.882000	25.90	6.2	56	30.1	QP	L1
1.994000	20.30	6.2	56	35.7	QP	L1

MEASUREMENT RESULT: "agc_fin2"

2023/10/18 15:06

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.354000	16.70	6.1	49	32.2	AV	L1
0.510000	17.40	6.2	46	28.6	AV	L1
0.882000	15.50	6.2	46	30.5	AV	L1
1.994000	11.90	6.2	46	34.1	AV	L1
3.094000	8.60	6.3	46	37.4	AV	L1
4.202000	7.70	6.3	46	38.3	AV	L1

Result: Pass

AC Power Line Conducted Emission Test			
Test Mode	Mode 1	LISN Line	Neutral Side

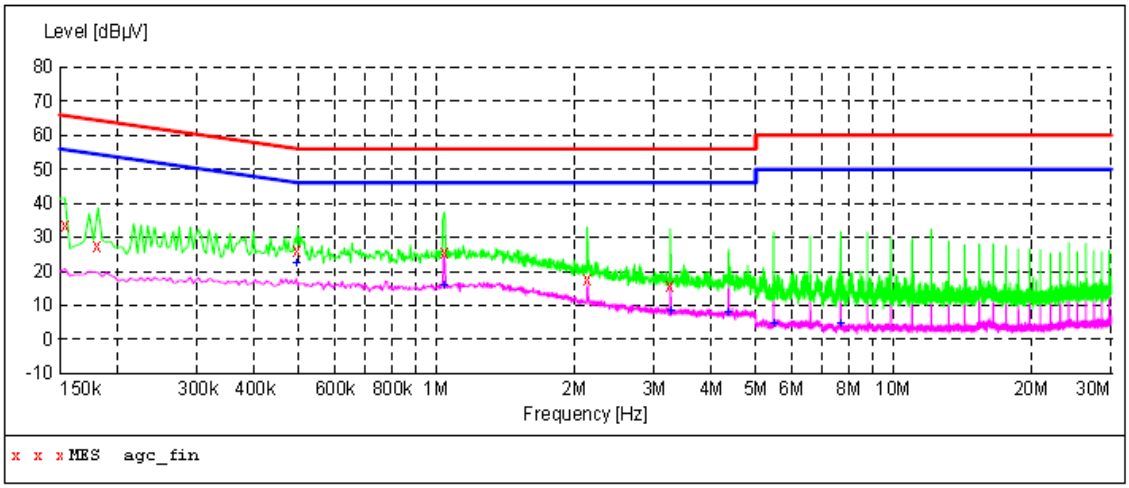

MEASUREMENT RESULT: "agc_fin"

2023/10/18 15:03

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	33.30	6.1	66	32.5	QP	N
0.182000	27.60	6.1	64	36.8	QP	N
0.498000	26.00	6.1	56	30.0	QP	N
1.042000	25.40	6.2	56	30.6	QP	N
2.138000	17.60	6.2	56	38.4	QP	N
3.250000	15.90	6.3	56	40.1	QP	N

MEASUREMENT RESULT: "agc_fin2"

2023/10/18 15:03

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.494000	22.40	6.1	46	23.7	AV	N
1.038000	15.80	6.2	46	30.2	AV	N
3.250000	8.30	6.3	46	37.7	AV	N
4.366000	8.00	6.3	46	38.0	AV	N
5.474000	4.40	6.4	50	45.6	AV	N
7.662000	4.40	6.5	50	45.6	AV	N

Result: Pass

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01741230301AP02A

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01741230301AP03A

-----End of Report-----

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.