

Temperature Pressure Test Mode Frequency	22.6°C 960hPa Mode 12			Relativ	ve Humidity	60.5%	
Test Mode Frequency							
Frequency	Mode 12		960hPa '		oltage	AC 120V,	AC 120V, 60Hz
				Anten	na Polarity	Horizonta	I
	Meter Reading	Factor	Emissio	on Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	Value Type
4904.000	52.24	0.22	52.	46	74	-21.54	peak
4904.000	43.56	0.22	43.	78	54	-10.22	AVG
7356.000	48.25	2.64	50.	89	74	-23.11	peak
7356.000	39.52	2.64	42.	16	54	-11.84	AVG
Remark:		· –					
Factor = Antenr	na Factor + Cable	e Loss – Pre-	amplifier.				
EUT Name	Portable Pov	wer Station		Model	Name	AC200P I	_
Temperature	22.6°C			Relativ	ve Humidity	60.5%	
Pressure	960hPa			Test V	oltage	AC 120V,	60Hz
Test Mode	Mode 12			Anten	na Polarity	Vertical	
Frequency	Meter Reading	Factor	Emissio		Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	
4904.000	51.24	0.22	51.	46	74	-22.54	peak
4904.000	42.34	0.22	42.	56	54	-11.44	AVG
7356.000	46.27	2.64	48.	.91	74	-25.09	peak
7356.000	37.84	2.64	40.	48	54	-13.52	AVG
Remark:							

RESULT: Pass


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- **3.** The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

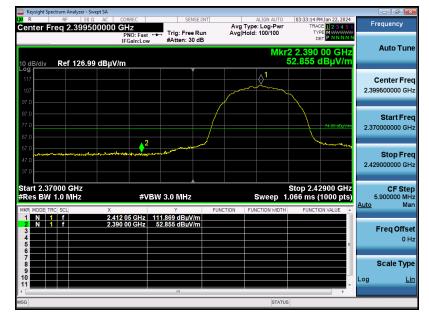

Test Graph for Average Measurement

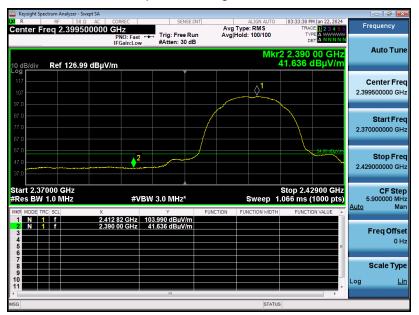


RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

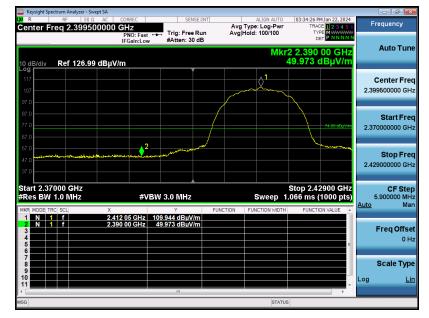

Test Graph for Average Measurement

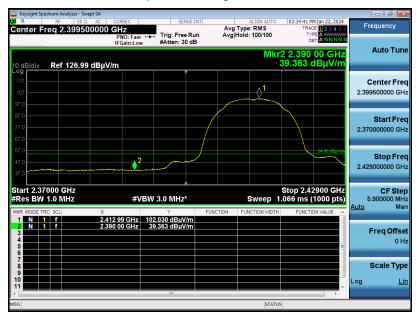


RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

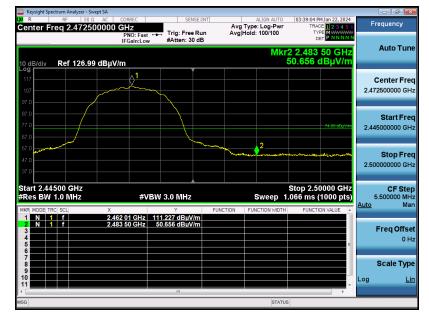

Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

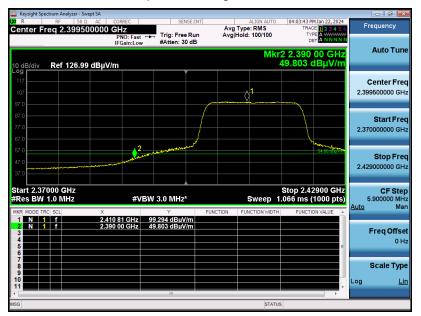

RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

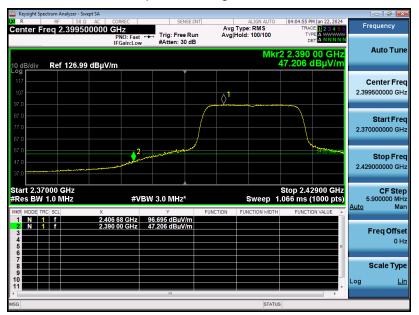

RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 10	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

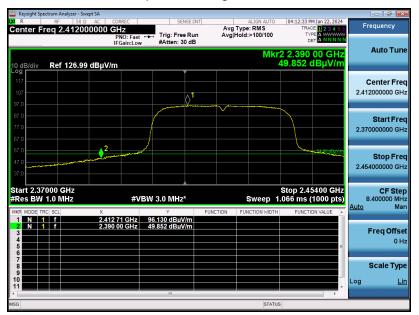

RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 10	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

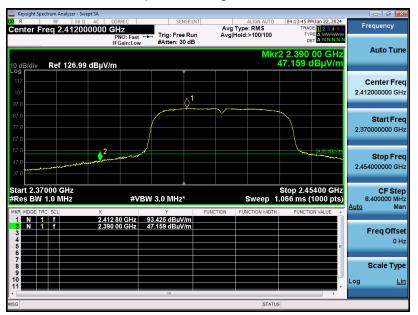

RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 12	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

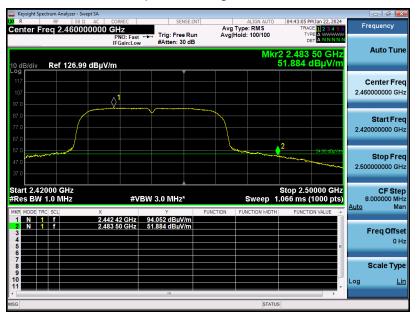

RESULT: Pass




EUT Name	Portable Power Station	Model Name	AC200P L
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	AC 120V, 60Hz
Test Mode	Mode 12	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

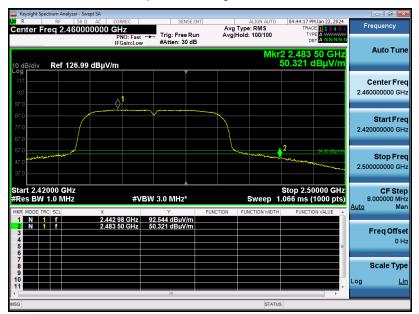

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/



12. AC Power Line Conducted Emission

12.1 Measurement Limits


Frequency	Maximum RF	Line Voltage
Frequency	Q.P (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

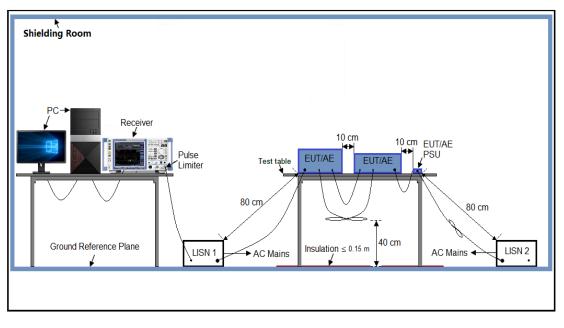



12.3 Preliminary Procedure of Line Conducted Emission Test

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.

12.5 Test Result of Line Conducted Emission Test



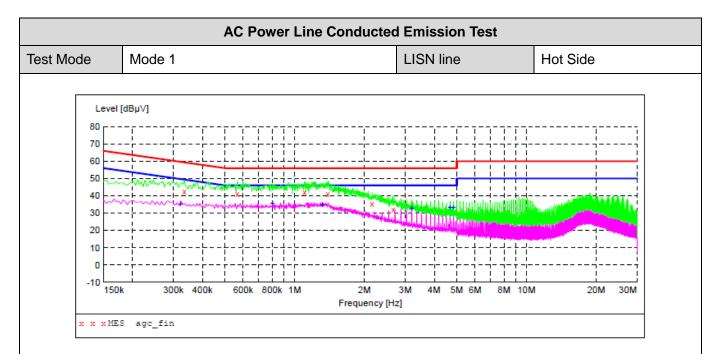

MEASUREMENT RESULT: "agc_fin"

2024/1/12	10:57					
Frequen Mi	cy Leve Hz dBµ			Margin dB	Detector	Line
0.3340 0.5660 1.1020 1.3900 2.1540 2.6620	00 41.1 00 42.0 00 40.9 00 35.4	0 6.2 0 6.2 0 6.2 0 6.2	56 56 56	14.9 14.0 15.1 20.6	QP QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc fin2"

2024/1/12 10: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.322000	35.30	6.1	50	14.4	AV	L1
0.802000	35.80	6.2	46	10.2	AV	L1
1.318000	34.80	6.2	46	11.2	AV	L1
3.198000	32.90	6.3	46	13.1	AV	L1
4.674000	33.50	6.3	46	12.5	AV	L1
4.838000	33.70	6.3	46	12.3	AV	L1

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



		AC Power	Line Cond	ucted En	nission Tes	t	
lode	Mode 1			LIS	SN line	Neutr	al Side
Lev	vel [dBµV]						
⁸⁰ Г			!				·
70 -		++-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+	 				
60 -		<u> </u>	L	. <u>.</u>			
50 🔨	mmmmm			<u> </u>			
40 -	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	+ - × + × ¥ -		X NUM			A TRANSPORT
30 -						affiliae seeds.	
20 -		++-+-+-+-		-i			
10 -			· L				·
0 -		÷		·			
-10	50k 300k 400k	600k 800k 1	M 2	2M 3M	4M 5M 6M	8M 10M	20M 30M
			Frequ	uency [Hz]			
XXXI	MES agc_fin						
M	IEASUREMENT	RESULT	: "agc_	fin"			
2	024/1/12 10:	53					
2			Transd	Limit	Margin	Detector	Line
2	024/1/12 10: Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
2	Frequency MHz	Level dBµV	dB	dBµV	dB	Detector	Line
2	Frequency MHz 0.318000	Level dBµV 42.40	dB 6.1	dBµV 60	dB 17.4	QP	N
2	Frequency MHz 0.318000 0.574000	Level dBµV 42.40 41.20	dB 6.1 6.2	dBµV 60 56	dB 17.4 14.8	QP QP	N N
2	Frequency MHz 0.318000 0.574000 0.746000	Level dBµV 42.40 41.20 41.30	dB 6.1 6.2 6.2	dBµV 60 56 56	dB 17.4 14.8 14.7	QP QP QP	N N N
2	Frequency MHz 0.318000 0.574000 0.746000 0.902000	Level dBµV 42.40 41.20 41.30 42.00	dB 6.1 6.2 6.2 6.2	dΒμV 60 56 56 56	dB 17.4 14.8 14.7 14.0	QP QP QP QP	N N N N
2	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000	Level dBµV 42.40 41.20 41.30 42.00 42.50	dB 6.1 6.2 6.2 6.2 6.2	dBμV 60 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5	QP QP QP QP QP	N N N N
2	Frequency MHz 0.318000 0.574000 0.746000 0.902000	Level dBµV 42.40 41.20 41.30 42.00	dB 6.1 6.2 6.2 6.2	dΒμV 60 56 56 56	dB 17.4 14.8 14.7 14.0	QP QP QP QP	N N N N
2	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000	Level dBµV 42.40 41.20 41.30 42.00 42.50	dB 6.1 6.2 6.2 6.2 6.2	dBμV 60 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5	QP QP QP QP QP	N N N N
2	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000	Level dBµV 42.40 41.20 41.30 42.00 42.50	dB 6.1 6.2 6.2 6.2 6.2	dBμV 60 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5	QP QP QP QP QP	N N N N
	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70	dB 6.1 6.2 6.2 6.2 6.2 6.2	dΒµV 56 56 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5	QP QP QP QP QP	N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT	dB 6.1 6.2 6.2 6.2 6.2 6.2	dΒµV 56 56 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5	QP QP QP QP QP	N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 EASUREMENT 024/1/12 10:	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2	dBμV 60 56 56 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5 20.3	QP QP QP QP QP	N N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 VEASUREMENT 024/1/12 10: Frequency	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level	dB 6.1 6.2 6.2 6.2 6.2 6.2 7.2 7.2	dBμV 60 56 56 56 56 56 fin2 " Limit	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin	QP QP QP QP QP	N N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 EASUREMENT 024/1/12 10:	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53	dB 6.1 6.2 6.2 6.2 6.2 6.2 7.2 7.2	dBμV 60 56 56 56 56 56 56	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin	QP QP QP QP QP	N N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 IEASUREMENT 024/1/12 10: Frequency MHz	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level dBµV	dB 6.1 6.2 6.2 6.2 6.2 6.2 Transd dB	dBμV 60 56 56 56 56 56 fin2 " Limit dBμV	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin dB	QP QP QP QP QP QP	N N N N N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 VEASUREMENT 024/1/12 10: Frequency	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level	dB 6.1 6.2 6.2 6.2 6.2 6.2 Transd dB 6.2	dBμV 60 56 56 56 56 56 fin2 " Limit	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin dB 11.5	QP QP QP QP QP Detector	N N N N Line
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 IEASUREMENT 024/1/12 10: Frequency MHz 0.578000 1.370000 4.674000	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level dBµV 34.50 33.60 34.60	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 Transd dB 6.2 6.2 6.3	dBμV 60 56 56 56 56 56 56 fin2" Limit dBμV 46 46	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin dB 11.5	QP QP QP QP QP Detector AV	N N N N Line
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 IEASUREMENT 024/1/12 10: Frequency MHz 0.578000 1.370000 4.674000 4.838000	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level dBµV 34.50 33.60 34.60 34.90	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 Transd dB 6.2 6.2 6.3 6.3	dBμV 60 56 56 56 56 56 56 56 56 46 46 46 46 46	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin dB 11.5 12.4 11.4 11.1	QP QP QP QP QP QP AV AV AV AV	N N N N N Line N
м	Frequency MHz 0.318000 0.574000 0.746000 0.902000 1.326000 2.154000 IEASUREMENT 024/1/12 10: Frequency MHz 0.578000 1.370000 4.674000 4.838000	Level dBµV 42.40 41.20 41.30 42.00 42.50 35.70 RESULT 53 Level dBµV 34.50 33.60 34.60	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 Transd dB 6.2 6.2 6.3 6.3	dBμV 60 56 56 56 56 56 56 56 46 46 46 46	dB 17.4 14.8 14.7 14.0 13.5 20.3 Margin dB 11.5 12.4 11.4 11.1 11.9	QP QP QP QP QP QP AV AV AV AV AV AV	N N N N N N N N

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



Report No.: AGC01741231101FR03 Page 97 of 97

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC01741231101AP02

Appendix II: Photographs of EUT

Refer to the Report No.: AGC01741231101AP03

----End of Report----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.