

# Test Report

**Report No.:** MTi231109003-07E2  
**Date of issue:** 2024-01-18  
**Applicant:** SHENZHEN POWEROAK NEWENER CO., LTD  
**Product:** EMS Controller  
**Model(s):** SEC-G1  
**FCC ID:** 2AYT3-SEC-G1

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



## Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

# Table of contents

<b>1</b>	<b>General Description .....</b>	<b>5</b>
1.1	Description of the EUT .....	5
1.2	Description of test modes .....	5
1.3	Environmental Conditions .....	7
1.4	Description of support units .....	7
1.5	Measurement uncertainty .....	7
<b>2</b>	<b>Summary of Test Result .....</b>	<b>8</b>
<b>3</b>	<b>Test Facilities and accreditations .....</b>	<b>9</b>
3.1	Test laboratory .....	9
<b>4</b>	<b>List of test equipment.....</b>	<b>10</b>
<b>5</b>	<b>Evaluation Results (Evaluation).....</b>	<b>11</b>
5.1	Antenna requirement .....	11
<b>6</b>	<b>Radio Spectrum Matter Test Results (RF) .....</b>	<b>12</b>
6.1	Conducted Emission at AC power line .....	12
6.2	6dB Bandwidth.....	15
6.3	Maximum Conducted Output Power.....	16
6.4	Power Spectral Density .....	17
6.5	RF conducted spurious emissions and band edge measurement .....	18
6.6	Band edge emissions (Radiated) .....	19
6.7	Radiated emissions (below 1GHz) .....	22
6.8	Radiated emissions (above 1GHz).....	28
	<b>Photographs of the test setup .....</b>	<b>35</b>
	<b>Photographs of the EUT.....</b>	<b>36</b>

<b>Test Result Certification</b>	
<b>Applicant:</b>	SHENZHEN POWEROAK NEWENER CO., LTD
<b>Address:</b>	F19, BLD No.1, Kaidaer, Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China
<b>Manufacturer:</b>	SHENZHEN POWEROAK NEWENER CO., LTD
<b>Address:</b>	F19, BLD No.1, Kaidaer, Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China
<b>Product description</b>	
<b>Product name:</b>	EMS Controller
<b>Trademark:</b>	BLUETTI
<b>Model name:</b>	SEC-G1
<b>Series Model(s):</b>	N/A
<b>Standards:</b>	47 CFR Part 15.247
<b>Test Method:</b>	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02
<b>Date of Test</b>	
<b>Date of test:</b>	2024-01-02 to 2024-01-18
<b>Test result:</b>	Pass

<b>Test Engineer</b>	:	<i>David. Lee</i>
		(David Lee)
<b>Reviewed By</b>	:	<i>Leon Chen</i>
		(Leon Chen)
<b>Approved By</b>	:	<i>Tom Xue</i>
		(Tom Xue)

## 1 General Description

### 1.1 Description of the EUT

Product name:	EMS Controller
Model name:	SEC-G1
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: DC 9-15V, 0.6A Max, power by POE
Accessories:	N/A
Hardware version:	V6.0
Software version:	905209
Test sample(s) number:	MTi231109003-07S1001
<b>RF specification</b>	
Bluetooth version:	V4.2
Operating frequency range:	2402MHz to 2480MHz
Channel number:	40
Modulation type:	GFSK
Antenna(s) gain:	Module 1(ESP32-WROVER-E): PCB Antenna: 3.4 dBi Module 2(ESP32-WROVER-IE): Omni Antenna with SMA: 2.33 dBi

### 1.2 Description of test modes

No.	Emission test modes
Mode1	TX-GFSK-1Mbps(Module 1)
Mode2	TX-GFSK-1Mbps(Module 2)

### 1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### Test Channel List

#### Operation Band: 1

Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
2402	2440	2480

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

### Test Software:

For power setting, refer to below table.

Module 1:

Test Software		EspRFTestTool	
Mode	2402MHz	2440MHz	2480MHz
GFSK	6	6	6

Module 2:

Test Software		EspRFTestTool	
Mode	2402MHz	2440MHz	2480MHz
GFSK	6	6	6

### 1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

### 1.4 Description of support units

Support equipment list			
Description	Model	Serial No.	Manufacturer
DC power source	RNX-305D	/	SHENZHEN ZHAOXIN ELECTRONIC INSTRUMENT EQUIPMENT CO., LTD.
Battery	DC 12V	/	camel
Support cable list			
Description	Length (m)	From	To
/	/	/	/

### 1.5 Measurement uncertainty

Measurement	Uncertainty
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Unwanted Emissions, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	6dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
3	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
4	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
5	RF conducted spurious emissions and band edge measurement	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
6	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass



### 3 Test Facilities and accreditations

#### 3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

#### 4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
6dB Bandwidth Maximum Conducted Output Power Power Spectral Density RF conducted spurious emissions and band edge measurement						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated) Radiated emissions (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2023-06-26	2024-06-25
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-06-01	2024-05-31
Radiated emissions (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-25	2024-04-24
5	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03

## 5 Evaluation Results (Evaluation)

### 5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---


#### 5.1.1 Conclusion:

The antenna of the EUT is permanently attached. The EUT complies with the requirement of FCC PART 15.203.
--




**6.1.3 Test Data:**

Mode1 / Line: Line / CH: L

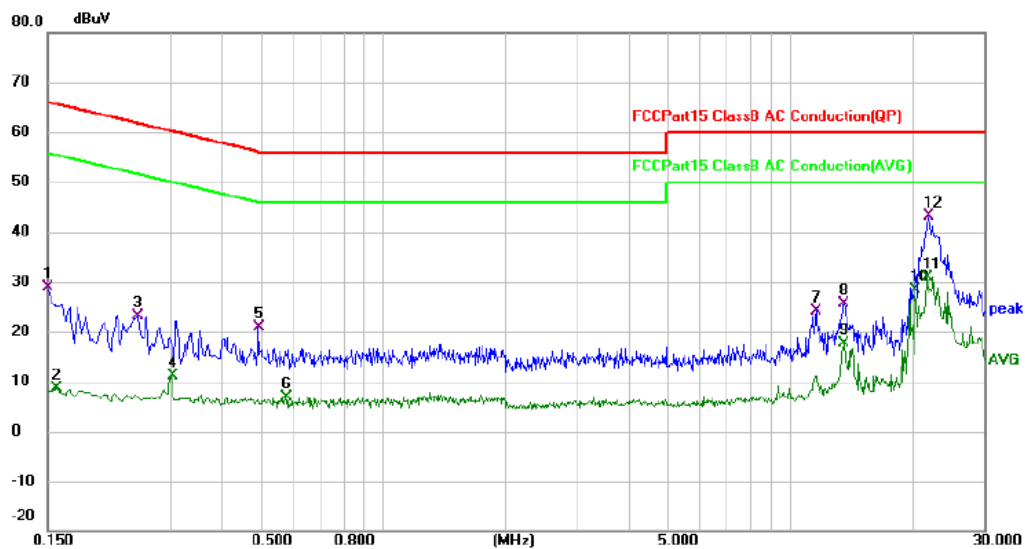

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	18.68	10.28	28.96	66.00	-37.04	QP	
2		0.1580	-1.70	10.28	8.58	55.57	-46.99	AVG	
3		0.2500	12.35	10.77	23.12	61.76	-38.64	QP	
4		0.3020	0.17	10.87	11.04	50.19	-39.15	AVG	
5		0.4940	9.52	11.30	20.82	56.10	-35.28	QP	
6		0.5780	-4.58	11.50	6.92	46.00	-39.08	AVG	
7		11.5859	13.80	10.45	24.25	60.00	-35.75	QP	
8		13.6019	15.15	10.49	25.64	60.00	-34.36	QP	
9		13.6019	7.21	10.49	17.70	50.00	-32.30	AVG	
10		20.2580	17.81	10.65	28.46	50.00	-21.54	AVG	
11		21.6620	20.22	10.69	30.91	50.00	-19.09	AVG	
12	*	21.9060	32.34	10.71	43.05	60.00	-16.95	QP	

Mode1 / Line: Neutral / CH: L

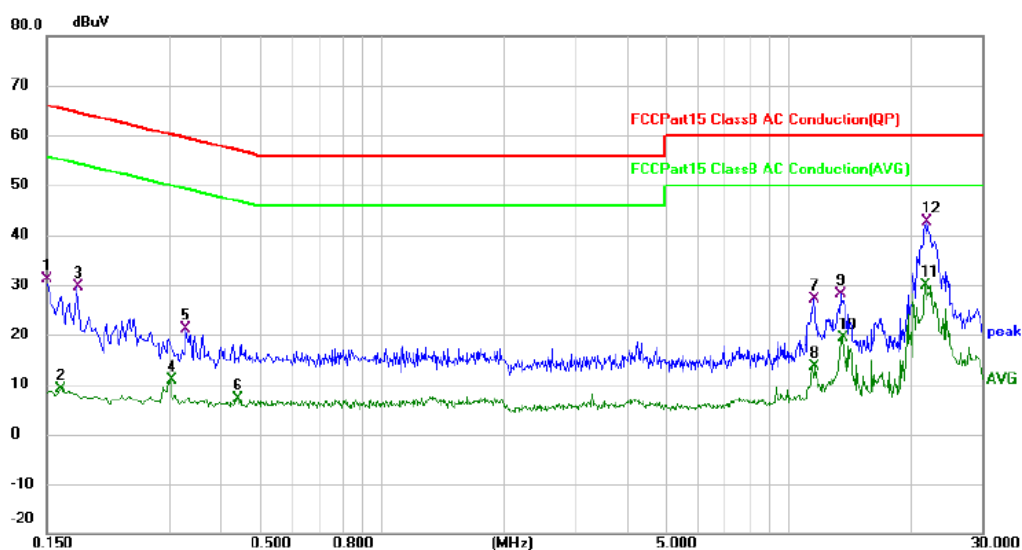

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	20.83	10.29	31.12	66.00	-34.88	QP	
2		0.1620	-1.14	10.27	9.13	55.36	-46.23	AVG	
3		0.1780	19.33	10.24	29.57	64.58	-35.01	QP	
4		0.3020	0.01	10.84	10.85	50.19	-39.34	AVG	
5		0.3300	10.32	10.90	21.22	59.45	-38.23	QP	
6		0.4420	-4.15	11.16	7.01	47.02	-40.01	AVG	
7		11.5180	16.65	10.37	27.02	60.00	-32.98	QP	
8		11.5860	3.28	10.37	13.65	50.00	-36.35	AVG	
9		13.4180	17.60	10.43	28.03	60.00	-31.97	QP	
10		13.6020	9.05	10.44	19.49	50.00	-30.51	AVG	
11		21.6620	19.27	10.72	29.99	50.00	-20.01	AVG	
12	*	22.0300	31.89	10.74	42.63	60.00	-17.37	QP	


## 6.2 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq$ [3 × RBW]. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

### 6.2.2 Test Setup Diagram:

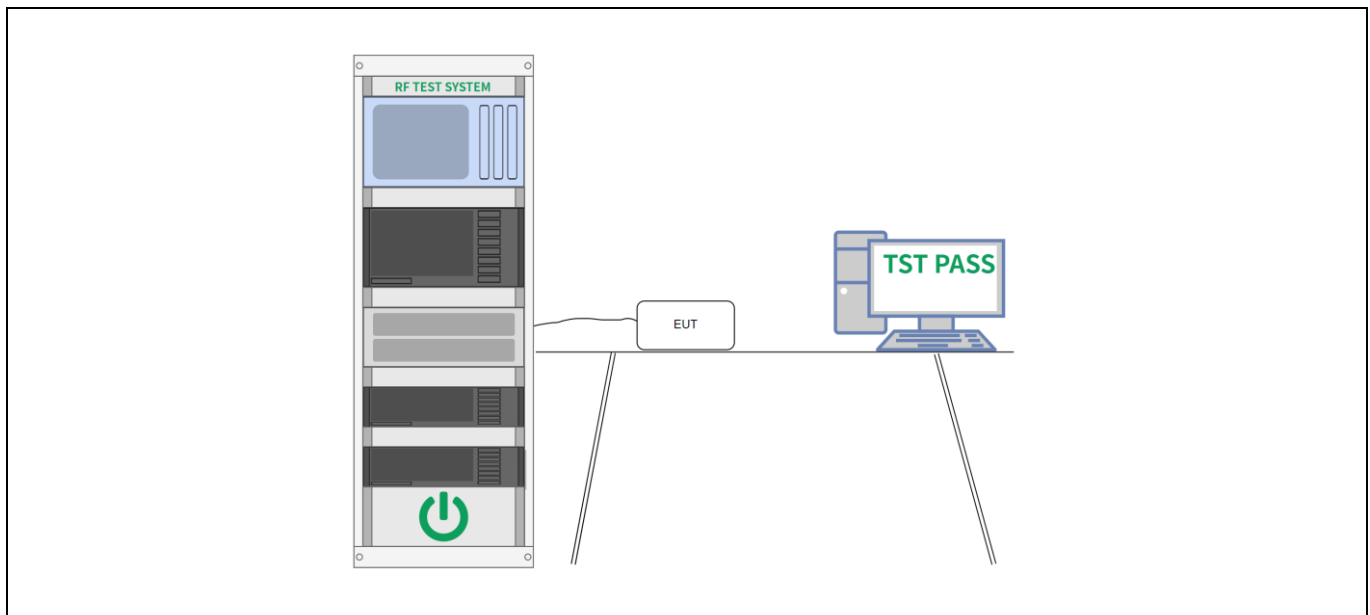

### 6.2.3 Test Data:

Please Refer to Appendix- BLE test data (Module 1), Appendix- BLE test data (Module 2) for Details.


### 6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power

#### 6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

#### 6.3.2 Test Setup Diagram:

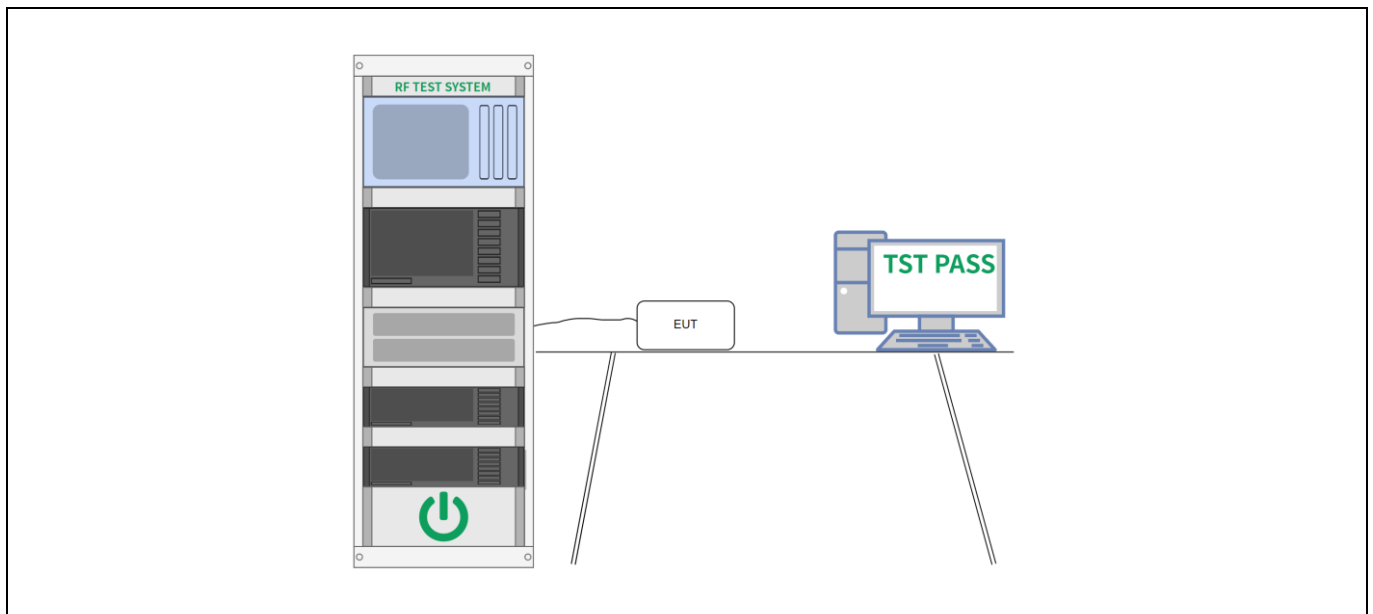

#### 6.3.3 Test Data:

Please Refer to Appendix- BLE test data (Module 1), Appendix- BLE test data (Module 2) for Details.




#### 6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

##### 6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

##### 6.4.2 Test Setup Diagram:

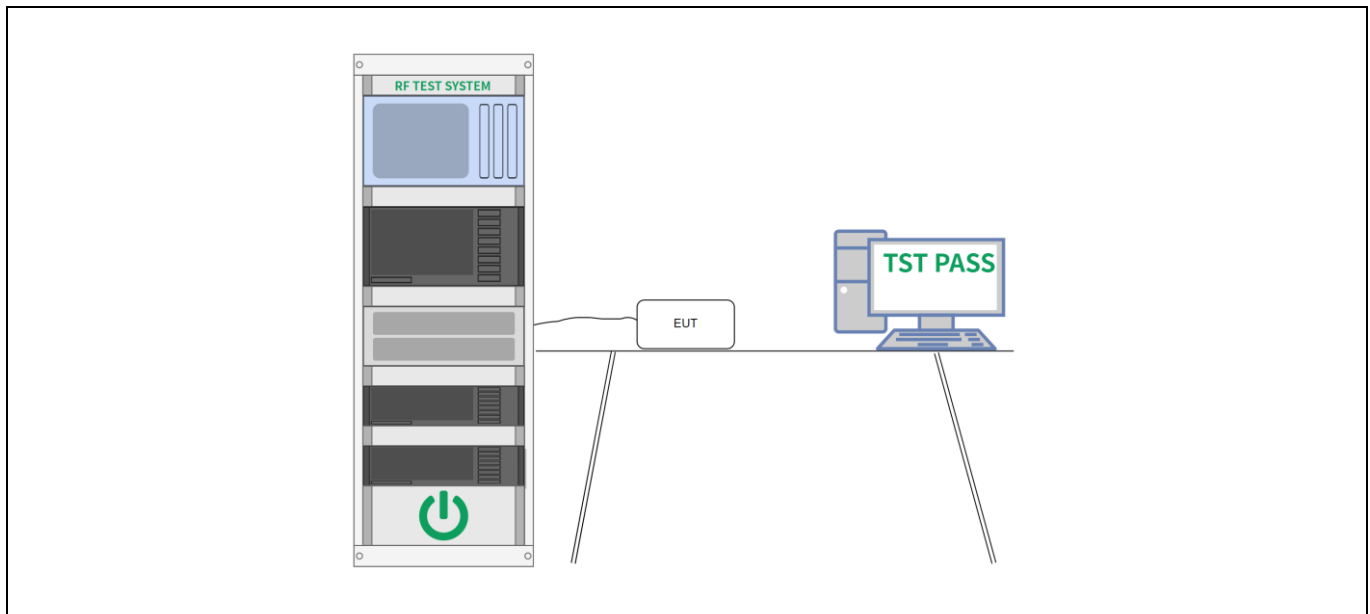

##### 6.4.3 Test Data:

Please Refer to Appendix- BLE test data (Module 1), Appendix- BLE test data (Module 2) for Details.


### 6.5 RF conducted spurious emissions and band edge measurement

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

#### 6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	50 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				

#### 6.5.2 Test Setup Diagram:

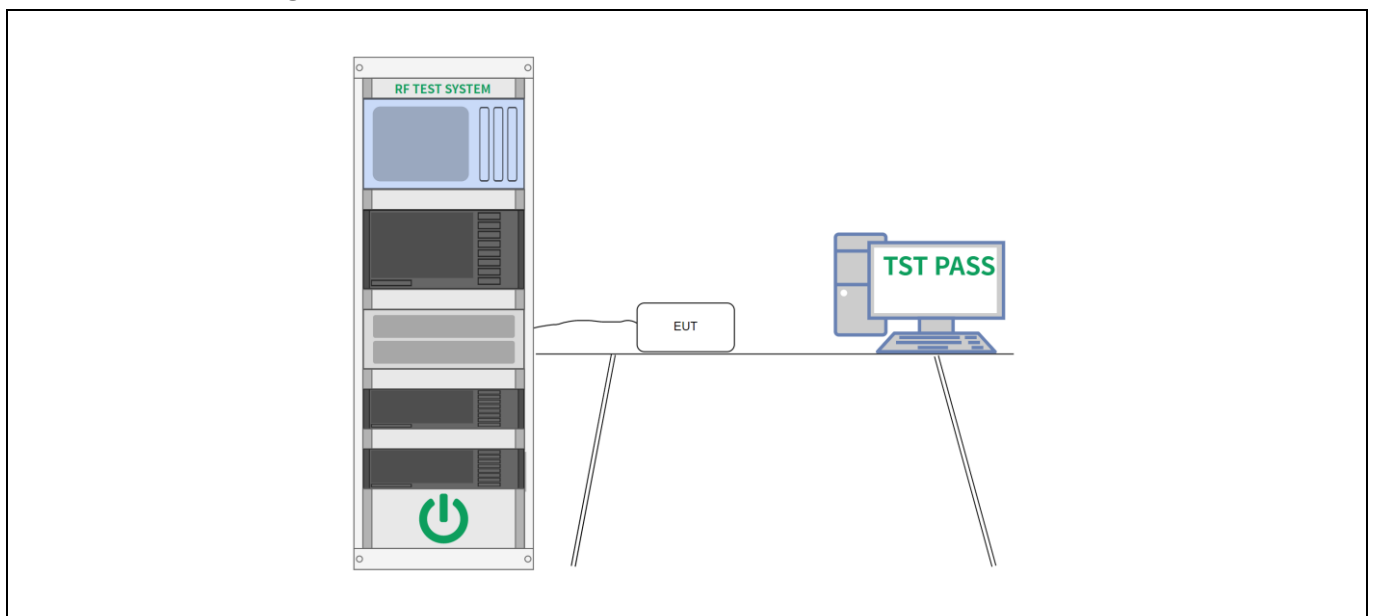

#### 6.5.3 Test Data:


Please Refer to Appendix- BLE test data (Module 1), Appendix- BLE test data (Module 2) for Details.

**6.6 Band edge emissions (Radiated)**

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.10.5.2		

**6.6.1 E.U.T. Operation:**

Operating Environment:					
Temperature:	26 °C	Humidity:	54 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

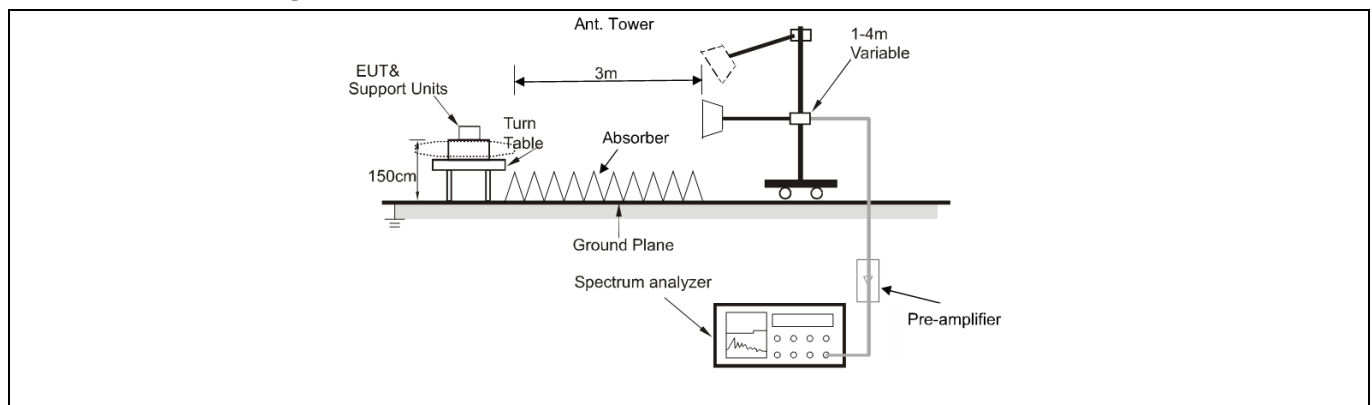**6.6.2 Test Setup Diagram:**


**6.6.3 Test Data:**

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	53.86	-12.83	41.03	74.00	-32.97	peak
2		2310.000	45.29	-12.83	32.46	54.00	-21.54	AVG
3		2390.000	54.27	-12.42	41.85	74.00	-32.15	peak
4	*	2390.000	45.33	-12.42	32.91	54.00	-21.09	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	53.03	-12.83	40.20	74.00	-33.80	peak
2	*	2310.000	43.33	-12.83	30.50	54.00	-23.50	AVG
3		2390.000	51.92	-12.42	39.50	74.00	-34.50	peak
4		2390.000	42.76	-12.42	30.34	54.00	-23.66	AVG

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	61.46	-12.44	49.02	74.00	-24.98	peak
2	*	2483.500	51.91	-12.44	39.47	54.00	-14.53	AVG
3		2500.000	55.01	-12.35	42.66	74.00	-31.34	peak
4		2500.000	45.86	-12.35	33.51	54.00	-20.49	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	56.83	-12.44	44.39	74.00	-29.61	peak
2	*	2483.500	46.62	-12.44	34.18	54.00	-19.82	AVG
3		2500.000	53.13	-12.35	40.78	74.00	-33.22	peak
4		2500.000	43.19	-12.35	30.84	54.00	-23.16	AVG

## Mode2 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	54.80	-12.83	41.97	74.00	-32.03	peak
2		2310.000	45.12	-12.83	32.29	54.00	-21.71	AVG
3		2390.000	55.40	-12.42	42.98	74.00	-31.02	peak
4	*	2390.000	45.33	-12.42	32.91	54.00	-21.09	AVG

## Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2310.000	52.16	-12.83	39.33	74.00	-34.67	peak
2	*	2310.000	42.44	-12.83	29.61	54.00	-24.39	AVG
3		2390.000	50.88	-12.42	38.46	74.00	-35.54	peak
4		2390.000	41.66	-12.42	29.24	54.00	-24.76	AVG

## Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	63.54	-12.44	51.10	74.00	-22.90	peak
2	*	2483.500	53.24	-12.44	40.80	54.00	-13.20	AVG
3		2500.000	57.71	-12.35	45.36	74.00	-28.64	peak
4		2500.000	47.44	-12.35	35.09	54.00	-18.91	AVG

## Mode2 / Polarization: Vertical / CH: H


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	52.07	-12.44	39.63	74.00	-34.37	peak
2	*	2483.500	42.71	-12.44	30.27	54.00	-23.73	AVG
3		2500.000	51.04	-12.35	38.69	74.00	-35.31	peak
4		2500.000	42.14	-12.35	29.79	54.00	-24.21	AVG


**6.7 Radiated emissions (below 1GHz)**

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

**6.7.1 E.U.T. Operation:**


Operating Environment:			
Temperature:	26 °C	Humidity:	54 %
		Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2		
Final test mode:	Mode1, Mode2		
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.			

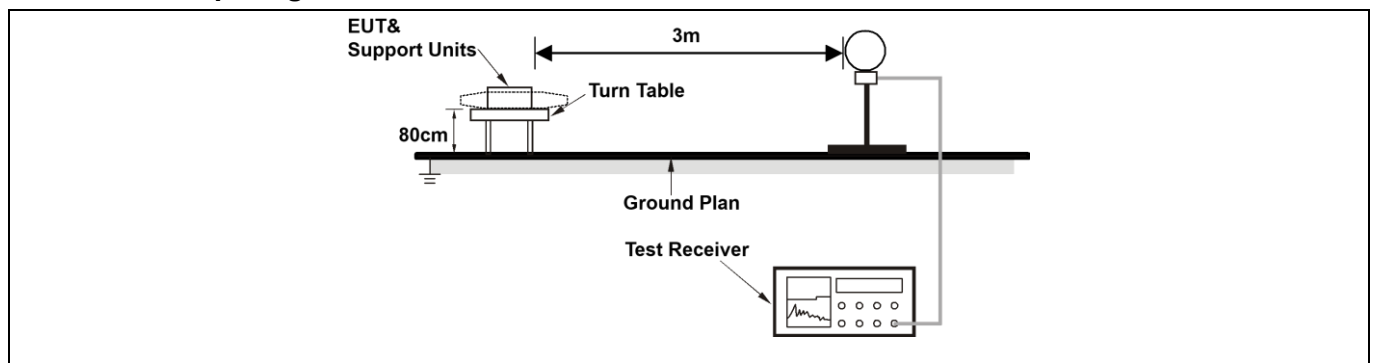**6.7.2 Test Setup Diagram:**

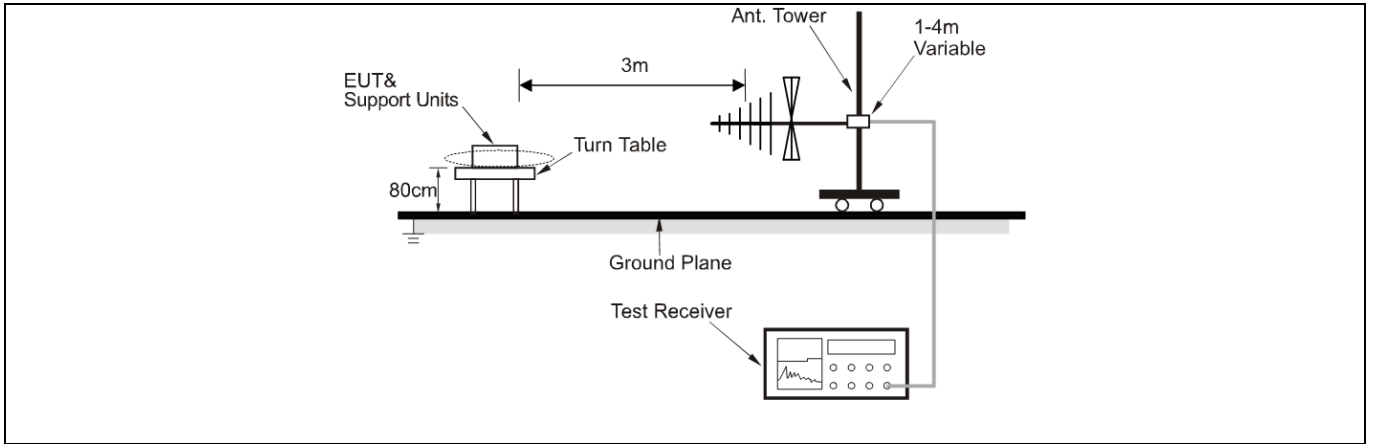


**6.7.3 Test Data:**


Mode1 / Polarization: Horizontal / CH: H

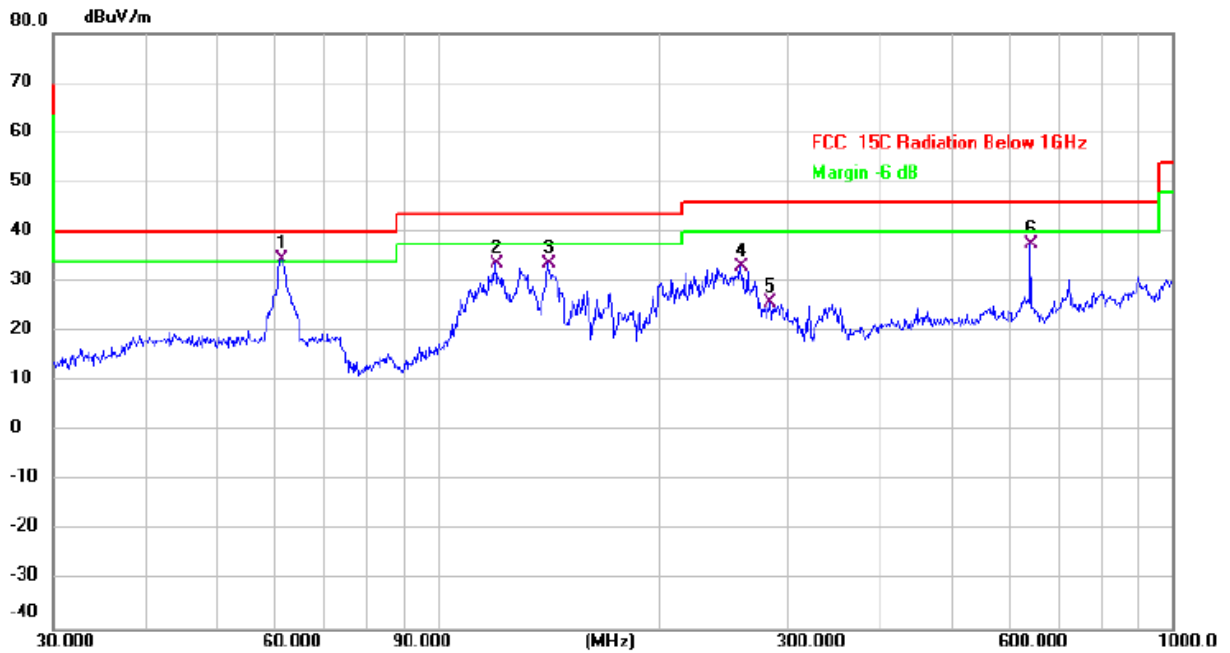

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	61.1316	43.66	-9.08	34.58	40.00	-5.42	QP	
2		119.8556	42.79	-9.22	33.57	43.50	-9.93	QP	
3		141.3298	43.38	-9.75	33.63	43.50	-9.87	QP	
4		258.3264	40.36	-7.44	32.92	46.00	-13.08	QP	
5		283.9791	32.14	-6.34	25.80	46.00	-20.20	QP	
6		640.6110	38.11	-0.53	37.58	46.00	-8.42	QP	




Mode1 / Polarization: Vertical / CH: H

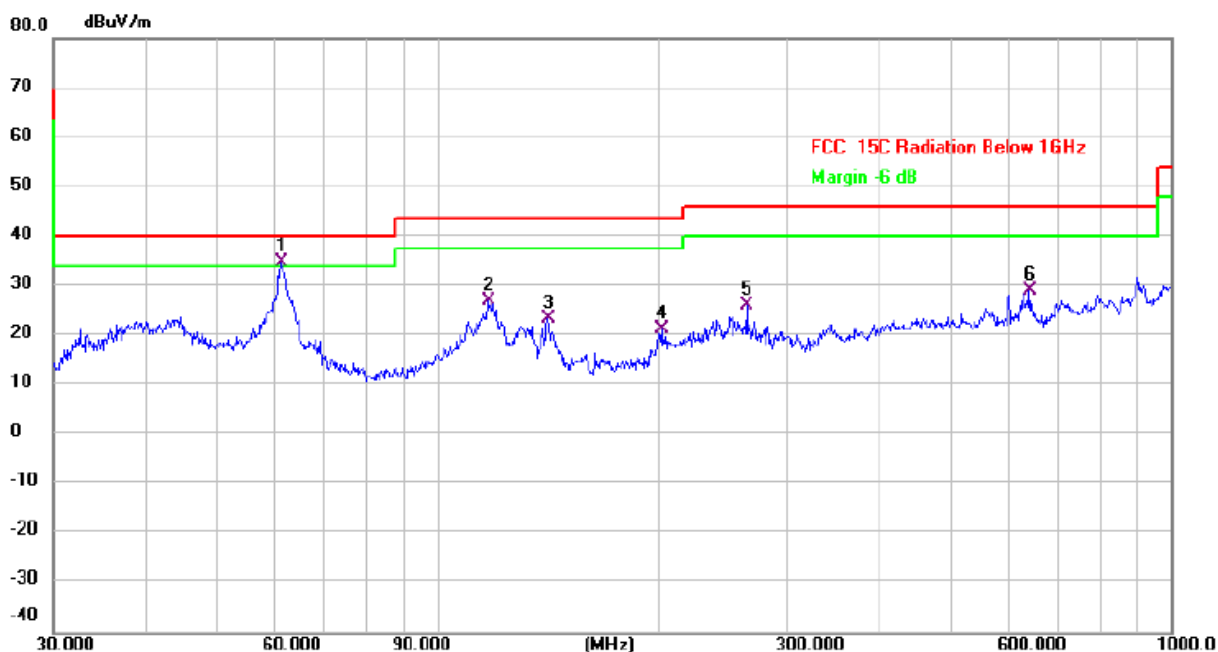


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	61.1316	43.82	-9.08	34.74	40.00	-5.26	QP	
2		117.3603	35.39	-8.36	27.03	43.50	-16.47	QP	
3		141.3298	33.13	-9.75	23.38	43.50	-20.12	QP	
4		202.1005	28.25	-6.82	21.43	43.50	-22.07	QP	
5		263.8190	33.59	-7.39	26.20	46.00	-19.80	QP	
6		640.6110	29.69	-0.53	29.16	46.00	-16.84	QP	

Mode2 / Polarization: Horizontal / CH: H

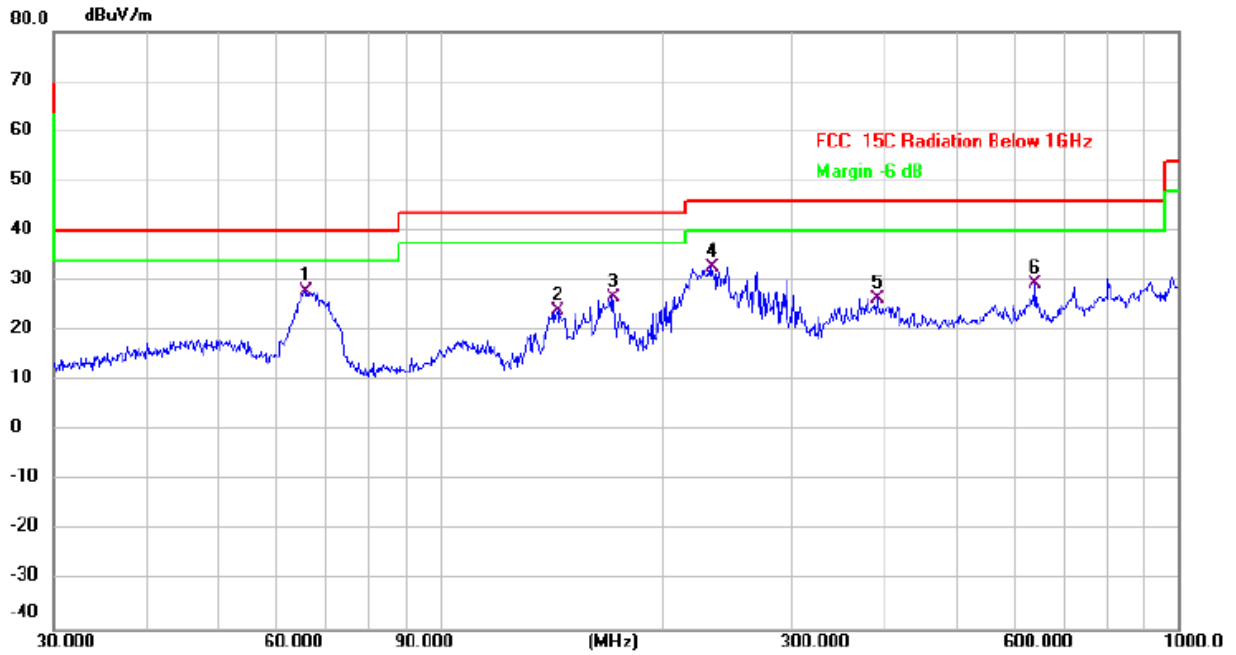

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	66.0342	39.19	-11.17	28.02	40.00	-11.98	QP	
2		144.3348	34.82	-10.86	23.96	43.50	-19.54	QP	
3		171.3926	37.91	-11.13	26.78	43.50	-16.72	QP	
4		233.3487	39.94	-7.18	32.76	46.00	-13.24	QP	
5		390.7226	31.23	-4.71	26.52	46.00	-19.48	QP	
6		640.6110	29.94	-0.53	29.41	46.00	-16.59	QP	

Mode2 / Polarization: Vertical / CH: H

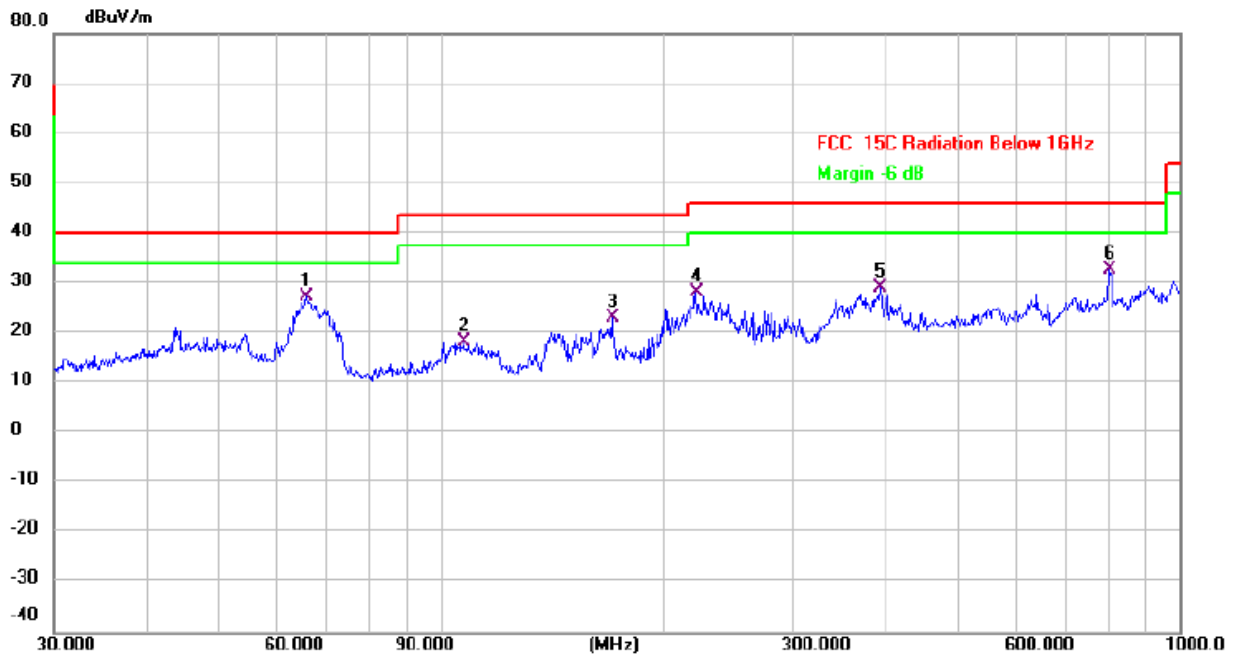


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	65.8031	38.53	-11.04	27.49	40.00	-12.51	QP	
2		107.5101	25.51	-7.15	18.36	43.50	-25.14	QP	
3		170.7926	34.20	-11.10	23.10	43.50	-20.40	QP	
4		221.3921	36.74	-8.47	28.27	46.00	-17.73	QP	
5		393.4723	33.85	-4.84	29.01	46.00	-16.99	QP	
6		801.7863	31.80	0.82	32.62	46.00	-13.38	QP	

**6.8 Radiated emissions (above 1GHz)**

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2013 section 6.6.4		

**6.8.1 E.U.T. Operation:**

Operating Environment:					
Temperature:	26 °C	Humidity:	54 %	Atmospheric Pressure:	100 kPa
Pre test mode:	Mode1, Mode2				
Final test mode:	Mode1, Mode2				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

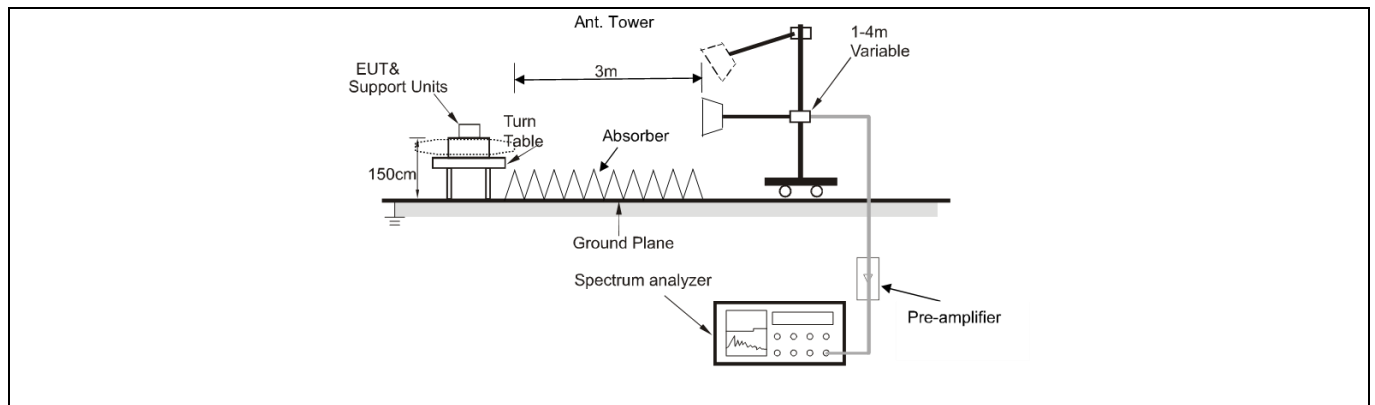**6.8.2 Test Setup Diagram:**


**6.8.3 Test Data:**

Mode1 / Polarization: Horizontal / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	52.47	-7.40	45.07	74.00	-28.93 peak
2		4804.000	47.02	-7.40	39.62	54.00	-14.38 AVG
3		7206.000	47.23	0.96	48.19	74.00	-25.81 peak
4		7206.000	41.42	0.96	42.38	54.00	-11.62 AVG
5		9608.000	47.86	2.16	50.02	74.00	-23.98 peak
6	*	9608.000	42.09	2.16	44.25	54.00	-9.75 AVG

Mode1 / Polarization: Vertical / CH: L							
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		4804.000	52.76	-7.40	45.36	74.00	-28.64 peak
2		4804.000	47.05	-7.40	39.65	54.00	-14.35 AVG
3		7206.000	46.87	0.96	47.83	74.00	-26.17 peak
4		7206.000	41.78	0.96	42.74	54.00	-11.26 AVG
5		9608.000	48.20	2.16	50.36	74.00	-23.64 peak
6	*	9608.000	42.12	2.16	44.28	54.00	-9.72 AVG

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	51.22	-7.45	43.77	74.00	-30.23	peak
2		4880.000	46.10	-7.45	38.65	54.00	-15.35	AVG
3		7320.000	47.79	0.77	48.56	74.00	-25.44	peak
4		7320.000	42.88	0.77	43.65	54.00	-10.35	AVG
5		9760.000	48.43	3.11	51.54	74.00	-22.46	peak
6	*	9760.000	43.14	3.11	46.25	54.00	-7.75	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4880.000	52.01	-7.45	44.56	74.00	-29.44	peak
2		4880.000	46.12	-7.45	38.67	54.00	-15.33	AVG
3		7320.000	47.33	0.77	48.10	74.00	-25.90	peak
4		7320.000	41.48	0.77	42.25	54.00	-11.75	AVG
5		9760.000	47.86	3.11	50.97	74.00	-23.03	peak
6	*	9760.000	41.57	3.11	44.68	54.00	-9.32	AVG

Mode1 / Polarization: Horizontal / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.000	51.05	-7.20	43.85	74.00	-30.15	peak
2	4960.000	45.85	-7.20	38.65	54.00	-15.35	AVG
3	7440.000	46.43	0.98	47.41	74.00	-26.59	peak
4	7440.000	41.12	0.98	42.10	54.00	-11.90	AVG
5	9920.000	48.17	3.02	51.19	74.00	-22.81	peak
6 *	9920.000	42.33	3.02	45.35	54.00	-8.65	AVG

Mode1 / Polarization: Vertical / CH: H

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.000	53.03	-7.20	45.83	74.00	-28.17	peak
2	4960.000	46.85	-7.20	39.65	54.00	-14.35	AVG
3	7440.000	46.55	0.98	47.53	74.00	-26.47	peak
4	7440.000	40.27	0.98	41.25	54.00	-12.75	AVG
5	9920.000	47.36	3.02	50.38	74.00	-23.62	peak
6 *	9920.000	41.39	3.02	44.41	54.00	-9.59	AVG

Mode2 / Polarization: Horizontal / CH: L

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.000	51.34	-7.40	43.94	74.00	-30.06	peak
2	4804.000	45.05	-7.40	37.65	54.00	-16.35	AVG
3	7206.000	46.99	0.96	47.95	74.00	-26.05	peak
4	7206.000	40.29	0.96	41.25	54.00	-12.75	AVG
5	9608.000	48.58	2.16	50.74	74.00	-23.26	peak
6 *	9608.000	42.16	2.16	44.32	54.00	-9.68	AVG

Mode2 / Polarization: Vertical / CH: L

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.000	50.80	-7.40	43.40	74.00	-30.60	peak
2	4804.000	44.66	-7.40	37.26	54.00	-16.74	AVG
3	7206.000	47.88	0.96	48.84	74.00	-25.16	peak
4	7206.000	41.19	0.96	42.15	54.00	-11.85	AVG
5	9608.000	49.51	2.16	51.67	74.00	-22.33	peak
6 *	9608.000	43.16	2.16	45.32	54.00	-8.68	AVG



## Mode2 / Polarization: Horizontal / CH: M

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4880.000	51.01	-7.45	43.56	74.00	-30.44	peak
2	4880.000	45.10	-7.45	37.65	54.00	-16.35	AVG
3	7320.000	47.14	0.77	47.91	74.00	-26.09	peak
4	7320.000	40.55	0.77	41.32	54.00	-12.68	AVG
5	9760.000	47.93	3.11	51.04	74.00	-22.96	peak
6 *	9760.000	42.27	3.11	45.38	54.00	-8.62	AVG

## Mode2 / Polarization: Vertical / CH: M

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4880.000	50.46	-7.45	43.01	74.00	-30.99	peak
2	4880.000	44.99	-7.45	37.54	54.00	-16.46	AVG
3	7320.000	47.71	0.77	48.48	74.00	-25.52	peak
4	7320.000	42.88	0.77	43.65	54.00	-10.35	AVG
5	9760.000	48.69	3.11	51.80	74.00	-22.20	peak
6 *	9760.000	42.67	3.11	45.78	54.00	-8.22	AVG

## Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	52.08	-7.20	44.88	74.00	-29.12	peak
2		4960.000	45.85	-7.20	38.65	54.00	-15.35	AVG
3		7440.000	46.70	0.98	47.68	74.00	-26.32	peak
4		7440.000	40.25	0.98	41.23	54.00	-12.77	AVG
5		9920.000	47.01	3.02	50.03	74.00	-23.97	peak
6	*	9920.000	41.24	3.02	44.26	54.00	-9.74	AVG

## Mode2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		4960.000	51.68	-7.20	44.48	74.00	-29.52	peak
2		4960.000	45.85	-7.20	38.65	54.00	-15.35	AVG
3		7440.000	47.48	0.98	48.46	74.00	-25.54	peak
4		7440.000	41.33	0.98	42.31	54.00	-11.69	AVG
5		9920.000	47.06	3.02	50.08	74.00	-23.92	peak
6	*	9920.000	40.99	3.02	44.01	54.00	-9.99	AVG

## Photographs of the test setup

Refer to Appendix - Test Setup Photos

## Photographs of the EUT

Refer to Appendix - EUT Photos

**----End of Report----**