

TEST REPORT

Reference No...... : WTX22X07152726W001
FCC ID : 2AYV2SM-828D2
Applicant : Shenzhen Simolio Electronic Co., Ltd
Address..... : 6F, Bldg 1, Block A, Xifa Industrial Zone, Yintian Xixiang, Gongle
Community, Xixiang St, Baoan District, Shenzhen, Guangdong
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : Wireless headphones
Model No...... : SM-828D2
Standards : FCC Part 15.247
Date of Receipt sample : 2022-07-26
Date of Test..... : 2022-07-26 to 2022-08-15
Date of Issue : 2022-08-15
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Mike Shi

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE	11
3.2 EVALUATION INFORMATION	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE	12
4.2 TEST SETUP BLOCK DIAGRAM	12
4.3 TEST PROCEDURE	12
5.4 SUMMARY OF TEST RESULTS/PLOTS	12
5. 6DB BANDWIDTH	13
5.1 STANDARD APPLICABLE	13
5.2 TEST SETUP BLOCK DIAGRAM	13
5.3 TEST PROCEDURE	13
5.4 SUMMARY OF TEST RESULTS/PLOTS	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE	14
6.2 TEST SETUP BLOCK DIAGRAM	14
6.3 TEST PROCEDURE	14
6.4 SUMMARY OF TEST RESULTS/PLOTS	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.4 SUMMARY OF TEST RESULTS/PLOTS	17
8. OUT OF BAND EMISSIONS	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 SUMMARY OF TEST RESULTS/PLOTS	26
9. CONDUCTED EMISSIONS	28
9.1 TEST PROCEDURE	28
9.2 BASIC TEST SETUP BLOCK DIAGRAM	28
9.3 TEST RECEIVER SETUP	28
9.4 SUMMARY OF TEST RESULTS/PLOTS	28
APPENDIX SUMMARY	31
APPENDIX A	32
APPENDIX B	34
APPENDIX C	36
APPENDIX D	38
APPENDIX PHOTOGRAPHS	40

Report version

Version No.	Date of issue	Description
Rev.00	2022-08-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Wireless headphones
Trade Name:	SIMOLIO
Model No.:	SM-828D2
Adding Model(s):	SM-828D1, SM-828RX, SM-827D1, SM-827D2, SM-827RX, SM-829D1, SM-829D2, SM-829RX, SM-820D1, SM-820D2, SM-820RX, SM-821D1, SM-821D2, SM-821RX, SM-822D1, SM-822D2, SM-822RX, SM-826M, SM-825M, SM-820B, SM-821B, SM-822B
Rated Voltage:	USB Port:DC5V Battery:DC3.7V
Capacity:	350mAh
Power adapter:	MODEL:PS06C050K1000UU INPUT:AC100-240V~, 50/60Hz, 0.25A OUTPUT:DC5V,1000mA
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SM-828D2, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	2406-2472MHz
RF Output Power:	13.37dBm (Conducted)
Type of Modulation:	GFSK
Quantity of Channels:	31
Channel Separation:	5MHz
Type of Antenna:	PIFA Antenna
Antenna Gain:	0.86dBi
<p><i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 DTS Meas Guidance v05r02: Guidance for performing Compliance Measurement on Digital Transmission Systems operating under section 15.247.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2406MHz
TM2	Middle	2440MHz
TM3	High	2472MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	2.0	Unshielded	Without Ferrite
AUX Cable	2.0	Unshielded	Without Ferrite
RCA Audio Cable	2.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24

SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6 dB Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has a PIFA Antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

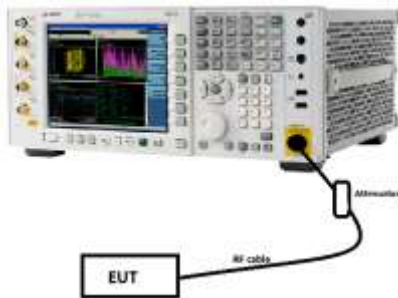

4.3 Test Procedure

According to the KDB 558074, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.4 Summary of Test Results/Plots


Please refer to Appendix A

5. 6dB Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

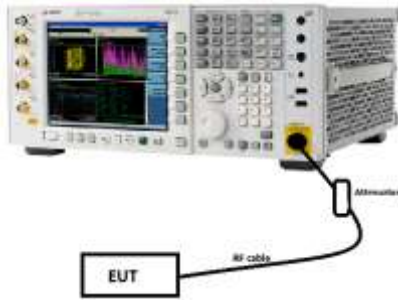

5.3 Test Procedure

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

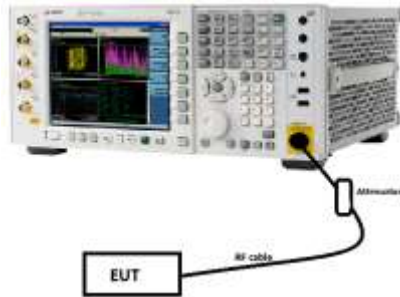

6.3 Test Procedure

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW \geq 3RBW.
- c) Set span \geq 3RBW.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

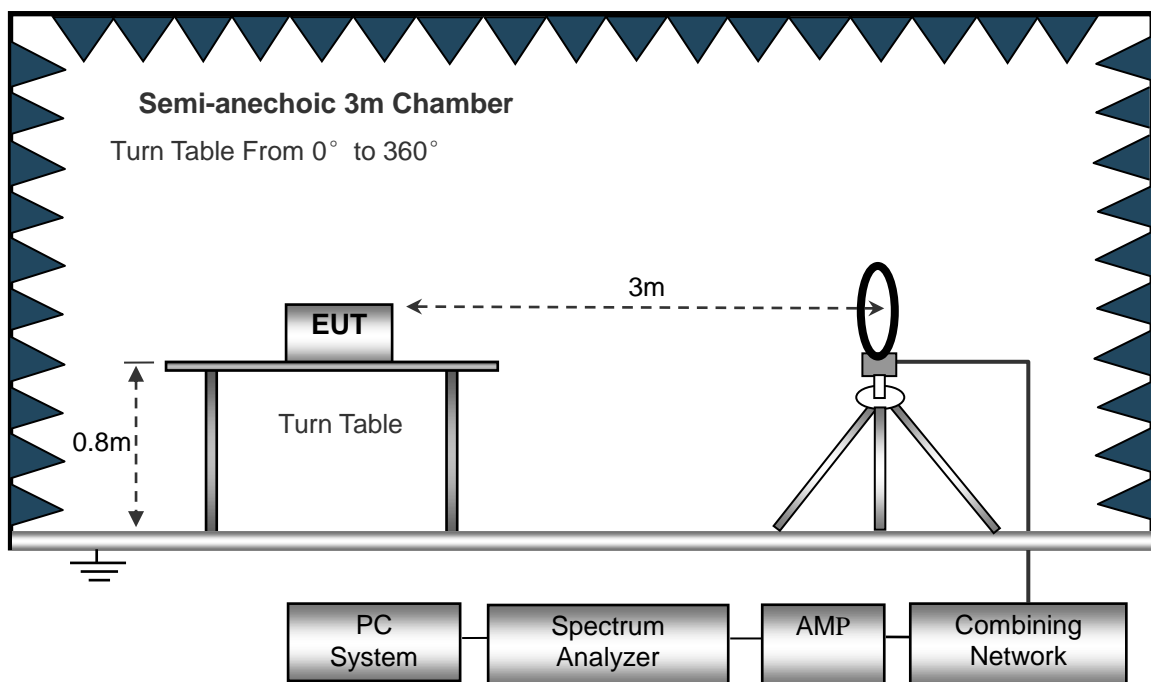

The test setup for emission measurement from 30MHz to 1GHz.

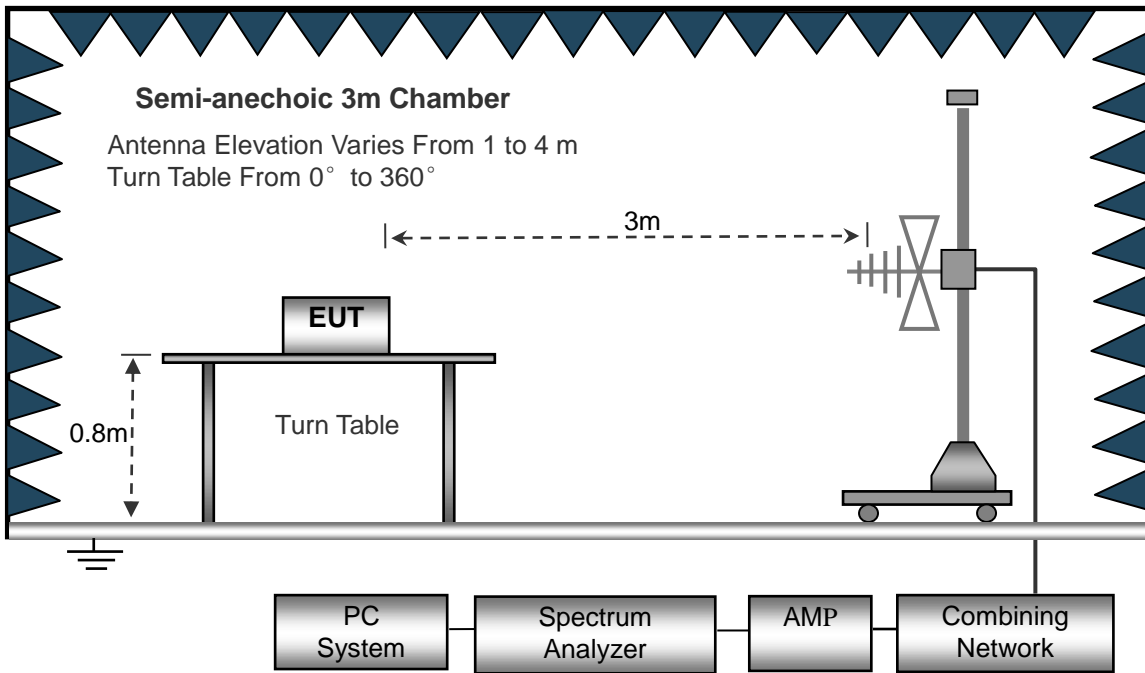

The test setup for emission measurement above 1GHz.

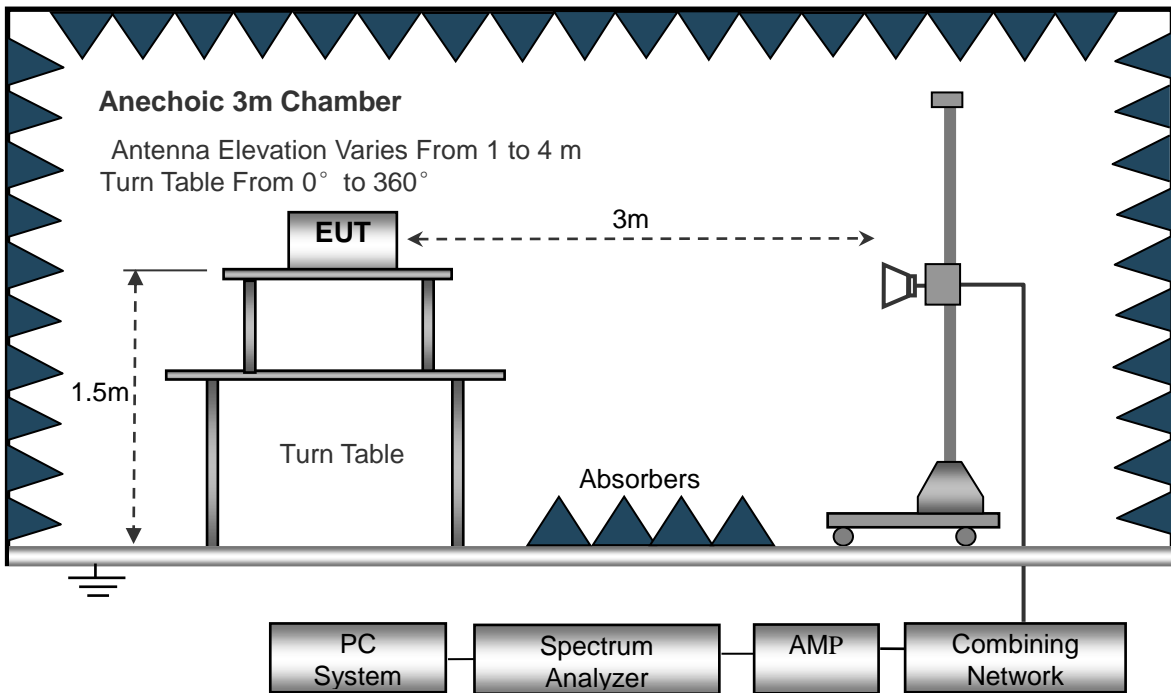

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

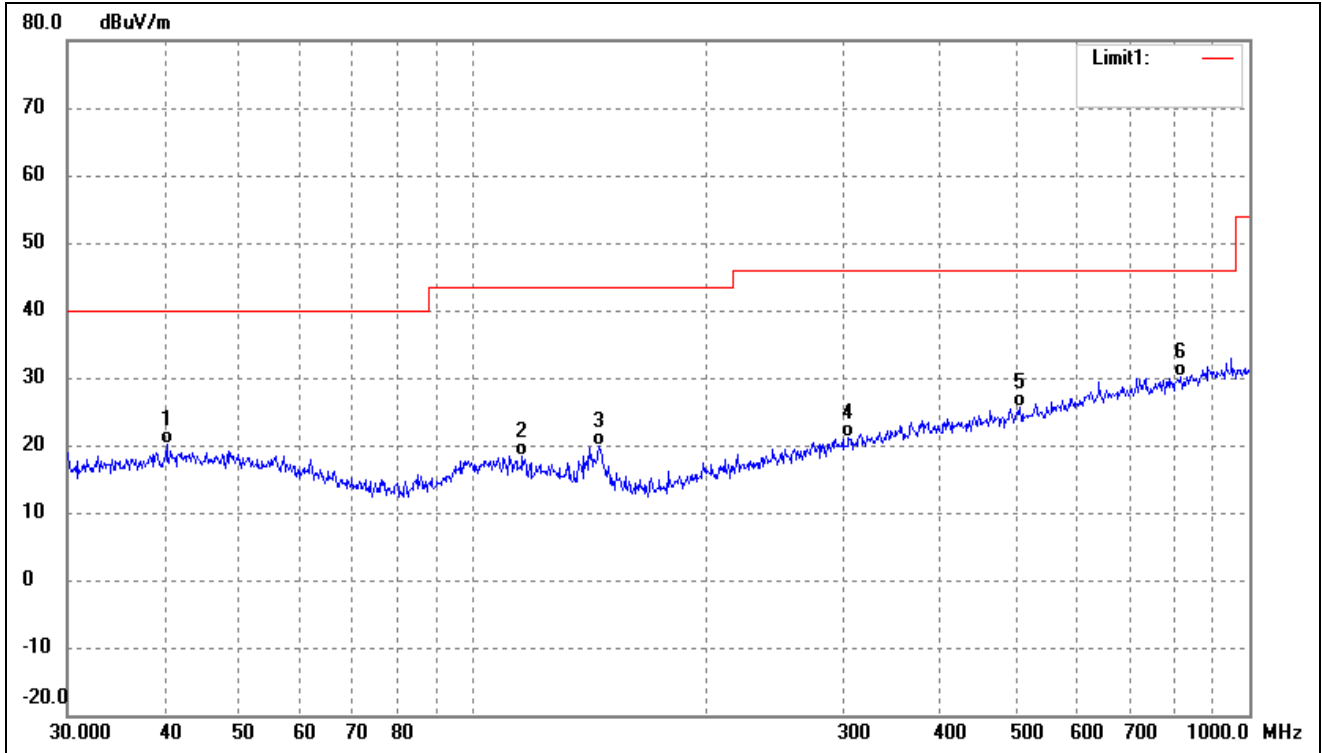


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.2757	27.83	-7.79	20.04	40.00	-19.96	-	-	QP
2	115.7256	27.43	-9.07	18.36	43.50	-25.14	-	-	QP
3	145.3506	31.99	-12.00	19.99	43.50	-23.51	-	-	QP
4	304.6100	26.46	-5.28	21.18	46.00	-24.82	-	-	QP
5	506.4791	27.81	-2.27	25.54	46.00	-20.46	-	-	QP
6	815.9678	27.59	2.46	30.05	46.00	-15.95	-	-	QP

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

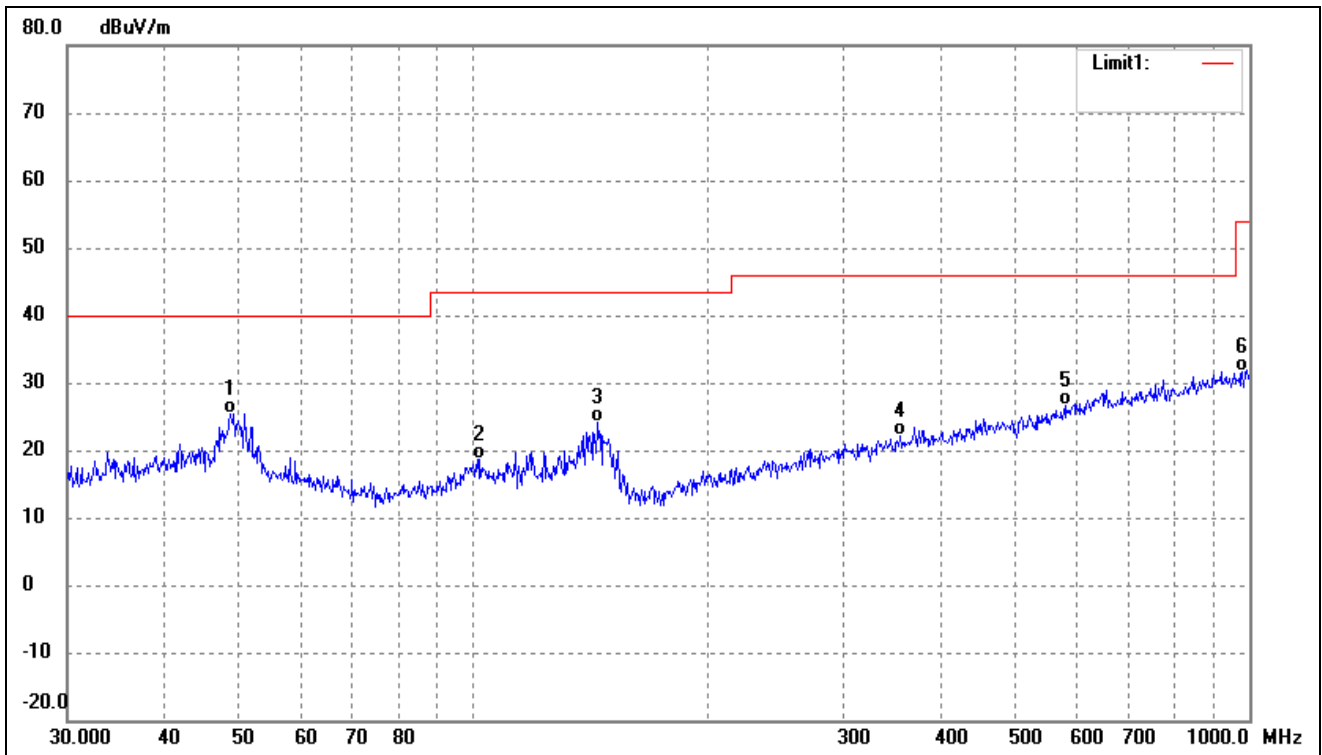


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.6719	33.37	-7.94	25.43	40.00	-14.57	-	-	QP
2	102.0014	27.18	-8.64	18.54	43.50	-24.96	-	-	QP
3	144.8418	36.24	-12.00	24.24	43.50	-19.26	-	-	QP
4	355.4273	26.42	-4.39	22.03	46.00	-23.97	-	-	QP
5	578.6699	27.48	-0.77	26.71	46.00	-19.29	-	-	QP
6	979.1804	27.22	4.47	31.69	54.00	-22.31	-	-	QP

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

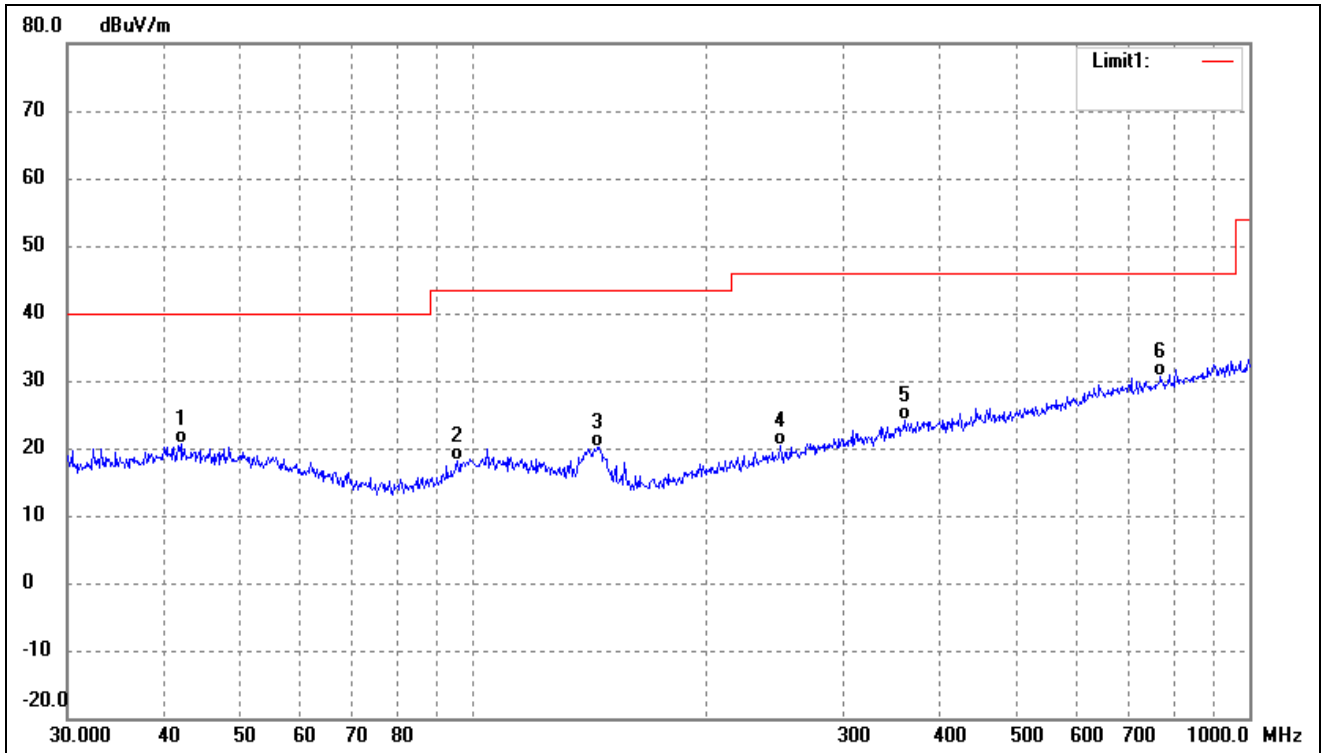


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	28.52	-7.81	20.71	40.00	-19.29	-	-	QP
2	95.4270	28.01	-9.92	18.09	43.50	-25.41	-	-	QP
3	144.8418	32.25	-12.00	20.25	43.50	-23.25	-	-	QP
4	248.5519	27.41	-7.14	20.27	46.00	-25.73	-	-	QP
5	359.1860	28.48	-4.32	24.16	46.00	-21.84	-	-	QP
6	768.7482	28.78	1.86	30.64	46.00	-15.36	-	-	QP

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

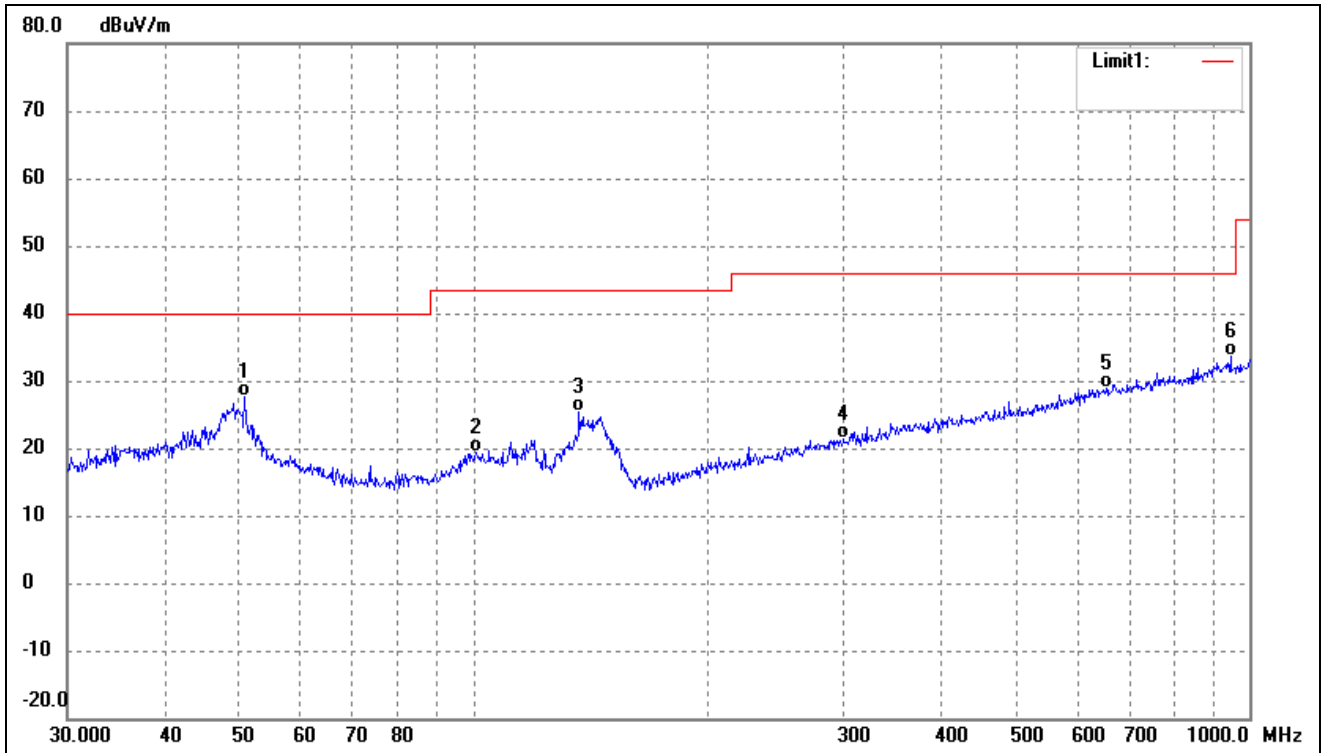


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	35.77	-8.09	27.68	40.00	-12.32	-	-	QP
2	100.9340	27.92	-8.64	19.28	43.50	-24.22	-	-	QP
3	136.9392	36.99	-11.64	25.35	43.50	-18.15	-	-	QP
4	300.3673	26.63	-5.35	21.28	46.00	-24.72	-	-	QP
5	654.2318	28.34	0.48	28.82	46.00	-17.18	-	-	QP
6	945.4399	29.40	4.22	33.62	46.00	-12.38	-	-	QP

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

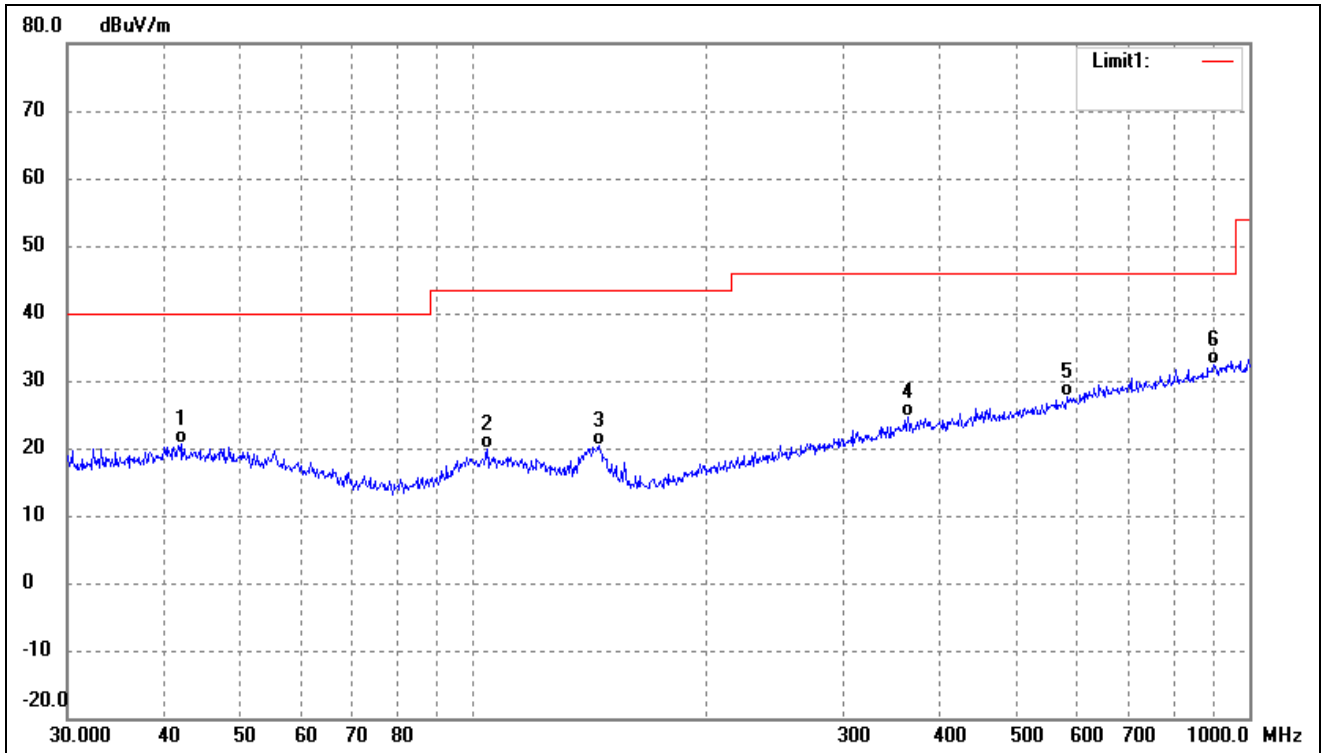

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.0066	28.52	-7.81	20.71	40.00	-19.29	-	-	QP
2	104.1701	28.50	-8.65	19.85	43.50	-23.65	-	-	QP
3	145.3506	32.33	-12.00	20.33	43.50	-23.17	-	-	QP
4	362.9845	28.94	-4.26	24.68	46.00	-21.32	-	-	QP
5	582.7425	28.32	-0.69	27.63	46.00	-18.37	-	-	QP
6	900.1474	28.40	3.90	32.30	46.00	-13.70	-	-	QP

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

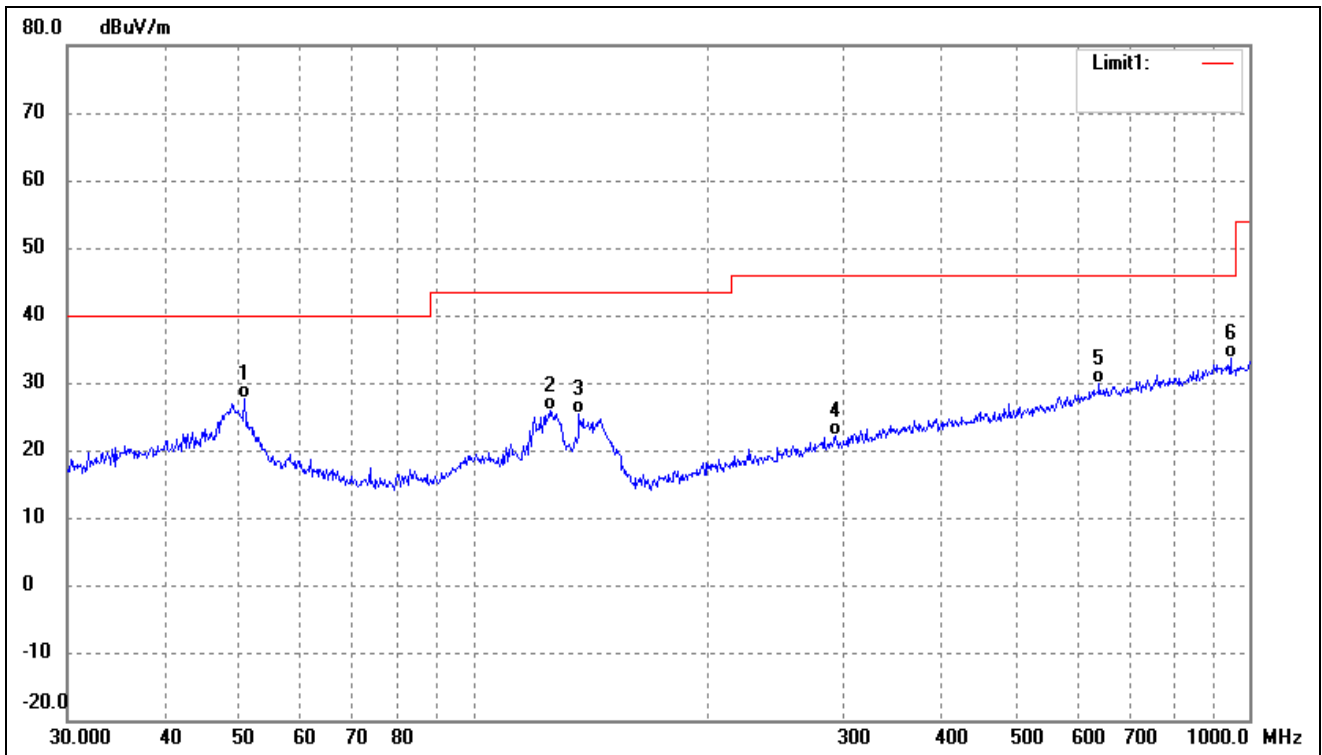

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	35.77	-8.09	27.68	40.00	-12.32	-	-	QP
2	125.4457	36.18	-10.30	25.88	43.50	-17.62	-	-	QP
3	136.9392	36.99	-11.64	25.35	43.50	-18.15	-	-	QP
4	293.0842	27.69	-5.59	22.10	46.00	-23.90	-	-	QP
5	640.6110	29.66	0.28	29.94	46.00	-16.06	-	-	QP
6	945.4399	29.40	4.22	33.62	46.00	-12.38	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2406MHz							
4812	53.69	-5.64	48.05	74	-25.95	H	PK
4812	47.85	-5.64	42.21	54	-11.79	H	AV
7218	49.40	-1.20	48.20	74	-25.80	H	PK
7218	42.39	-1.20	41.19	54	-12.81	H	AV
4812	51.24	-5.64	45.60	74	-28.40	V	PK
4812	47.22	-5.64	41.58	54	-12.42	V	AV
7218	49.77	-1.20	48.57	74	-25.43	V	PK
7218	43.84	-1.20	42.64	54	-11.36	V	AV
Middle Channel-2440MHz							
4880	51.69	-5.45	46.24	74	-27.76	H	PK
4880	48.97	-5.45	43.52	54	-10.48	H	AV
7320	51.78	-1.18	50.60	74	-23.40	H	PK
7320	41.71	-1.18	40.53	54	-13.47	H	AV
4880	50.33	-5.45	44.88	74	-29.12	V	PK
4880	45.56	-5.45	40.11	54	-13.89	V	AV
7320	49.48	-1.18	48.30	74	-25.70	V	PK
7320	43.04	-1.18	41.86	54	-12.14	V	AV
High Channel-2472MHz							
4944	55.08	-5.28	49.80	74	-24.20	H	PK
4944	48.46	-5.28	43.18	54	-10.82	H	AV
7416	49.69	-1.16	48.53	74	-25.47	H	PK
7416	43.50	-1.16	42.34	54	-11.66	H	AV
4944	51.40	-5.28	46.12	74	-27.88	V	PK
4944	47.24	-5.28	41.96	54	-12.04	V	AV
7416	52.94	-1.16	51.78	74	-22.22	V	PK
7416	42.90	-1.16	41.74	54	-12.26	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247 (d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100kHz.
4. Set VBW \geq 300kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding

restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


8.3 Summary of Test Results/Plots

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

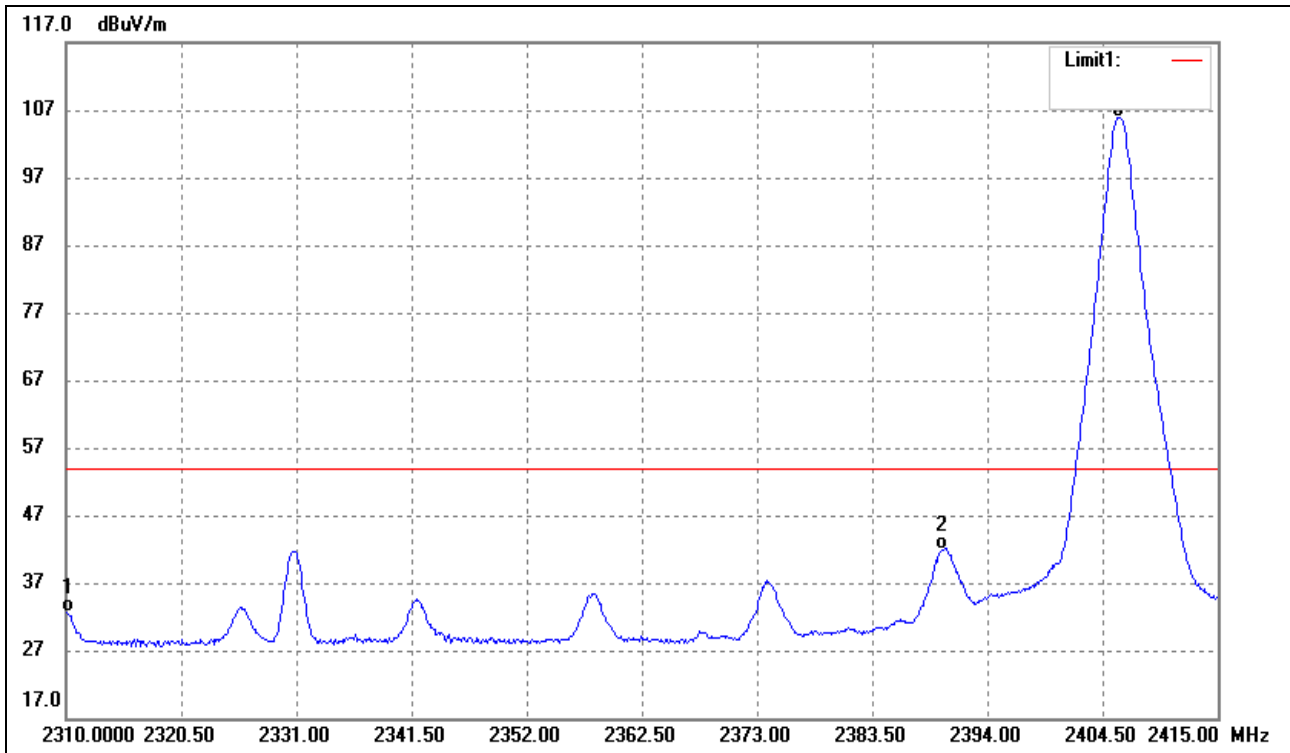

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.70	-11.07	32.63	54.00	-21.37	Average Detector
	2310.000	69.44	-11.07	58.37	74.00	-15.63	Peak Detector
2	2390.000	52.75	-10.89	41.86	54.00	-12.14	Average Detector
	2390.000	82.91	-10.89	72.02	74.00	-1.98	Peak Detector
3	2405.970	116.78	-10.85	105.93	/	/	Average Detector
	2405.655	118.02	-10.85	107.17	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

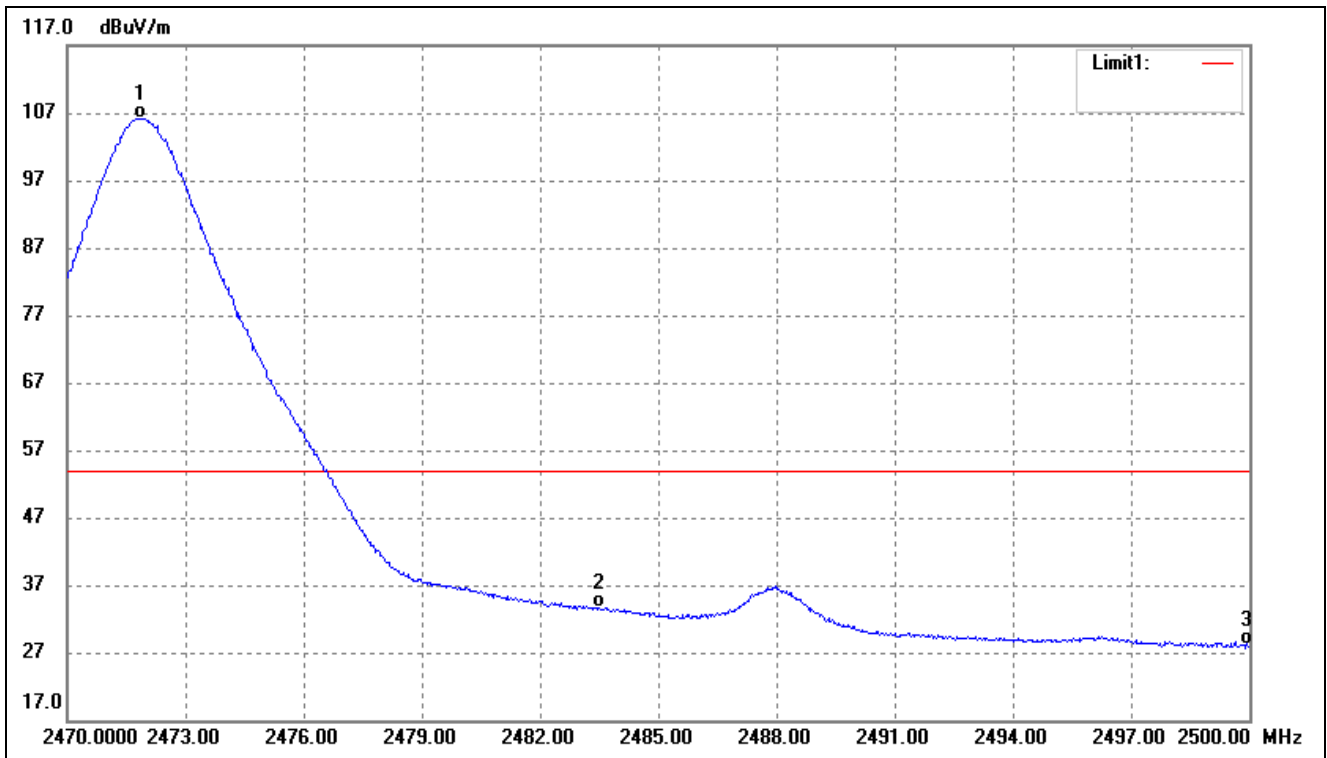

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2471.860	116.93	-10.71	106.22	/	/	Average Detector
	2472.220	117.38	-10.71	106.67	/	/	Peak Detector
2	2483.500	44.27	-10.69	33.58	54.00	-20.42	Average Detector
	2483.500	82.13	-10.69	71.44	74.00	-2.56	Peak Detector
3	2500.000	38.66	-10.65	28.01	54.00	-25.99	Average Detector
	2500.000	76.70	-10.65	66.05	74.00	-7.95	Peak Detector

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

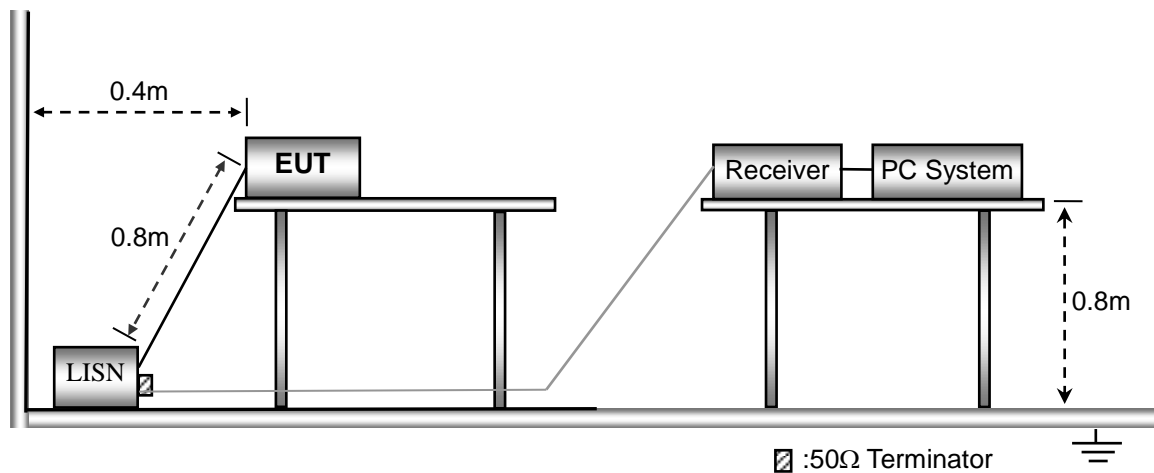


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

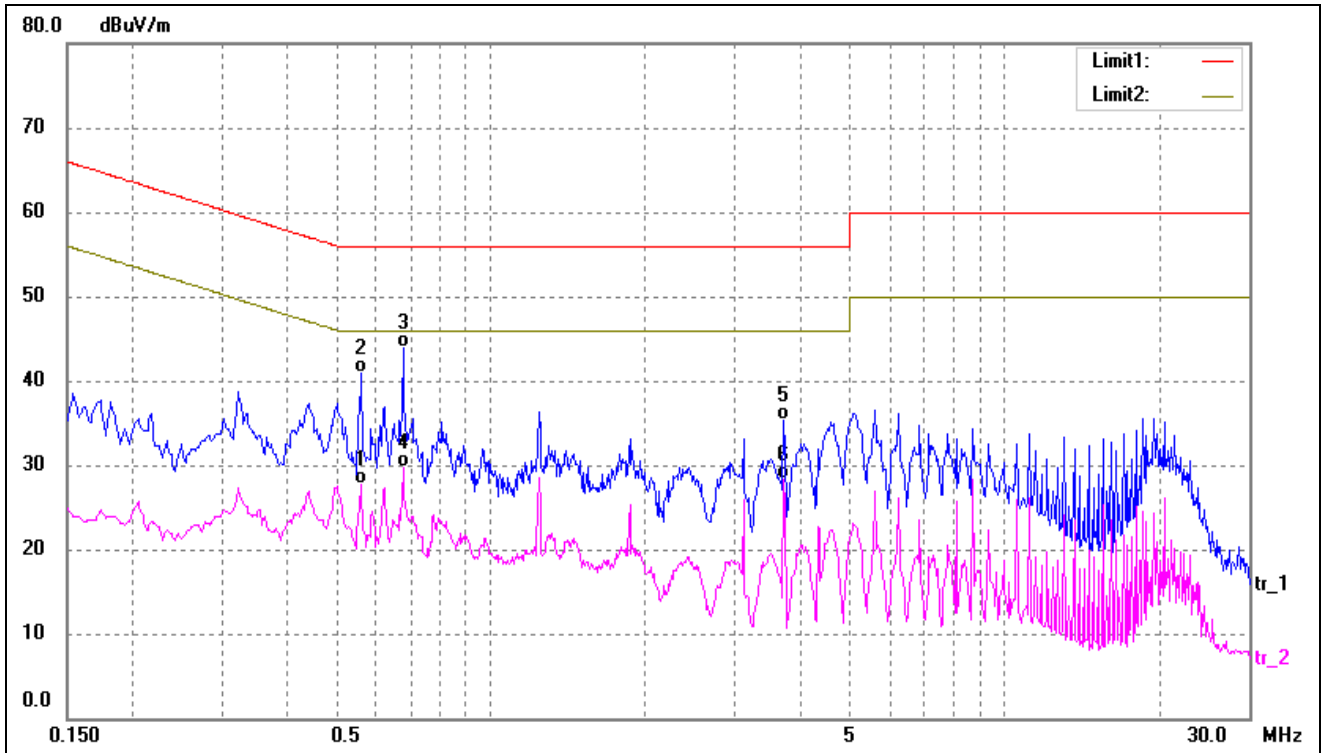

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.5580	17.57	10.21	27.78	46.00	-18.22	AVG
2	0.5620	30.72	10.21	40.93	56.00	-15.07	QP
3*	0.6780	33.64	10.20	43.84	56.00	-12.16	QP
4	0.6780	19.46	10.20	29.66	46.00	-16.34	AVG
5	3.7380	24.94	10.30	35.24	56.00	-20.76	QP
6	3.7380	17.95	10.30	28.25	46.00	-17.75	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

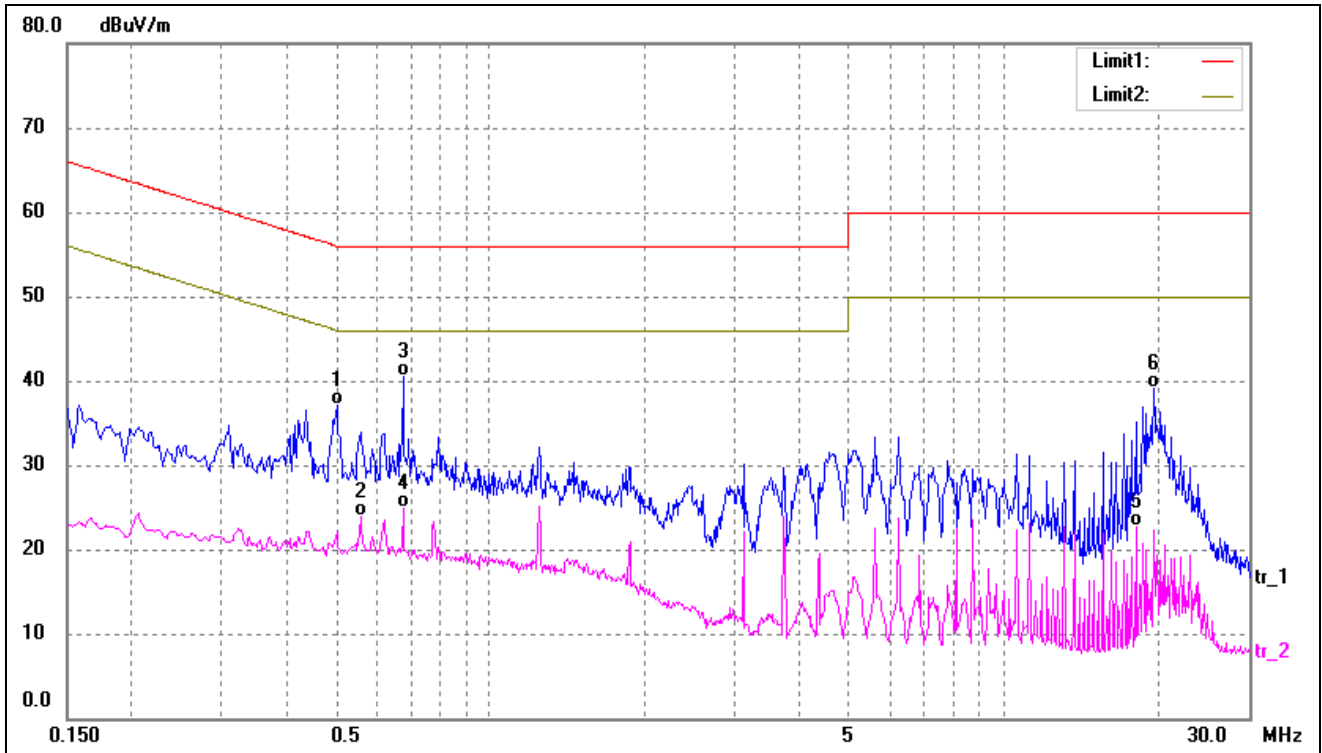

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.5020	26.94	10.22	37.16	56.00	-18.84	QP
2	0.5580	13.72	10.21	23.93	46.00	-22.07	AVG
3*	0.6780	30.30	10.20	40.50	56.00	-15.50	QP
4	0.6780	14.63	10.20	24.83	46.00	-21.17	AVG
5	18.0660	12.39	10.32	22.71	50.00	-27.29	AVG
6	19.6220	28.73	10.36	39.09	60.00	-20.91	QP




APPENDIX SUMMARY

Project No.	WTX22X07152726W	Test Engineer	BAIdi
Start date	2022/8/2	Finish date	2022/8/3
Temperature	24.8°C	Humidity	60%
RF specifications	2.4GHz		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant




APPENDIX A

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(2.4GHz)	Low	3.24	8
	Middle	4.58	8
	High	4.44	8
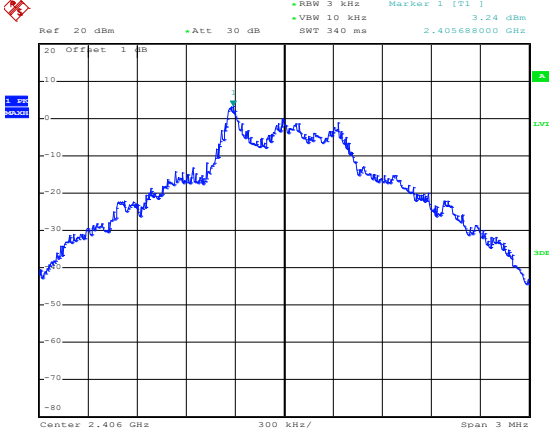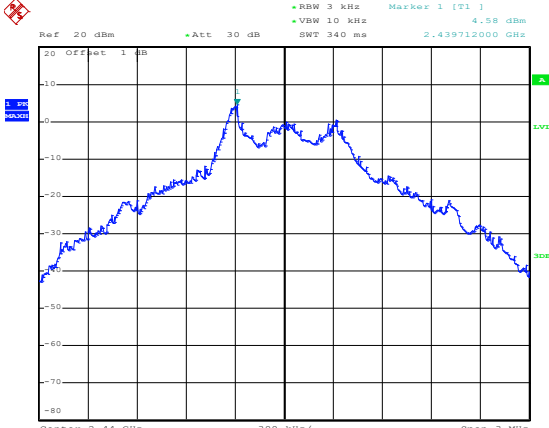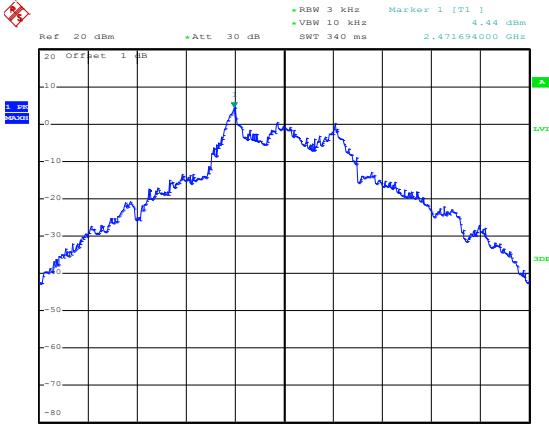
<p>Low</p>	 <p>Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 340 ms Marker 1 [T1] 3.24 dBm 2.405688000 GHz</p> <p>Center 2.406 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:18:37</p>
<p>Middle</p>	 <p>Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 340 ms Marker 1 [T1] 4.58 dBm 2.439712000 GHz</p> <p>Center 2.44 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:26:12</p>
<p>High</p>	 <p>Ref 20 dBm Att 30 dB RBW 3 kHz VBW 10 kHz SWT 340 ms Marker 1 [T1] 4.44 dBm 2.471694000 GHz</p> <p>Center 2.472 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:27:28</p>




APPENDIX B

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(2.4GHz)	Low	828	≥500
	Middle	822	≥500
	High	834	≥500
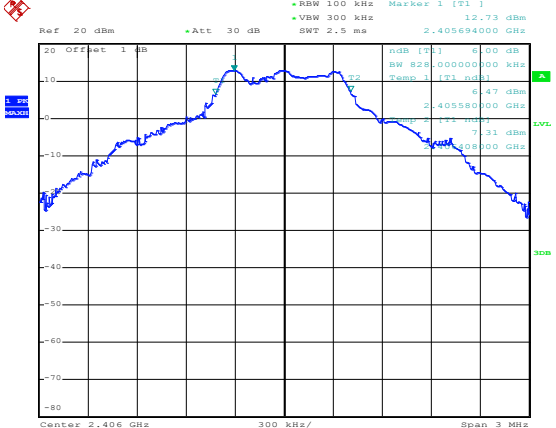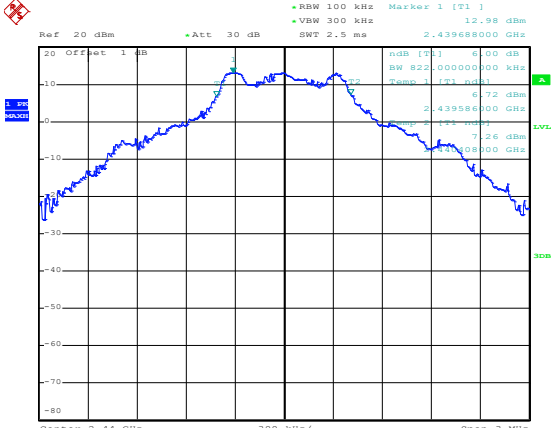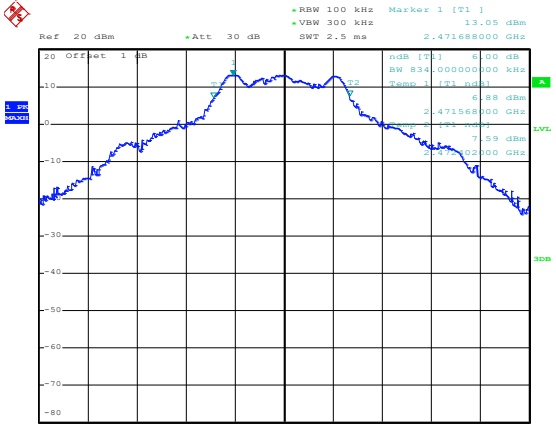
<p style="text-align: center;">Low</p>	 <p>Ref: 20 dBm Att: 30 dB Marker 1 [T1] 12.73 dBm RBW 100 kHz VBW 300 kHz SWT 2.5 ms 2.405694000 GHz</p> <p>Offset 1 dB n dB [T1] 6.00 dB BW 828.000000000 kHz Temp 1 [T1] n dB 6.47 dBm 2.405550000 GHz 7.31 dBm 2.408000000 GHz</p> <p>Center 2.406 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:15:57</p>
<p style="text-align: center;">Middle</p>	 <p>Ref: 20 dBm Att: 30 dB Marker 1 [T1] 12.98 dBm RBW 100 kHz VBW 300 kHz SWT 2.5 ms 2.439686000 GHz</p> <p>Offset 1 dB n dB [T1] 6.00 dB BW 822.000000000 kHz Temp 1 [T1] n dB 6.72 dBm 2.439586000 GHz 7.26 dBm 2.441000000 GHz</p> <p>Center 2.44 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:15:37</p>
<p style="text-align: center;">High</p>	 <p>Ref: 20 dBm Att: 30 dB Marker 1 [T1] 13.05 dBm RBW 100 kHz VBW 300 kHz SWT 2.5 ms 2.471689000 GHz</p> <p>Offset 1 dB n dB [T1] 6.00 dB BW 834.000000000 kHz Temp 1 [T1] n dB 6.88 dBm 2.471569000 GHz 7.59 dBm 2.474000000 GHz</p> <p>Center 2.472 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 2.AUG.2022 17:16:30</p>




APPENDIX C




RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
GFSK(2.4GHz)	Low	11.92	30.00
	Middle	13.02	30.00
	High	13.37	30.00
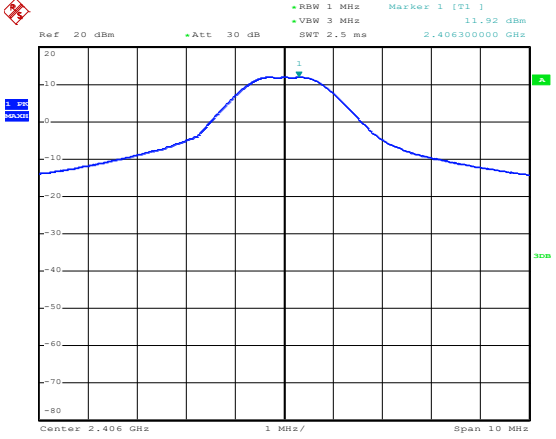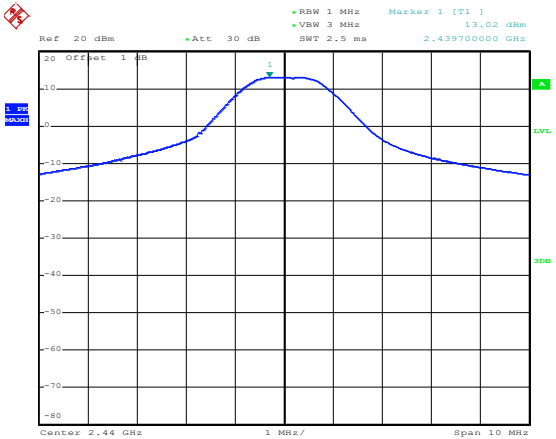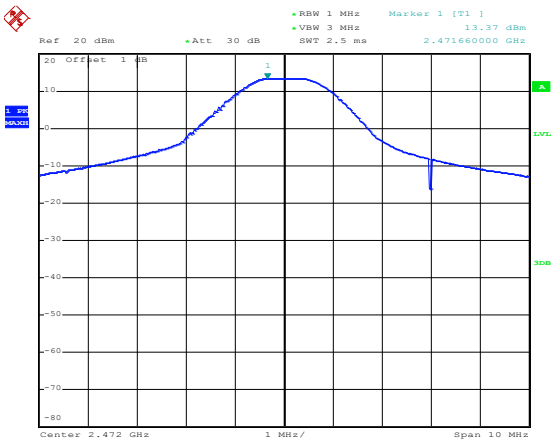
<p style="text-align: center;">Low</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz Marker 1 [T1] 11.92 dBm VBW 3 MHz SWT 2.5 ms 2.406300000 GHz</p> <p>Center 2.406 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 2.AUG.2022 13:11:39</p>
<p style="text-align: center;">Middle</p>	 <p>Ref 20 dBm Offset 1 dB +Att 30 dB RBW 1 MHz Marker 1 [T1] 13.02 dBm VBW 3 MHz SWT 2.5 ms 2.439700000 GHz</p> <p>Center 2.44 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 2.AUG.2022 15:23:56</p>
<p style="text-align: center;">High</p>	 <p>Ref 20 dBm Offset 1 dB +Att 30 dB RBW 1 MHz Marker 1 [T1] 13.37 dBm VBW 3 MHz SWT 2.5 ms 2.471600000 GHz</p> <p>Center 2.472 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 2.AUG.2022 16:01:31</p>

APPENDIX D

Conducted Out of Band Emissions

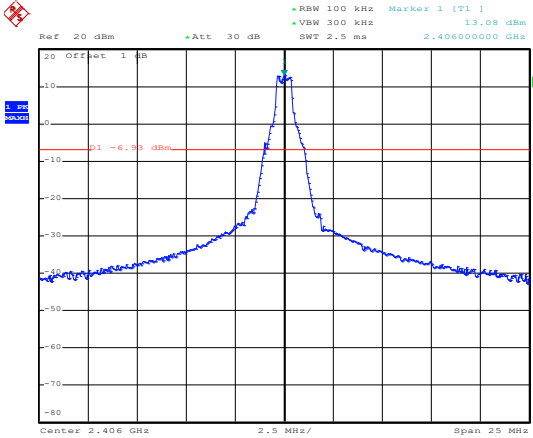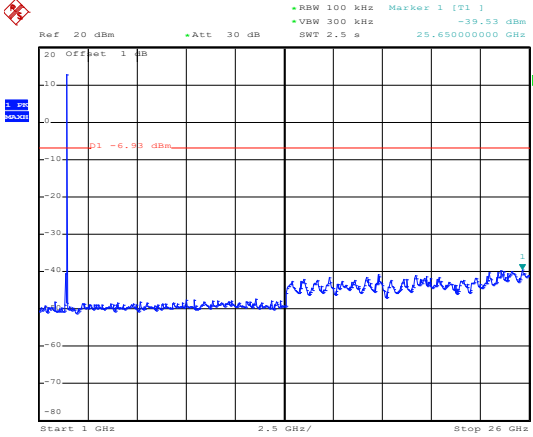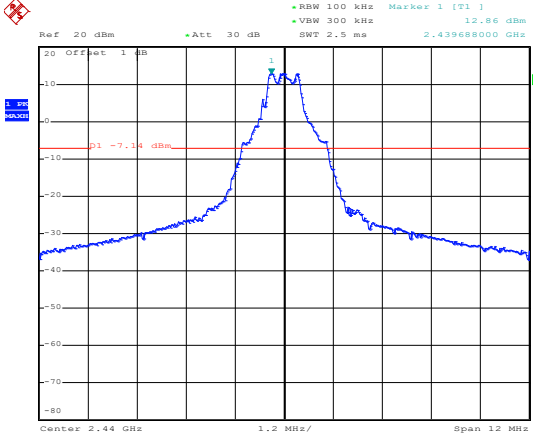Low	 <p>Date: 2.AUG.2022 17:37:07</p>
	 <p>Date: 2.AUG.2022 17:37:45</p>
Middle	 <p>Date: 2.AUG.2022 17:40:02</p>

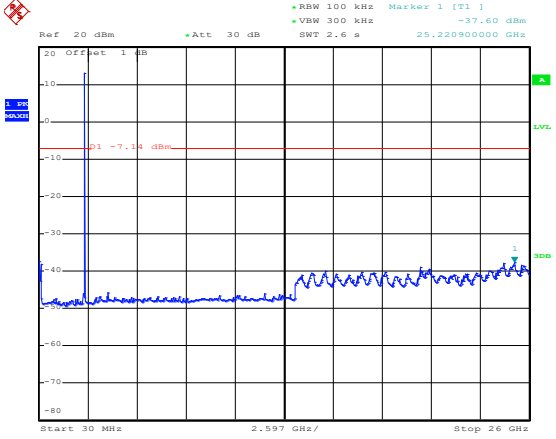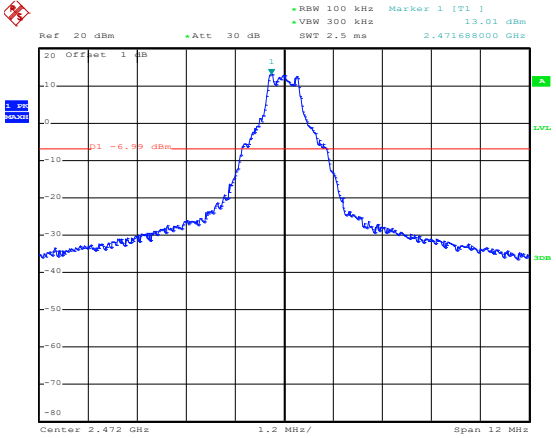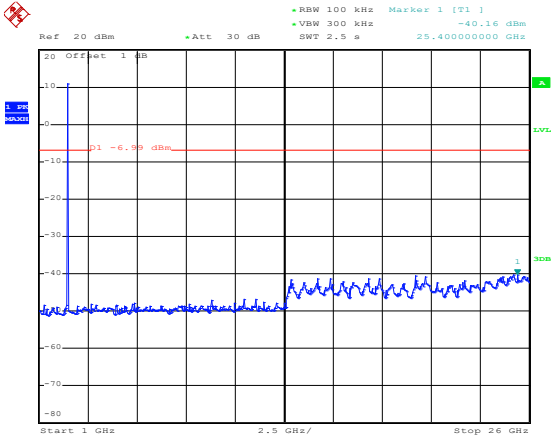	 <p>Date: 2.AUG.2022 18:06:47</p>
High	 <p>Date: 2.AUG.2022 18:10:28</p>
	 <p>Date: 2.AUG.2022 18:10:50</p>

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******