

# FCC Test Report

# Report No.: AGC11476231201FR01

FCC ID	:	2AYWU-RH08
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Walkie Talkie
BRAND NAME	:	PROHEAR, ZOHAN, ZOHEAR, KAYNN, HOCAZOR
MODEL NAME	:	RH08
APPLICANT	:	Hangzhou ZH Tech Co., Ltd
DATE OF ISSUE	:	Jan. 23, 2024
STANDARD(S)	:	FCC Part 95 Subpart B
<b>REPORT VERSION</b>	:	V1.0







# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jan. 23, 2024	Valid	Initial Release	



# **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	
2.2 Test Frequency List	7
2.3 Related Submittal(S) / Grant (S)	
2.4 Test Methodology	
2.5 Calculation of Emission Indicators	
2.6 Special Accessories	
2.7 Equipment Modifications	
2.8 Antenna Requirement	
3. Test Environment	
3.1 Address Of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Frequency Stability	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup	
6.4 Measurement Result	
7. 26dB Emission Bandwidth and 99% Occupied Bandwidth	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup	
7.4 Measurement Results	
8. Spurious Radiated Emission	
8.1 Provisions Applicable	21
8.2 Measurement Procedure	21
8.3 Measurement Setup	
8.4 Measurement Results	
8.5 Emission Mask Measurement Part	
9 Maximum Transmitter Power	29



## Report No.: AGC11476231201FR01 Page 4 of 35

<ul> <li>9.2 Measurement Procedure</li> <li>9.3 Measurement Setup</li> <li>9.4 Measurement Result</li> </ul>	29
9.4 Measurement Result	29
	29
10 Medulation Characteristics	31
10. Modulation Characteristics	32
10.1 Provisions Applicable	32
10.2 Measurement Procedure	32
10.3 Measurement Setup	32
10.4 Measurement Results	33
Appendix I: Photographs of Test Setup	35
Appendix II: Photographs of Test EUT	35



# 1. General Information

Applicant	Hangzhou ZH Tech Co., Ltd
Address	Floor 4, 6 ShunLe Road, Changle Industrial Park, JingShan Town, Yuhang District, Hangzhou City, Zhejiang Province, China
Manufacturer	Hangzhou ZH Tech Co., Ltd
Address	Floor 4, 6 ShunLe Road, Changle Industrial Park, JingShan Town, Yuhang District, Hangzhou City, Zhejiang Province, China
Factory	Hangzhou ZH Tech Co., Ltd
Address	Floor 4, 6 ShunLe Road, Changle Industrial Park, JingShan Town, Yuhang District, Hangzhou City, Zhejiang Province, China
Product Designation	Walkie Talkie
Brand Name	PROHEAR, ZOHAN, ZOHEAR, KAYNN, HOCAZOR
Test Model	RH08
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Jan. 15, 2024
Date of Test	Jan. 15, 2024~Jan. 23, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-FRS-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Bibo zhang

Bibo Zhang (Project Engineer)

Jan. 23, 2024

**Reviewed By** 

Calvin Liu (Reviewer)

Jan. 23, 2024

Approved By

2ha

Max Zhang Authorized Officer

Jan. 23, 2024



# 2. Product Information

# 2.1 Product Technical Description

Communication Type	Voice / Tone only		
	462.5625 - 462.7125MHz (1~7 channel)		
Operation Frequency Range	467.5625 - 467.7125MHz (8~14 channel)		
	462.5500 - 462.7250MHz (15~22 channel)		
Hardware Version	DUC350-V1.2		
Software Version	V1.0		
Modulation Type	FM		
Channel Separation	12.5 kHz		
Emission Bandwidth	11.02 kHz		
Emission Designator	11K0F3E		
Number of Channels:	22 Channels		
Rated Output Power	0.5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)		
Maximum Transmitter Power	26.85dBm		
Antenna Designation	Inseparable		
Antenna Gain	0.5dBi		
Frequency Tolerance	1.093pm		
Power Supply	DC 3.7V by Battery		



## 2.2 Test Frequency List

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation		
1 MHz or less 1		Middle		
1 MHz to 10 MHz	2	1 near top and 1 near bottom		
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom		

Operation Frequency Each of Channel							
	FRS	FRS					
Channel	Frequency	Channel Frequency		Channel	Frequency		
1	462.5625 MHz	8	467.5625 MHz	15	462.5500 MHz		
2	462.5875 MHz	9	467.5875 MHz	16	462.5750 MHz		
3	462.6125 MHz	10	467.6125 MHz	17	462.6000 MHz		
4	462.6375 MHz	11	467.6375 MHz	18	462.6250 MHz		
5	462.6625 MHz	12	467.6625 MHz	19	462.6500 MHz		
6	462.6875 MHz	13	467.6875 MHz	20	462.6750 MHz		
7	462.7125 MHz	14	467.7125 MHz	21	462.7000 MHz		
		22	462.7250 MHz				



# 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AYWU-RH08**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

# 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	Personal Radio Services
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01

# 2.5 Calculation of Emission Indicators

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

# For FM Mode (Channel Spacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2\*(3.0 kHz + 2.5 kHz) = 11 kHz = 11K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

# 2.6 Special Accessories

Not available for this EUT intended for grant.

## **2.7 Equipment Modifications**

Not available for this EUT intended for grant.



#### 2.8 Antenna Requirement

#### Excerpt from §95.587 of the FCC Rules/Regulations:

The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.
- The antenna of this device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion: The unit complies with the requirement of §95.587.



# 3. Test Environment

# 3.1 Address Of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

# 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

## A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



# **3.3 Environmental Conditions**

	Normal Conditions	Extreme Conditions		
Temperature range (°C)	15 - 35	-20 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply	DC 3.7V	LV DC 3.15V/DC 4.2V		
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.				

## **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty
Frequency stability	±0.5%
Transmitter power conducted	±0.8dB
Transmitter power Radiated	±1.3dB
Conducted spurious emission 9kHz-40 GHz	±2.7dB
Conducted Emission	±3.2 dB
Radiated Emission below 1GHz	±3.9 dB
Radiated Emission above 1GHz	±4.8 dB
Occupied Channel Bandwidth	±2 %
FM deviation	±2 %
Audio level	±0.98dB
Low Pass Filter Response	±0.65dB
Modulation Limiting	0.42 %
Transient Frequency Behavior	6.8 %



# 3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-ER-E086	Spectrum Analyzer	KEYSIGHT	N9020A	MY53300860	2023-06-01	2024-05-31	
	AGC-EM-E002	Wireless Connectivity Tester	HP	8920B	US35010106	2023-06-02	2024-06-01	
$\square$	AGC-ER-E059	Signal Generator	Agilent	N5182B	MY53050647	2023-03-03	2024-03-02	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
$\square$	AGC-ER-E075	Small Environmental Tester	SH-242	ESPEC	93008290	2022-08-03	2024-08-02	
$\boxtimes$	AGC-EM-A007	30dB Attenuator	Weinachel	58-30-33	ML030	2023-06-01	2024-05-31	
$\boxtimes$	AGC-EM-E040	Directional coupler	Werlatone	C5571-10	99463	2022-03-10	2024-03-09	
$\boxtimes$		RF Connection Cable	N/A	1#	N/A	Each time	N/A	
$\boxtimes$		RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
	AGC-ER-E032	Universal Radio Communication Tester	R&S	CMW500	120909	2023-07-05	2024-07-04	
$\square$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\boxtimes$	AGC-EM-E005	Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	2023-01-05	2024-01-04	
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
$\boxtimes$	AGC-EM-E102	Broadband Ridged Horn Antenna	ETS	3117	00154520	2023-06-03	2024-06-02	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
	AGC-EM-E021	Pre-amplifier	MITEQ	AM-4A-000115	1465421	2022-06-08	2024-06-07	
$\boxtimes$	AGC-ER-E037	Signal Generator	Agilent	N5182A	MY50140530	2023-06-01	2024-05-31	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
$\boxtimes$	AGC-EM-A088	UHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31	
	AGC-EM-A089	VHF Filter	N/A	N/A	N/A	2023-06-01	2024-05-31	
	AGC-EM-E110	Low Pass Filter	N/A	N/A	N/A	2023-06-01	2024-05-31	



•	Test Software						
	Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
ľ	$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0	



# **4.System Test Configuration**

# 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

# 4.3 Configuration of Tested System

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable		
1	Adapter	HW-200440C00	Huawei	Input(AC):100V-240V 50/60Hz 2.4A Output(DC): 5V/3A	1.0m unshielded		
No.	Equipment	Model No.	Manufacturer	Specification Information	Cable		
1	Battery	N/A	N/A	DC 3.7V 1100mAh	N/A		



#### 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.567& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.575& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.575& 2.1047(a)	Audio Frequency Response	Pass
5	§95.573	26dB Emission Bandwidth	Pass
6	§2.1049	99% Occupied Bandwidth	Pass
7	§95.579& 2.1049	Emission Mask	Pass
8	§95.565& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.579& 2.1053	Spurious Radiated Emission	Pass



# 5. Description of Test Modes

The EUT (**Walkie Talkie**) has been tested under normal operating condition. (FRS TX) are chosen for testing at each channel separation.

No.	Test Mode Description	Channel Separation
1	FRS TX Channel 4	12.5 kHz
2	FRS TX Channel 11	12.5 kHz
3	FRS TX Channel 19	12.5 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details



# 6. Frequency Stability

# **6.1 Provisions Applicable**

Each FRS transmitter type must be designed such that the carrier frequencies remain within  $\pm 2.5$  parts-per-million (ppm) of the channel center frequencies specified in §95.563 during normal operating conditions.

## 6.2 Measurement Procedure


# 6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10<sup>°</sup>C decreased per stage until the lowest temperature -30<sup>°</sup>C is measured, record all measured frequencies on each temperature step.

# 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 3.7V
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

# 6.3 Measurement Setup

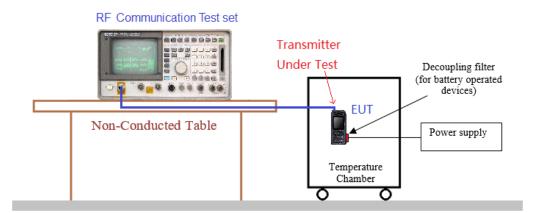



#### **6.4 Measurement Result**

12.5 kHz Channel Separation, FM modulation, Assigned Frequency For FRS							
Test conditions		F	1.1.1.11				
Voltage	Temp	Т	Limit (ppm)	Result			
(V)	(°C)	462.6375	467.6375	462.6500	(PP)		
	-30	0.535	0.682	0.714			
	-20	0.797	1.032	1.055			
	-10	0.912	1.056	0.513			
	0	0.834	1.016	1.053			
3.7	10	0.965	1.071	0.584			
	20	1.093	0.520	0.955	2.5	Pass	
	30	1.044	0.613	0.909			
	40	0.516	0.786	0.595			
	50	0.838	0.949	0.822			
4.20	20	0.552	0.871	0.645			
3.15	20	0.539	1.037	0.780			



# 7. 26dB Emission Bandwidth and 99% Occupied Bandwidth

# 7.1 Provisions Applicable

FCC Part 95.573: FRS: The authorized bandwidth for an FRS unit is 12.5 kHz.

Occupied Bandwidth (Section 2.1049, 95.573): The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

# 7.2 Measurement Procedure

- 1. The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.
- 2. Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
- 3. Spectrum set as follow:
- 4. Centre Frequency = Fundamental Frequency,
- 5. Span=50kHz for 12.5kHz channel spacing, RBW=300Hz, VBW=1kHz, Sweep = Auto,
- 6. Detector Function = Peak, Trace = Max hold
- 7. Set 99% Occupied Bandwidth and 26dB Emission Bandwidth.
- 8. Measure and record the results in the test report.

# 7.3 Measurement Setup






## 7.4 Measurement Results

Emission Bandwidth Measurement Result-FRS					
Operating Frequency	12.5 kHz Channel Separation				
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result	
462.6375 MHz	9.706 kHz	11.00 kHz	12.5 kHz	Pass	
462.6500 MHz	9.699 kHz	11.02 kHz	12.5 kHz	Pass	
467.6375 MHz	9.677 kHz	11.01 kHz	12.5 kHz	Pass	

Test plot as follows:

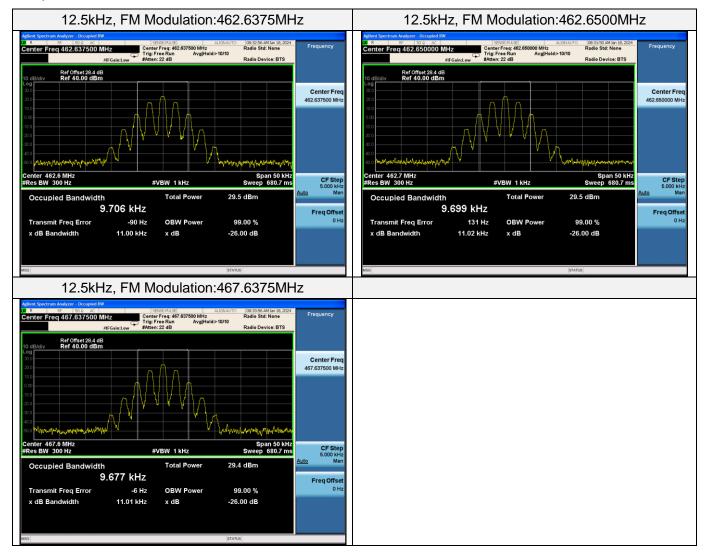



# 8. Spurious Radiated Emission

## 8.1 Provisions Applicable

Standard Applicable [FCC Part 95.579] According to FCC section 95.579, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) dB.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph. (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) 43 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 31.25 kHz

# 8.2 Measurement Procedure

- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (P<sub>r</sub>).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (P<sub>Mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P<sub>cl</sub>) ,the Substitution Antenna Gain


Any rep(Ga) and the Amplifier Gain (PAg) should be the correct after test having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excepting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




- 6) The measurement results are obtained as described below: Power(EIRP)=P<sub>Mea</sub> P<sub>Ag</sub> P<sub>cl</sub> G<sub>a</sub> The measurement results are amend as described below: Power(EIRP)=P<sub>Mea</sub> P<sub>cl</sub> G<sub>a</sub>
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel


# 8.3 Measurement Setup

# Radiated Emissions 30MHz to 1GHz Test setup

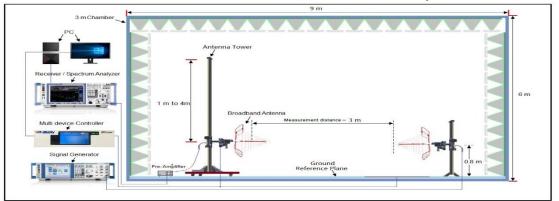


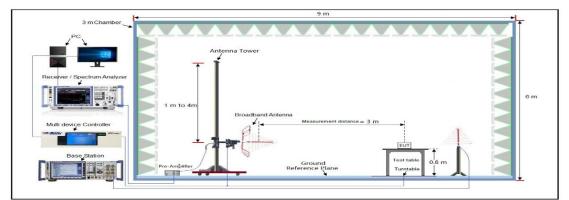

# **Radiated Emissions Above 1GHz Test setup**

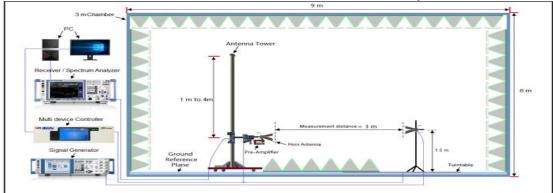



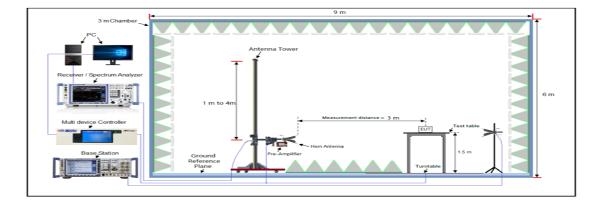


# **8.4 Measurement Results**

Preliminary calculation	Final Result	
At least 43+10 log (P) =43+10log (0.5) =39.99 (dB)	Limit=P- Preliminary calculation=26.99-39.99=-13 dBm	


1. Factor=Antenna Factor + Cable loss. (Below 1GHz)


2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)

3. Margin=Limit- Level







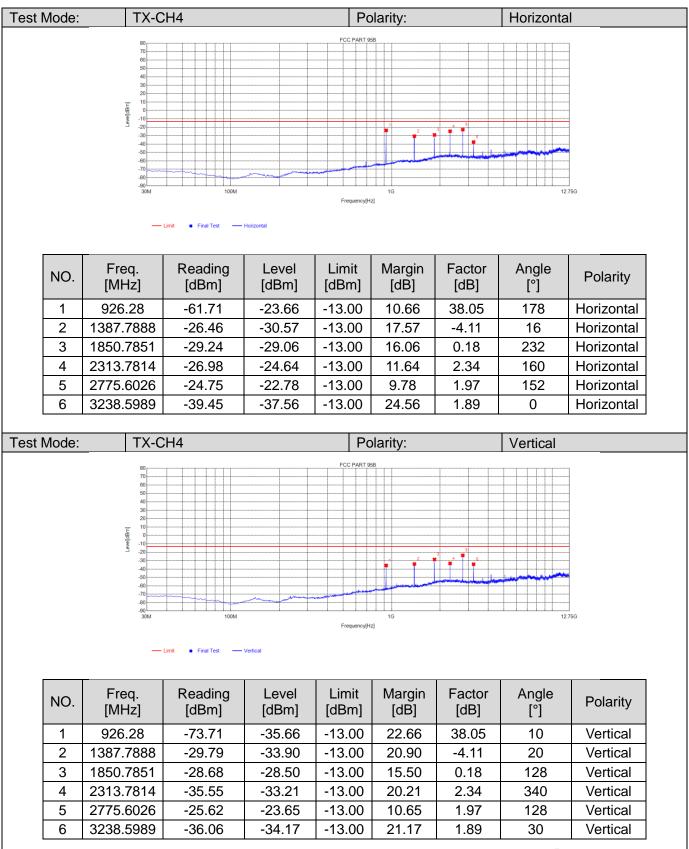






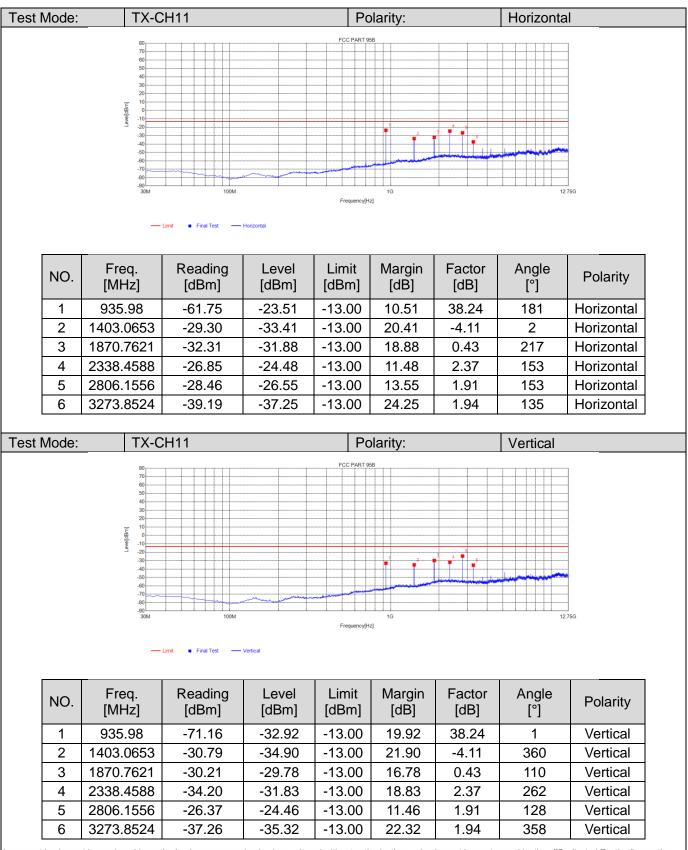





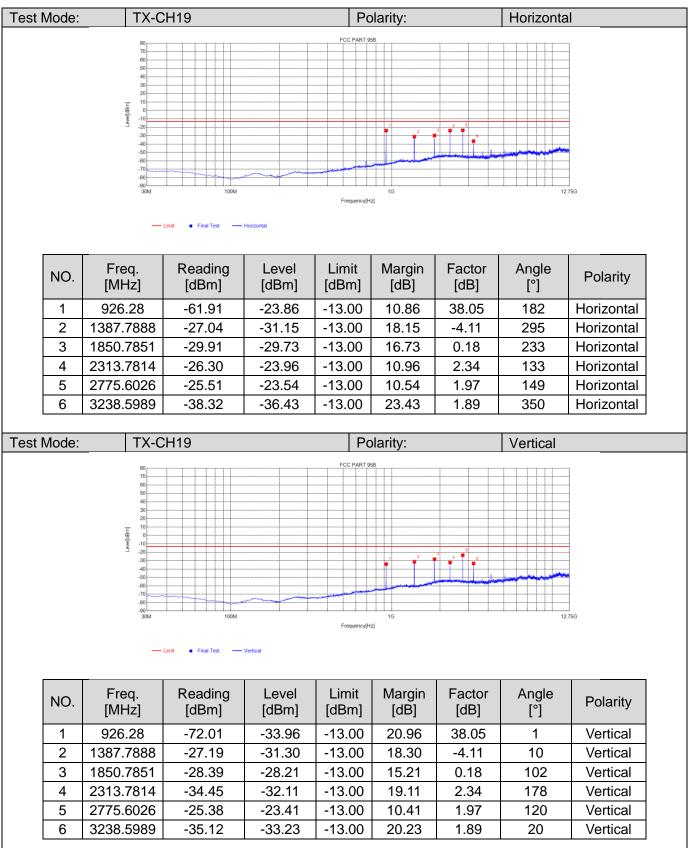




# 8.5 Emission Mask Measurement Part

The detailed procedure employed for Emission Mask measurements are specified as following:

-Connect the equipment as illustrated.


-Spectrum set as follow:

- 1. Centre frequency = fundamental frequency, Span=150kHz for 12.5 kHz , RBW=300Hz, VBW=1 kHz ;
- 2. Sweep = auto, Detector function = peak, Trace = max hold
- 3. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing). The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 5. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 6. Measure and record the results in the test report.

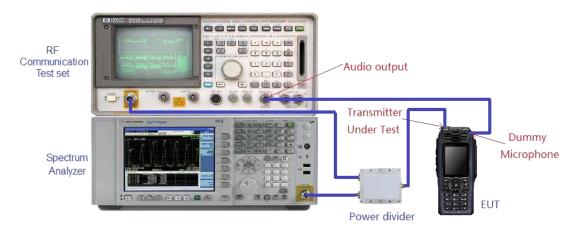



Test plot as follows:

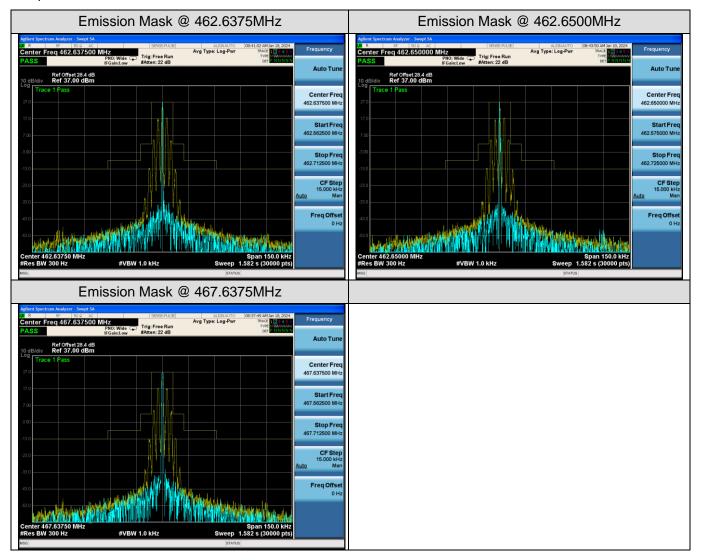



# 9. Maximum Transmitter Power

# 9.1 Provisions Applicable

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

# 9.2 Measurement Procedure


- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel

## 9.3 Measurement Setup


Effective Radiated Power:

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




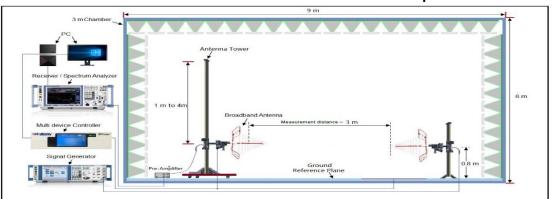


Radiated Emissions 30MHz to 1GHz Test setup

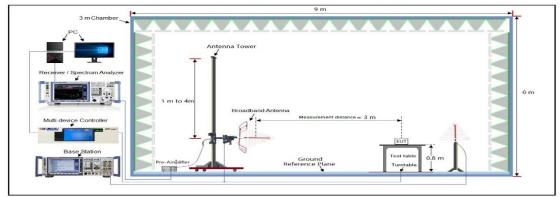

# **Radiated Emissions Above 1GHz Test setup**

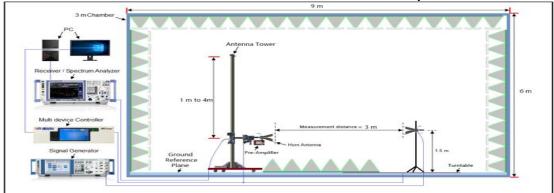

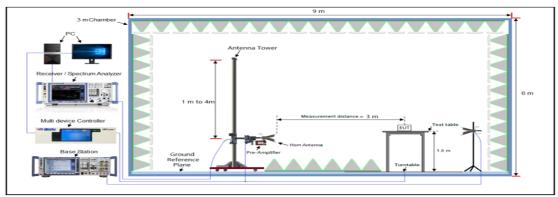

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



## 9.4 Measurement Result

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	ERP Result	ERP Result	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
	ChannelSeparation:12.5kHz								
462.6375	95.79	V	20.56	0.38	6.6	26.78	0.48	2.0	1.52
462.6375	95.67	Н	20.44	0.38	6.6	26.66	0.46	2.0	1.54
462.6500	95.86	V	20.63	0.38	6.6	26.85	0.48	2.0	1.52
462.6500	95.75	Н	20.52	0.38	6.6	26.74	0.47	2.0	1.53
467.6375	95.78	V	20.55	0.38	6.6	26.77	0.48	0.5	0.02
467.6375	95.64	Н	20.41	0.38	6.6	26.63	0.46	0.5	0.04

#### Note:

1. Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi)

2. The Ant. Gain including the correct factor 2.15

3. Margin (dB) = Limit(dBm)- Emission Level(dBm)



# **10. Modulation Characteristics**

# **10.1 Provisions Applicable**

According to FCC§2.1047 and §95.575, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

# **10.2 Measurement Procedure**


# Modulation Limit

- 1. Test layout and build equipment as shown below.
- 2. adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB).
- 3. Vary the input level from -20 to +20dB.
- 4. Record the frequency deviation obtained as a function of the input level.
- 5. Repeat step 2 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

# <u>Audio Frequency Response</u>

- 1. Test layout and build equipment as shown below.
- 2. Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- 3. Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- 4. Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 kHz reference).

## **10.3 Measurement Setup**

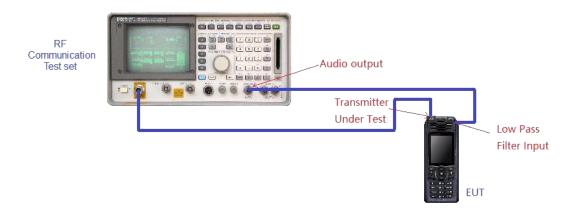




#### **10.4 Measurement Results**

#### A. Modulation Limit:

12.5kHz, FM modulation, Assigned Frequency:462.6500MHz						
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)		
-20	0.25	0.36	0.63	0.89		
-15	0.38	0.52	0.82	1.16		
-10	0.46	0.75	0.96	1.25		
-5	0.52	0.83	1.15	1.31		
0	0.63	0.89	1.23	1.35		
+5	0.74	1.02	1.25	1.4		
+10	0.82	1.11	1.31	1.49		
+15	0.86	1.22	1.35	1.52		
+20	0.81	1.21	1.29	1.45		

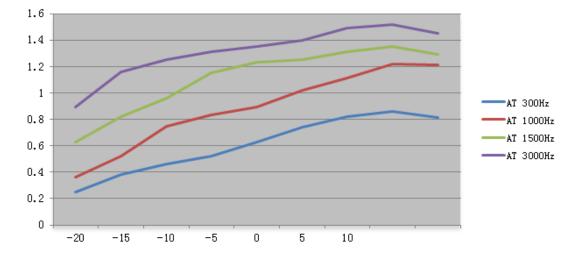


Note: All the modes had been tested, but only the worst data recorded in the report



## B. Audio Frequency Response:

12.5kl	12.5kHz, Analog modulation, Assigned Frequency:462.6500MHz					
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)				
100						
200						
300	0.18	-13.48				
400	0.29	-9.34				
500	0.36	-7.46				
600	0.44	-5.72				
700	0.58	-3.32				
800	0.63	-2.60				
900	0.76	-0.97				
1000	0.85	0.00				
1200	0.92	0.69				
1400	1.05	1.84				
1600	1.24	3.28				
1800	1.39	4.27				
2000	1.52	5.05				
2400	1.74	6.22				
2500	1.84	6.71				
2800	2.05	7.65				
3000	2.16	8.10				

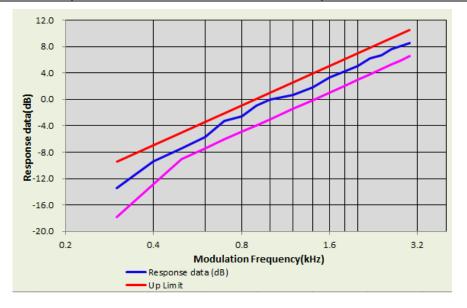

Note: All the modes had been tested, but only the worst data recorded in the report.



Report No.: AGC11476231201FR01 Page 35 of 35

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC11476231201AP01

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC11476231201AP02

-----End of Report-----



# Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.