



Prüfbericht-Nr.: <i>Test report no.:</i>	CN21KX7T 001	Auftrags-Nr.: <i>Order no.:</i>	168326740	Seite 1 von 23 <i>Page 1 of 23</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-07-12	
Auftraggeber: <i>Client:</i>	Luxshare Precision Industry Co., Ltd. Floor 2, Block A, Sanyo New Industrial Area, West Haoyi Community, Shajing Subdistrict Office, Bao'an District, Shenzhen, P. R. China			
Prüfgegenstand: <i>Test item:</i>	ZENS Fast Dual Wireless Charger			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	ZENDC05B/00, ZENDC05W/00 (Trademark: zens)			
Auftrags-Inhalt: <i>Order content:</i>	Type test			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2: Subpart J Section 1.1310			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-07-12	Refer to photos document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003088752-001~004			
Prüfzeitraum: <i>Testing period:</i>	2021-07-13 – 2021-07-29			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i> 2021-09-01				
	Signed by: Alex Lan		Signed by: Winnie Hou	
Stellung / Position	Senior Project Engineer	Stellung / Position	Department Manager	
Sonstiges / Other:	This test report is for WPT (Charging base) part. FCC ID: 2AYYSZEDC05			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 2 von 23
Page 2 of 23

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 20dB BANDWIDTH

RESULT: Pass

5.1.3 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.4 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY.....	6
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS.....	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES FOR WPT	12
5.1.1	Antenna Requirement.....	12
5.1.2	20dB Bandwidth.....	13
5.1.3	Radiated Spurious Emission.....	14
5.1.4	Conducted Emission on AC Mains.....	20
6	PHOTOGRAPHS OF THE TEST SET-UP.....	23
7	LIST OF TABLES	23

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 4 von 23
Page 4 of 23

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix A: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Registration No.: 694916

IC Registration No.: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing				
Description	Manufacturer	Model	Serial No.	Cal. Until
Signal Analyzer	R&S	FSV 40	101441	2021-08-10
OSP	R&S	OSP 150	101017	2021-12-10
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	Rohde & Schwarz	WMS32 (V10.40.10)	N/A	N/A
Unwanted Emission Testing				
Description	Manufacturer	Model	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR 7	102021	2021-08-11
Signal Analyzer	R&S	FSV 40	101439	2021-08-10
System Controller Interface	Rohde & Schwarz	SCI-100	S10010038	N/A
Filterbank	Rohde & Schwarz	Wlan	100759	2021-08-21
OSP	Rohde & Schwarz	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2021-08-10
Amplifier	R&S	SCU-18F	180070	2021-08-10
Amplifier	R&S	SCU40A	100475	2021-09-10
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	2021-09-02
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-24

Conducted Emission				
Description	Manufacturer	Model	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2022-04-24
Artificial Mains Network	R&S	ENV216	101445	2022-04-24
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 6 von 23
Page 6 of 23

RF Exposure				
Description	Manufacturer	Model	Serial No.	Cal. Until
"Van der Hoofden" test head	Schwarzbeck	VDHH 9502	159	2021-08-17
EMF Tester	NARDA	ELT-400	D-0009/D-0010	2022-01-15

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Parameter	Uncertainty
Radiated Emission of Transmitter, valid up to 26.5 GHz	±6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	±6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	±3.70 dB / ±3.30 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The devices are a ZENS Fast Dual Wireless Charger, it have two Charging base and one Apple watch charger. The two Charging base are identical in circuit & PCB layout.

The EUT has two different color of enclosure: black for model ZENDC05B/00 and white for model ZENDC05W/00, they are identical in circuit & PCB layout, only the color and model name are difference.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	ZENS Fast Dual Wireless Charger
Type Designation	ZENDC05B/00, ZENDC05W/00
Trade Mark	zens
FCC ID	2AYYSZEDC05
Input Voltage	DC 12V, 2.0A via external AC/DC Adapter
Test Voltage	AC 120V, 60Hz
Technical Specification of WPT (Charging base)	
Operating Frequency	111-205KHz
Extreme Temperature Range	-20°C - +45°C
Modulation	FSK
Antenna Type	Induction coil Antenna
Antenna Gain	0 dBi
Wireless output	10W maximum for each
Technical Specification of WPT (Apple watch charger)	
Operating Frequency	326.5KHz
Modulation	FSK
Antenna Type	Induction coil Antenna
Antenna number	1
Wireless output	Max. 5W

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wireless charging
- B. On (10W * 2 + Apple watch)
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Block Diagram
- Schematics
- User Manual
- Parts List
- Rating Label

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5&6. All testing were performed according to the procedures in ANSI C63.10: 2013

According to clause 3.1, all test were applied on model ZENDC05B/00.

4.3 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N or Rating
Apple Watch	Apple	M02G3CH/A	GY6F236QQ1RF
Mobile Phone	HUAWEI	HUAWEI P30 Pro	HVQ0119220000186
Mobile Phone	HUAWEI	HUAWEI Mate20 Pro	016FGT192L000199
AC/DC Adapter	ULLPOWER	ICP30A-120-2000	Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 12V, 2A, 24W

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

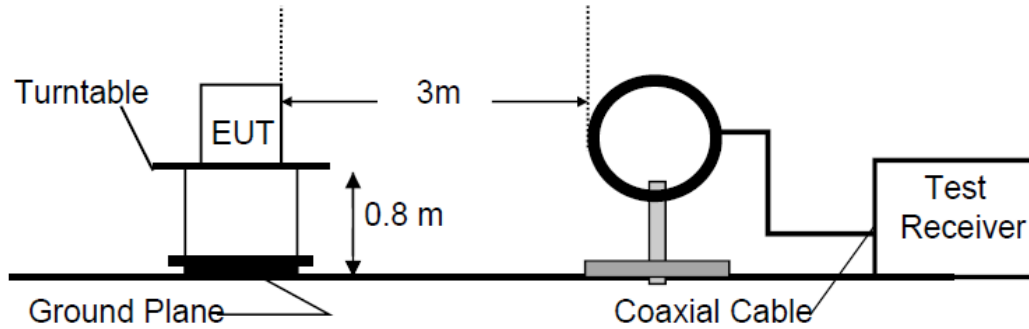


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

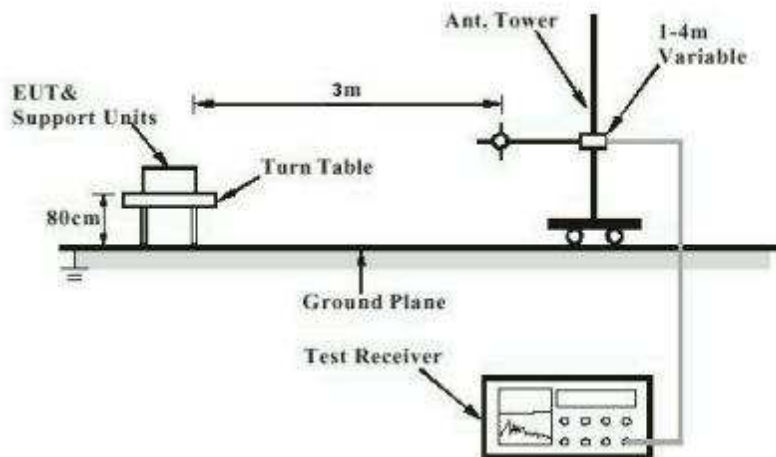


Diagram of Measurement Configuration for Conducted Transmitter Measurement


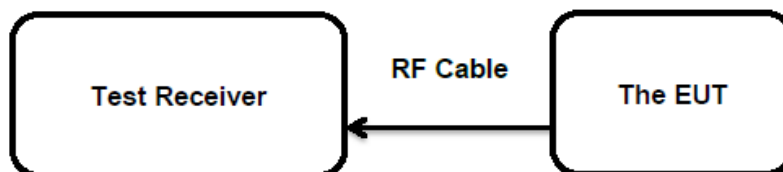


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement

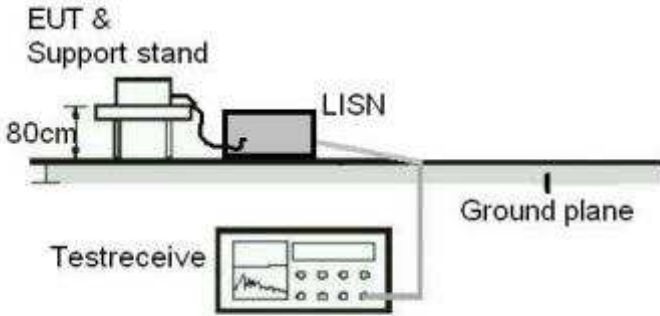

5 Test Results

5.1 Transmitter Requirement & Test Suites for WPT

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : Part 15.203
Limit : the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has one internal antenna, the directional gain of antenna is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 20dB Bandwidth

RESULT:

Pass


Test Specification

Test standard : FCC Part 15.215(c)
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-07-15
 Input voltage : AC 120V, 60Hz
 Operation mode : A
 Ambient temperature : 25 °C
 Relative humidity : 56 %
 Atmospheric pressure : 101 kPa

For details refer to following test result.

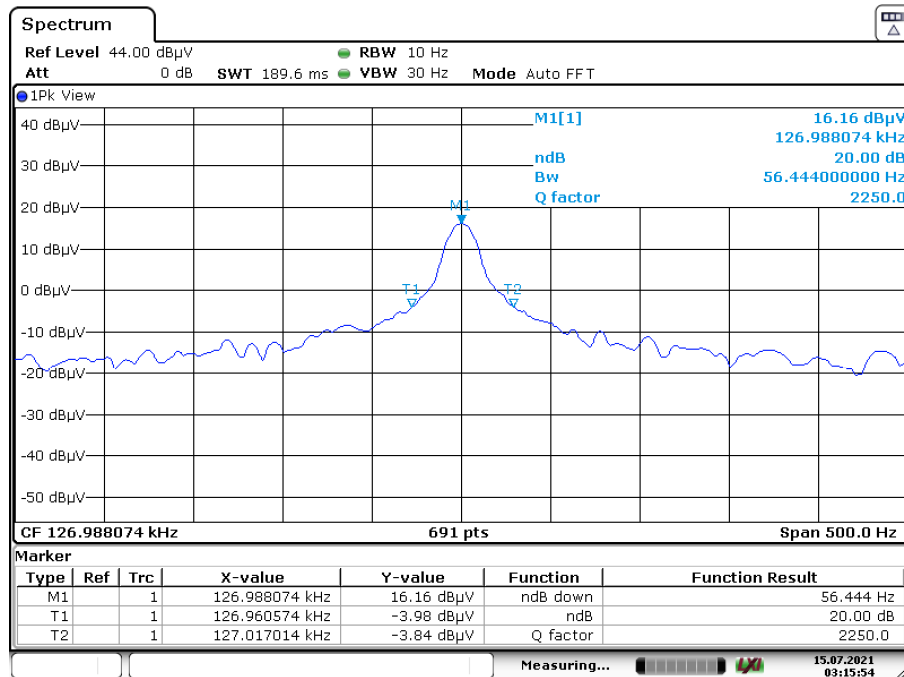

Prüfbericht - Nr.: CN21KX7T 001

Test report no.:

Seite 14 von 23

Page 14 of 23

5.1.3 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.201
Basic standard : ANSI C63.10: 2013
Limits : Refer to 15.209(a)
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2021-07-14
Input voltage : AC 120V, 60Hz
Operation mode : A
Ambient temperature : 24 °C
Relative humidity : 47 %
Atmospheric pressure : 101 kPa

For details refer to following test result.

Measurements are to be taken in dBuV/m, corrected, and the end result shall be mathematically converted to the dBuA/m for RSS and presented against the correct limit.

$$E [\text{dB}\mu\text{A}/\text{m}] = \text{AF} [\text{dBS}/\text{m}] + V [\text{dB}\mu\text{V}] + \text{Cable loss} [\text{dB}]$$

E [dBμA/m] is the magnetic field strength (Final Test results)


AF [dBS/m] is the magnetic antenna factor of the antenna (H-field)

V [dBμV] is the reading level on the spectrum analyzer

Note that when using the AF [dBS/m] the 51.5 dB is already account for into the antenna factor.

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Model: ZENDC05B/00
 Test Mode: Charging
 Test Voltage:: 120V/60Hz
 Remark: Temp 24 Humi:47%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

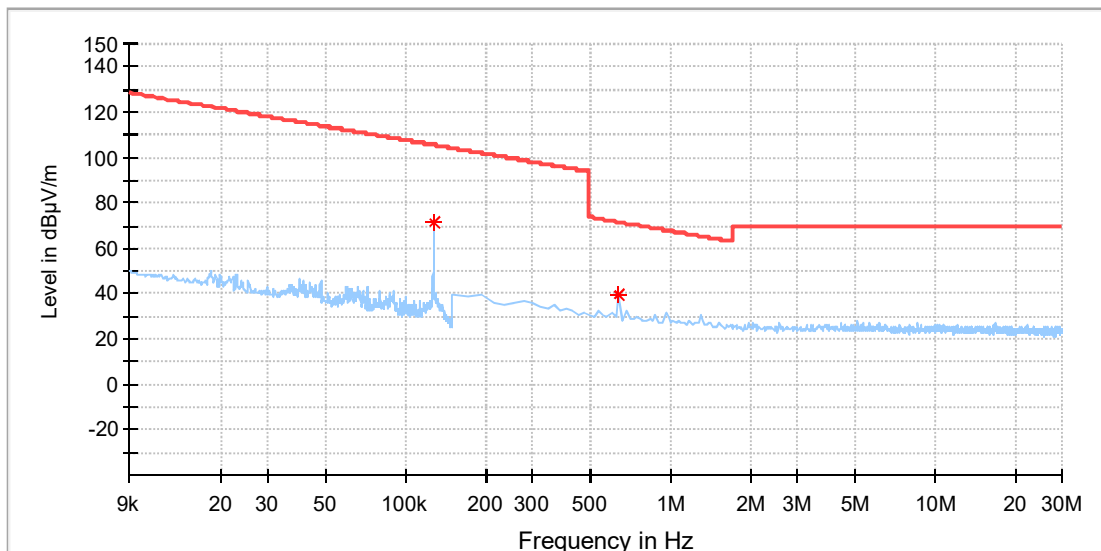


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.127037	71.57	105.52	33.95	100.0	X	263.0	20.1
0.640393	39.36	71.48	32.12	100.0	X	310.0	20.1

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Model: ZENDC05B/00
 Test Mode: Charging
 Test Voltage: 120V/60Hz
 Remark: Temp 24 Humi:47%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

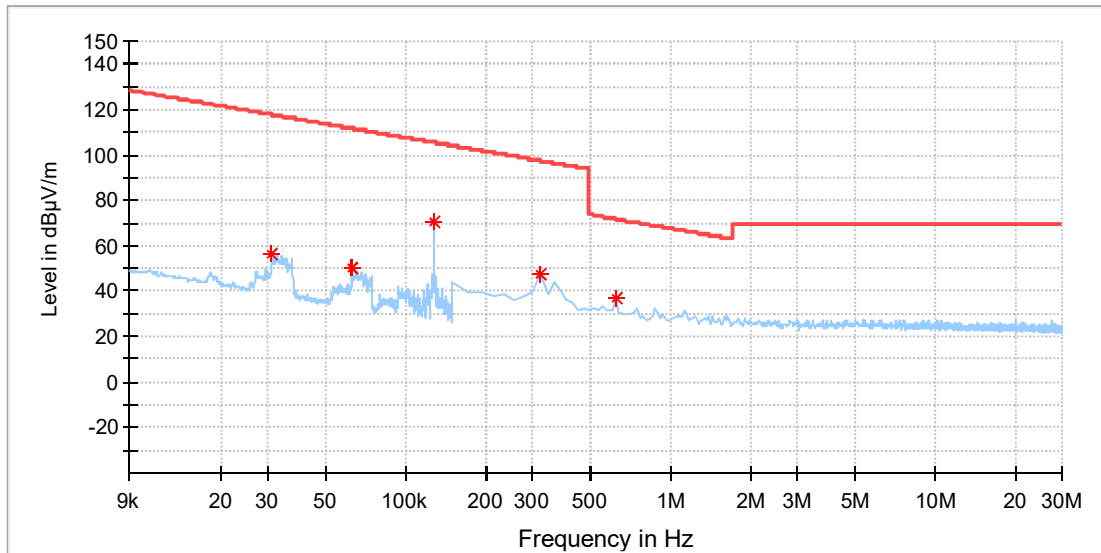


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.031157	55.95	117.72	61.76	100.0	Y	310.0	20.1
0.062278	49.92	111.71	61.79	100.0	Y	310.0	20.1
0.127037	70.78	105.52	34.74	100.0	Y	0.0	20.1
0.320572	47.77	97.48	49.71	100.0	Y	255.0	20.1
0.619072	36.72	71.78	35.06	100.0	Y	186.0	20.1

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Model: ZENDC05B/00
 Test Mode: Charging
 Test Voltage: 120V/60Hz
 Remark: Temp 24 Humi:47%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

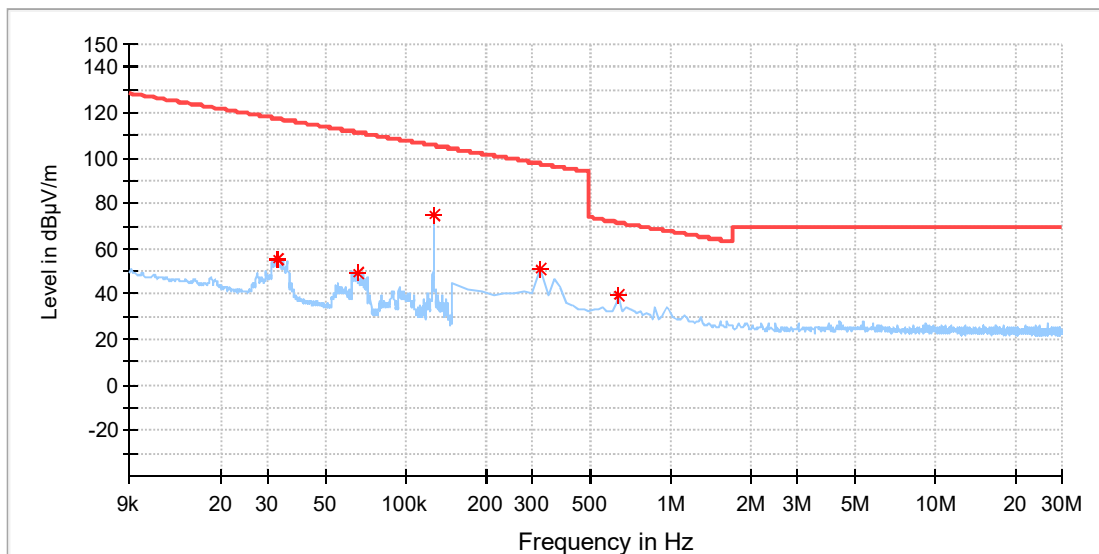


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.032567	55.02	117.34	62.32	100.0	Z	335.0	20.1
0.065299	49.54	111.30	61.75	100.0	Z	356.0	20.1
0.127037	74.92	105.52	30.60	100.0	Z	335.0	20.1
0.320572	51.19	97.48	46.30	100.0	Z	0.0	20.1
0.640393	39.35	71.48	32.13	100.0	Z	4.0	20.1

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Model: ZENDC05B/00
 Test Mode: Charging
 Test Voltage: 120V/60Hz
 Remark: Temp 24 Humi:47%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

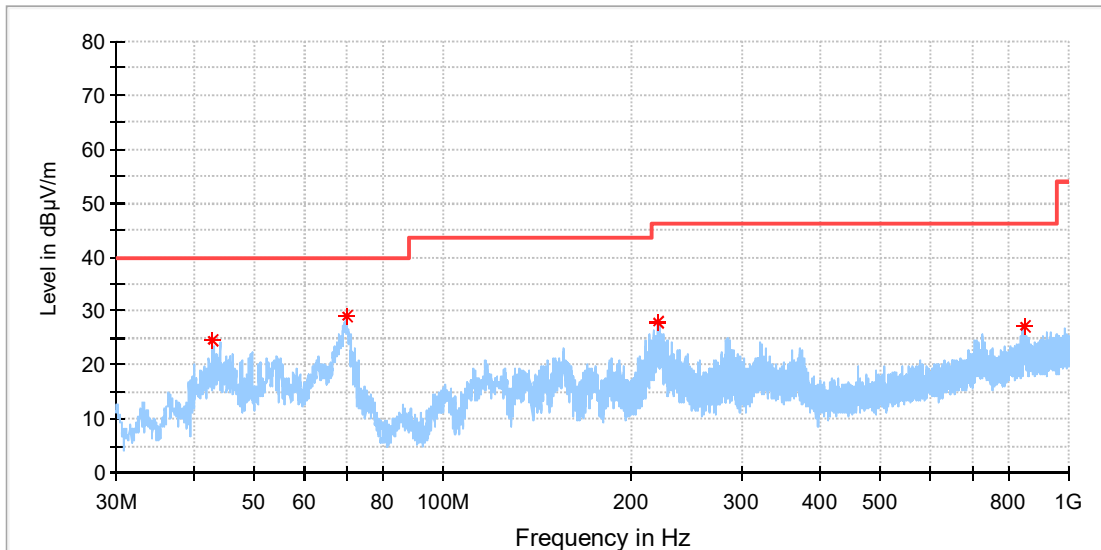

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
42.759231	24.58	40.00	15.42	100.0	H	13.0	-19.7
69.919231	28.86	40.00	11.14	100.0	H	249.0	-22.1
219.448462	27.73	46.00	18.27	100.0	H	298.0	-18.9
852.037692	27.09	46.00	18.91	100.0	H	55.0	-5.9

Prüfbericht - Nr.: CN21KX7T 001
 Test report no.:

Seite 19 von 23
 Page 19 of 23

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Model: ZENDC05B/00
 Test Mode: Charging
 Test Voltage: 120V/60Hz
 Remark: Temp 24 Humi:47%
 Test Standard: FCC Part 15C
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

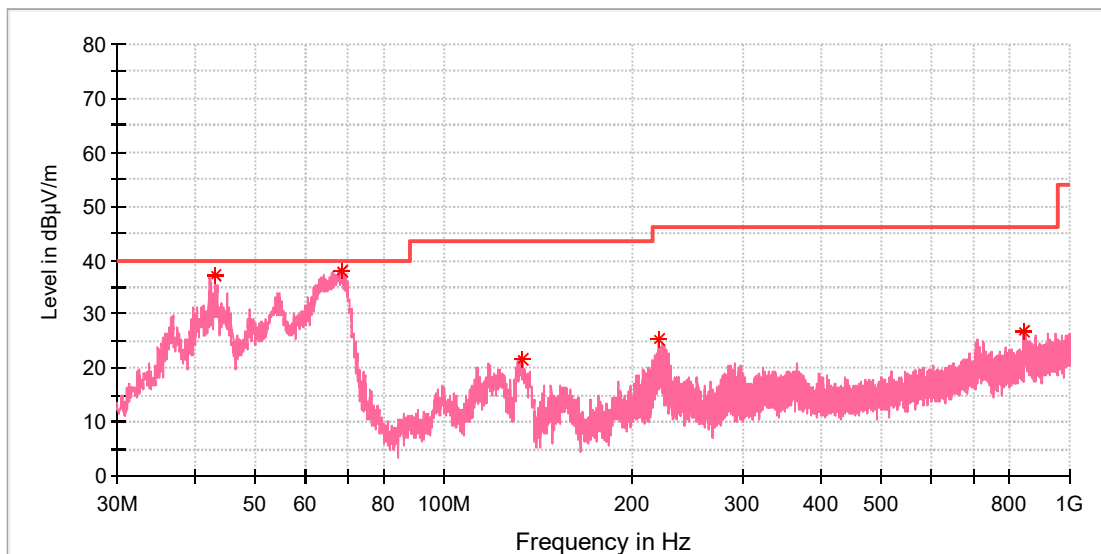

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
43.020385	37.38	40.00	2.62	100.0	V	6.0	-19.6
68.538846	37.81	40.00	2.19	100.0	V	340.0	-21.6
133.566154	21.76	43.50	21.74	100.0	V	0.0	-22.3
220.157308	25.47	46.00	20.53	100.0	V	0.0	-18.9
845.285000	26.84	46.00	19.16	100.0	V	97.0	-6.0

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 20 von 23
Page 20 of 23

5.1.4 Conducted Emission on AC Mains

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.207(a)
Basic standard : ANSI C63.10: 2013
Frequency range : 0.15 – 30MHz
Classification : Class B
Limits : FCC Part 15.207(a)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-07-20
Input voltage : AC 120V/60Hz
Operation mode : B
Earthing : Not connected
Ambient temperature : 22 °C
Relative humidity : 55 %
Atmospheric pressure : 101 kPa


For details refer to following test result.

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 21 von 23
Page 21 of 23

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Order No: 168326740 40
 Model: ZENDC05B/00
 Test mode: ON (10W * 2 + Apple watch)
 Test Voltage: AC 120V/60Hz
 Test By: Mac Xie
 Review By: Gary Chen
 Remark: SR2

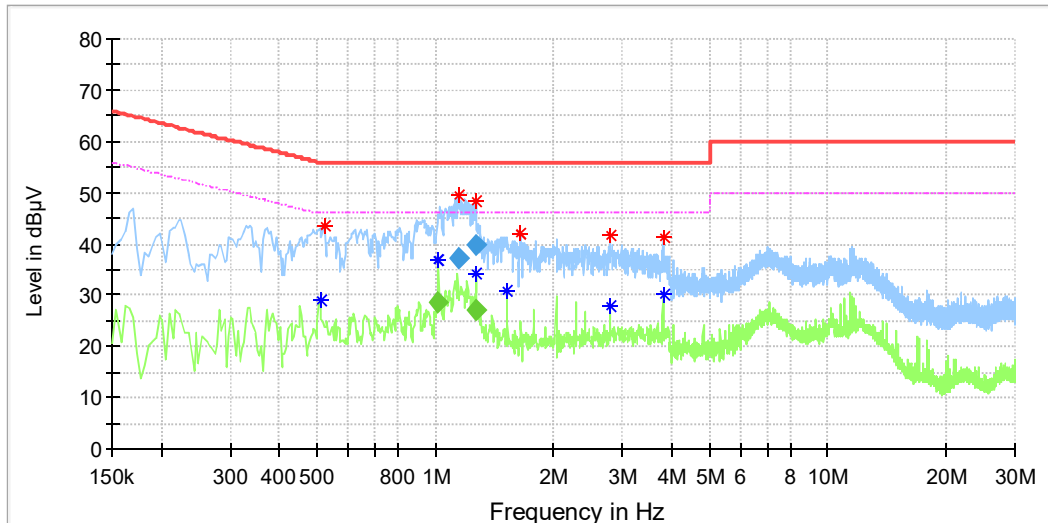

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.510000	---	29.12	46.00	16.88	L1	10.0
0.522000	43.44	---	56.00	12.56	L1	10.0
1.013500	---	36.84	46.00	9.16	L1	10.0
1.149500	49.51	---	56.00	6.49	L1	10.1
1.269500	48.39	---	56.00	7.61	L1	10.1
1.269500	---	34.21	46.00	11.79	L1	10.1
1.522000	---	30.84	46.00	15.16	L1	10.1
1.650000	41.98	---	56.00	14.02	L1	10.1
2.794000	41.72	---	56.00	14.28	L1	10.2
2.794000	---	28.07	46.00	17.93	L1	10.2
3.810000	41.19	---	56.00	14.81	L1	10.2
3.810000	---	30.10	46.00	15.90	L1	10.2

Final Result


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
1.013500	---	28.51	46.00	17.49	200.0	9.000	L1	10.0
1.149500	37.37	---	56.00	18.63	200.0	9.000	L1	10.1
1.269500	39.96	---	56.00	16.04	200.0	9.000	L1	10.1
1.269500	---	27.13	46.00	18.87	200.0	9.000	L1	10.1

Prüfbericht - Nr.: CN21KX7T 001
Test report no.:

Seite 22 von 23
Page 22 of 23

EUT Information

EUT Name: ZENS Fast Dual Wireless Charger
 Order No: 168326740 40
 Model: ZENDC05B/00
 Test mode: ON (10W * 2 + Apple watch)
 Test Voltage: AC 120V/60Hz
 Test By: Mac Xie
 Review By: Gary Chen
 Remark: SR2

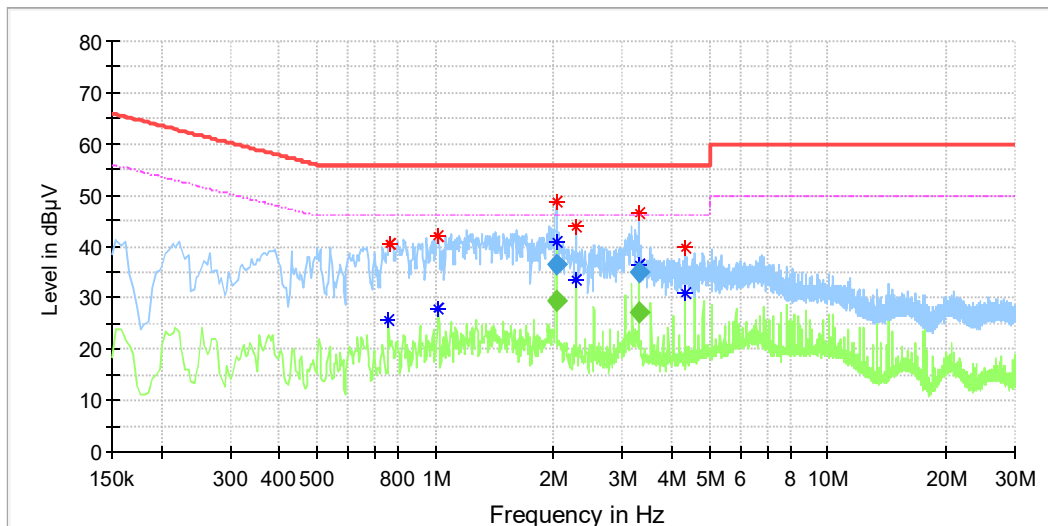

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.762000	---	25.74	46.00	20.26	N	9.8
0.766000	40.55	---	56.00	15.45	N	9.8
1.018000	42.12	---	56.00	13.88	N	9.8
1.018000	---	27.80	46.00	18.20	N	9.8
2.033500	48.77	---	56.00	7.23	N	9.9
2.033500	---	40.76	46.00	5.24	N	9.9
2.286000	43.87	---	56.00	12.13	N	9.9
2.286000	---	33.61	46.00	12.39	N	9.9
3.301500	46.61	---	56.00	9.39	N	9.9
3.301500	---	36.49	46.00	9.51	N	9.9
4.314000	39.90	---	56.00	16.10	N	9.9
4.318000	---	31.06	46.00	14.94	N	9.9

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
2.033500	---	29.46	46.00	16.54	200.0	9.000	N	9.9
2.033500	36.65	---	56.00	19.35	200.0	9.000	N	9.9
3.301500	---	27.20	46.00	18.80	200.0	9.000	N	9.9
3.301500	34.92	---	56.00	21.08	200.0	9.000	N	9.9

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: List of Accessories and Auxiliary Equipment.....	9