



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20220200279E
Applicant: Shenzhen Inkbird Technology Co., Ltd.
Address of Applicant: Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China

Equipment Under Test (EUT):

EUT Name: Digital Food Thermometer
Model No.: BG-CT2C, BG-CT2D, BG-CT4C, ICT-2C, ICT-2D, ICT-4C
Test Model No.: BG-CT2C
Brand Name: INKBIRD
FCC ID: 2AYZDBG-CT2C
Standards: 47 CFR Part 15, Subpart B, Class B
Date of Receipt: 2022-2-28
Date of Test: 2022-2-28 to 2022-3-10
Date of Issue: 2022-3-11
Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By: _____

Timo Lei

(Timo Lei)

Reviewed By: _____

Rock Huang

(Rock Huang)

Approved By: _____

Jack Ai

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History of Report

Report No.	Version	Description	Issue Date
CQASZ20220200279E	Rev.01	Initial report	2022-3-11

2 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15B	ANSI C63.4-2014	PASS
Conducted Emission (150KHz to 30MHz)	47 CFR Part 15B	ANSI C63.4-2014	N/A

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

Remark:

The highest frequency of the internal sources of the EUT is below 108 MHz.

N/A¹⁾: As this test EUT is DC-powered equipment, it is not applicable.

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 TEST ENVIRONMENT AND MODE.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	6
4.5 TEST LOCATION.....	6
4.6 DEVIATION FROM STANDARDS.....	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	6
5 EQUIPMENT LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 RADIATED EMISSION.....	8
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....	13
APPENDIX 2 PHOTOGRAPHS OF EUT.....	14

4 General Information

4.1 Client Information

Applicant:	Shenzhen Inkbird Technology Co., Ltd.
Address of Applicant:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Manufacturer:	Shenzhen Inkbird Technology Co., Ltd.
Address of Manufacturer:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Factory:	Shenzhen Inkbird Technology Co., Ltd.
Address of Factory:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Digital Food Thermometer
Model No.:	BG-CT2C, BG-CT2D, BG-CT4C, ICT-2C, ICT-2D, ICT-4C
Test Model No.:	BG-CT2C
Brand Name:	INKBIRD
Power Supply:	DC 3V
Test Mode:	
Normal working	Keep the EUT in Normal working

Note:

Model No.: BG-CT2C, BG-CT2D, BG-CT4C, ICT-2C, ICT-2D, ICT-4C.

Only the model BG-CT2C was tested, their electrical circuit design, layout, components used and internal wiring are identical, only the sales customers, sales region, product color is different.

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emission	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emission	
Temperature:	24.3 °C
Humidity:	54 % RH
Atmospheric Pressure:	1009 mbar

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	CQA

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Other Information Requested by the Customer

None.

4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Conduction emission	3.74dB (9kHz to 150kHz)
		3.34dB (150kHz to 30MHz)
2	Radiated emission	5.12dB (Below 1GHz)
		4.60dB (Above 1GHz)
3	Temperature	0.8°C
4	Humidity	2.0%

5 Equipment List

Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
EMI Test Receiver	R&S	ESPI3	CQA-013	2021/9/10	2022/9/9
LISN	R&S	ENV216	CQA-003	2021/9/10	2022/9/9
Coaxial cable (9KHz~300MHz)	CQA	N/A	C021	2021/9/10	2022/9/9

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
Loop antenna	SCHWARZBECK	FMZB 1516	CQA-060	2021/9/16	2024/9/15
Horn Antenna	R&S	BBHA 9170	CQA-088	2021/9/16	2024/9/15
Horn Antenna	R&S	HF906	CQA-012	2021/9/16	2024/9/15
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16	2024/9/15
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10	2022/9/9
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/10	2022/9/9
Preamplifier	MITEQ	AMF-6D- 02001800- 29-20P	CQA-036	2021/9/10	2022/9/9
Coaxial cable (1GHz~40GHz)	CQA	N/A	C007	2021/9/10	2022/9/9
Coaxial cable (9KHz~1GHz)	CQA	N/A	C013	2021/9/10	2022/9/9

6 Test results and Measurement Data

6.1 Radiated Emission

Test Requirement: 47 CFR Part 15B

Test Method: ANSI C63.4

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver setup:

Limit:

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
Frequency		Limit (dB μ V/m @3m)		Remark
30MHz-88MHz		40.0		Quasi-peak Value
88MHz-216MHz		43.5		Quasi-peak Value
216MHz-960MHz		46.0		Quasi-peak Value
960MHz-1GHz		54.0		Quasi-peak Value

Test Procedure:

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Setup:

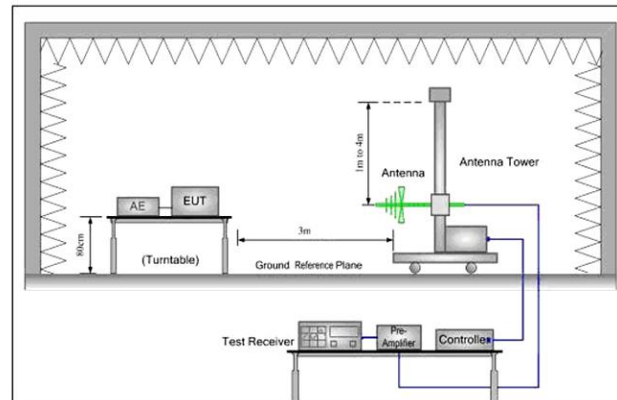


Figure 1. 30MHz to 1GHz

Instruments Used:

Refer to section 5 for details

Test Mode:


Normal working

Test Results:

Pass


Below 1GHz

Horizontal

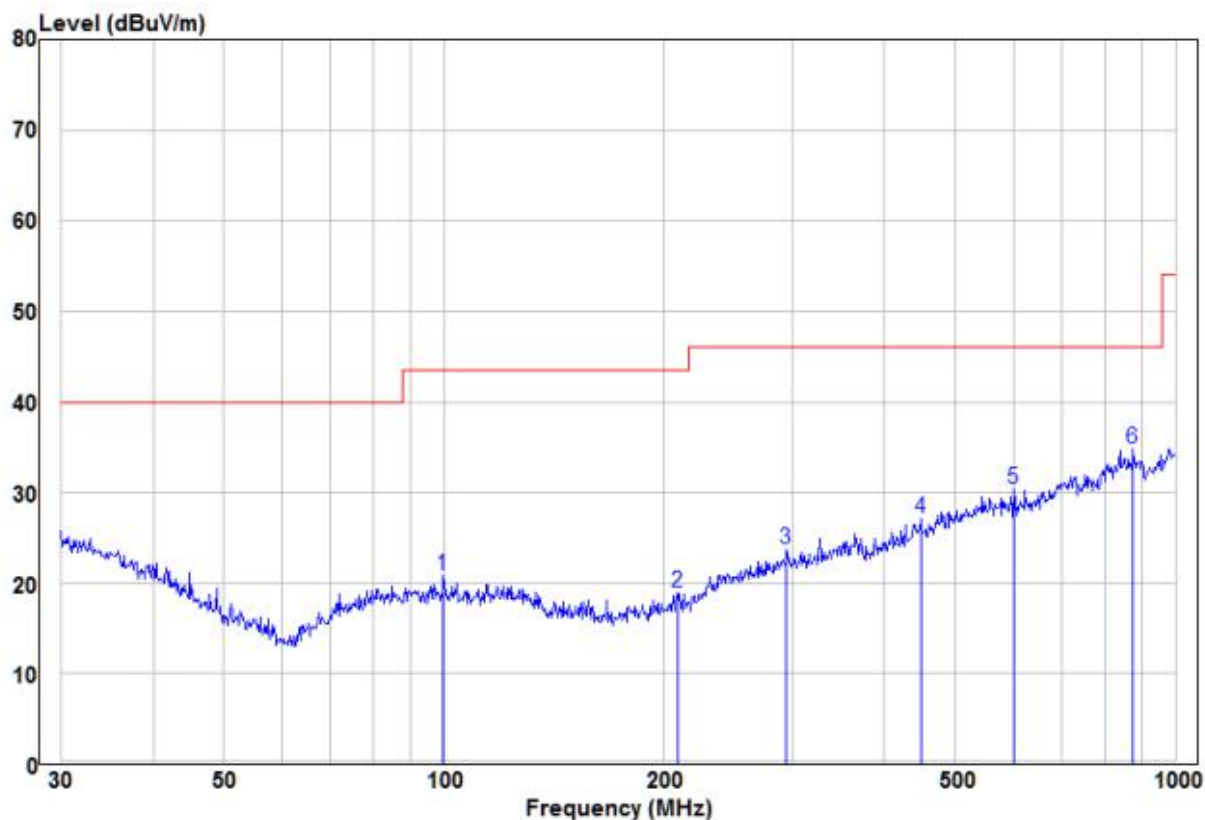

	Read Freq	Read Level	Read Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	99.88	10.24	10.64	20.88	43.50	-22.62	Peak	HORIZONTAL
2	208.58	10.18	8.77	18.95	43.50	-24.55	Peak	HORIZONTAL
3	294.11	10.19	13.54	23.73	46.00	-22.27	Peak	HORIZONTAL
4	447.98	10.48	16.66	27.14	46.00	-18.86	Peak	HORIZONTAL
5	601.43	11.56	18.82	30.38	46.00	-15.62	Peak	HORIZONTAL
6 pp	875.25	10.80	23.95	34.75	46.00	-11.25	Peak	HORIZONTAL

Vertical

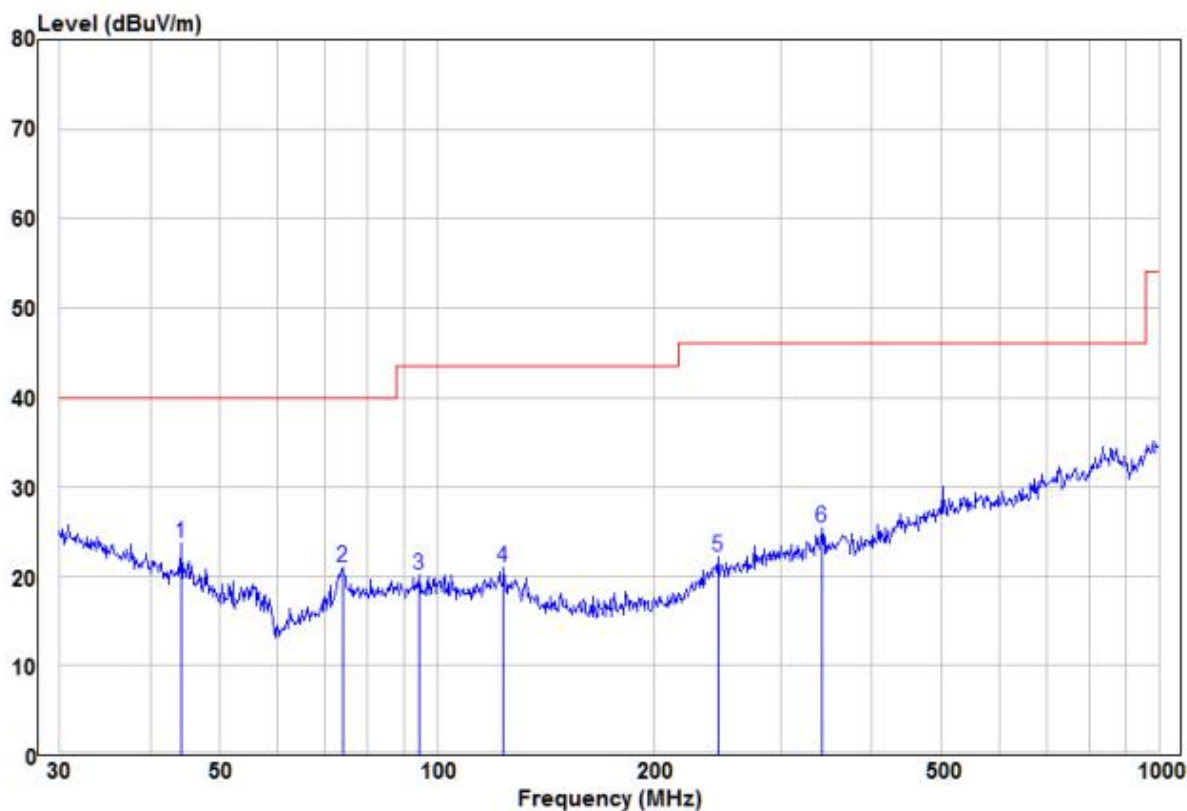

	Read	Limit	Over					
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1 pp	44.12	12.93	10.86	23.79	40.00	-16.21	Peak	VERTICAL
2	73.88	12.19	8.79	20.98	40.00	-19.02	Peak	VERTICAL
3	94.43	9.90	10.30	20.20	43.50	-23.30	Peak	VERTICAL
4	123.70	10.40	10.56	20.96	43.50	-22.54	Peak	VERTICAL
5	245.09	10.30	11.93	22.23	46.00	-23.77	Peak	VERTICAL
6	341.98	10.64	14.76	25.40	46.00	-20.60	Peak	VERTICAL

Above 1GHz

Class B: Above 1GHz: at 3M							
Ant.Pol.	Frequency	Measurement (dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
	MHz	PK	AV	PK	AV	PK	AV
Horizontal	1084.20	50.33	37.88	74.00	54.00	-23.67	-16.12
	2285.45	51.20	36.00	74.00	54.00	-22.80	-18.00
	4404.90	58.33	38.30	74.00	54.00	-15.67	-15.70
Vertical	1777.44	51.64	37.81	74.00	54.00	-22.36	-16.19
	2341.51	54.97	36.96	74.00	54.00	-19.03	-17.04
	4833.10	56.82	37.64	74.00	54.00	-17.18	-16.36

Remark:


- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor .

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Radiated emission Test Setup (30MHz~1GHz)


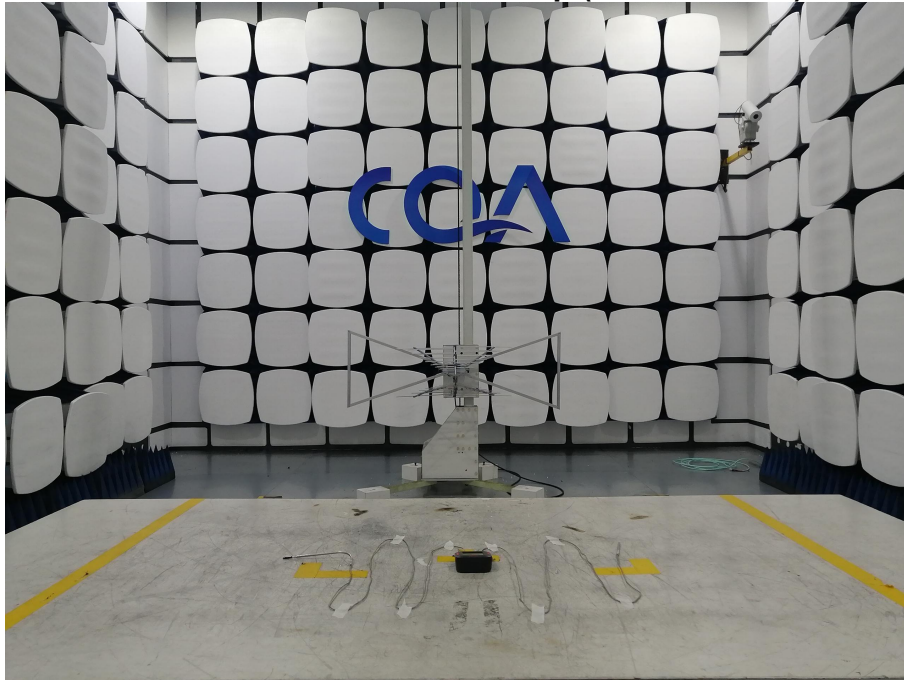



Radiated emission Test Setup (Above 1GHz)

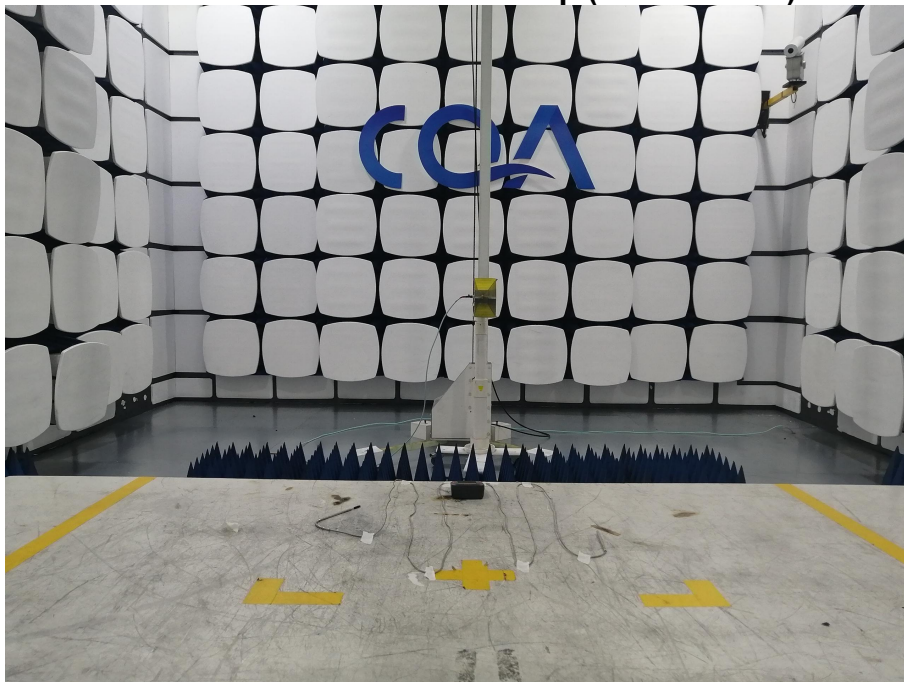

APPENDIX 2 PHOTOGRAPHS OF EUT



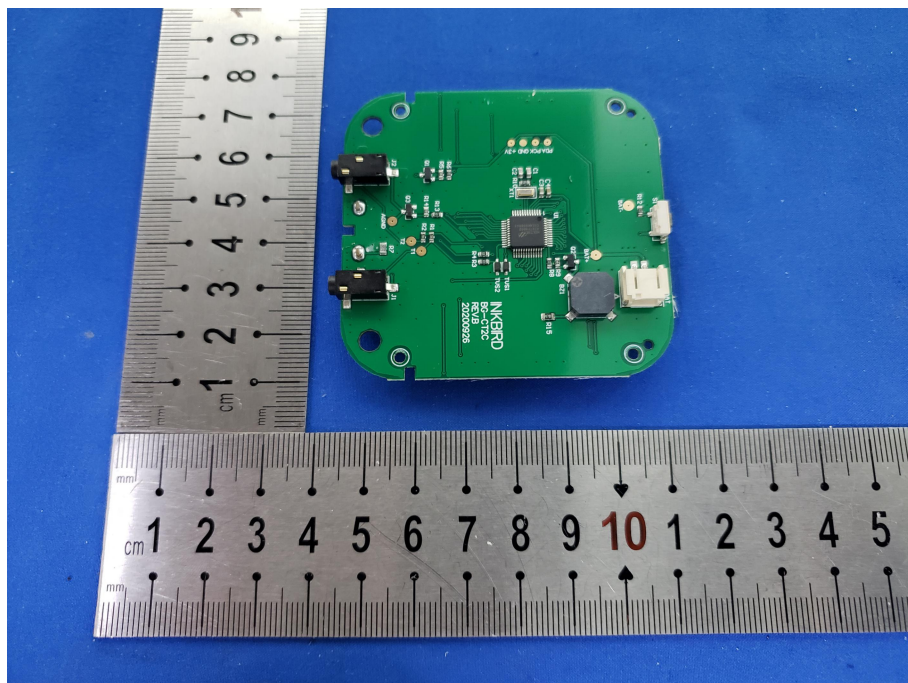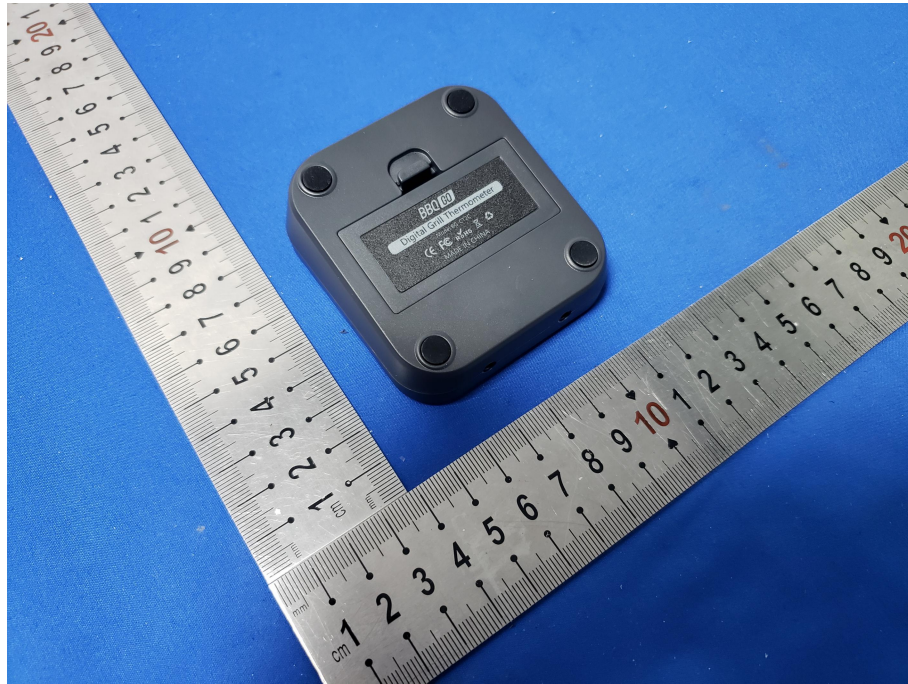

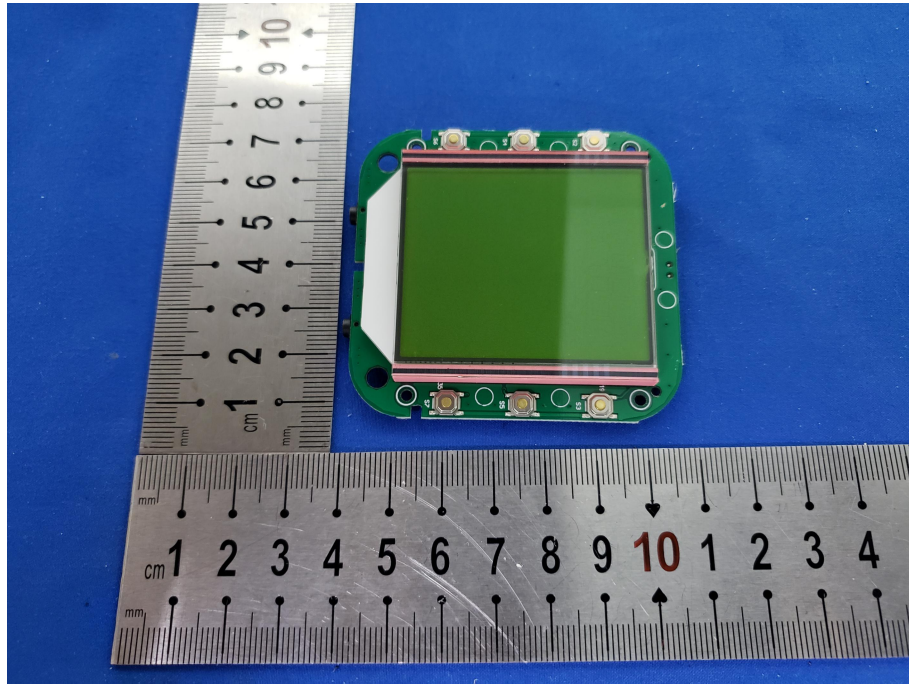

*** END OF REPORT ***