


NO	REV.	DATE	Reversion History
0	00	20/01/20	New drawing

USTC WIRE 0.08*300

Adhesive tape 0.5mm

Ferrite Mn-Zn 2.5mm

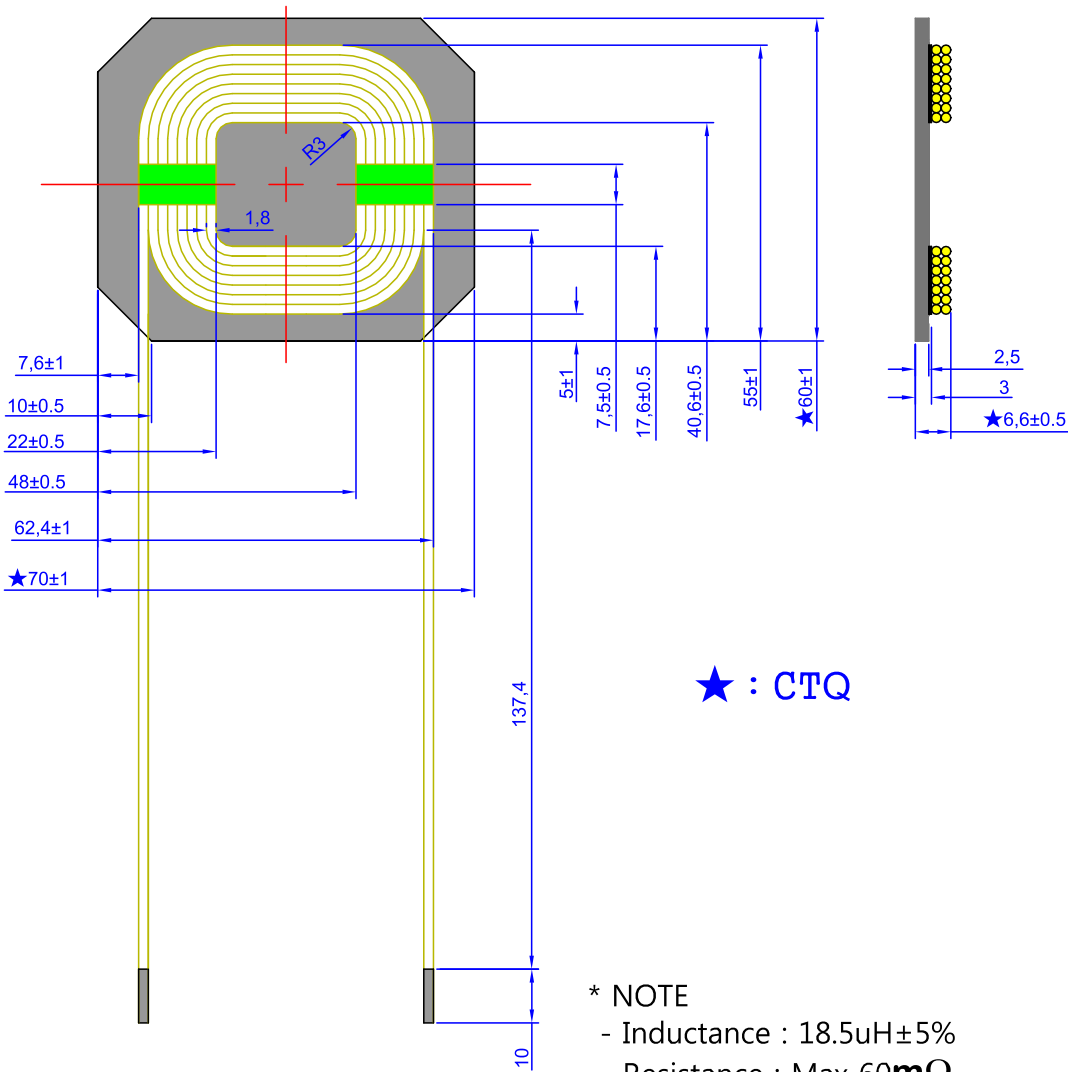

★ : CTQ

- * NOTE
- Inductance : 18.5uH±5%
 - Resistance : Max 60mΩ
 - Winding turns : 15.5(7.75+7.75) Turn
 - Winding layer : 2 Layer

IT 공차표 (ISO 2768-1)					
기준치수(mm)	f	m	c	v	
초 과 이 하	기본 공차의 수치(mm)				
0.5	3	±0.05	±0.1	±0.2	-
3	6	±0.05	±0.1	±0.3	±0.5
6	30	±0.1	±0.2	±0.5	±1
30	120	±0.15	±0.3	±0.8	±1.5
120	400	±0.2	±0.5	±1.2	±2.5
400	1000	±0.3	±0.8	±2	±4
1000	2000	±0.5	±1.2	±3	±6
2000	4000	-	±2	±4	±8

LIST OF MATERIAL AND APPLICATION DOCUMENTS					
SCALE: N/S	DATE:20/01/20	DRAWN: J.K.G	20200120 50W RX Coil Ass'y		
DIMENSIONAL UNIT: mm		ENGINEER:			
		CHECK:			
		APPROVED:			
AMOSENSE		PART NUMBER	DRAWING NUMBER	REV. 01	SHEET: 1 OF 1