



FCC Test Report

Report No: FCS202106006W03

Issued for

CLMBR, INC.

3033 E 1st Ave, Suite 501, Denver, CO. USA

Product Name:	Tablet PC
Brand Name:	CLMBR
Model Name:	CLMBR Pure
Series Model:	NA
FCC ID:	2AZ9G-PURE
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com	

TEST RESULT CERTIFICATION

Applicant's Name: CLMBR, INC.

Address.....: 3033 E 1st Ave, Suite 501, Denver, CO. USA

Manufacture's Name: Shenzhen ELINK technology Co., LTD.

Address.....: F4, Block A, Qiaohongsheng CCI Garden, Yintian Industrial Park,
Xixiang, Bao'an, Shenzhen, Guangdong, China.**Product Description**

Product Name: Tablet PC

Model Name.....: CLMBR Pure

Series Model.....: NA

Test Standards.....: CFR 47 FCC Part15E section 15.407

ANSI C63.10-2013

Test Procedure.....: KDB 789033 D02 General UNII Test procedures New Rules 02
KDB558074 D01 Meas Guidance v05

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test..... :

Date (s) of performance of tests : June. 01, 2021 ~ June. 09, 2021

Date of Issue.....: June. 09, 2021

Test Result: Pass

Tested by

:



(Scott Shen)

Reviewed by

:



(Duke Qian)

Approved by

:



(Kait Chen)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.4 EQUIPMENTS LIST	12
3. 26DB BANDWIDTH, 6DB BANDWIDTH AND 99% BANDWIDTH	13
3.1 LIMIT	13
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4 CONDUCTED OUTPUT POWER	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	18
4.3 TEST SETUP	18
4.4 TEST RESULTS	19
5. POWER SPECTRAL DENSITY	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 TEST SETUP	21
5.4 TEST RESULTS	21
6. FREQUENCY STABILITY MEASUREMENT	25
6.1 LIMIT	25
6.2 TEST PROCEDURE	25
6.3 TEST SETUP	25
6.4 TEST RESULTS	26
7. BAND EDGE	27
7.1 LIMIT	27

Table of Contents	Page
7.3 TEST SETUP	28
7.5 TEST RESULTS	29
8. DUTY CYCLE	31
8.1 TEST REQUIREMENT	31
8.2 TEST PROCEDURE	31
7.3 TEST SETUP	31
8.4 TEST RESULTS	32
9 RADIATED EMISSION MEASUREMENT	33
10 CONDUCTED EMISSION TEST	43
11. ANTENNA REQUIREMENT	47
11.1 STANDARD REQUIREMENT	47
11.2 RESULT	47

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	June. 09, 2021	FCS202106006W03	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Standard Section	Test Item	Judgment	Remark
FCC 15.407 (e)	6/26db Bandwidth and 99% Bandwidth	PASS	--
FCC 15.407 (a)	Maximum Conducted Output Power	PASS	--
FCC 15.407 (a)	Power Spectral Density	PASS	--
FCC 15.407 (g)	Frequency Stability Measurement	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Emissions in restricted frequency bands	PASS	
FCC 15.407 (a) FCC 15.209 FCC 15.205	Band Edge Compliance	PASS	
FCC 15.207	Power Line Conducted Emission	PASS	
FCC 15.203	Antenna requirement	PASS	--

1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	± 0.71 dB
2	Unwanted Emissions, conducted	± 2.988 dB
3	Conducted Emission (9KHz-150KHz)	± 4.13 dB
4	Conducted Emission (150KHz-30MHz)	± 4.74 dB
5	All emissions, radiated (<1G) 30MHz-1000MHz	± 5.2 dB
6	All emissions, radiated 1GHz -18GHz	± 4.66 dB
7	All emissions, radiated 18GHz -40GHz	± 4.31 dB

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Tablet PC
Trade Name	CLMBR
Model Name	CLMBR Pure
Series Model	NA
Model Difference	NA
Channel List	Please refer to the Note 2.2.
Operation frequency	IEEE 802.11a/n/ac(HT20)/ac(HT40) /ac(HT80): U-NII-1 5150MHZ-5250 MHz
Number of channel	5150MHZ-5250 MHz (7CH)
Modulation:	OFDM
Power supply	DC 3.7V from battery
Hardware version number	V1.0
Software version number	V1.0
Sample type	Portable equipment
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Channel list

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	38	5190
40	5200	42	5210
44	5220	46	5230
48	5240		


3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	KCC	KCC	PIFA antenna	N/A	1.0	Antenna

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the FCC Assist

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

For 802.11a/n/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

For 802.11n/ac(HT40)

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	46	5230

For 802.11ac(VHT80)

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210		

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

2.4 EQUIPMENTS LIST

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020. 06.26	2021. 06.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2020.08.09	2021.08.10
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.08.09	2021.08.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.08.26	2021.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.08.26	2021.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.06.26	2021.06.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.06.26	2021.06.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2020.08.09	2021.08.10
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.08.08	2021.08.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.08.26	2021.08.25

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESCI	FCS-E020	2020.08.09	2021.08.10
LISN	R&S	ENV216	FCS-E007	2020.08.08	2021.08.07
LISN	ETS	3810/2NM	FCS-E009	2020.08.09	2021.08.10
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.08.08	2021.08.07

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
MXA SIGNAL Analyzer	Keysight	N9020A	FCS-E015	2020.08.09	2021.08.10
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.08.08	2021.08.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.08.26	2021.08.25
Power meter	Agilent	U2021XA	MY55150021	2020.08.26	2021.08.25

3. 26dB Bandwidth, 6dB Bandwidth and 99% Bandwidth

3.1 Limit

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850


3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth: RBW=100kHz For 26dB Bandwidth: approximately 1% of the emission bandwidth.
VBW	For 6dB Bandwidth: VBW=300kHz For 26dB Bandwidth: >3RBW
Trace	Max hold
Sweep	Auto couple

(2) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26dB and 6dB relative to the maximum level measured in the fundamental emission.


3.3 Test setup

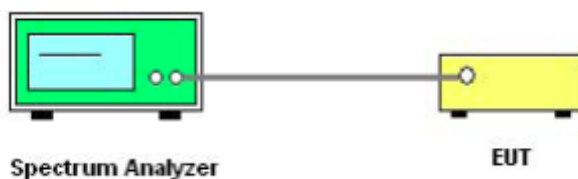


3.4 Test results

Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	21.23	21.08	21.08	16.561	16.557	16.559
	802.11n(HT20)	21.30	21.55	21.38	17.813	17.817	17.758
	802.11n(HT40)	39.55	/	39.36	36.336	/	36.366
	802.11ac(HT20)	21.37	21.40	21.39	17.835	17.812	17.831
	802.11ac(HT40)	40.34	/	39.49	36.521	/	36.507
	802.11ac(HT80)	80.98	/	/	75.731	/	/


802.11a U-NII-1 Low CH

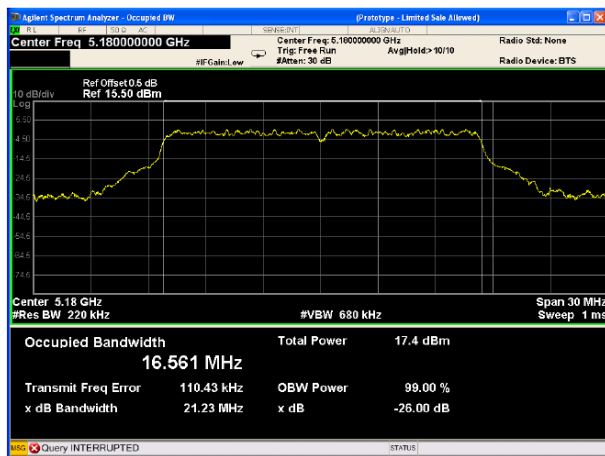


802.11a U-NII-1 Middle CH

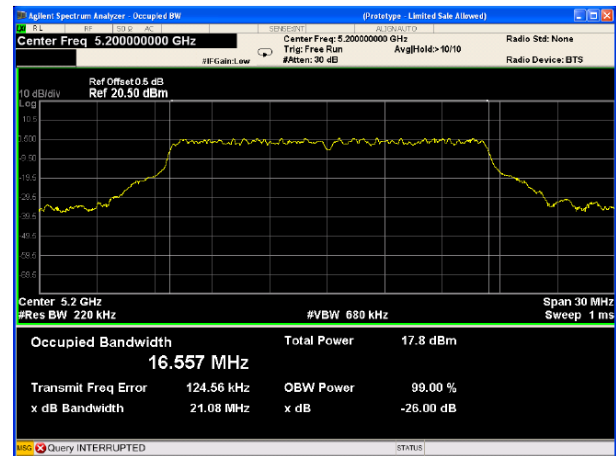


802.11a U-NII-1 High CH

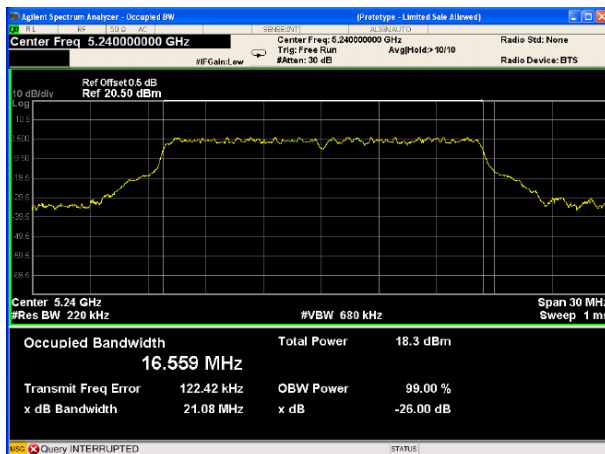


802.11n(HT20) U-NII-1 Low CH

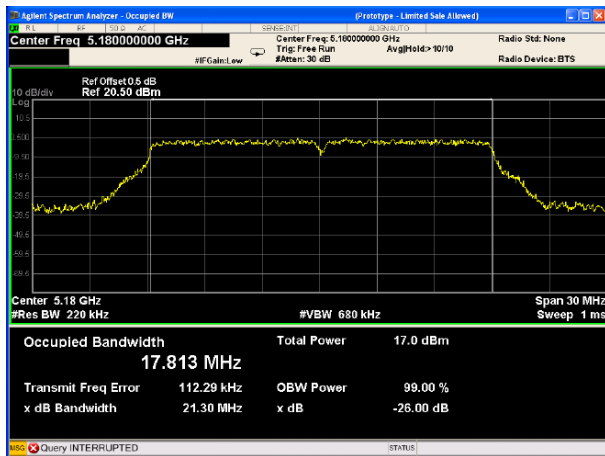


802.11 n(HT20) U-NII-1 Middle CH

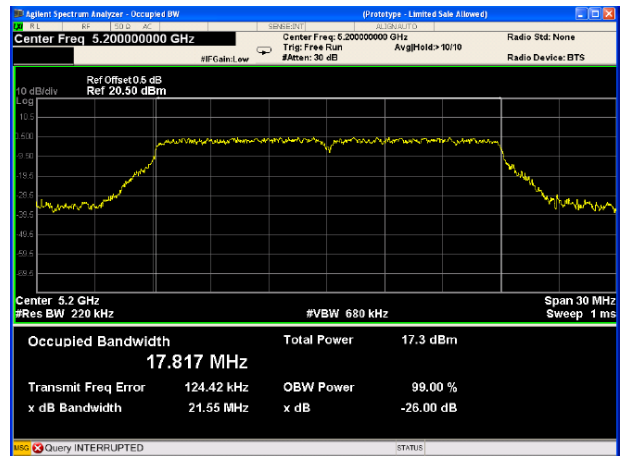


802.11n(HT20) U-NII-1 High CH

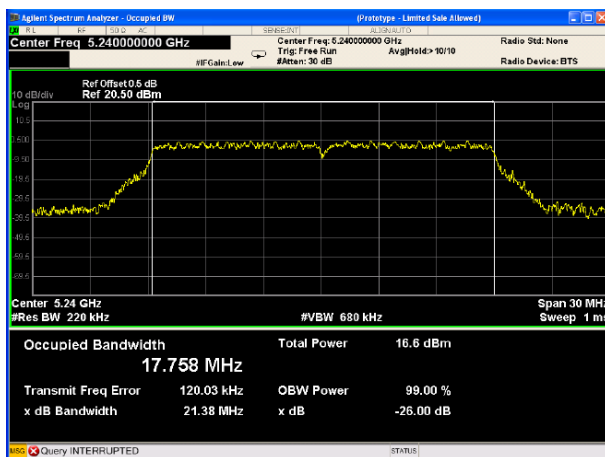


802.11n(HT40) U-NII-1 Low CH

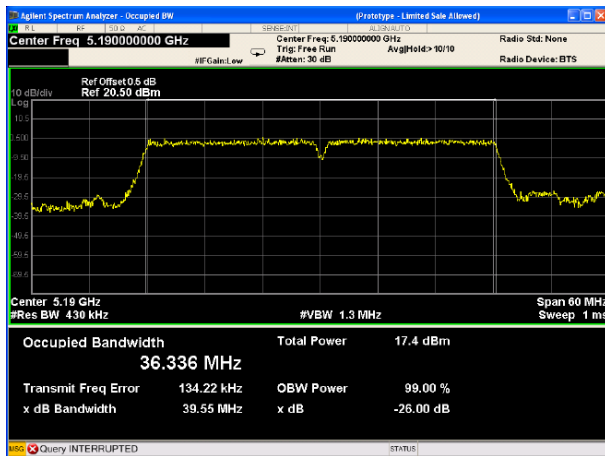


802.11 n(HT40) U-NII-1 High CH

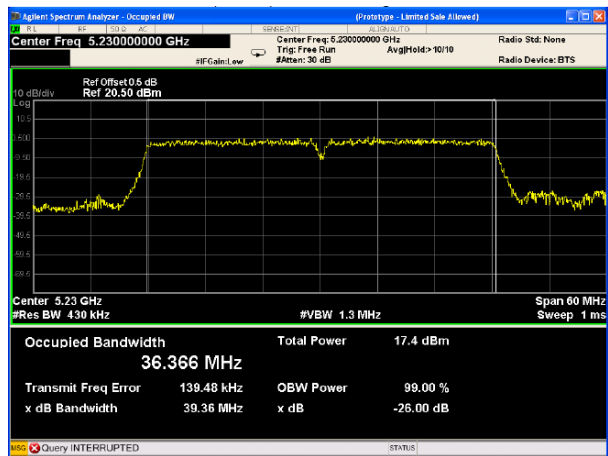


802.11ac(HT20) U-NII-1 Low CH

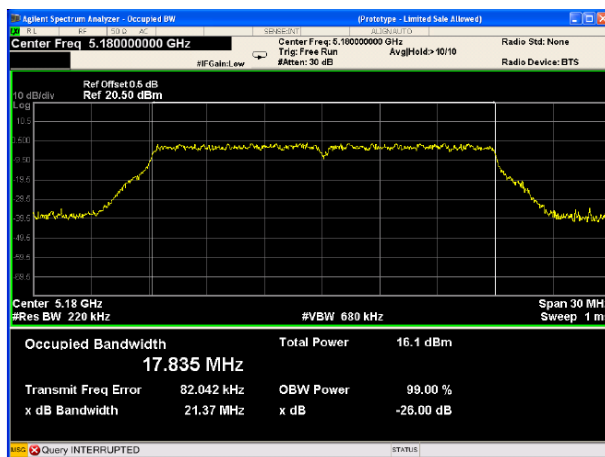


802.11 ac(HT20) U-NII-1 Middle CH

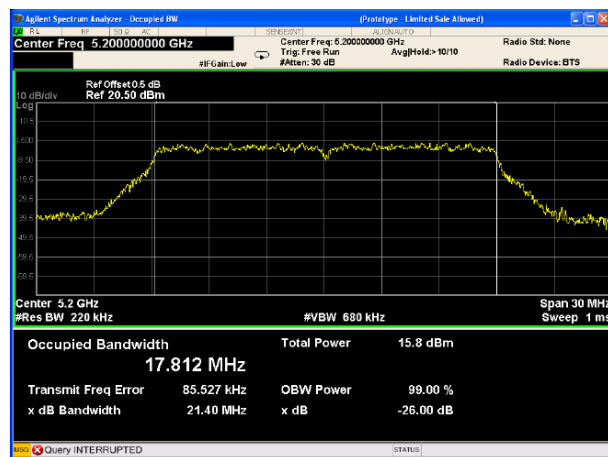


802.11 ac(HT20) U-NII-1 High CH

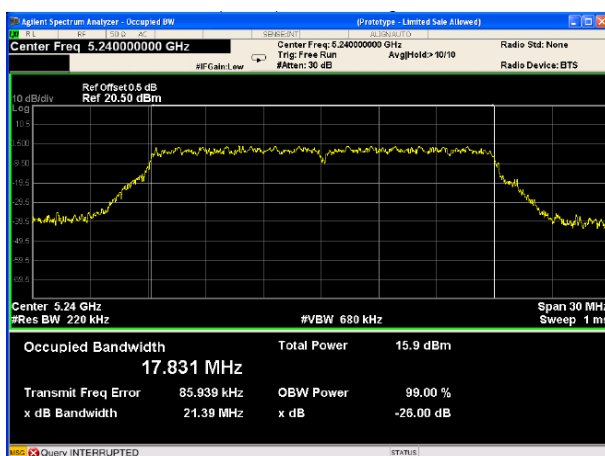


802.11ac(HT40) U-NII-1 Low CH

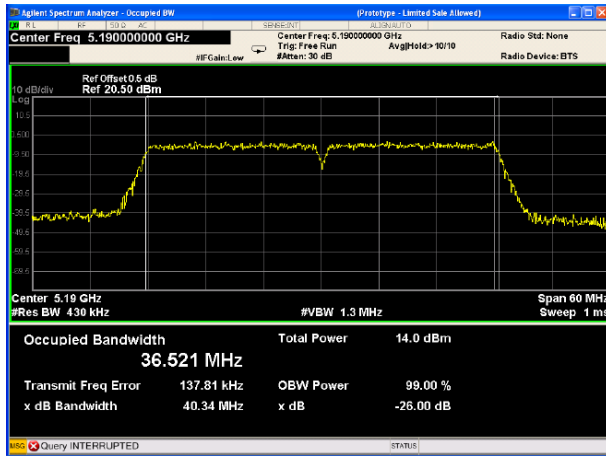

802.11 ac(HT40) U-NII-1 High CH

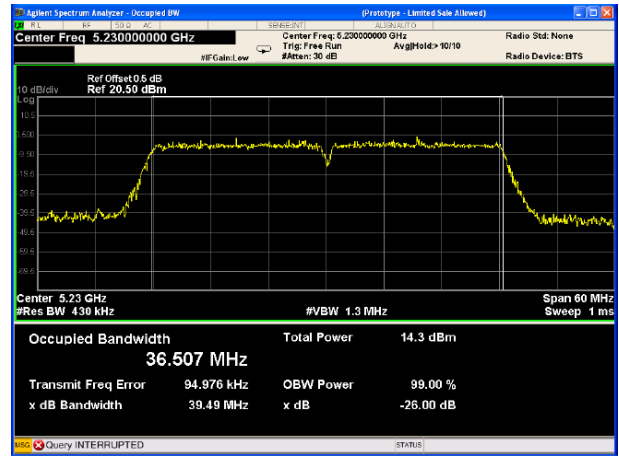

802.11ac(HT80) U-NII-1 Low CH

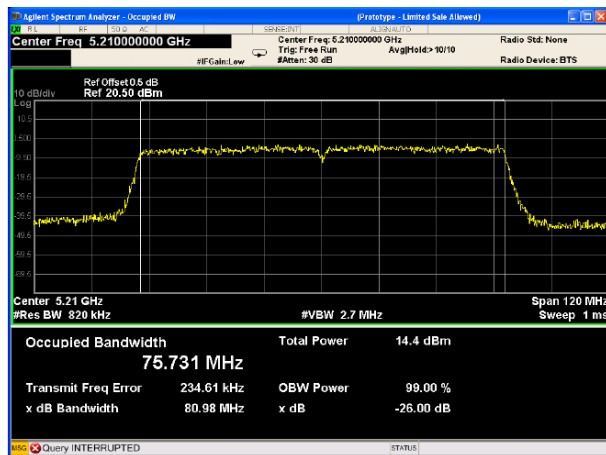

4 CONDUCTED OUTPUT POWER

4.1 limit

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250mW (24dBm)	5150-5250
	For RSS: e.i.r.p. power: not exceed 200 mW(23dBm) or $10 + 10 \log_{10} B$	
	250mW (24dBm) or $11 + 10 \log_{10} B$	5250-5350
	250mW (24dBm) or $11 + 10 \log_{10} B$	For FCC:5470-5725 For IC:5470-5600 5650-5725
	1 Watt (30dBm)	5725-5850
Note: For ISCED: B=99% bandwidth.		

4.2 test procedure

- Connect each EUT's antenna output to power meter by RF cable and attenuator
- Get each antenna port's output power of EUT.

4.3 TEST SETUP



4.4 test results

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	6.16	6.78	6.64
	802.11n(HT20)	5.11	5.73	5.57
	802.11n(HT40)	5.17	/	5.86
	802.11ac(HT20)	4.46	4.37	4.59
	802.11ac(HT40)	4.32	/	4.94
	802.11ac(HT80)	4.50	/	/

5. POWER SPECTRAL DENSITY

5.1 LIMIT

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250
	For RSS eirp:10dBm/MHz	
	11dBm/MHz	5250-5350
	11dBm/MHz	For FCC:5470-5725 For IC:5470-5600 5650-5725
	30dBm/500kHz	5725-5850

5.2 TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5725MHz-5850MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Note:

1. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
2. The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is - 3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

5.3 TEST SETUP




5.4 TEST RESULTS

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	9.596	10.071	9.824
	802.11n(HT20)	6.009	6.925	7.499
	Limit	≤11.00dBm/MHz		

802.11a U-NII-1 Low CH




802.11a U-NII-1 Middle CH

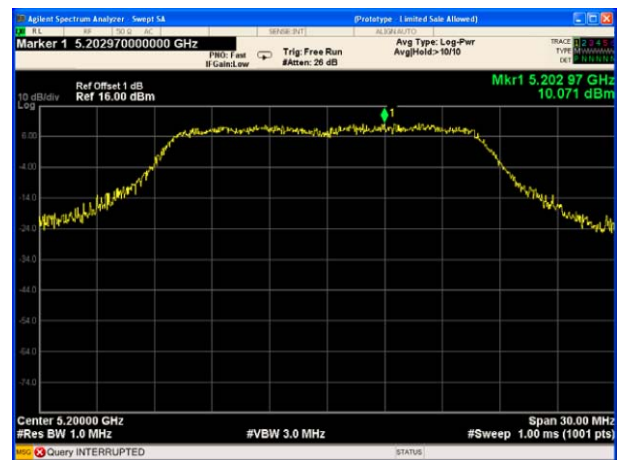


802.11a U-NII-1 High CH




802.11n(HT20) U-NII-1 Low CH

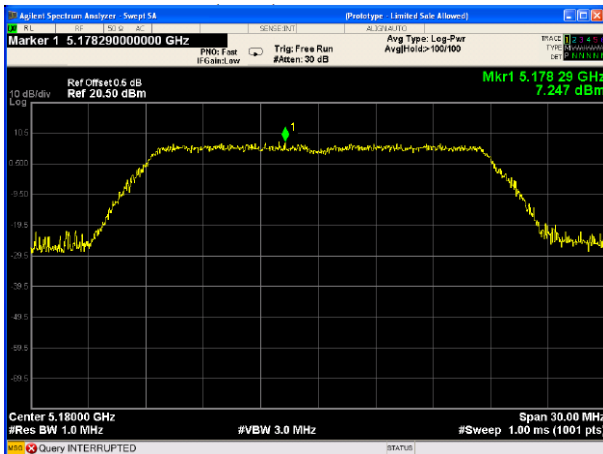


802.11 n(HT20) U-NII-1 Middle CH

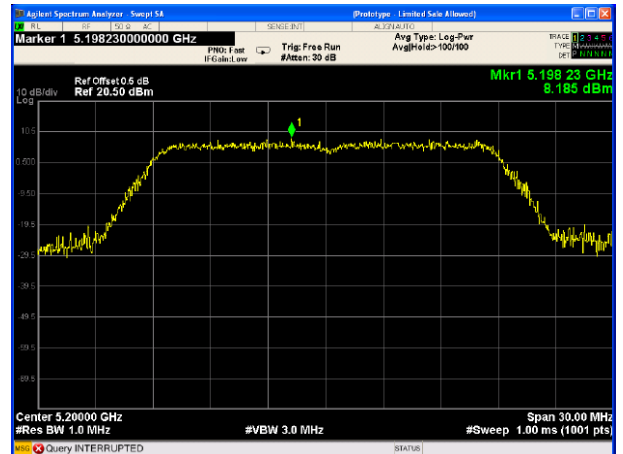


802.11 n(HT20) U-NII-1 High CH

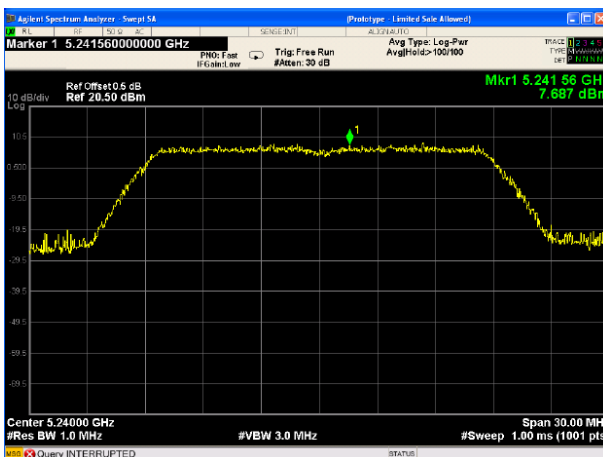


802.11n(HT40) U-NII-1 Low CH

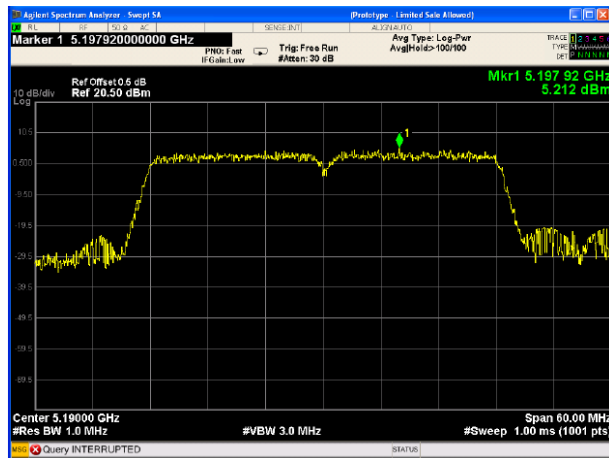


802.11 n(HT40) U-NII-1 High CH

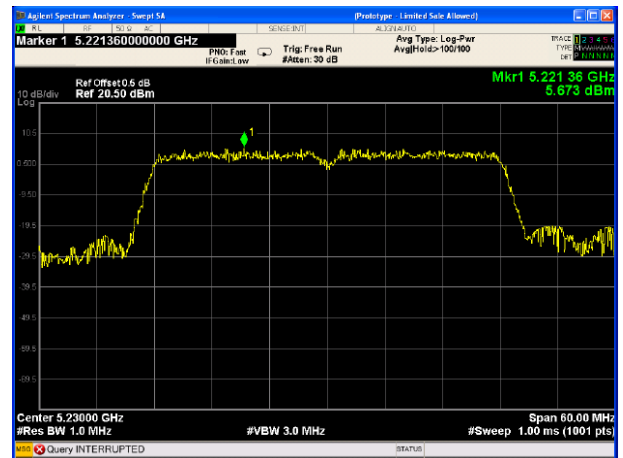


802.11ac(HT20) U-NII-1 Low CH

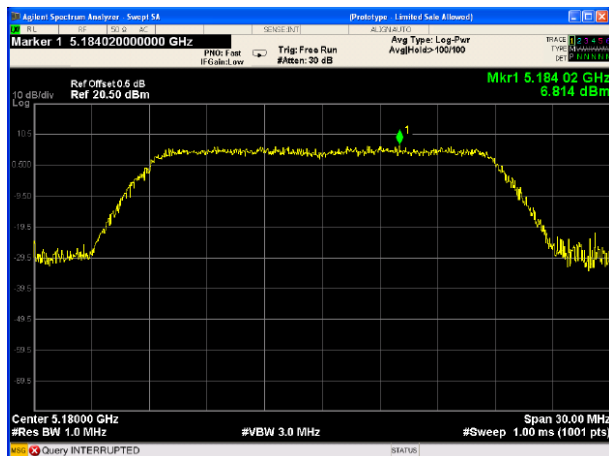


802.11ac(HT20) U-NII-1 Middle CH

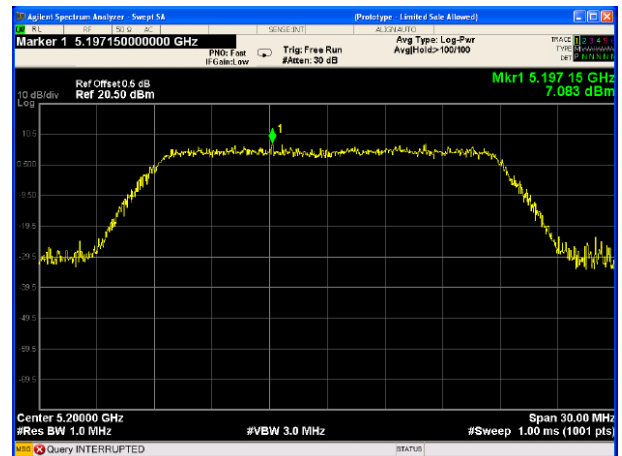


802.11ac(HT20) U-NII-1 High CH

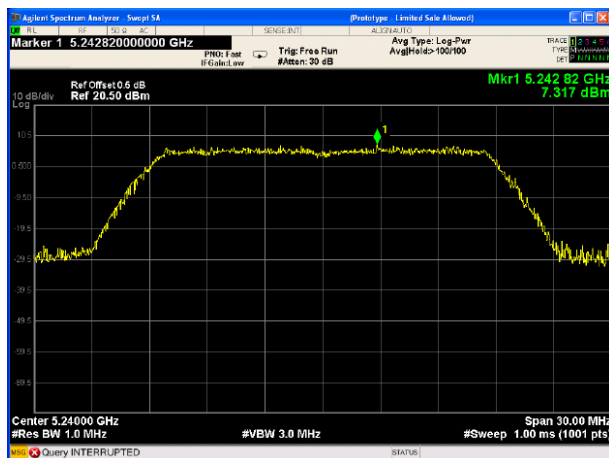


802.11ac(HT40) U-NII-1 Low CH

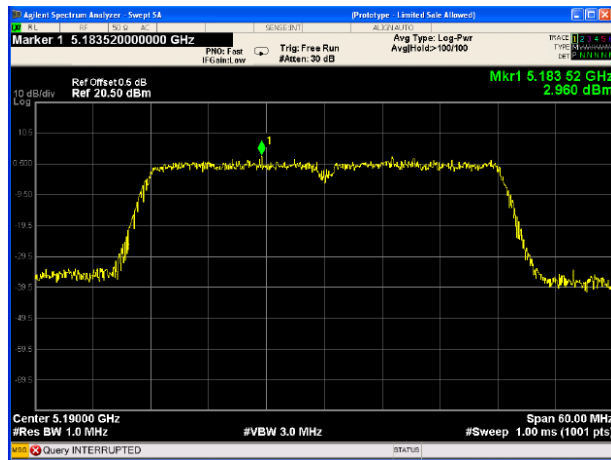

802.11ac(HT40) U-NII-1 High CH

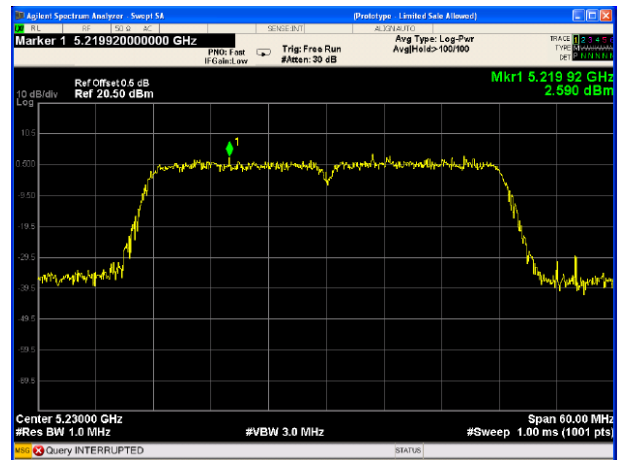

802.11ac(HT40) U-NII-1 Low CH

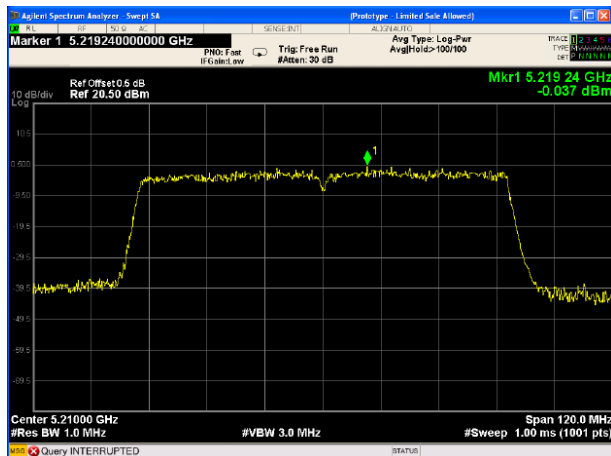

6. FREQUENCY STABILITY MEASUREMENT


6.1 LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual

6.2 TEST PROCEDURE

- (1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- (2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
- (3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

6.3 TEST SETUP

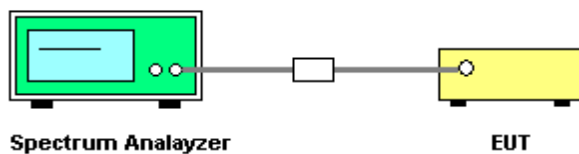

6.4 TEST RESULTS

U-NII-1 Test Frequency:5180MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	3.7	/	/	/
45		1807	2.1599	20
30		1800	2.1516	20
20		1806	2.1587	20
10		1800	2.1516	20
0		1803	2.1552	20
-10		1800	2.1516	20
-15		1809	2.1623	20
-30		/	/	/
20	3.33	1810	2.1635	20
20	4.07	1798	2.1492	20

7. Band edge

7.1 LIMIT

For transmitters operating in the 5.15-5.25 GHz and 5.725-5.85G band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

-27 dBm/MHz Limit=95.2+EIRP[dBm]=95.2-27=68.2 dBμV/m

7.2 TEST PROCEDURE

(1) EUT height should be 0.8m for below 1GHz at a semi□ anechoic chamber while EUT height should be 1.5m for above 1GHz at full chamber or semi□ anechoic chamber ground with absorbers

(2) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m
1GHz-18GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3m
18GHz-40GHz	Horn Antenna(18GHz-40GHz)	1m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9kHz to 40GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m (Except loop antenna, it's fixed 1m above ground.)

- (b) Change work frequency or channel of device if practicable.
- (c) Change modulation type of device if practicable.
- (d) Change power supply range from 85% to 115% of the rated supply voltage
- (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9kHz to 40GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9kHz to 30MHz and 18GHz to 40GHz, so below final test was performed with frequency range from 30MHz to 18GHz.


(6) The emissions from 9kHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz, for emissions from 9kHz-90kHz, 110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit

(7) The emissions from 9kHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9kHz-150kHz	200Hz
150kHz-30MHz	9kHz
30MHz-1GHz	120kHz


(8) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz, Peak detector for Peak measure, RMS detector for AV value

7.3 TEST SETUP

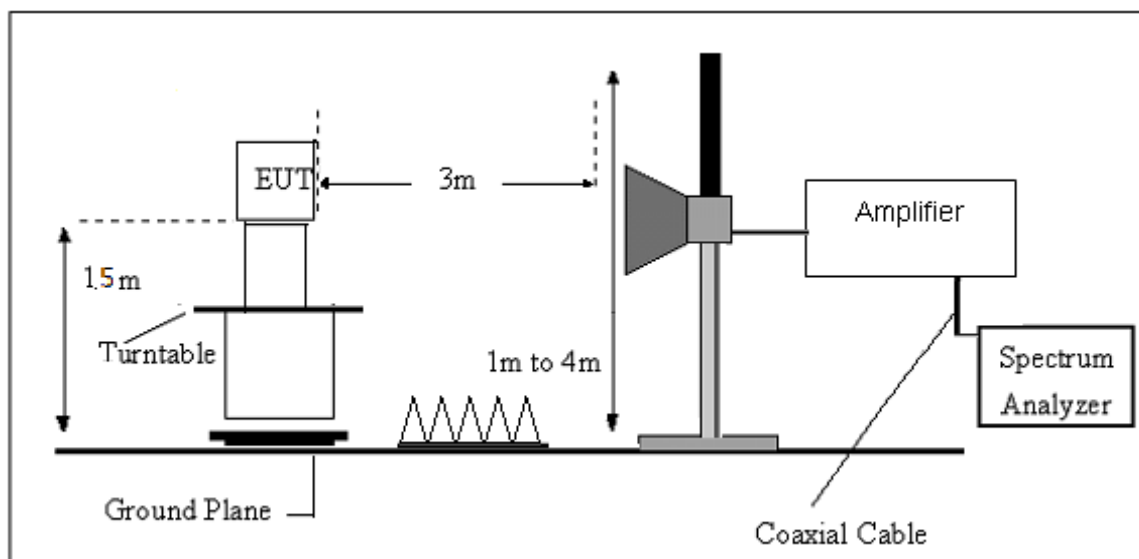


7.5 TEST RESULTS


802.11a U-NII-1 Band edge-left side

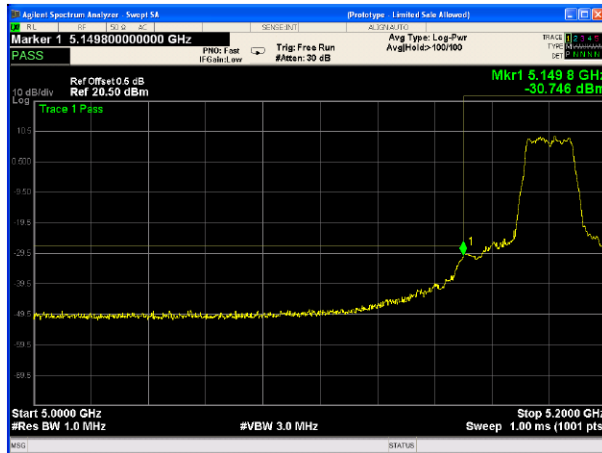


802.11a U-NII-1 Band edge-right side

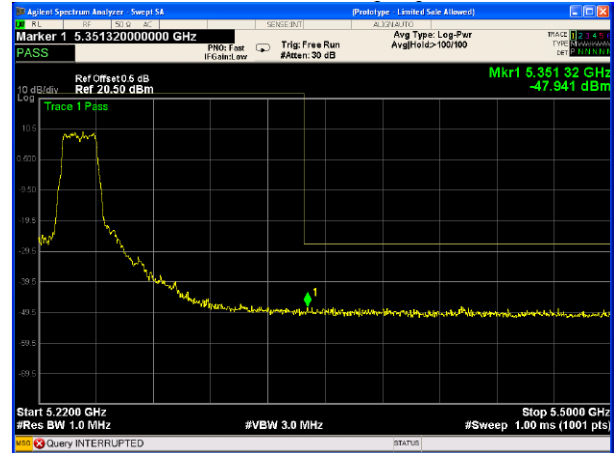


802.11n(H20) U-NII-1 Band edge-left side

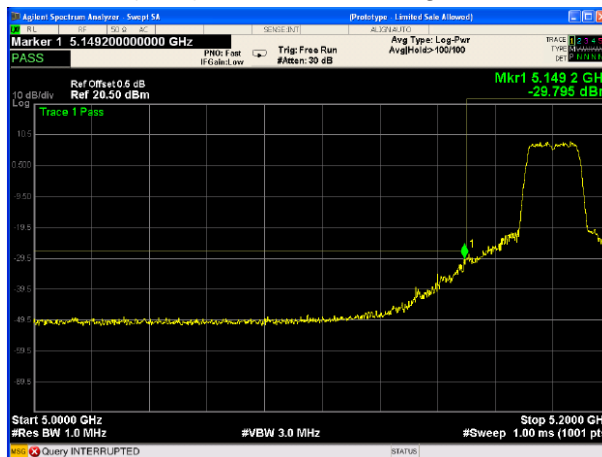


802.11(H20) U-NII-1 Band edge-right side

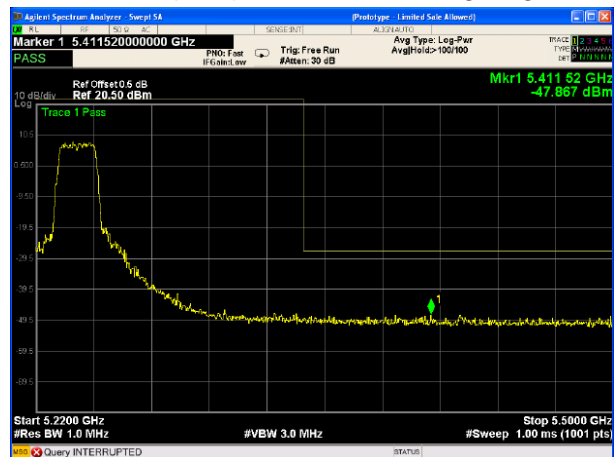


802.11n(H40) U-NII-1 Band edge-left side

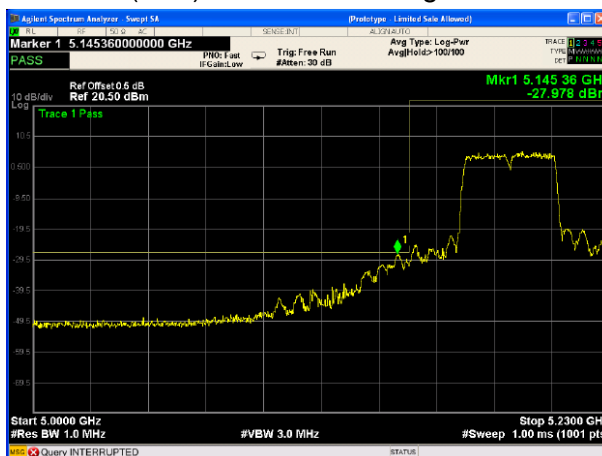


802.11(H40) U-NII-1 Band edge-right side

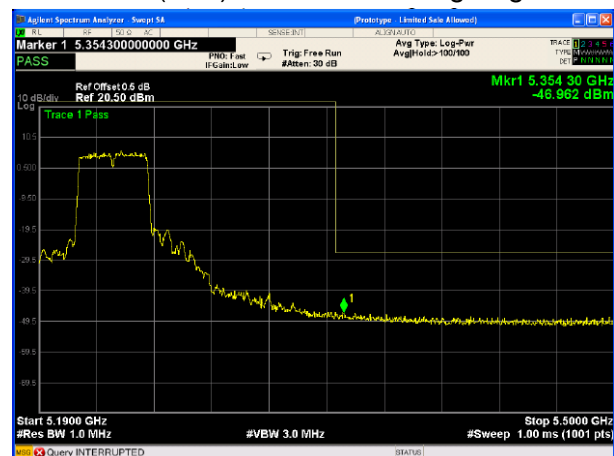


802.11ac(HT20) U-NII-1 Band edge-left side

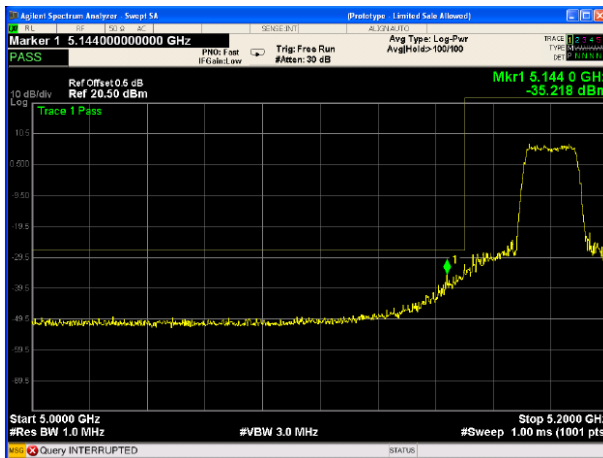


802.11 ac(HT20)U-NII-1 Band edge-right side

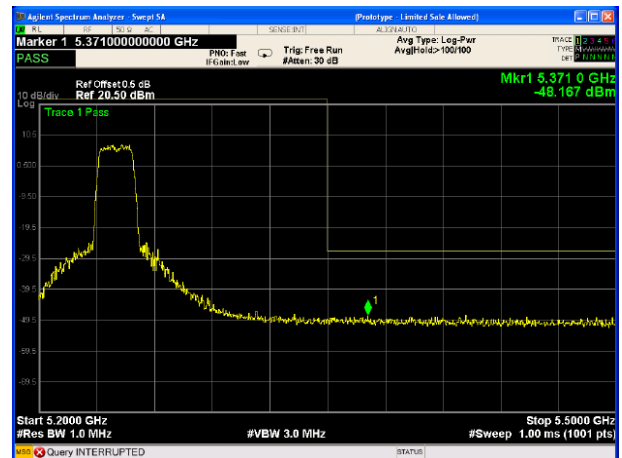


802.11ac(HT40) U-NII-1 Band edge-left side

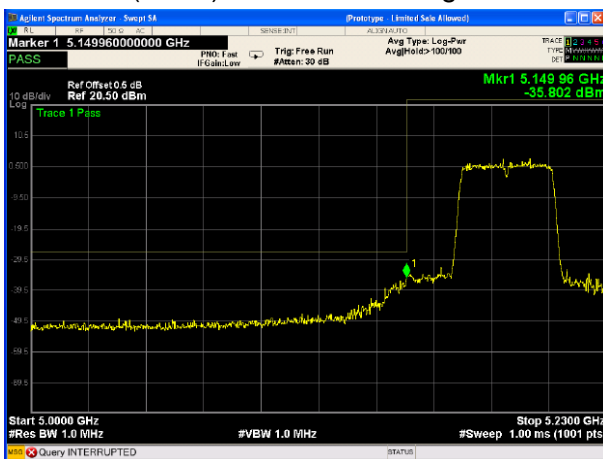


802.11 ac(HT40)U-NII-1 Band edge-right side

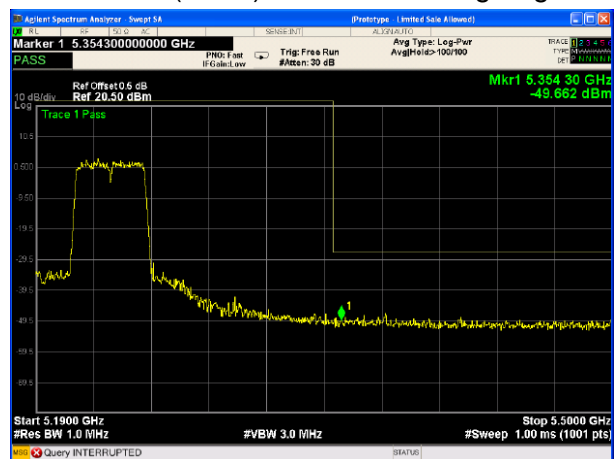

802.11ac(HT80) U-NII-1 Band edge-left side

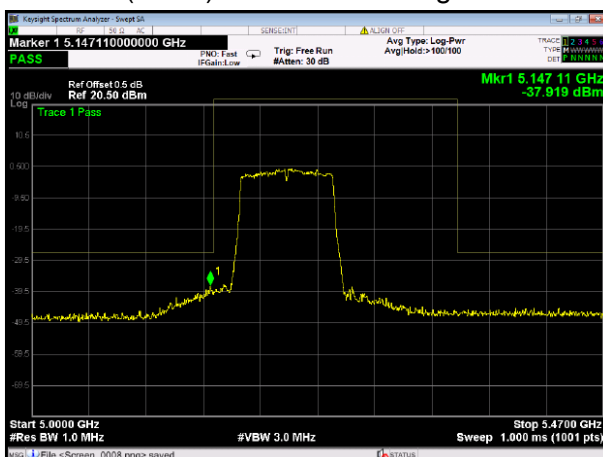

802.11 ac(HT80)U-NII-1 Band edge-right side

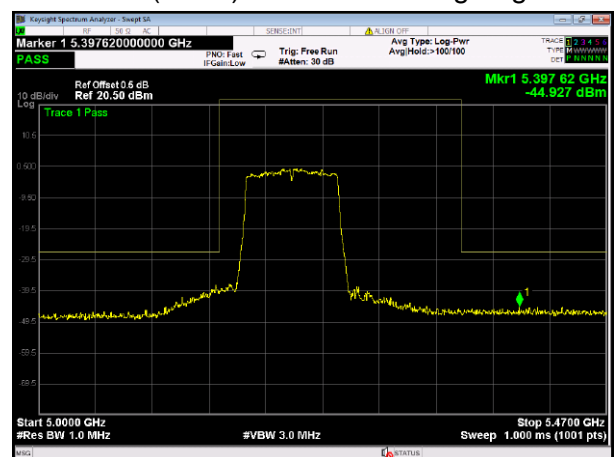

8. Duty Cycle

8.1 TEST REQUIREMENT

47 CFR Part 15C 15.407 and 789033 D02 General UNII Test


Procedures New Rules v02r01(December 14, 2017), Section (B)

ANSI C63.10: 2013

8.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

7.3 TEST SETUP

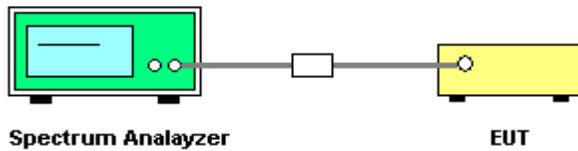

8.4 TEST RESULTS

UNII-1 a Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
40	100	100	100
48	100	100	100

UNII-1 n(HT20) Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
40	100	100	100
48	100	100	100

UNII-1 n(HT40) Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
46	100	100	100

UNII-1 ac(HT20) Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
40	100	100	100
48	100	100	100

UNII-1 ac(HT40) Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
46	100	100	100

UNII-1 ac(HT80) Mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100

9 RADIATED EMISSION MEASUREMENT

9.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

9.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

9.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

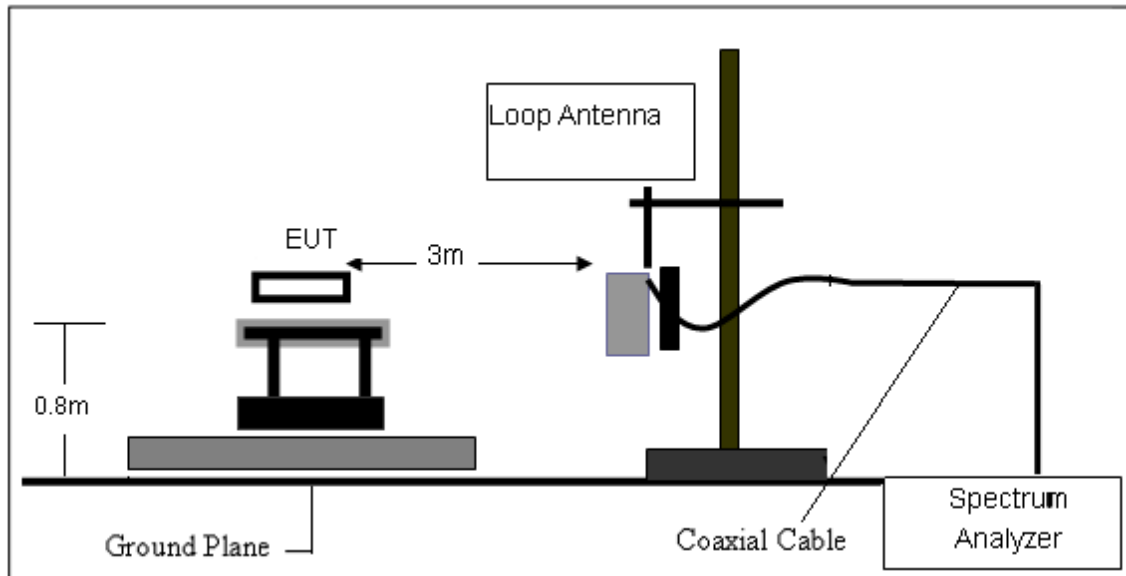

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

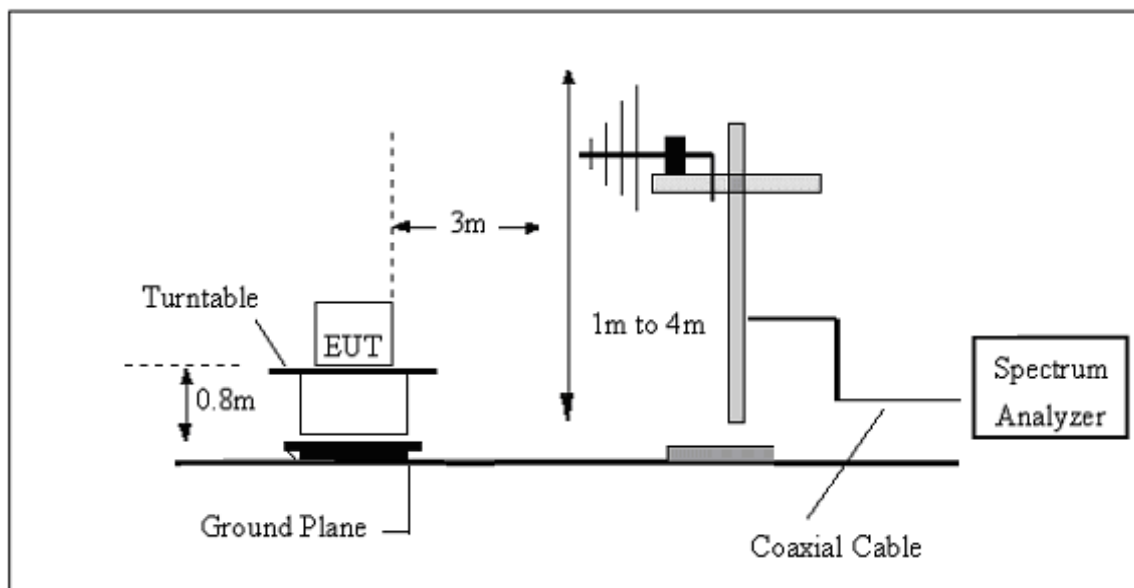

(C) Radiated Emission Test-Up Frequency Above 1GHz

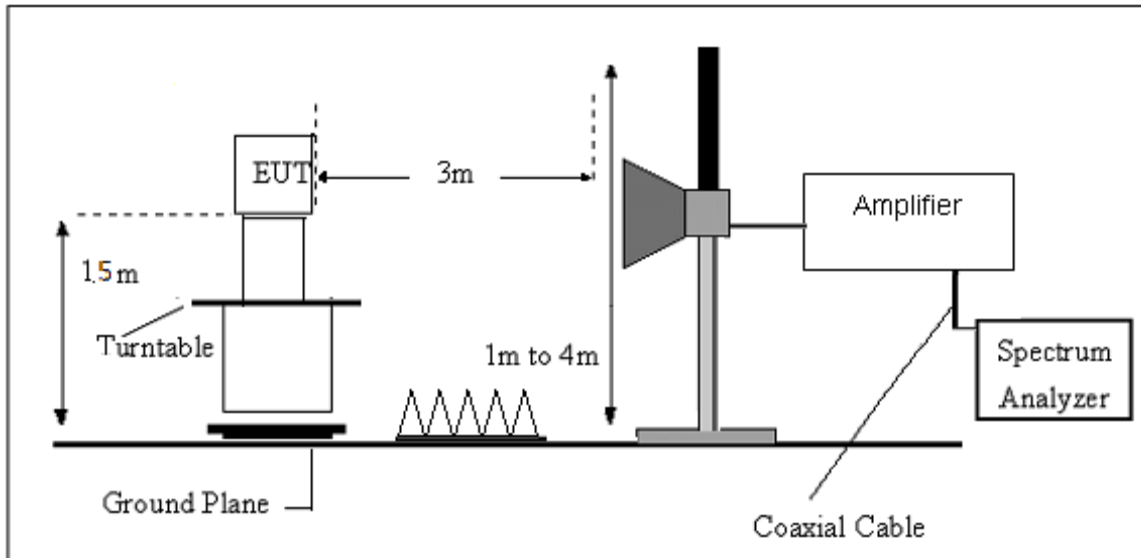

9.4. TEST RESULTS

(9KHz-30MHz)

Temperature:	22.7℃	Relative Humidity:	61%
Test Voltage:	AC 120V 60Hz	Test Mode:	/


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

(30MHz-1000MHz)


802.11a U-NII-1 Low Channel 5180MHz (worst data)

H

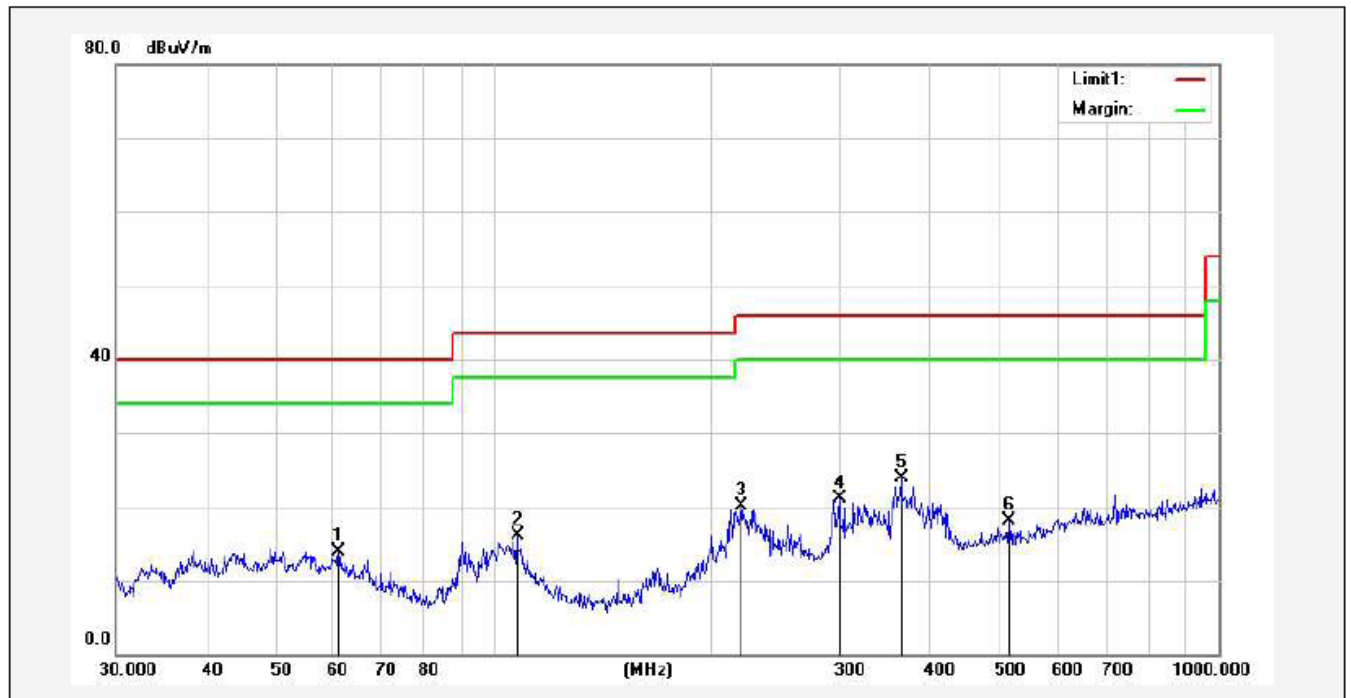

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	60.9176	31.05	-17.17	13.88	40.00	-26.12	peak
2	107.5101	33.85	-17.79	16.06	43.50	-27.44	peak
3	219.0753	38.00	-17.86	20.14	46.00	-25.86	peak
4	299.3158	37.21	-16.06	21.15	46.00	-24.85	peak
5	364.2595	38.81	-14.94	23.87	46.00	-22.13	peak
6	513.6331	31.28	-13.14	18.14	46.00	-27.86	peak

V

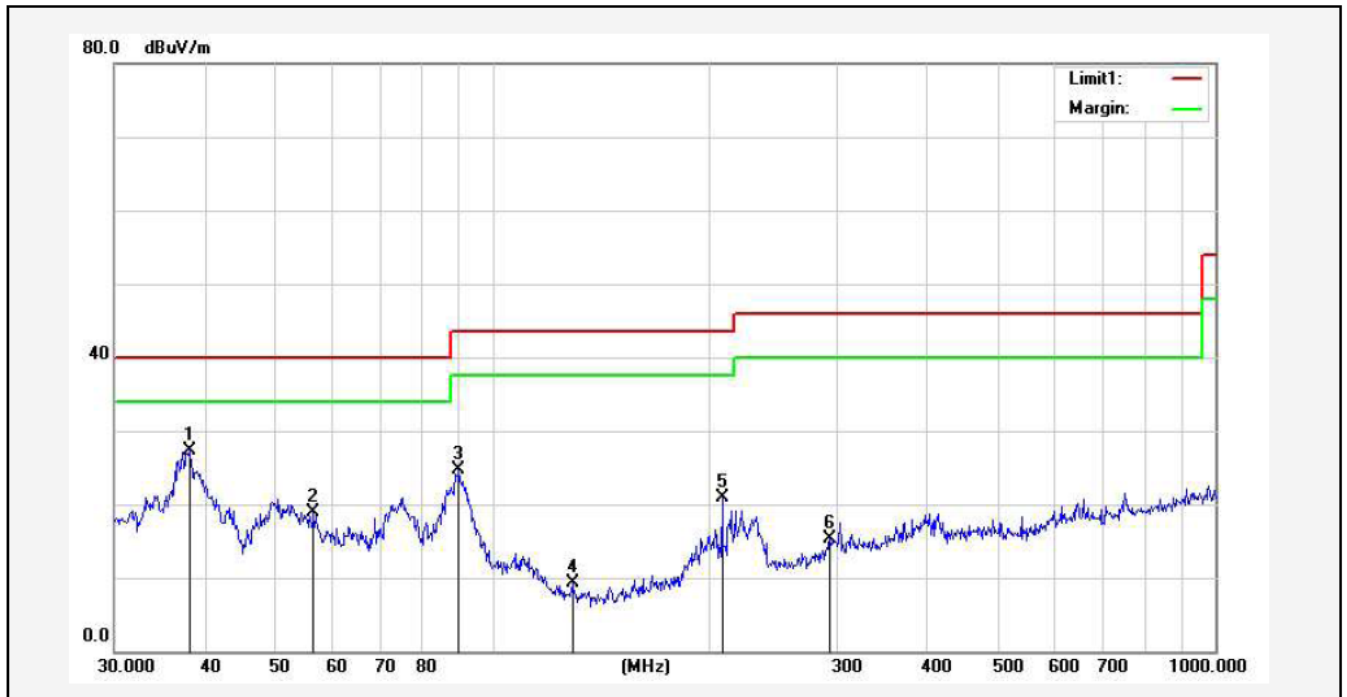

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.0783	67.52	-40.24	27.28	40.00	-12.72	peak
2	56.5929	59.20	-40.24	18.96	40.00	-21.04	peak
3	89.9047	64.97	-40.24	24.73	43.50	-18.77	peak
4	129.0146	49.52	-40.24	9.28	43.50	-34.22	peak
5	207.8501	61.10	-40.24	20.86	43.50	-22.64	peak
6	293.0842	55.52	-40.24	15.28	46.00	-30.72	peak

Note:

All model are tested. Only show worst data on report

(1GHz ~ 40GHz) Restricted band and Spurious emission Requirements

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
4500.37	49.00	PK	109	1.8	H	-2.03	46.97	74.00	-27.03
4500.37	45.66	Ave	109	1.8	H	-2.03	43.63	54.00	-10.37
10360.00	41.87	PK	359	1.3	H	5.33	47.20	74.00	-26.80
10360.00	36.00	Ave	359	1.3	H	5.33	41.33	54.00	-12.67
802.11a U-NII-1 Middle channel 5200MHz									
4531.52	50.05	PK	246	1.8	H	-1.94	48.11	74.00	-25.89
4531.52	44.98	Ave	246	1.8	H	-1.94	43.04	54.00	-10.96
10400.00	42.05	PK	110	1.6	H	5.21	47.26	74.00	-26.74
10400.00	36.17	Ave	110	1.6	H	5.21	41.38	54.00	-12.62
802.11a U-NII-1 High channel 5240MHz									
4502.74	49.98	PK	298	1.7	H	-2.24	47.74	74.00	-26.26
4502.74	43.84	Ave	298	1.7	H	-2.24	41.60	54.00	-12.40
10480.00	42.03	PK	118	1.4	H	5.14	47.17	74.00	-26.83
10480.00	35.42	Ave	118	1.4	H	5.14	40.56	54.00	-13.44

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
4501.82	48.54	PK	162	1.4	H	-2.14	46.40	74.00	-27.60
4501.82	45.07	Ave	162	1.4	H	-2.14	42.93	54.00	-11.07
10360.00	42.12	PK	37	1.6	H	5.33	47.45	74.00	-26.55
10360.00	34.80	Ave	37	1.6	H	5.33	40.13	54.00	-13.87
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
4536.90	49.22	PK	143	1.5	H	-2.12	47.10	74.00	-26.90
4536.90	46.16	Ave	143	1.5	H	-2.12	44.04	54.00	-9.96
10400.00	42.80	PK	21	1.9	H	5.21	48.01	74.00	-25.99
10400.00	36.07	Ave	21	1.9	H	5.21	41.28	54.00	-12.72
802.11n(HT20) U-NII-1 High channel 5240MHz									
4512.97	48.22	PK	257	1.6	H	-1.96	46.26	74.00	-27.74
4512.97	45.88	Ave	257	1.6	H	-1.96	43.92	54.00	-10.08
10480.00	41.17	PK	162	1.4	H	5.14	46.31	74.00	-27.69
10480.00	36.78	Ave	162	1.4	H	5.14	41.92	54.00	-12.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
4506.90	39.13	PK	6	1.8	H	-1.89	37.24	74.00	-36.76
4506.90	39.39	Ave	6	1.8	H	-1.89	37.50	54.00	-16.50
10380.00	39.66	PK	122	1.1	H	5.26	44.92	74.00	-29.08
10380.00	34.53	Ave	122	1.1	H	5.26	39.79	54.00	-14.21
802.11n(HT40) U-NII-1 High channel 5230MHz									
4507.99	38.61	PK	64	1.3	H	-1.94	36.67	74.00	-37.33
4507.99	34.99	Ave	64	1.3	H	-1.94	33.05	54.00	-20.95
10480.00	42.10	PK	98	1.2	H	5.28	47.38	74.00	-26.62
10480.00	36.23	Ave	98	1.2	H	5.28	41.51	54.00	-12.49

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT20) U-NII-1 High channel 5240MHz									
4519.50	43.03	PK	167	1.4	H	-1.81	41.22	74.00	-32.78
4519.50	43.01	Ave	167	1.4	H	-1.81	41.20	54.00	-12.80
5122.32	47.31	PK	303	1.3	H	-1.06	46.25	74.00	-27.75
5122.32	40.75	Ave	303	1.3	H	-1.06	39.69	54.00	-14.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
4500.14	35.59	PK	141	1.2	H	-1.91	33.68	74.00	-40.32
4500.14	30.29	Ave	141	1.2	H	-1.91	28.38	54.00	-25.62
10380.00	39.59	PK	151	1.9	H	5.26	44.85	74.00	-29.15
10380.00	34.79	Ave	151	1.9	H	5.26	40.05	54.00	-13.95
802.11ac(HT40) U-NII-1 High channel 5230MHz									
4503.44	36.59	PK	293	1.4	H	-1.93	34.66	74.00	-39.34
4503.44	31.09	Ave	293	1.4	H	-1.93	29.16	54.00	-24.84
10460.00	40.89	PK	87	2.0	H	5.28	46.17	74.00	-27.83
10480.00	36.20	Ave	87	2.0	H	5.28	41.48	54.00	-12.52

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11ac(HT80) U-NII-1 Low Channel 5210MHz									
4534.47	28.57	PK	298	1.9	H	-1.88	26.69	74.00	-47.31
4534.47	42.75	Ave	298	1.9	H	-1.88	40.87	54.00	-13.13
10420.00	41.85	PK	82	1.3	H	4.65	46.50	74.00	-27.50
10420.00	35.78	Ave	82	1.3	H	4.65	40.43	54.00	-13.57

Note:

All model are tested. Only show worst data on report

10 CONDUCTED EMISSION TEST

10.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBUV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

10.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

10.3 TEST SETUP

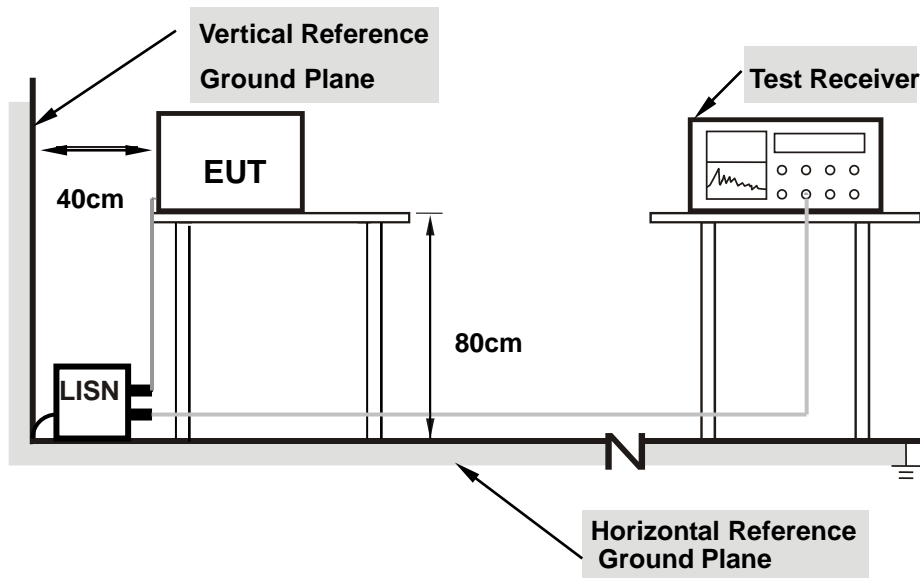


Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

10.4 TEST RESULT

Temperature:	22.1 °C	Relative Humidity:	56%
Test Voltage:	120V/60HZ	Phase:	L/N
Test Mode:	ON		

L-line

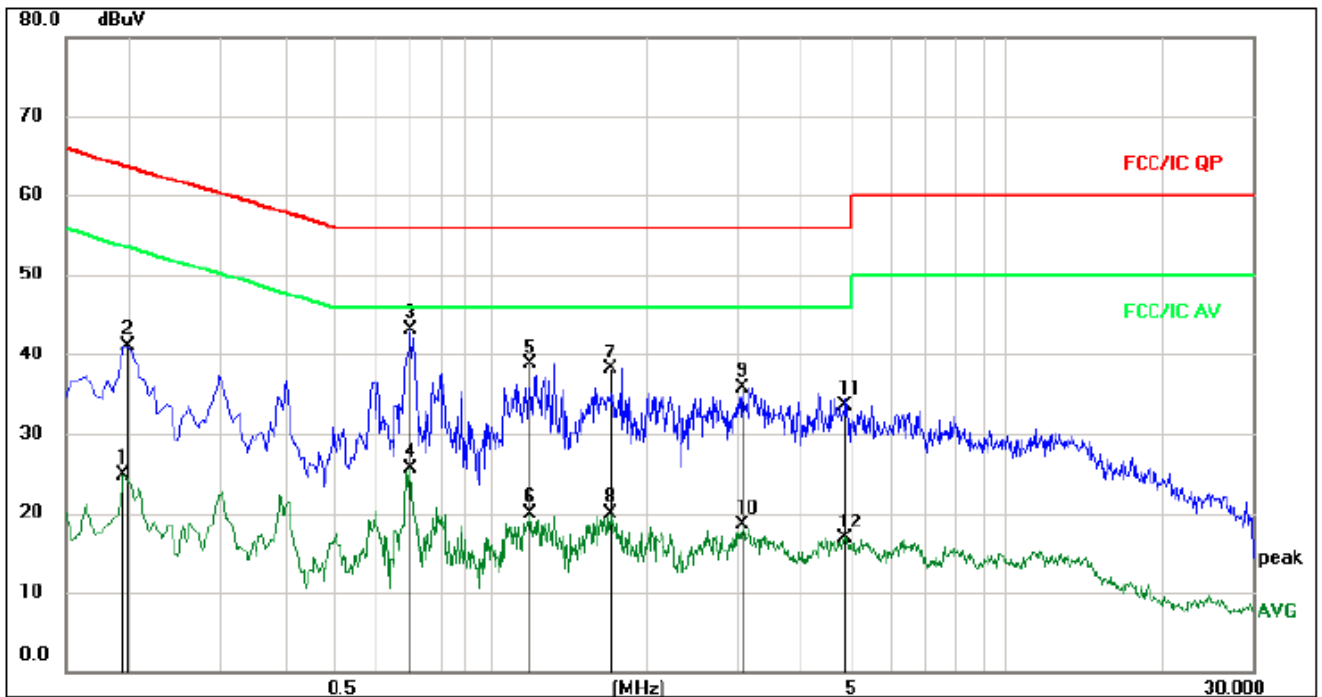


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1949	15.12	9.65	24.77	53.83	-29.06	AVG	
2		0.1995	31.50	9.65	41.15	63.63	-22.48	QP	
3	*	0.6990	33.51	9.68	43.19	56.00	-12.81	QP	
4		0.6990	15.78	9.68	25.46	46.00	-20.54	AVG	
5		1.1940	28.92	9.69	38.61	56.00	-17.39	QP	
6		1.1940	10.20	9.69	19.89	46.00	-26.11	AVG	
7		1.7160	28.32	9.70	38.02	56.00	-17.98	QP	
8		1.7160	10.18	9.70	19.88	46.00	-26.12	AVG	
9		3.0885	25.98	9.72	35.70	56.00	-20.30	QP	
10		3.0885	8.80	9.72	18.52	46.00	-27.48	AVG	
11		4.8795	23.71	9.74	33.45	56.00	-22.55	QP	
12		4.8795	7.06	9.74	16.80	46.00	-29.20	AVG	

N-line

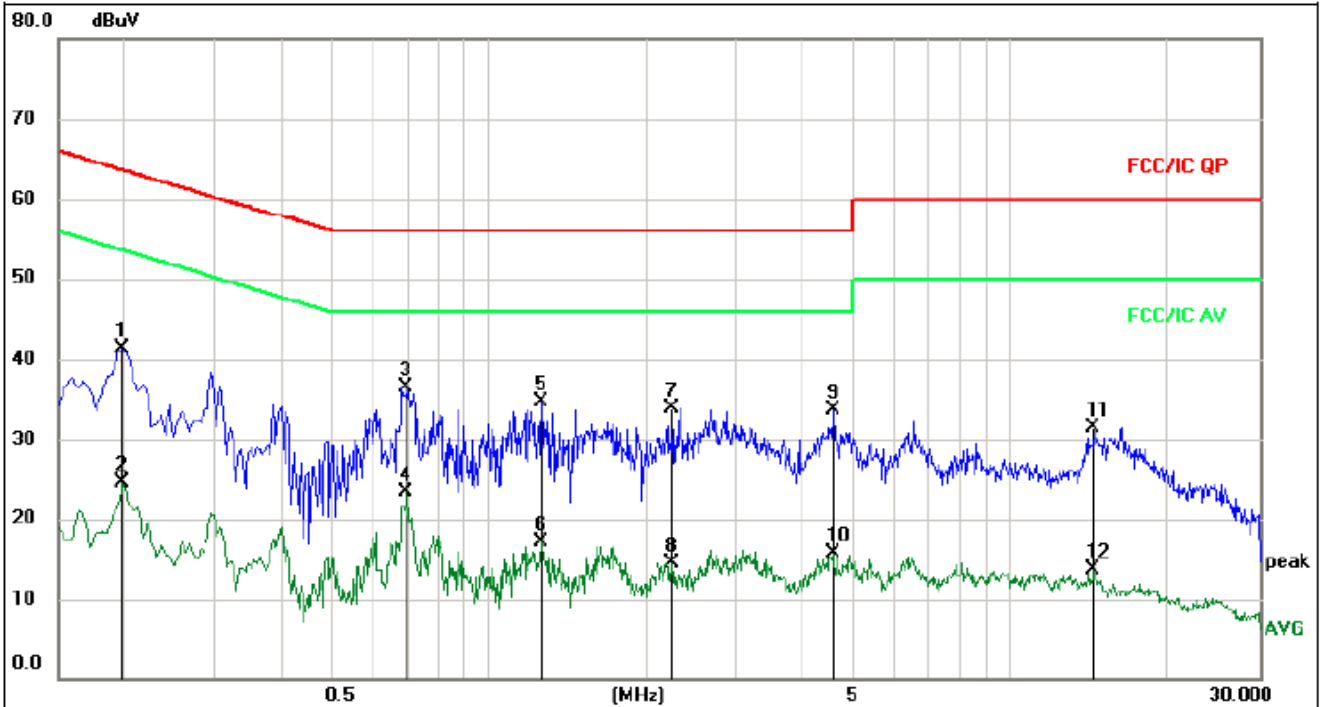

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1995	31.75	9.65	41.40	63.63	-22.23	QP	
2		0.1995	14.82	9.65	24.47	53.63	-29.16	AVG	
3	*	0.6945	26.89	9.68	36.57	56.00	-19.43	QP	
4		0.6945	13.60	9.68	23.28	46.00	-22.72	AVG	
5		1.2660	25.02	9.70	34.72	56.00	-21.28	QP	
6		1.2660	7.44	9.70	17.14	46.00	-28.86	AVG	
7		2.2515	24.18	9.72	33.90	56.00	-22.10	QP	
8		2.2515	4.77	9.72	14.49	46.00	-31.51	AVG	
9		4.5734	23.99	9.73	33.72	56.00	-22.28	QP	
10		4.5734	5.98	9.73	15.71	46.00	-30.29	AVG	
11		14.3700	21.64	9.86	31.50	60.00	-28.50	QP	
12		14.3700	3.76	9.86	13.62	50.00	-36.38	AVG	

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2 RESULT

The antennas used for this product are PIFA antenna and no other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0.dBi.

*****END OF THE REPORT*****