

PARTIAL Test Report

20-1-0170701T08b-C3



Deutsche
Akkreditierungsstelle
D-PL-12047-01-01
D-PL-12047-01-03
D-PL-12047-01-04

Number of pages:	30	Date of Report:	2021-Oct-28
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	AIRBUS OPERATIONS S.A.S
Product:	Avionics device		
Model:	RMAX		
FCC ID:	2AZDJ-RMAX01	IC:	Contains 2417C-EM75
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter B Part 22 Subpart H, Part 24 Subpart E, Part 27 Subpart C Part 15, Subpart C, §15.209 RSS-132, Issue 3; RSS-133, Issue 6, RSS-139, Issue 3, RSS-Gen, Issue 5 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Tested Technology:	UTRA FDD (W-CDMA)		
Test Results:	<input checked="" type="checkbox"/> The EUT complies with the requirements in respect of selected parameters subject to the test. The test results relate only to devices specified in this document The current version of Test Report CETECOM_TR20-1-0170701T08b-C3 replaces the test report CETECOM_TR20-1-0170701T08b-C2 dated 2021-Oct-15. The replaced test report is herewith invalid.		
Signatures:			
	Dipl.-Ing. Niels Jeß Head of Compliance Testing Authorization of test report		Dipl.-Ing. Ninovic Perez Senior Test manager Responsible of test report

Table of Contents

Table of Annex.....	3
1 General information	4
1.1 Disclaimer and Notes.....	4
1.2 Attestation.....	4
1.3 Summary of Test Results	5
1.4 Summary of Test Methods	7
2 Administrative Data	8
2.1 Identification of the Testing Laboratory	8
2.2 General limits for environmental conditions.....	8
2.3 Test Laboratories sub-contracted.....	8
2.4 Organizational Items	8
2.5 Applicant’s details	8
2.6 Manufacturer’s details	8
2.7 EUT: Type, S/N etc. and short descriptions used in this test report	9
2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	9
2.9 Connected cables	9
2.10 Software.....	9
2.11 EUT set-ups	9
2.12 EUT operation modes.....	10
3 Equipment under test (EUT)	11
3.1 General Data of Main EUT as Declared by Applicant.....	11
3.2 Detailed Technical data of Main EUT as Declared by Applicant	12
3.3 Worst case identification.....	13
3.4 Modifications on Test sample.....	13
4 Measurements.....	14
4.1 Conducted RF output power	14
4.2 Radiated RF output power (Calculated)	16
4.3 Peak to Average ratio (PAPR)	19
4.4 Radiated field strength emissions below 30 MHz	20
4.5 Radiated spurious emissions	24
4.6 Radiated Band Edge.....	26
4.7 Results from external laboratory.....	27
4.8 Opinions and interpretations	27
4.9 List of abbreviations	27
5 Equipment lists	28
6 Measurement Uncertainty valid for conducted/radiated measurements	29
7 Versions of test reports (change history)	30

Table of Annex			
Annex No.	Contents	Reference Description	Total Pages
Annex 1	Test result diagrams	CETECOM_TR20-1-0170701T08b-C3-A1	15
Annex 2	Internal photographs of EUT	Please Check Applicant's Document	-
Annex 3	External photographs of EUT	CETECOM_TR20-1-0170701T08b-C3-A3	8
Annex 4	Test set-up photographs	CETECOM_TR20-1-0170701T08b-C3-A4	7
The listed attachments are separate documents.			

1 General information

1.1 Disclaimer and Notes

The test results of this test report relate exclusively to the test item specified in this test report as specified in chapter 2.7. CETECOM does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM.

The testing service provided by CETECOM has been rendered under the current "General Terms and Conditions for CETECOM". CETECOM will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM test report include or imply any product or service warranties from CETECOM, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM.

All rights and remedies regarding vendor's products and services for which CETECOM has prepared this test report shall be provided by the party offering such products or services and not by CETECOM.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at CETECOM.

Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

1.2 Attestation

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All of the above requirements are met in accordance with enumerated standards.

1.3 Summary of Test Results

Test case in W-CDMA2	Reference Clause FCC ☒	Reference Clause ISED ☒	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	-	NA	-
Conducted RF output power	§2.1046(a)	RSS-133:4.1/6.4 + SRSP-510:5.1.2	13	-	Passed
Radiated RF output power	§24.232(c), §2.1046(a)	RSS-133:6.4 + SRSP-510:5.1.2	15	-	Passed**
Occupied Channel Bandwidth 99%	§24.238(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	-	NP	*1)*2)
26dB Emission bandwidth	§24.238(b), §2.1049(h)	RSS-Gen, Issue 5:§6.6	-	NP	*1)*2)
Radiated Band Edge	§24.238(a)(b), §2.1053(a), §2.1057(a)	RSS-133, Issue 6: §6.5.1(i)(ii)	24	-	Passed
Conducted RF Band Edge	§24.238(a)(b), §2.1051	RSS-133, Issue 6: §6.5.1(i)(ii)	-	NP	*1)*2)
Peak to Average ratio (PAPR)	§2.1046(a)	RSS-133:4.1/6.4 + SRSP-510:5.1.2	17	-	Passed
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	-	Passed
Spurious emissions at antenna terminals	§24.238(a)(b), §2.1051	RSS-133, Issue 6: §6.5.1(i)(ii)	-	NP	*1)*2)
Radiated spurious emissions	§24.238(a)(b), §2.1053(a)	RSS-133, Issue 6: §6.5.1(i)(ii)	22	-	Passed
Frequency stability, temperature variation	§24.235, §2.1055(a)(1)	RSS-133: 6.3	-	NP	*1)*2)
Frequency stability, voltage variation	§15.207(a)	RSS-Gen, Issue 5:§8.8	-	NP	*1)*2)
Test case in W-CDMA4	Reference Clause FCC	Reference Clause ISED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5:§8.8	-	NA	-
Conducted RF output power	§27.50(d)(4), §2.1046	RSS-139, Issue 3:§6.5	13	-	Passed
Radiated RF output power	§27.50(d)(4), §2.1046(a)	RSS-139, Issue 3: 6.5 + SRSP-513	15	-	Passed**
Occupied Channel Bandwidth 99%	§27.53(h)(3), §2.202(a)	RSS-Gen, Issue 5:§6.6	-	NP	*1)*2)
26dB Emission bandwidth	§27.53(h)(3), §2.202(a)	RSS-Gen, Issue 5:§6.6	-	NP	*1)*2)
Radiated Band Edge	§27.53(h), §2.1053(a) §2.1057(a)	RSS-139, Issue 3: 6.6 (i)(ii)	24	-	Passed
Conducted RF Band Edge	§27.53(h), §2.1051	RSS-139, Issue 3: §6.6 (i)(ii)	-	NP	*1)*2)
Peak to Average ratio (PAPR)	§27.50(d)(4), §2.1046	RSS-139, Issue 3:§6.5	17	-	Passed
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	-	Passed
Spurious emissions at antenna terminals	§27.53(h), §2.1051	RSS-139, Issue 3:	-	NP	*1)*2)

		§6.6 (i)(ii)			
Radiated spurious emissions	§27.53(h), §2.1053(a)	RSS-139, Issue 3: §6.6 (i)(ii)	22	-	Passed
Frequency stability, temperature variation	§27.54, §2.1055(a)(1)	RSS-139, Issue 3: §6.4	-	NP	*1)*2)
Frequency stability, voltage variation	§15.207(a)	RSS-Gen, Issue 5: §8.8	-	NP	*1)*2)
Test case in W-CDMA5	Reference Clause FCC	Reference Clause ISED	Page	Remark	Result
AC-Power Lines Conducted Emissions	§15.207(a)	RSS-Gen, Issue 5: §8.8	-	NA	-
Conducted RF output power	§22.913(a)(5), §2.1046	RSS-132:5.4 + SRSP 503:5.1.3	13	-	Passed
Radiated RF output power	§22.913, §2.1046(a)	RSS-132: 5.4 + SRSP 503:5.1.3	15	-	Passed**
Occupied Channel Bandwidth 99%	§22.917(b), §2.1049(h)	RSS-Gen, Issue 5: §6.6	-	NP	*1)*2)
26dB Emission bandwidth	§22.917(b), §2.1049(h)	RSS-Gen, Issue 5: §6.6	-	NP	*1)*2)
Radiated Band Edge	§22.917(a)(b), §2.1053(a), §2.1057(a)	RSS-132, Issue 3: §5.5(i)(ii)	24	-	Passed
Conducted RF Band Edge	§22.917(a)(b), §2.1051	RSS-132, Issue 3: §5.5(i)(ii)	-	NP	*1)*2)
Peak to Average ratio (PAPR)	§22.913(a)(5), §2.1046	RSS-132:5.4 + SRSP 503:5.1.3	17	-	Passed
Radiated field strength emissions below 30 MHz	§15.205, §15.209	RSS-Gen: Issue 5: §8.9 Table 6	18	-	Passed
Spurious emissions at antenna terminals	§22.917(a)(b), §2.1051	RSS-132, Issue 3: §5.5(i)(ii)	-	NP	*1)*2)
Radiated spurious emissions	§22.917(a)(b), §2.1053(a)	RSS-132, Issue 3: §5.5(i)(ii)	22	-	Passed
Frequency stability, temperature variation	§22.355, §2.1055(a)(1)	RSS-132: 5.3	-	NP	*1)*2)
Frequency stability, voltage variation	§22.355, §2.1055(a)(1)	RSS-132: 5.3	-	NP	*1)*2)

- PASSED The EUT complies with the essential requirements in the standard.
- FAILED The EUT does not comply with the essential requirements in the standard.
- NP The test was not performed by the CETECOM Laboratory.
- NA Not applicable
- Passed** Radiated RF output power has been calculated based upon Conducted Power Verification.
- *1) Please refer to module report FG791919A with FCC ID: N7NEM75 from SPORTON INTERNATIONAL INC.
- *2) Please refer to module report FG791919A with IC ID: 2417C-EM75 from SPORTON INTERNATIONAL INC.

*The calculation of the measurement uncertainty shows compliance with the "maximum measurement uncertainties" of the tested standard and therefore for result evaluation the stated uncertainties will not be additionally added to the measured results.

Remarks: Another measurements which are not performed (NP) in CETECOM Laboratory, please check initial Module Report.

1.4 Summary of Test Methods

Test case	Test method
AC-Power Lines Conducted Emissions	ANSI C63.4-2014 § 7, ANSI C63.10-2013 § 6.2
Conducted RF output power	ANSI C63.26:2015, §5.2, KDB 971168 D01 v03r01
Radiated RF output power	ANSI C63.26:2015, §5.2.7, KDB 971168 D01 v03r01
Occupied Channel Bandwidth 99%	ANSI C63.26:2015, §5.4.4, KDB 971168 D01 v03r01
26dB Emission bandwidth	ANSI C63.26:2015, §5.4.3, KDB 971168 D01 v03r01
Modulation characteristics	ANSI C63.26:2015, §5.3
Radiated Band Edge	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01
Conducted RF Band Edge	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Peak to Average ratio (PAPR)	ANSI C63.26:2015, §5.2.6
Radiated field strength emissions below 30 MHz	ANSI C63.4-2014 §5.3, §8.2.1, §8.3.1.1+§8.3.2.1
Spurious emissions at antenna terminals	ANSI C63.26:2015, §5.7, KDB 971168 D01 v03r01
Radiated spurious emissions	ANSI C63.26:2015, §5.5, KDB 971168 D01 v03r01, ANSI C63.26.1:2018
Frequency stability, temperature variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01
Frequency stability, voltage variation	ANSI C63.26:2015, §5.6, KDB 971168 D01 v03r01

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Ninovic Perez
Accreditation scope:	DAkkS Webpage
Test location:	CETECOM GmbH; Im Teelbruch 116; 45219 Essen - Kettwig

2.2 General limits for environmental conditions

Temperature:	22±2 °C
Relative. humidity:	45±15% rH

2.3 Test Laboratories sub-contracted

Company name:	-
---------------	---

2.4 Organizational Items

Responsible test manager:	B.Sc. Al-Amin Hossain
Receipt of EUT:	2021-Apr-01
Date(s) of test:	2021-Apr-30 – 2021-May-03
Version of template:	14.7

2.5 Applicant's details

Applicant's name:	AIRBUS OPERATIONS S.A.S
Address:	316 Route de Bayonne, BP M6321 31060 TOULOUSE CEDEX 09 France
Contact Person:	Mr. Grégory ANDRE
Contact Person's Email:	gregory.andre@airbus.com

2.6 Manufacturer's details

Manufacturer's name:	Same as Applicant's details.
Address:	Same as Applicant's details.

2.7 EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	PMT Sample No.	Product	Model	Type	S/N	HW status	SW status
EUT 01	20-1-01707S05_C01	Avionics Device	RMAX	199	2103009s	1.XD RDP2_1.11	3.1.0

*) EUT short description is used to simplify the identification of the EUT in this test report.

2.8 Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

Short description*)	PMT Sample No.	Auxiliary Equipment	Type	S/N	HW status	SW status
AE 01	20-1-01707S06_C01	Antenna	-	-	-	-
AE 02	20-1-01707S17_C01	Test box with harness	-	-	-	-
AE 03	-	Laptop	DELL	CTC 522013	-	-

*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

2.9 Connected cables

Short description*)	PMT Sample No.	Cable type	Connectors	Length
CAB 01	20-1-01707S08_C01	Long bonding wire	-	-
CAB 02	20-1-01707S13_C01	Front face connector	-	RS232
CAB 03	20-1-01707S15_C01	Antenna cables	-	-

*) CAB short description is used to simplify the identification of the connected cables in this test report.

2.10 Software

Short description*)	PMT Sample No.	Software	Type	S/N	HW status	SW status
-	-	-	-	-	-	-

*) SW short description is used to simplify the identification of the used software in this test report.

2.11 EUT set-ups

set-up no. *)	Combination of EUT and AE	Description
1	EUT 01 + AE 01 + AE 02 + CAB 01 + CAB 02 + CAB 03	<ul style="list-style-type: none"> ➤ Used for Radiated measurements ➤ AE 03 has been used only before the test to activate the Cellular modem
2	EUT 01 + AE 02 + CAB 01 + CAB 02	<ul style="list-style-type: none"> ➤ Used for Conducted measurements ➤ AE 03 has been used only before the test to activate the Cellular modem

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

2.12 EUT operation modes

EUT operating mode no.*)	Operating modes	Additional information
Operating mode 1	<p>W-CDMA FDD-Band II Traffic, 12.2 kbps RMC UE allocated channel 9538 (fc = 1907.6 MHz) or channel 9938 (fc = 1987.6 MHz)</p>	<p>A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24 dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.</p>
Operating mode 2	<p>W-CDMA FDD-Band IV Traffic, 12.2 kbps RMC UE allocated channel 1413 (fc = 1732.6 MHz) or channel 1638 (fc = 2132.6 MHz)</p>	<p>A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24 dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.</p>
Operating mode 3	<p>W-CDMA FDD-Band V Traffic, 12.2 kbps RMC UE allocated channel 4132 (fc = 826.4 MHz) or channel 4357 (fc = 871.4 MHz)</p>	<p>A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24 dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.</p>

*) EUT operating mode no. is used to simplify the test report.

3 Equipment under test (EUT)

3.1 General Data of Main EUT as Declared by Applicant

Product name	Avionics device		
Kind of product	RMAX		
Firmware	<input type="checkbox"/> for normal use	<input checked="" type="checkbox"/> Special version for test execution	
	<input type="checkbox"/> AC Mains		
	<input checked="" type="checkbox"/> DC Mains	28 V DC	
Operational conditions	T _{nom} =25 °C		
EUT sample type	Pre-Production		
Weight	0.4 kg		
Size [LxWxH]	10 x 6.2 x 8 cm		
Interfaces/Ports	Plesae check the document" RMAX operational description RED_D21009474_v1"		
For further details refer Applicants Declaration & following technical documents			
➤ RMAX operational description RED_D21009474_v1			

3.2 Detailed Technical data of Main EUT as Declared by Applicant

TX Frequency range	<input checked="" type="checkbox"/> UMTS-FDD band 2	1850 - 1910 MHz (Uplink), 1930 - 1990 MHz (Downlink)	
	<input checked="" type="checkbox"/> UMTS-FDD band 4	1710 - 1755 MHz (Uplink), 2110 - 2155 MHz (Downlink)	
	<input checked="" type="checkbox"/> UMTS-FDD band 5	824 - 849 MHz (Uplink), 869 - 894 MHz (Downlink)	
Number of channels	<input checked="" type="checkbox"/> UMTS-FDD band 2	UARFCN range 9262 - 9538	
	<input checked="" type="checkbox"/> UMTS-FDD band 4	UARFCN range 1312 - 1513	
	<input checked="" type="checkbox"/> UMTS-FDD band 5	UARFCN range 4132 - 4233	
Type of modulation	QPSK		
Data rates	Downlink Max 5.76 Mbps	Uplink Max 5.76 Mbps	
Emission designator	Nominal CBW	See initial certification of the module:	
	-	FCC ID: N7NEM75, IC ID: 2417C-EM75	
Antenna Type	<input type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector		
Antenna gain(s)	UMTS-FDD band 2 3.5 dBi UMTS-FDD band 4: 2.9 dBi UMTS-FDD band 5: 1.1 dBi		
FCC label attached	No		
Test firmware / software and storage location	EUT 01		
For further details refer Applicants Declaration & following technical documents			
Description of Reference Document (supplied by applicant)		Version	Total Pages
➤ RMAX operational description RED_D21009474_v1		➤ V1	10
➤ MPE Information Requirements_v4		➤ V4	1

Remark: For more information regarding antenna gain, please check document “MPE Information Requirements_v4”.

3.3 Worst case identification

Band	Channel
UMTS II	Channel:9538
UMTS IV	Channel:1413
UMTS V	Channel:4132

Remarks:

- Worst Case configuration has been taken from Initial Certified Module Conducted Power,
- Worst Case configuration has been verified by CETECOM GmbH,
- Initial Module **FG791919A with FCC ID: N7NEM75 from SPORTON INTERNATIONAL INC.**
- Initial Module **FG791919A with IC ID: 2417C-EM75 from SPORTON INTERNATIONAL INC.**

3.4 Modifications on Test sample

Additions/deviations or exclusions	-
------------------------------------	---

4 Measurements


4.1 Conducted RF output power

4.1.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

Schematic:

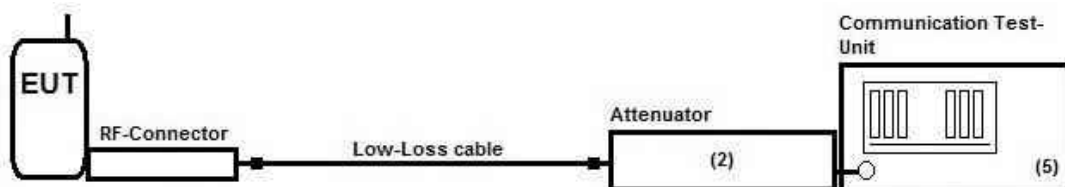

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

EUT settings

The EUT was instructed to send with maximum power (if adjustable) according applicants instructions.
The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band within the designated range within the allowed channel bandwidths. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance

4.1.2 Measurement Location

Test site	Conducted Emission
-----------	--------------------

4.1.3 Limit

Frequency Range [MHz]	Limit [W]	Limit [dBm]
824 – 849	7 ERP	38.5
1710 – 1755	1 EIRP	30
1850 – 1910	2 EIRP	33

4.1.4 Result

Conducted Power verification performed by CETECOM GmbH						Certified Module Conducted Power Value				
UMTS FDD II	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	Result	PAR Faktor [dB]	UMTS FDD II	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 9262	1852.4	25.92	22.22	Passed*	3.70	Channel 9262	1852.4	25.94	22.58	3.36
Channel 9400	1880.0	25.59	22.32	Passed*	3.27	Channel 9400	1880.0	25.83	22.43	3.40
Channel 9538	1907.6	25.34	22.34	Passed*	3.00	Channel 9538	1907.6	25.92	22.56	3.36
UMTS FDD IV	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	Result	PAR Faktor [dB]	UMTS FDD IV	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 1312	1712.4	26.10	22.53	Passed*	3.6	Channel 1312	1712.4	26.12	22.76	3.4
Channel 1413	1732.6	26.13	22.71	Passed*	3.4	Channel 1413	1732.6	26.19	22.83	3.4
Channel 1513	1752.6	26.01	22.43	Passed*	3.6	Channel 1513	1752.6	26.09	22.77	3.3
UMTS FDD V	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	Result	PAR Faktor [dB]	UMTS FDD V	ARFCN-Frequency [MHz]	Peak detektor [dBm]	RMS detektor [dBm]	PAR Faktor [dB]
Channel 4132	826.4	25.75	22.63	Passed*	3.1	Channel 4132	826.4	26.13	22.81	3.3
Channel 4182	836.4	25.81	22.56	Passed*	3.3	Channel 4182	836.4	26.08	22.80	3.3
Channel 4233	846.6	25.95	22.50	Passed*	3.5	Channel 4233	846.6	26.10	22.86	3.2

Passed*: All Conducted Power verification results are below the Initial module Power Value.

Conclusion conducted power verification:

All measured power values are below the values of the modular reports

- FG791919A with FCC ID: N7NEM75 from SPORTON INTERNATIONAL INC.
- FG791919A with IC ID: 2417C-EM75 from SPORTON INTERNATIONAL INC.

4.2 Radiated RF output power (Calculated)

All measured power values are below the values of the modular report

- FG791919A with FCC ID: N7NEM75 from SPORTON INTERNATIONAL INC.
- FG791919A with IC ID: 2417C-EM75 from SPORTON INTERNATIONAL INC.

ERP/ EIRP has been calculated based upon Conducted Power Verification (Chapter 4.1.4).

WCDMA Band	Channel	Frequency [MHz]		cond. Average Power [dBm]	Antenna Gain [dBi]	Ext. Path Loss to antenna (external cables) [dB]	EIRP [dBm]	ERP [dBm]
2	9262	1852.60	RMC 12.2K	22.58	3.50	2.85	23.23	--
			HSDPA Subset-1	21.60	3.50	2.85	22.25	--
			HSDPA Subset-2	21.58	3.50	2.85	22.23	--
			HSDPA Subset-3	21.07	3.50	2.85	21.72	--
			HSDPA Subset-4	21.05	3.50	2.85	21.70	--
			HSUPA Subset-1	21.54	3.50	2.85	22.19	--
			HSUPA Subset-2	19.56	3.50	2.85	20.21	--
			HSUPA Subset-3	20.57	3.50	2.85	21.22	--
	HSUPA Subset-4	19.53	3.50	2.85	20.18	--		
	HSUPA Subset-5	21.54	3.50	2.85	22.19	--		
	9400	1880.00	RMC 12.2K	22.43	3.50	2.85	23.08	--
			HSDPA Subset-1	21.43	3.50	2.85	22.08	--
			HSDPA Subset-2	21.42	3.50	2.85	22.07	--
			HSDPA Subset-3	20.96	3.50	2.85	21.61	--
			HSDPA Subset-4	20.94	3.50	2.85	21.59	--
			HSUPA Subset-1	21.38	3.50	2.85	22.03	--
			HSUPA Subset-2	19.41	3.50	2.85	20.06	--
			HSUPA Subset-3	20.41	3.50	2.85	21.06	--
	HSUPA Subset-4	19.38	3.50	2.85	20.03	--		
	HSUPA Subset-5	21.39	3.50	2.85	22.04	--		
	9537	1907.40	RMC 12.2K	22.56	3.50	2.85	23.21	--
			HSDPA Subset-1	21.59	3.50	2.85	22.24	--
			HSDPA Subset-2	21.59	3.50	2.85	22.24	--
			HSDPA Subset-3	21.09	3.50	2.85	21.74	--
			HSDPA Subset-4	21.08	3.50	2.85	21.73	--
			HSUPA Subset-1	21.53	3.50	2.85	22.18	--
			HSUPA Subset-2	19.52	3.50	2.85	20.17	--
HSUPA Subset-3			20.51	3.50	2.85	21.16	--	
HSUPA Subset-4	19.51	3.50	2.85	20.16	--			
HSUPA Subset-5	21.52	3.50	2.85	22.17	--			



WCDMA Band	Channel	Frequency [MHz]		cond. Average Power [dBm]	Antenna Gain [dBi]	Ext. Path Loss to antenna (external cables) [dB]	EIRP [dBm]	ERP [dBm]
4	1312	1712.40	RMC 12.2K	22.76	2.90	2.01	23.65	--
			HSDPA Subset-1	21.77	2.90	2.01	22.66	--
			HSDPA Subset-2	21.75	2.90	2.01	22.64	--
			HSDPA Subset-3	21.26	2.90	2.01	22.15	--
			HSDPA Subset-4	21.24	2.90	2.01	22.13	--
			HSUPA Subset-1	21.69	2.90	2.01	22.58	--
			HSUPA Subset-2	19.65	2.90	2.01	20.54	--
			HSUPA Subset-3	20.65	2.90	2.01	21.54	--
	HSUPA Subset-4	19.64	2.90	2.01	20.53	--		
	HSUPA Subset-5	21.71	2.90	2.01	22.60	--		
	1413	1732.60	RMC 12.2K	22.83	2.90	2.01	23.72	--
			HSDPA Subset-1	21.86	2.90	2.01	22.75	--
			HSDPA Subset-2	21.85	2.90	2.01	22.74	--
			HSDPA Subset-3	21.34	2.90	2.01	22.23	--
			HSDPA Subset-4	21.34	2.90	2.01	22.23	--
			HSUPA Subset-1	21.80	2.90	2.01	22.69	--
			HSUPA Subset-2	19.84	2.90	2.01	20.73	--
			HSUPA Subset-3	20.82	2.90	2.01	21.71	--
	HSUPA Subset-4	19.83	2.90	2.01	20.72	--		
	HSUPA Subset-5	21.81	2.90	2.01	22.70	--		
	1513	1752.60	RMC 12.2K	22.77	2.90	2.01	23.66	--
			HSDPA Subset-1	21.81	2.90	2.01	22.70	--
			HSDPA Subset-2	21.79	2.90	2.01	22.68	--
			HSDPA Subset-3	21.28	2.90	2.01	22.17	--
			HSDPA Subset-4	21.27	2.90	2.01	22.16	--
			HSUPA Subset-1	21.74	2.90	2.01	22.63	--
			HSUPA Subset-2	19.73	2.90	2.01	20.62	--
HSUPA Subset-3			20.71	2.90	2.01	21.60	--	
HSUPA Subset-4	19.71	2.90	2.01	20.60	--			
HSUPA Subset-5	21.74	2.90	2.01	22.63	--			
5	4132	826.40	RMC 12.2K	22.81	1.10	1.15	22.76	20.61
			HSDPA Subset-1	21.82	1.10	1.15	21.77	19.62
			HSDPA Subset-2	21.81	1.10	1.15	21.76	19.61
			HSDPA Subset-3	21.31	1.10	1.15	21.26	19.11
			HSDPA Subset-4	21.30	1.10	1.15	21.25	19.10
			HSUPA Subset-1	21.77	1.10	1.15	21.72	19.57
			HSUPA Subset-2	19.79	1.10	1.15	19.74	17.59
			HSUPA Subset-3	20.76	1.10	1.15	20.71	18.56
	HSUPA Subset-4	19.77	1.10	1.15	19.72	17.57		
	HSUPA Subset-5	21.78	1.10	1.15	21.73	19.58		
	4182	836.40	RMC 12.2K	22.8	1.10	1.15	22.75	20.60
			HSDPA Subset-1	21.83	1.10	1.15	21.78	19.63
			HSDPA Subset-2	21.82	1.10	1.15	21.77	19.62
			HSDPA Subset-3	21.31	1.10	1.15	21.26	19.11
			HSDPA Subset-4	21.32	1.10	1.15	21.27	19.12
			HSUPA Subset-1	21.78	1.10	1.15	21.73	19.58
			HSUPA Subset-2	19.82	1.10	1.15	19.77	17.62
			HSUPA Subset-3	20.79	1.10	1.15	20.74	18.59
	HSUPA Subset-4	19.78	1.10	1.15	19.73	17.58		
	HSUPA Subset-5	21.75	1.10	1.15	21.70	19.55		
	4233	846.60	RMC 12.2K	22.86	1.10	1.15	22.81	20.66
			HSDPA Subset-1	21.87	1.10	1.15	21.82	19.67
			HSDPA Subset-2	21.85	1.10	1.15	21.80	19.65
			HSDPA Subset-3	21.34	1.10	1.15	21.29	19.14
			HSDPA Subset-4	21.34	1.10	1.15	21.29	19.14
			HSUPA Subset-1	21.83	1.10	1.15	21.78	19.63
			HSUPA Subset-2	19.84	1.10	1.15	19.79	17.64
HSUPA Subset-3			20.82	1.10	1.15	20.77	18.62	
HSUPA Subset-4	19.85	1.10	1.15	19.80	17.65			
HSUPA Subset-5	21.82	1.10	1.15	21.77	19.62			

EIRP = Average Power + Antenna Gain - Ext. Path Loss to antenna (external cables)

ERP = EIRP - 2.15



Band	Limit [W]	Limit [dBm]	Verdict
WCDMA Band 2	2 EIRP	33	Passed
WCDMA Band 4	1 EIRP	30	Passed
WCDMA Band 5	7 ERP	38.5	Passed


4.3 Peak to Average ratio (PAPR)

4.3.1 Description of the general test setup and methodology, see below example:

Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5).

The measurements were performed with the integrated power measurement function of the communication test-unit. (5).

Schematic:

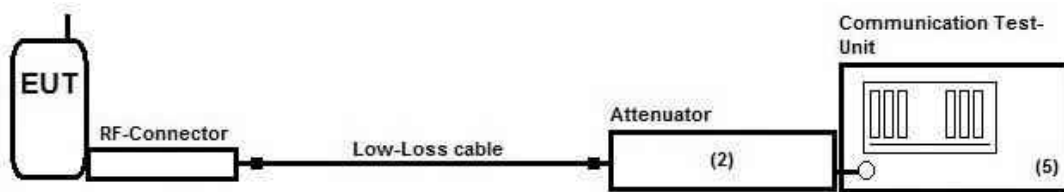

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

EUT settings

The EUT was set to highest transmit power condition.

4.3.2 Measurement Location

Test site	Conducted Emission
-----------	--------------------

4.3.3 Limit

Peak to average power ratio [dB]
≤ 13

4.3.4 Result

Band	Mode	PAPR [dB]	Result
UMTS II	1	3.0	Passed
UMTS IV	2	3.4	Passed
UMTS V	3	3.1	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0170701T08b-C2-A1**

According KDB 971168D01 v03r01 two method are allowed.

- Chapter 5.7.2 Sub clause 5.2.3.4 of ANSI C63.26-2015 CCDF-Method (0.1% probability)
- Chapter 5.7.3: Sub clause 5.2.6 of ANSI C63.26-2015 [PAPR (dB)= P_{PK} (dBm or dBW) – P_{Avg} (dBm or dBW)]


4.4 Radiated field strength emissions below 30 MHz

4.4.1 Description of the general test setup and methodology, see below example:

Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter "General Limit - Radiated field strength emissions below 30 MHz". The tests are performed in the semi anechoic room recognized by the regulatory commission.

Schematic:

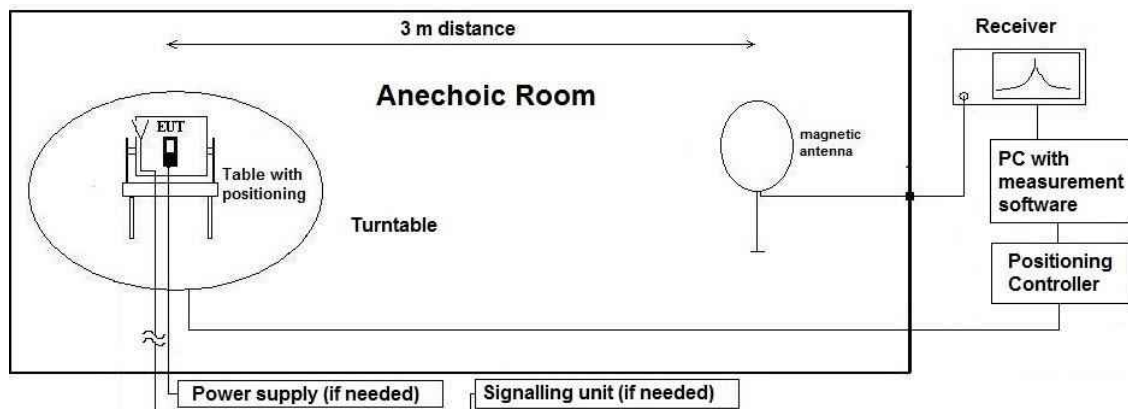

Testing method:

The measurement is made according to relevant reference clauses:
(See *Tables Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded.

The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

Formula:

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C_L = Cable loss

D_F = Distance correction factor (if used)

E_C = Electrical field – corrected value

E_R = Receiver reading

G_A = Gain of pre-amplifier (if used)

L_T = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

4.4.2 Correction factors due to reduced meas. distance (f < 30 MHz):

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according to extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (dmeas < Dnear-field)	2nd Condition (Limit distance bigger dnear-field)	Distance Correction accord. Formula
kHz	9	33333.33	5305.17	300	fulfilled	not fulfilled	-80.00
	10	30000.00	4774.65		fulfilled	not fulfilled	-80.00
	20	15000.00	2387.33		fulfilled	not fulfilled	-80.00
	30	10000.00	1591.55		fulfilled	not fulfilled	-80.00
	40	7500.00	1193.66		fulfilled	not fulfilled	-80.00
	50	6000.00	954.93		fulfilled	not fulfilled	-80.00
	60	5000.00	795.78		fulfilled	not fulfilled	-80.00
	70	4285.71	682.09		fulfilled	not fulfilled	-80.00
	80	3750.00	596.83		fulfilled	not fulfilled	-80.00
	90	3333.33	530.52		fulfilled	not fulfilled	-80.00
	100	3000.00	477.47		fulfilled	not fulfilled	-80.00
	125	2400.00	381.97		fulfilled	not fulfilled	-80.00
	200	1500.00	238.73		fulfilled	fulfilled	-78.02
	300	1000.00	159.16		fulfilled	fulfilled	-74.49
	400	750.00	119.37		fulfilled	fulfilled	-72.00
	490	612.24	97.44		fulfilled	fulfilled	-70.23
	500	600.00	95.49		fulfilled	not fulfilled	-40.00
	600	500.00	79.58		fulfilled	not fulfilled	-40.00
	700	428.57	68.21		fulfilled	not fulfilled	-40.00
	800	375.00	59.68		fulfilled	not fulfilled	-40.00
900	333.33	53.05	fulfilled	not fulfilled	-40.00		
MHz	1.00	300.00	47.75	30	fulfilled	not fulfilled	-40.00
	1.59	188.50	30.00		fulfilled	not fulfilled	-40.00
	2.00	150.00	23.87		fulfilled	fulfilled	-38.02
	3.00	100.00	15.92		fulfilled	fulfilled	-34.49
	4.00	75.00	11.94		fulfilled	fulfilled	-32.00
	5.00	60.00	9.55		fulfilled	fulfilled	-30.06
	6.00	50.00	7.96		fulfilled	fulfilled	-28.47
	7.00	42.86	6.82		fulfilled	fulfilled	-27.13
	8.00	37.50	5.97		fulfilled	fulfilled	-25.97
	9.00	33.33	5.31		fulfilled	fulfilled	-24.95
	10.00	30.00	4.77		fulfilled	fulfilled	-24.04
	10.60	28.30	4.50		fulfilled	fulfilled	-23.53
	11.00	27.27	4.34		fulfilled	fulfilled	-23.21
	12.00	25.00	3.98		fulfilled	fulfilled	-22.45
	13.56	22.12	3.52		fulfilled	fulfilled	-21.39
	15.00	20.00	3.18		fulfilled	fulfilled	-20.51
	15.92	18.85	3.00		fulfilled	fulfilled	-20.00
	17.00	17.65	2.81		not fulfilled	fulfilled	-20.00
	18.00	16.67	2.65		not fulfilled	fulfilled	-20.00
	20.00	15.00	2.39		not fulfilled	fulfilled	-20.00
21.00	14.29	2.27	not fulfilled	fulfilled	-20.00		
23.00	13.04	2.08	not fulfilled	fulfilled	-20.00		
25.00	12.00	1.91	not fulfilled	fulfilled	-20.00		
27.00	11.11	1.77	not fulfilled	fulfilled	-20.00		
29.00	10.34	1.65	not fulfilled	fulfilled	-20.00		
30.00	10.00	1.59	not fulfilled	fulfilled	-20.00		

4.4.3 Measurement Location

Test site	120901 - SAC - Radiated Emission <1GHz
-----------	--

4.4.4 Limit

Radiated emissions limits, 3 meters					
Frequency Range [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [$\text{dB}\mu\text{V}/\text{m}$]	Distance [m]	Detector	RBW [kHz]
0.009 – 0.09	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.09 – 0.11	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Quasi peak	0.2
0.11 – 0.15	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	0.2
0.15 – 0.49	2400 / f [kHz]	67.6 – 20Log(f) (kHz)	300	Pk & Avg	9
0.49 – 1.705	24000 / f [kHz]	87.6 – 20Log(f) (kHz)	30	Quasi peak	9
1.705 - 30	30	29.5	30	Quasi peak	9

*Remark: In Canada same limits apply, just unit reference is different

4.4.5 Result

Diagram	Band	Operation Mode	Maximum Level [$\text{dB}\mu\text{V}/\text{m}$] Frequency Range 0.009 – 30 MHz	Result
2.01	UMTS II	1	No critical Peak found.	Passed
2.02	UMTS II	1	No critical Peak found.	Passed
2.03	UMTS IV	2	No critical Peak found.	Passed
2.04	UMTS V	3	No critical Peak found.	Passed


Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0170701T08b-C2-A1**

4.5 Radiated spurious emissions

4.5.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

Schematic:

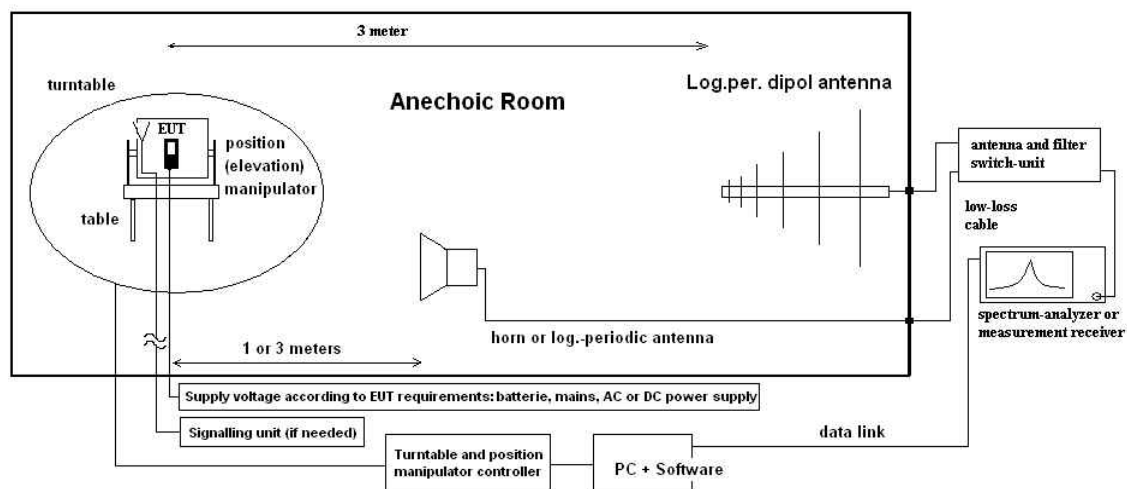

Testing method:

The measurement is made according to relevant reference clauses:
(See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)

Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software).

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by main-taining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

Formula:

$$P_{EIRP} = P_{MEAS} + C_L + FSL - G_{PreA} - G_{ANT} \quad (1)$$

P_{MEAS} = measured power at instrument

M = Margin

L_T = Limit

FSL = Free Space loss = Function(frequency, measurement distance)

$$M = L_T - P_{EIRP}$$

C_L = cable loss

G_{PreA} = Gain of pre-amplifier (if used)

G_{ANT} = Gain of antenna in [dBi]

All units are dB-units, positive margin means value is below limit.

4.5.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
------------------	------------------------------------

4.5.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [MHz]
30 - 8500	-13	Peak	1 / 3
30 - 17500	-13	Peak	1 / 3
30 - 19100	-13	Peak	1 / 3

4.5.4 Result

Diagram	Band	Operation Mode	30 to 1000 MHz	1 to 2.8 GHz	2.8 to 10 th Harmonics	Stop Freq [GHz]	Result
8.01	UMTS II	1	No critical Peak found.	No critical Peak found.	No critical Peak found.	18	Passed
8.02	UMTS IV	2	No critical Peak found.	No critical Peak found.	No critical Peak found.	20	Passed
8.03	UMTS V	3	No critical Peak found.	No critical Peak found.	No critical Peak found.	9	Passed


Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0170701T08b-C2-A1**

4.6 Radiated Band Edge

4.6.1 Description of the general test setup and methodology, see below example:

Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT

Schematic:

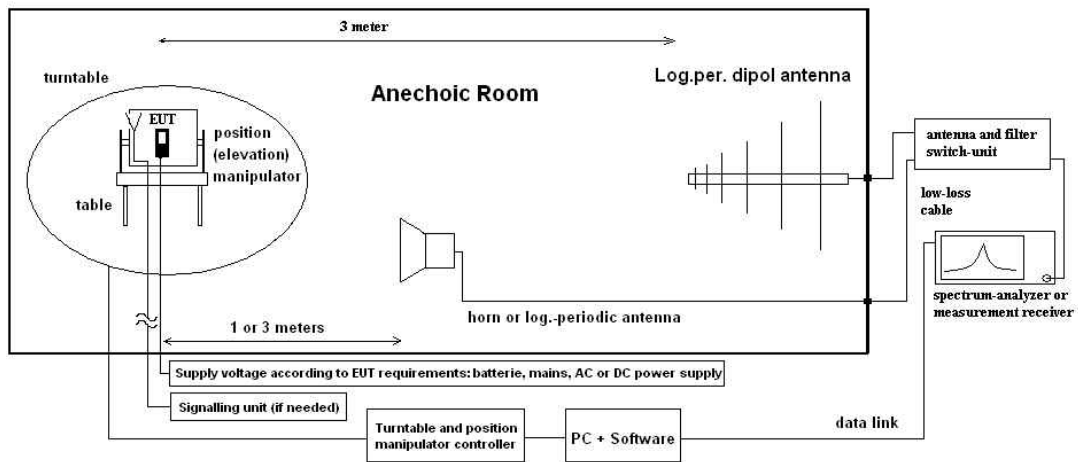

Testing method:

The measurement is made according to relevant reference clauses:
 (See Tables *Summary of Test Results* and *Summary of Test Methods* on page 5)
 See chapter Radiated Spurious Emission for Test method.

4.6.2 Measurement Location

Test site	120904 - FAC1 - Radiated Emissions
-----------	------------------------------------

4.6.3 Limit

Frequency Range [MHz]	Limit [dBm]	Detector [MaxHold]	RBW / VBW [kHz]
Below 824 and above 849	-13	Peak	3 / 3
Below 1710 and above 1755	-13	Peak	3 / 3
Below 1850 and above 1910	-13	Peak	3 / 3

4.6.4 Result

Diagram	Band	Mode	Edge [Low / High]	Value [dBm]	Result
9.201	UMTS II	Low channel	Low	-21.24	Passed
9.202	UMTS II	High channel	High	-21.66	Passed
9.401	UMTS IV	Low channel	Low	-22.49	Passed
9.402	UMTS IV	High channel	High	-23.41	Passed
9.501	UMTS V	Low channel	Low	-27.47	Passed
9.502	UMTS V	High channel	High	-29.34	Passed

Remark: for more information and graphical plot see annex A1 **CETECOM_TR20-1-0170701T08b-C2-A1**

4.7 Results from external laboratory

None	-
------	---

4.8 Opinions and interpretations

None	-
------	---

4.9 List of abbreviations

None	-
------	---

5 Equipment lists

ID	Description	Manufacturer	SerNo	Cal due date
120901 - SAC - Radiated Emission <1GHz				2025-Jul-21
20487	CETECOM Semi Anechoic Chamber < 1GHz	ETS-Lindgren GmbH	-	2025-Jul-15
20620	EMI Test Receiver ESU26	Rohde & Schwarz Messgerätebau GmbH	100362	2022-May-21
25038	Loop Antenna HFH2-Z2	Rohde & Schwarz Messgerätebau GmbH	879824/13	2022-Apr-07
20885	Power Supply EA3632A	Agilent Technologies Deutschland GmbH	75305850	-
120904 - FAC1 - Radiated Emissions				
20341	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	81650455	2022-May-25
20254	High Pass Filter 5HC 2600/12750-1.5KK (GSM1800/1900/DECT)	Trilithic	23042	2022-Apr-15
20868	High Pass Filter AFH-07000	AtlanTecRF	16071300004	2022-Apr-15
20291	High Pass Filter WHJ 2200-4EE (GSM 850/900)	Wainwright Instruments GmbH	14	2022-Apr-15
20020	Horn Antenna 3115 (Subst 1)	EMCO Elektronik GmbH	9107-3699	2022-Jul-19
20302	Horn Antenna BBHA9170 (Meas 1)	Schwarzbeck Mess-Elektronik OHG	155	2023-Apr-15
20549	Log. Per. Antenna HL025	Rohde & Schwarz Messgerätebau GmbH	1000060	2021-Jul-31
20720	Measurement Software EMC32 [FAC]	Rohde & Schwarz Messgerätebau GmbH	V10.60	-
20611	Power Supply E3632A	Agilent Technologies Deutschland GmbH	KR 75305854	-
20338	Pre-Amplifier 100MHz - 26GHz JS4-00102600-38-5P	Miteq Inc.	838697	2022-Apr-15
20484	Pre-Amplifier 2,5GHz - 18GHz AMF-5D-02501800-25-10P	Miteq Inc.	1244554	2022-Apr-15
20287	Pre-Amplifier 25MHz - 4GHz AMF-2D-100M4G-35-10P	Miteq Inc.	379418	2022-Apr-15
20670	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH	106833	2022-Jun-16
20690	Spectrum Analyzer FSU	Rohde & Schwarz Messgerätebau GmbH	100302/026	2023-May-23
20439	Ultrabroadband-Antenna HL562	Rohde & Schwarz Messgerätebau GmbH	100248	2023-Mar-10
120919 - Conducted Emission				
20457	DC-Power supply, 0-5A EA-3013 S	EA Elektro-Automatik GmbH & Co. KG	9624680	-
20468	Digital Multimeter Fluke 112	Fluke Deutschland GmbH	90090455	2024-Jun-16
20546	Radio Communication Tester CMU200	Rohde & Schwarz Messgerätebau GmbH	106436	2022-May-23

6 Measurement Uncertainty valid for conducted/radiated measurements

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor *k*, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according its statistical distribution calculated.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U _{CISPR})	-	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	
		12.75 GHz - 26.5 GHz	N/A	0.82	--	N/A	N/A	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable
		2.8 GHz - 12.75 GHz	1.48	N/A	1.51	N/A	1.43	--	
		12.75 GHz - 18 GHz	1.81	N/A	1.83	N/A	1.77	--	
		18 GHz - 26.5 GHz	1.83	N/A	1.85	N/A	1.79	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
	-		See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions Enclosure	-	150 kHz - 30 MHz	5.01dB						Magnetic field strength
		30 MHz - 1 GHz	5.83 dB						Electrical Field strength
		1 GHz - 18 GHz	4.91 dB						
		18-26.5 GHz	5.06 dB						

7 Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2021-Jul-08
C1	Added remark to chapter 1.3 regarding to initial module report and 3.2. regarding to antenna gain. Updated diagram number according to annex 1 at chapter 4.6.4 and updated operating mode to diagram 9.401 at annex 1.	2021-Sep-29
C2	1.3 Remarks of NP tests added to results of modular approval and module report name, issue date and test lab added as reference 3.2 Antenna gain corrected to the latest tune-up document "MPE Information Requirements_v4" 3.3 Module report name, issue date and test lab added as reference 4.1.4 Module report name, issue date and test lab added as reference 4.2 Calculation corrected to the latest tune-up document "MPE Information Requirements_v4"	2021-Oct-15
C3	Module report references corrected	2021-Oct-28

End Of Test Report