



# TEST REPORT

Applicant Name : Dongguan Yinwo Electronic Technology Co., Ltd  
Address : Building 1, No. 18 Jiaoping Road, Tangxia Town, Dongguan, Guangdong, China  
Report Number : SZNS211126-60813E-RF-00  
FCC ID: 2AZJ2YW007

## Test Standard (s)

FCC PART 15.247

## Sample Description

Product Type: Jambar BT Speaker  
Model No.: FB-56-ASST  
Multiple Model(s) No.: FB-57, FB-58, FB-59, FB-60 (Please refer to DOS for Model difference)  
Trade Mark: iHiP  
Date Received: 2021/11/26  
Date of Test: 2021/12/15~2022/01/04  
Report Date: 2022/01/10

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

Black Ding  
EMC Engineer

## Approved By:

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
<b>SYSTEM TEST CONFIGURATION</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
<b>SUMMARY OF TEST RESULTS</b>	<b>8</b>
<b>TEST EQUIPMENT LIST</b>	<b>9</b>
<b>FCC §15.247 (I) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)</b>	<b>11</b>
<b>FCC §15.203 – ANTENNA REQUIREMENT</b>	<b>12</b>
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS</b>	<b>13</b>
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	13
TEST PROCEDURE	13
TRANSD FACTOR & MARGIN CALCULATION	14
TEST DATA	14
<b>FCC §15.205, §15.209 &amp; §15.247(D) – RADIATED EMISSIONS</b>	<b>17</b>
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
FACTOR & MARGIN CALCULATION	18
TEST DATA	18
<b>FCC §15.247(A) (1)-CHANNEL SEPARATION TEST</b>	<b>24</b>
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
<b>FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH</b>	<b>25</b>
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	26

<b>FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
TEST PROCEDURE .....	27
TEST DATA .....	27
<b>FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(D) - BAND EDGES TESTING.....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>APPENDIX .....</b>	<b>31</b>
APPENDIX A: 20dB EMISSION BANDWIDTH.....	31
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	35
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	39
APPENDIX D: CARRIER FREQUENCY SEPARATION .....	43
APPENDIX E: TIME OF OCCUPANCY.....	44
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	51
APPENDIX G: BAND EDGE MEASUREMENTS .....	52

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402~2480MHz
Maximum conducted Peak output power	Bluetooth: -1.27dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	-0.68 dBi (provided by the applicant)
Voltage Range	DC 5V From USB port or DC 3.7V from battery
Sample serial number	SZNS211126-60813E-RF-S1 (for Conducted/Radiated test) SZNS211126-60813E-RF-S2 (for RF Conducted test) (Assigned by ATC)
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $K$  with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“FCC\_assist\_1.0.2.2.exe ”\* software was use to the EUT tested and power level is 10\*. The software and power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Sandisk	USB Disk	SDCZ38	BL210426179Z
Sandisk	TF Card	Unknown	Unknown
Nubia	Mobile phone	NX-549J	F4efaa79
ZTE	Adapter	STC-A51-A	Unknown

### External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable DC Cable	0.5	EUT	Adapter
Un-shielding Detachable Audio Cable	0.5	EUT	Mobile phone

**Block Diagram of Test Setup**

For Conducted Emissions:

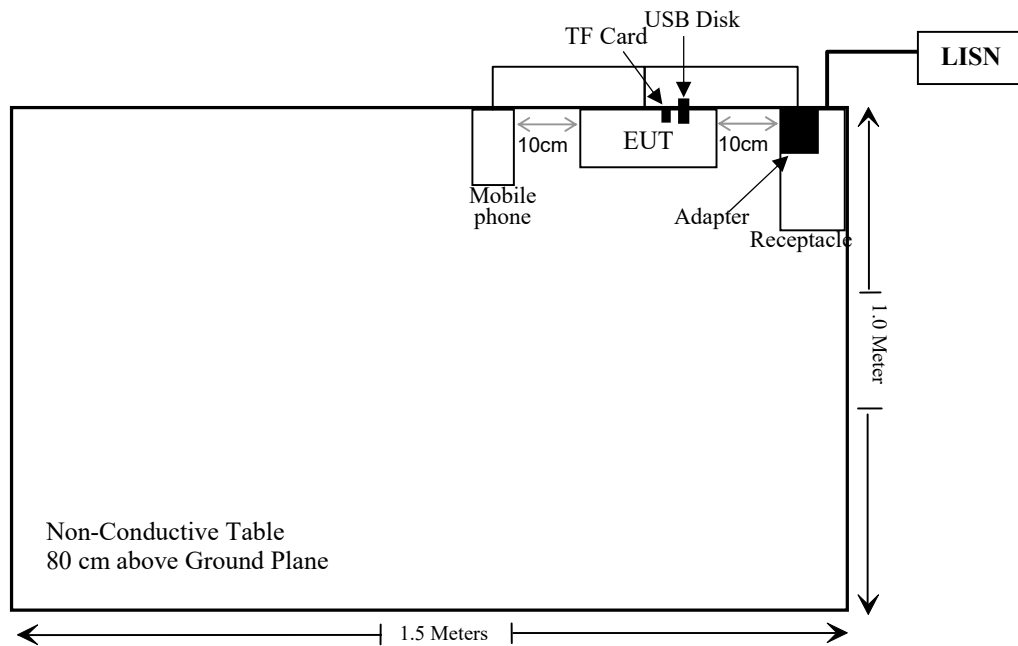

For Spurious Emissions:

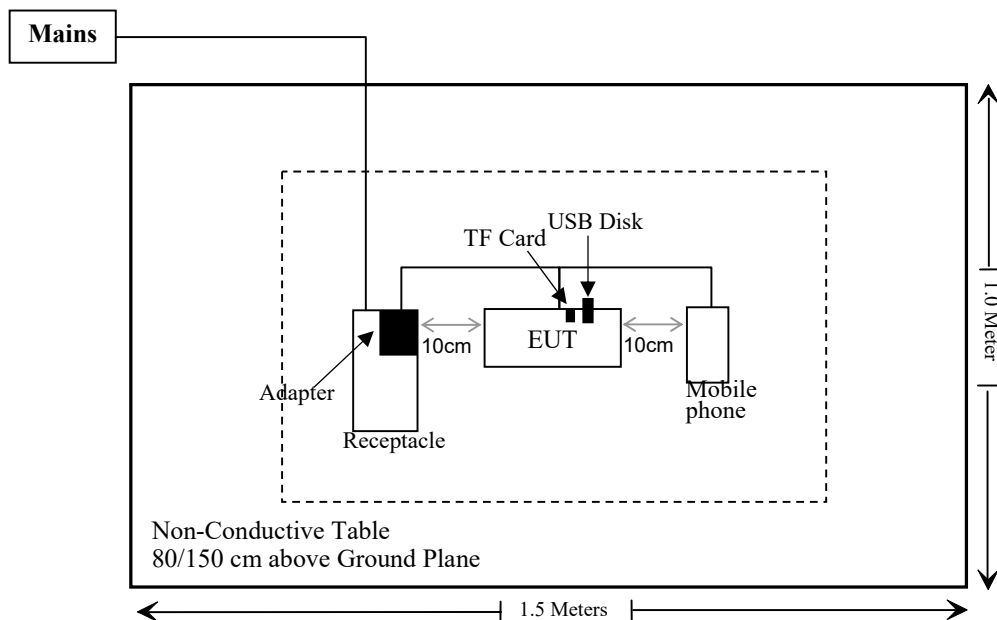

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

#### Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	-0.68	0.86	-1.0	0.79	20	0.00014	1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is -0.68dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

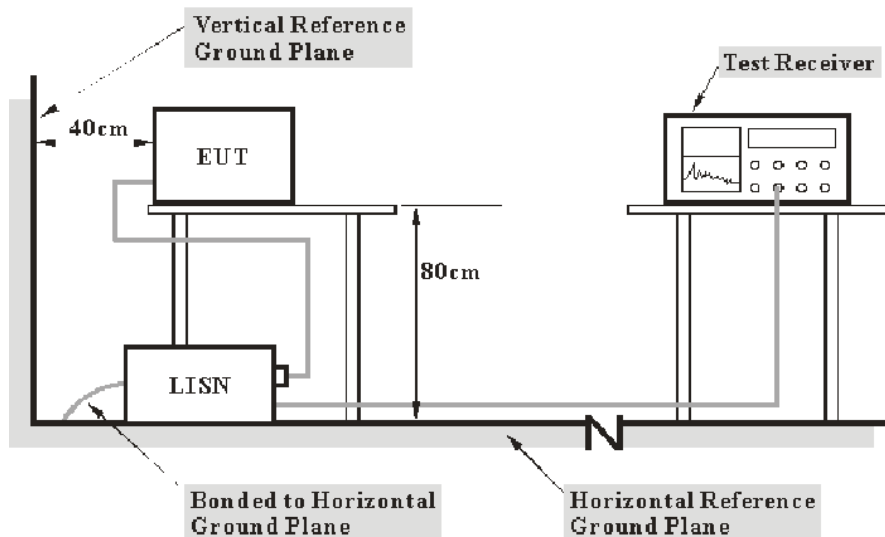

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data


### Environmental Conditions

Temperature:	22°C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa


*The testing was performed by Bin Duan on 2022-01-04.*

*EUT operation mode: Transmitting (The worst case is GFSK Mode, Low channel)*

## AC 120V/60 Hz, Line

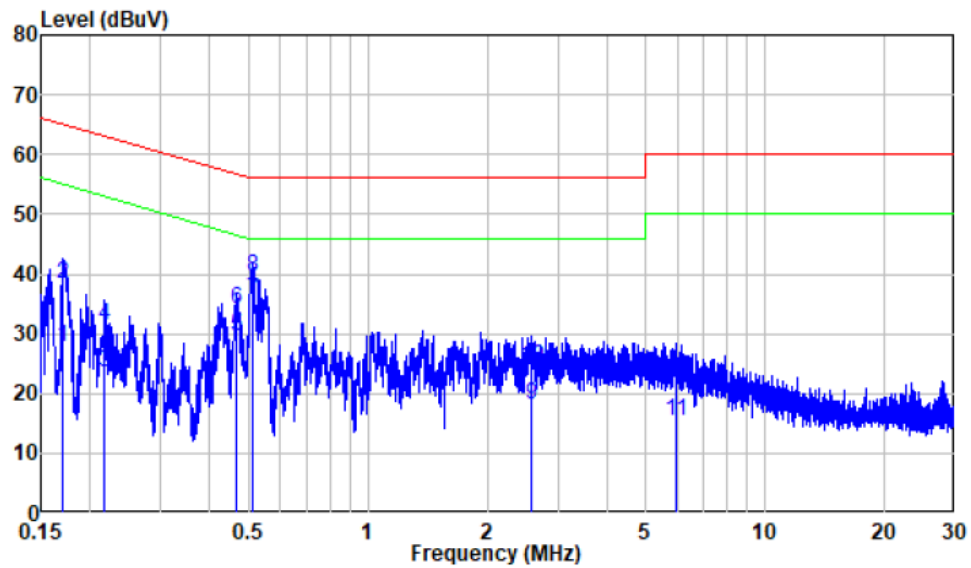

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.170	9.86	17.82	27.68	54.95	-27.27	Average
2	0.170	9.86	28.46	38.32	64.95	-26.63	QP
3	0.218	9.80	13.85	23.65	52.91	-29.26	Average
4	0.218	9.80	21.72	31.52	62.91	-31.39	QP
5	0.468	9.80	19.85	29.65	46.56	-16.91	Average
6	0.468	9.80	24.21	34.01	56.56	-22.55	QP
7	0.513	9.81	25.67	35.48	46.00	-10.52	Average
8	0.513	9.81	29.86	39.67	56.00	-16.33	QP
9	2.565	9.93	8.19	18.12	46.00	-27.88	Average
10	2.565	9.93	14.67	24.60	56.00	-31.40	QP
11	5.933	10.03	5.23	15.26	50.00	-34.74	Average
12	5.933	10.03	11.16	21.19	60.00	-38.81	QP

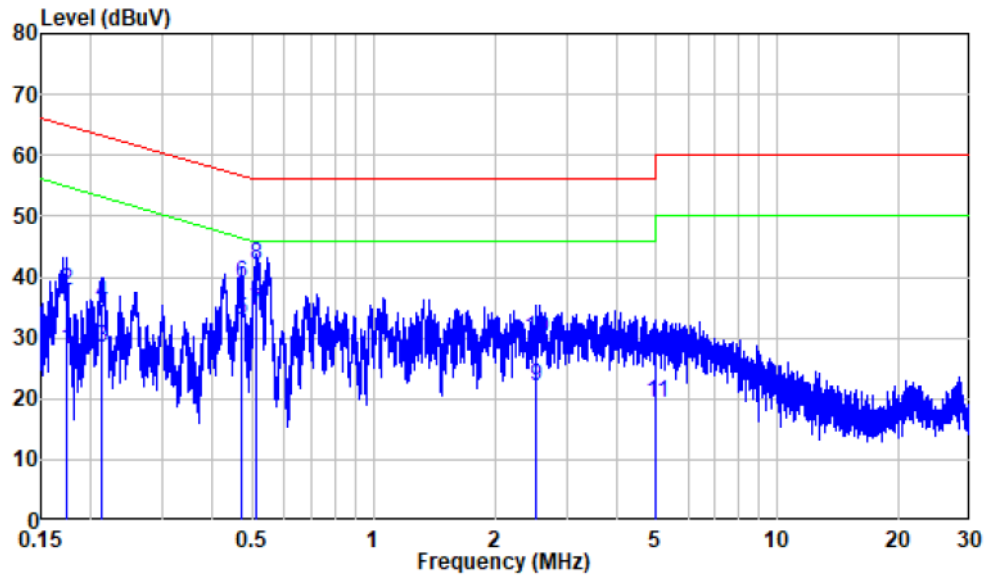**AC 120V/60 Hz, Neutral**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.174	9.95	18.14	28.09	54.78	-26.69	Average
2	0.174	9.95	27.70	37.65	64.78	-27.13	QP
3	0.213	9.99	18.30	28.29	53.08	-24.79	Average
4	0.213	9.99	25.52	35.51	63.08	-27.57	QP
5	0.470	9.91	22.98	32.89	46.51	-13.62	Average
6	0.470	9.91	28.97	38.88	56.51	-17.63	QP
7	0.512	9.91	24.62	34.53	46.00	-11.47	Average
8	0.512	9.91	31.94	41.85	56.00	-14.15	QP
9	2.518	9.96	11.96	21.92	46.00	-24.08	Average
10	2.518	9.96	19.89	29.85	56.00	-26.15	QP
11	5.005	10.05	9.36	19.41	50.00	-30.59	Average
12	5.005	10.05	17.01	27.06	60.00	-32.94	QP




## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard


FCC §15.205; §15.209; §15.247(d)

### EUT Setup

Below 1 GHz:

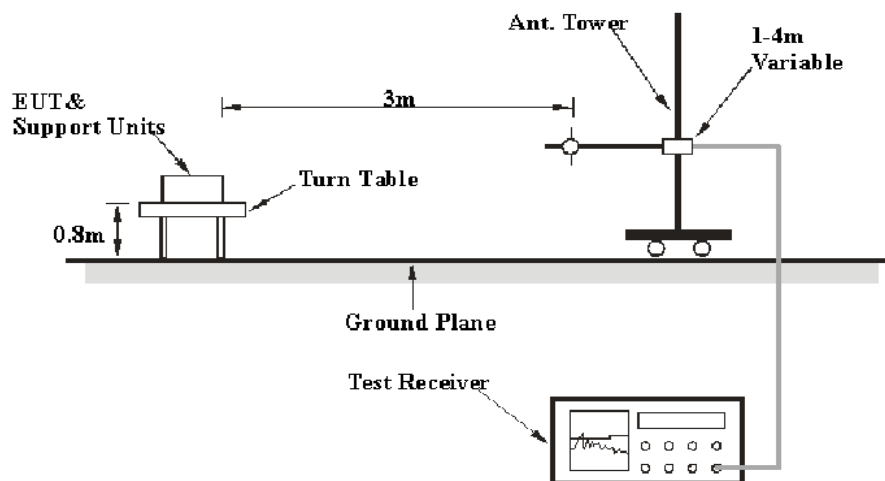

Above 1GHz:

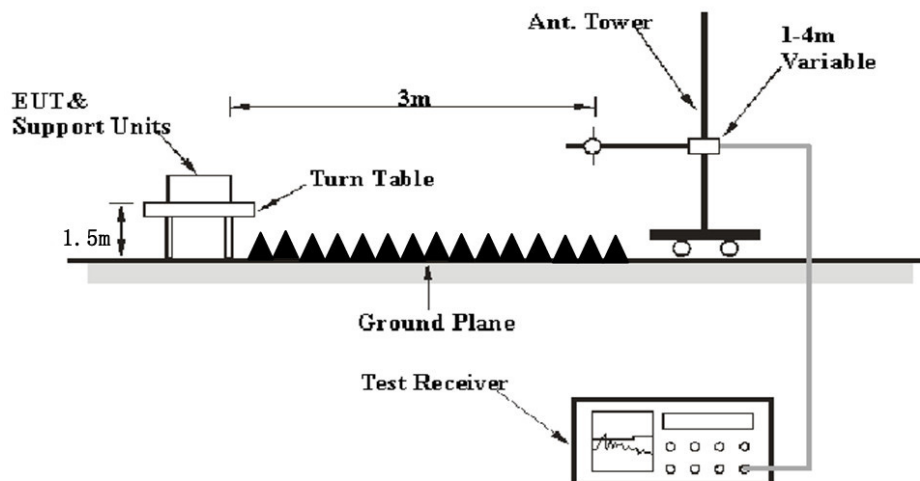

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

## Test Data

### Environmental Conditions


Temperature:	25~26.8°C
Relative Humidity:	57~64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Deng on 2022-01-03 for below 1GHz and by Caro hu on 2021-12-15 for above 1GHz.

EUT operation mode: Transmitting


**30MHz-1GHz:** (the worst case is 8DPSK Mode, Low channel)

**Horizontal:**

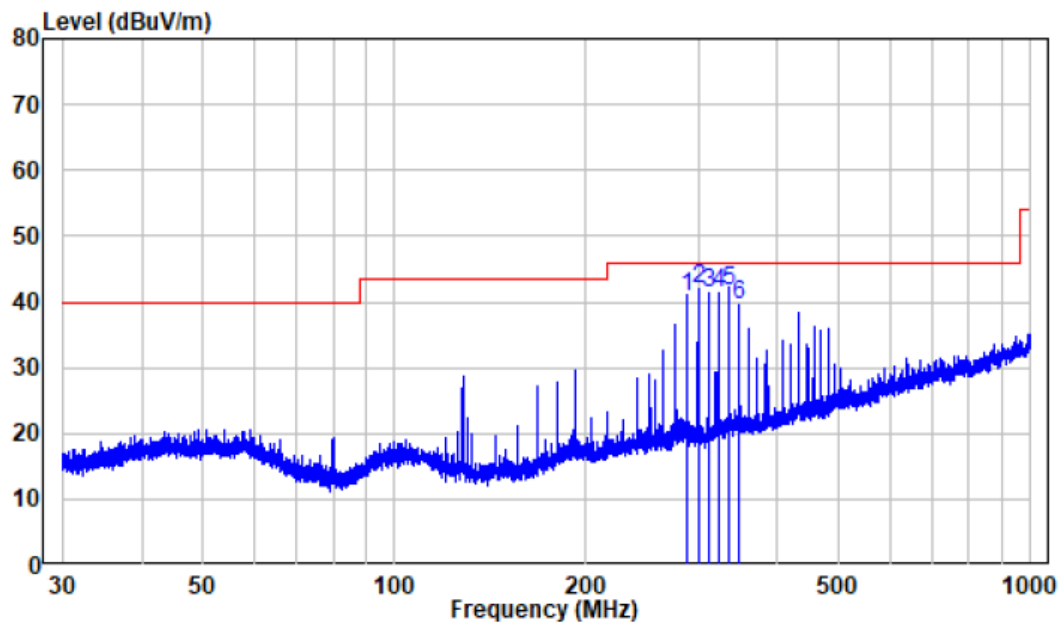

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	287.990	-9.36	50.10	40.74	46.00	-5.26	QP
2	299.973	-9.23	51.08	41.85	46.00	-4.15	QP
3	312.043	-8.82	50.10	41.28	46.00	-4.72	QP
4	324.030	-8.30	49.70	41.40	46.00	-4.60	QP
5	336.035	-7.58	49.11	41.53	46.00	-4.47	QP
6	348.027	-7.27	46.81	39.54	46.00	-6.46	Peak

## Vertical

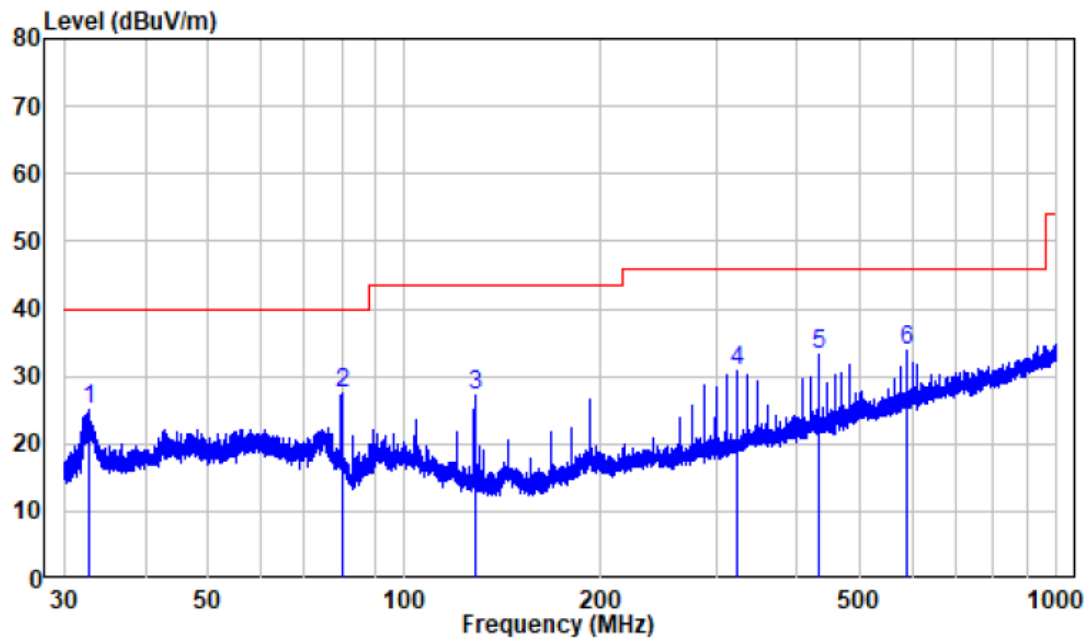

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.777	-12.05	37.11	25.06	40.00	-14.94	Peak
2	80.010	-16.79	44.27	27.48	40.00	-12.52	Peak
3	128.001	-14.70	41.82	27.12	43.50	-16.38	Peak
4	324.030	-8.30	39.08	30.78	46.00	-15.22	Peak
5	431.977	-5.75	38.94	33.19	46.00	-12.81	Peak
6	588.131	-2.84	36.63	33.79	46.00	-12.21	Peak

**Above 1GHz:** (the worst case is 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	67.12	PK	114	1.7	H	-7.24	59.88	74	-14.12
2310	52.90	AV	114	1.7	H	-7.24	45.66	54	-8.34
2310	67.65	PK	227	1.5	V	-7.24	60.41	74	-13.59
2310	53.03	AV	227	1.5	V	-7.24	45.79	54	-8.21
2390	68.54	PK	94	1.4	H	-7.22	61.32	74	-12.68
2390	54.61	AV	94	1.4	H	-7.22	47.39	54	-6.61
2390	68.62	PK	359	2	V	-7.22	61.40	74	-12.60
2390	54.08	AV	359	2	V	-7.22	46.86	54	-7.14
4804	54.36	PK	280	1.2	H	-3.51	50.85	74	-23.15
4804	54.18	PK	255	1.2	V	-3.51	50.67	74	-23.33
Middle Channel(2441MHz)									
4882	54.84	PK	306	1	H	-3.37	51.47	74	-22.53
4882	54.80	PK	340	1	V	-3.37	51.43	74	-22.57
High Channel(2480 MHz)									
2483.5	68.94	PK	336	2.4	H	-7.20	61.74	74	-12.26
2483.5	55.19	AV	336	2.4	H	-7.20	47.99	54	-6.01
2483.5	68.95	PK	129	2	V	-7.20	61.75	74	-12.25
2483.5	55.31	AV	129	2	V	-7.20	48.11	54	-5.89
2500	68.70	PK	46	1.3	H	-7.18	61.52	74	-12.48
2500	54.33	AV	46	1.3	H	-7.18	47.15	54	-6.85
2500	69.00	PK	59	1.2	V	-7.18	61.82	74	-12.18
2500	54.17	AV	59	1.2	V	-7.18	46.99	54	-7.01
4960	54.50	PK	34	1.7	H	-3.01	51.49	74	-22.51
4960	53.89	PK	163	1.7	V	-3.01	50.88	74	-23.12

**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level (Corrected Amplitude) – Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


1-18GHz

Pre-scan for High Channel

Horizontal:

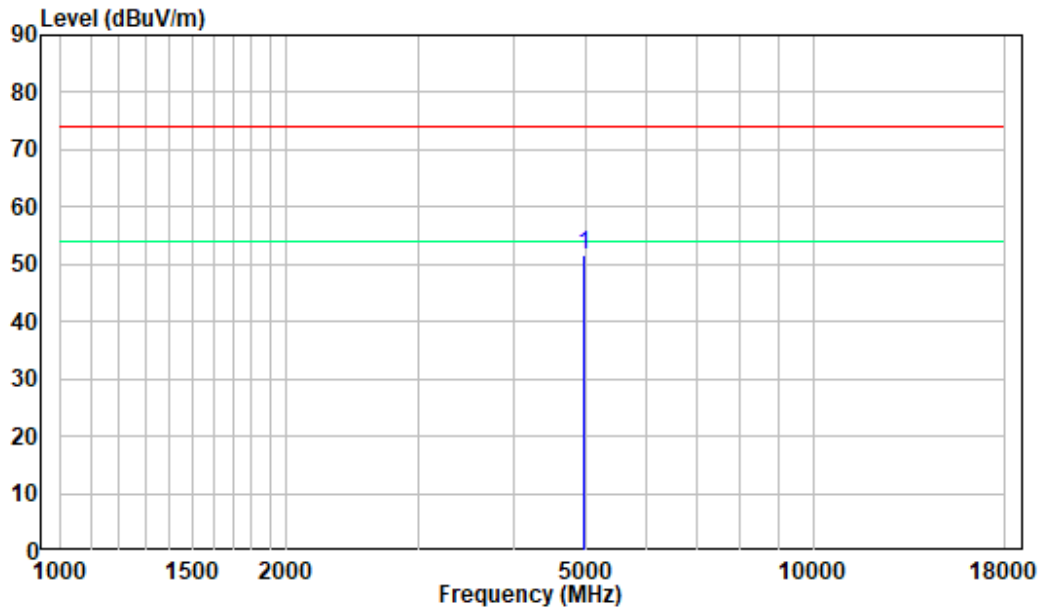


Vertical:

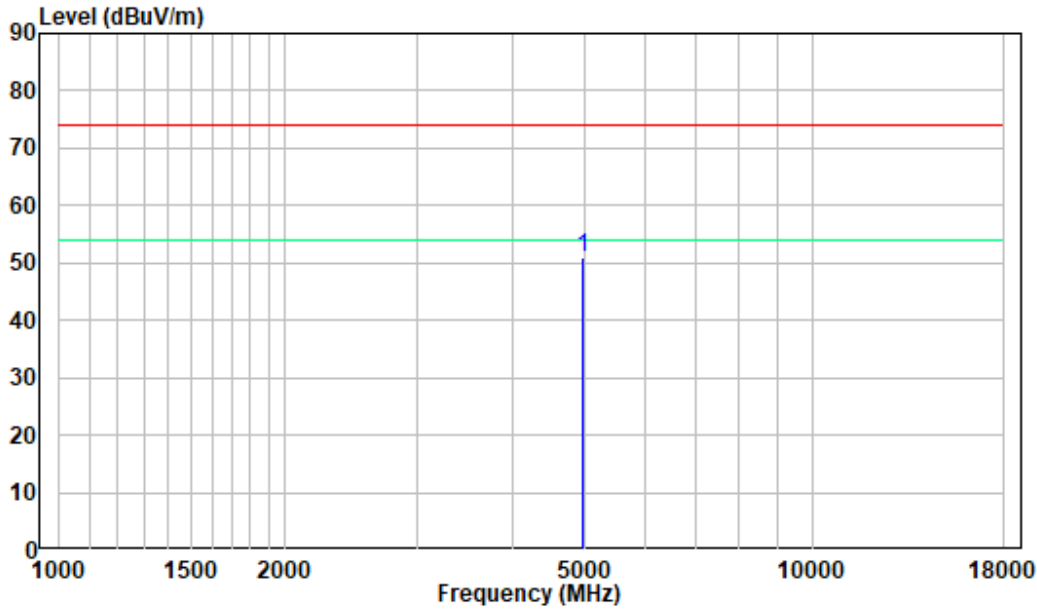


18-25GHz

Pre-scan for High Channel

Horizontal:

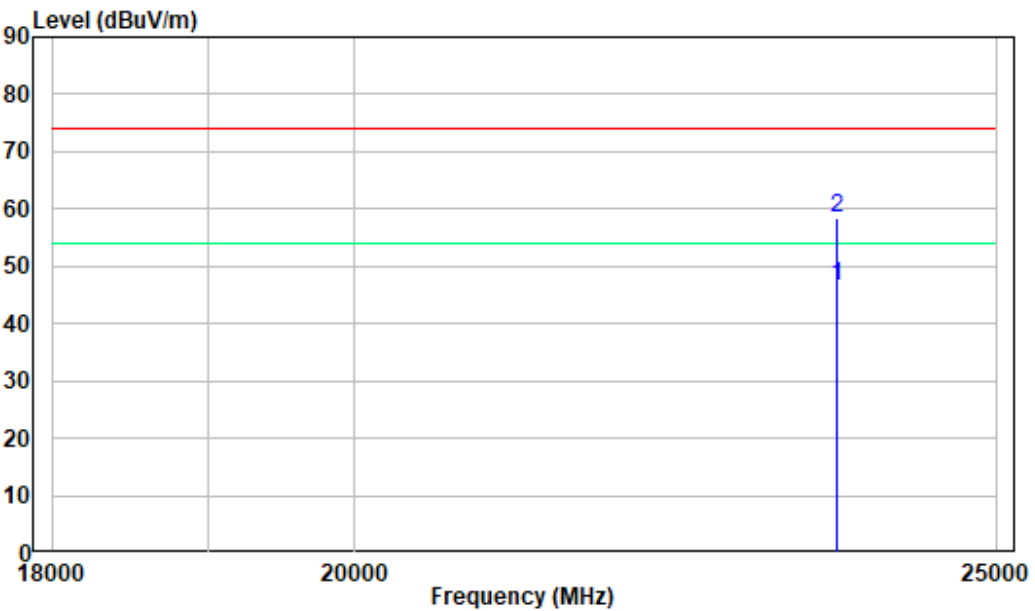

Vertical:

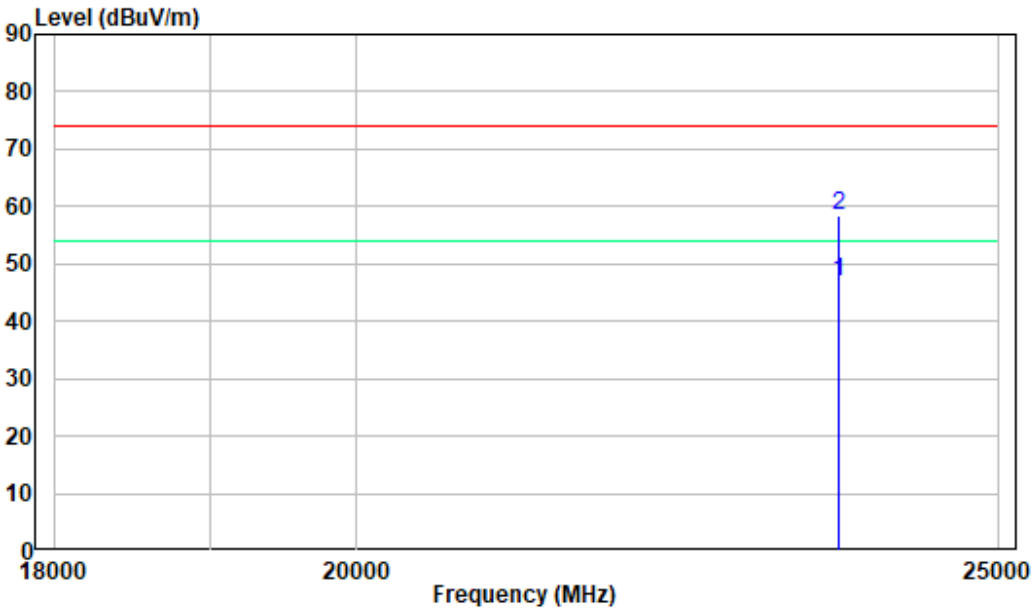

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the Average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

Set the EUT in transmitting mode, maxhold the channel.  
Set the adjacent channel of the EUT and maxhold another trace.  
Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.



## **FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**

### **Applicable Standard**


Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **Test Procedure**

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video Averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.



**Test Data****Environmental Conditions**

<b>Temperature:</b>	25℃
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The Average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.

Set the EUT in hopping mode from first channel to last.

By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping.

Set the RBW to: 1MHz.

Set the VBW  $\geq 3 \times$  RBW.

Set the span to 0Hz.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.

Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	55 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Paul liu on 2021-12-31.*

*EUT operation mode: Transmitting*


Test Result: Compliant. Please refer to the Appendix.

## APPENDIX

### Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Channel	20dB EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.882	---	PASS
		2441	0.885	---	PASS
		2480	0.882	---	PASS
2DH1	Ant1	2402	1.251	---	PASS
		2441	1.251	---	PASS
		2480	1.251	---	PASS
3DH1	Ant1	2402	1.218	---	PASS
		2441	1.218	---	PASS
		2480	1.218	---	PASS


### Test Graphs

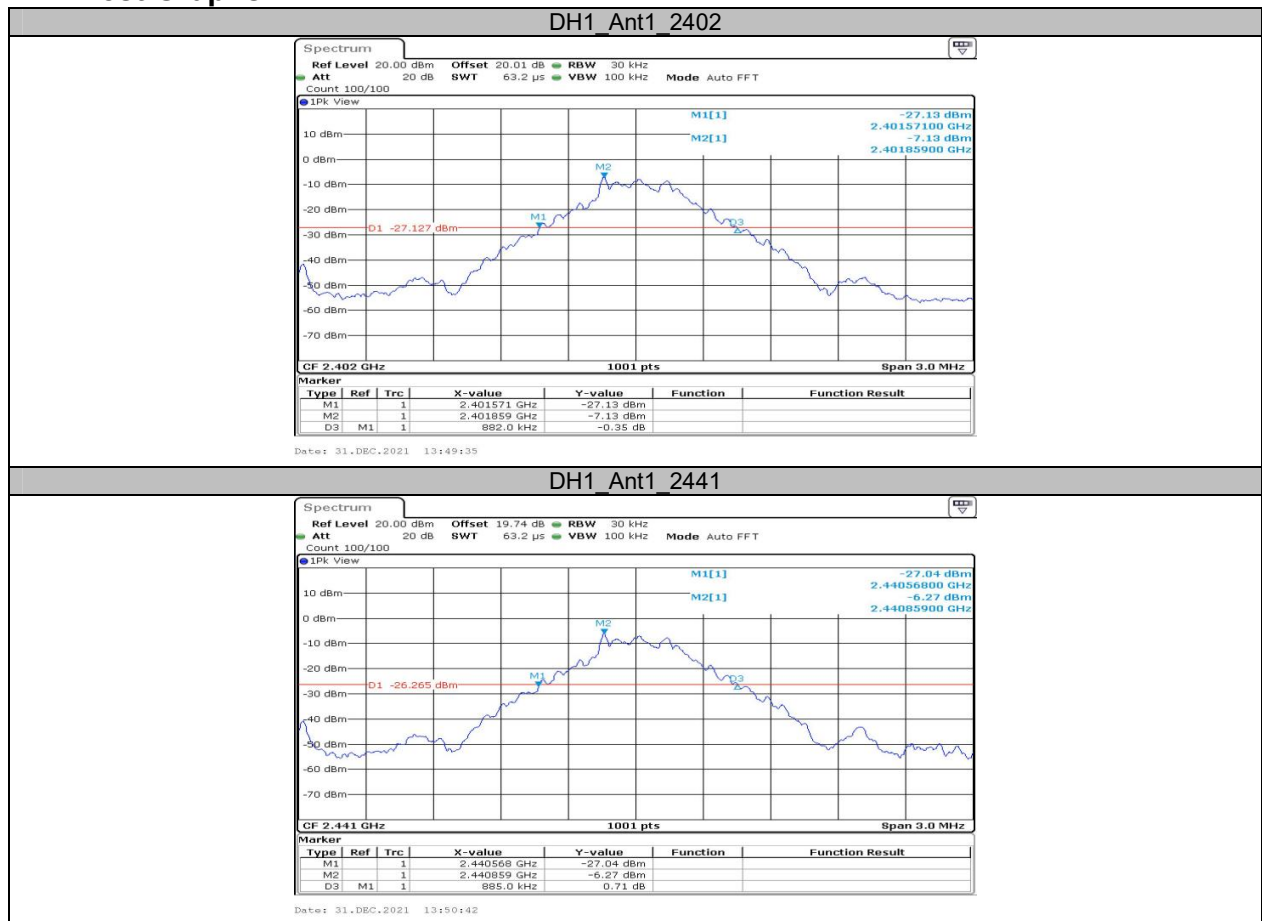

## DH1\_Ant1\_2480



## 2DH1\_Ant1\_2402

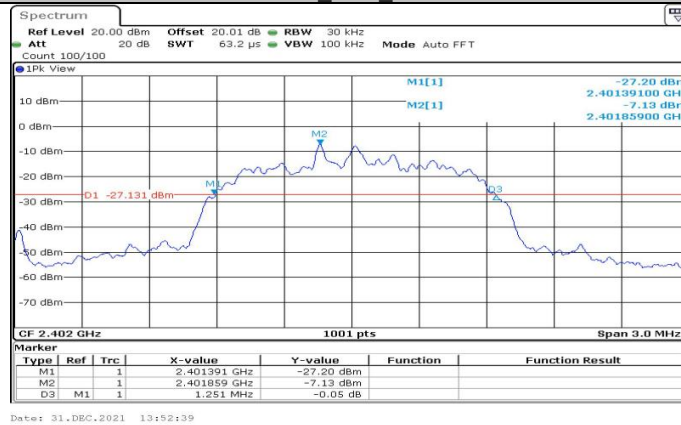


## 2DH1\_Ant1\_2441






## 2DH1\_Ant1\_2480

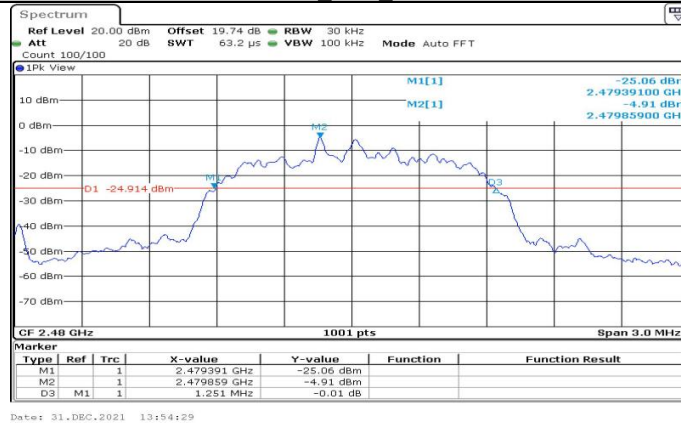


## 3DH1\_Ant1\_2402

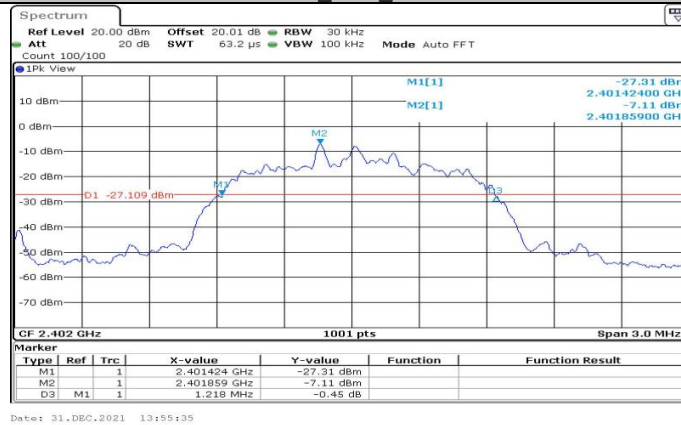

## 3DH1\_Ant1\_2441




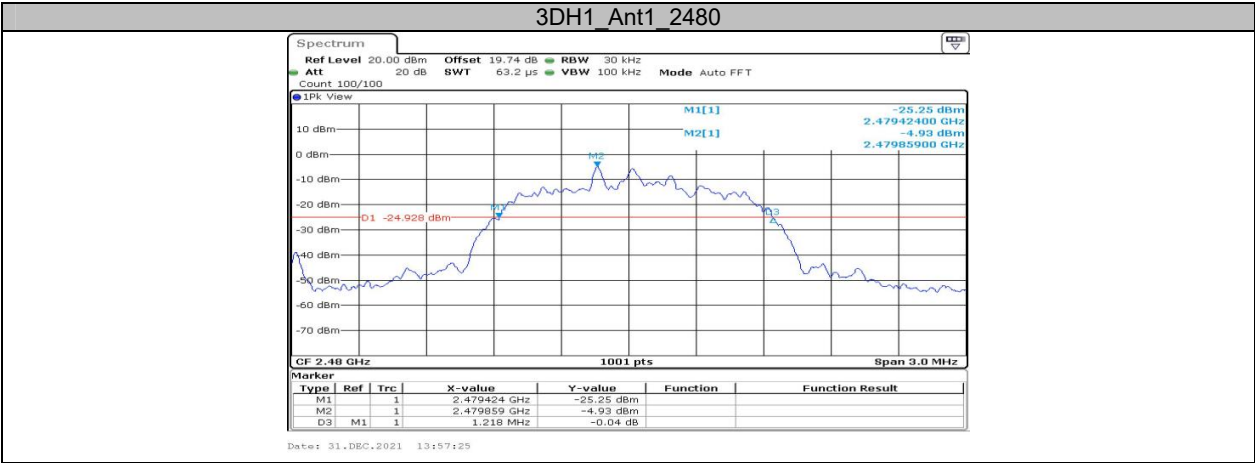


## Appendix B: Occupied Channel Bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.833	---	PASS
		2441	0.833	---	PASS
		2480	0.836	---	PASS
2DH1	Ant1	2402	1.169	---	PASS
		2441	1.166	---	PASS
		2480	1.166	---	PASS
3DH1	Ant1	2402	1.157	---	PASS
		2441	1.160	---	PASS
		2480	1.160	---	PASS


## Test Graphs

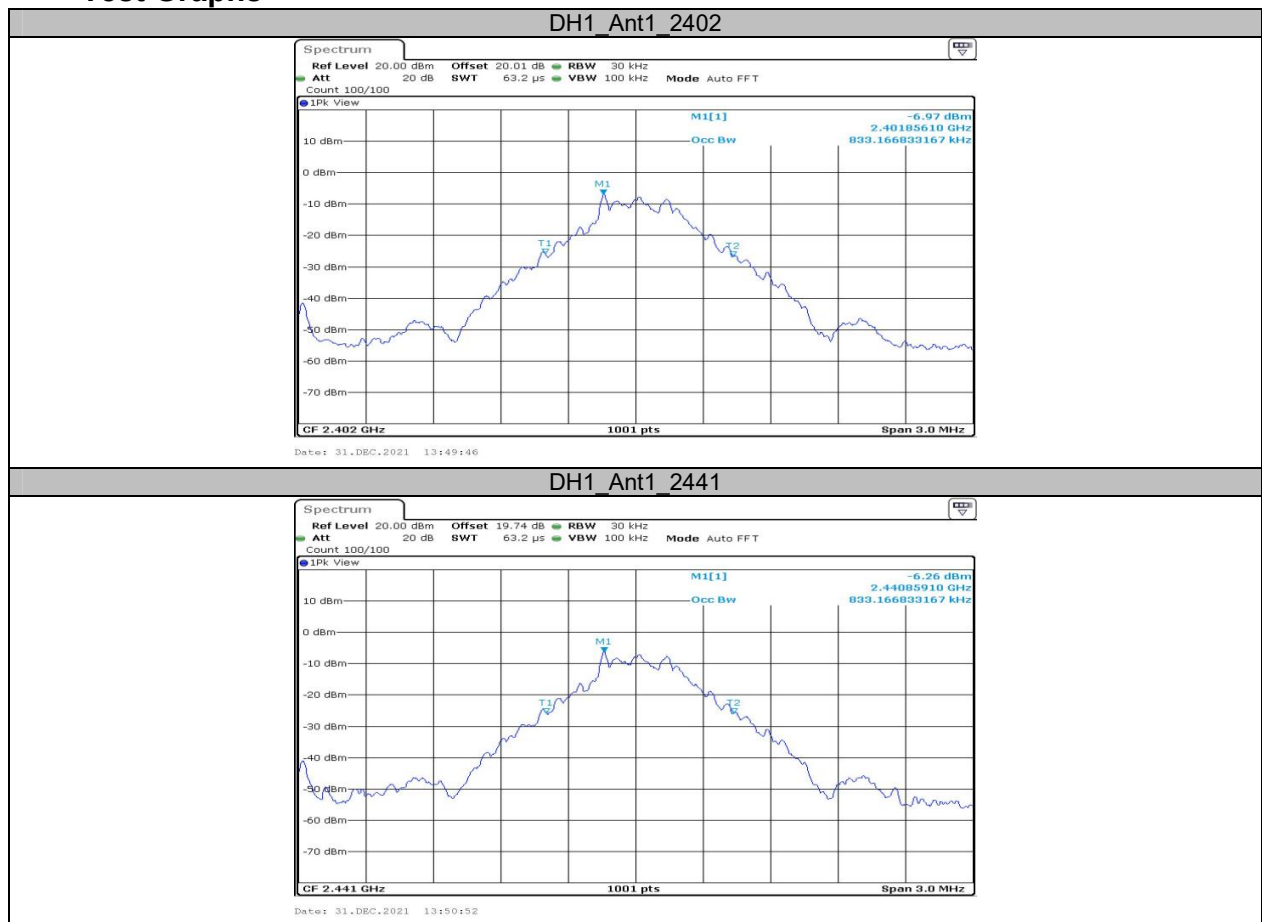

## DH1 Ant1 2480

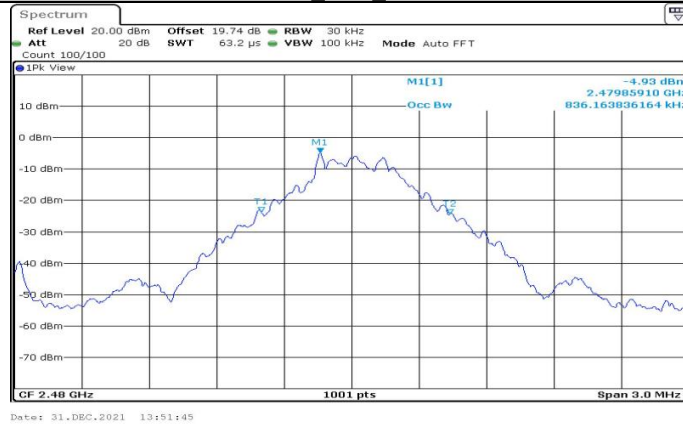


## 2DH1 Ant1 2402

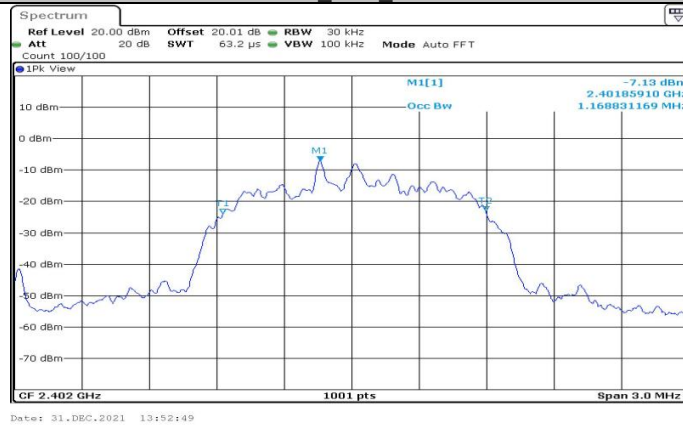

## 2DH1 Ant1 2441



## 2DH1\_Ant1\_2480

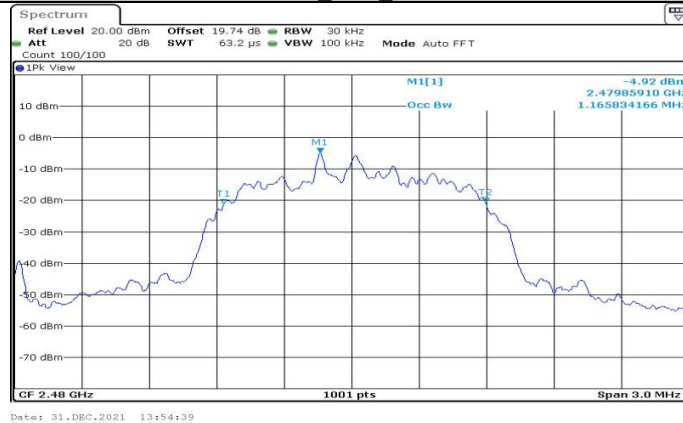

## 3DH1\_Ant1\_2402



## 3DH1\_Ant1\_2441





### Appendix C: Maximum conducted Peak output power Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-4.96	≤20.97	PASS
		2441	-4.08	≤20.97	PASS
		2480	-2.81	≤20.97	PASS
2DH1	Ant1	2402	-4.09	≤20.97	PASS
		2441	-3.17	≤20.97	PASS
		2480	-1.93	≤20.97	PASS
3DH1	Ant1	2402	-3.47	≤20.97	PASS
		2441	-2.59	≤20.97	PASS
		2480	-1.27	≤20.97	PASS


### Test Graphs









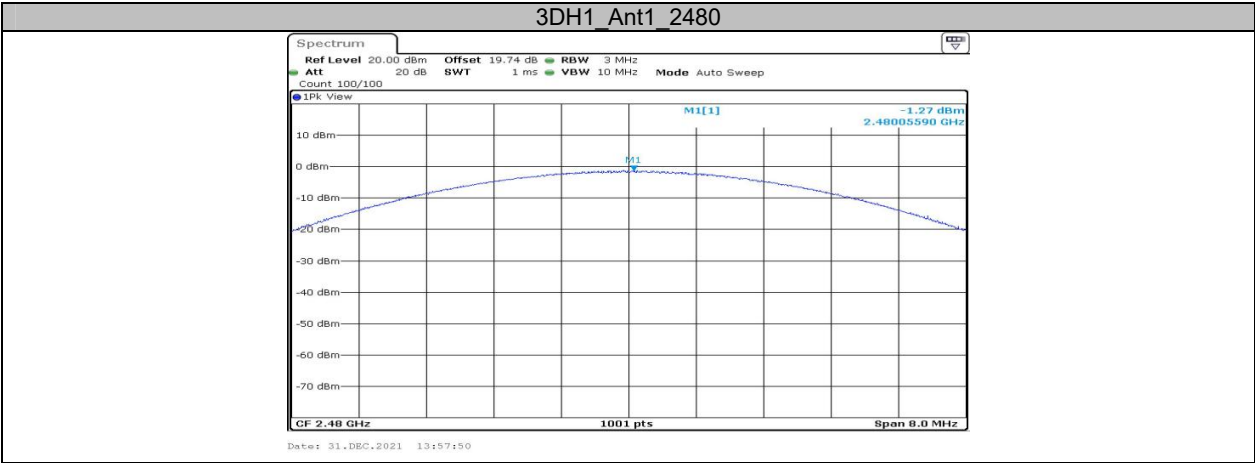

## Appendix D: Carrier frequency separation

### Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1	$\geq 0.590$	PASS
2DH1	Ant1	Hop	1.003	$\geq 0.834$	PASS
3DH1	Ant1	Hop	1	$\geq 0.812$	PASS

### Test Graphs



## Appendix E: Time of occupancy

### Test Result


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	330	0.123	≤0.4	PASS
DH3	Ant1	Hop	1.62	170	0.276	≤0.4	PASS
DH5	Ant1	Hop	2.86	120	0.343	≤0.4	PASS
2DH1	Ant1	Hop	0.38	320	0.122	≤0.4	PASS
2DH3	Ant1	Hop	1.63	140	0.228	≤0.4	PASS
2DH5	Ant1	Hop	2.87	120	0.344	≤0.4	PASS
3DH1	Ant1	Hop	0.38	330	0.127	≤0.4	PASS
3DH3	Ant1	Hop	1.63	140	0.228	≤0.4	PASS
3DH5	Ant1	Hop	2.87	130	0.373	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(S)$ , Result=BurstWidth\*Totalhops


Note 2: Totalhops=Hopping Number in 3.16s\*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s(Second high signals were other channel)



### Test Graphs

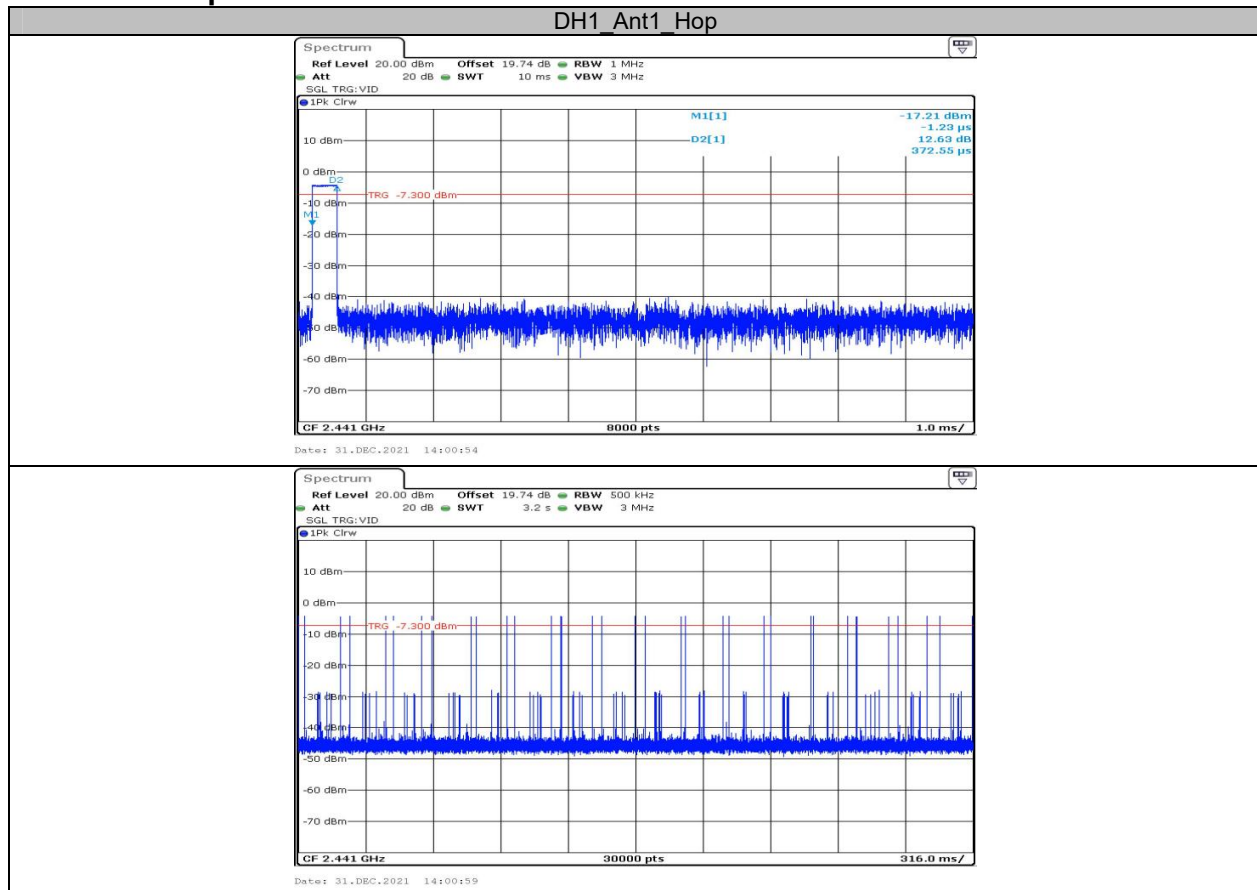

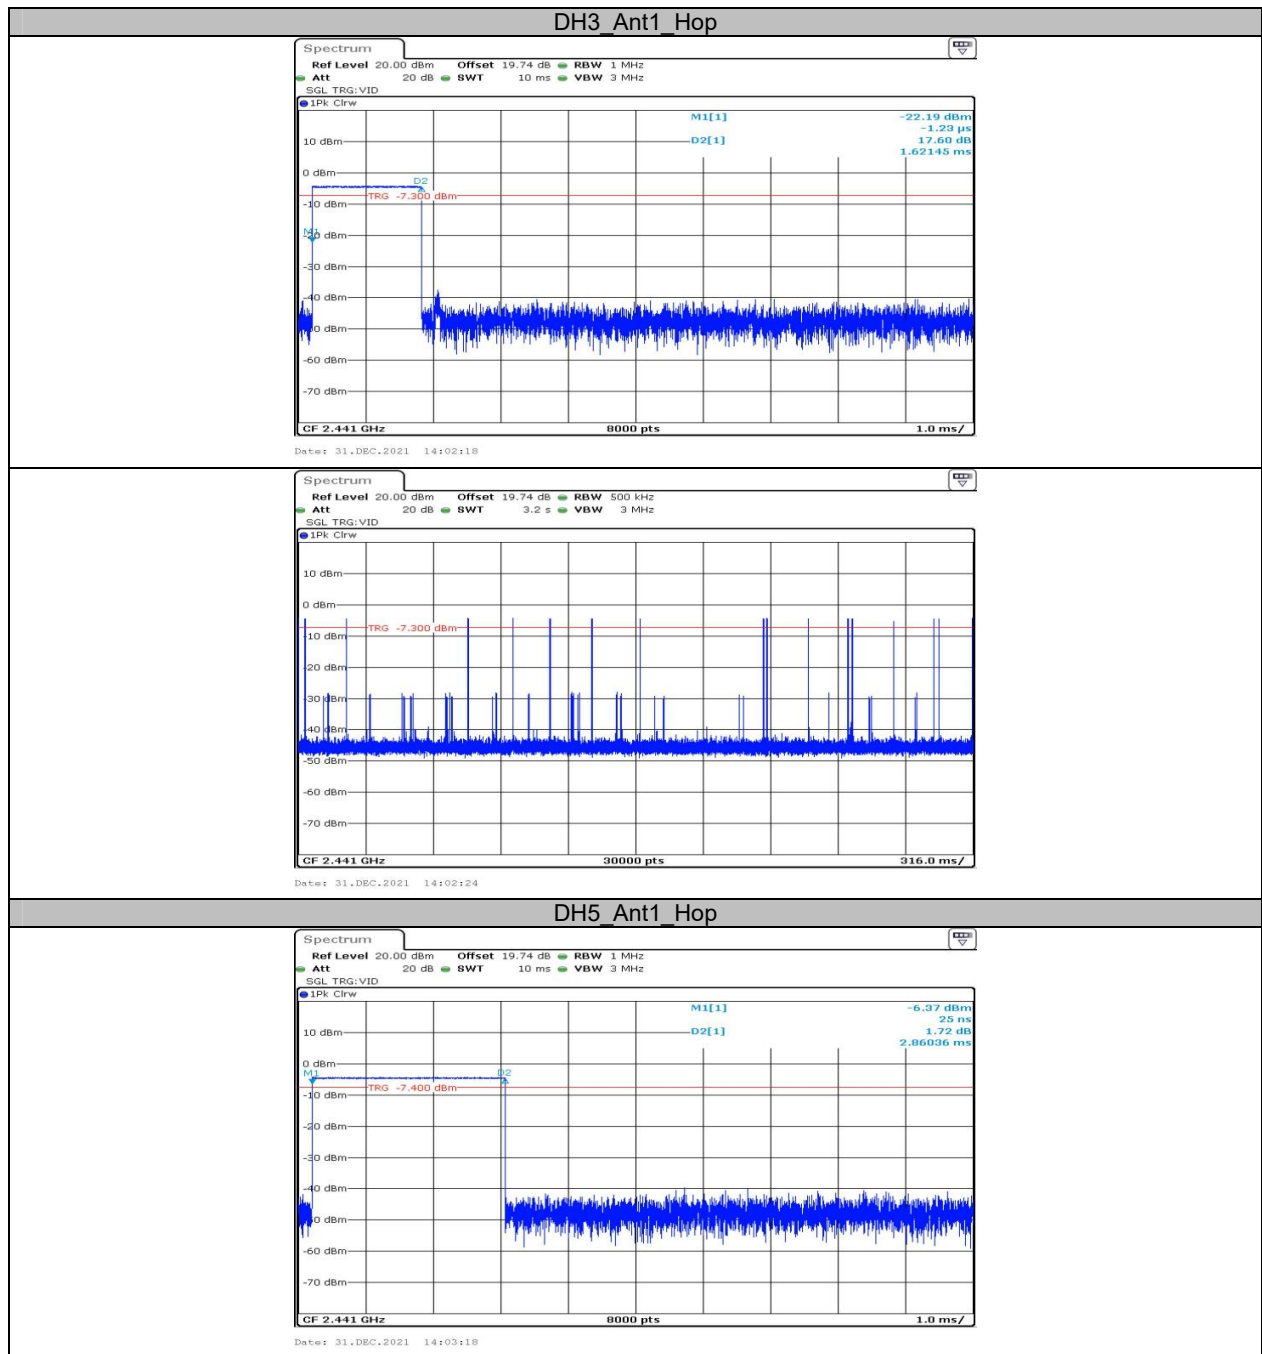


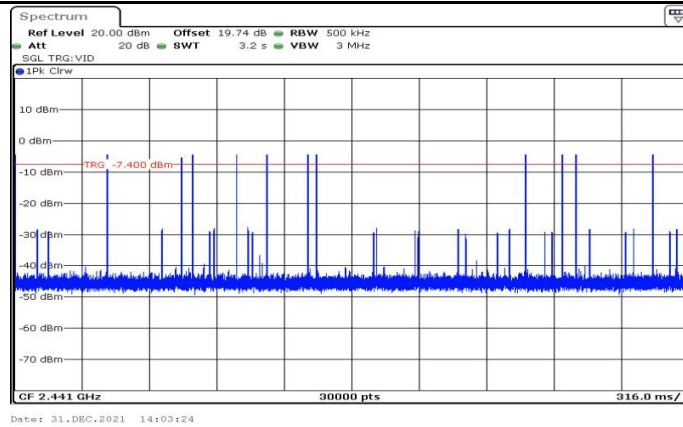

## 2DH1\_Ant1\_Hop

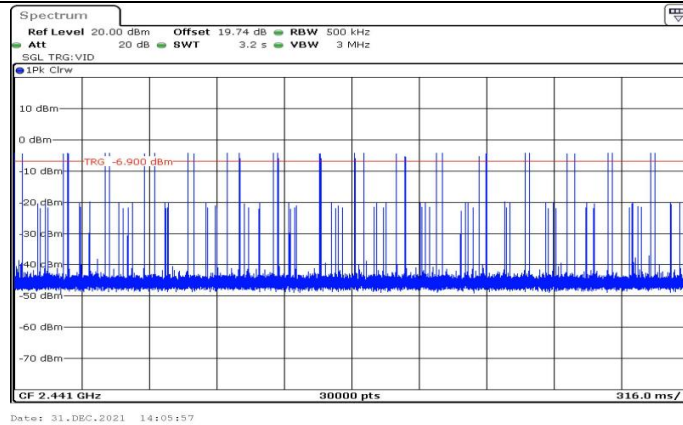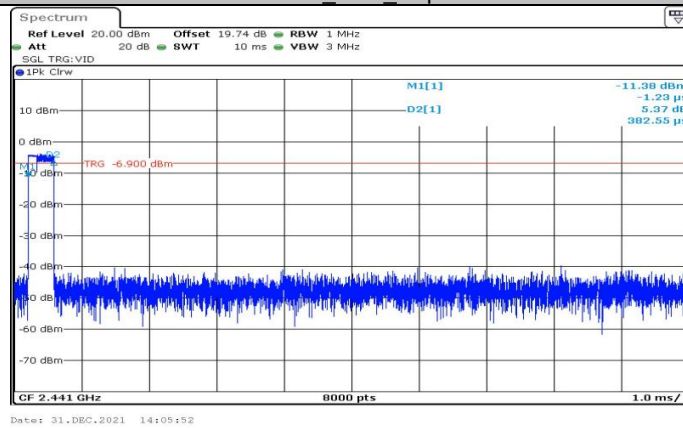


## 2DH3\_Ant1\_Hop

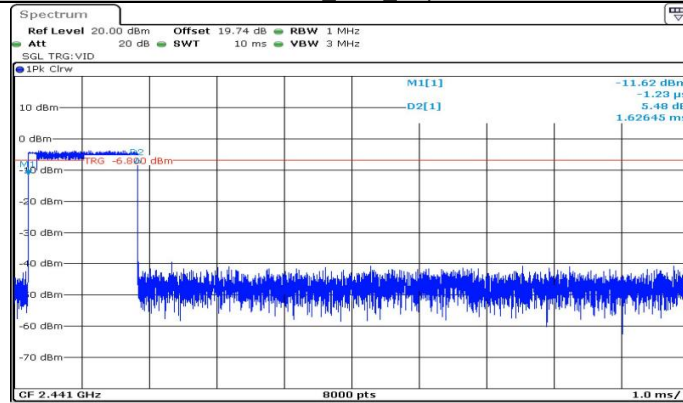


Date: 31.DEC.2021 14:07:21



## 2DH5\_Ant1\_Hop

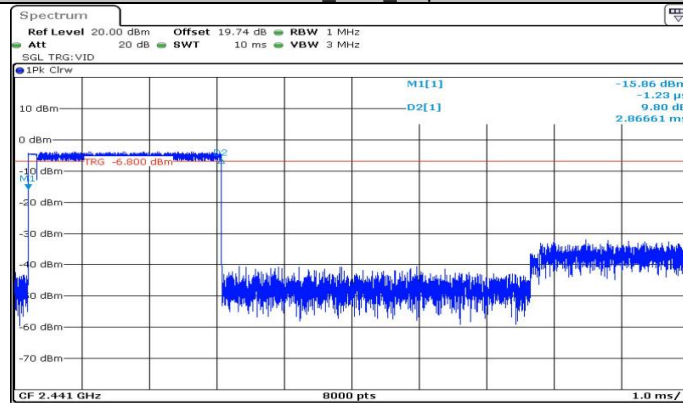

Date: 31.DEC.2021 14:08:21

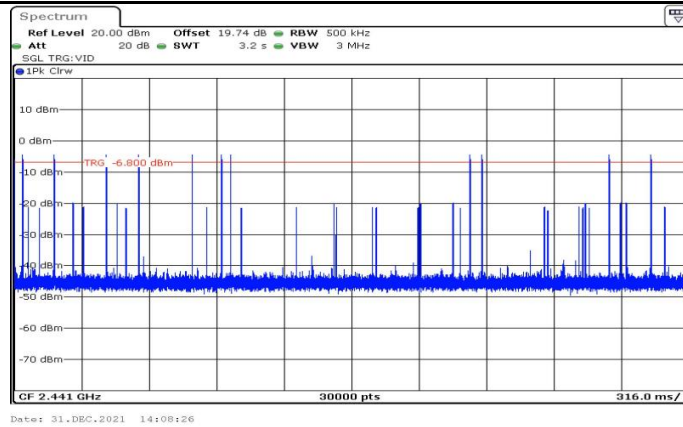


## 3DH1\_Ant1\_Hop

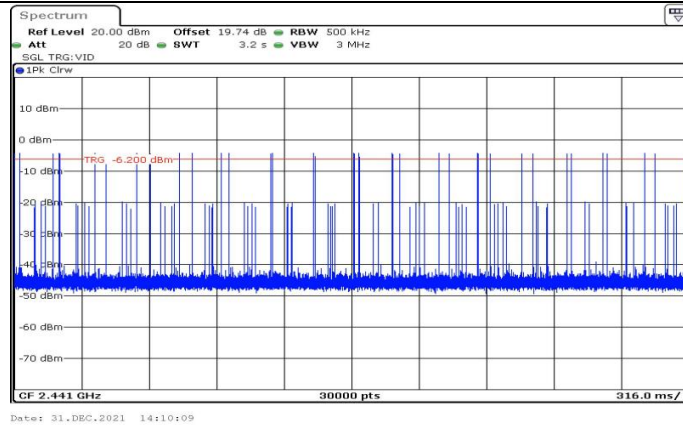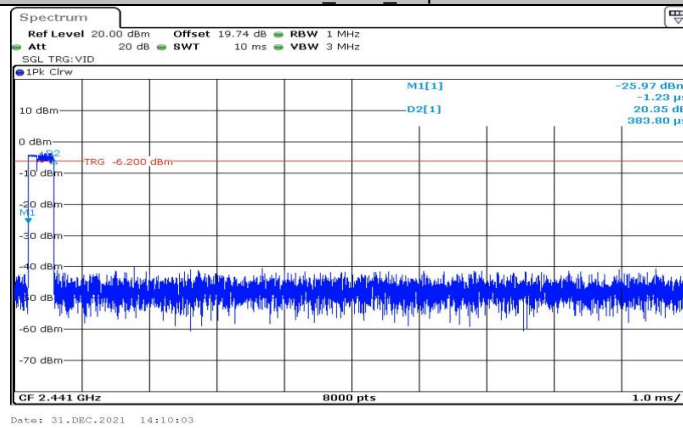




## 3DH3\_Ant1\_Hop

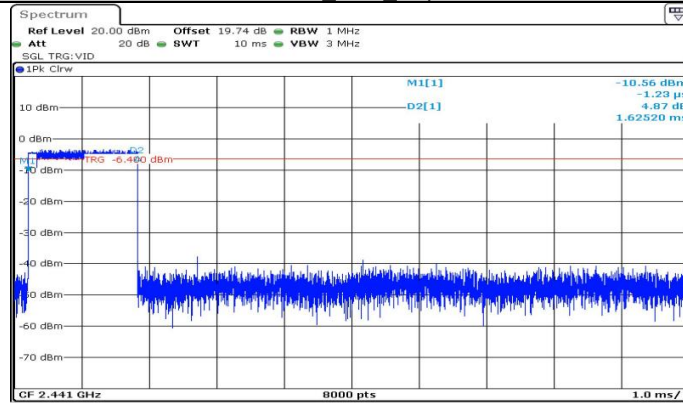


Date: 31.DEC.2021 14:11:19

## 3DH5\_Ant1\_Hop

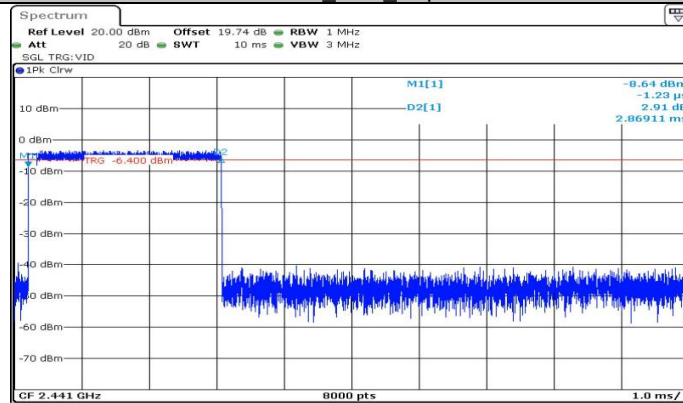

Date: 31.DEC.2021 14:13:03

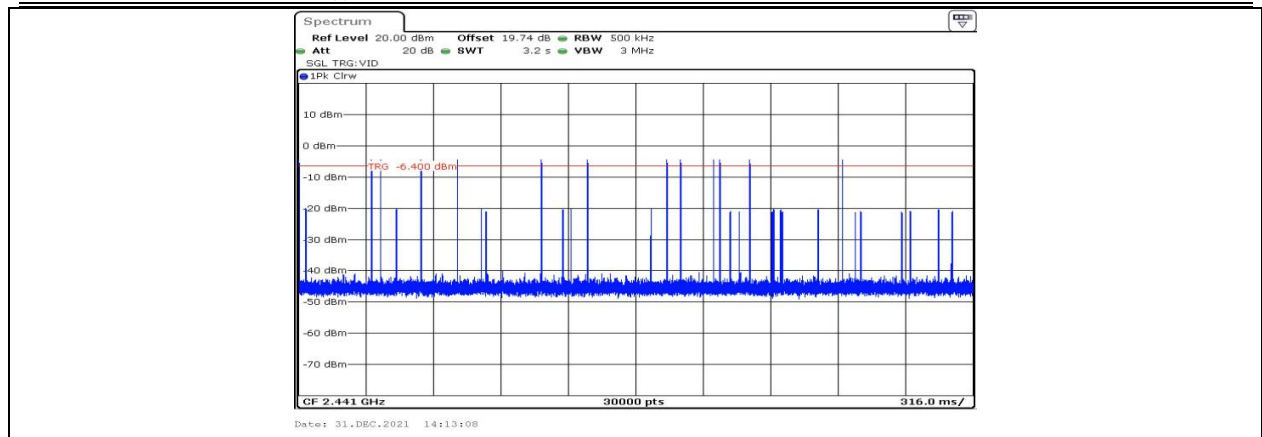


## Appendix F: Number of hopping channels

### Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


### Test Graphs

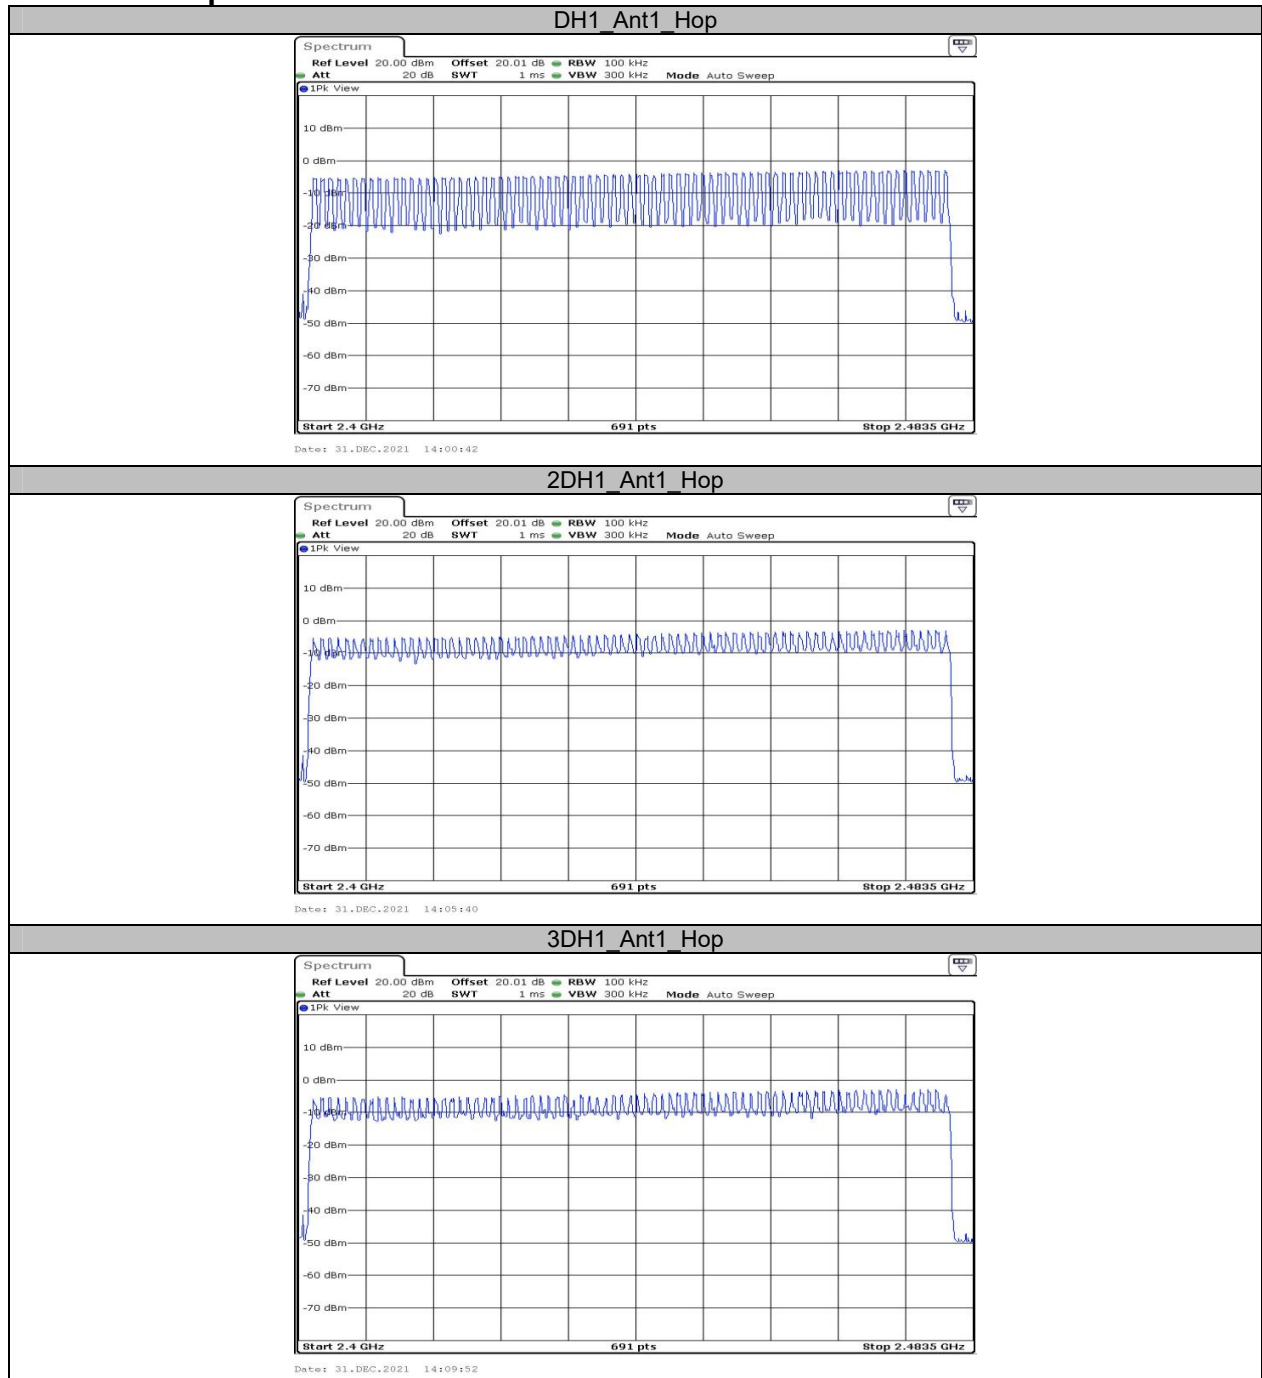


## Appendix G: Band edge measurements

### Test Graphs


DH1\_Ant1\_Low\_2402

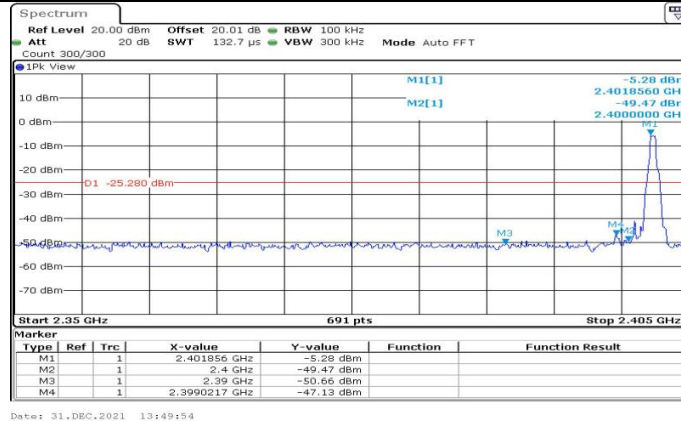


DH1\_Ant1\_High\_2480

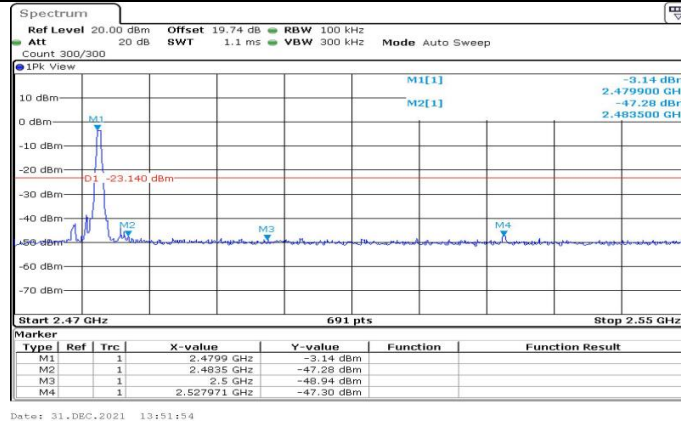

DH1\_Ant1\_Low\_Hop\_2402

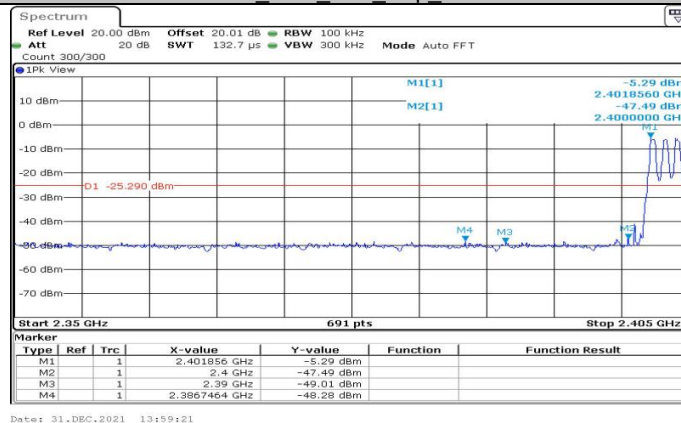


## DH1\_Ant1\_High\_Hop\_2480

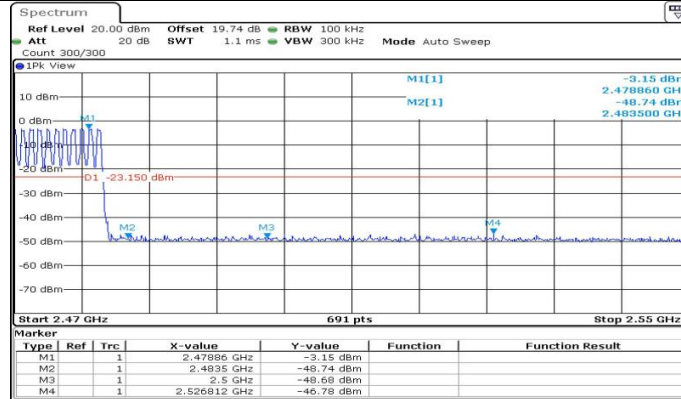


Date: 31.DEC.2021 14:01:47

## 2DH1\_Ant1\_Low\_2402

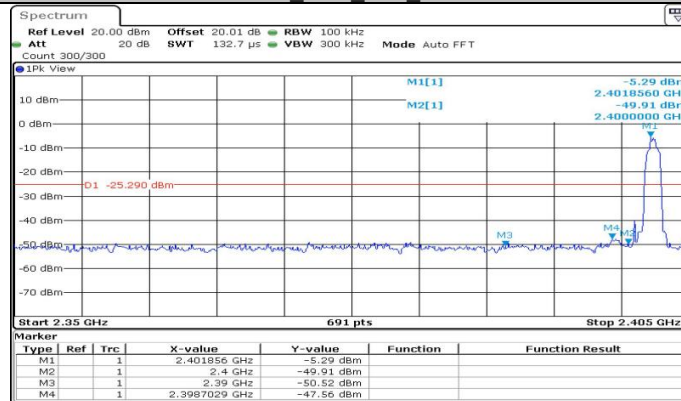


Date: 31.DEC.2021 13:52:57

## 2DH1\_Ant1\_High\_2480

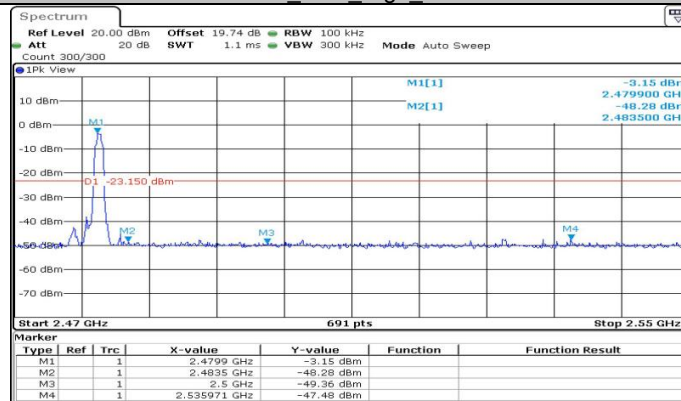


Date: 31.DEC.2021 13:54:48


## 2DH1 Ant1 Low Hop 2402

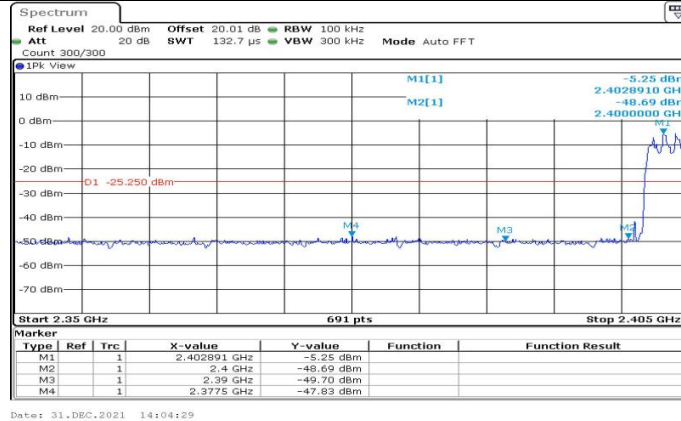


## 2DH1 Ant1 High Hop 2480

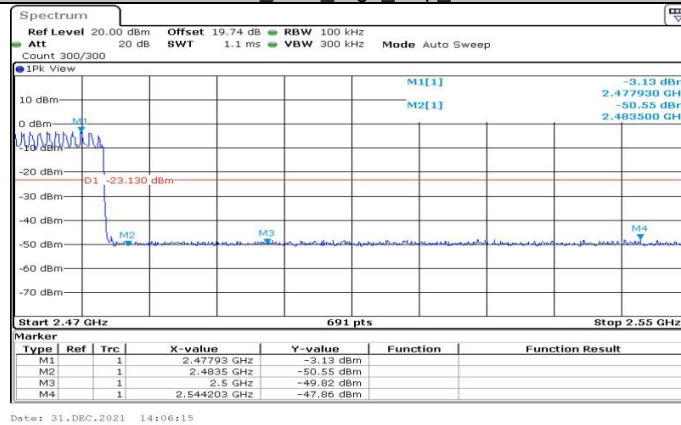

## 3DH1 Ant1 Low 2402

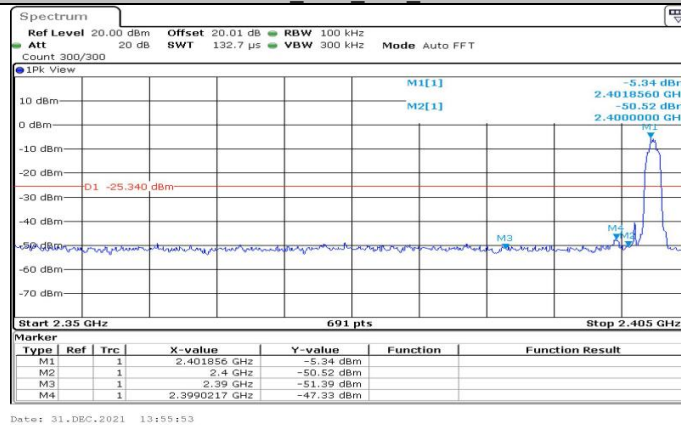


## 3DH1\_Ant1\_High\_2480

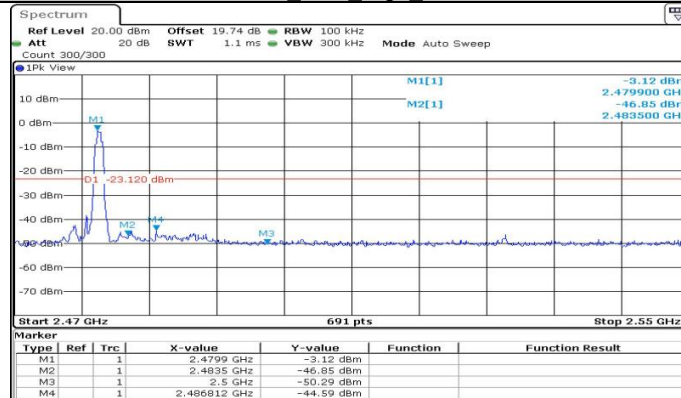


Date: 31.DEC.2021 13:57:44

## 3DH1\_Ant1\_Low\_Hop\_2402

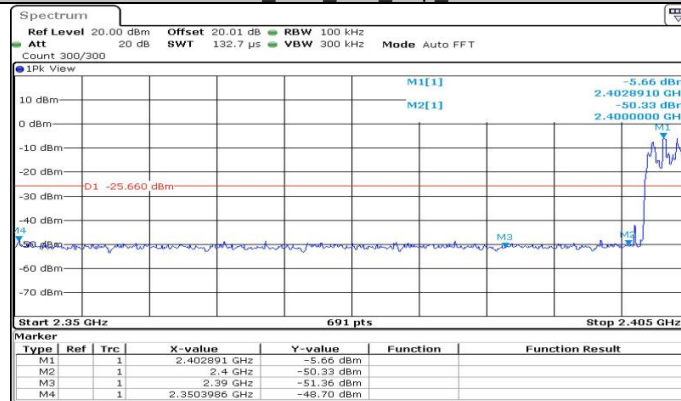

Date: 31.DEC.2021 14:09:05

## 3DH1\_Ant1\_High\_Hop\_2480

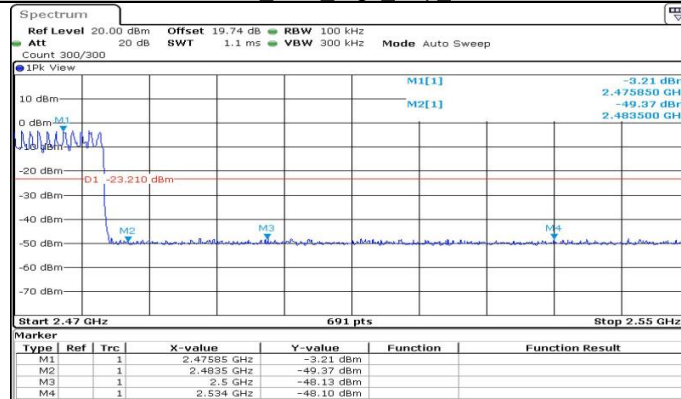

Date: 31.DEC.2021 14:10:25

\*\*\*\*\* END OF REPORT \*\*\*\*\*