



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: February 27 ,2024 ~ March 20 ,2024
Test Report S/N: LR500112404C
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AZKWAIR-R26A

APPLICANT

ATEC IoT CO., LTD.

| | | |
|----------------------------------|---|---|
| Equipment Class | : | Digital Transmission System (DTS) |
| Manufacturing Description | : | Electronic Shelf Label |
| Manufacturer | : | ATEC IoT CO., LTD. |
| Model name | : | AIR-R26A |
| Variant Model name | : | - |
| Test Device Serial No.: | : | Identical prototype |
| Rule Part(s) | : | FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013 |
| Frequency Range | : | 2405 ~ 2480 MHz Zigbee |
| Max. Output Power | : | Max 4.61 dBm - Conducted |
| Data of issue | : | April 01 ,2024 |

This test report is issued under the authority of:

The test was supervised by:

Ja-Beom Koo, Manager

Eun-Hwan Jung, Test Engineer

TABLE OF CONTENTS

| | | |
|--|-------|----|
| 1. GENERAL INFORMATION | ----- | 3 |
| 2. INFORMATION ABOUT TEST ITEM | ----- | 4 |
| 3. TEST REPORT | ----- | 5 |
| 3.1 SUMMARY OF TESTS | ----- | 5 |
| 3.2 TECHNICAL CHARACTERISTICS TEST | ----- | 6 |
| 3.2.1 6 dB BANDWIDTH | ----- | 6 |
| 3.2.2 PEAK OUTPUT POWER | ----- | 8 |
| 3.2.3 POWER SPECTRAL DENSITY | ----- | 10 |
| 3.2.4 BAND EDGE | ----- | 12 |
| 3.2.5 CONDUCTED SPURIOUS EMISSIONS | ----- | 14 |
| 3.2.6 RADIATED SPURIOUS EMISSIONS | ----- | 16 |
| APPENDIX | | |
| APPENDIX TEST EQUIPMENT USED FOR TESTS | ----- | 29 |

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

| Agency | Country | Accreditation No. | Validity | Reference |
|--------|---------|-------------------|------------|---------------------|
| RRA | KOREA | KR0049 | - | EMC accredited Lab. |
| FCC | U.S.A | 649054 | 2025-03-29 | FCC CAB |
| VCCI | JAPAN | C-4948, | 2026-09-10 | VCCI registration |
| VCCI | JAPAN | T-2416, | 2026-09-10 | VCCI registration |
| VCCI | JAPAN | R-4483(10 m), | 2026-10-15 | VCCI registration |
| VCCI | JAPAN | G-847 | 2024-12-13 | VCCI registration |
| IC | CANADA | 5799A-1 | 2024-08-15 | IC filing |

2. Information about test item

2-1 Client & Manufacturer

Client Company name : ATEC IoT CO., LTD.
 Address : 289, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Tel / Fax : +82-31-696-9829 / +82-31-696-9899
 Manufacturer : ATEC IoT CO., LTD.
 Address : 289, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
 Tel / Fax : +82-31-696-9829 / +82-31-696-9899

2-2 Equipment Under Test (EUT)

Model name : AIR-R26A
 Serial number : Identical prototype
 Date of receipt : February 27 ,2024
 EUT condition : Pre-production, not damaged
 Antenna type : Pattern Antenna (Gain : -0.11 dBi)
 Frequency Range : 2405 ~ 2480 MHz
 RF output power : Max 4.61 dBm – Conducted
 Type of Modulation : GFSK, O-QPSK
 Power Source : DC 3 V

2-3 Tested frequency

| | LOW | MID | HIGH |
|------------------------|------|------|------|
| Frequency (MHz) Zigbee | 2405 | 2440 | 2480 |

2-4 Ancillary Equipment

| Equipment | Model No. | Serial No. | Manufacturer |
|-----------|-----------|------------|--------------|
| Notebook | - | MS-1736 | MSI |

3. Test Report

3.1 Summary of tests

| FCC Part Section(s) | Parameter | Test Condition | Status (note 1) |
|---------------------|---|----------------|-----------------|
| 15.247(a) | 6 dB Bandwidth | Conducted | C |
| 15.247(b) | Transmitter Peak Output Power | | C |
| 15.247(e) | Transmitter Power Spectral Density | | C |
| 15.247(d) | Band Edge & Conducted Spurious emission | | C |
| 15.209 | Transmitter emission | Radiated | C |
| 15.207 | AC Conducted Emissions | Conducted | N/A |
| 15.203 | Antenna requirement | - | C |

N/A : This product is only operated with DC voltage.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

A TEC IoT CO., LTD. FCC ID: 2AZKWAIR-R26A unit complies with the requirement of §15.203.

The antenna type is Pattern Antenna

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : Complies

Mode

| Frequency (MHz) | Test Results | |
|-----------------|--------------------------|----------|
| | Measured Bandwidth (MHz) | Result |
| 2405 | 0.651 | Complies |
| 2440 | 0.651 | Complies |
| 2480 | 0.651 | Complies |

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth ≥ 500 kHz

Measurement Setup




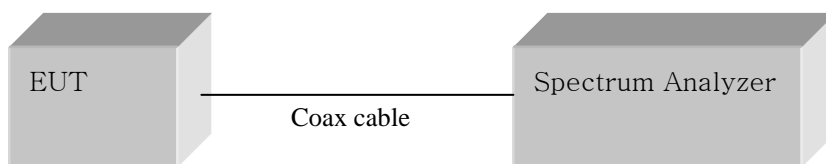


Figure 1: Measurement setup for the carrier frequency separation

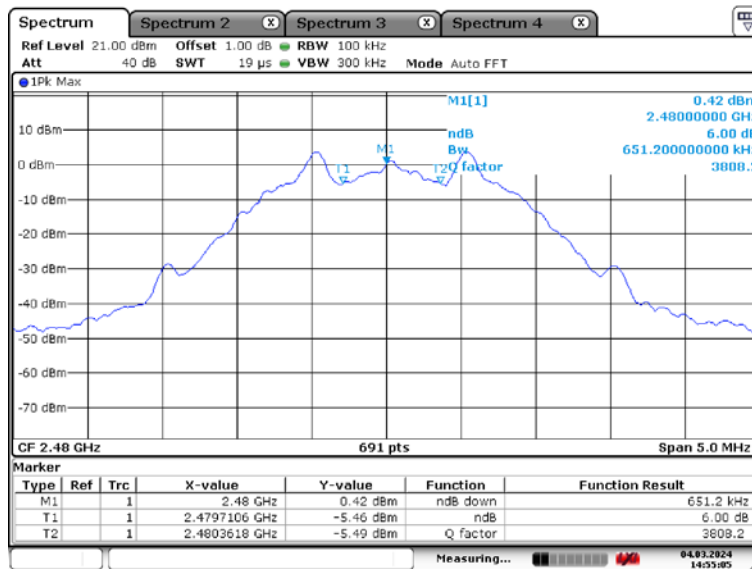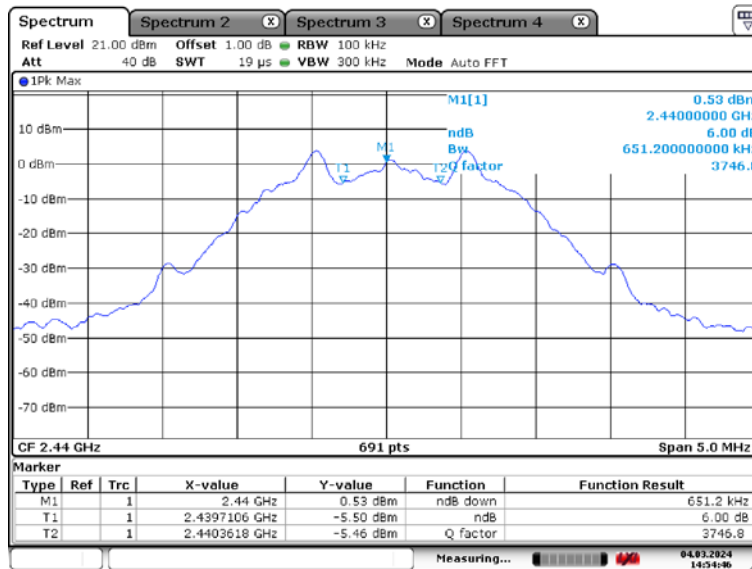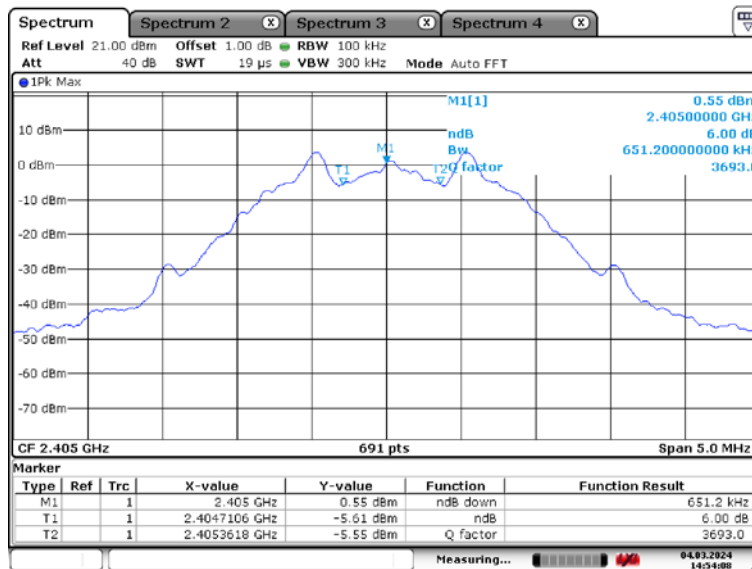

3.2.2 Peak Output Power Measurement

Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW ≥ DTS Bandwidth

Span ≥ 3 X RBW

VBW = 3 X RBW

Sweep = auto

Detector function = peak

Measurement Data : Complies

Mode

| Frequency (MHz) | Test Results | |
|-----------------|---------------------|----------|
| | Measured data (dBm) | Result |
| 2405 | 4.60 | Complies |
| 2440 | 4.61 | Complies |
| 2480 | 4.54 | Complies |




- See next pages for actual measured spectrum plots.

Minimum Standard:

| | |
|-------------------|---------------|
| Peak output power | ≤ 1 W(30 dBm) |
|-------------------|---------------|

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

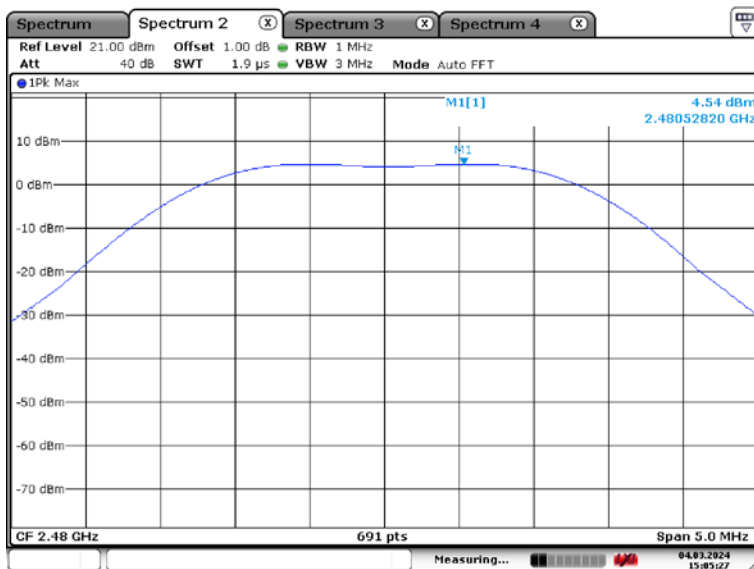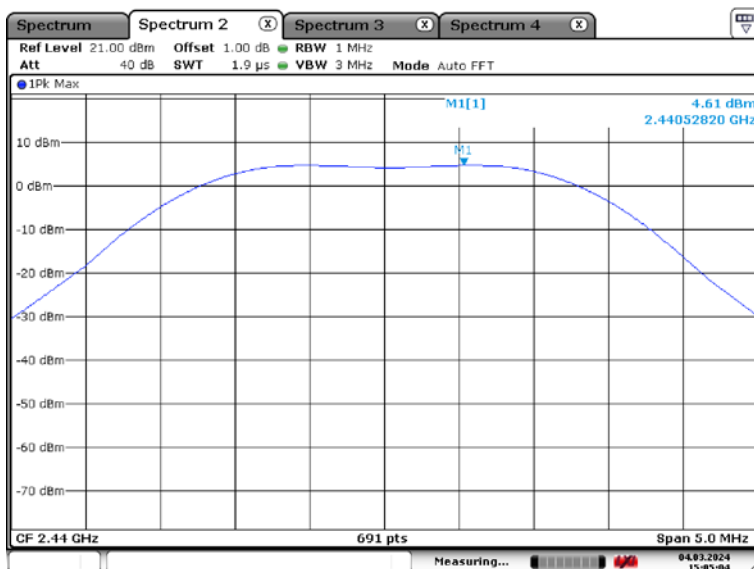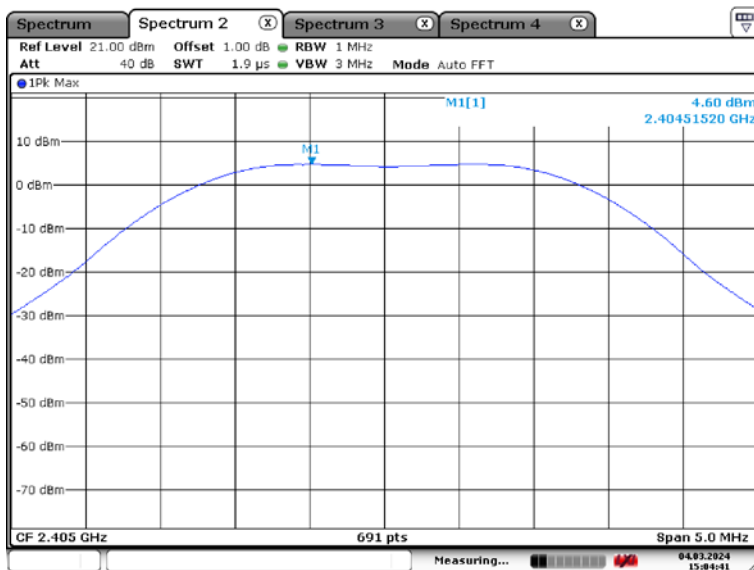

3.2.3 Power Spectral Density

Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

- RBW = 3 kHz ($3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$) Span ≥ 1.5 times the DTS bandwidth
- VBW = 3 X RBW Sweep = auto
- Detector function = peak Trace = max hold

Measurement Data : Complies

Mode

| Frequency (MHz) | Test Results | |
|-----------------|----------------|----------|
| | dBm / 3 kHz BW | Result |
| 2405 | -1.57 | Complies |
| 2440 | -1.51 | Complies |
| 2480 | -1.60 | Complies |




- See next pages for actual measured spectrum plots.



Minimum Standard:

| | |
|------------------------|---------------------------------------|
| Power Spectral Density | $\leq 8\text{ dBm @ }3\text{ kHz BW}$ |
|------------------------|---------------------------------------|

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

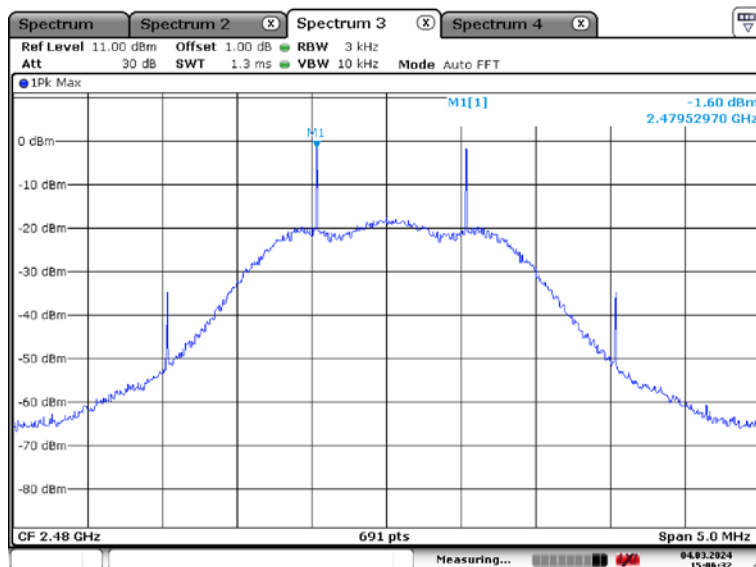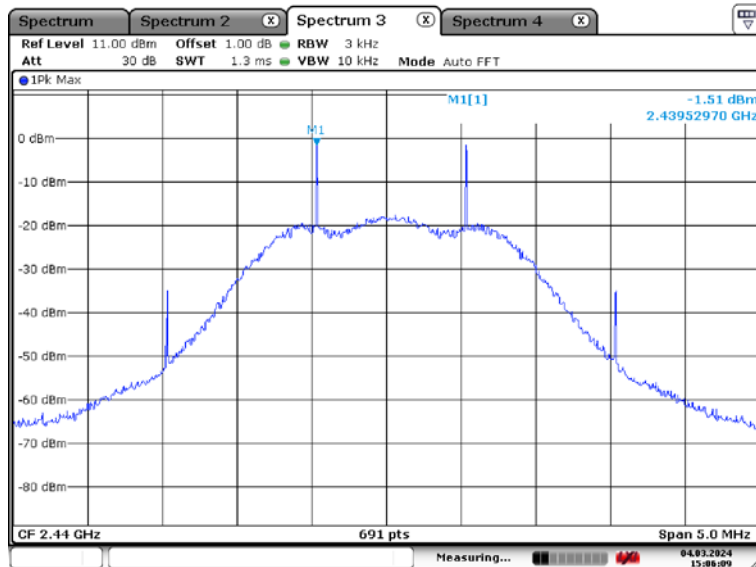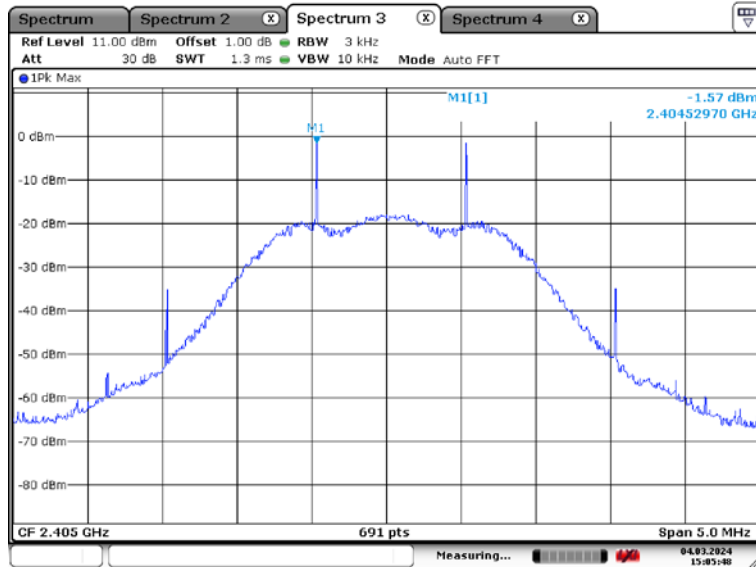

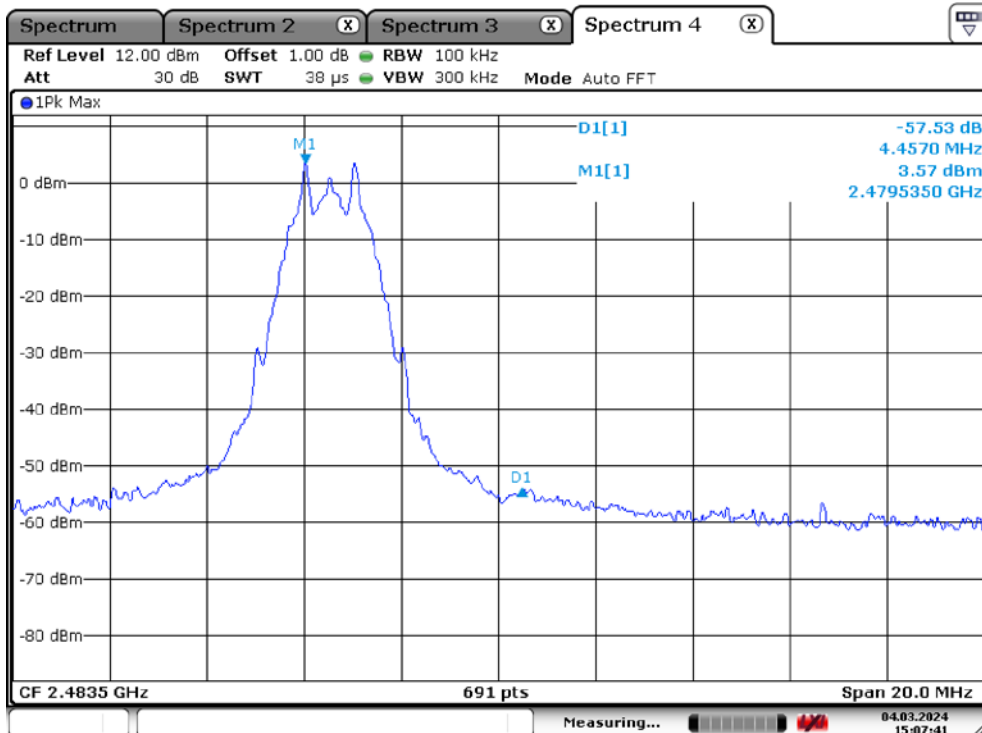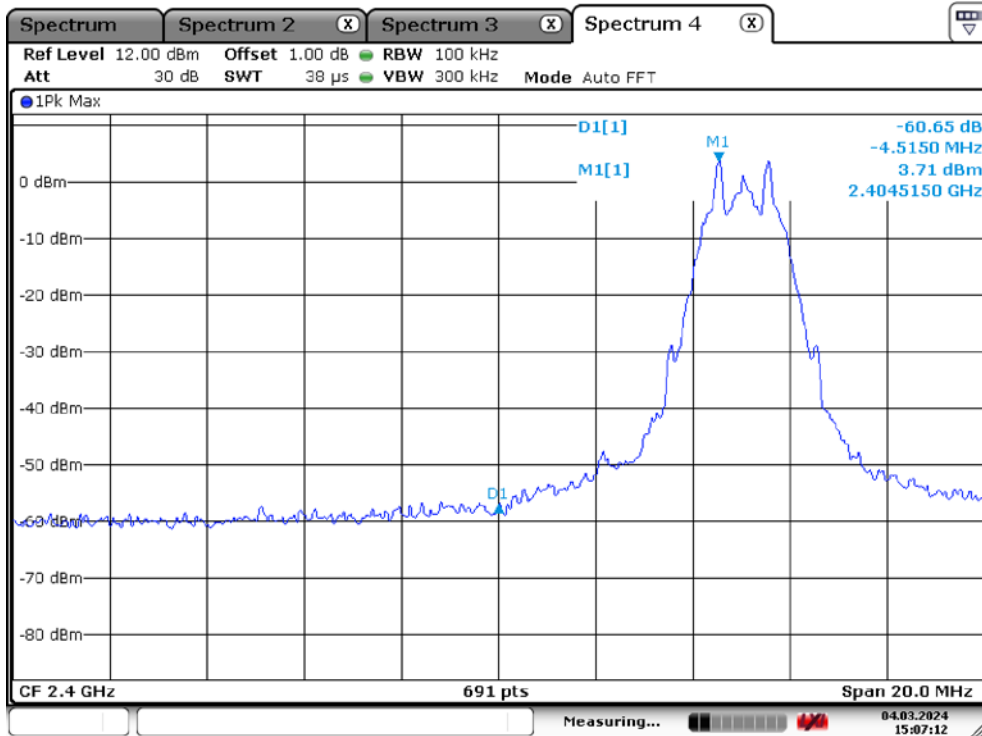

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: Complies

| Frequency (MHz) | Test Results | |
|-----------------|--------------|----------|
| | dBc | Result |
| 2405 | 38.75 | Complies |
| 2440 | 37.03 | Complies |
| 2480 | 43.17 | Complies |




- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

| | |
|--------------------------|----------|
| Minimum Standard: | ≥ 20 dBc |
|--------------------------|----------|

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Unwanted Emission – (Low,Middle,High)

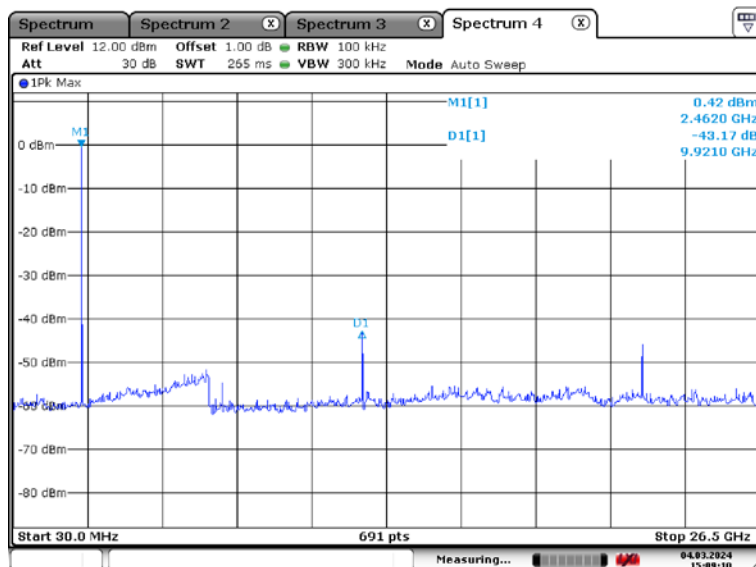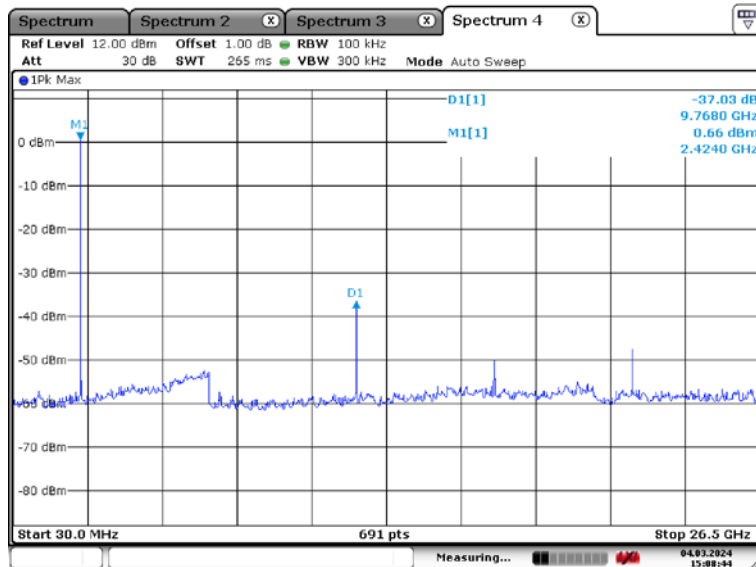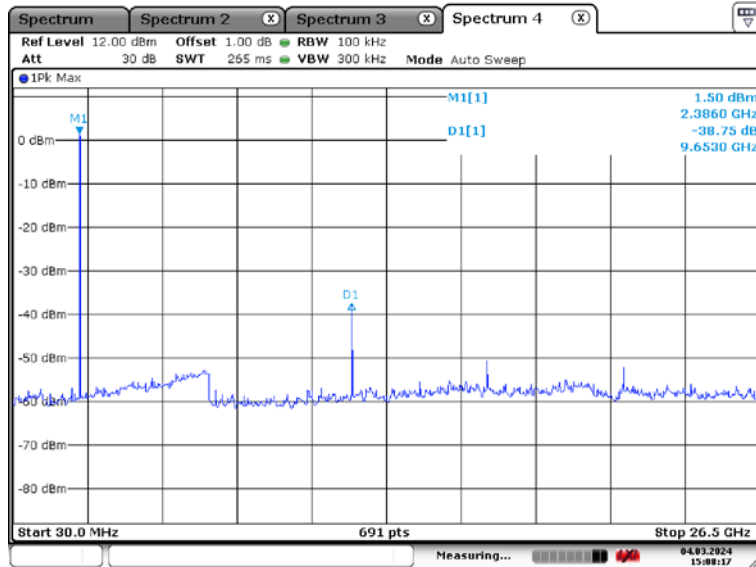

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

VBW \geq RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold


Detector function = peak

Sweep = auto


Duty cycle : 98.89 %

The EUT configureal to transmit continuously(D \geq 98%)/ Duty Factor = 0


below 30 MHz

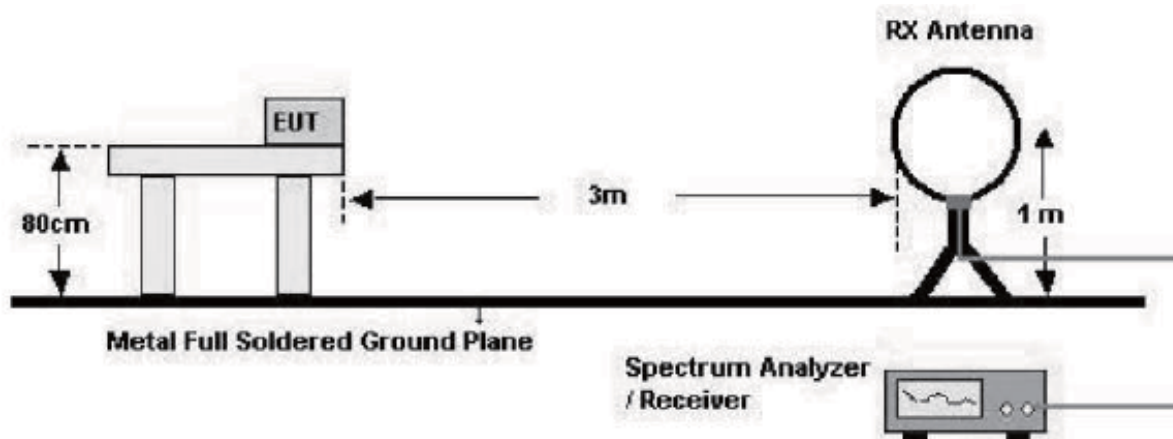

below 1 GHz (30 MHz to 1 GHz)

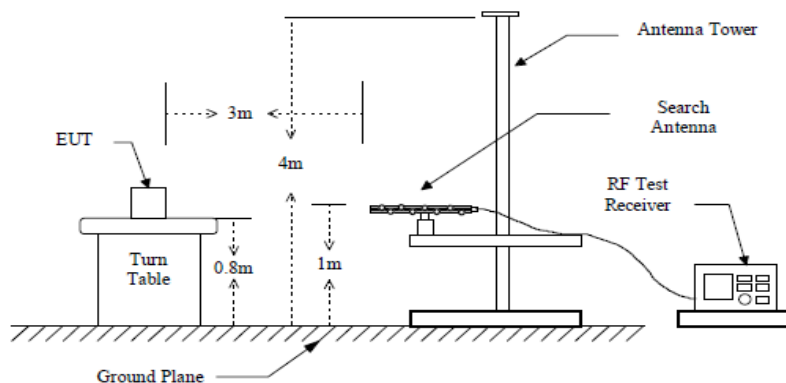

above 1 GHz

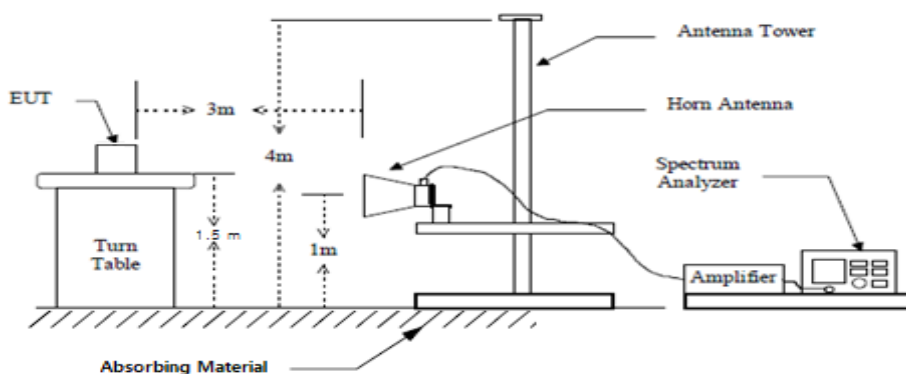

Measurement Data: Complies


- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.
- The test results for the worst of the various operating modes are presented in accordance with 6.3.4 of ANSI C63.10.
- Checked with a red circle is the fundamental frequency.

Minimum Standard: FCC Part 15.209(a)

| Frequency (MHz) | Limit (uV/m) @ 3 m |
|------------------------|---------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) (@ 30 m) |
| 0.490 ~ 1.705 | 24000/F(kHz) (@ 30 m) |
| 1.705 ~ 30 | 30(@ 30 m) |
| 30 ~ 88 | 100 ** |
| 88 ~ 216 | 150 ** |
| 216 ~ 960 | 200 ** |
| Above 960 | 500 |


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions - Low

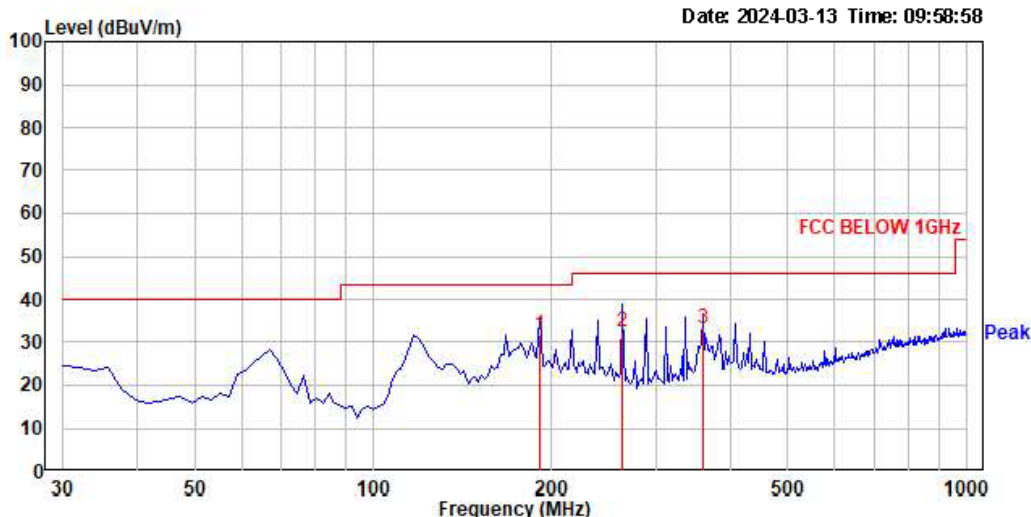


| Trace: | | | | | | | | | |
|--------|--------|---------|--------|--------------|--------|--------|--------|-------|------------|
| No. | Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
| | MHz | dBμV | dB | QP dBμV/m | dBμV/m | dB | cm | deg | |
| 1. | 191.02 | 45.50 | -13.69 | 31.81 | 43.50 | 11.69 | ----- | ----- | horizontal |
| 2. | 262.80 | 43.80 | -11.52 | 32.28 | 46.00 | 13.72 | ----- | ----- | horizontal |
| 3. | 359.80 | 41.60 | -8.46 | 33.14 | 46.00 | 12.86 | ----- | ----- | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

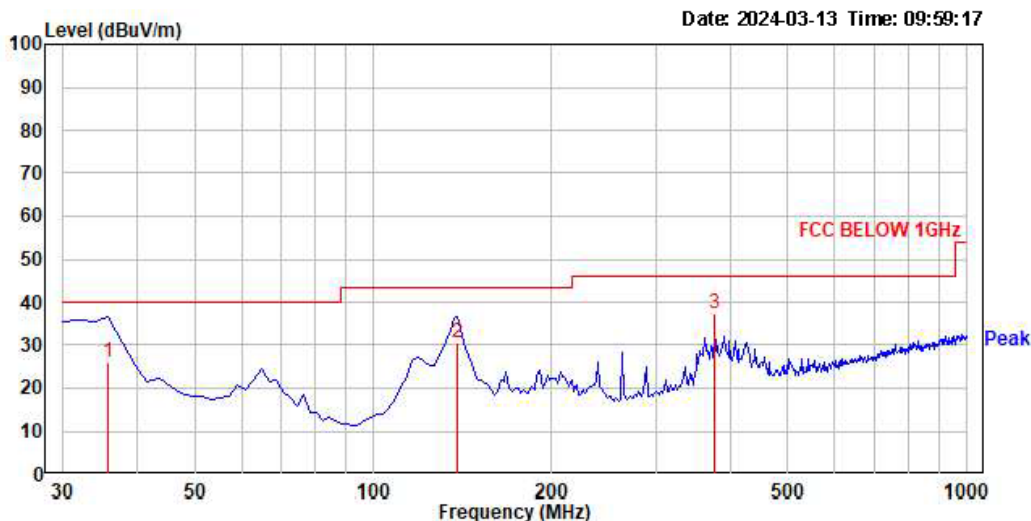


| Trace: | | | | | | | | | |
|--------|--------|---------|--------|--------------|--------|--------|--------|-------|----------|
| No. | Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
| | MHz | dBμV | dB | QP dBμV/m | dBμV/m | dB | cm | deg | |
| 1. | 35.82 | 40.10 | -13.90 | 26.20 | 40.00 | 13.80 | ----- | ----- | vertical |
| 2. | 138.64 | 42.91 | -12.35 | 30.56 | 43.50 | 12.94 | ----- | ----- | vertical |
| 3. | 375.32 | 45.70 | -8.17 | 37.53 | 46.00 | 8.47 | ----- | ----- | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

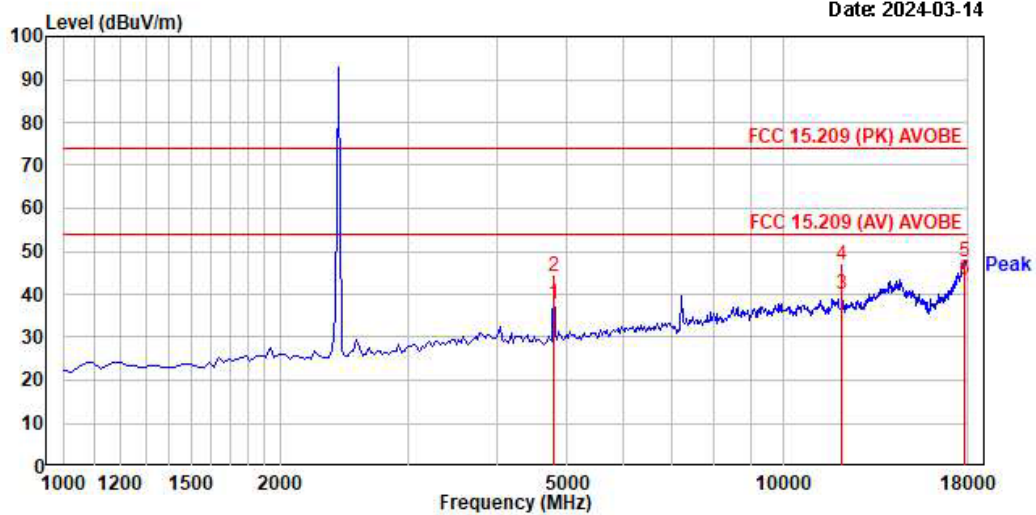


| No. | Freq MHz | RD | | C.F dB | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-----------|------------|------------|----------|----------|--------|-------|--------------|--------------|------------|
| | | PK dBμV | AV dBμV | | PK dBμV | AV dBμV | PK dB | AV dB | | | | | |
| 2. | 4794.20 | 40.34 | 33.99 | 3.73 | 44.07 | 37.72 | 74.00 | 54.00 | 29.93 | 16.28 | 100 | 132 | horizontal |
| 3. | 12037.68 | ----- | 26.11 | 14.06 | ----- | 40.17 | ----- | 54.00 | ----- | 13.83 | 100 | 340 | horizontal |
| 4. | 12037.68 | 32.74 | ----- | 14.06 | 46.80 | ----- | 74.00 | ----- | 27.20 | ----- | 100 | 340 | horizontal |
| 5. | 17827.54 | 23.00 | ----- | 24.68 | 47.68 | ----- | 74.00 | ----- | 26.32 | ----- | 100 | 69 | horizontal |
| 6. | 17827.54 | ----- | 18.70 | 24.68 | ----- | 43.38 | ----- | 54.00 | ----- | 10.62 | 100 | 69 | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

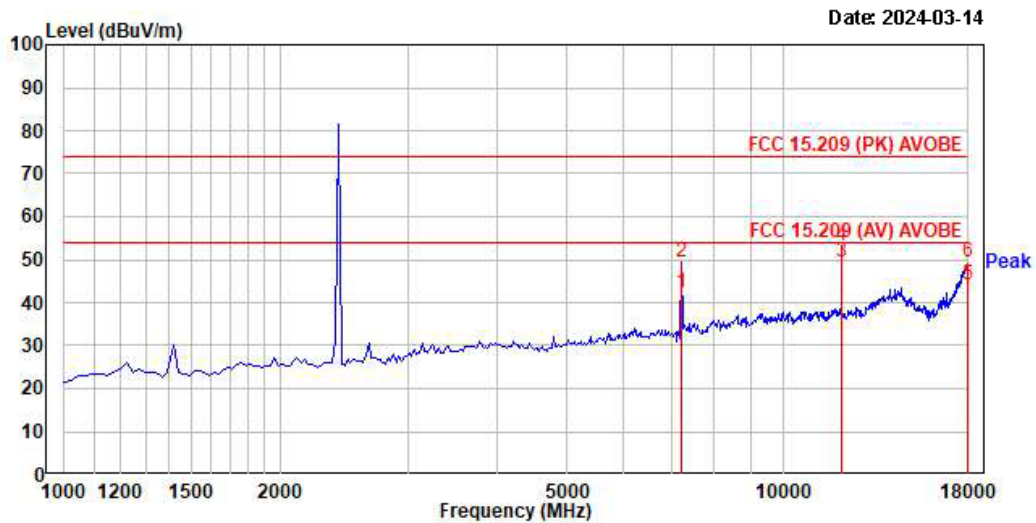


| No. | Freq MHz | RD | | C.F dB | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-----------|------------|------------|----------|----------|--------|-------|--------------|--------------|----------|
| | | PK dBμV | AV dBμV | | PK dBμV | AV dBμV | PK dB | AV dB | | | | | |
| 2. | 7208.70 | 41.18 | 33.90 | 8.29 | 49.47 | 42.19 | 74.00 | 54.00 | 24.53 | 11.81 | 100 | 394 | vertical |
| 3. | 12037.68 | ----- | 35.41 | 14.06 | ----- | 49.47 | ----- | 54.00 | ----- | 4.53 | 100 | -39 | vertical |
| 4. | 12037.68 | 39.09 | ----- | 14.06 | 53.15 | ----- | 74.00 | ----- | 20.85 | ----- | 100 | -39 | vertical |
| 6. | 18000.00 | 24.57 | 19.00 | 24.98 | 49.55 | 43.98 | 74.00 | 54.00 | 24.45 | 10.02 | 100 | 169 | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

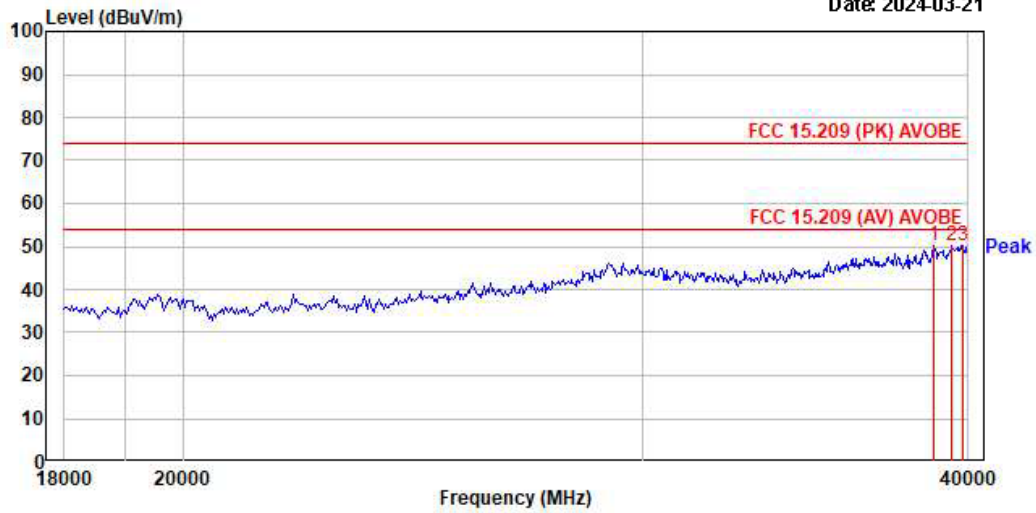

| No. | Freq MHz | RD | | C.F | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-------|--------|------------|------------|----------|----------|-------|--------------|--------------|------------|
| | | PK dBUV | AV dBUV | | dB | PK dBUV | AV dBUV | PK dB | AV dB | | | | |
| 1. | 38828.29 | 26.91 | ----- | 23.16 | 58.87 | ----- | 74.00 | ----- | 23.93 | ----- | 188 | 296 | horizontal |
| 2. | 39457.97 | 25.51 | ----- | 24.75 | 58.26 | ----- | 74.00 | ----- | 23.74 | ----- | 188 | 368 | horizontal |
| 3. | 39848.58 | 25.37 | ----- | 24.98 | 58.35 | ----- | 74.00 | ----- | 23.65 | ----- | 188 | 313 | horizontal |


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

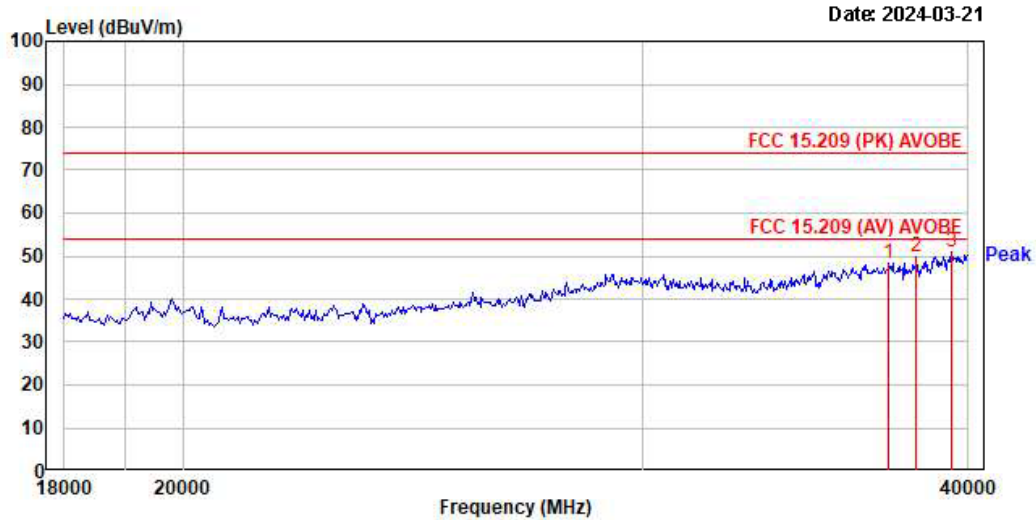

| No. | Freq MHz | RD | | C.F | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-------|--------|------------|------------|----------|----------|-------|--------------|--------------|----------|
| | | PK dBUV | AV dBUV | | dB | PK dBUV | AV dBUV | PK dB | AV dB | | | | |
| 1. | 37321.74 | 24.79 | ----- | 23.67 | 48.46 | ----- | 74.00 | ----- | 25.54 | ----- | 188 | 289 | vertical |
| 2. | 38246.38 | 27.18 | ----- | 22.86 | 49.96 | ----- | 74.00 | ----- | 24.84 | ----- | 188 | 273 | vertical |
| 3. | 39457.97 | 26.83 | ----- | 24.93 | 58.96 | ----- | 74.00 | ----- | 23.84 | ----- | 188 | 257 | vertical |


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Middle

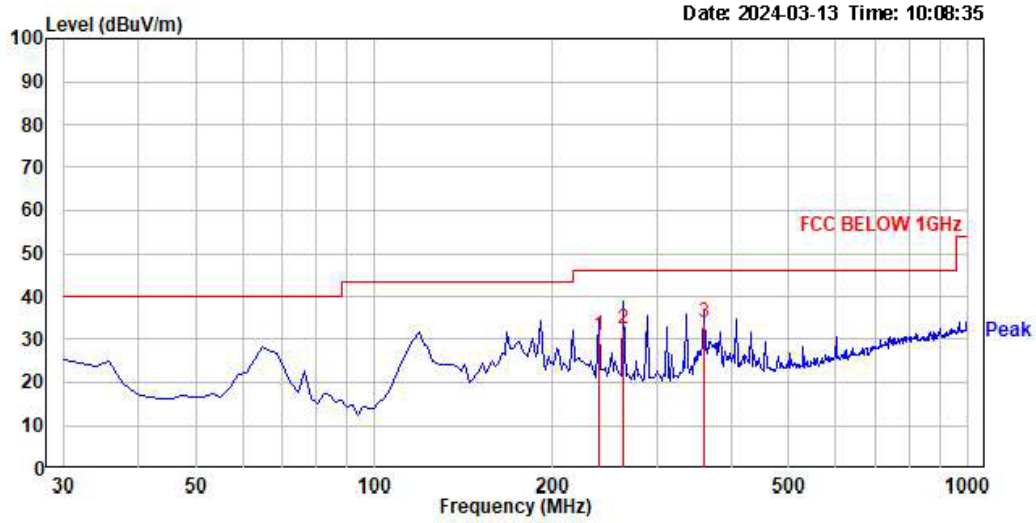

| Trace: | | | | | | | | | |
|--------|--------|------------|--------|--------------|--------------|--------|--------|-------|------------|
| No. | Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
| | MHz | dB μ V | dB | dB μ V/m | dB μ V/m | dB | cm | deg | |
| 1. | 239.52 | 43.21 | -12.34 | 30.87 | 46.00 | 15.13 | ----- | ----- | horizontal |
| 2. | 262.80 | 44.00 | -11.52 | 32.48 | 46.00 | 13.52 | ----- | ----- | horizontal |
| 3. | 359.80 | 42.60 | -8.46 | 34.14 | 46.00 | 11.86 | ----- | ----- | horizontal |


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

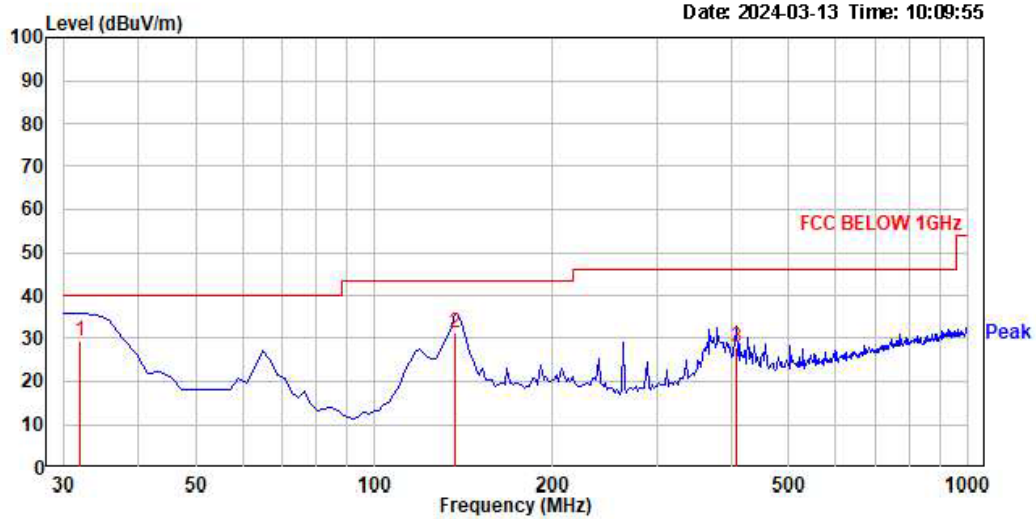

| Trace: | | | | | | | | | |
|--------|--------|------------|--------|--------------|--------------|--------|--------|-------|----------|
| No. | Freq | Reading | C.F | Result | Limit | Margin | Height | Angle | Polarity |
| | MHz | dB μ V | dB | dB μ V/m | dB μ V/m | dB | cm | deg | |
| 1. | 31.94 | 43.59 | -14.26 | 29.33 | 40.00 | 10.67 | ----- | ----- | vertical |
| 2. | 136.70 | 43.90 | -12.56 | 31.34 | 43.50 | 12.16 | ----- | ----- | vertical |
| 3. | 408.30 | 35.49 | -7.69 | 27.80 | 46.00 | 18.20 | ----- | ----- | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-03-14

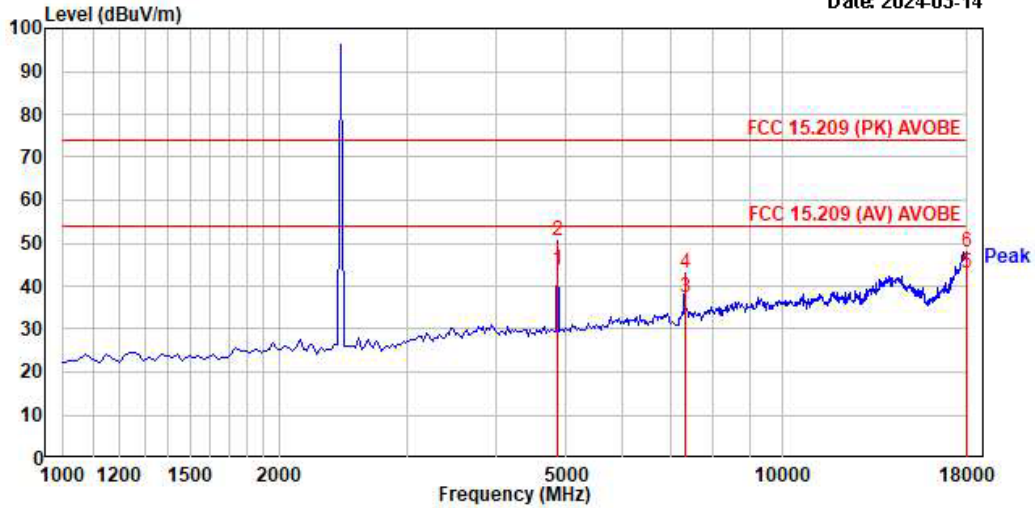

| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|------------|
| 1. | 4868.12 | 39.71 | 3.92 | ----- | 43.63 | 54.88 | ----- | 54.88 | 18.37 | 18.37 | 188 | 138 | horizontal |
| 2. | 4868.12 | 46.76 | 3.92 | ----- | 50.68 | 74.08 | ----- | 54.88 | 23.32 | 18.37 | 188 | 138 | horizontal |
| 3. | 7387.25 | 28.68 | 8.76 | ----- | 37.36 | 54.88 | ----- | 54.88 | 16.64 | 16.64 | 188 | 54 | horizontal |
| 4. | 7387.25 | 34.22 | 8.76 | ----- | 42.98 | 74.08 | ----- | 54.88 | 31.82 | 16.64 | 188 | 54 | horizontal |
| 5. | 17975.36 | 18.18 | 24.96 | ----- | 43.86 | 54.88 | ----- | 54.88 | 18.94 | 18.94 | 188 | 282 | horizontal |
| 6. | 17975.36 | 22.88 | 24.96 | ----- | 47.84 | 74.08 | ----- | 54.88 | 26.16 | 18.94 | 188 | 282 | horizontal |


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Date: 2024-03-14

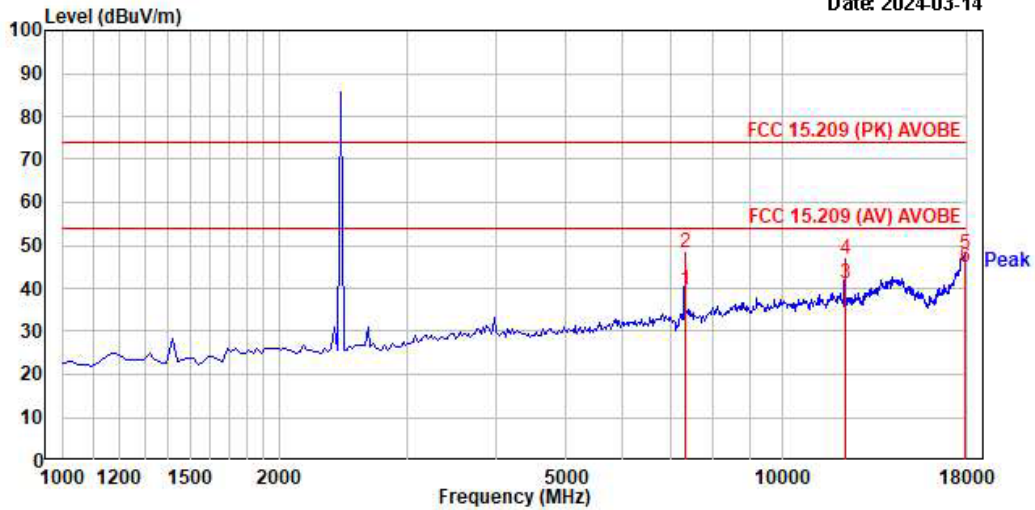


| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|----------|
| 1. | 7387.25 | 38.88 | 8.76 | ----- | 39.56 | 54.88 | ----- | 54.88 | 14.44 | 14.44 | 188 | 365 | vertical |
| 2. | 7387.25 | 39.51 | 8.76 | ----- | 48.27 | 74.08 | ----- | 54.88 | 25.73 | 14.44 | 188 | 365 | vertical |
| 3. | 12218.14 | 27.18 | 14.82 | ----- | 41.12 | 54.88 | ----- | 54.88 | 12.88 | 12.88 | 188 | 288 | vertical |
| 4. | 12218.14 | 32.62 | 14.82 | ----- | 46.64 | 74.08 | ----- | 54.88 | 27.36 | 12.88 | 188 | 288 | vertical |
| 5. | 17926.88 | 23.19 | 24.88 | ----- | 48.87 | 74.08 | ----- | 54.88 | 25.93 | 12.88 | 188 | 4 | vertical |
| 6. | 17926.88 | 28.81 | 24.88 | ----- | 44.89 | 54.88 | ----- | 54.88 | 9.11 | 12.88 | 188 | 4 | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

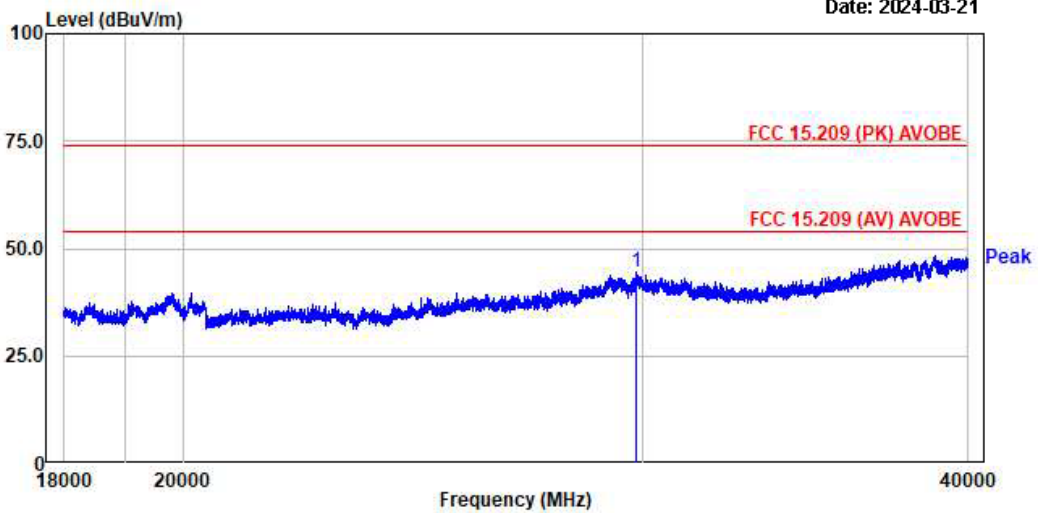

| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|------------|
| 1. | 29838.75 | 22.51 | ----- | 21.98 | 44.41 | ----- | 74.88 | ----- | 29.59 | ----- | 194 | 281 | horizontal |


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

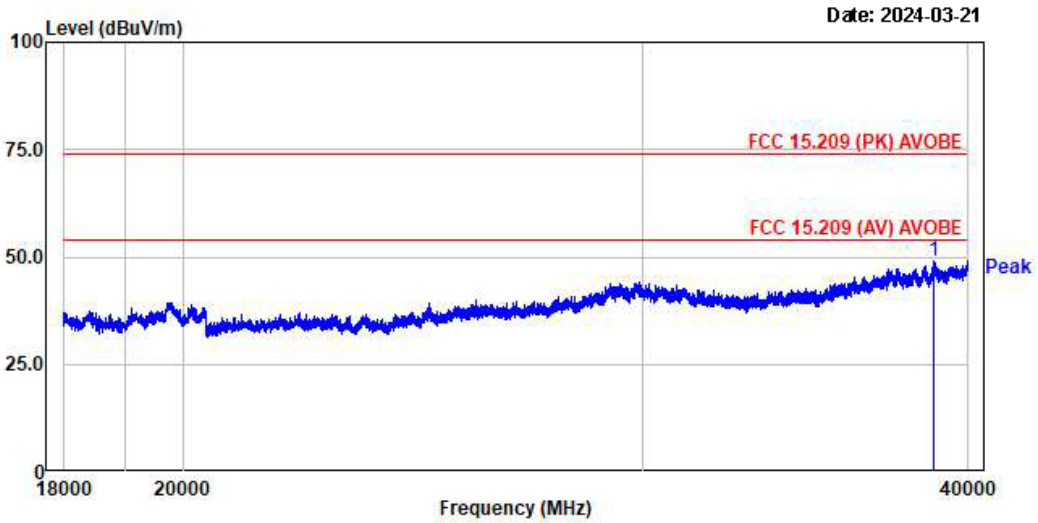

| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|----------|
| 1. | 38842.25 | 27.71 | ----- | 21.53 | 49.24 | ----- | 74.88 | ----- | 24.76 | ----- | 9 | 6 | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


High

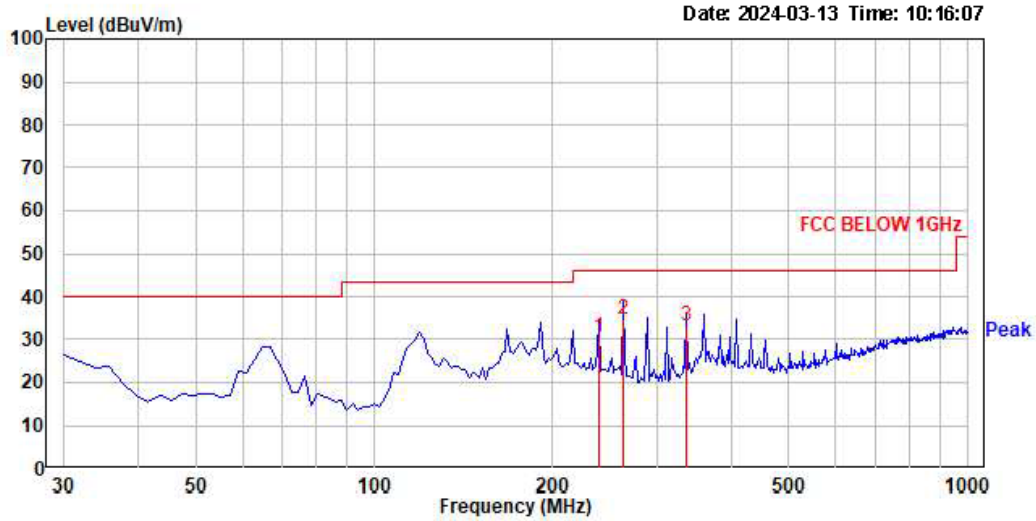

Trace:

| No. | Freq MHz | Reading dB μ V | C.F dB | Result QP dB μ V/m | Limit dB μ V/m | Margin dB | Height cm | Angle deg | Polarity |
|-----|-------------|-----------------------|-----------|------------------------------|-----------------------|--------------|--------------|--------------|------------|
| 1. | 239.52 | 42.81 | -12.34 | 30.47 | 46.00 | 15.53 | ----- | ----- | horizontal |
| 2. | 262.80 | 46.30 | -11.52 | 34.78 | 46.00 | 11.22 | ----- | ----- | horizontal |
| 3. | 336.52 | 42.10 | -8.86 | 33.24 | 46.00 | 12.76 | ----- | ----- | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

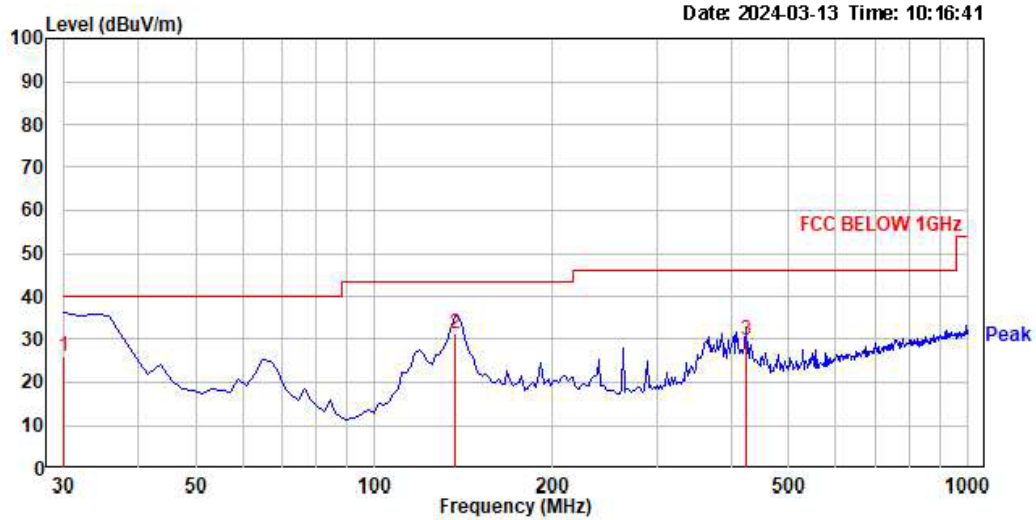


Trace:

| No. | Freq MHz | Reading dB μ V | C.F dB | Result QP dB μ V/m | Limit dB μ V/m | Margin dB | Height cm | Angle deg | Polarity |
|-----|-------------|-----------------------|-----------|------------------------------|-----------------------|--------------|--------------|--------------|----------|
| 1. | 30.00 | 40.20 | -14.31 | 25.89 | 40.00 | 14.11 | ----- | ----- | vertical |
| 2. | 136.70 | 43.90 | -12.56 | 31.34 | 43.50 | 12.16 | ----- | ----- | vertical |
| 3. | 423.82 | 37.10 | -7.19 | 29.91 | 46.00 | 16.09 | ----- | ----- | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-03-14

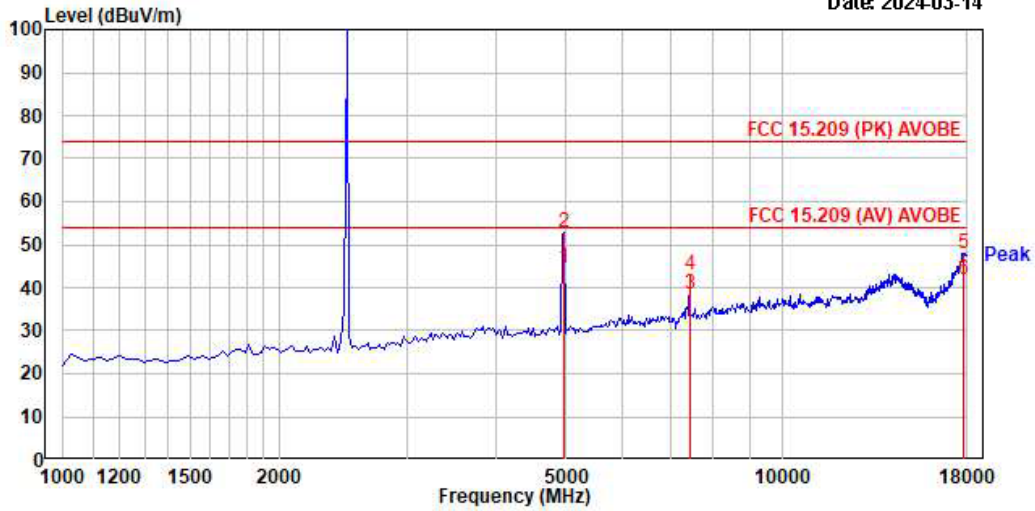

| No. | Freq MHz | RD | | C.F dB | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-----------|------------|------------|----------|----------|----------|----------|--------------|--------------|------------|
| | | PK dBμV | AV dBμV | | PK dBμV | AV dBμV | PK dB | AV dB | PK dB | AV dB | | | |
| 1. | 4966.67 | ----- | 40.20 | 4.18 | ----- | 44.38 | ----- | 54.00 | ----- | 9.62 | 100 | 148 | horizontal |
| 2. | 4966.67 | 48.60 | 40.20 | 4.18 | 52.78 | 44.38 | 74.00 | 54.00 | 21.22 | 9.62 | 100 | 148 | horizontal |
| 3. | 7430.44 | ----- | 29.40 | 9.03 | ----- | 38.43 | ----- | 54.00 | ----- | 15.57 | 100 | 283 | horizontal |
| 4. | 7430.44 | 34.16 | 29.40 | 9.03 | 43.19 | 38.43 | 74.00 | 54.00 | 30.81 | 15.57 | 100 | 283 | horizontal |
| 5. | 17802.90 | 23.39 | ----- | 24.56 | 47.95 | ----- | 74.00 | ----- | 26.05 | ----- | 100 | 360 | horizontal |
| 6. | 17802.90 | ----- | 17.51 | 24.56 | ----- | 42.07 | ----- | 54.00 | ----- | 11.93 | 100 | 360 | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-03-14

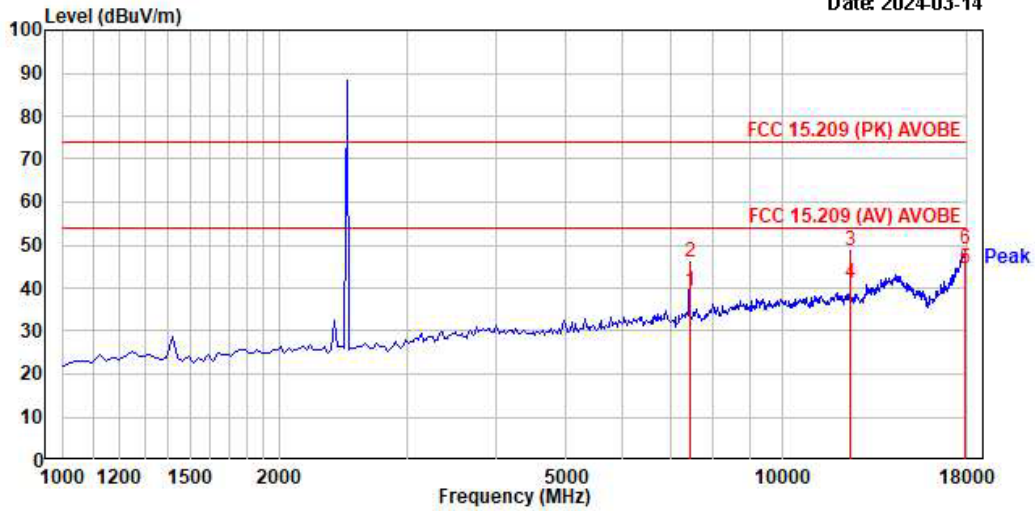

| No. | Freq MHz | RD | | C.F dB | Result | | Limit | | Margin | | Height cm | Angle deg | Polarity |
|-----|-------------|------------|------------|-----------|------------|------------|----------|----------|----------|----------|--------------|--------------|----------|
| | | PK dBμV | AV dBμV | | PK dBμV | AV dBμV | PK dB | AV dB | PK dB | AV dB | | | |
| 1. | 7430.44 | ----- | 30.30 | 9.03 | ----- | 39.33 | ----- | 54.00 | ----- | 14.67 | 100 | 229 | vertical |
| 2. | 7430.44 | 37.07 | 30.30 | 9.03 | 46.10 | 39.33 | 74.00 | 54.00 | 27.90 | 14.67 | 100 | 229 | vertical |
| 3. | 12407.25 | 34.73 | ----- | 14.07 | 48.80 | ----- | 74.00 | ----- | 25.20 | ----- | 100 | 357 | vertical |
| 4. | 12407.25 | ----- | 27.20 | 14.07 | ----- | 41.27 | ----- | 54.00 | ----- | 12.73 | 100 | 357 | vertical |
| 5. | 17950.72 | ----- | 19.40 | 24.95 | ----- | 44.35 | ----- | 54.00 | ----- | 9.65 | 100 | 360 | vertical |
| 6. | 17950.72 | 24.17 | ----- | 24.95 | 49.12 | ----- | 74.00 | ----- | 24.88 | ----- | 100 | 360 | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Date: 2024-03-21

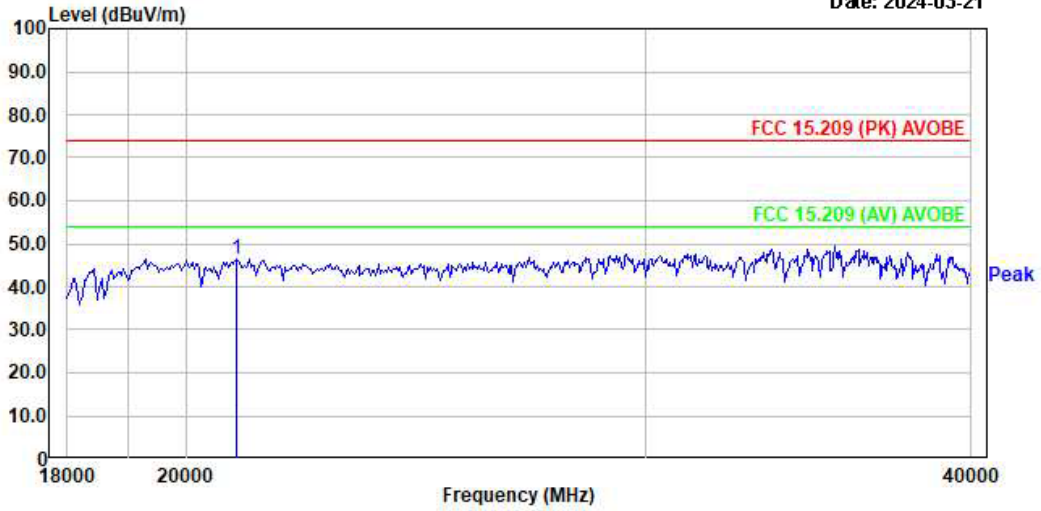

| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|------------|
| 1. | 28981.45 | 37.93 | | 8.64 | 46.57 | | 74.80 | | 27.43 | | 223 | 219 | horizontal |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Date: 2024-03-21

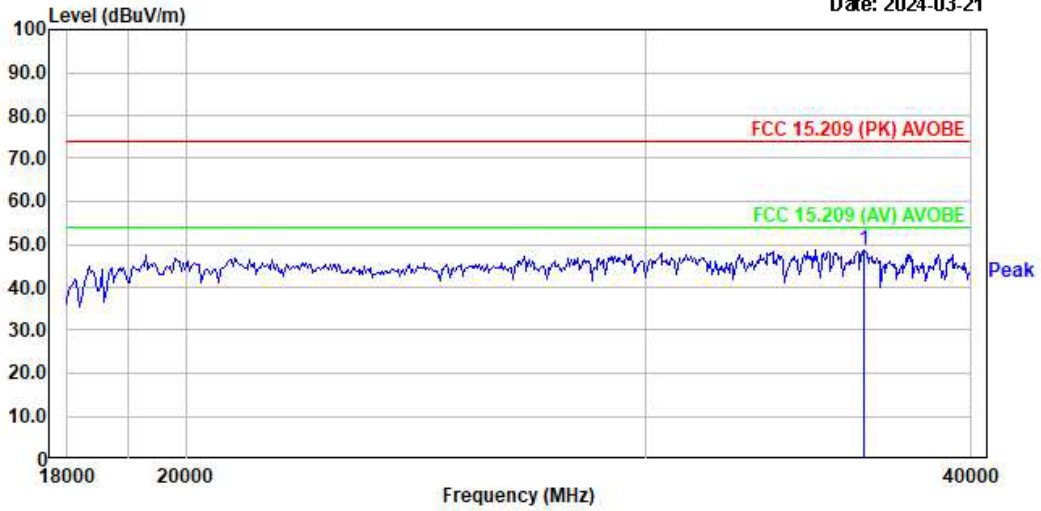

| No. | Freq MHz | RD PK dBμV | RD AV dBμV | C.F dB | Result PK dBμV | Result AV dBμV | Limit PK dBμV | Limit AV dBμV | Margin PK dB | Margin AV dB | Height cm | Angle deg | Polarity |
|-----|-------------|------------------|------------------|-----------|----------------------|----------------------|---------------------|---------------------|--------------------|--------------------|--------------|--------------|----------|
| 1. | 36428.98 | 34.85 | | 13.79 | 48.64 | | 74.80 | | 25.36 | | 310 | 318 | vertical |

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Measurement Data: N/A

Class B

| Frequency Range | quasi-peak | Average |
|-----------------|------------|------------|
| 0.15 ~ 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

* Decreases with the logarithm of the frequency

APPENDIX
TEST EQUIPMENT USED FOR TESTS

| ○ | Use | Description | Model No. | Serial No. | Manufacturer | Interval | Next Cal. Date |
|----|-----|--------------------------------------|------------------|-------------|------------------------|----------|----------------|
| 1 | ■ | Signal Analyzer (9 kHz ~ 30 GHz) | FSV30 | 100757 | R&S | 1 year | 2024-08-30 |
| 2 | ■ | Signal Generator (~3.2 GHz) | 8648C | 3623A02597 | HP | 1 year | 2025-03-08 |
| 3 | | SYNTHESIZED CW GENERATOR | 83711B | US34490456 | HP | 1 year | 2025-03-08 |
| 4 | | Attenuator (3 dB) | 8491A | 37822 | HP | 1 year | 2024-08-30 |
| 5 | | Attenuator (10 dB) | 8491A | 63196 | HP | 1 year | 2024-08-30 |
| 6 | ■ | EMI Test Receiver (~7 GHz) | ESCI7 | 100722 | R&S | 1 year | 2024-08-30 |
| 7 | | RF Amplifier (~1.3 GHz) | 8447D OPT 010 | 2944A07684 | HP | 1 year | 2024-08-30 |
| 8 | | RF Amplifier (1~26.5 GHz) | 8449B | 3008A02126 | HP | 1 year | 2025-03-08 |
| 9 | ■ | Horn Antenna (1~18 GHz) | 3115 | 00114105 | ETS | 2 year | 2025-08-30 |
| 10 | ■ | DRG Horn (Small) | 3116B | 81109 | ETS-Lindgren | 2 year | 2026-03-08 |
| 11 | ■ | DRG Horn (Small) | 3116B | 133350 | ETS-Lindgren | 2 year | 2026-03-08 |
| 12 | ■ | TRILOG Antenna | VULB 9160 | 9160-3237 | SCHWARZBECK | 2 year | 2026-03-08 |
| 13 | | Temp.Humidity Data Logger | SK-L200TH II A | 00801 | SATO | 1 year | 2025-03-08 |
| 14 | | Splitter (SMA) | ZFSC-2-2500 | SF617800326 | Mini-Circuits | - | - |
| 15 | ■ | DC Power Supply | 6674A | 3637A01657 | Agilent | - | - |
| 17 | ■ | Power Meter | EPM-441A | GB32481702 | HP | 1 year | 2025-03-08 |
| 18 | ■ | Power Sensor | 8481A | 3318A94972 | HP | 1 year | 2024-08-30 |
| 19 | | Audio Analyzer | 8903B | 3729A18901 | HP | 1 year | 2024-08-30 |
| 20 | | Modulation Analyzer | 8901B | 3749A05878 | HP | 1 year | 2024-08-30 |
| 21 | | TEMP & HUMIDITY Chamber | YJ-500 | LTAS06041 | JinYoung Tech | 1 year | 2024-08-30 |
| 22 | | Stop Watch | HS-3 | 812Q08R | CASIO | 2 year | 2026-03-14 |
| 23 | | LISN | KNW-407 | 8-1430-1 | Kyoritsu | 1 year | 2025-03-08 |
| 24 | | Two-Lime V-Network | ESH3-Z5 | 893045/017 | R&S | 1 year | 2025-03-08 |
| 25 | | UNIVERSAL RADIO COMMUNICATION TESTER | CMU200 | 106243 | R&S | 1 year | 2025-03-08 |
| 26 | | Highpass Filter | WHKX1.5/15G-10SS | 74 | Wainwright Instruments | 1 year | 2025-03-08 |
| 27 | | Highpass Filter | WHKX3.0/18G-10SS | 118 | Wainwright Instruments | 1 year | 2025-03-08 |
| 28 | | OSP120 BASE UNIT | OSP120 | 101230 | R&S | 1 year | 2025-03-08 |
| 29 | ■ | Signal Generator(100 kHz ~ 40 GHz) | SMB100A03 | 177621 | R&S | 1 year | 2025-03-08 |
| 30 | ■ | Signal Analyzer (10 Hz ~ 40 GHz) | FSV40 | 101367 | R&S | 1 year | 2025-03-08 |
| 31 | ■ | Active Loop Antenna | FMZB 1519 | 1519-031 | SCHWARZBECK | 2 year | 2026-03-08 |