



TEST REPORT

FCC PART 15.236

Report Reference No.: CTL2103261015-WF

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Happy Guo

Tested by:
(position+printed name+signature)

Gary Gao
(Test Engineer)

Gary Gao

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name : UHF Wireless Microphone

Model/Type reference : CVM-WM100

Listed Models : CVM-WM100 RX, CVM-WM100 TX

Trade Mark : COMICA

FCC ID : 2AZSQ-CVM-WM100

Applicant's name : Shenzhen Commlite Technology Co., LTD

Address of applicant : 5th Floor, Building B, NO.167 Pingxin North Road, Pinghu Street,
Long'gang District, Shenzhen, Guangdong Province, China

Test Firm : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification :

Standard : FCC Part 15.236: Operation of wireless microphones in the
bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and
614-698 MHz

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF : Dated 2011-01

Date of receipt of test item : Apr. 28, 2021

Date of sampling : Apr. 28, 2021

Date of Test Date : Apr. 28, 2021-May. 18, 2021

Data of Issue : May. 19, 2021

Result : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL2103261015-WF	May. 19, 2021 ----- Date of issue
---	---

Equipment under Test : UHF Wireless Microphone

Sample No : CTL210326101-1-S005

Model /Type : CVM-WM100

Listed Models : CVM-WM100 RX, CVM-WM100 TX

Applicant : **Shenzhen Commlite Technology Co., LTD**

Address : 5th Floor, Building B, NO.167 Pingxin North Road,
Pinghu Street, Long'gang District, Shenzhen,
Guangdong Province, China

Manufacturer : **Shenzhen Commlite Technology Co., LTD**

Address : 5th Floor, Building B, NO.167 Pingxin North Road,
Pinghu Street, Long'gang District, Shenzhen,
Guangdong Province, China

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	8
2.1. ENVIRONMENTAL CONDITIONS	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. MODIFICATIONS	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	12
3.3. MAXIMUM OUTPUT POWER	15
3.4. OCCUPIED BANDWIDTH	17
3.5. NECESSARY BANDWIDTH	19
3.6. TRANSMITTER SPURIOUS EMISSIONS	22
3.7. FREQUENCY STABILITY	26
3.8. ANTENNA REQUIREMENT	28
4. TEST SETUP PHOTOS OF THE EUT	29
5. PHOTOS OF THE EUT	30

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.236](#): Operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.236		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.236(d)	RF Power Output	PASS
FCC Part 15.236(f)	Occupied Bandwidth	PASS
FCC Part 15.236(g) ETSI EN 300 422-1 v2.1.2	Necessary Bandwidth Spurious emissions	PASS
ETSI EN 300 422-1 v2.1.2	Radiated Emissions	PASS
FCC Part 15.236(f)(3)	Frequency Stability	PASS
FCC Part 15.203	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahehexi Road, Nanshan, Shenzhen 518055 China
There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)

Radiated Emission Above 1GHz	$\pm 4.32\text{dB}$	(1)
Conducted Disturbance 0.15~30MHz	$\pm 3.20\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	UHF Wireless Microphone
Model/Type reference:	CVM-WM100
Power supply:	DC 3V 2*AA batteries
Hardware version:	1.4
Software version:	1.0.4
Modulation:	FM
Operation frequency:	520MHz~534.1MHz
Channel number:	48
Channel spacing:	300KHz
Antenna type:	1/4 Wavelength Wire Antenna
Antenna gain:	-1.0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides software tools to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 10 channels provided to the EUT and Channel 00/24/47 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	520.00
01	520.30
⋮	⋮
23	526.90
24	527.20
25	527.50
⋮	⋮
46	533.80
47	534.10

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2020/06/20	2021/06/19
LISN	R&S	ESH2-Z5	860014/010	2020/06/20	2021/06/19
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2020/06/20	2021/06/19
EMI Test Receiver	R&S	ESCI	103710	2020/06/20	2021/06/19
Spectrum Analyzer	Agilent	E4407B	MY41440676	2020/06/20	2021/06/19
Spectrum Analyzer	Agilent	N9020	US46220290	2020/06/20	2021/06/19
Controller	EM Electronics	Controller EM 1000	N/A	2020/06/20	2021/06/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2020/06/20	2021/06/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2020/06/20	2021/06/19
Amplifier	Agilent	8349B	3008A02306	2020/06/20	2021/06/19
Amplifier	Agilent	8447D	2944A10176	2020/06/20	2021/06/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2020/06/20	2021/06/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2020/06/20	2021/06/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2020/06/20	2021/06/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2020/06/20	2021/06/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2020/06/20	2021/06/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2020/06/20	2021/06/19
RF Cable	Megalon	RF-A303	N/A	2020/06/20	2021/06/19
Power Meter	Anritsu	ML2487B	110553	2020/06/20	2021/06/19
Power Sensor	Anritsu	MA2411B	100345	2020/06/20	2021/06/19

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.236 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Battery Powered Products Do Not Require This Test.


3.2. Radiated Emissions

Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW


TEST CONFIGURATION

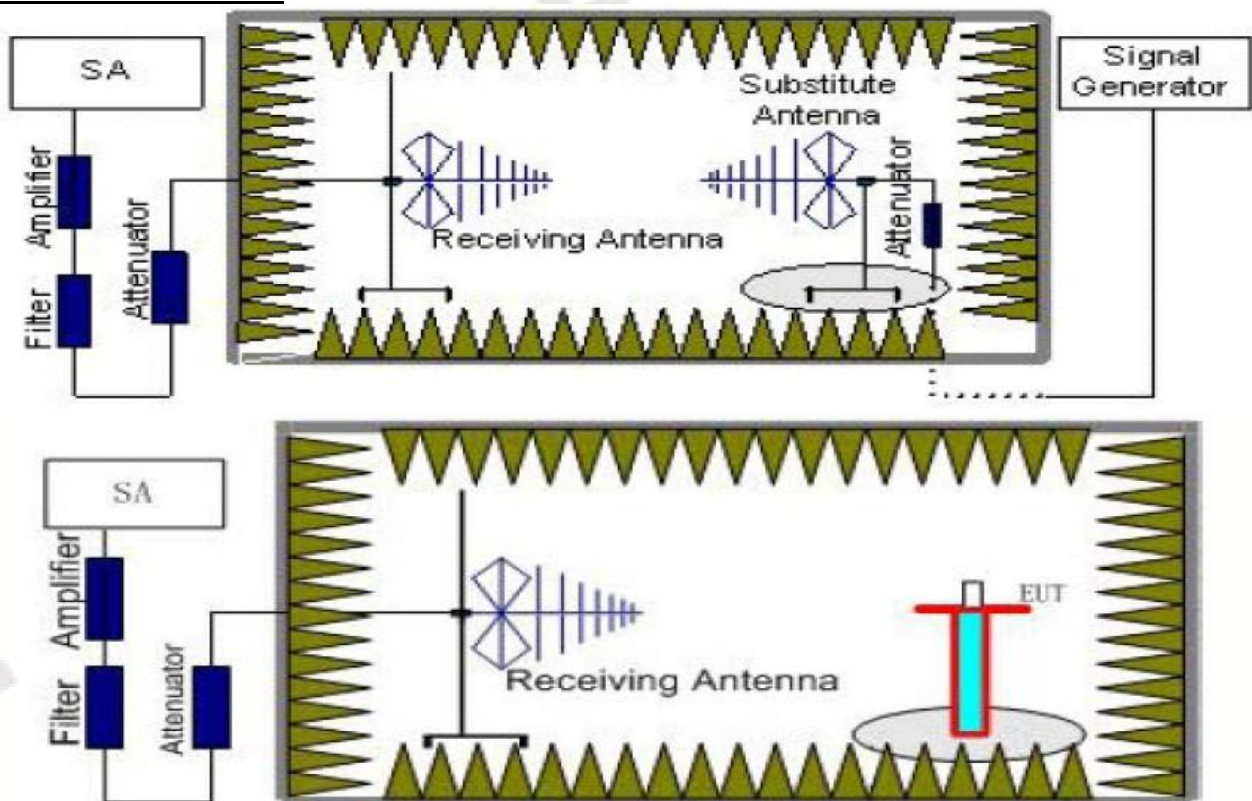


TEST PROCEDURE

1. Please refer to ETSI EN 300 422-1 V2.1.2 (2017-01) clause 6.1 for the test conditions.
2. Please refer to ETSI EN 300 422-1 V2.1.2 (2017-01) clause 8.4.2 for the measurement method.
3. This test uses a filter, the filter range is 0~600MHz \geq 45dB, 650~1000MHz \leq 2.0dB

TEST RESULTS

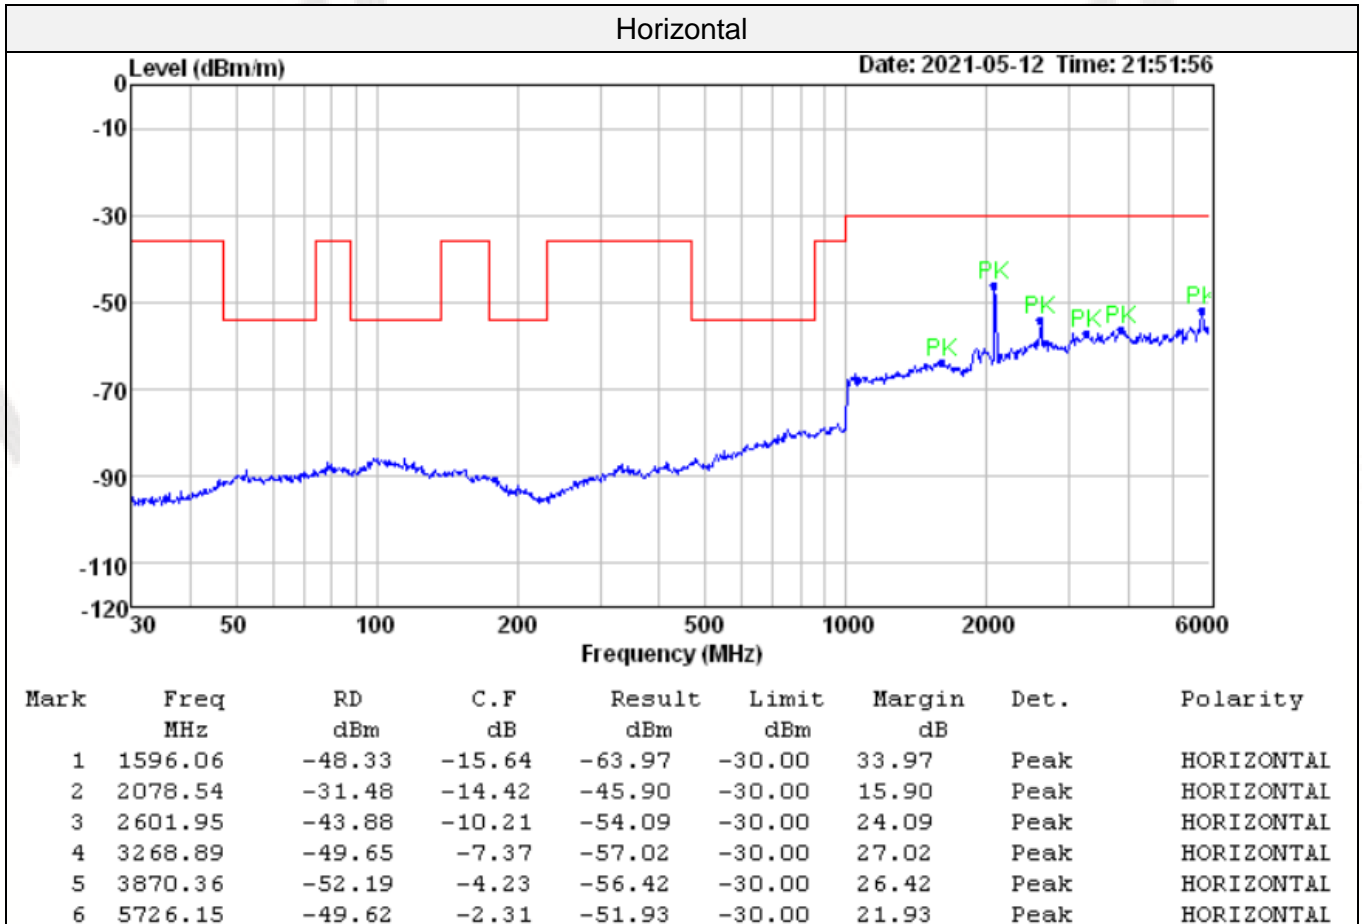

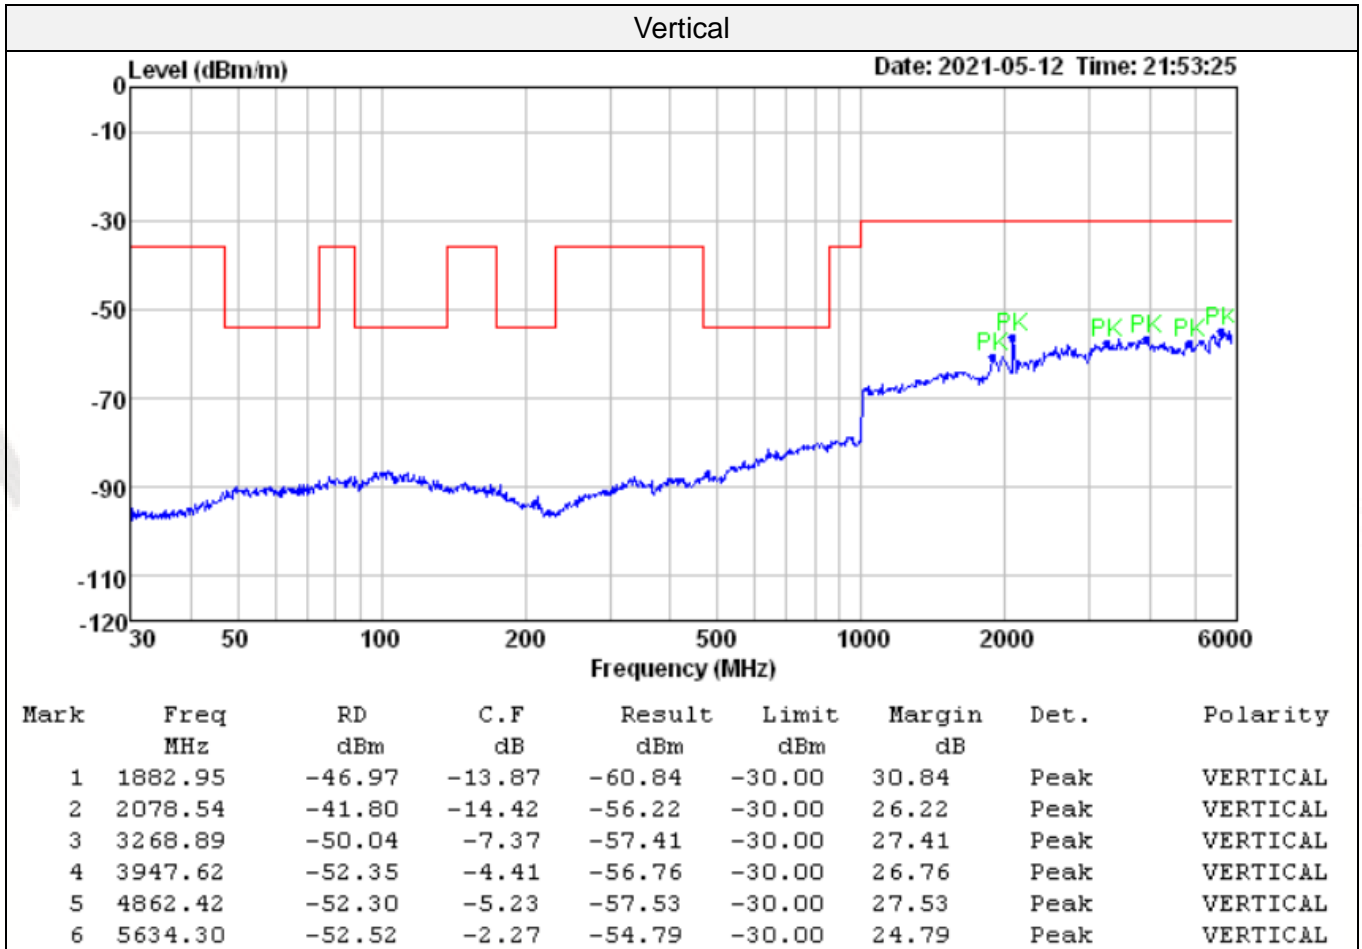

3.3. Maximum Output Power

Limit


The maximum radiated power shall not exceed the following values:

- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration




Test Results


Type	Channel	Output power (dBm)	Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Result
FM	CH00	6.212	-1.0	5.212	17	Pass
	CH24	6.349	-1.0	5.349	17	Pass
	CH47	6.534	-1.0	5.534	17	Pass

Note: 1.The test results including the cable lose.


Test plot as follows:

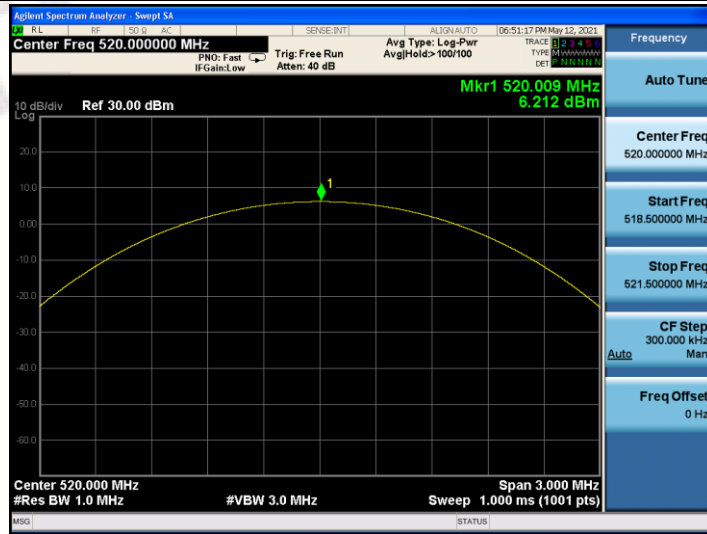

CH00

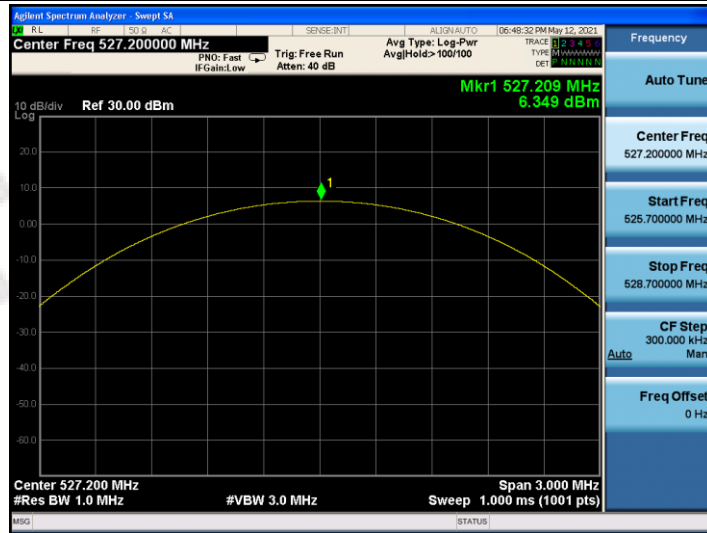

CH24

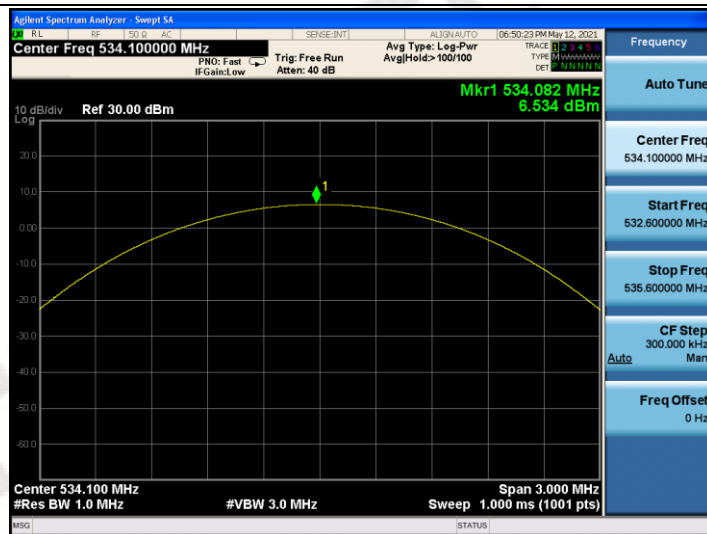

CH47

3.4. Occupied Bandwidth

Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3 KHz RBW and 30 KHz VBW.


Test Configuration




Test Results

Modulation	Channel	99% OBW (KHz)	Limit (KHz)	Result
FM	CH00	61.133	200	Pass
	CH24	62.543	200	
	CH47	62.507	200	


Test plot as follows:

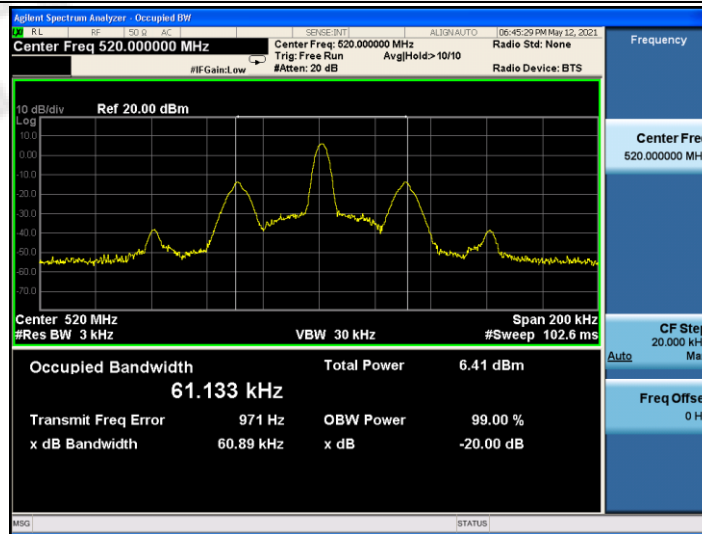

CH00

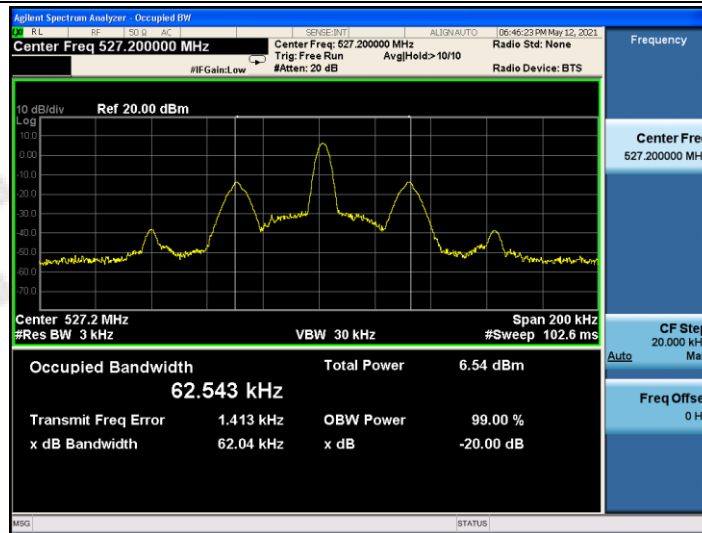

CH24

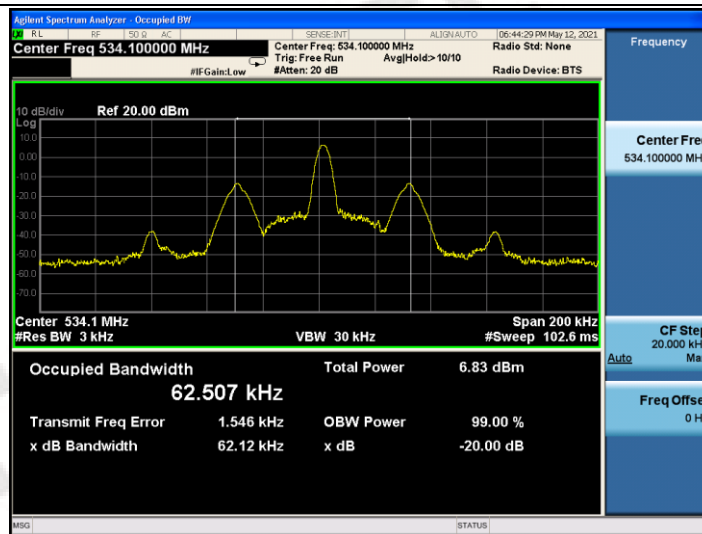

CH47

3.5. Necessary Bandwidth

LIMIT

Analog emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3.1.2 of the European Telecommunications Institute Standard ETSI EN 300 422-1 v1.4.2


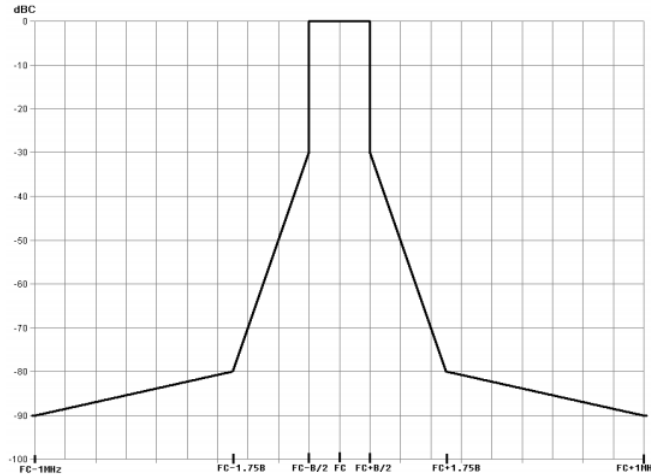


Figure 4: Spectrum mask for digital systems below 1 GHz

TEST CONFIGURATION

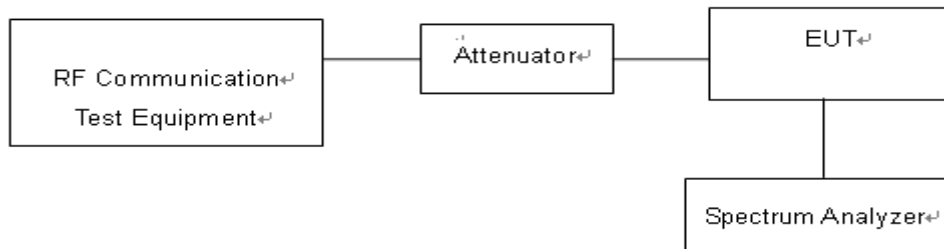


TEST PROCEDURE


1. With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be Adjusted to 8 dB below the limiting threshold (-8dB limit) as declared by the manufacturer.
2. The corresponding audio output level from the demodulator shall be measured and recorded.
3. The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB changes in input level when the meter is switched between input and output.
4. The audio input level shall be increased by 20 dB, i.e. to 12 dB (lim), and the corresponding change in output level shall be measured.
5. It shall be checked that the audio output level has increased by ≤ 10 dB.
6. If the step 5 is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8dB (lim).
7. Measure the input level at the transmitter required to give +12 dB (lim) and record the EUT output level test plots by the spectrum analyzer.
8. The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:

Centre frequency	Transmitter (Tx) nominal frequency
Span	fc - 1 MHz to fc + 1 MHz
Resolution BandWidth (RBW)	1 kHz
Video BandWidth(VBW)	1 kHz
Detector	Peak hold


TEST RESULTS

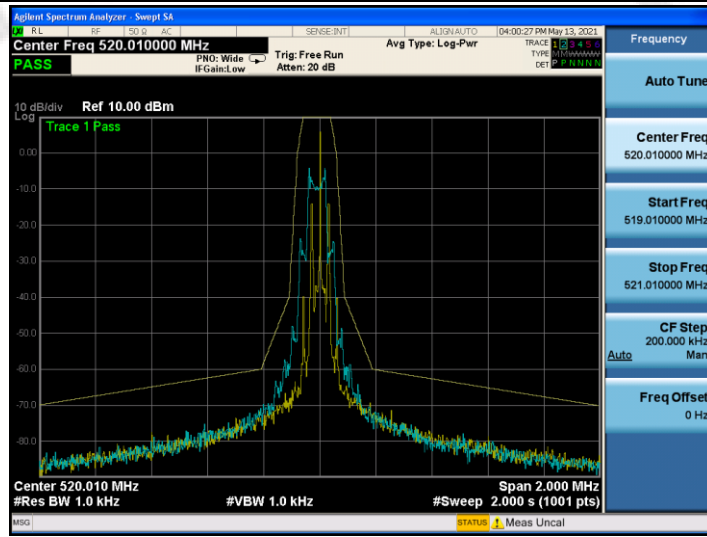

CH00

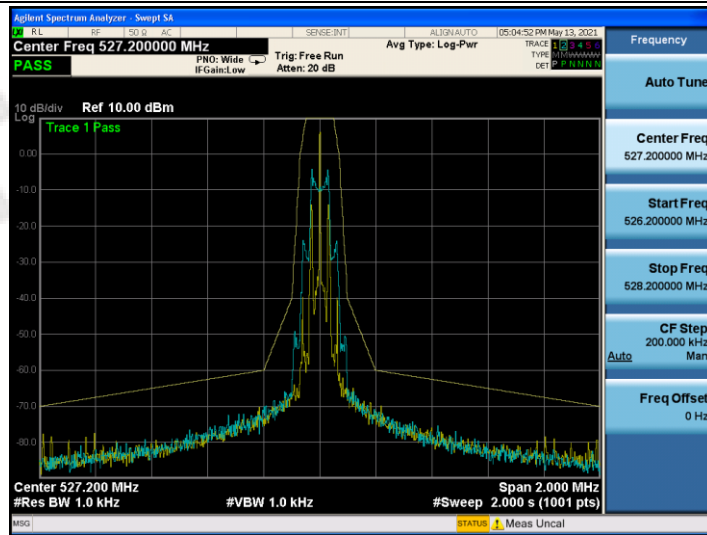

CH24

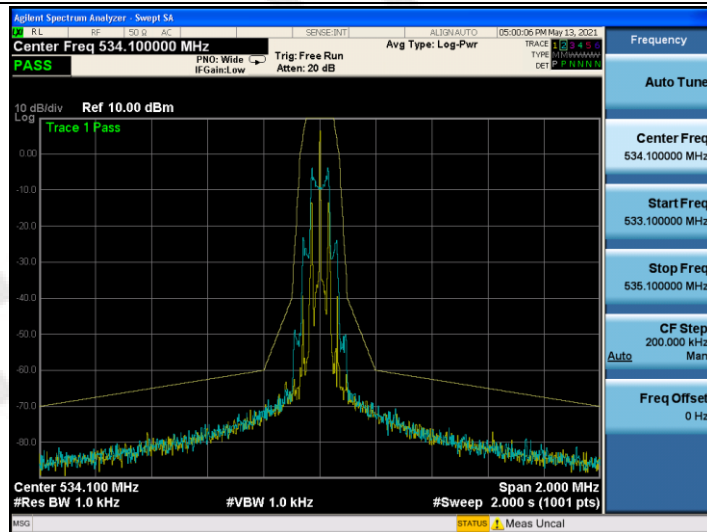

CH47

3.6. Transmitter spurious emissions

Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:


State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

Test Configuration



Effective Radiated Power measurement (30 MHz to 12.75 GHz)


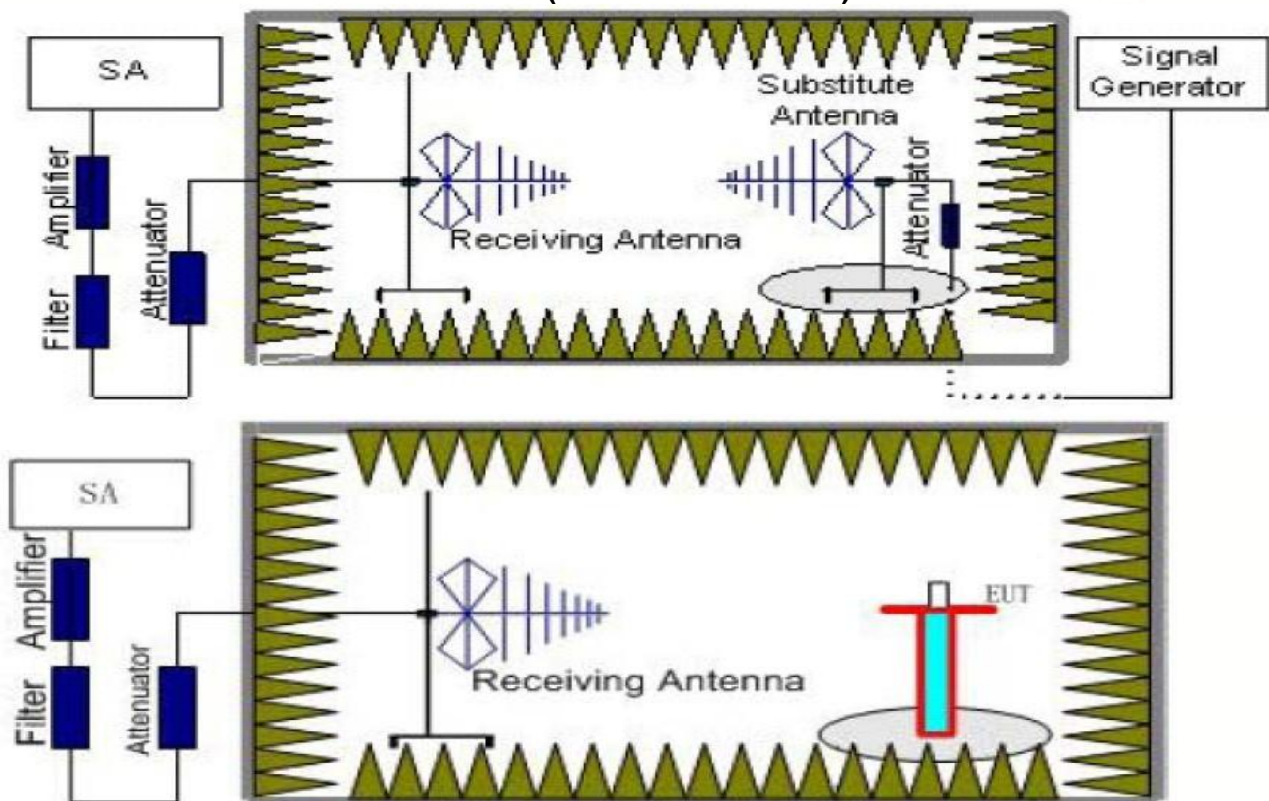




TEST PROCEDURE

1. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 6.1 for the test conditions.
2. Please refer to ETSI EN 300 422-1 V1.4.2 (2011-08) clause 8.4.2 for the measurement method.
3. This test uses a filter, the filter range is 0~600MHz \geq 45dB, 650~1000MHz \leq 2.0dB

Test Results

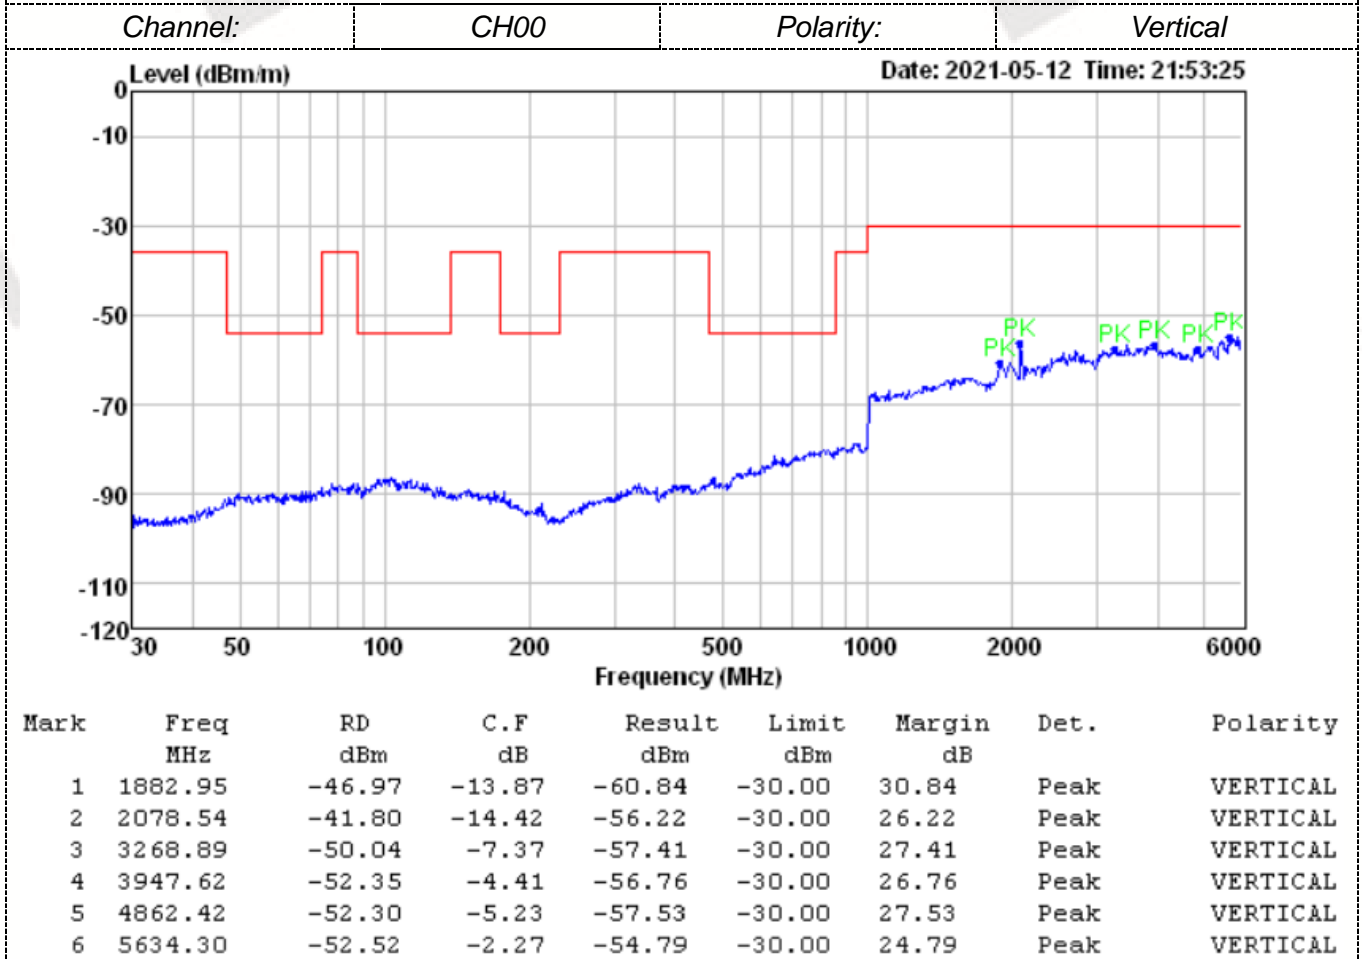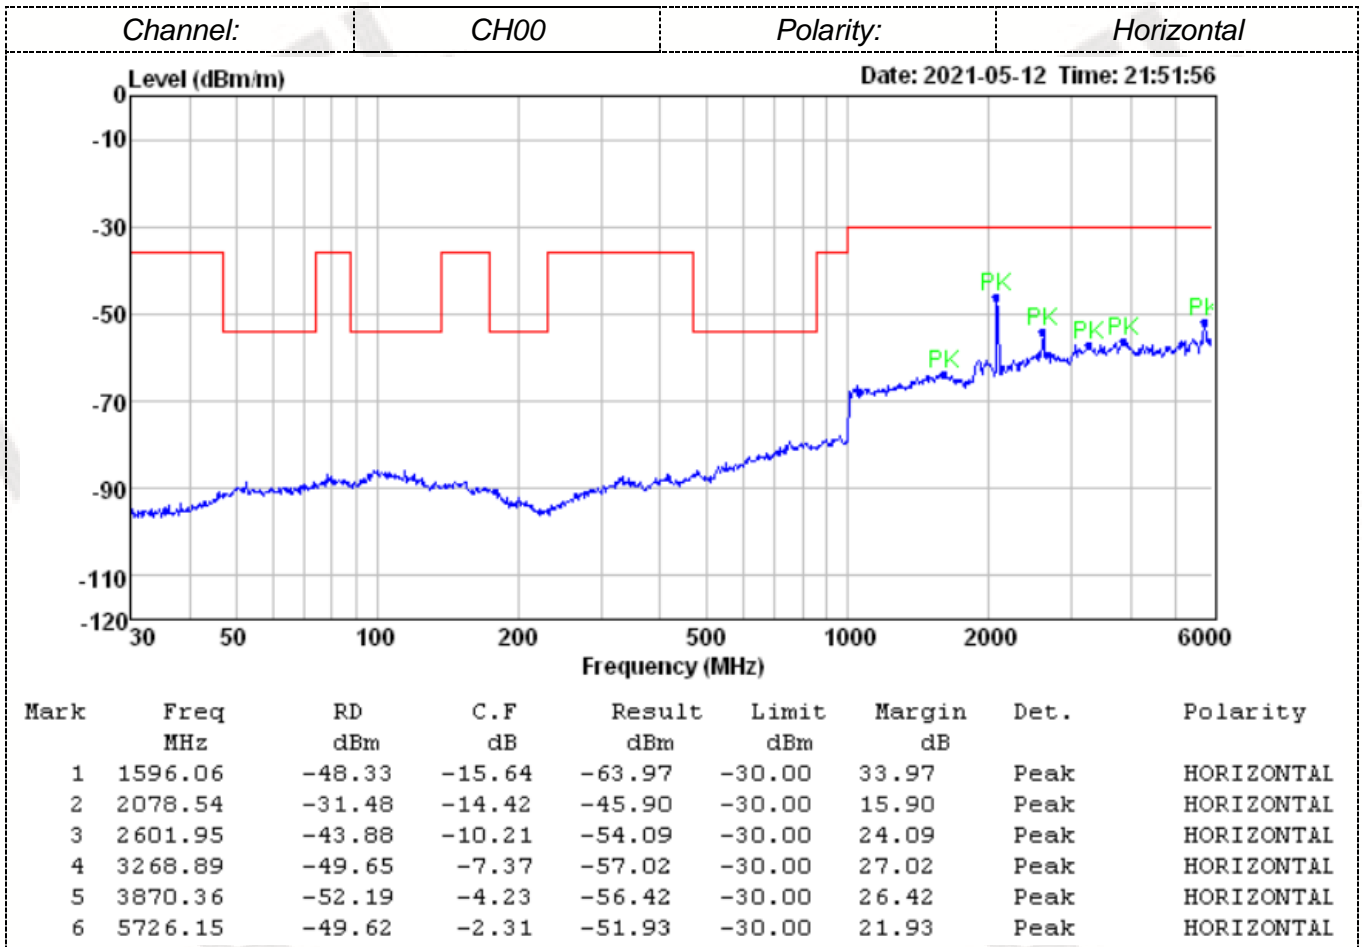

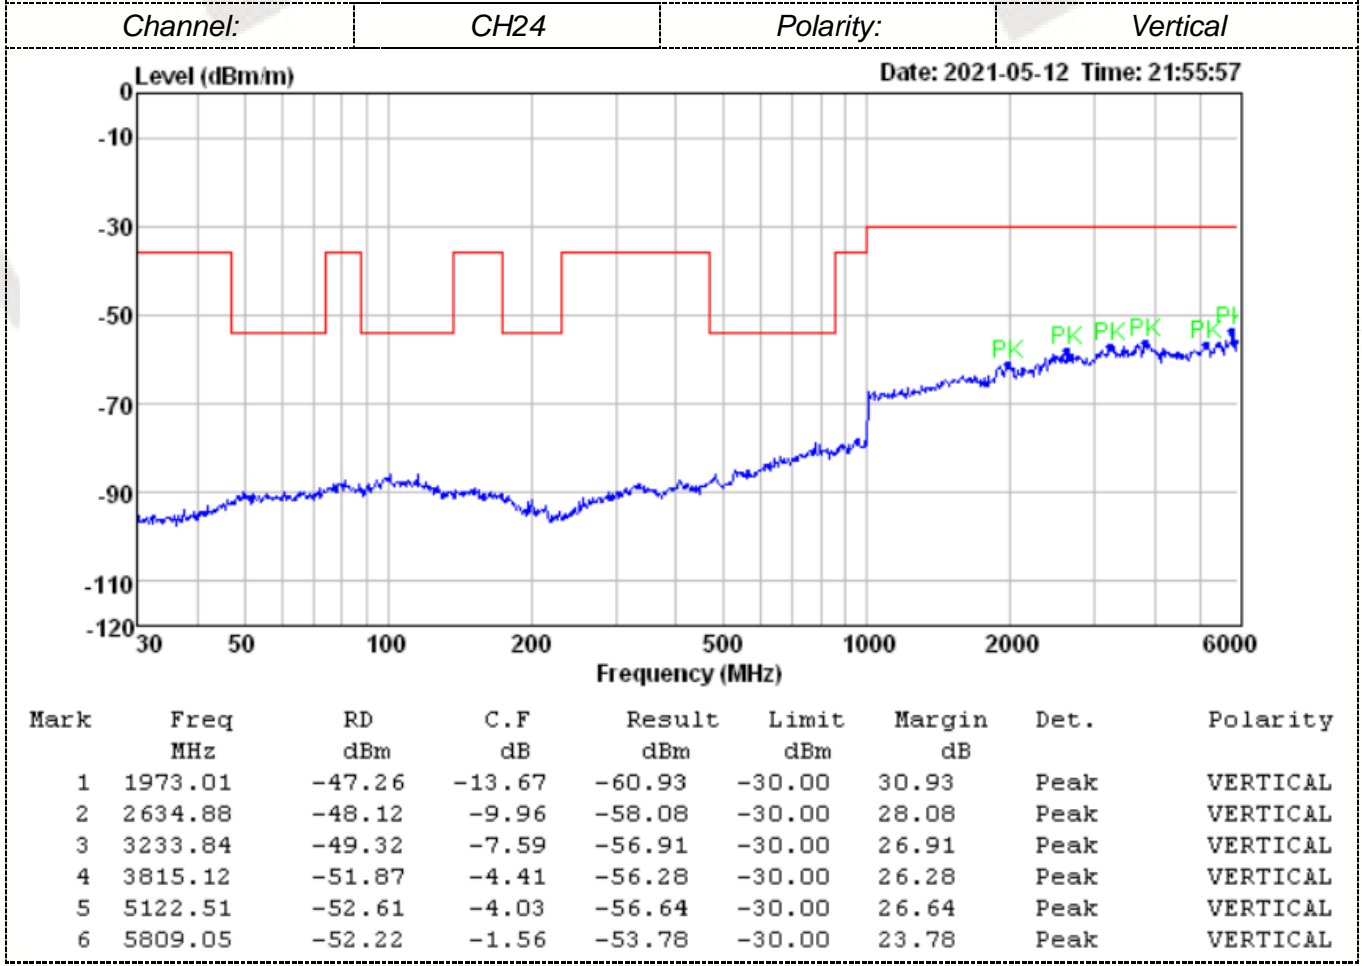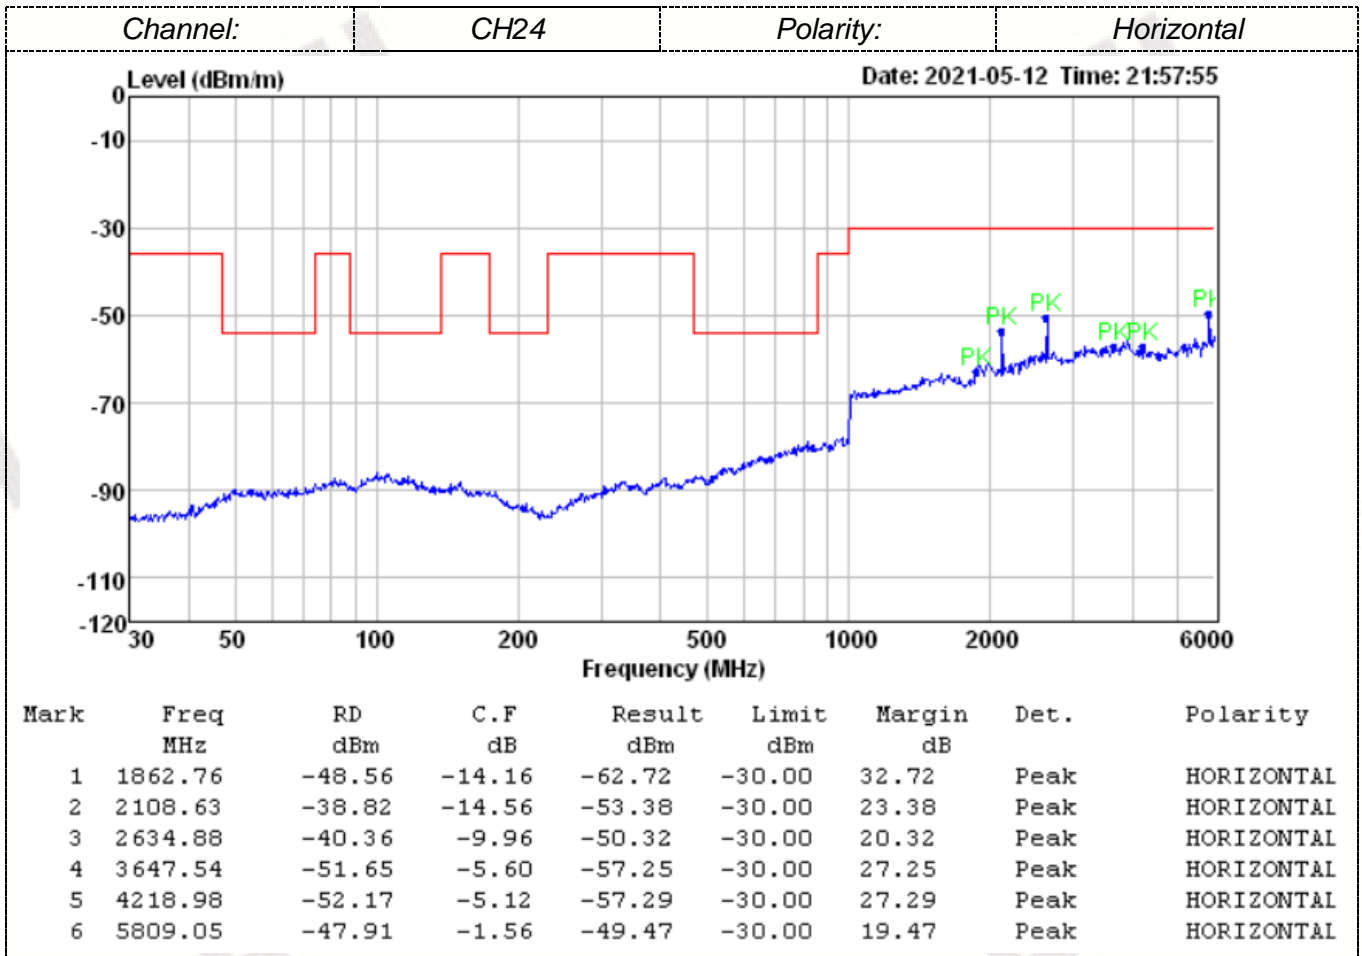

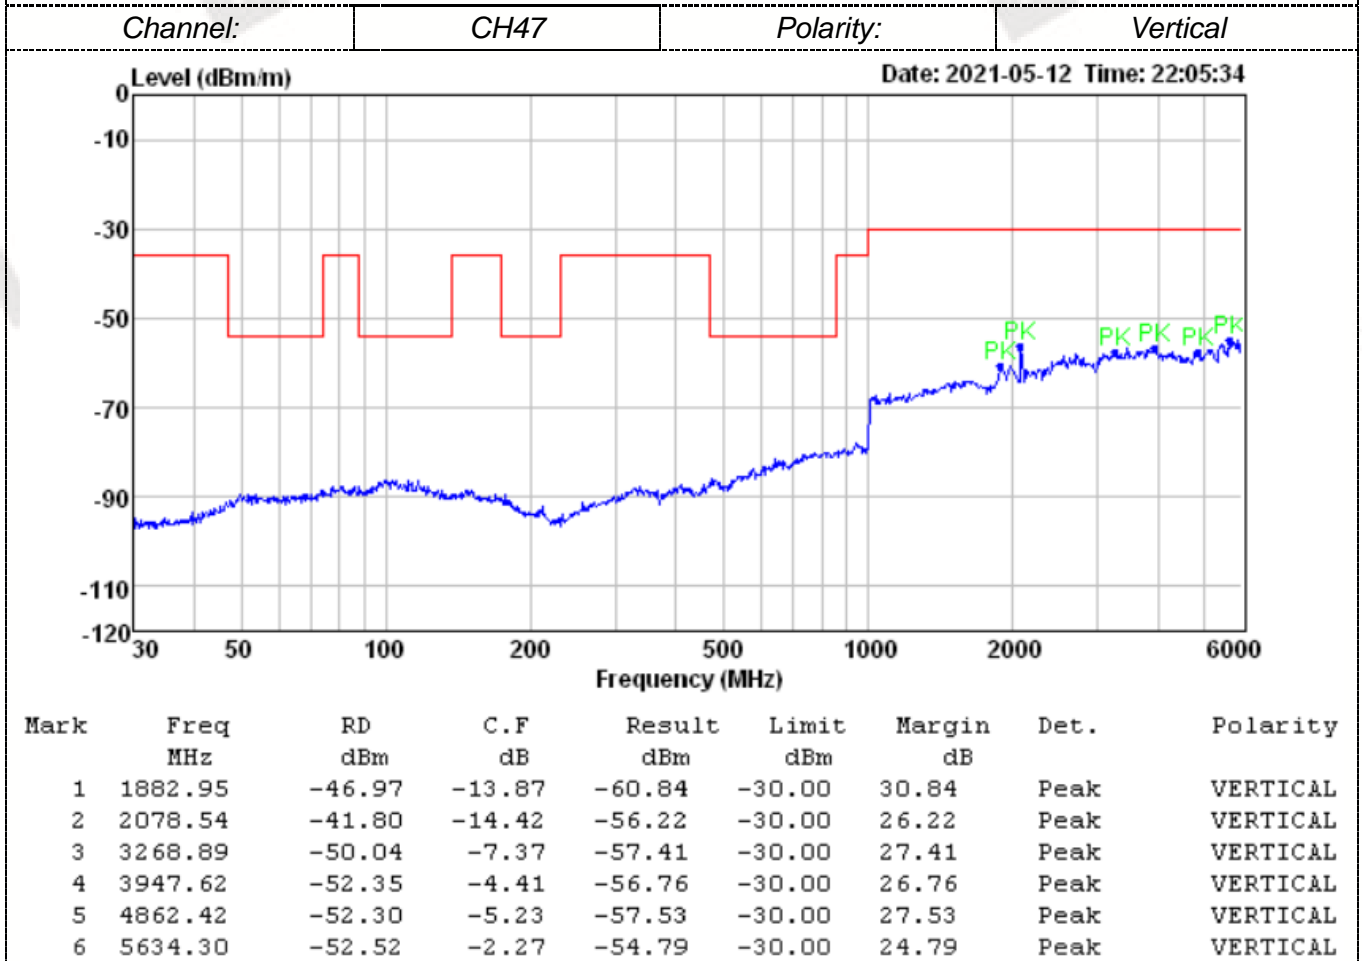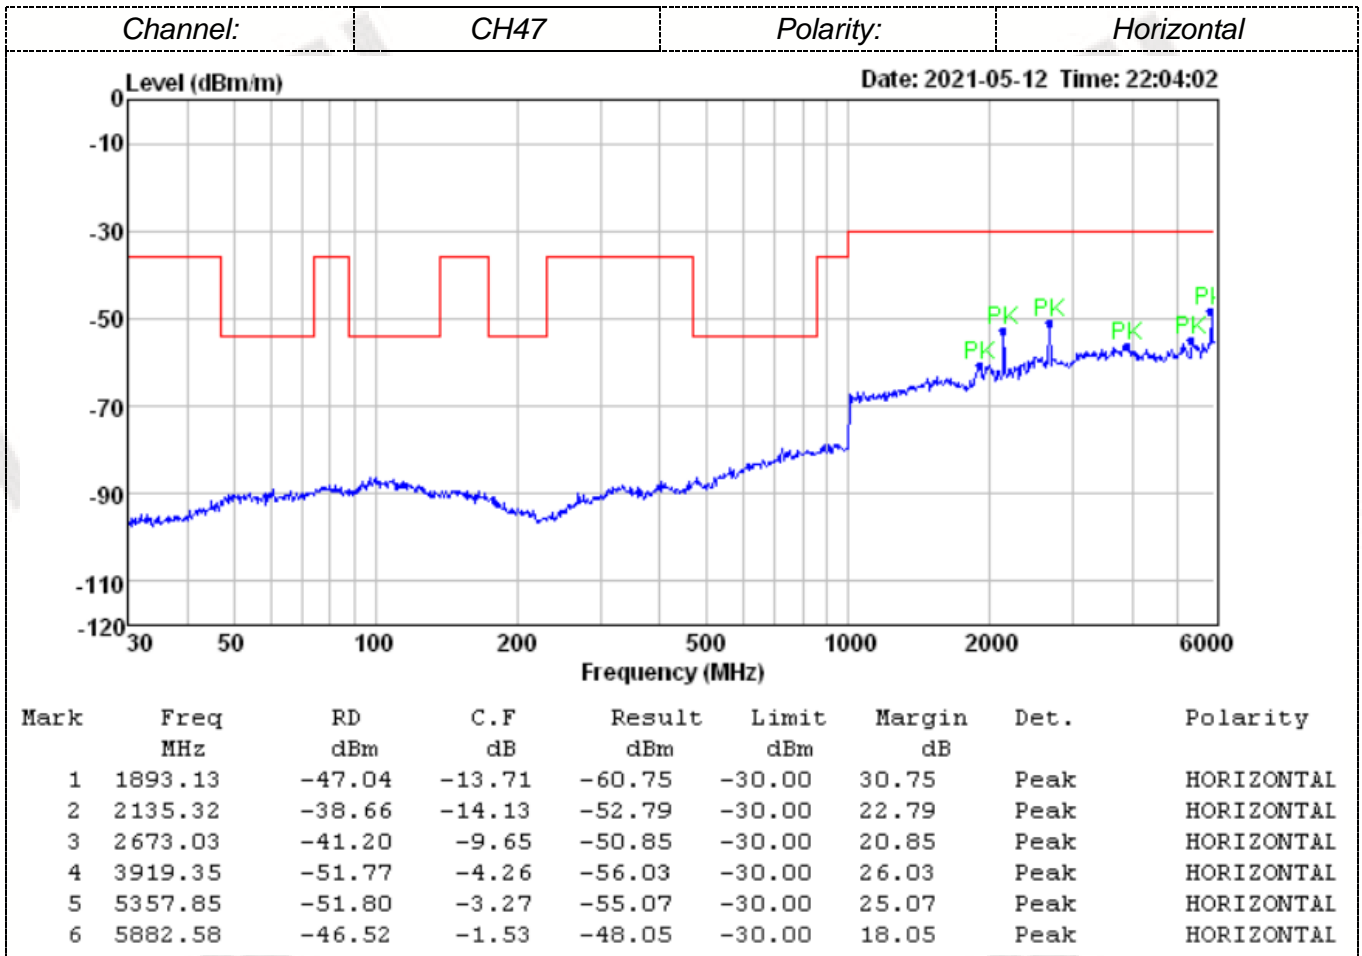

3.7. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

Test Procedure


a) Frequency stability versus environmental temperature

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used.
2. Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -20°C is measured, record all measurement frequencies.

b) Frequency stability versus input voltage

1. Setup as Test Configuration for frequencies measured at ambient temperature if it is within 15°C to 25°C . Otherwise, an environmental chamber set for a temperature of 20°C shall be used. Install new batteries in the EUT.
2. Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.

Test Configuration

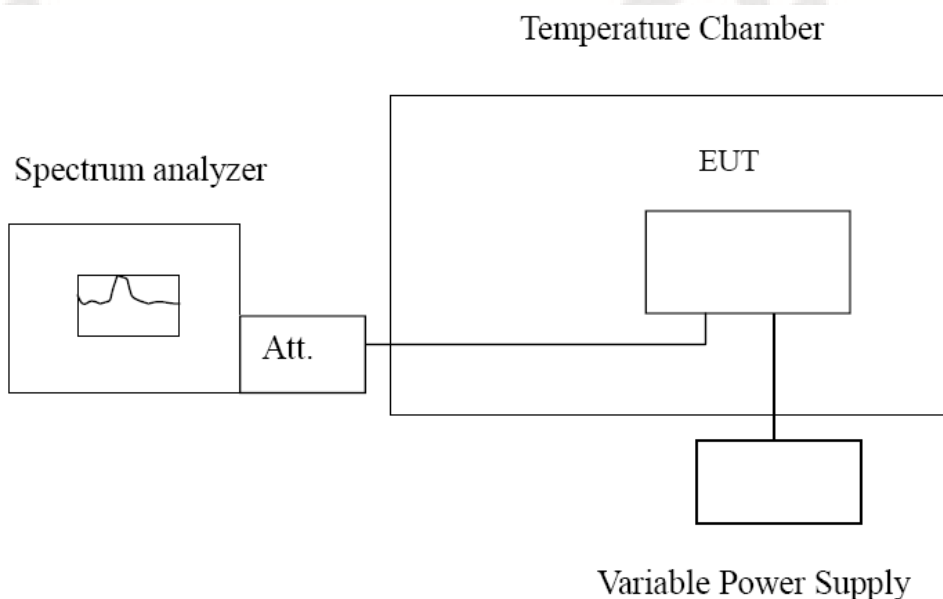

Test Results

Reference Frequency: 520.00MHz					
Voltage (V)	Temperature (°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.00	-20	0.01846	0.00355%	±0.005	PASS
	-10	0.01857	0.00357%		
	0	0.01615	0.00312%		
	10	0.01780	0.00342%		
	20	0.01833	0.00353%		
	30	0.01758	0.00338%		
	40	0.01711	0.00329%		
	50	0.01816	0.00349%		
3.45	25	0.01890	0.00363%		
2.55	25	0.01862	0.00358%		

3.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of antenna was -1.0dBi.



4. Test Setup Photos of the EUT




5. Photos of the EUT

External Photos of the EUT








Antenna

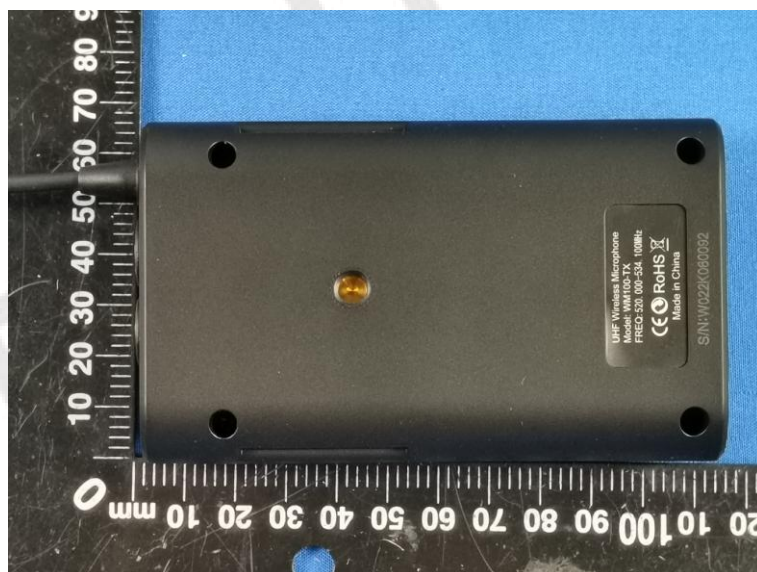



Internal Photos of the EUT

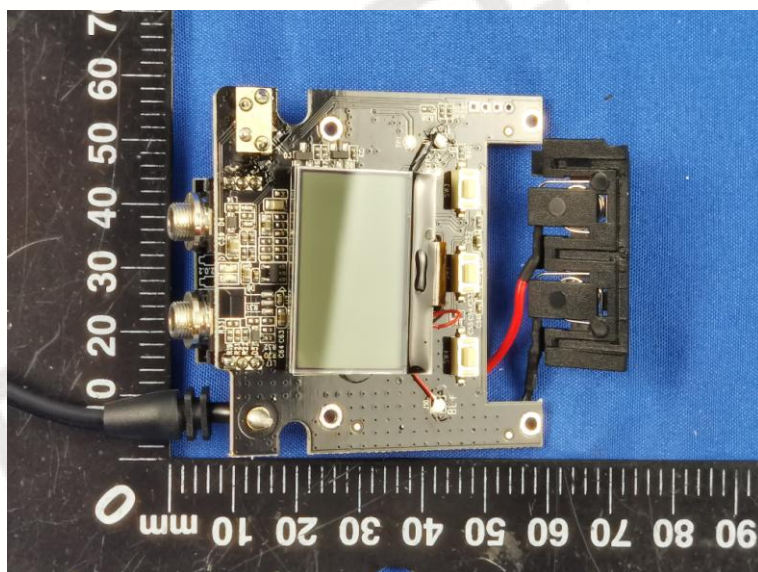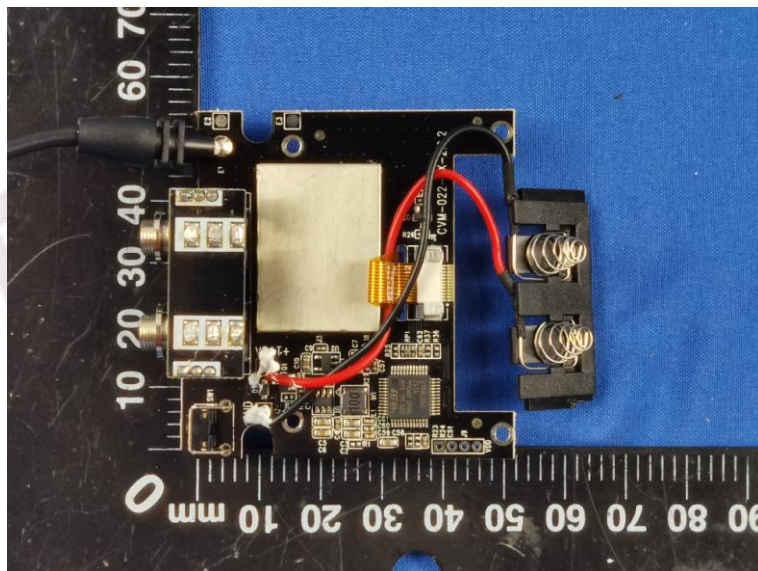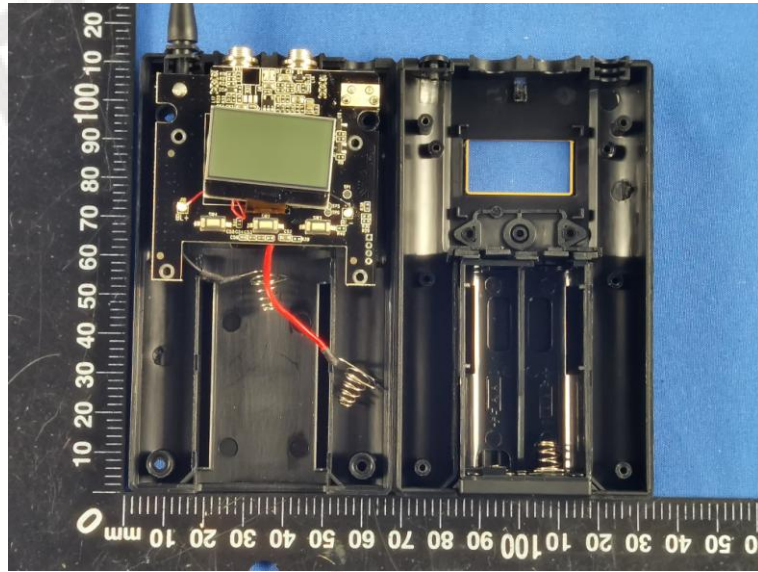

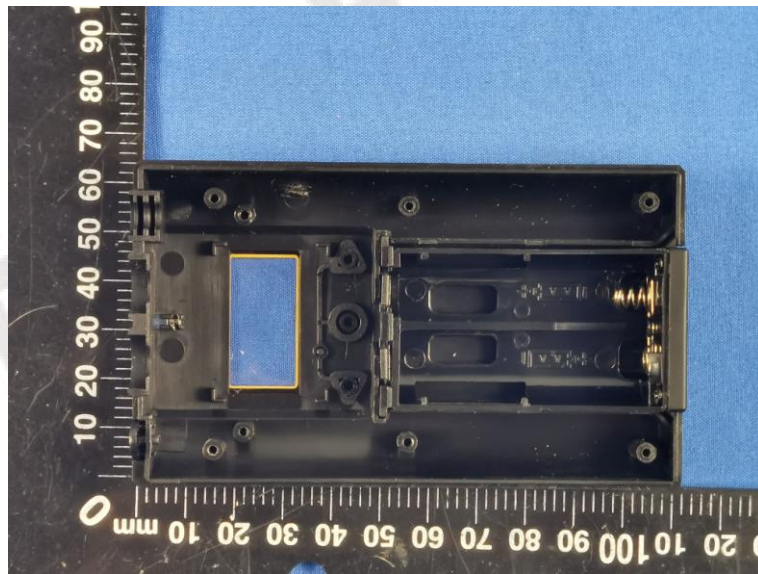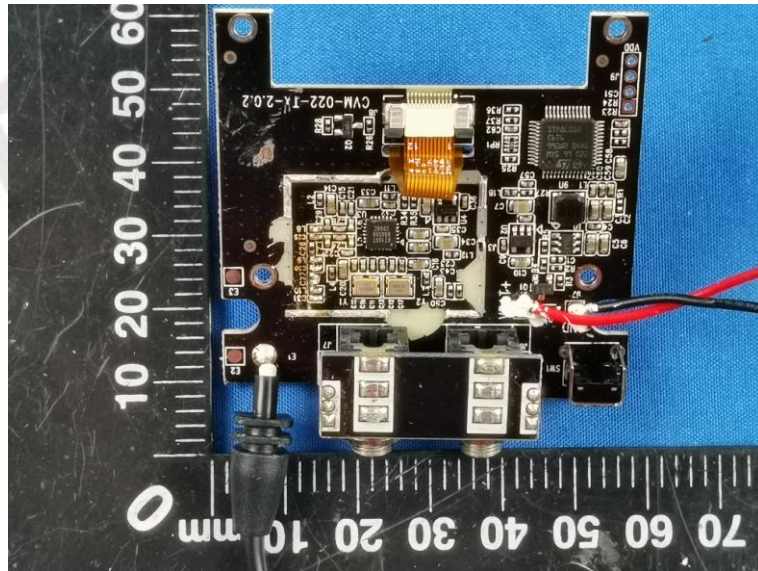

***** End of Report *****