REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

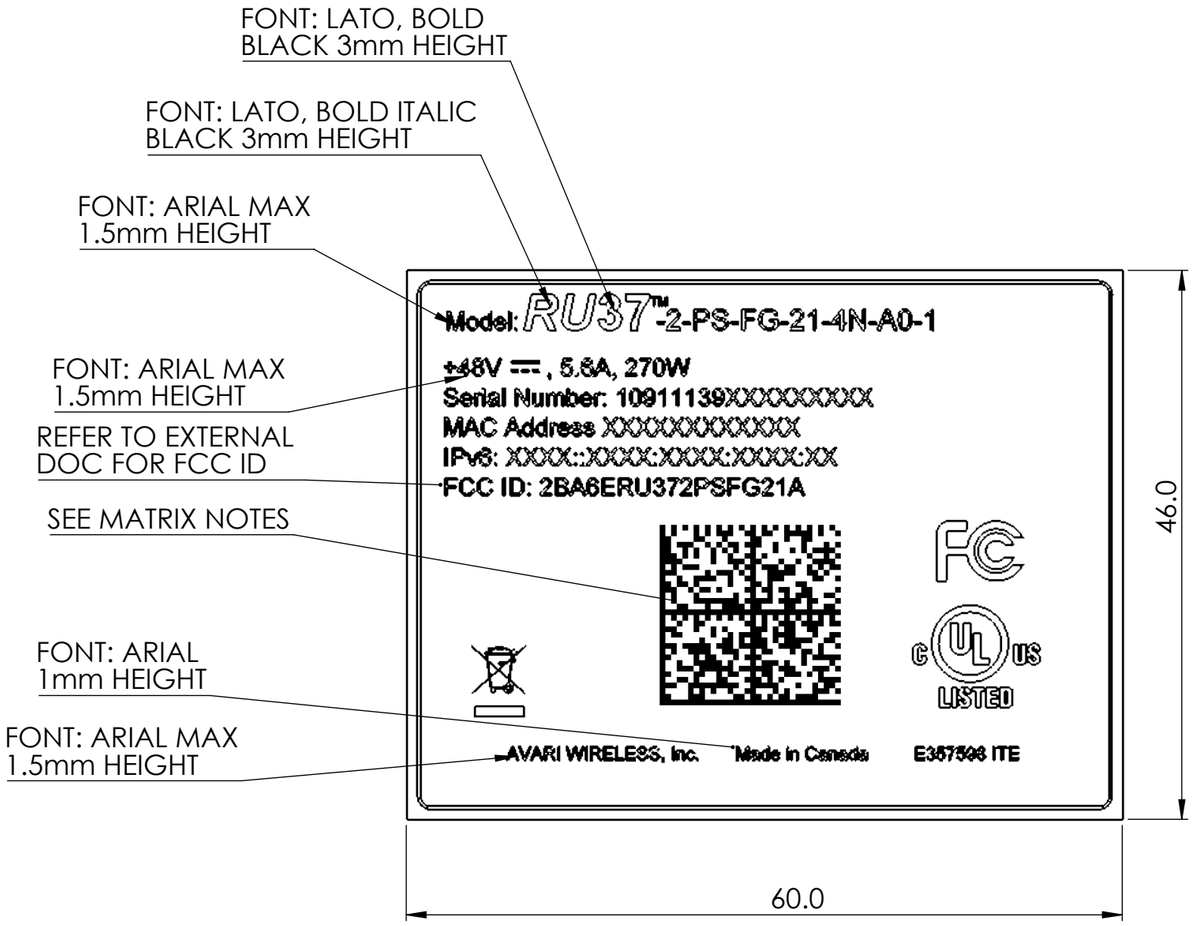

NOTES:

1. FOR MORE INFORMATION REGARDING TEXT PLACEMENT, A .dwg FILE IS AVAILABLE UPON REQUEST.
2. MATERIAL: FASSON MIL POLYESTER TC/S730 FILM(0.05MM THICK) WITH S730 ADHESIVE. TOTAL LABEL (TTMS 2" x 1.5") OR APPROVED MATERIAL BY AVARI.
3. BLACK TEXT FONT
4. SEE REFERENCED DOCUMENTS FOR PRINTER/INK USED DURING PROCESS

DATA MATRIX NOTES:

5. THE 10 LEVEL DATA MATRIX CONTAINS 3 CHARACTER STRINGS SEPARATED BY SEMI-COLONS

EX. RU33-1-PS-H-10-1N-D0-002;10911103RA1B7A001;0000::0000:0000:0000:0000

6. FIRST CHARACTER STRING DENOTES MODEL NUMBER FOR THE RU37 REFER TO ADDITIONAL DOCUMENTS FOR MODEL NUMBER CONFIGURATION. MODEL NUMBER IS ALSO PRINTED AT NOTED LOCATION

7. SEDCOND CHARACTER STRING (10 LEVEL)
   - CHARACTER 1-8: DENOTES THE PRODUCT PART NUMBER IN THE 10 LEVEL
   - CHARACTER 9-11: DENOTES REVISION NUMBER (EXX=ENG XX, RXX=REV XX)
   - CHARACTER 12: DENOTES THE LOCATION OF PRODUCTION
   - CHARACTER 13: YEAR = COUNTER STARTING FROM 2010 IN HEX. eg. 2016 = 6
   - CHARACTER 14: MONTH = CURRENT MONTH IN HEX Ex. OCTOBER = A
   - CHARACTER 15-17: 3 DIGIT HEX COUNTER eg. 1st UNIT =001, 10TH UNIT = 00A

Example: 10911103RA1B7A001

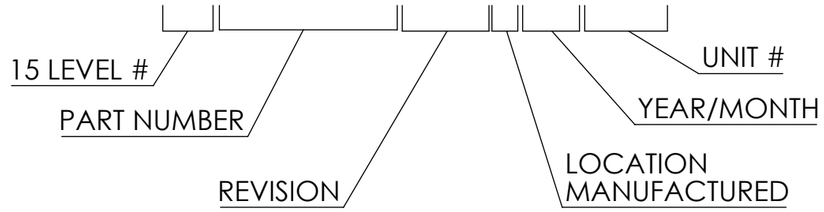

8. THIRD CHARACTER STRING IS THE IPv6 ADDRESS. THIS IS ALSO PRINTED ON THE LABEL

THE INFORMATION CONTAINED HEREIN IS TO BE USED SOLELY FOR THE PURPOSE FOR WHICH IT IS SUPPLIED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS - TOLERANCES:
X. = ± 0.50
X.X = ± 0.25
X.XX = ± 0.10
∠ = ± 0.5

SURFACE FINISH = 1.6 µm

DEBURR & BREAK SHARP CORNERS

MATL: -

FINISH: -

DIMENSIONS & TOLERANCING ARE TO BE INTERPRETED PER ASME Y14.5M-2009 AND APPLY TO FINISHED PART

DRAWN BY	Padmini Kutturu	DATE	2023-07-14
CHECKED		DATE	-
MFG		DATE	-
SUPPLY CHAIN		DATE	-
Q.A.		DATE	

PROJECTION

DO NOT SCALE DRAWING

Avari Wireless, Inc.

TITLE: Label,Model,RU37,Type 2_10-9111-39

SIZE	DWG No.	REV
B	440-00199	Eng 01

SCALE: 2:1 SHEET: 1 OF 1