



REPORT No.: SZ24070300W01

TEST REPORT

APPLICANT : Linkplay Technology Inc.
PRODUCT NAME : WiiM CI MOD A80 Stereo Streaming Amplifier
MODEL NAME : AMP011
BRAND NAME : WiiM
FCC ID : 2BABF-AMP011
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2024-07-31
TEST DATE : 2024-09-05 to 2024-09-12
ISSUE DATE : 2024-09-23



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

- 1. Summary of Test Result3
- 1.1. Testing Applied Standards4
- 1.2. Test Equipment List5
- 1.3. Measurement Uncertainty7
- 1.4. Testing Laboratory7
- 2. General Description8
- 2.1. Information of Applicant and Manufacturer8
- 2.2. Information of EUT8
- 2.3. Channel List of EUT9
- 2.4. Test Configuration of EUT 10
- 2.5. Test Conditions 10
- 2.6. Test Setup Layout Diagram 10
- 3. Test Results 13
- 3.1. Conducted Emission 13
- 3.2. Restricted Frequency Bands 14
- 3.3. Radiated Emission 15
- Annex A Test Data and Result 17

Change History		
Version	Date	Reason for change
1.0	2024-09-23	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	N/A _{Note1}	N/A
2	N/A	Duty Cycle of Test Signal	N/A	N/A	N/A _{Note1}	N/A
3	15.247(b)	Maximum Peak Conducted Output Power	N/A	N/A	N/A _{Note1}	N/A
4	15.247(b)	Maximum Average Conducted Output Power	N/A	N/A	N/A _{Note1}	N/A
5	15.247(a)	Bandwidth	N/A	N/A	N/A _{Note1}	N/A
6	15.247(d)	Conducted Spurious Emission and Band Edge	N/A	N/A	N/A _{Note1}	N/A
7	15.247(e)	Power Spectral Density	N/A	N/A	N/A _{Note1}	N/A
8	15.207	Conducted Emission	Aug. 16, 2024	Fan Shengquan	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Sep. 09, 2024	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Sep. 09, 2024	Gao Jianrou	PASS	No deviation

Note 1: The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ24040154W01), which issued on Jul. 26, 2024.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the



judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F- B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2024.07.03	2025.07.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2024.07.03	2025.07.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Linkplay Technology Inc.
Applicant Address	8000 Jarvis Avenue Suite #130, Newark, CA 94560
Manufacturer	Linkplay Technology Inc.
Manufacturer Address	8000 Jarvis Avenue Suite #130, Newark, CA 94560

2.2. Information of EUT

Product Name:	WiiM CI MOD A80 Stereo Streaming Amplifier
Sample No.:	1#
Hardware Version:	A98D V02+Main Board V03
Software Version:	Linkplay.5.2.623957
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.3
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PIFA Antenna
Antenna Gain:	ANT1: 3.46dBi; ANT2: 3.46dBi

Note 1: The test results of all conducted test items please refer to the module FCC test report (Report No.: SZ24040154W01), which issued on Jul. 26, 2024. We only recorded the radiated test result in this report.

Note 2: The EUT has two antennas and it operates in single antenna. Both of the two antennas were evaluated separately, only the worst test result (ANT2) were recorded in the test report.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Emission Measurement

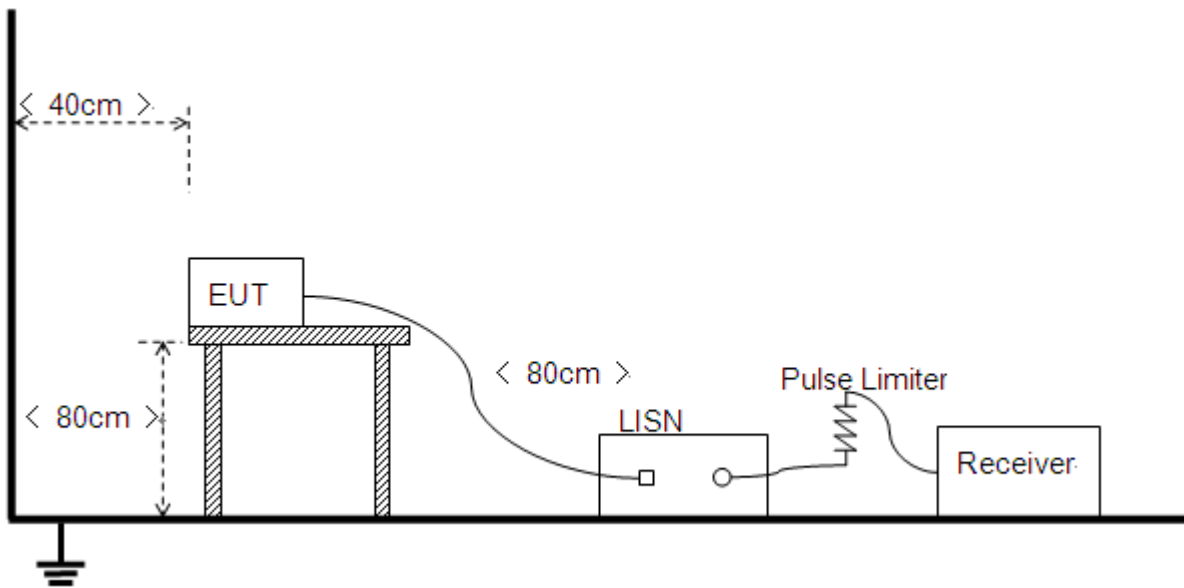


2.6.2.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

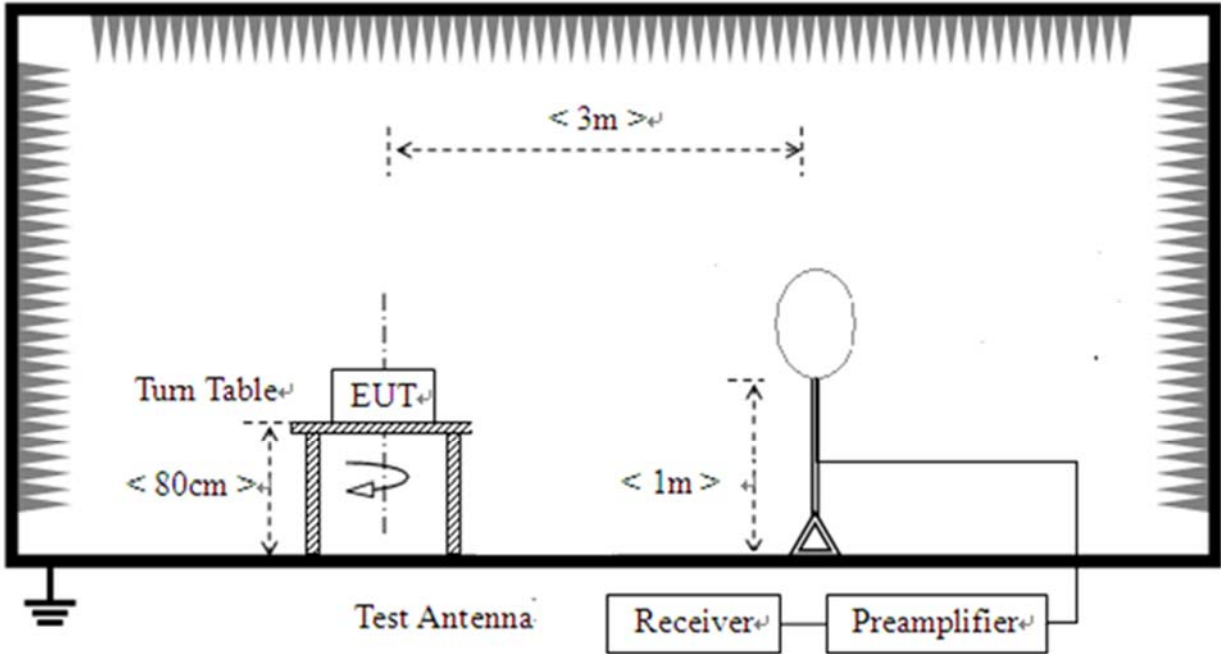

2) For radiated emissions from 30MHz to 1GHz

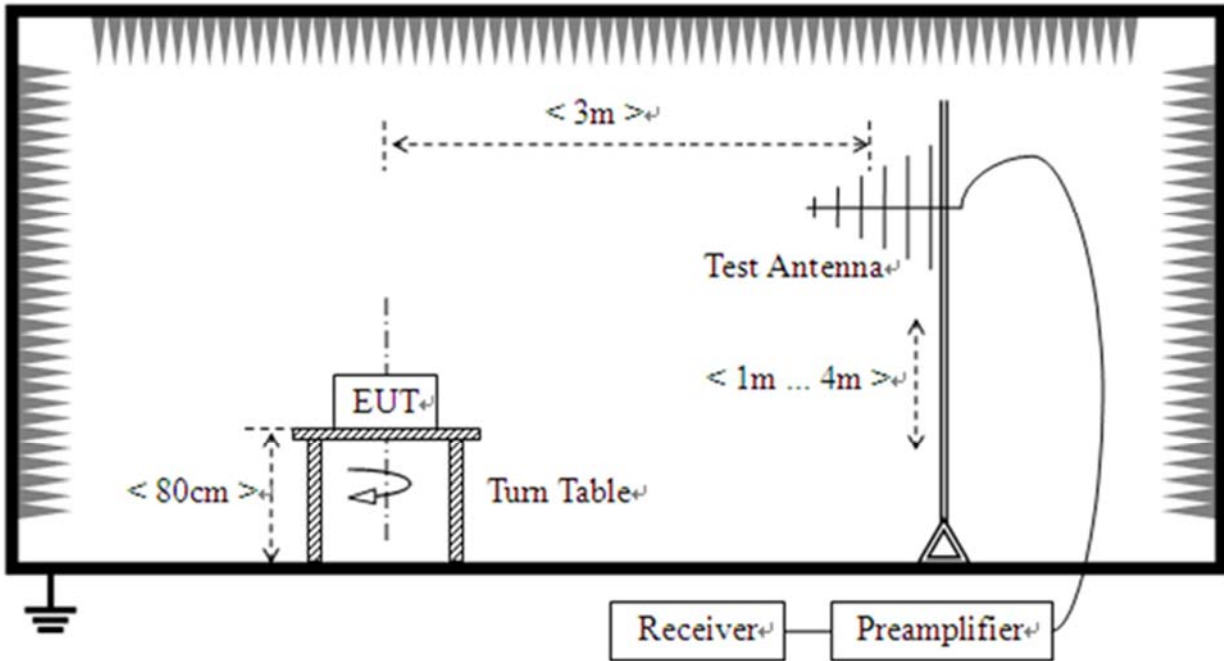

3) For radiated emissions above 1GHz

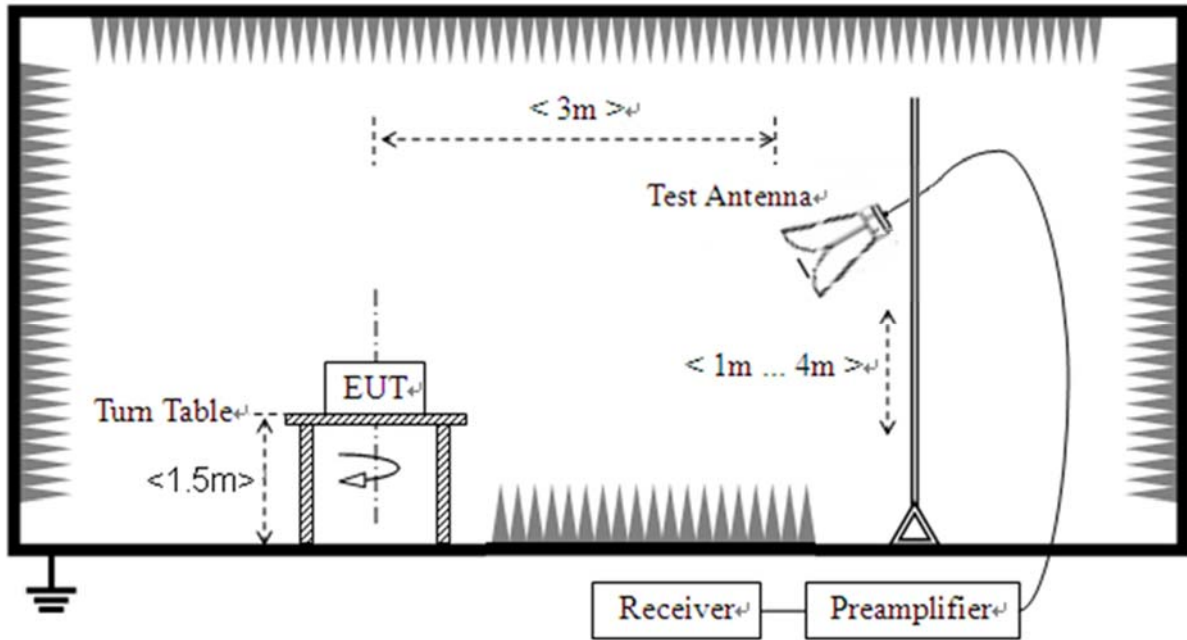

3. Test Results

3.1. Conducted Emission

3.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.1.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.1.4. Test Result

Refer to Annex A.1 in this report.



3.2. Restricted Frequency Bands

3.2.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.2.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.2.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.2.4. Test Result

Refer to Annex A.2 in this report.



3.3. Radiated Emission

3.3.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.3.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.3.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.3.4. Test Result

Refer to Annex A.3 in this report.



Annex A Test Data and Result

A.1. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + PC +PC Adapter + BT TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

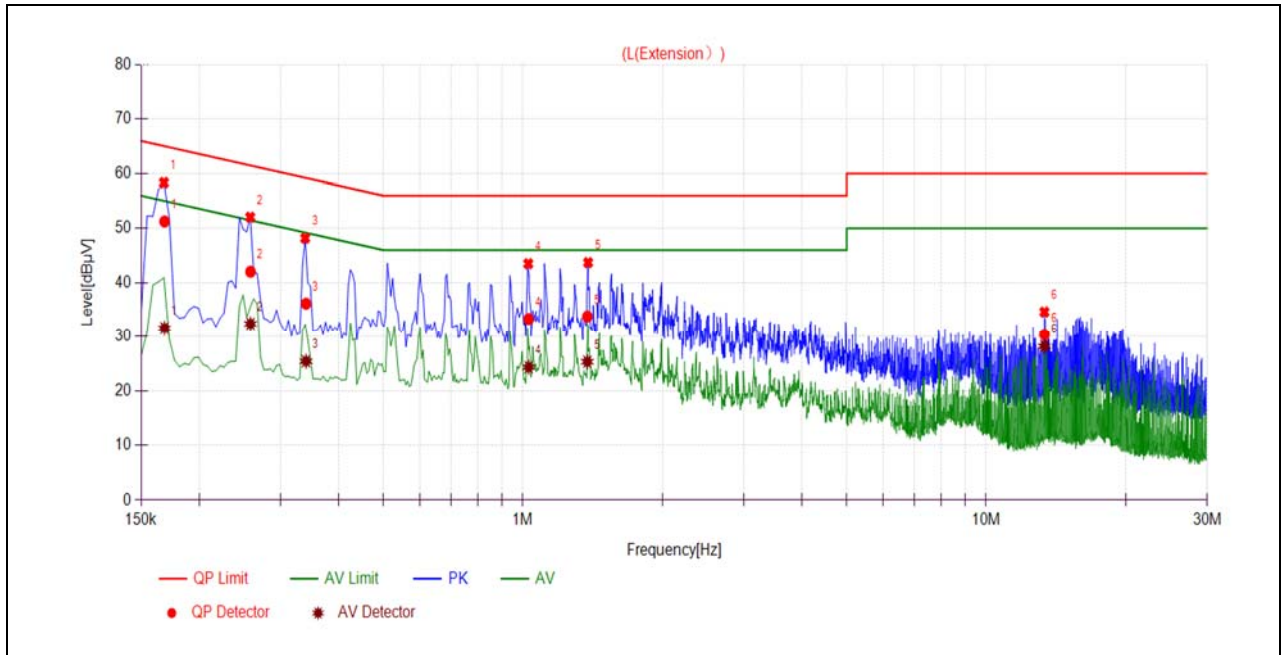

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1685	51.28	31.59	65.03	55.03	Line	PASS
2	0.2583	42.04	32.40	61.49	51.49		PASS
3	0.3404	36.13	25.40	59.19	49.19		PASS
4	1.0294	33.30	24.30	56.00	46.00		PASS
5	1.3780	33.76	25.30	56.00	46.00		PASS
6	13.3588	30.34	28.16	60.00	50.00		PASS

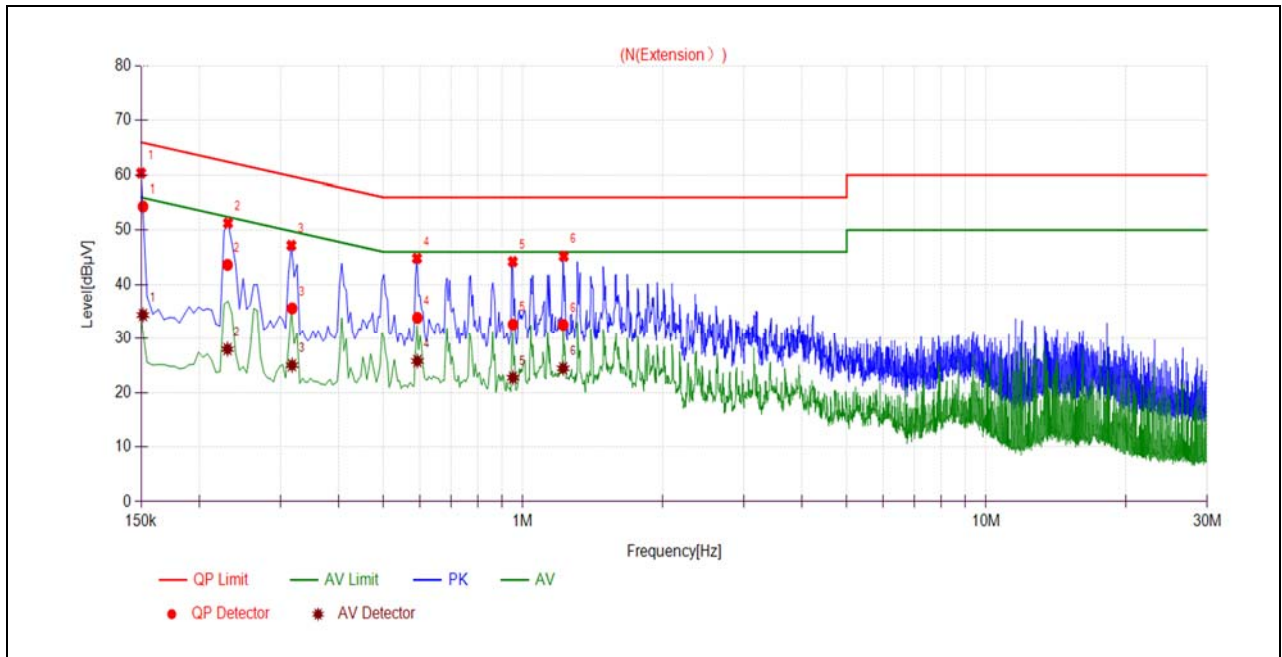

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1514	54.33	34.43	65.92	55.92	Neutral	PASS
2	0.2304	43.63	27.99	62.43	52.43		PASS
3	0.3176	35.64	25.03	59.77	49.77		PASS
4	0.5920	33.90	25.80	56.00	46.00		PASS
5	0.9521	32.65	22.72	56.00	46.00		PASS
6	1.2221	32.59	24.44	56.00	46.00		PASS



A.2. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (horizontal) was recorded in this test report.

1Mbps


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
0	2375.71	PK	24.62	6.74	27.20	58.56	74	PASS
0	2388.19	AV	11.66	6.74	27.20	45.60	54	PASS
39	2492.34	PK	24.24	6.74	27.20	58.18	74	PASS
39	2485.35	AV	11.33	6.74	27.20	45.27	54	PASS

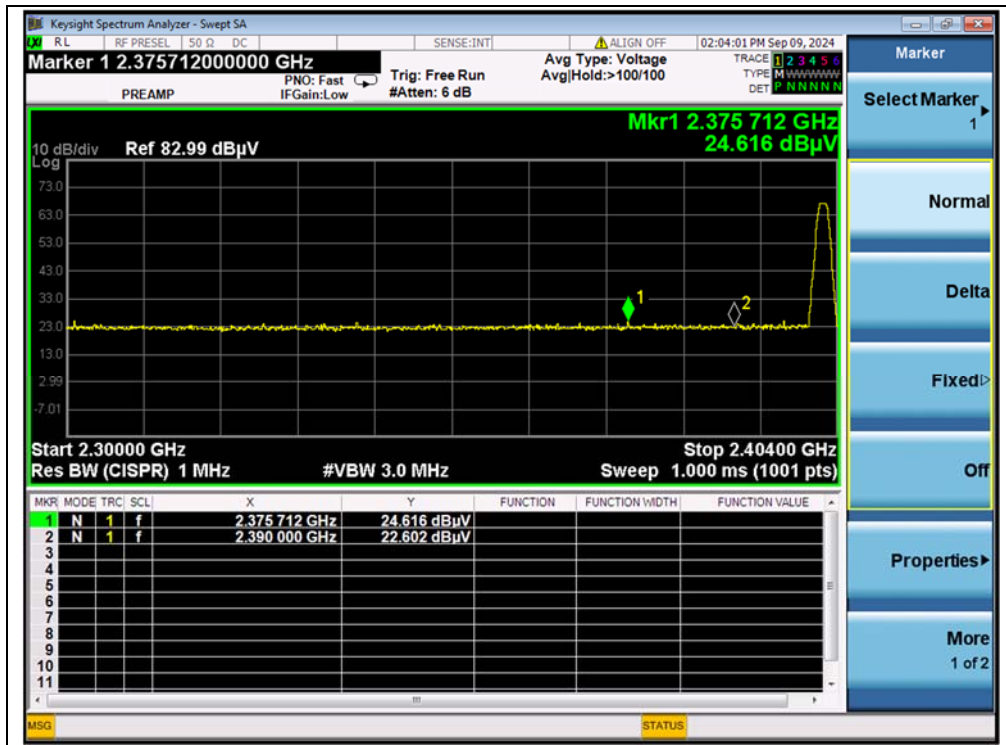


(PEAK, Channel 0)

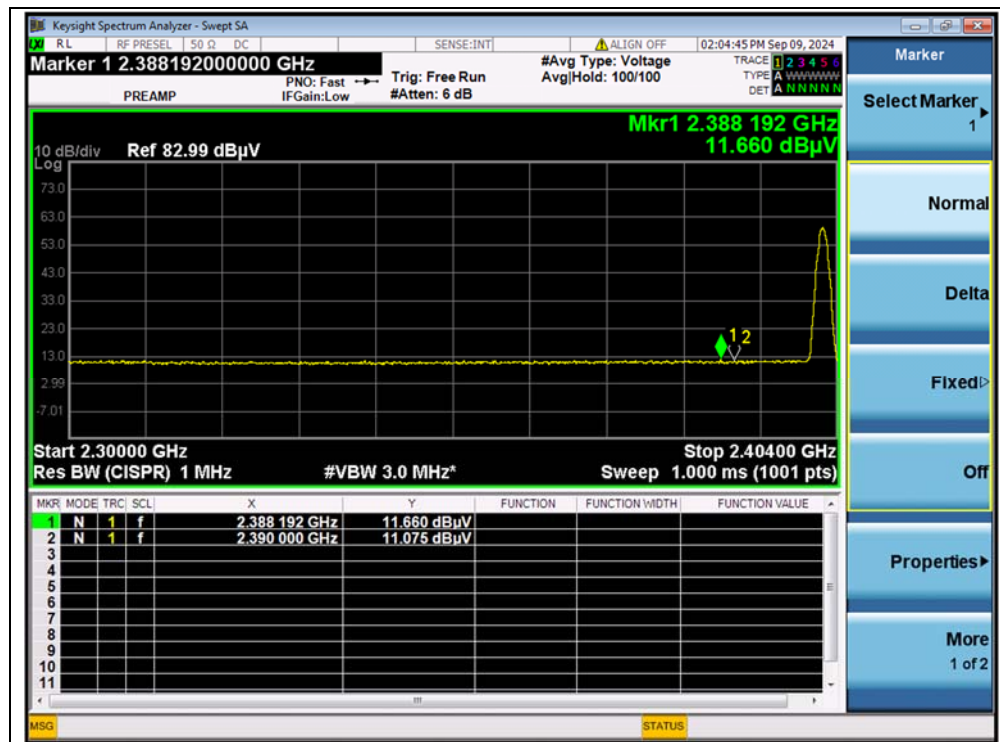

(AVERAGE, Channel 0)

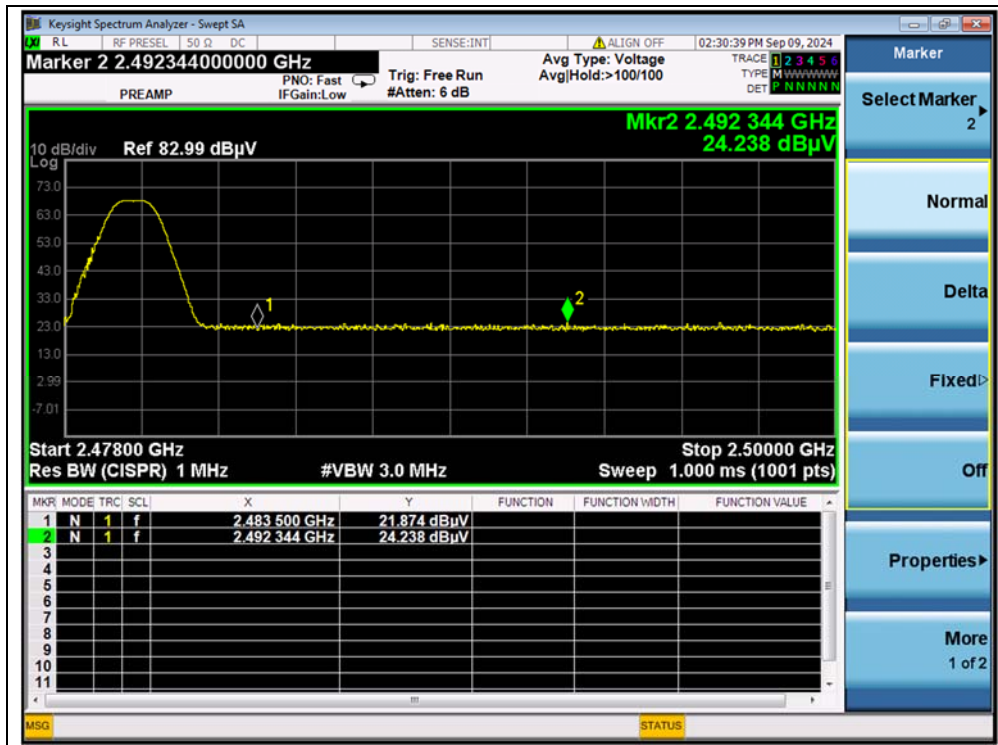

(PEAK, Channel 39)

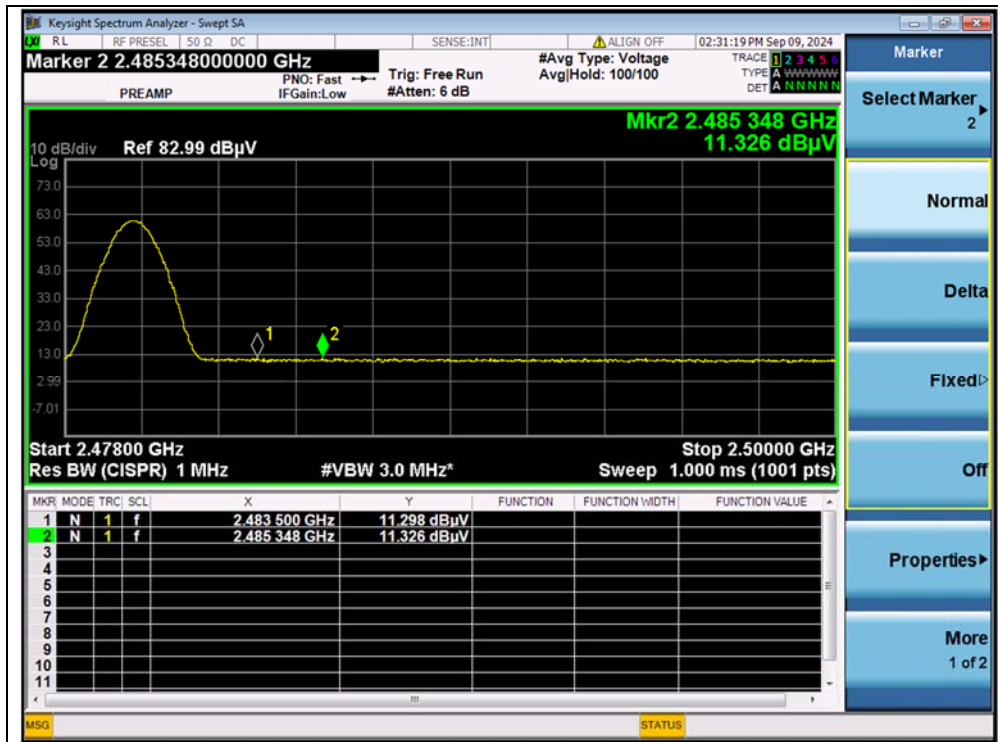


(AVERAGE, Channel 39)




2Mbps

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)					
0	2383.93	PK	23.90	6.74	27.20	57.84	74	PASS
0	2385.49	AV	11.67	6.74	27.20	45.61	54	PASS
39	2487.11	PK	24.49	6.74	27.20	58.43	74	PASS
39	2489.24	AV	11.36	6.74	27.20	45.30	54	PASS

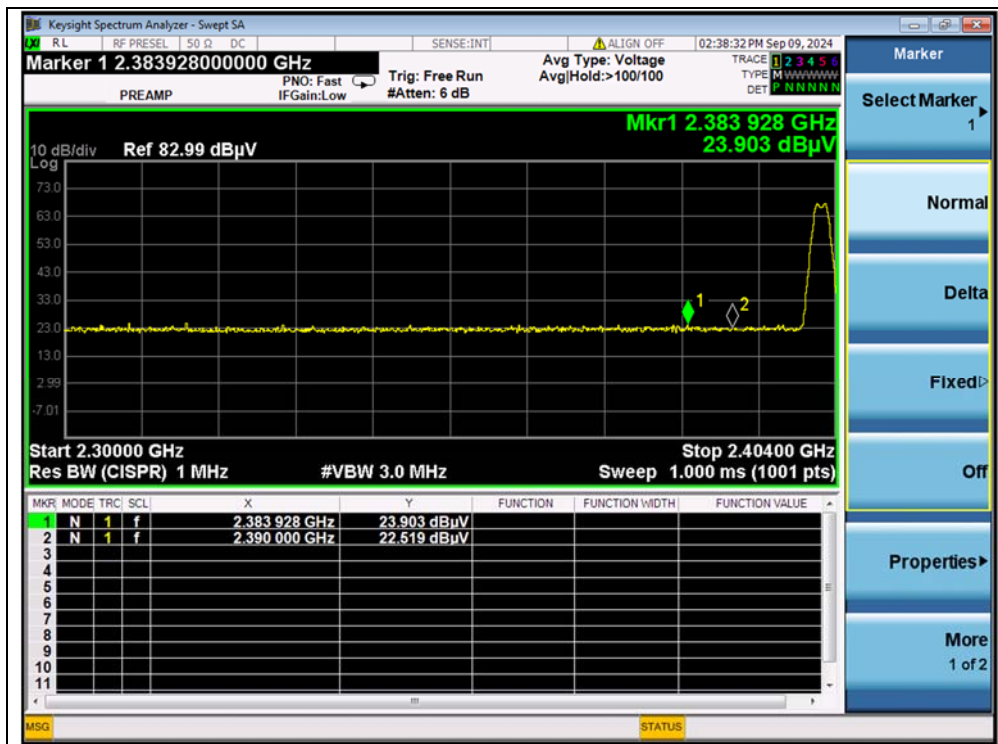


(PEAK, Channel 0)

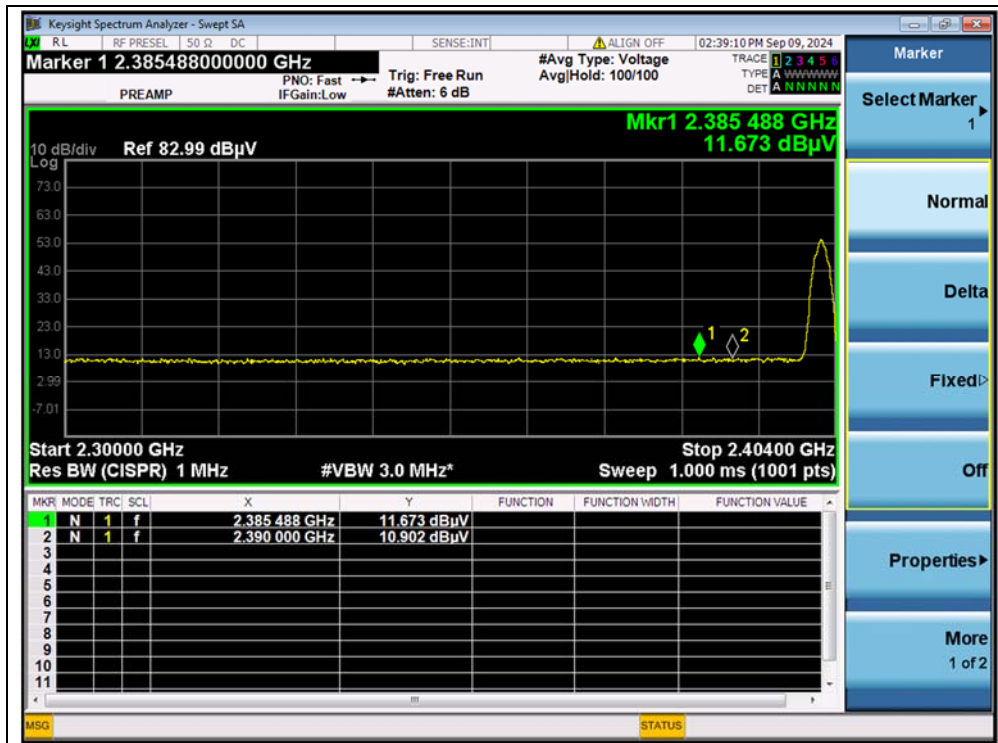

(AVERAGE, Channel 0)



(PEAK, Channel 39)

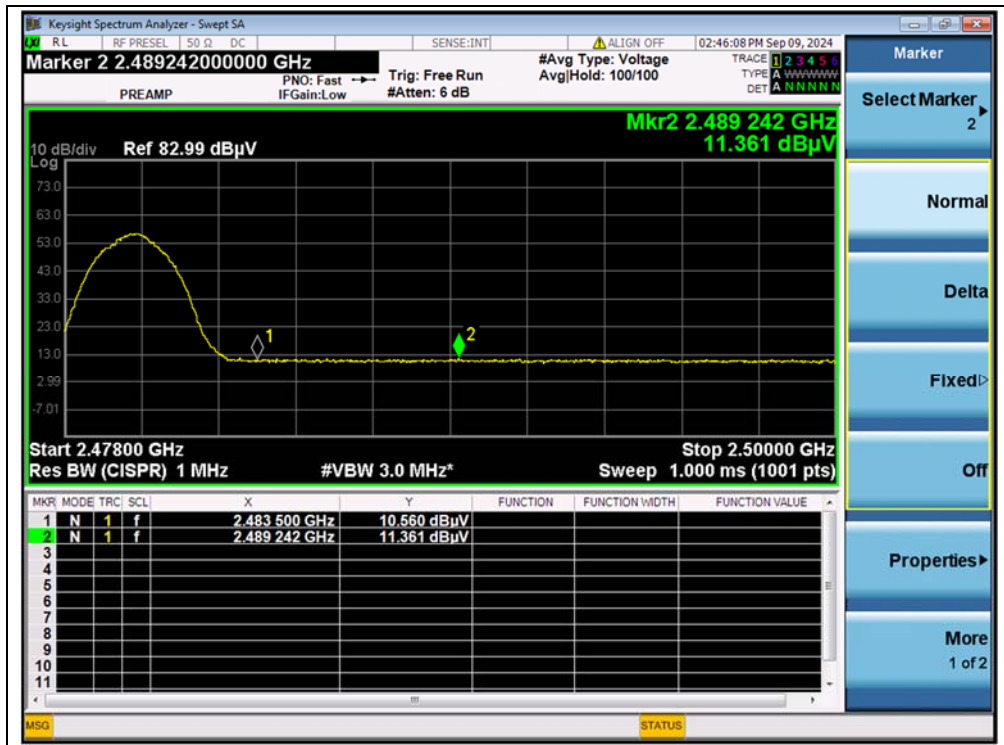

(AVERAGE, Channel 39)



A.3. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.

Field strength of fundamental:


Frequency (MHz)	Reading_Peak (dBμV/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dBμV/m)	Antenna Polarity
2479.75	64.27	27.20	6.74	98.21	Horizontal

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).




1Mbps

Plot for Channel 0

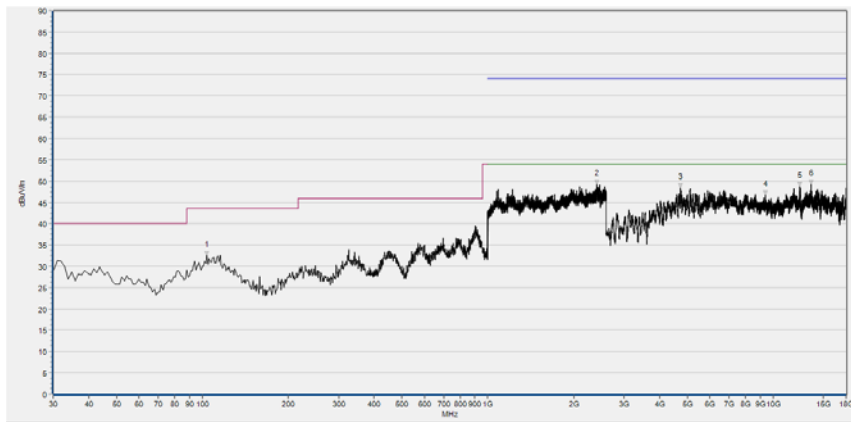

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
103.720	32.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2411.733	49.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4731.360	48.50	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9400.640	46.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12382.080	48.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13574.040	49.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

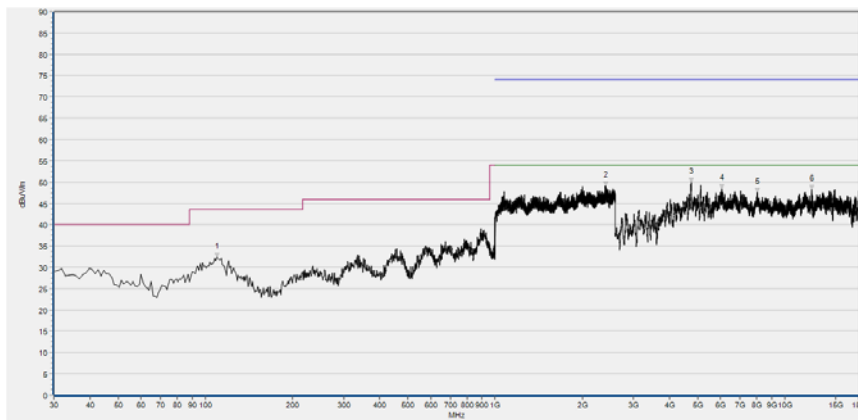

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
109.540	32.28	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2402.133	49.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4746.760	49.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6071.160	48.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8036.200	47.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12406.720	48.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 19

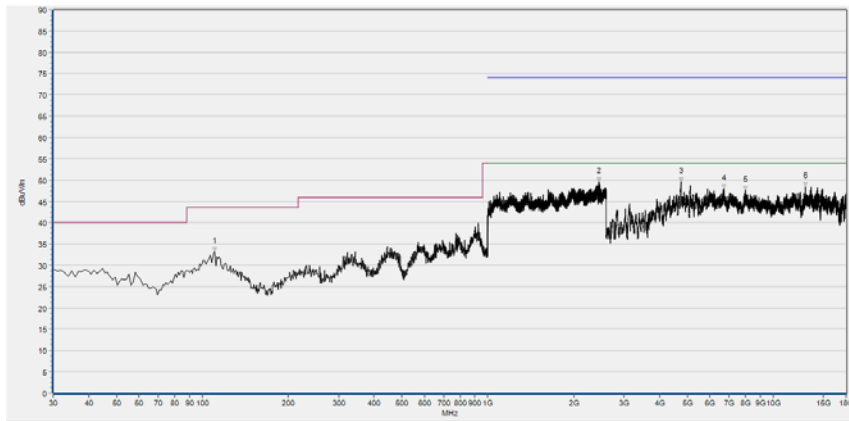

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
110.510	33.24	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2446.400	49.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4743.680	49.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6721.040	47.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7986.920	47.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12991.920	48.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

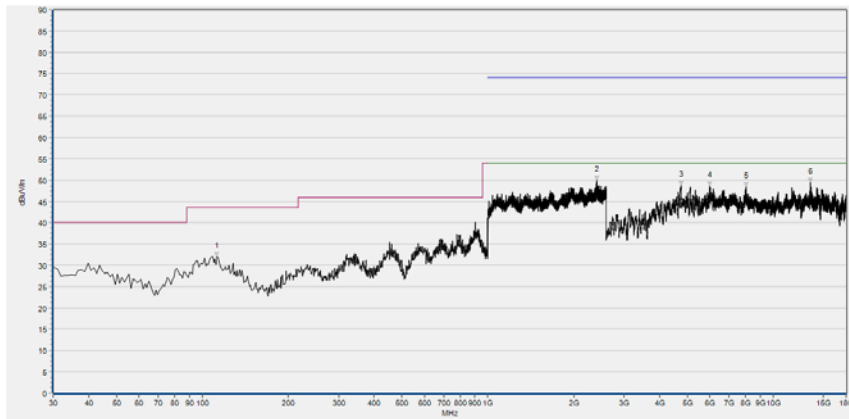

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
112.450	32.04	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2402.133	49.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4749.840	48.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5972.600	48.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8023.880	48.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
13460.080	49.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39



Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
107.600	32.20	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2416.000	50.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4743.680	49.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7956.120	47.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11849.240	47.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13734.200	48.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

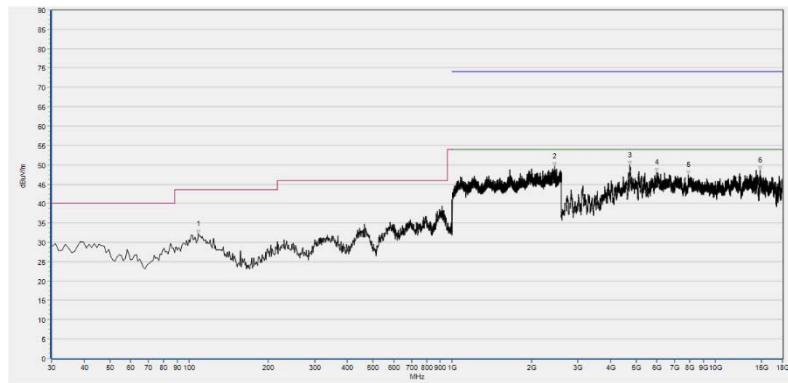

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
108.570	32.21	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2446.400	49.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4740.600	49.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6000.320	48.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7897.600	47.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14781.400	48.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

————— END OF REPORT —————