



FCC Test Report

Report No: FCS202302056W01

Issued for

| | |
|---|--|
| Applicant: | Qsee Technology |
| Address: | 17800 Castleton St, ste 234, City of Industry CA91748 |
| Product Name: | Smart Home Camera |
| Brand Name: | Qsee |
| Model Name: | Hestia 3T |
| Series Model: | Hestia,Hestia 3T,Hestia 4T.....Hestia XY (X=0-9 Y=A-Z) |
| FCC ID: | 2BAC7-HESTIA3T |
| Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 http://www.FCS-lab.com | |

TEST RESULT CERTIFICATION

Applicant's Name.....: Qsee Technology
Address.....: 17800 Castleton St, ste 234, City of Industry CA91748
Manufacturer's Name.....: Wanjaan Interconnected Technology Co., Ltd.
Address.....: Block 3, Jinrui Zhonghe High-Tech Industrial Zone, Huawang Rd, Longhua, Shenzhen, P.R.China 518000

Product Description

Product Name.....: Smart Home Camera
Brand Name.....: Qsee
Model Name.....: Hestia 3T
Series Model.....: Hestia,Hestia 3T,Hestia 4T.....Hestia XY (X=0-9 Y=A-Z)
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249
Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by Flux Compliance Service Laboratory, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Flux Compliance Service Laboratory, this document may be altered or revised by Flux Compliance Service Laboratory, personal only, and shall be noted in the revision of the document..

Date of Test.....:

Date (s) of performance of tests.: Feb. 11 2023~Feb. 16 2023

Date of Issue.....: Feb. 16 2023

Test Result.....: Pass

Tested by

:

Scott Shen

(Scott Shen)

Reviewed by

:

Duke Qian

(Duke Qian)

Approved by

:

Jack Wang

(Jack Wang)

| Table of Contents | Page |
|---|------|
| 1. SUMMARY OF TEST RESULTS | 6 |
| 1.1 TEST FACTORY | 7 |
| 1.2 MEASUREMENT UNCERTAINTY | 7 |
| 2. GENERAL INFORMATION | 8 |
| 2.1 GENERAL DESCRIPTION OF THE EUT | 8 |
| 2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10 |
| 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS | 11 |
| 2.4 EQUIPMENTS LIST | 12 |
| 3. 6DB BANDWIDTH | 13 |
| 3.1 LIMIT | 13 |
| 3.2 TEST PROCEDURE | 13 |
| 3.3 TEST SETUP | 13 |
| 3.4 TEST RESULTS | 14 |
| 4 CONDUCTED OUTPUT POWER | 21 |
| 4.1 LIMIT | 21 |
| 4.2 TEST PROCEDURE | 21 |
| 4.3 TEST SETUP | 21 |
| 4.5 TEST RESULTS | 21 |
| 5. POWER SPECTRAL DENSITY | 22 |
| 5.1 LIMIT | 22 |
| 5.2 TEST PROCEDURE | 22 |
| 5.3 TEST SETUP | 22 |
| 5.5 TEST RESULTS | 23 |
| 5.6 ORIGINAL TEST DATA | 24 |
| 6. BAND EDGE AND SPURIOUS(CONDUCTED) | 30 |
| 6.1 LIMIT | 30 |
| 6.2 TEST PROCEDURE | 30 |
| 6.3 TEST SETUP | 30 |
| 6.5 TEST RESULTS | 31 |
| 6.5 ORIGINAL TEST DATA | 31 |
| 7 RADIATED EMISSION MEASUREMENT | 43 |
| 8 CONDUCTED EMISSION TEST | 57 |

| Table of Contents | Page |
|--------------------------|-----------|
| 9. ANTENNA REQUIREMENT | 61 |
| 9.1 STANDARD REQUIREMENT | 61 |
| 9.2 RESULT | 61 |

Revision History

| Rev. | Issue Date | Effect Page | Contents |
|------|--------------|-------------|---------------|
| 00 | Feb. 16 2023 | All | Initial Issue |
| | | | |

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02

| FCC Part 15.247,Subpart C | | | |
|--|--|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| FCC 15.247 (a) (2) | 6dB Bandwidth | PASS | -- |
| FCC 15.247 (b) (3) | Conducted Output Power | PASS | -- |
| FCC 15.247 (e) | Power Spectral Density | PASS | -- |
| FCC 15.247 (d) | Band-edge and Spurious Emissions (Conducted) | PASS | -- |
| FCC 15.247 (d) FCC 15.209 FCC 15.205 | Radiated Spurious Emissions | PASS | -- |
| FCC 15.247 (d) FCC 15.209 FCC 15.205 | Radiated Band Edge Compliance | PASS | -- |
| FCC 15.207 | Power Line Conducted Emission | PASS | -- |
| FCC 15.203 | Antenna requirement | PASS | -- |
| 15.205 | Restricted Band Edge Emission | PASS | -- |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013

1.1 TEST FACTORY

| | |
|---|--|
| Company Name: | Flux Compliance Service Laboratory |
| Address: | Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan |
| Telephone: | +86-769-27280901 |
| Fax: | +86-769-27280901 |
| FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01 | |

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

| No. | Item | Uncertainty |
|-----|--|------------------------|
| 1 | RF output power, conducted | $\pm 0.71\text{dB}$ |
| 2 | Unwanted Emissions, conducted | $\pm 2.988 \text{ dB}$ |
| 3 | Conducted Emission (9KHz-150KHz) | $\pm 4.13 \text{ dB}$ |
| 4 | Conducted Emission (150KHz-30MHz) | $\pm 4.74 \text{ dB}$ |
| 5 | All emissions, radiated(<1G) 30MHz-1000MHz | $\pm 5.2 \text{ dB}$ |
| 6 | All emissions, radiated 1GHz -18GHz | $\pm 4.66 \text{ dB}$ |
| 7 | All emissions, radiated 18GHz -40GHz | $\pm 4.31 \text{ dB}$ |

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

| | |
|-------------------------|--|
| Product Name | Smart Home Camera |
| Trade Name | Qsee |
| Model Name | Hestia 3T |
| Series Model | Hestia, Hestia 3T, Hestia 4T.....Hestia XY (X=0-9 Y=A-Z) |
| Model Difference | The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, only different color. |
| Channel List | Please refer to the Note 2. |
| Operation frequency | IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz |
| Modulation: | IEEE 802.11b: DSSS (CCK, QPSK, BPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) |
| Transmitter rate: | IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: up to 150 Mbps, HT40: up to 300Mbps |
| Power supply | AC 100-240V, 50/60Hz |
| Battery | N/A |
| Hardware version number | V1.0 |
| Software version number | V1.0 |
| Connecting I/O Port(s) | Please refer to the User's Manual |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 05 | 2432 | 09 | 2452 |
| 02 | 2417 | 06 | 2437 | 10 | 2457 |
| 03 | 2422 | 07 | 2442 | 11 | 2462 |
| 04 | 2427 | 08 | 2447 | | |

3. Table for Filed Antenna

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE |
|------|-------|------------|--------------|-----------|------------|--------------|
| 1 | N/A | N/A | FPC antenna | N/A | 2.4 | WIFI Antenna |

2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Block diagram of EUT configuration for test



Test software: the FCC tool

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

| Tested mode, channel, and data rate information | | | | |
|---|------------------|--------------------------------|-----------|-----------------|
| Mode | Setting Tx Power | data rate (Mbps) (see Note) | Channel | Frequency (MHz) |
| IEEE 802.11b | 8 | 1 | LCH: CH1 | 2412 |
| | 8 | 1 | MCH: CH6 | 2437 |
| | 8 | 1 | HCH: CH11 | 2462 |
| IEEE 802.11g | 20 | 6 | LCH: CH1 | 2412 |
| | 20 | 6 | MCH: CH6 | 2437 |
| | 20 | 6 | HCH: CH11 | 2462 |
| IEEE 802.11n HT20 | 20 | MCS 8 | LCH: CH1 | 2412 |
| | 20 | MCS 8 | MCH: CH6 | 2437 |
| | 20 | MCS 8 | HCH: CH11 | 2462 |
| IEEE 802.11n HT40 | 20 | MCS 8 | LCH: CH3 | 2422 |
| | 20 | MCS 8 | MCH: CH6 | 2437 |
| | 20 | MCS 8 | HCH: CH9 | 2452 |

Note:

(1) According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test,
(2) During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

| Item | Equipment | Mfr/Brand | Model/Type No. | Serial No. | Note |
|------|-----------|-----------|----------------|------------|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Serial No. | Note |
|------|-----------|-----------|----------------|------------|------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

2.4 EQUIPMENTS LIST

Radiation Test equipment

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|----------------------------------|--------------|--------------|-------------|------------------|------------------|
| EMI Test Receiver | R&S | ESRP 3 | FCS-E001 | 2023.01.29 | 2024.01.28 |
| Signal Analyzer | R&S | FSV40-N | FCS-E012 | 2023.01.29 | 2024.01.28 |
| Active loop Antenna | ZHINAN | ZN30900C | FCS-E013 | 2023.01.29 | 2024.01.28 |
| Bilog Antenna | SCHWARZBECK | VULB 9168 | FCS-E002 | 2023.01.29 | 2024.01.28 |
| Horn Antenna | SCHWARZBECK | BBHA 9120D | FCS-E003 | 2023.01.29 | 2024.01.28 |
| SHF-EHF Horn Antenna (18G-40GHz) | A-INFO | LB-180400-KF | FCS-E018 | 2023.01.29 | 2024.01.28 |
| Pre-Amplifier(0.1M-3G Hz) | EMCI | EM330N | FCS-E004 | 2023.01.29 | 2024.01.28 |
| Pre-Amplifier (1G-18GHz) | N/A | TSAMP-0518SE | FCS-E014 | 2023.01.29 | 2024.01.28 |
| Pre-Amplifier (18G-40GHz) | TERA-MW | TRLA-0400 | FCS-E019 | 2023.01.29 | 2024.01.28 |
| Temperature & Humidity | HTC-1 | victor | FCS-E005 | 2023.01.29 | 2024.01.28 |

Conduction Test equipment

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|------------------------|--------------|----------|-------------|------------------|------------------|
| EMI Test Receiver | R&S | ESPI | FCS-E020 | 2023.01.29 | 2024.01.28 |
| LISN | R&S | ENV216 | FCS-E007 | 2023.01.29 | 2024.01.28 |
| LISN | ETS | 3810/2NM | FCS-E009 | 2023.01.29 | 2024.01.28 |
| Temperature & Humidity | HTC-1 | victor | FCS-E008 | 2023.01.29 | 2024.01.28 |

RF Connected Test

| Kind of Equipment | Manufacturer | Type No. | Company No. | Last calibration | Calibrated until |
|---------------------|--------------|----------|-------------|------------------|------------------|
| MXA SIGNAL Analyzer | Keysight | N9020A | FCS-E015 | 2023.01.29 | 2024.01.28 |
| Spectrum Analyzer | Agilent | E4447A | MY50180039 | 2023.01.29 | 2024.01.28 |
| Spectrum Analyzer | R&S | FSV-40 | 101499 | 2023.01.29 | 2024.01.28 |
| Power Sensor | Agilent | UX2021XA | FCS-E021 | 2023.01.29 | 2024.01.28 |

3. 6DB BANDWIDTH

3.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz

3.2 Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows

RBW: 100kHz

VBW: 300kHz


Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

3.3 Test setup

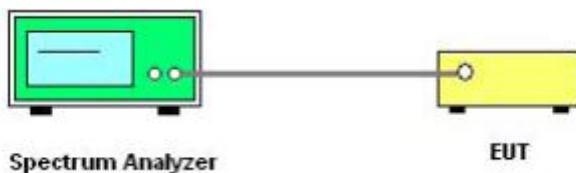


3.4 Test results


| TestMode | Channel (MHz) | 6dB Bandwidth (MHz) | Limit [MHz] | Verdict |
|------------|---------------|---------------------|-------------|---------|
| 802.11b | 2412MHz | 9.624 | 0.5 | Pass |
| 802.11b | 2437MHz | 9.652 | 0.5 | Pass |
| 802.11b | 2462MHz | 10.117 | 0.5 | Pass |
| 802.11g | 2412MHz | 15.815 | 0.5 | Pass |
| 802.11g | 2437MHz | 15.992 | 0.5 | Pass |
| 802.11g | 2462MHz | 16.227 | 0.5 | Pass |
| 802.11n 20 | 2412MHz | 16.425 | 0.5 | Pass |
| 802.11n 20 | 2437MHz | 17.257 | 0.5 | Pass |
| 802.11n 20 | 2462MHz | 16.759 | 0.5 | Pass |
| 802.11n 40 | 2422MHz | 35.170 | 0.5 | Pass |
| 802.11n 40 | 2437MHz | 35.195 | 0.5 | Pass |
| 802.11n 40 | 2452MHz | 35.155 | 0.5 | Pass |

3.5 Original Test Data


802.11b-CH2412MHZ

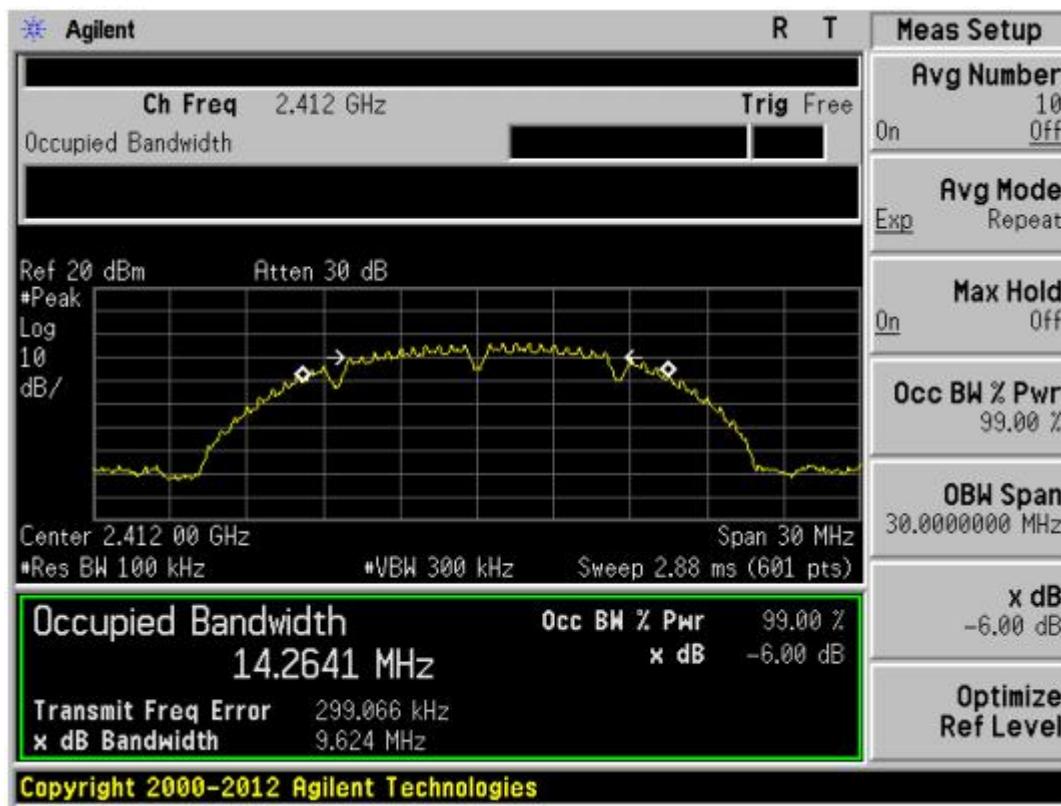


802.11b-CH237MHZ

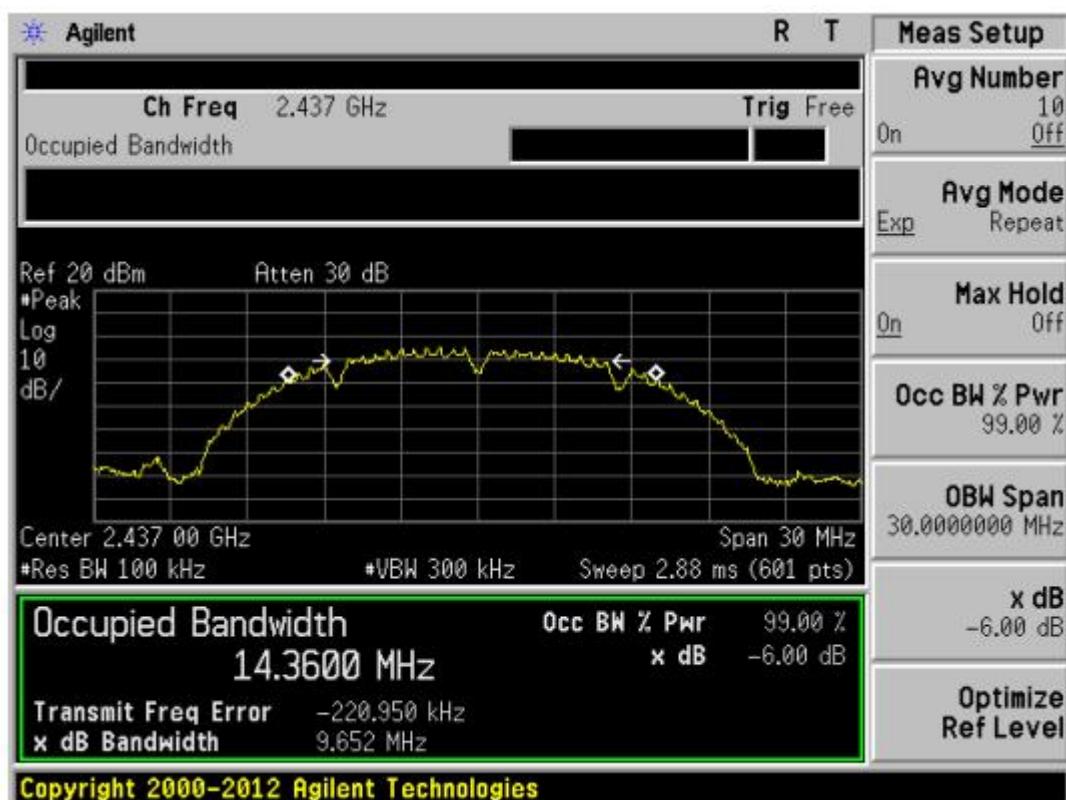


802.11b-CH2462MHZ

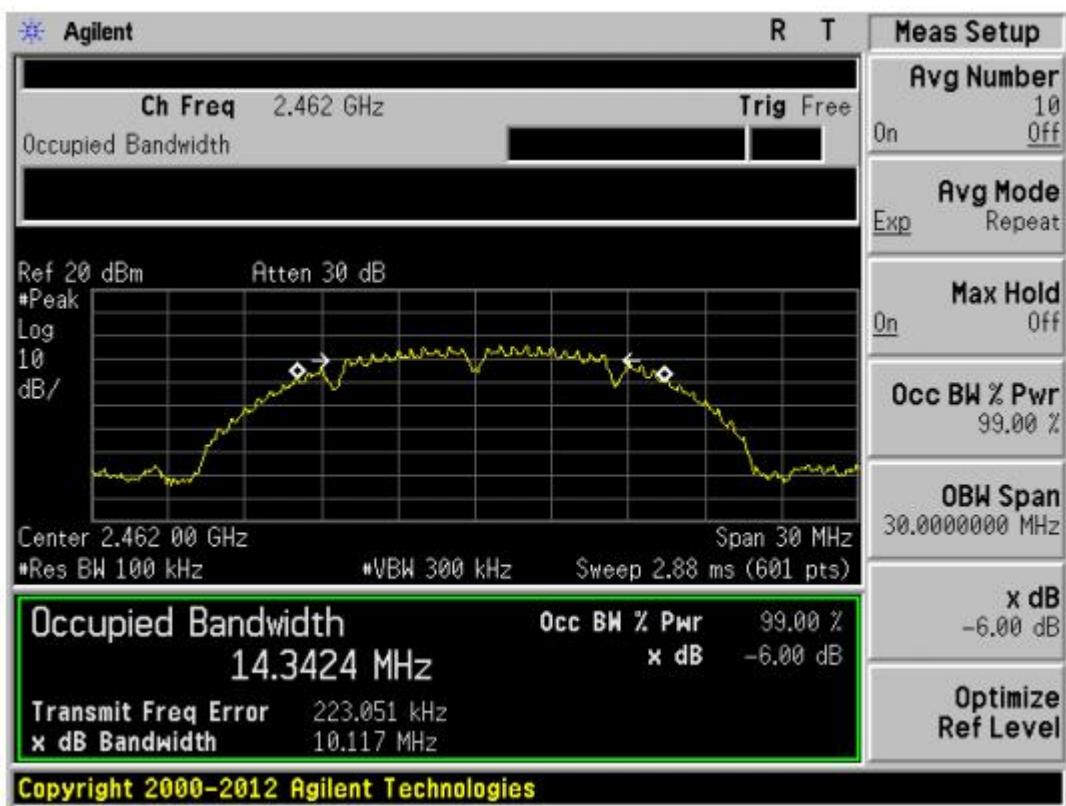


802.11g H2412MHZ

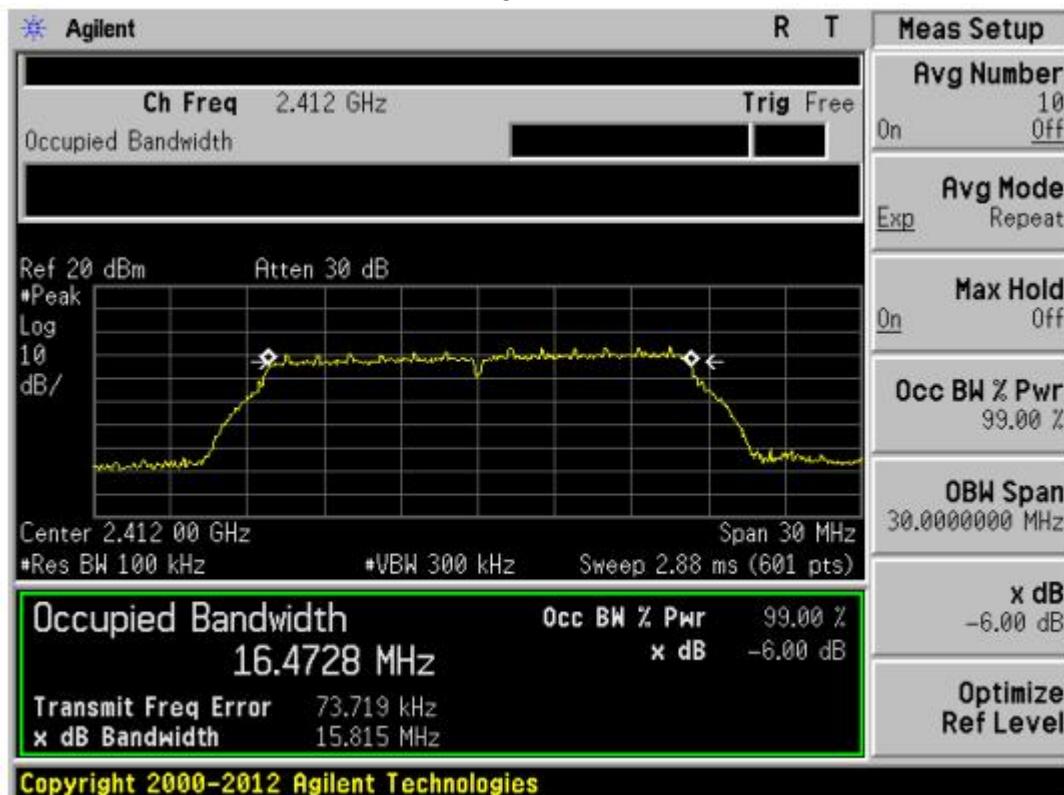


802.11g CH2437MHZ

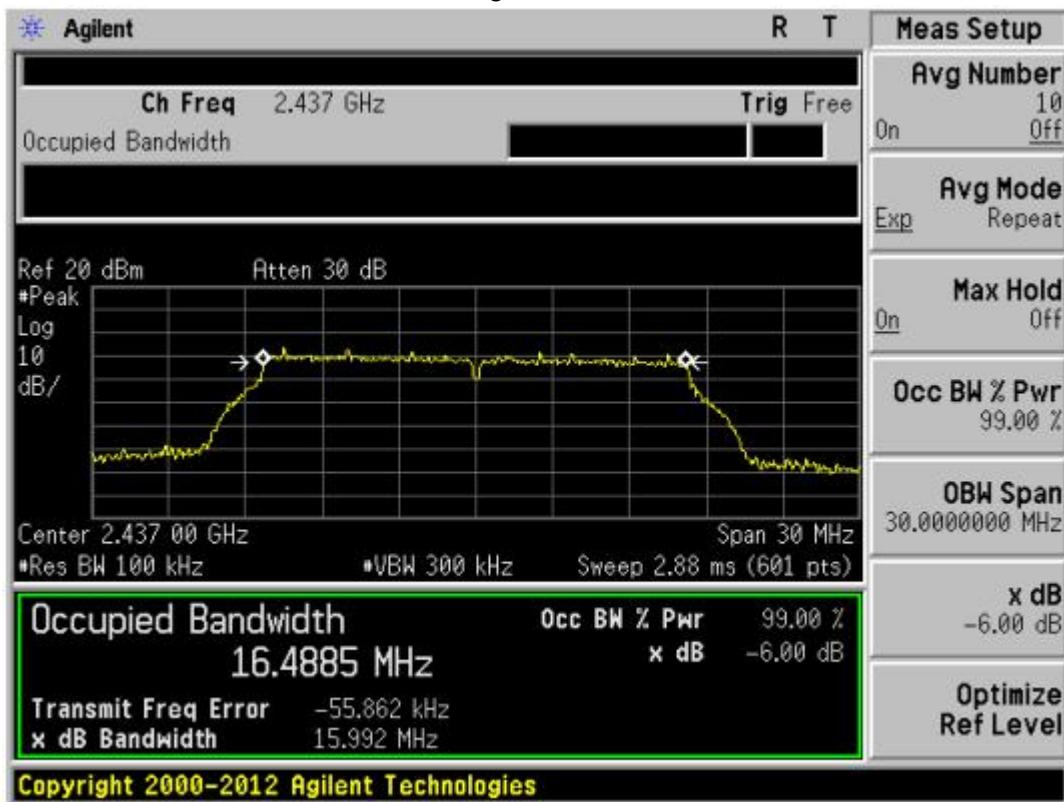


802.11g CH2462MHZ

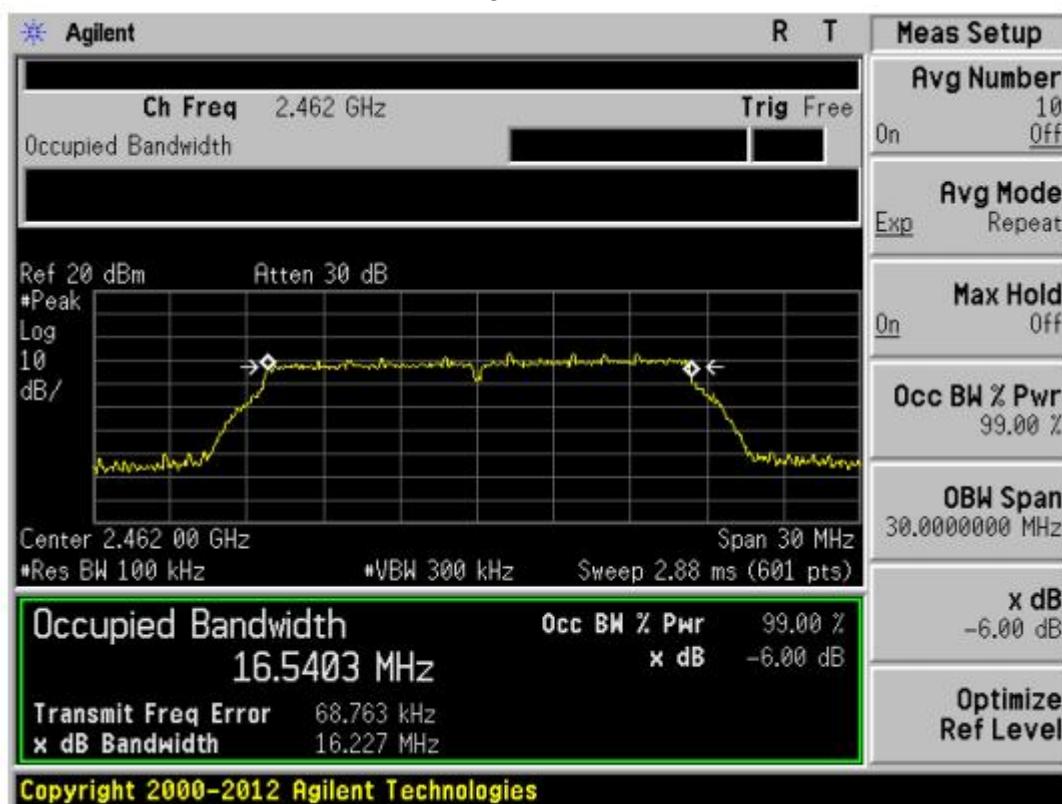


802.11n 20-2412MHz

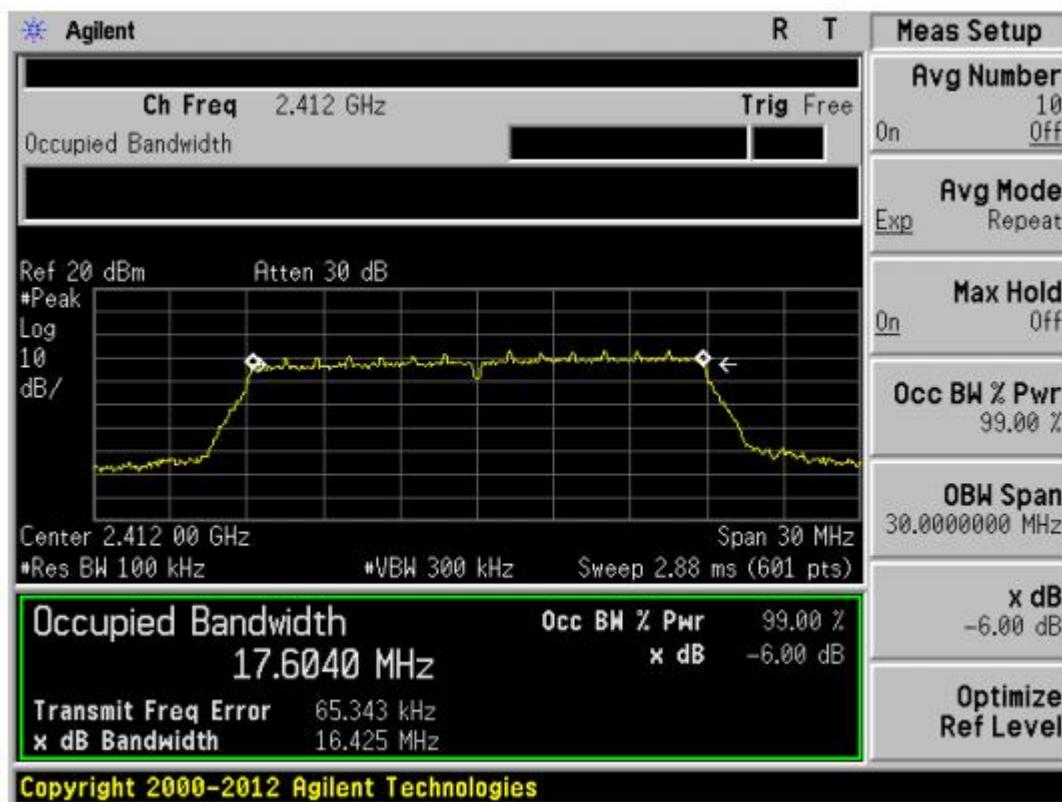


802.11n 20-2437MHz

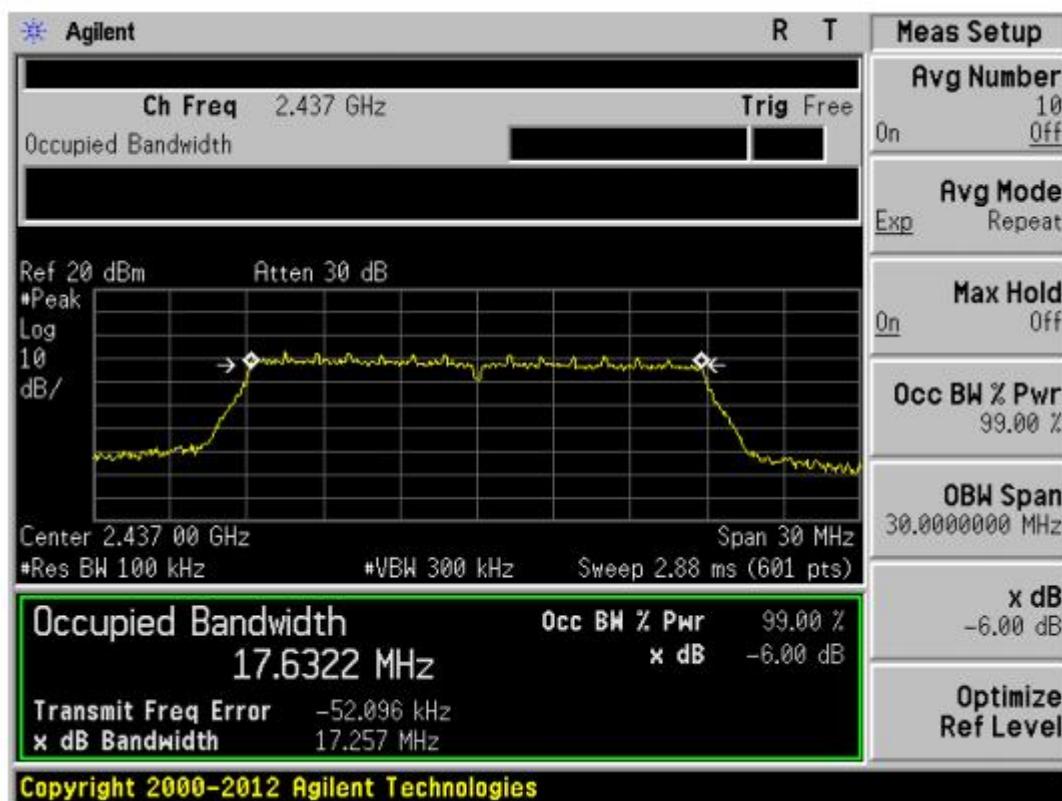


802.11n 20-2462MHz

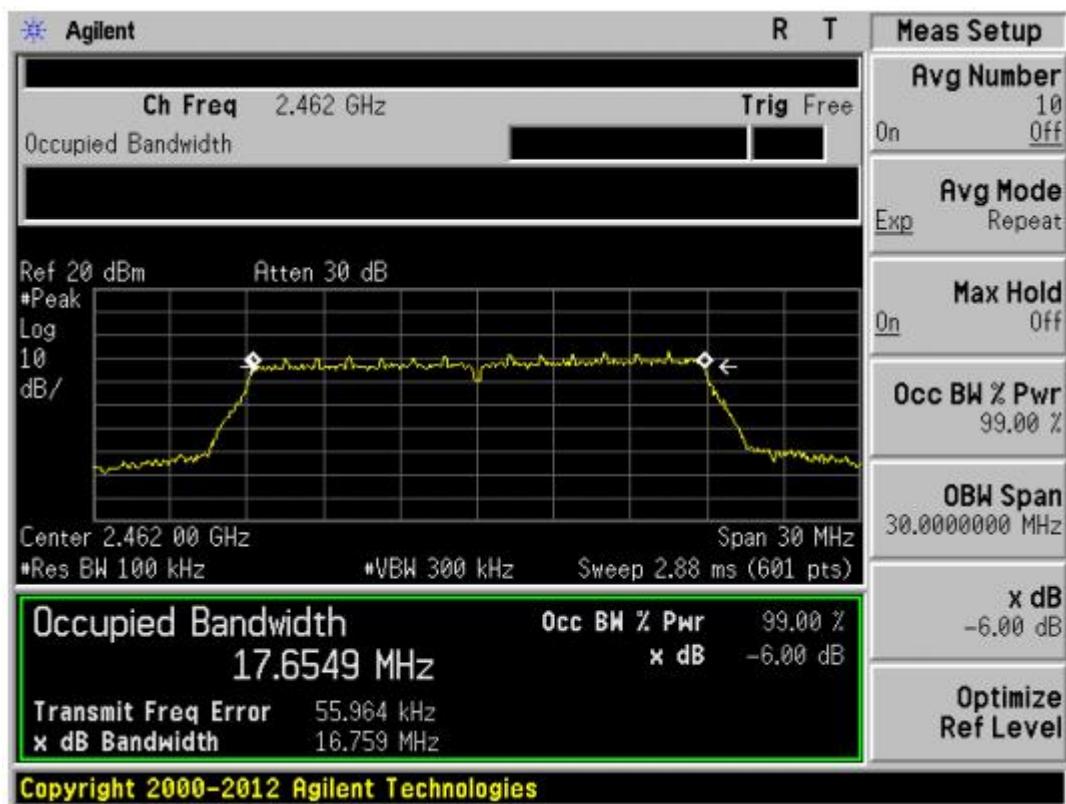


802.11n 40-2422MHz

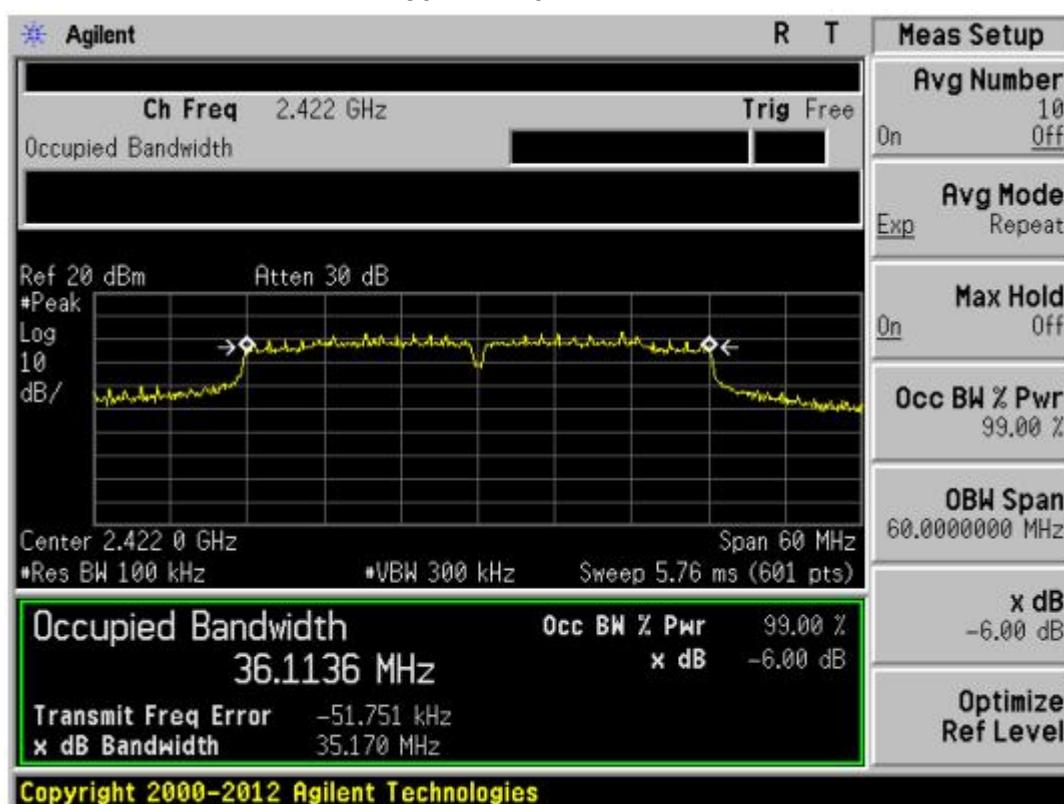

802.11n 40-2437MHz

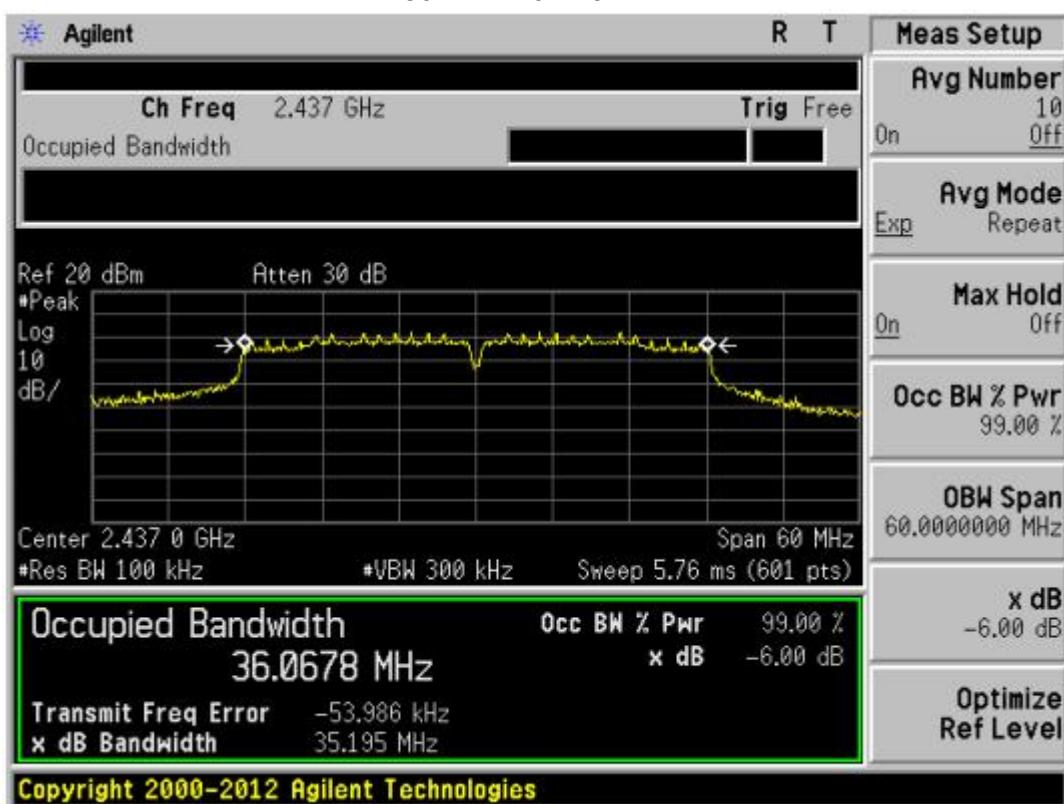

802.11n 40-2452MHz

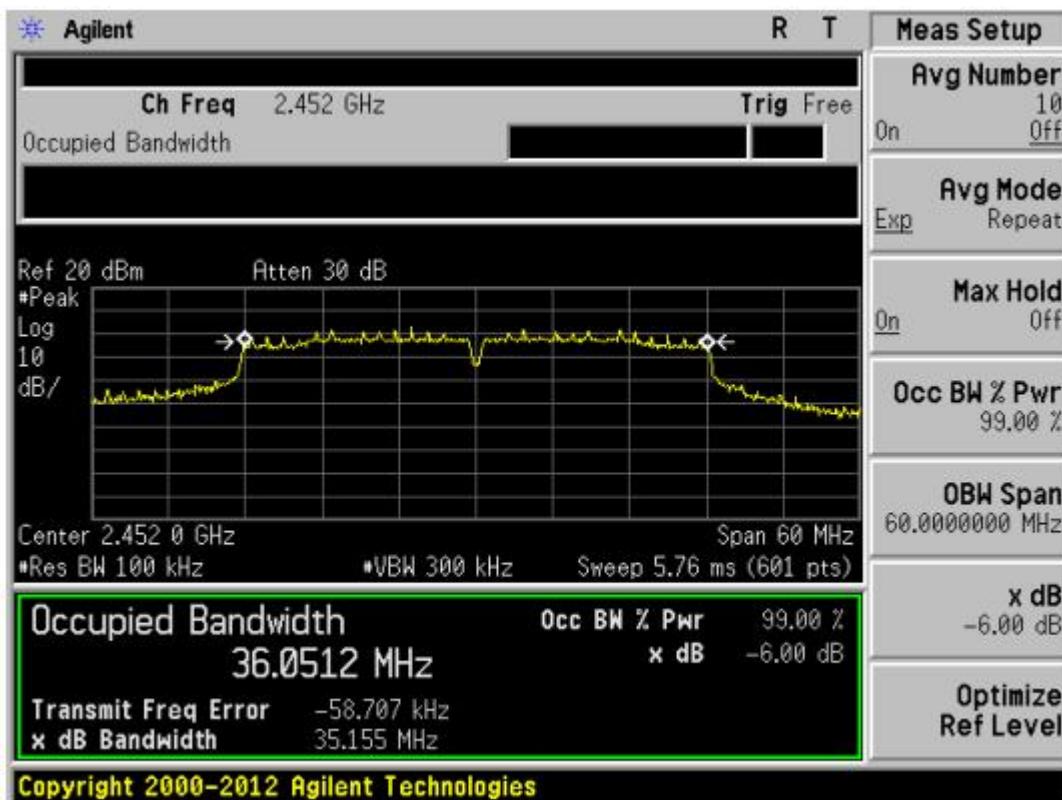

4 CONDUCTED OUTPUT POWER

4.1 limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 test procedure

- Connect each EUT's antenna output to power sensor by RF cable and attenuator
- Measure the PK output power of each antenna port by power sensor.

4.3 TEST SETUP



4.5 test results

| TestMode | Channel (MHz) | Result (dBm) | Limit (dBm) | Verdict |
|------------|---------------|--------------|-------------|---------|
| 802.11b | 2412MHz | 8.34 | 30 | Pass |
| 802.11b | 2437MHz | 7.62 | 30 | Pass |
| 802.11b | 2462MHz | 8.44 | 30 | Pass |
| 802.11g | 2412MHz | 7.27 | 30 | Pass |
| 802.11g | 2437MHz | 7.42 | 30 | Pass |
| 802.11g | 2462MHz | 7.43 | 30 | Pass |
| 802.11n 20 | 2412MHz | 6.51 | 30 | Pass |
| 802.11n 20 | 2437MHz | 6.68 | 30 | Pass |
| 802.11n 20 | 2462MHz | 6.25 | 30 | Pass |
| 802.11n 40 | 2422MHz | 7.34 | 30 | Pass |
| 802.11n 40 | 2437MHz | 7.34 | 30 | Pass |
| 802.11n 40 | 2452MHz | 6.82 | 30 | Pass |

5. POWER SPECTRAL DENSITY

5.1 LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

| | |
|------------------|--|
| Center frequency | DTS Channel center frequency |
| RBW: | $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ |
| VBW: | $\geq 3\text{RBW}$ |
| Span | 1.5 times the DTS bandwidth |
| Detector Mode: | Pake |
| Sweep time: | auto |
| Trace mode | Max hold |

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 TEST SETUP




5.4 TEST RESULTS


| TestMode | Channel (MHz) | Result (dBm/3KHz) | Limit (dBm/3KHz) | Verdict |
|------------|---------------|-------------------|------------------|---------|
| 802.11b | 2412MHz | -19.06 | 8 | Pass |
| 802.11b | 2437MHz | -19.45 | 8 | Pass |
| 802.11b | 2462MHz | -19.30 | 8 | Pass |
| 802.11g | 2412MHz | -21.26 | 8 | Pass |
| 802.11g | 2437MHz | -21.28 | 8 | Pass |
| 802.11g | 2462MHz | -21.95 | 8 | Pass |
| 802.11n 20 | 2412MHz | -21.08 | 8 | Pass |
| 802.11n 20 | 2437MHz | -21.04 | 8 | Pass |
| 802.11n 20 | 2462MHz | -21.79 | 8 | Pass |
| 802.11n 40 | 2422MHz | -22.90 | 8 | Pass |
| 802.11n 40 | 2437MHz | -23.56 | 8 | Pass |
| 802.11n 40 | 2452MHz | -23.34 | 8 | Pass |

5.5 original test data


802.11b-2412MHz

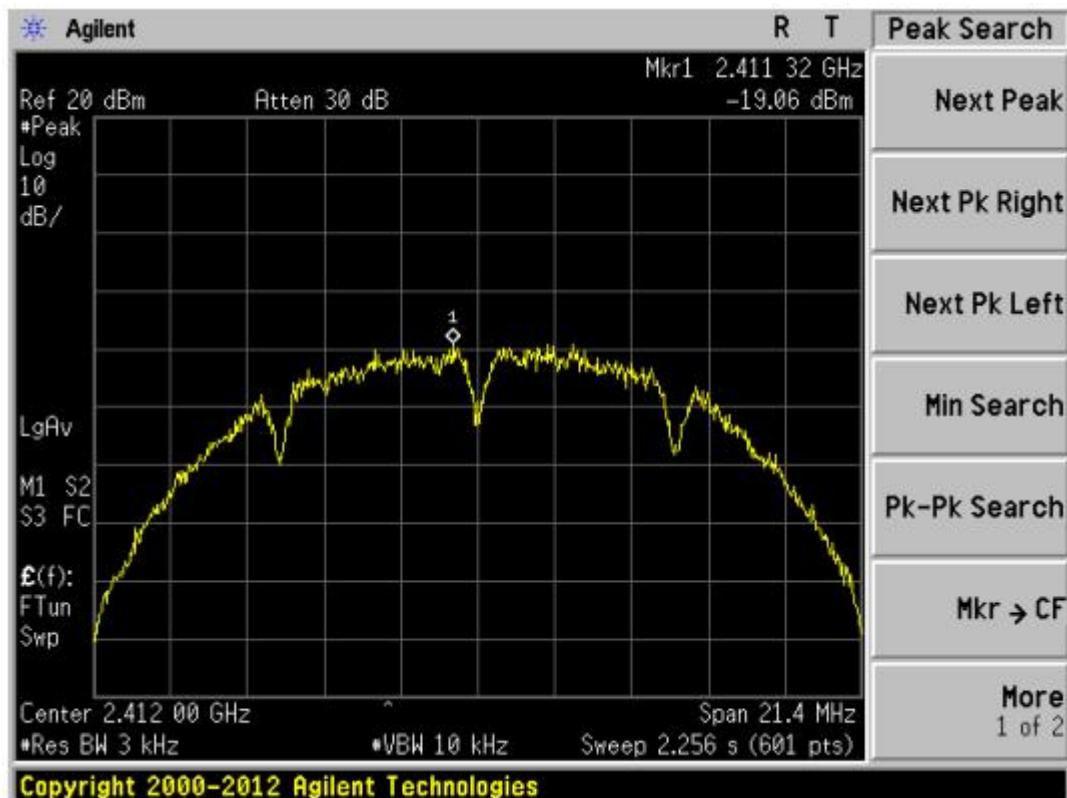


802.11b-2437MHz

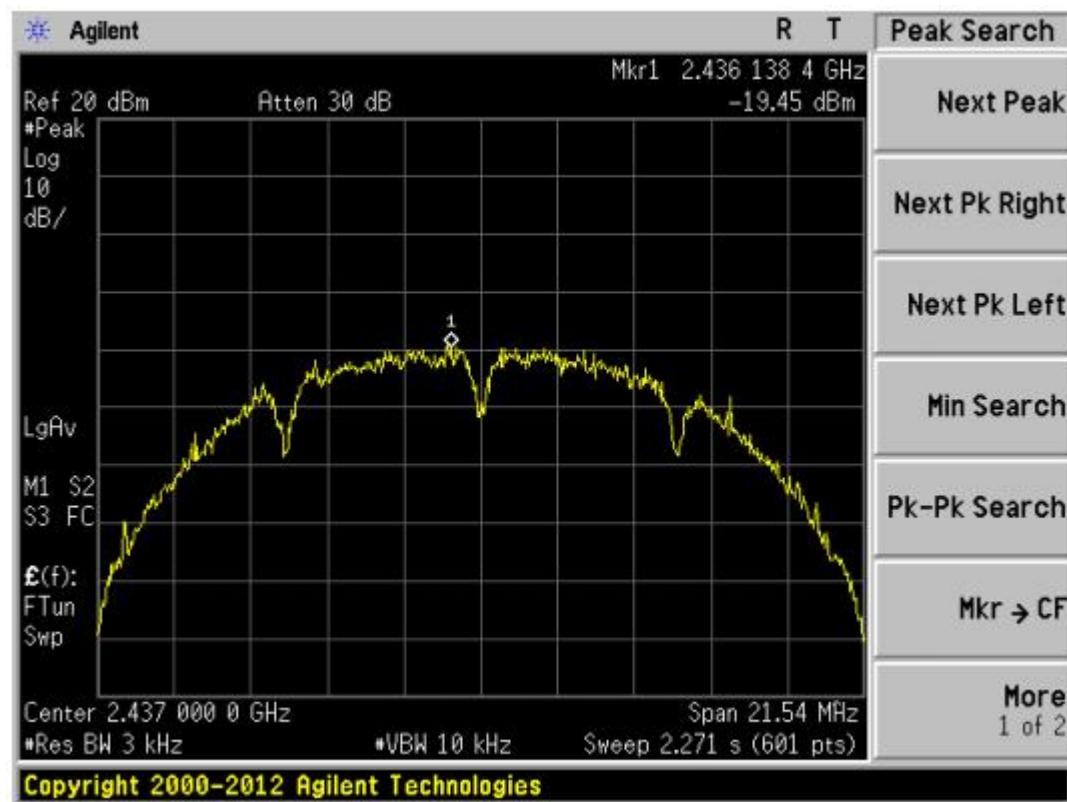


802.11b-2462MHz

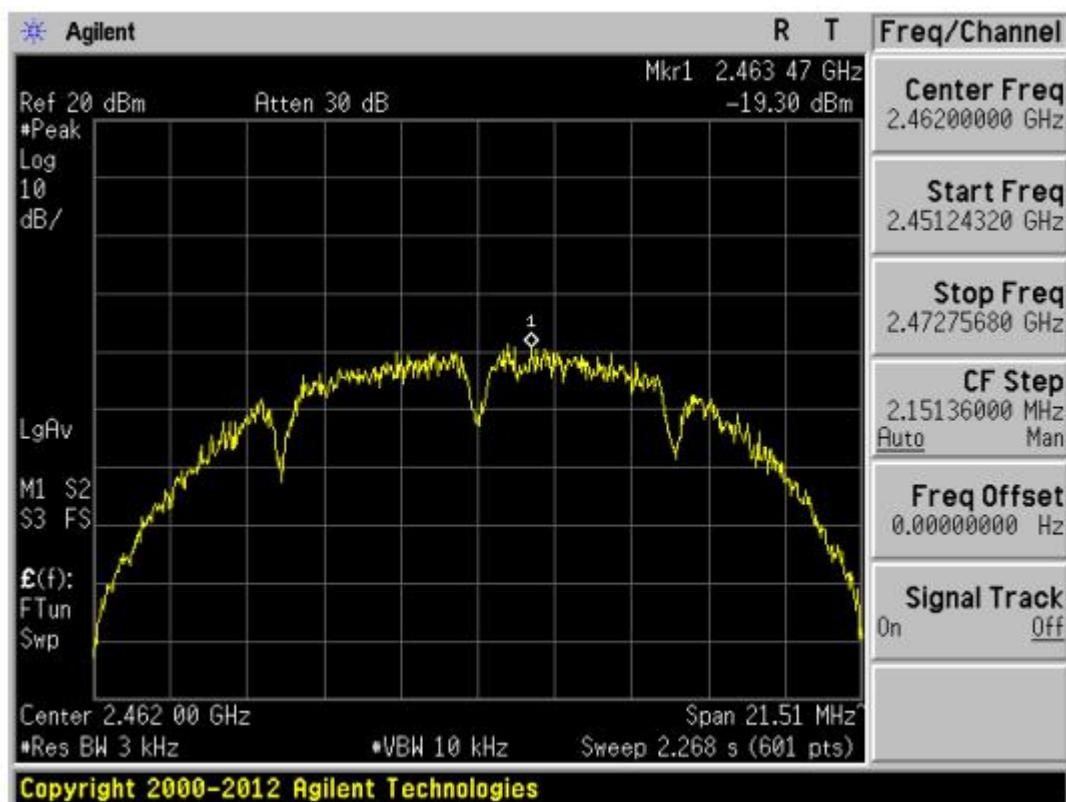


802.11g-2412MHz

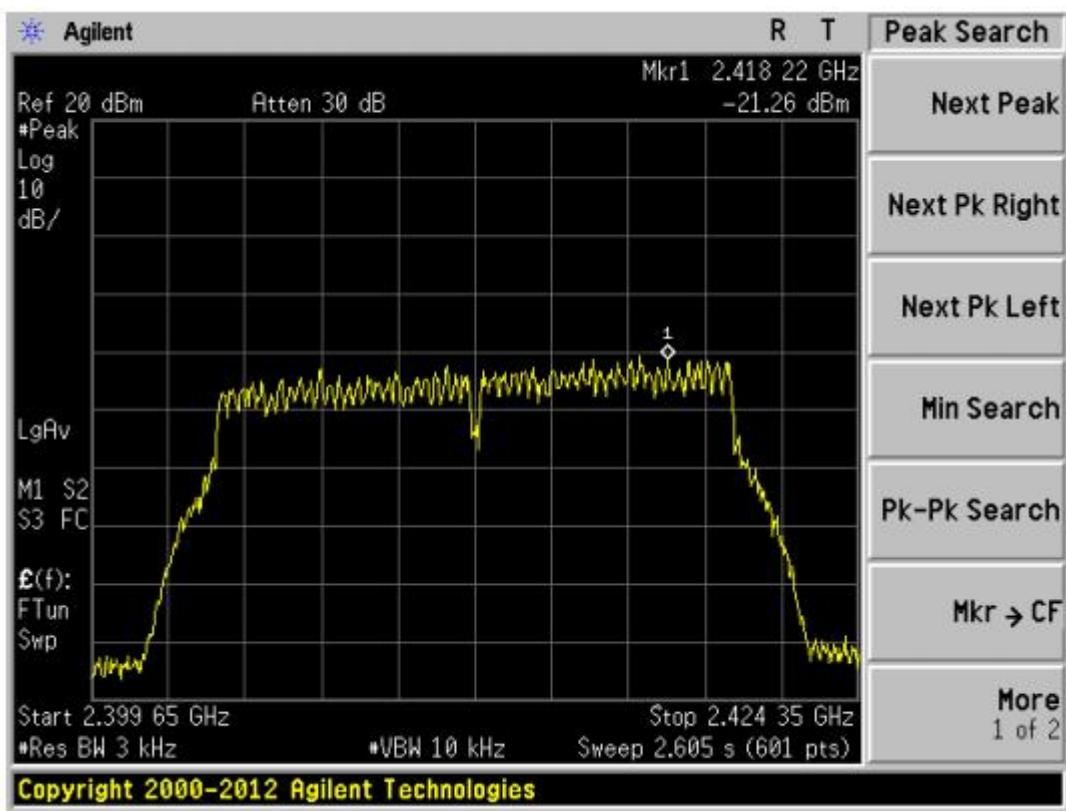


802.11g-2437MHz

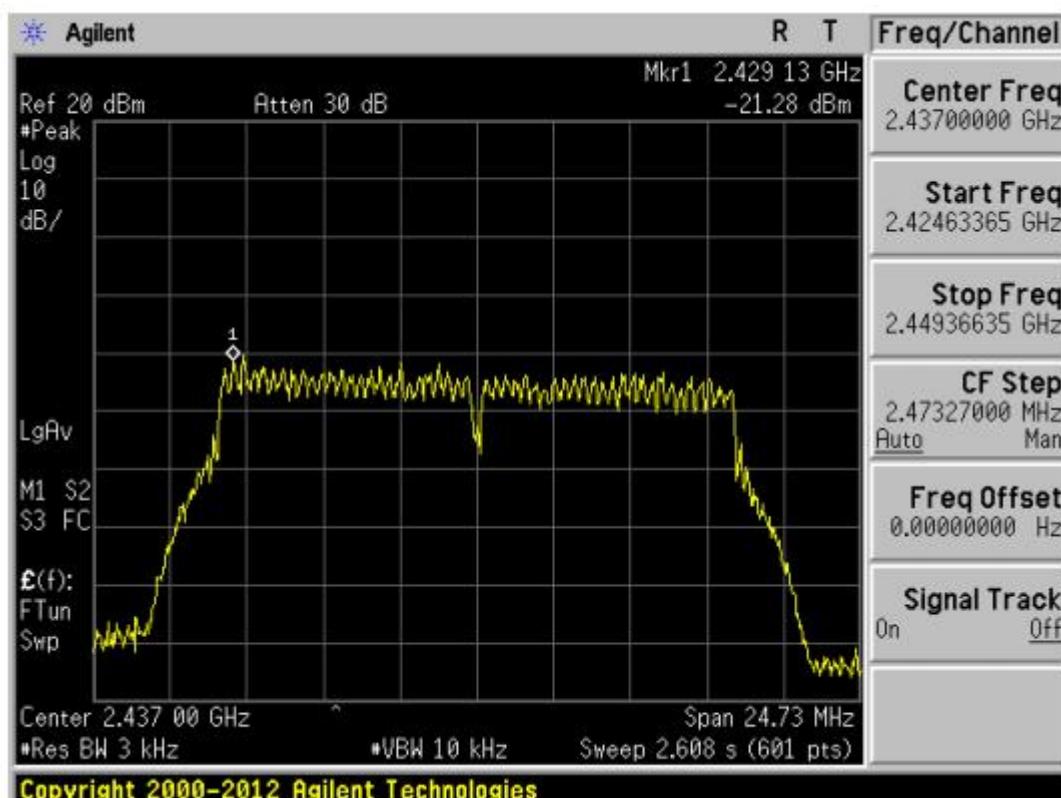


802.11g-2462MHz

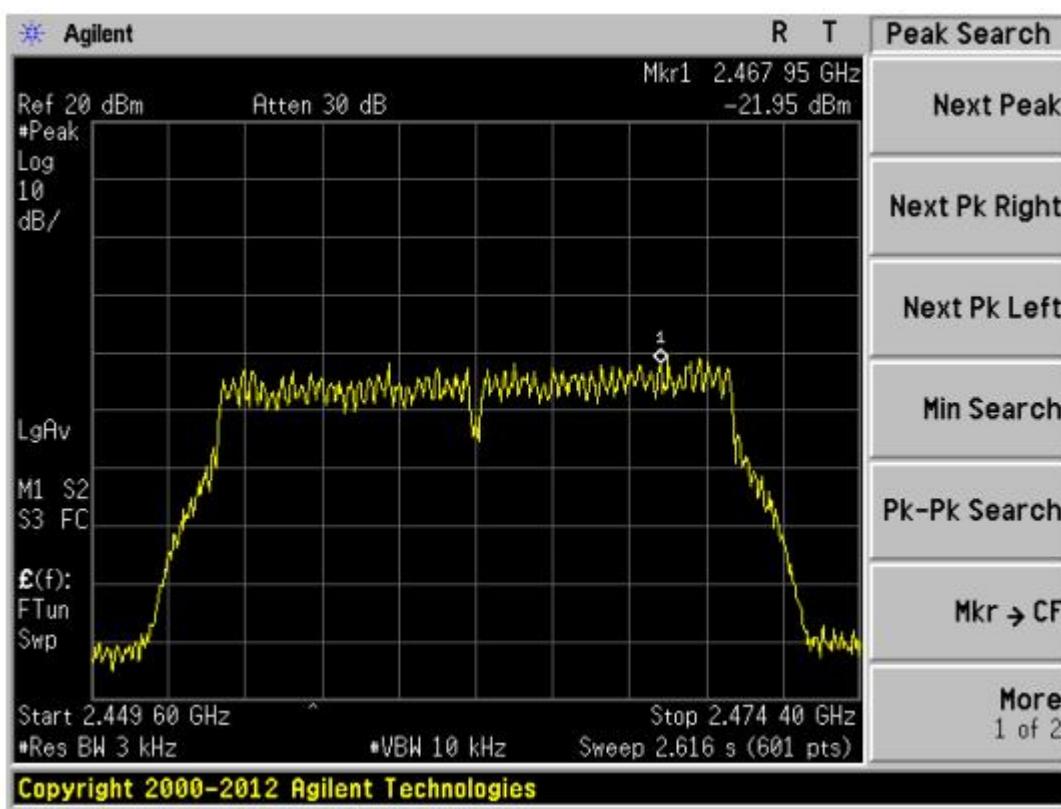


802.11n 20-2412MHz

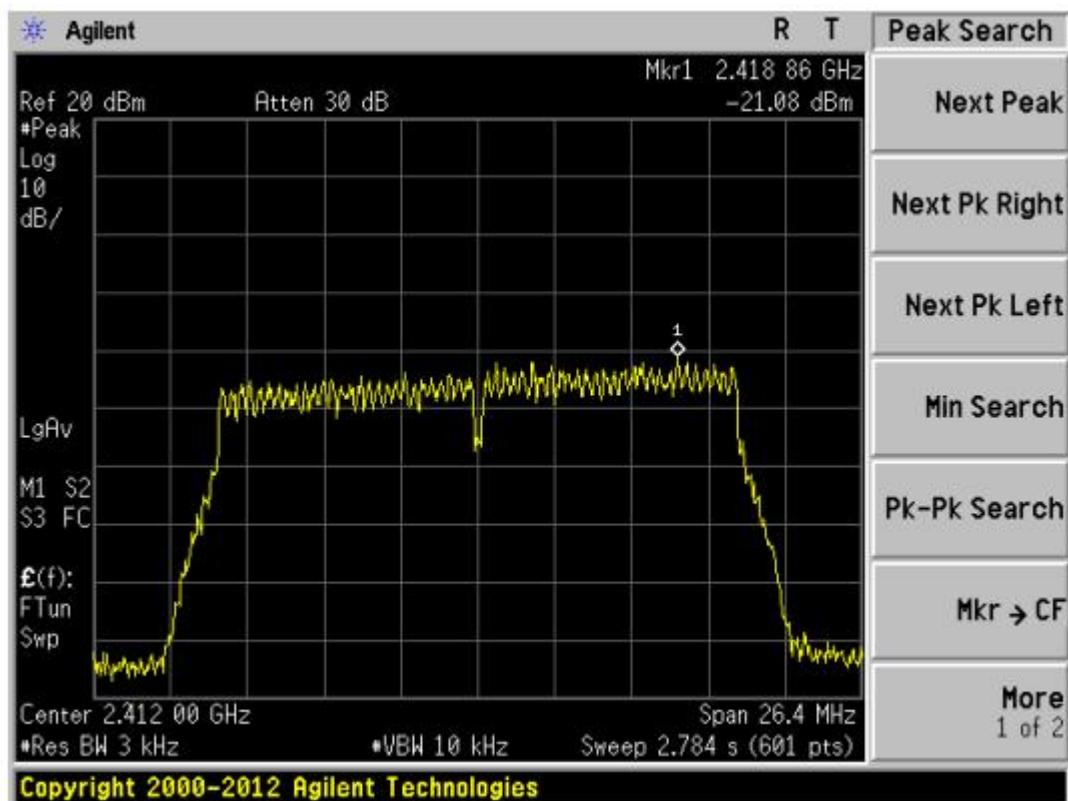


802.11n 20-2437MHz

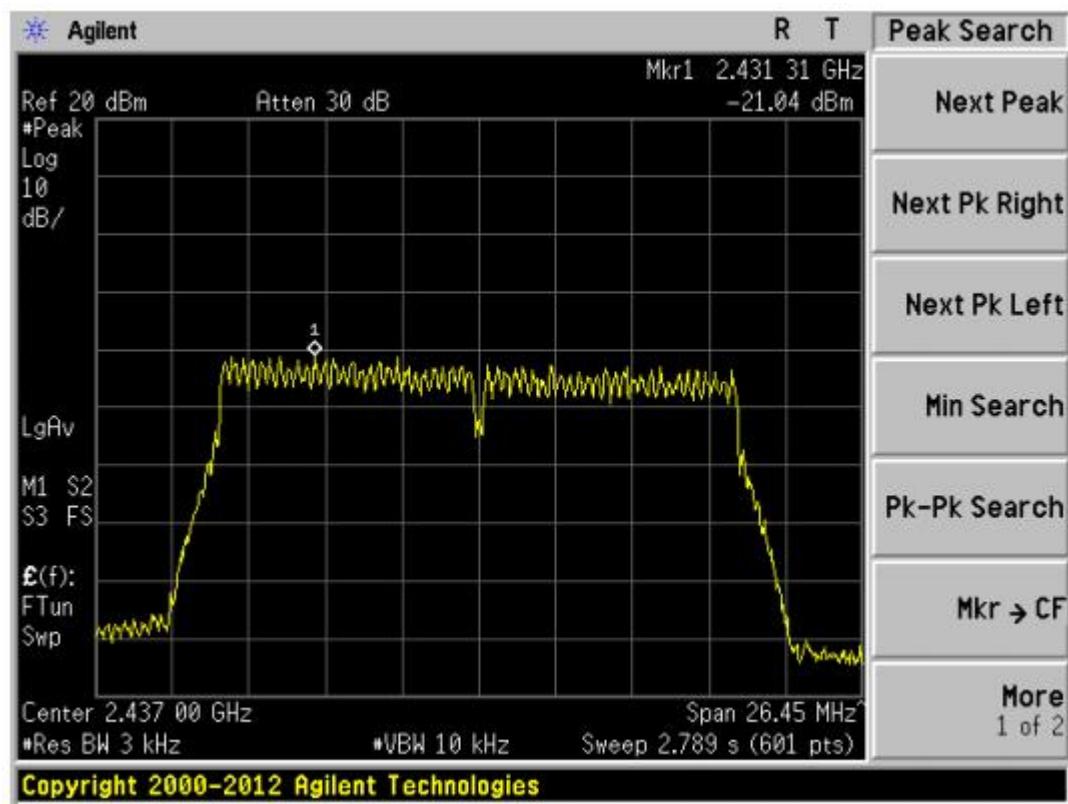


802.11n 20-2462MHz

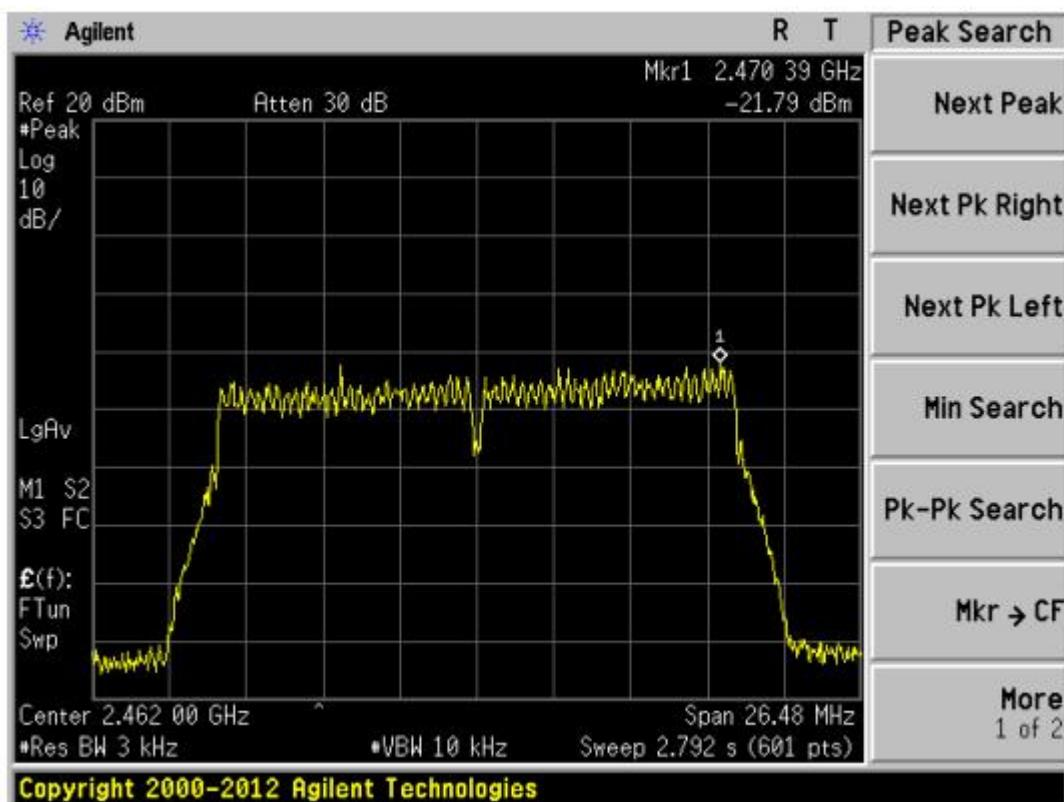


802.11n 40-2422MHz

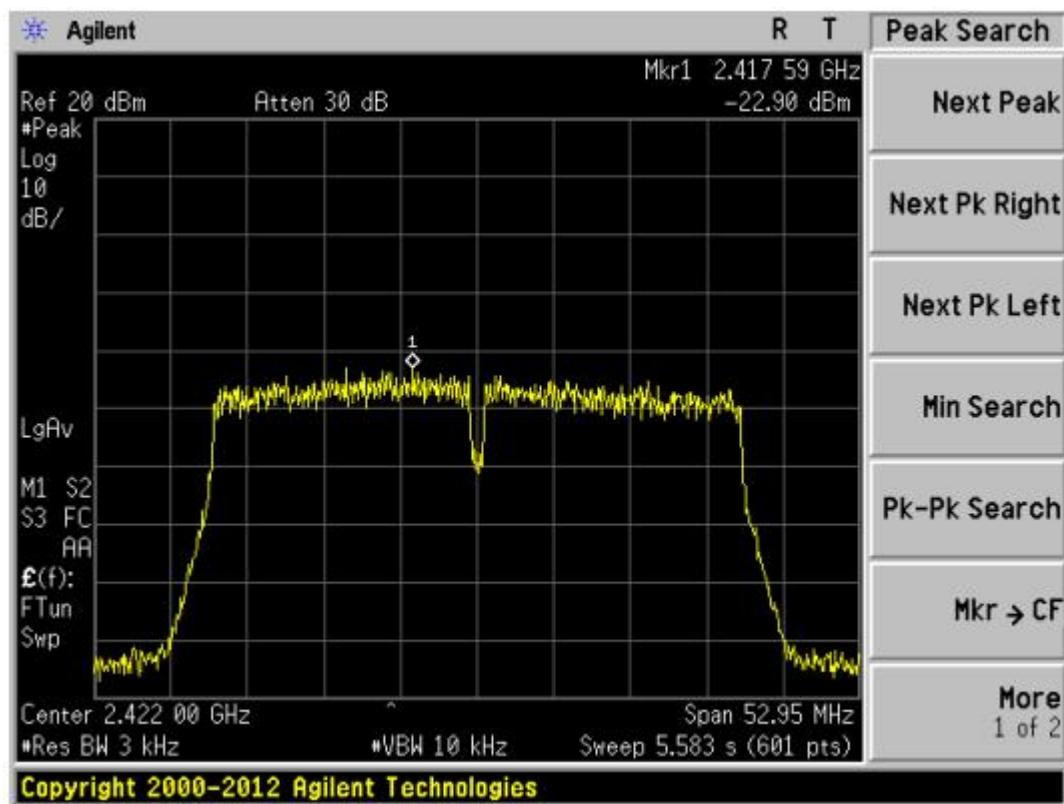

802.11n 40-2437MHz

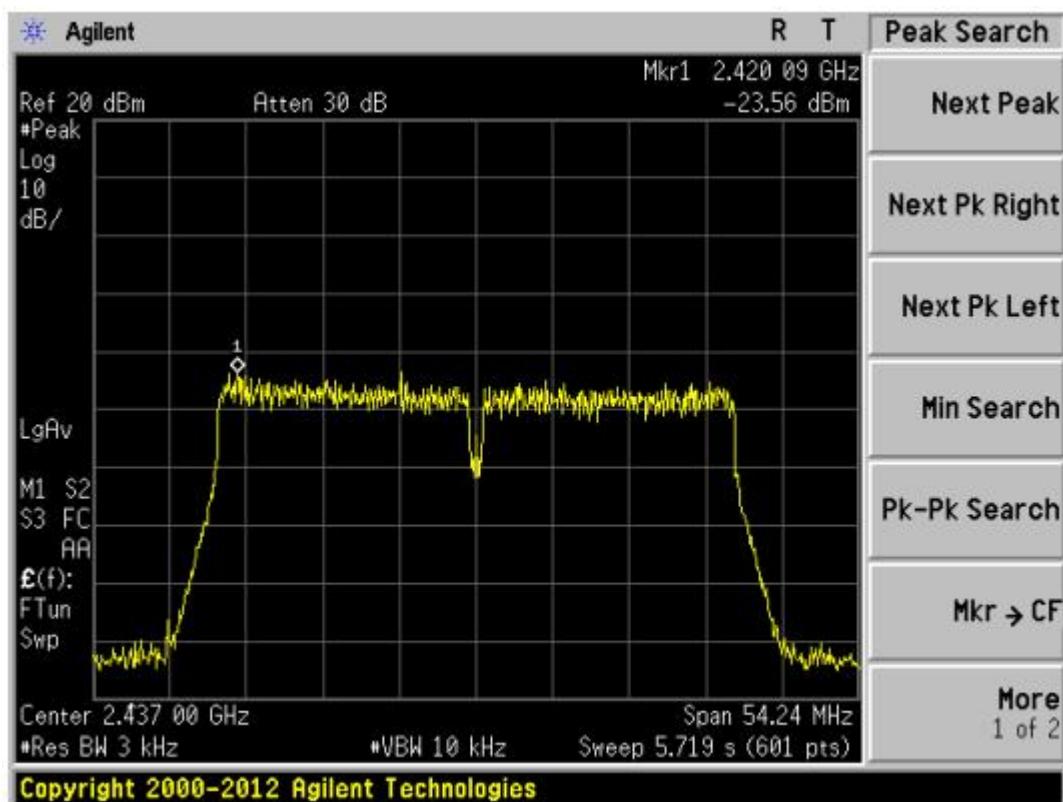

802.11n 40-2452MHz

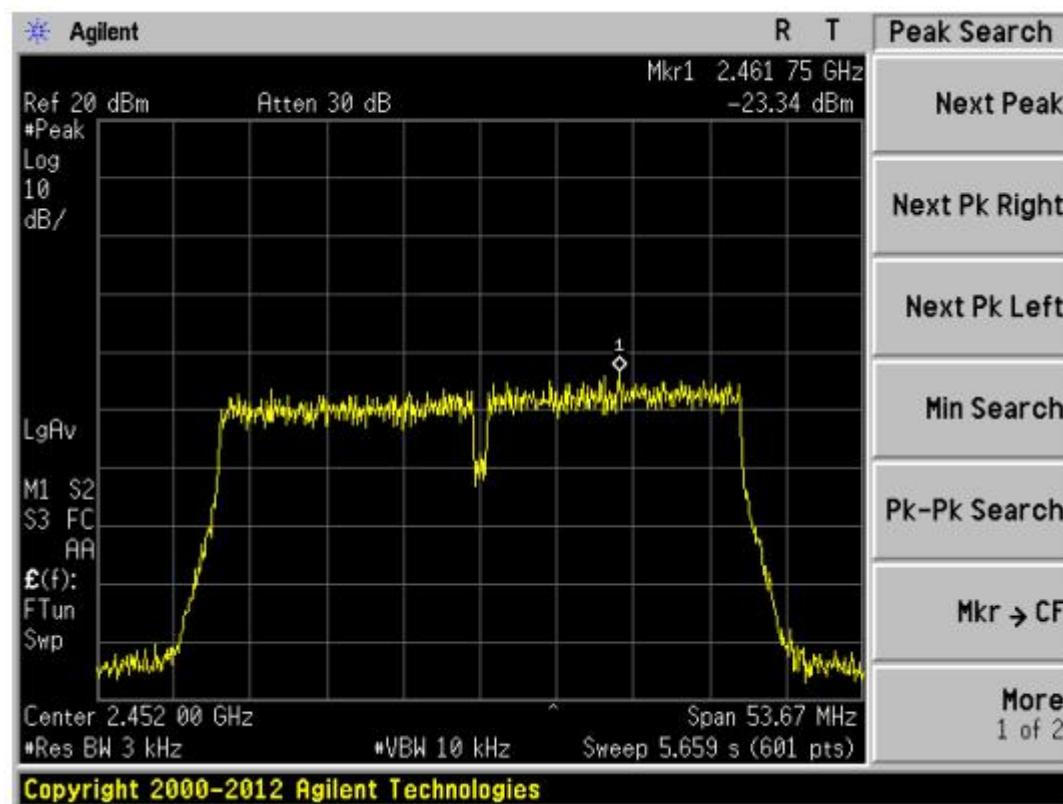

6. Band edge and spurious(conducted)

6.1 LIMIT

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.2 TEST PROCEDURE

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

| | |
|------------------|------------------------------|
| Center frequency | DTS Channel center frequency |
| RBW: | 100kHz |
| VBW: | 300kHz |
| Span | 1.5times the DTS bandwidth |
| Detector Mode: | Peak |
| Sweep time: | auto |
| Trace mode | Max hold |


(3) Establish Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

| | |
|------------------------------|--|
| RBW: | 100kHz |
| VBW: | 300kHz |
| Span | Encompass frequency range to be measured |
| Number of measurement points | \geq span/RBW |
| Detector Mode: | Peak |
| Sweep time: | auto |
| Trace mode | Max hold |

(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

6.3 TEST SETUP

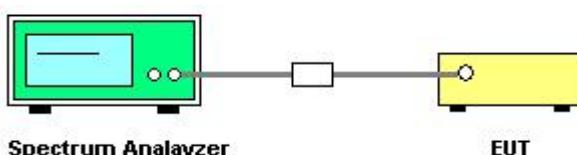


6.5 TEST RESULTS


| Eut set mode | CH or Frequency | Result |
|--------------|-----------------|--------|
| 802.11b | CH1 | Pass |
| | CH11 | Pass |
| 802.11g | CH1 | Pass |
| | CH11 | Pass |
| 802.11n 20 | CH1 | Pass |
| | CH11 | Pass |
| 802.11n 40 | CH3 | Pass |
| | CH9 | Pass |

6.5 Original test data


802.11b Low CH

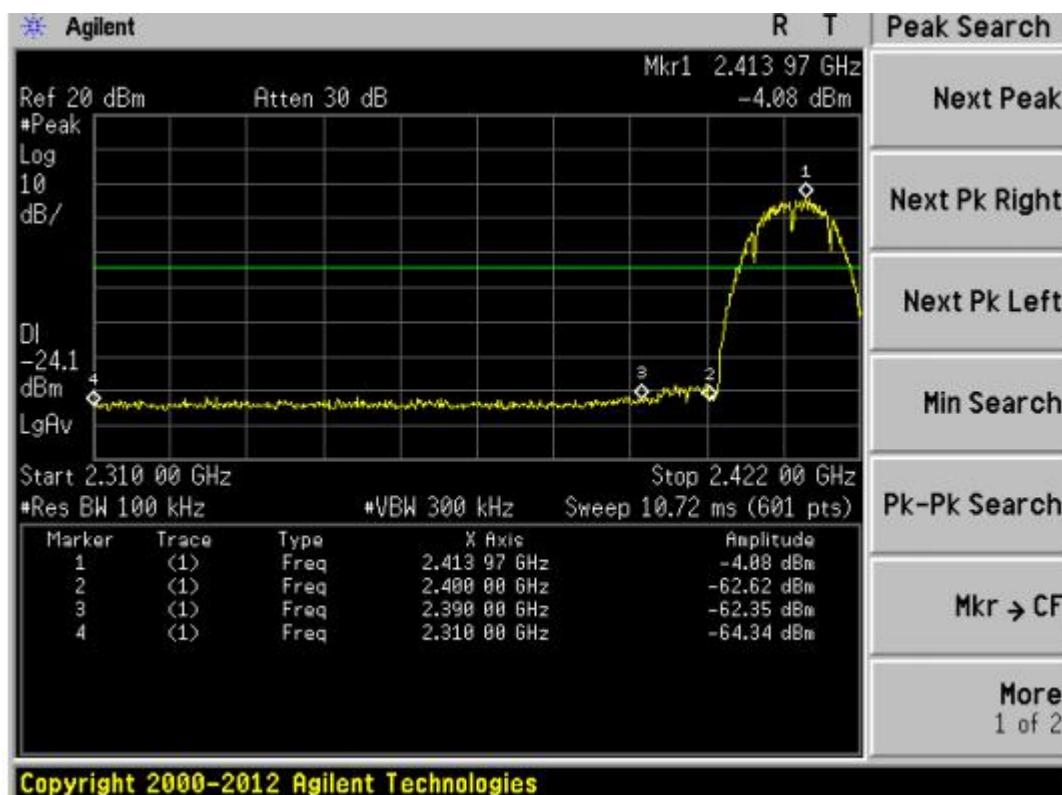


802.11b High CH

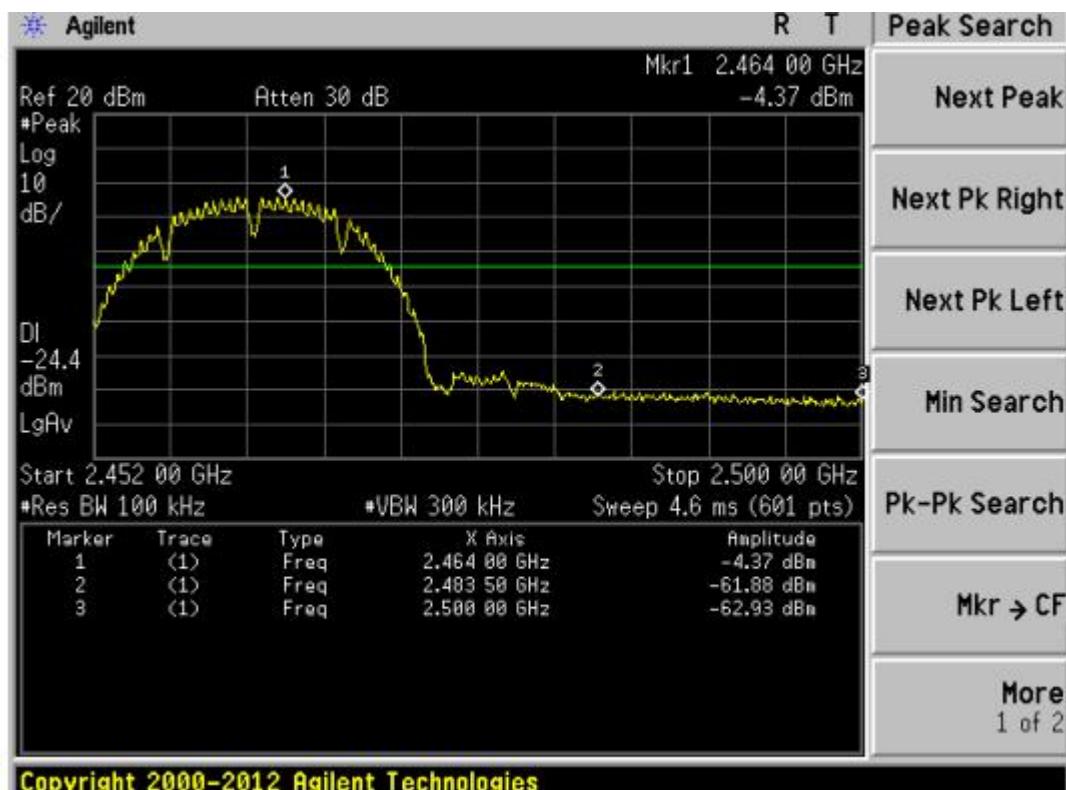


802.11g low CH

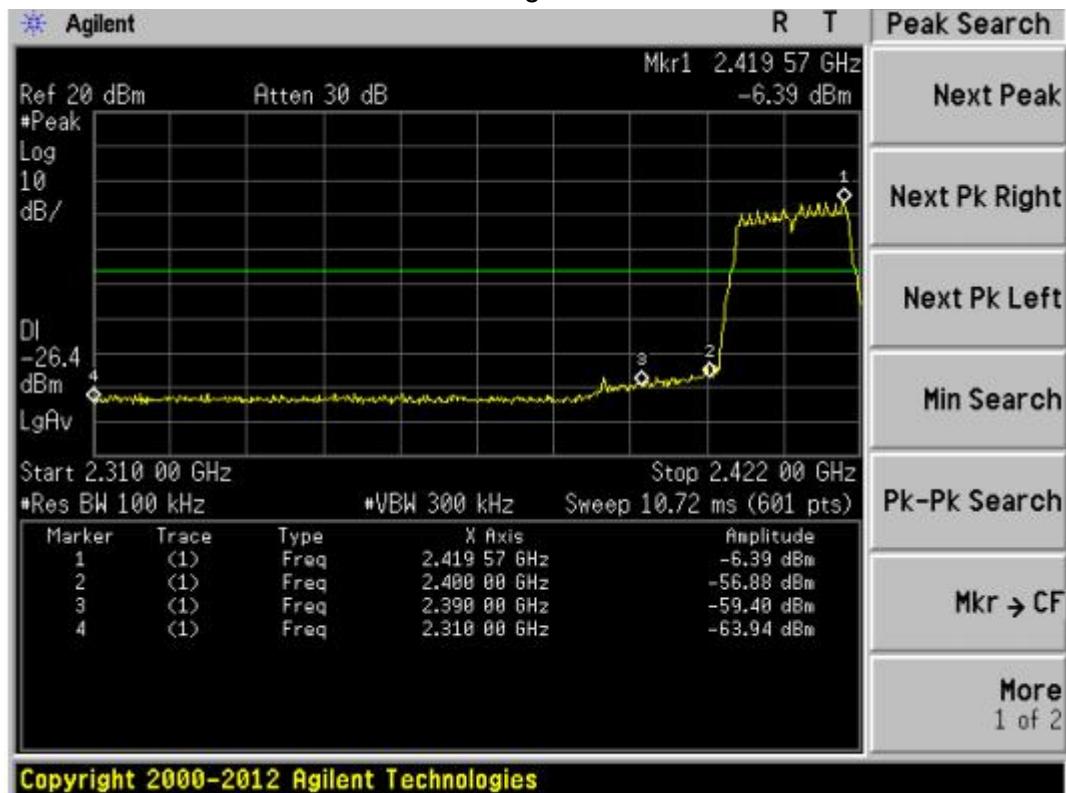


802.11g high CH

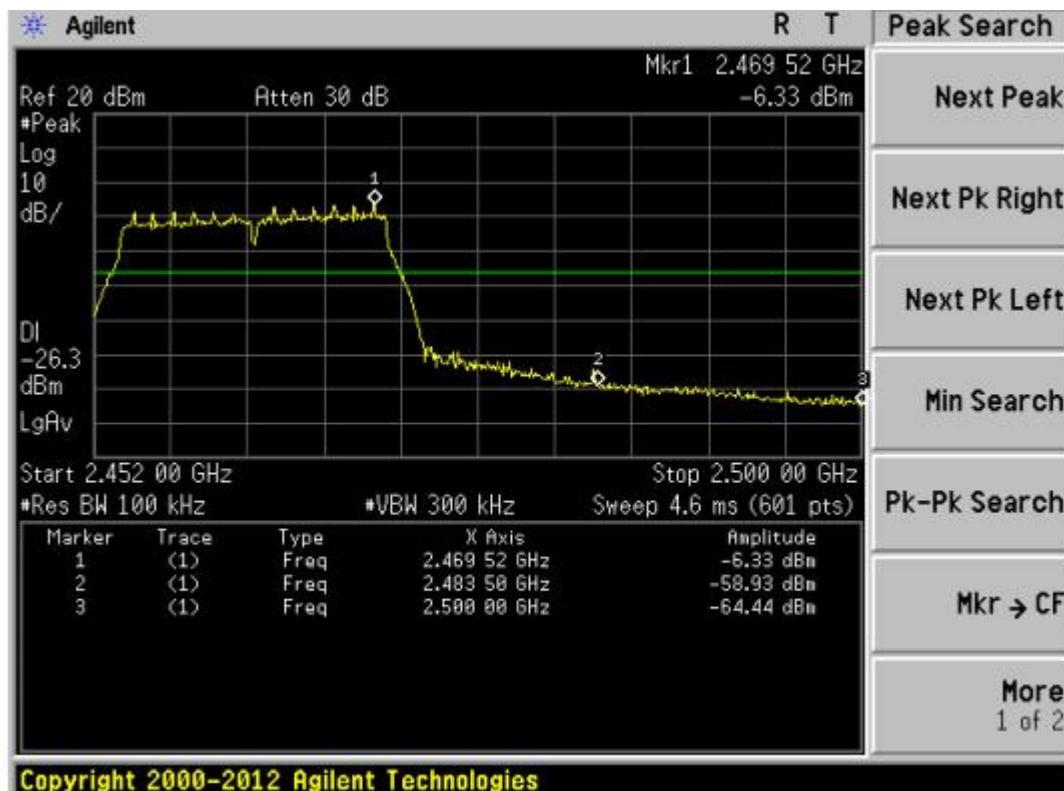


802.11n20 Low CH

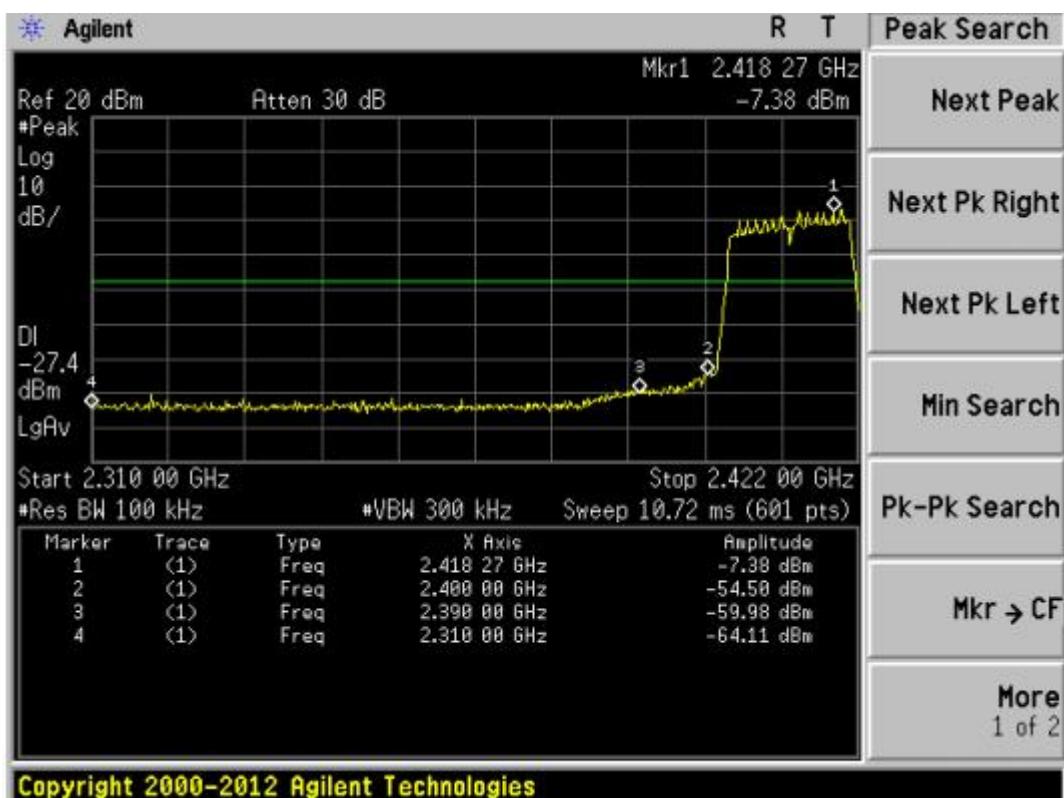


802.11n20 High CH

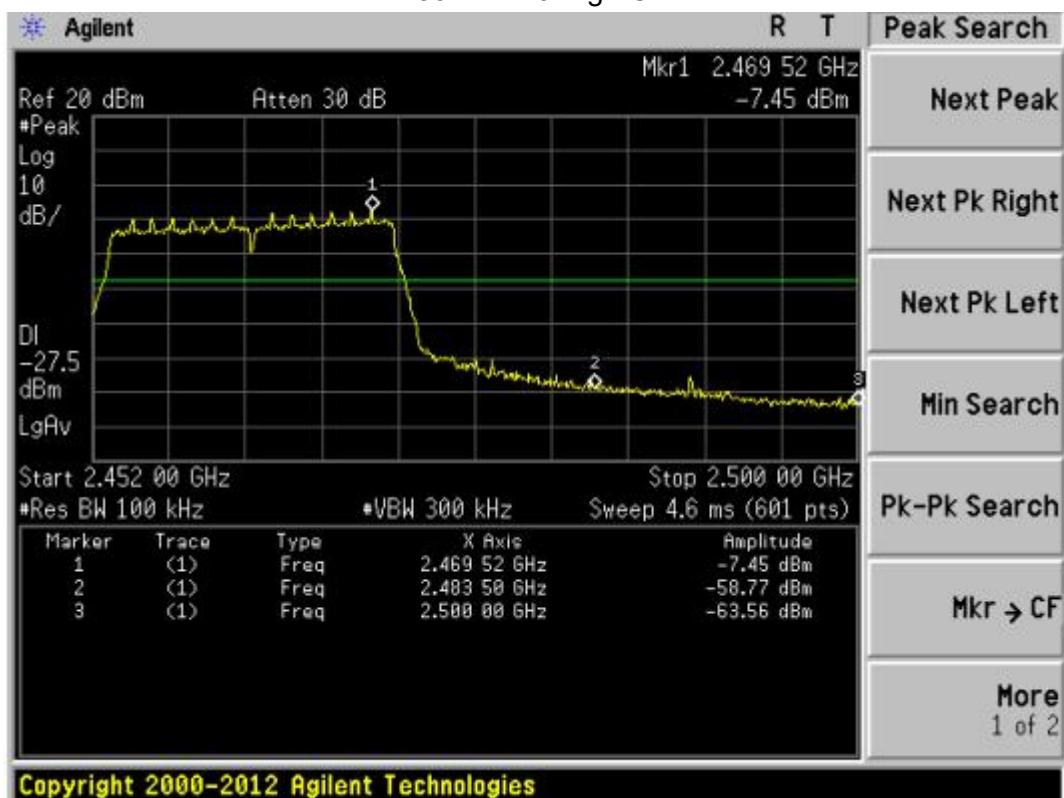

802.11n40 Low CH

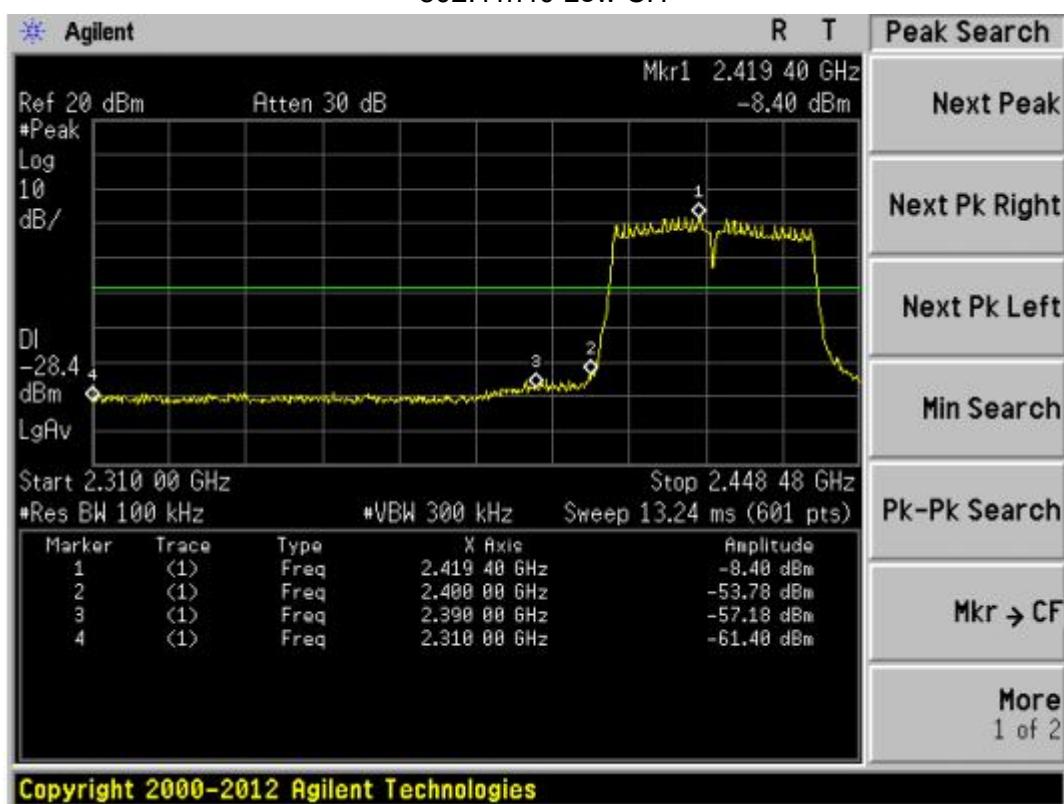


802.11n40 High CH

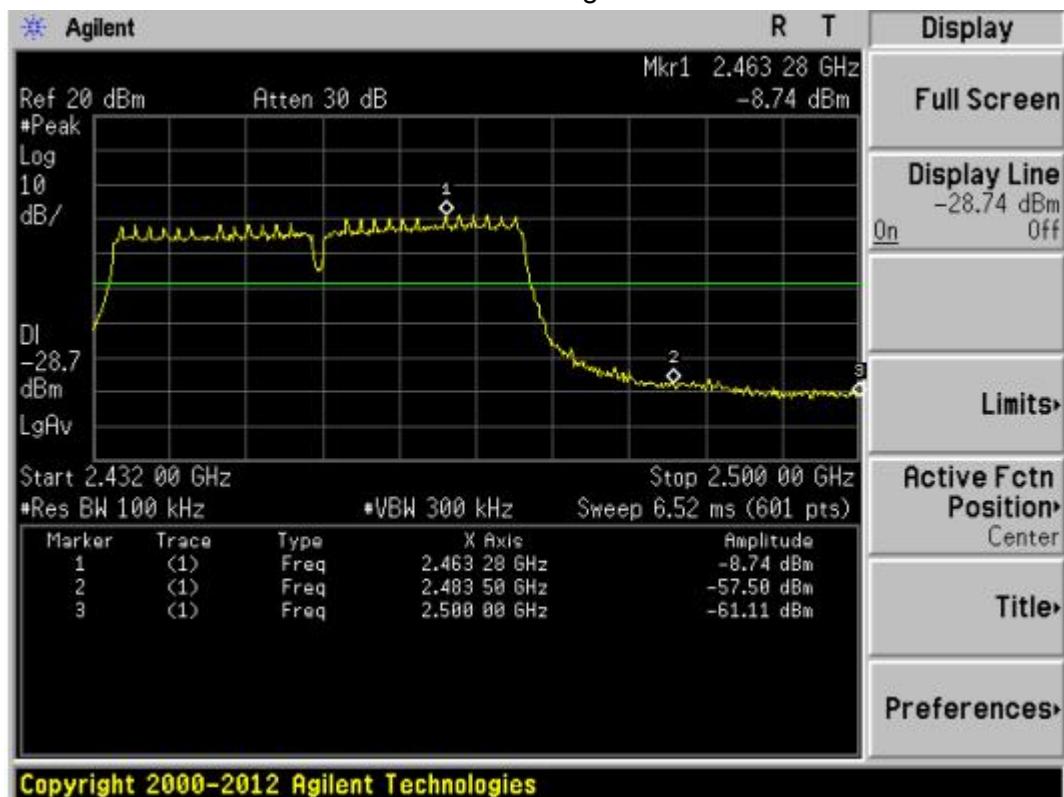


Spurious emissions
(802.11b)


802.11b low CH, 2412MHz
30MHz-25GHz

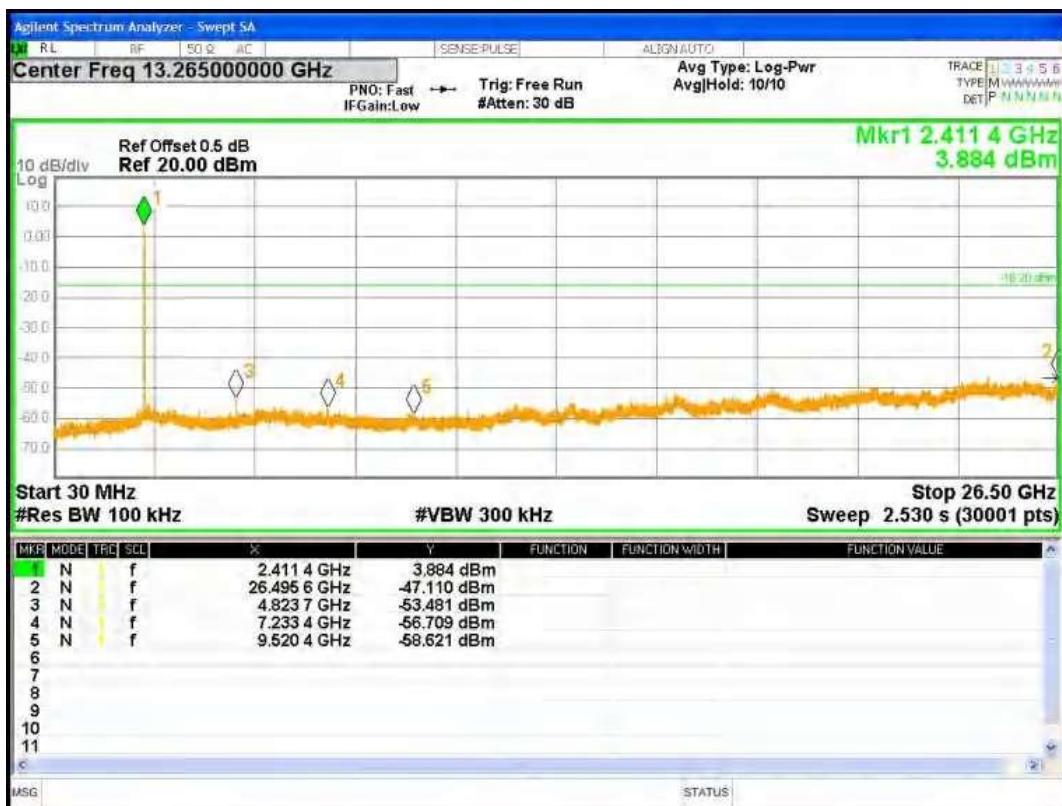

802.11b Middle CH, 2437MHz
30MHz-25GHz

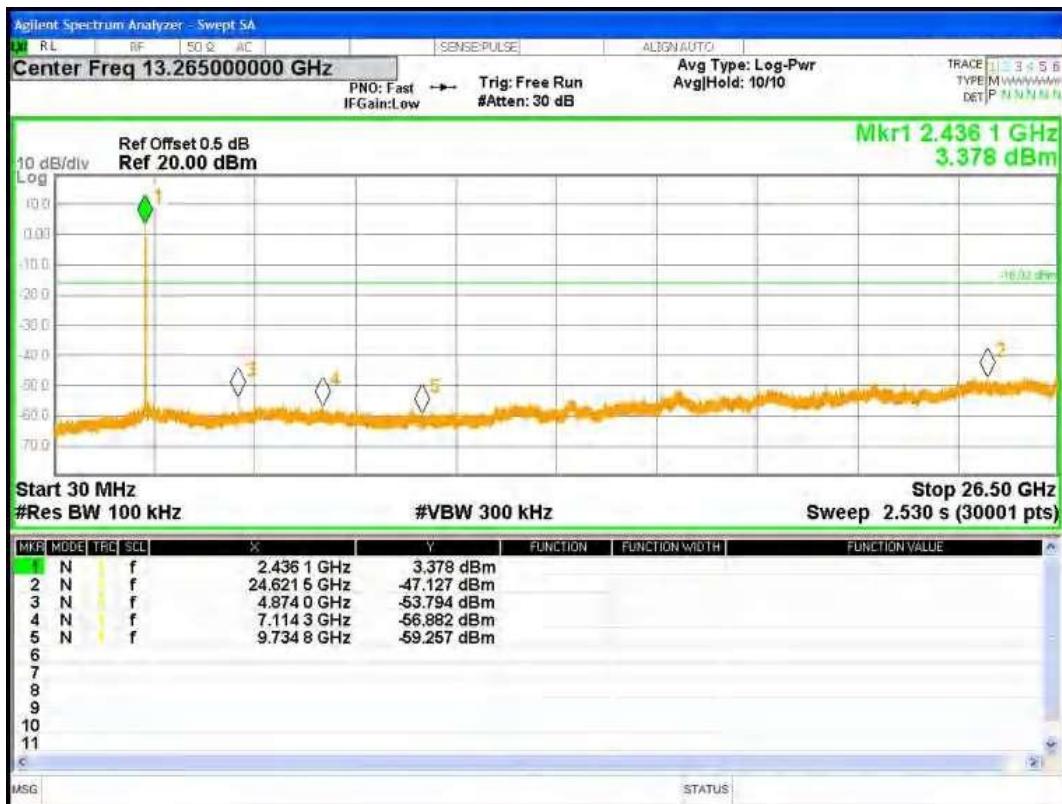


802.11b High CH, 2462MHz
30MHz-25GHz

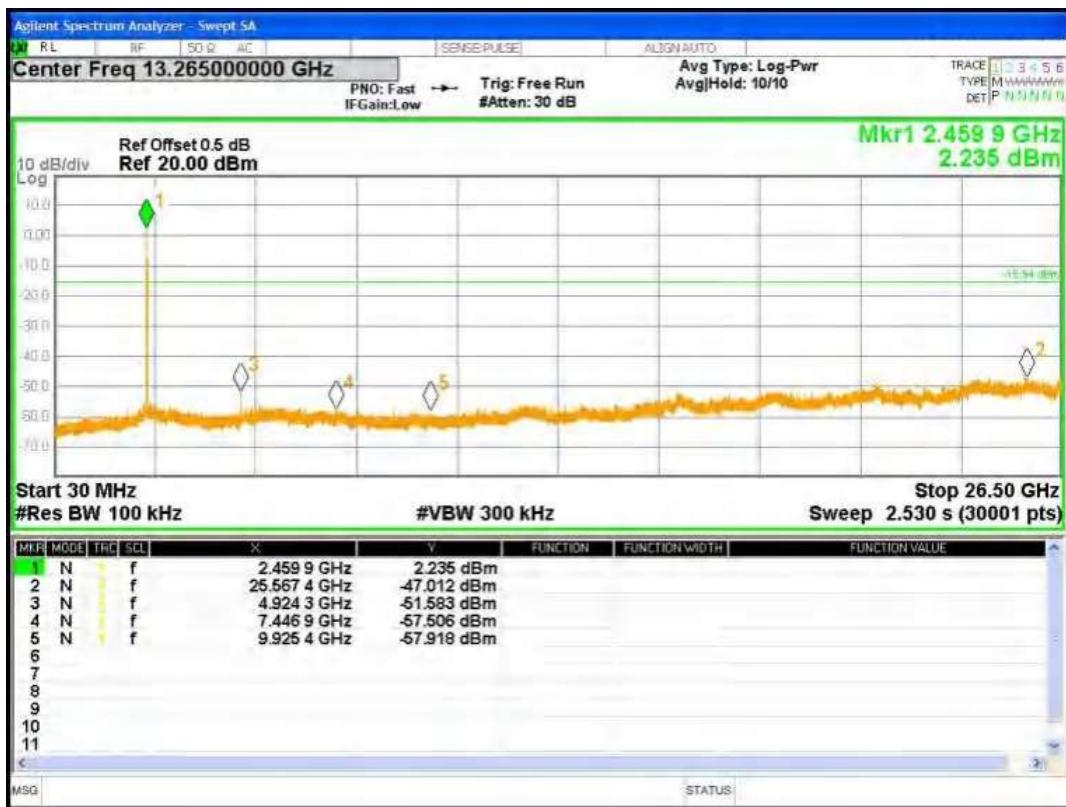


(802.11g)


802.11g Low CH, 2412MHz
30MHz-10GHz

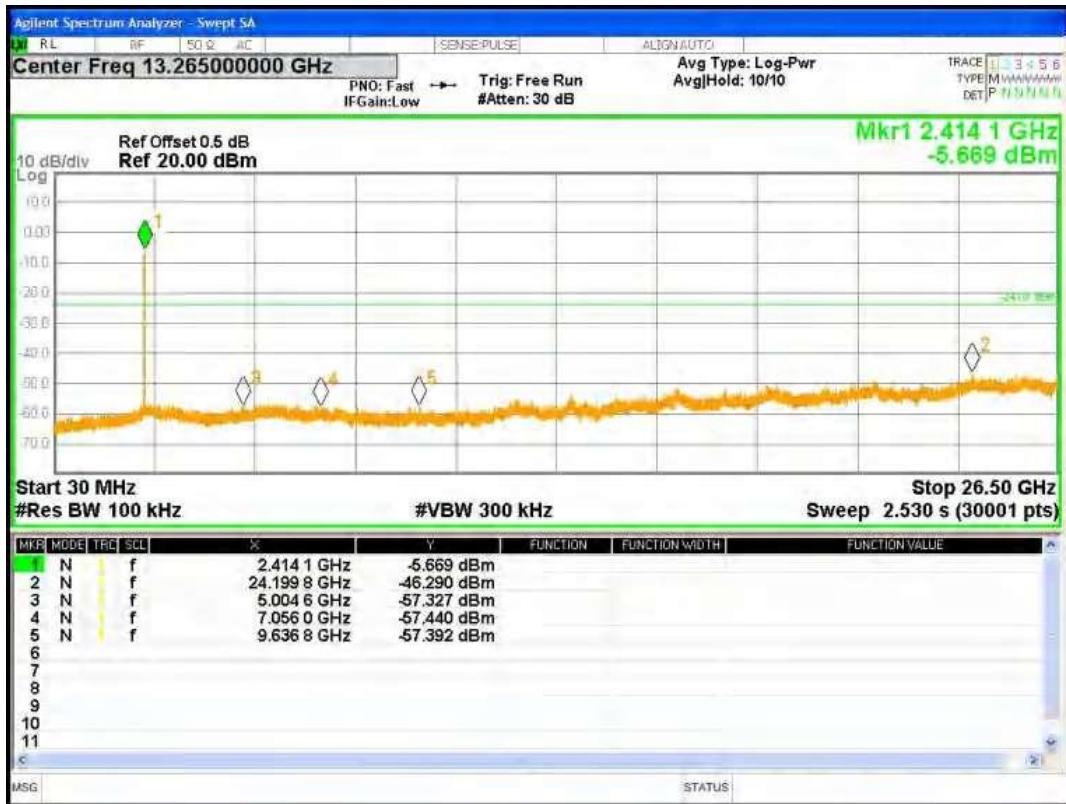


802.11g Middle CH, 2437MHz
30MHz-25GHz

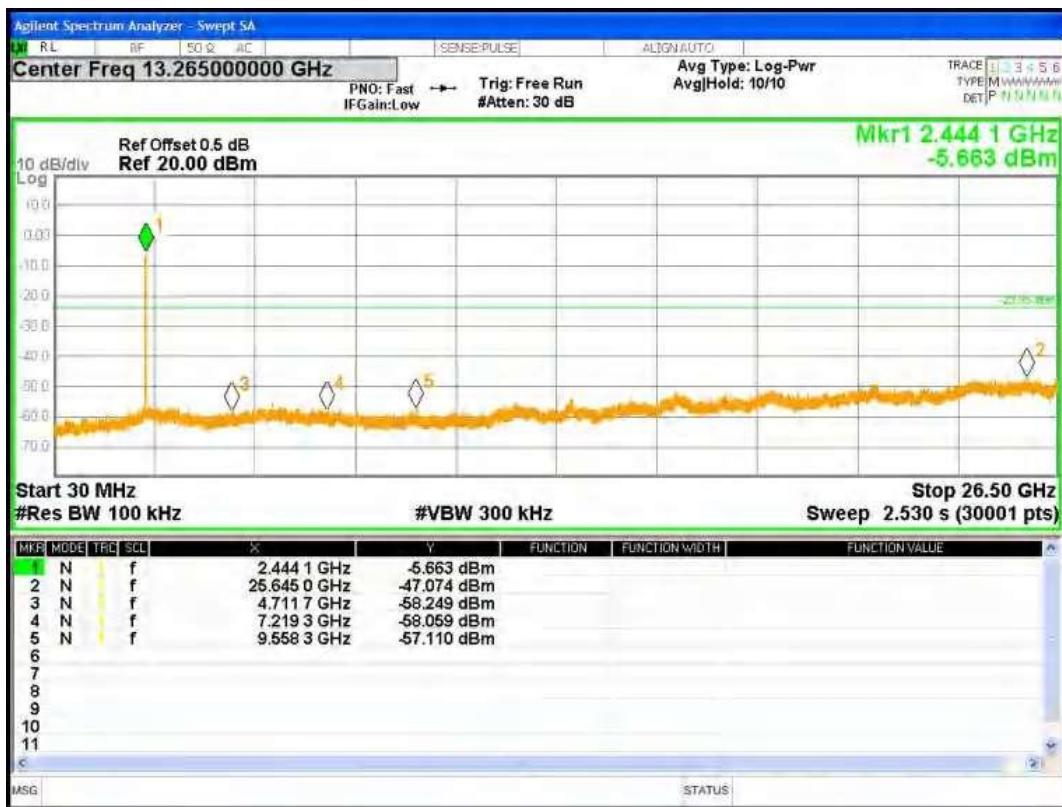


802.11g High CH, 2462MHz
30MHz-25GHz

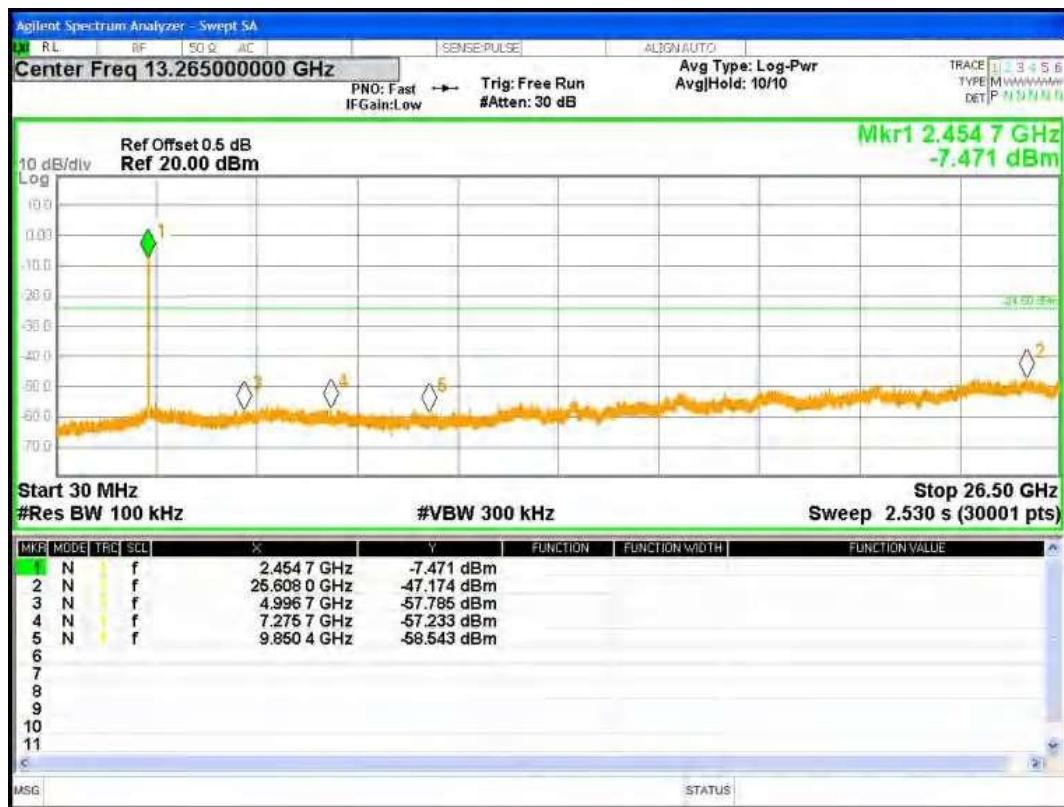


802.11n 20 Low CH, 2412MHz
30MHz-25GHz

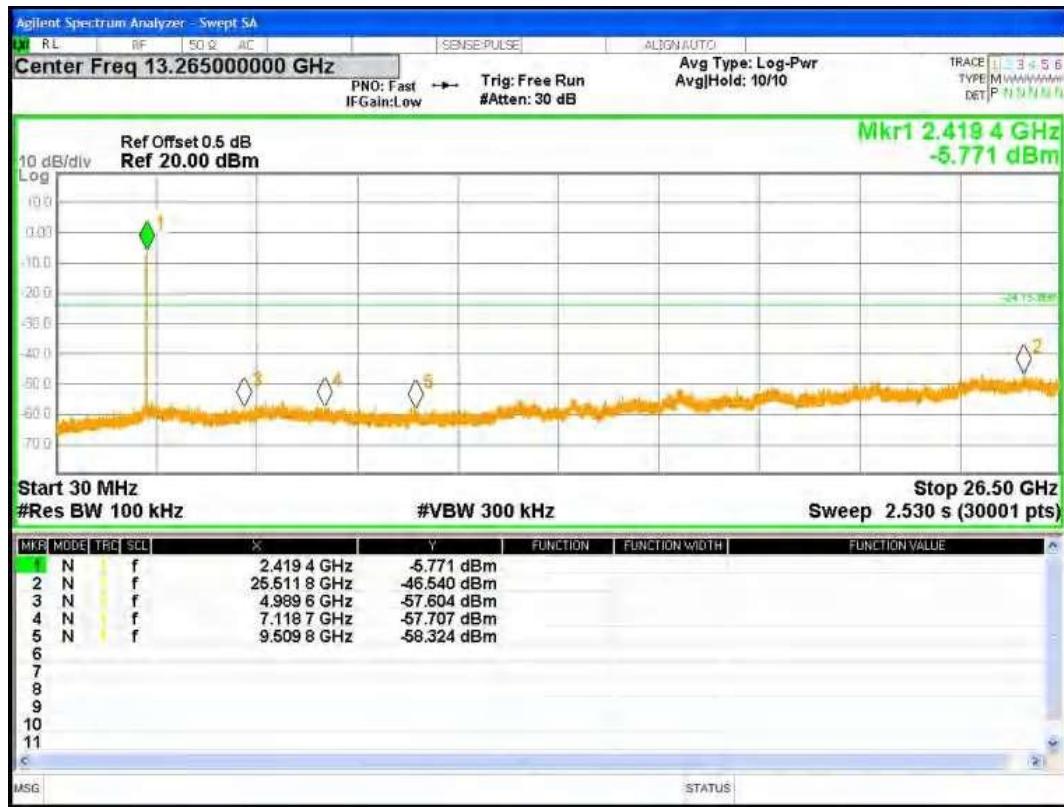


802.11n 20 Middle CH, 2437MHz
30MHz-25GHz

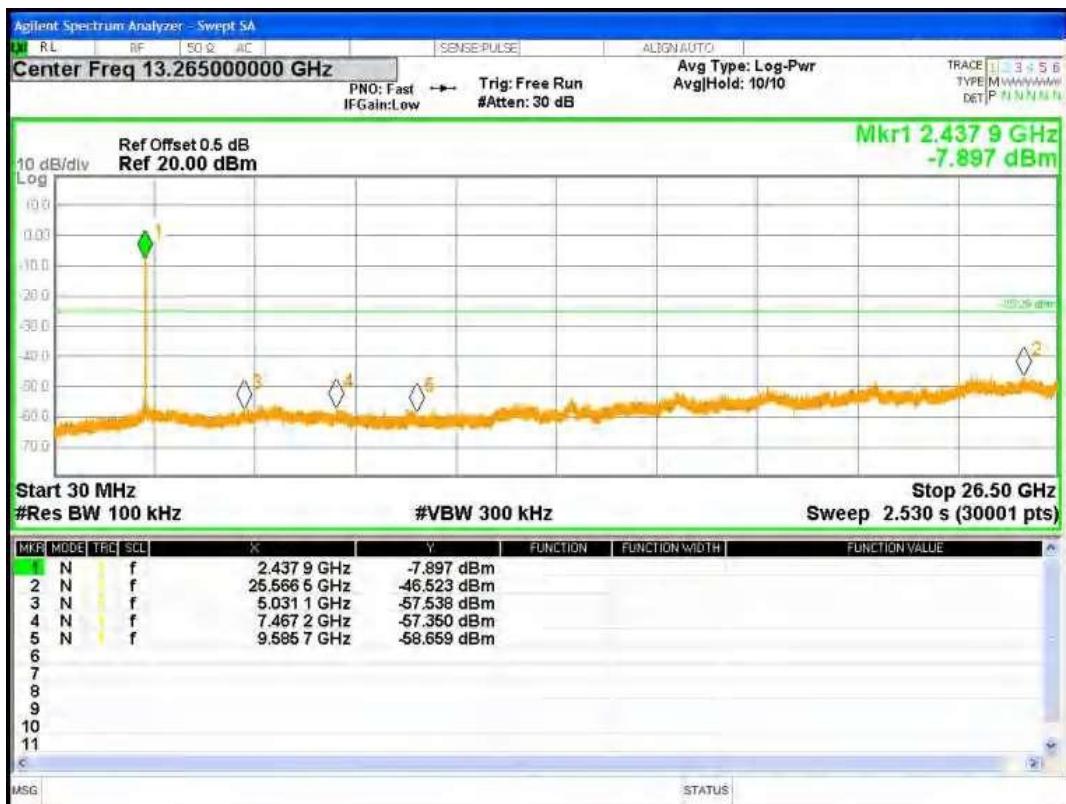


802.11n 20 High CH, 2462MHz
30MHz-25GHz

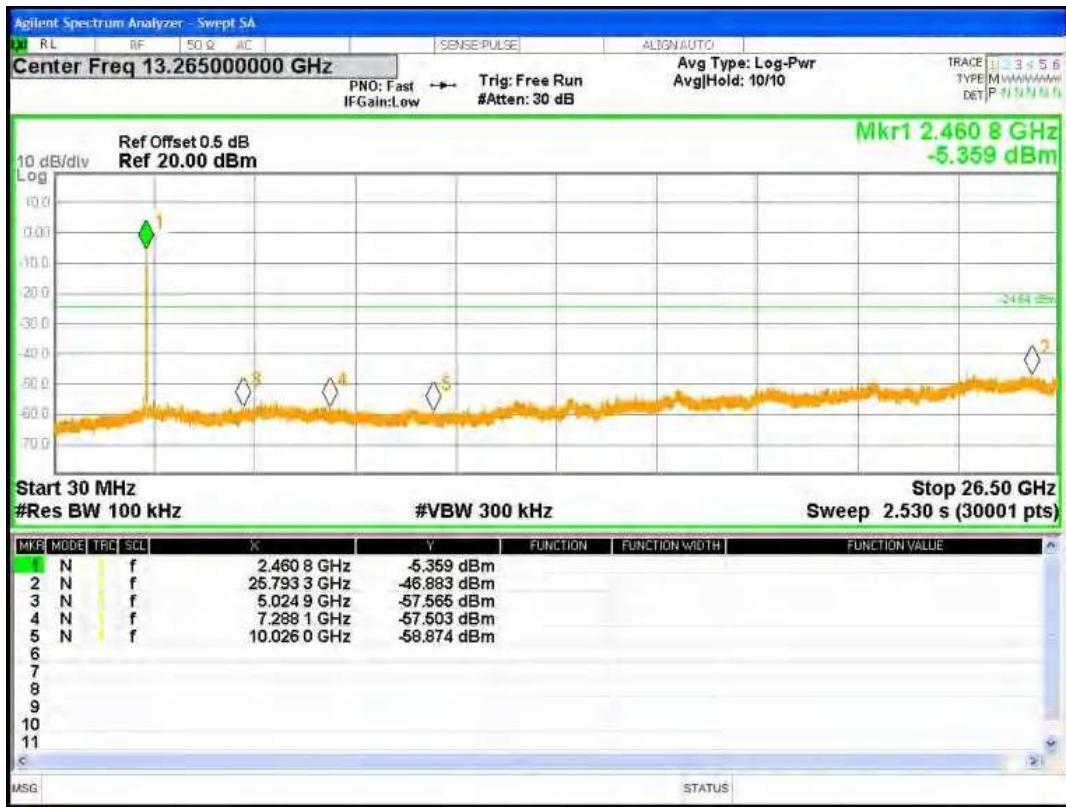


802.11n 40 Low CH, 2422MHz
30MHz-25GHz

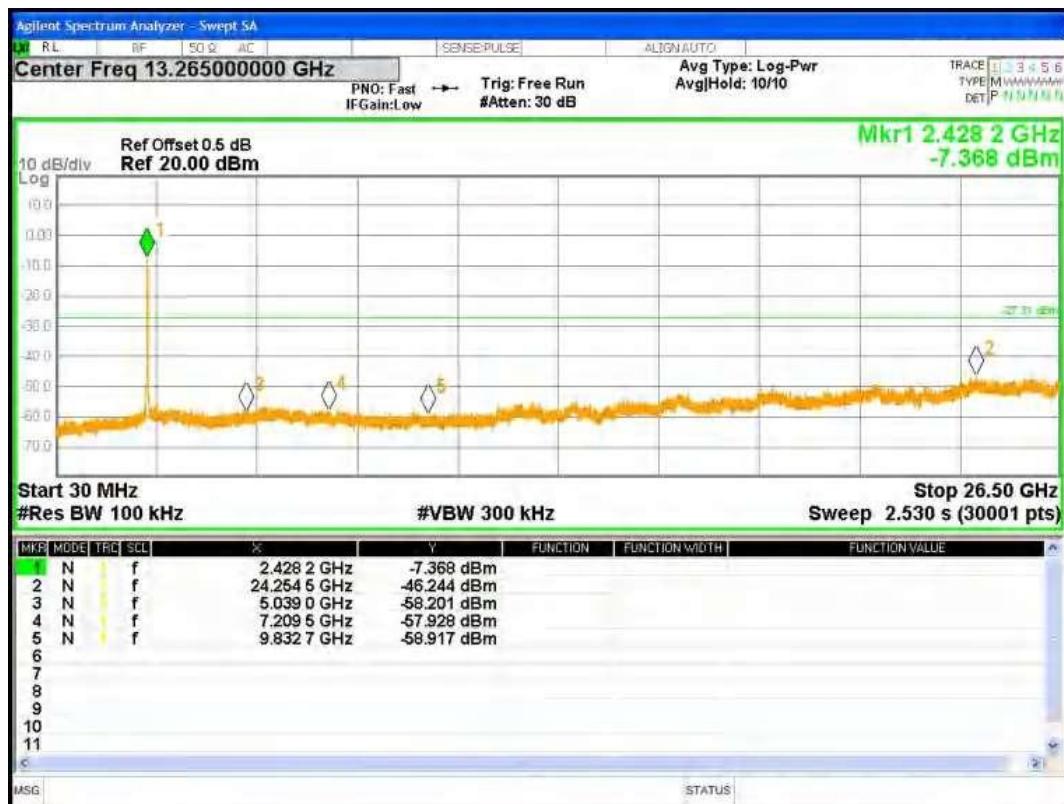

802.11n 40 Middle CH, 2437MHz
30MHz-25GHz

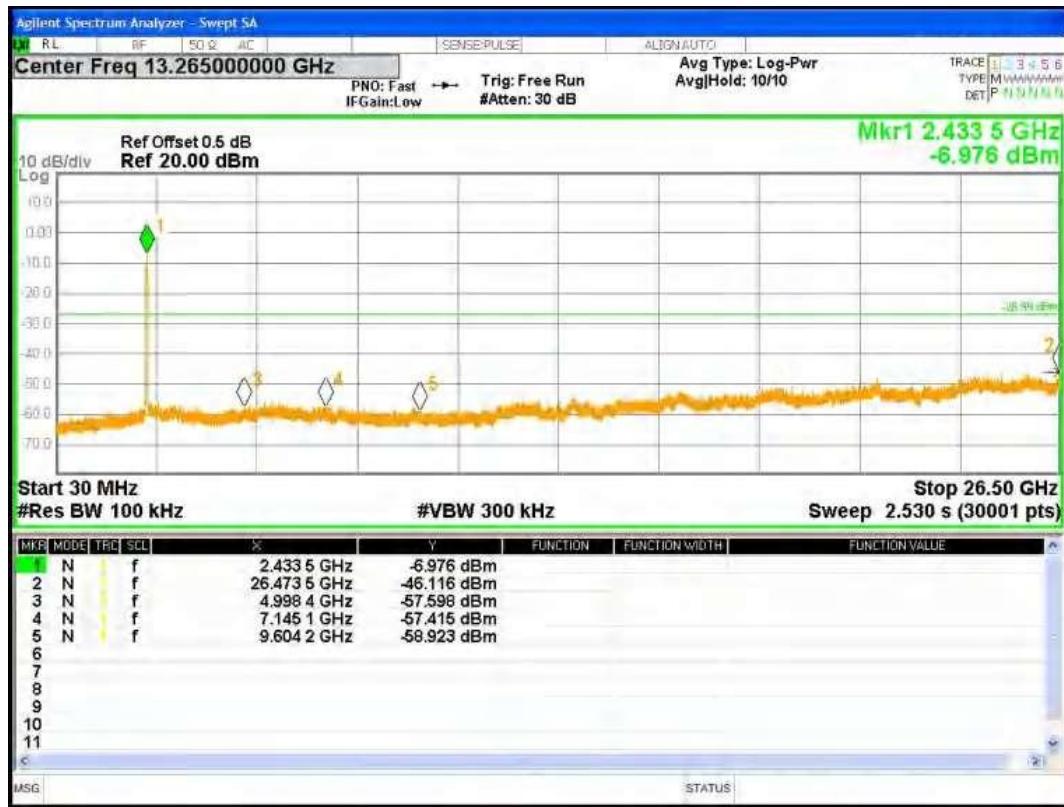

802.11n 40 High CH, 2452MHz
30MHz-25GHz

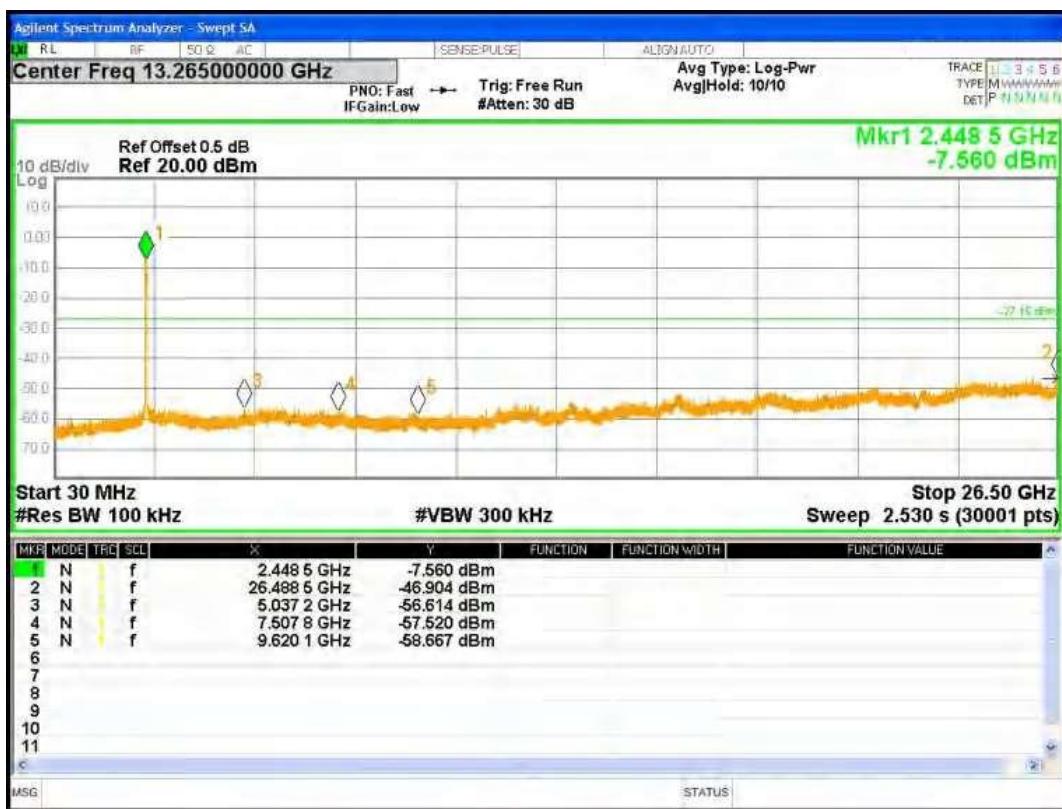

7 RADIATED EMISSION MEASUREMENT

7.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

| FREQUENCY (MHz) | (dBuV/m) (at 3M) | |
|-----------------|------------------|---------|
| | PEAK | AVERAGE |
| Above 1000 | 74 | 54 |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

For Radiated Emission

| Spectrum Parameter | Setting |
|---------------------------------------|----------------------------------|
| Attenuation | Auto |
| Detector | Peak/AV |
| Start Frequency | 1000 MHz(Peak/AV) |
| Stop Frequency | 10th carrier hamonic(Peak/AV) |
| RB / VB (emission in restricted band) | PK=1MHz / 1MHz, AV=1 MHz / 10 Hz |

For Band edge

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Detector | Peak/AV |
| Start/Stop Frequency | Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz |
| RB / VB (emission in restricted band) | PK=1MHz / 1MHz, AV=1 MHz / 10 Hz |

| Receiver Parameter | Setting |
|------------------------|--------------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 90kHz~110kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 110kHz~490kHz / RB 200Hz for PK & AV |
| Start ~ Stop Frequency | 490kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

7.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

7.3 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

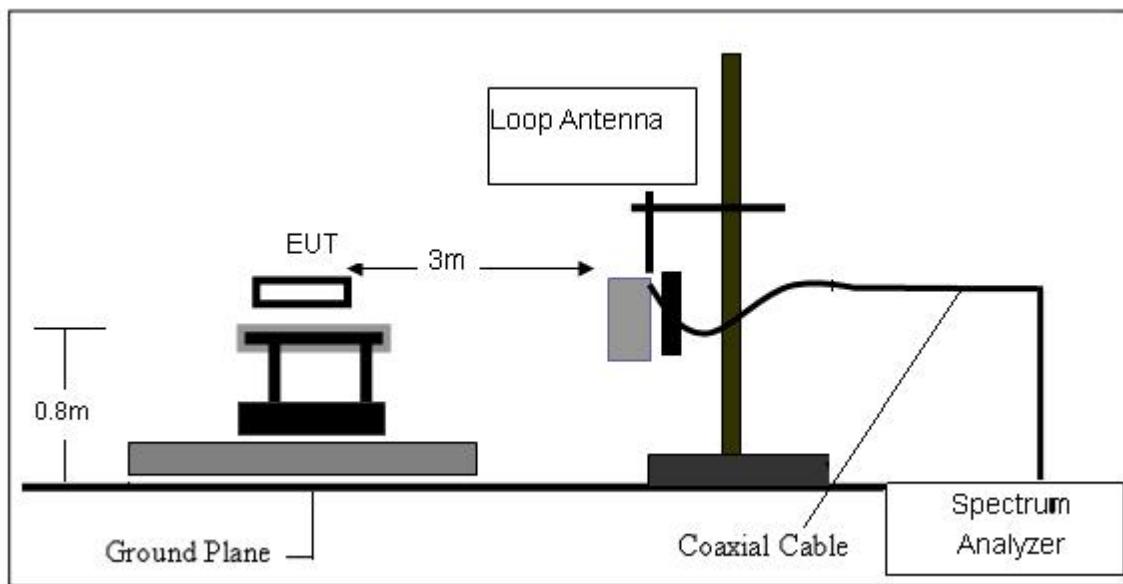

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

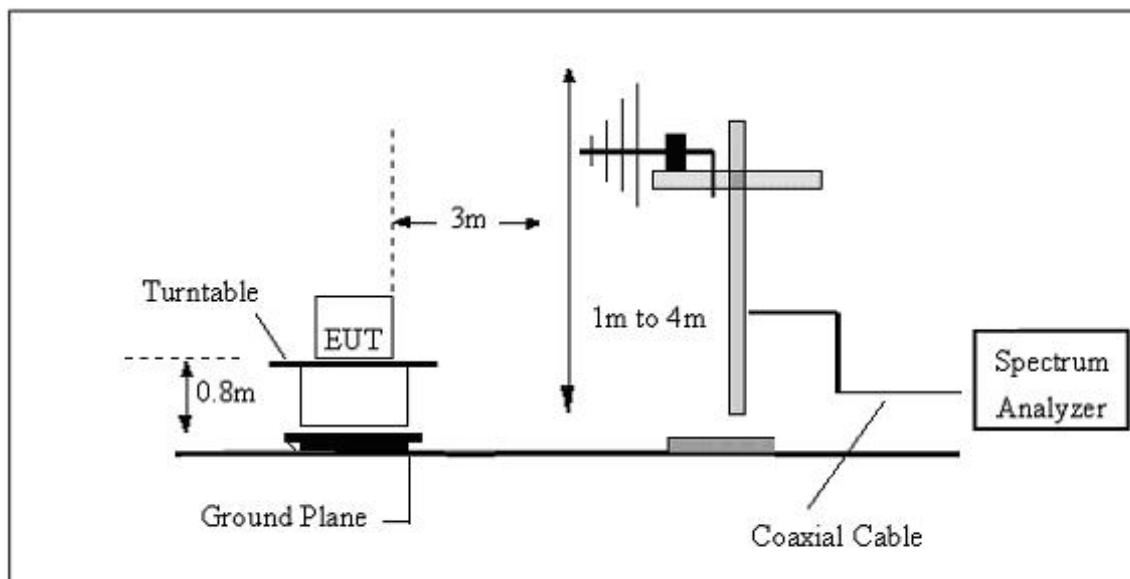

(C) Radiated Emission Test-Up Frequency Above 1GHz

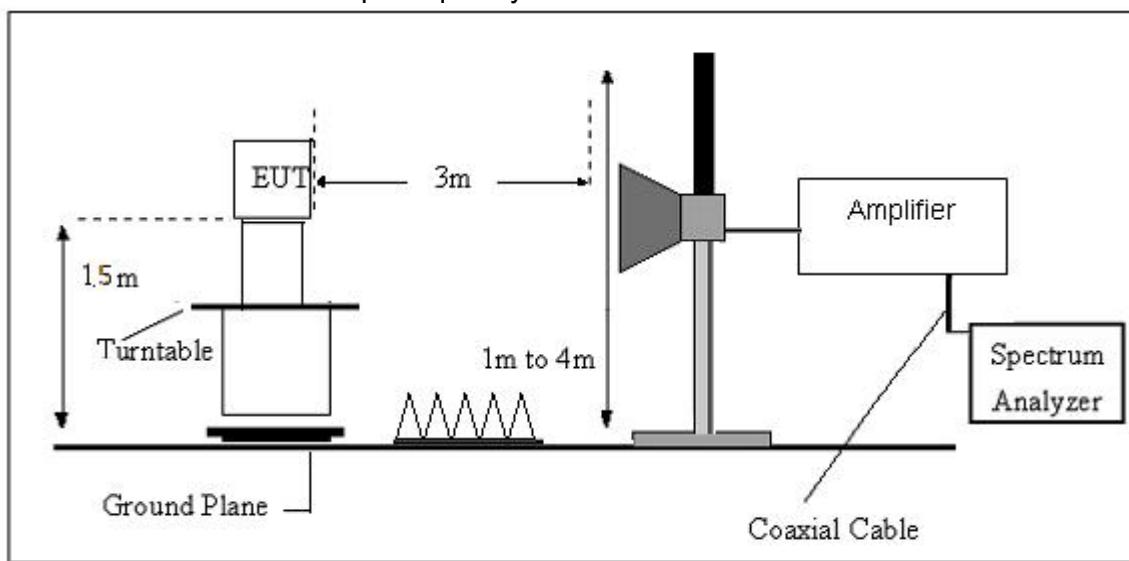

7.4. TEST RESULTS

(9KHz-30MHz)

| | | | |
|---------------|--------------|--------------------|---------|
| Temperature: | 22.7 °C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Test Mode: | 802.11b |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F | Test Result |
|----------------|---------------------|-------------------|----------------|--------------|-------------|
| -- | -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | -- | PASS |

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuv) + distance extrapolation factor.

(30MHz-1000MHz)

| | | | |
|---------------|----------------|--------------------|------------|
| Temperature: | 24.7°C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Phase: | Horizontal |
| Test Mode: | 802.11b(worst) | | |

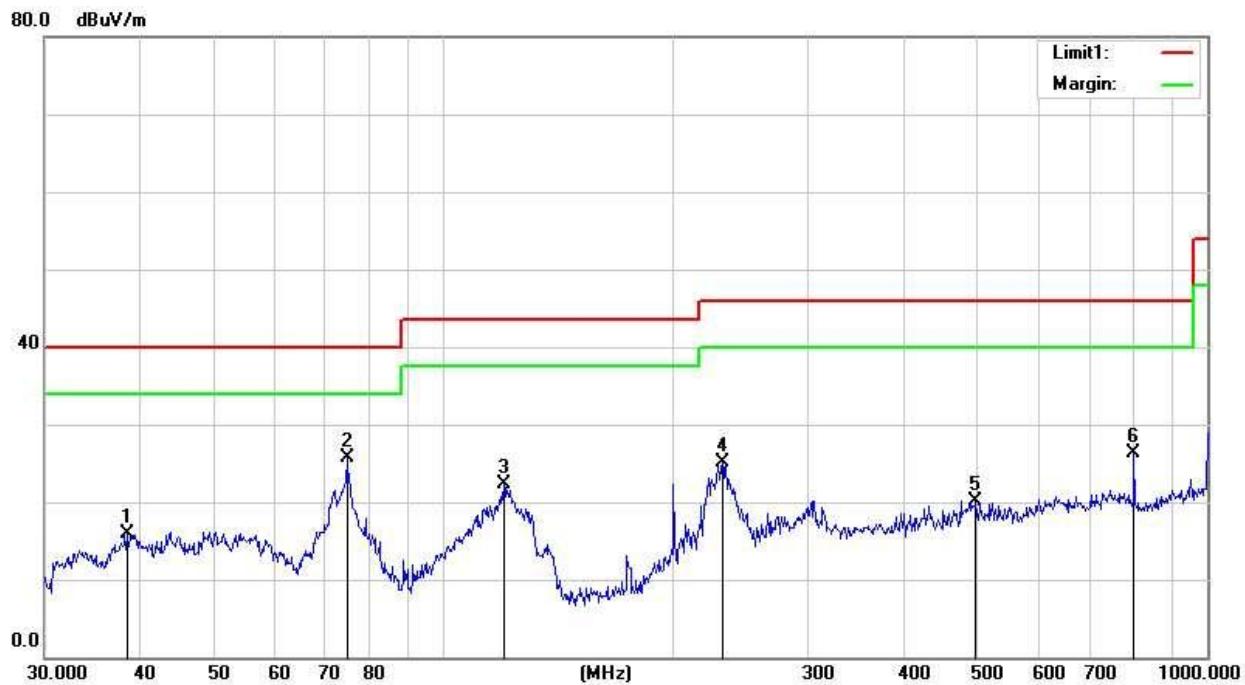


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/ m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1 | 38.4808 | 33.26 | -17.34 | 15.92 | 40.00 | -24.08 | QP |
| 2 | 74.6568 | 46.94 | -21.14 | 25.80 | 40.00 | -14.20 | QP |
| 3 | 119.8555 | 42.82 | -20.60 | 22.22 | 43.50 | -21.28 | QP |
| 4 | 231.7178 | 42.84 | -17.81 | 25.03 | 46.00 | -20.97 | QP |
| 5 | 497.6764 | 33.33 | -13.19 | 20.14 | 46.00 | -25.86 | QP |
| 6 | 801.7862 | 36.09 | -9.82 | 26.27 | 46.00 | -19.73 | QP |

Note: 1. Margin = Result (Result =Reading + Factor)-Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

| | | | |
|---------------|--------------|--------------------|----------|
| Temperature: | 22.7°C | Relative Humidity: | 61% |
| Test Voltage: | AC 120V/60Hz | Phase: | Vertical |
| Test Mode: | ON | | |

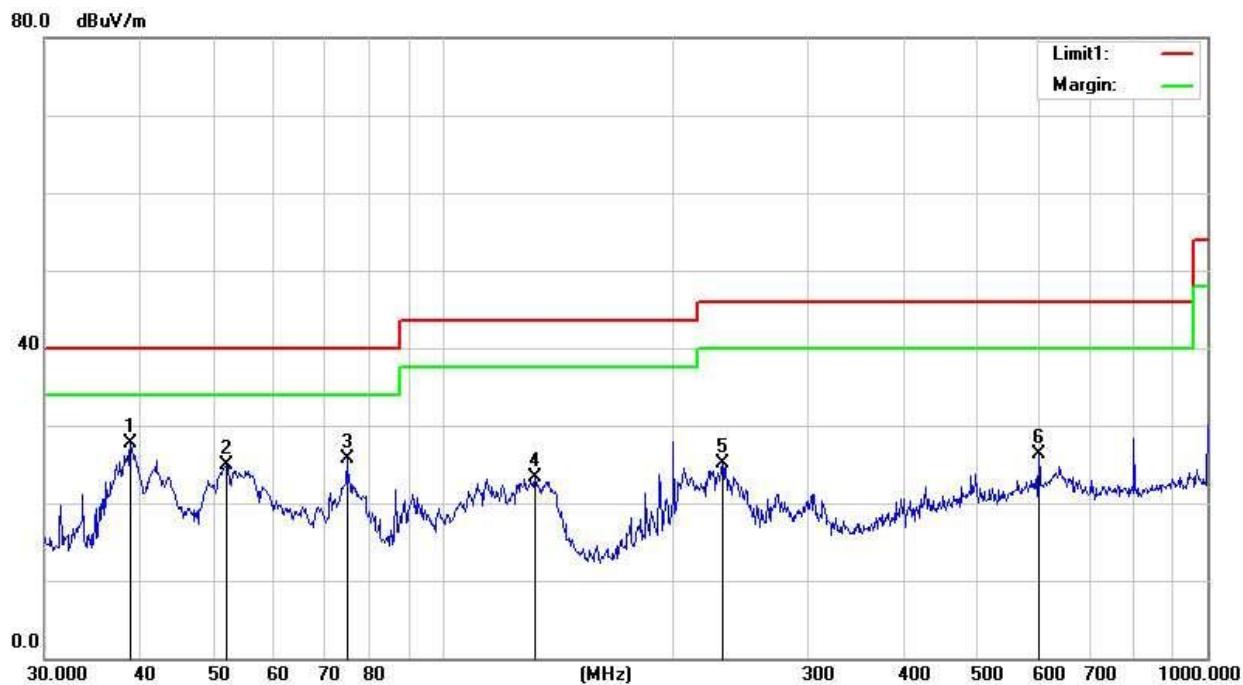

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/ m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-----------------------------|--------------------|-------------------|----------------|--------|
| 1 | 38.8880 | 67.97 | -40.24 | 27.73 | 40.00 | -12.27 | QP |
| 2 | 52.0251 | 65.19 | -40.24 | 24.95 | 40.00 | -15.05 | QP |
| 3 | 74.6568 | 66.04 | -40.24 | 25.80 | 40.00 | -14.20 | QP |
| 4 | 131.7576 | 63.61 | -40.24 | 23.37 | 43.50 | -20.13 | QP |
| 5 | 231.7178 | 65.27 | -40.24 | 25.03 | 46.00 | -20.97 | QP |
| 6 | 601.4265 | 66.51 | -40.24 | 26.27 | 46.00 | -19.73 | QP |

Note: 1. Margin = Result (Result =Reading + Factor)-Limit

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

(1GHz~25GHz) Restricted band and Spurious emission Requirements

802.11b(Worst)-Low

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00 | 39.80 | 31.79 | 8.62 | 32.10 | 48.11 | 74.00 | -25.89 | Vertical |
| 7236.00 | 33.91 | 36.19 | 11.68 | 31.97 | 49.81 | 74.00 | -24.19 | Vertical |
| 9648.00 | 32.49 | 38.07 | 14.16 | 31.56 | 53.16 | 74.00 | -20.84 | Vertical |
| 12060.00 | * | | | | | 74.00 | | Vertical |
| 14472.00 | * | | | | | 74.00 | | Vertical |
| 16884.00 | * | | | | | 74.00 | | Vertical |
| 4824.00 | 38.55 | 31.79 | 8.62 | 32.10 | 46.86 | 74.00 | -27.14 | Horizontal |
| 7236.00 | 33.70 | 36.19 | 11.68 | 31.97 | 49.60 | 74.00 | -24.40 | Horizontal |
| 9648.00 | 32.09 | 38.07 | 14.16 | 31.56 | 52.76 | 74.00 | -21.24 | Horizontal |
| 12060.00 | * | | | | | 74.00 | | Horizontal |
| 14472.00 | * | | | | | 74.00 | | Horizontal |
| 16884.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4824.00 | 28.93 | 31.79 | 8.62 | 32.10 | 37.24 | 54.00 | -16.76 | Vertical |
| 7236.00 | 22.79 | 36.19 | 11.68 | 31.97 | 38.69 | 54.00 | -15.31 | Vertical |
| 9648.00 | 22.85 | 38.07 | 14.16 | 31.56 | 43.52 | 54.00 | -10.48 | Vertical |
| 12060.00 | * | | | | | 54.00 | | Vertical |
| 14472.00 | * | | | | | 54.00 | | Vertical |
| 16884.00 | * | | | | | 54.00 | | Vertical |
| 4824.00 | 28.11 | 31.79 | 8.62 | 32.10 | 36.42 | 54.00 | -17.58 | Horizontal |
| 7236.00 | 22.29 | 36.19 | 11.68 | 31.97 | 38.19 | 54.00 | -15.81 | Horizontal |
| 9648.00 | 21.84 | 38.07 | 14.16 | 31.56 | 42.51 | 54.00 | -11.49 | Horizontal |
| 12060.00 | * | | | | | 54.00 | | Horizontal |
| 14472.00 | * | | | | | 54.00 | | Horizontal |
| 16884.00 | * | | | | | 54.00 | | Horizontal |

802.11b(Worst)-Middle

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00 | 38.94 | 31.85 | 8.66 | 32.12 | 47.33 | 74.00 | -26.67 | Vertical |
| 7311.00 | 34.03 | 36.37 | 11.71 | 31.91 | 50.20 | 74.00 | -23.80 | Vertical |
| 9748.00 | 33.55 | 38.27 | 14.25 | 31.56 | 54.51 | 74.00 | -19.49 | Vertical |
| 12185.00 | * | | | | | 74.00 | | Vertical |
| 14622.00 | * | | | | | 74.00 | | Vertical |
| 17059.00 | * | | | | | 74.00 | | Vertical |
| 4874.00 | 39.49 | 31.85 | 8.66 | 32.12 | 47.88 | 74.00 | -26.12 | Horizontal |
| 7311.00 | 32.71 | 36.37 | 11.71 | 31.91 | 48.88 | 74.00 | -25.12 | Horizontal |
| 9748.00 | 33.45 | 38.27 | 14.25 | 31.56 | 54.41 | 74.00 | -19.59 | Horizontal |
| 12185.00 | * | | | | | 74.00 | | Horizontal |
| 14622.00 | * | | | | | 74.00 | | Horizontal |
| 17059.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4874.00 | 29.83 | 31.85 | 8.66 | 32.12 | 38.22 | 54.00 | -15.78 | Vertical |
| 7311.00 | 22.36 | 36.37 | 11.71 | 31.91 | 38.53 | 54.00 | -15.47 | Vertical |
| 9748.00 | 22.81 | 38.27 | 14.25 | 31.56 | 43.77 | 54.00 | -10.23 | Vertical |
| 12185.00 | * | | | | | 54.00 | | Vertical |
| 14622.00 | * | | | | | 54.00 | | Vertical |
| 17059.00 | * | | | | | 54.00 | | Vertical |
| 4874.00 | 29.62 | 31.85 | 8.66 | 32.12 | 38.01 | 54.00 | -15.99 | Horizontal |
| 7311.00 | 21.80 | 36.37 | 11.71 | 31.91 | 37.97 | 54.00 | -16.03 | Horizontal |
| 9748.00 | 23.17 | 38.27 | 14.25 | 31.56 | 44.13 | 54.00 | -9.87 | Horizontal |
| 12185.00 | * | | | | | 54.00 | | Horizontal |
| 14622.00 | * | | | | | 54.00 | | Horizontal |
| 17059.00 | * | | | | | 54.00 | | Horizontal |

802.11b(Worst)-High

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00 | 44.18 | 31.90 | 8.70 | 32.15 | 52.63 | 74.00 | -21.37 | Vertical |
| 7386.00 | 34.52 | 36.49 | 11.76 | 31.83 | 50.94 | 74.00 | -23.06 | Vertical |
| 9848.00 | 36.71 | 38.62 | 14.31 | 31.77 | 57.87 | 74.00 | -16.13 | Vertical |
| 12310.00 | * | | | | | 74.00 | | Vertical |
| 14772.00 | * | | | | | 74.00 | | Vertical |
| 17234.00 | * | | | | | 74.00 | | Vertical |
| 4924.00 | 43.59 | 31.90 | 8.70 | 32.15 | 52.04 | 74.00 | -21.96 | Horizontal |
| 7386.00 | 33.48 | 36.49 | 11.76 | 31.83 | 49.90 | 74.00 | -24.10 | Horizontal |
| 9848.00 | 32.91 | 38.62 | 14.31 | 31.77 | 54.07 | 74.00 | -19.93 | Horizontal |
| 12310.00 | * | | | | | 74.00 | | Horizontal |
| 14772.00 | * | | | | | 74.00 | | Horizontal |
| 17234.00 | * | | | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 4924.00 | 35.15 | 31.90 | 8.70 | 32.15 | 43.60 | 54.00 | -10.40 | Vertical |
| 7386.00 | 24.45 | 36.49 | 11.76 | 31.83 | 40.87 | 54.00 | -13.13 | Vertical |
| 9848.00 | 25.23 | 38.62 | 14.31 | 31.77 | 46.39 | 54.00 | -7.61 | Vertical |
| 12310.00 | * | | | | | 54.00 | | Vertical |
| 14772.00 | * | | | | | 54.00 | | Vertical |
| 17234.00 | * | | | | | 54.00 | | Vertical |
| 4924.00 | 34.00 | 31.90 | 8.70 | 32.15 | 42.45 | 54.00 | -11.55 | Horizontal |
| 7386.00 | 22.88 | 36.49 | 11.76 | 31.83 | 39.30 | 54.00 | -14.70 | Horizontal |
| 9848.00 | 22.18 | 38.62 | 14.31 | 31.77 | 43.34 | 54.00 | -10.66 | Horizontal |
| 12310.00 | * | | | | | 54.00 | | Horizontal |
| 14772.00 | * | | | | | 54.00 | | Horizontal |
| 17234.00 | * | | | | | 54.00 | | Horizontal |

Radiated Band Edge data

Remark: All restriction band have been tested, and only the worst case is shown in report

802.11 b low CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 50.31 | 27.59 | 5.38 | 34.01 | 49.27 | 74.00 | -24.73 | Horizontal |
| 2400.00 | 58.88 | 27.58 | 5.39 | 34.01 | 57.84 | 74.00 | -16.16 | Horizontal |
| 2390.00 | 51.90 | 27.59 | 5.38 | 34.01 | 50.86 | 74.00 | -23.14 | Vertical |
| 2400.00 | 60.32 | 27.58 | 5.39 | 34.01 | 59.28 | 74.00 | -14.72 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 37.46 | 27.59 | 5.38 | 34.01 | 36.42 | 54.00 | -17.58 | Horizontal |
| 2400.00 | 45.61 | 27.58 | 5.39 | 34.01 | 44.57 | 54.00 | -9.43 | Horizontal |
| 2390.00 | 39.17 | 27.59 | 5.38 | 34.01 | 38.13 | 54.00 | -15.87 | Vertical |
| 2400.00 | 46.63 | 27.58 | 5.39 | 34.01 | 45.59 | 54.00 | -8.41 | Vertical |

802.11 b High CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 50.40 | 27.53 | 5.47 | 33.92 | 49.48 | 74.00 | -24.52 | Horizontal |
| 2500.00 | 46.65 | 27.55 | 5.49 | 29.93 | 49.76 | 74.00 | -24.24 | Horizontal |
| 2483.50 | 52.38 | 27.53 | 5.47 | 33.92 | 51.46 | 74.00 | -22.54 | Vertical |
| 2500.00 | 48.91 | 27.55 | 5.49 | 29.93 | 52.02 | 74.00 | -21.98 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 37.62 | 27.53 | 5.47 | 33.92 | 36.70 | 54.00 | -17.30 | Horizontal |
| 2500.00 | 33.98 | 27.55 | 5.49 | 29.93 | 37.09 | 54.00 | -16.91 | Horizontal |
| 2483.50 | 39.45 | 27.53 | 5.47 | 33.92 | 38.53 | 54.00 | -15.47 | Vertical |
| 2500.00 | 35.81 | 27.55 | 5.49 | 29.93 | 38.92 | 54.00 | -15.08 | Vertical |

802.11 g Low CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 50.30 | 27.59 | 5.38 | 34.01 | 49.26 | 74.00 | -24.74 | Horizontal |
| 2400.00 | 58.86 | 27.58 | 5.39 | 34.01 | 57.82 | 74.00 | -16.18 | Horizontal |
| 2390.00 | 51.88 | 27.59 | 5.38 | 34.01 | 50.84 | 74.00 | -23.16 | Vertical |
| 2400.00 | 60.29 | 27.58 | 5.39 | 34.01 | 59.25 | 74.00 | -14.75 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 37.45 | 27.59 | 5.38 | 34.01 | 36.41 | 54.00 | -17.59 | Horizontal |
| 2400.00 | 45.60 | 27.58 | 5.39 | 34.01 | 44.56 | 54.00 | -9.44 | Horizontal |
| 2390.00 | 39.16 | 27.59 | 5.38 | 34.01 | 38.12 | 54.00 | -15.88 | Vertical |
| 2400.00 | 46.62 | 27.58 | 5.39 | 34.01 | 45.58 | 54.00 | -8.42 | Vertical |

802.11 g High CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 50.37 | 27.53 | 5.47 | 33.92 | 49.45 | 74.00 | -24.55 | Horizontal |
| 2500.00 | 46.63 | 27.55 | 5.49 | 29.93 | 49.74 | 74.00 | -24.26 | Horizontal |
| 2483.50 | 52.36 | 27.53 | 5.47 | 33.92 | 51.44 | 74.00 | -22.56 | Vertical |
| 2500.00 | 48.89 | 27.55 | 5.49 | 29.93 | 52.00 | 74.00 | -22.00 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 37.61 | 27.53 | 5.47 | 33.92 | 36.69 | 54.00 | -17.31 | Horizontal |
| 2500.00 | 33.97 | 27.55 | 5.49 | 29.93 | 37.08 | 54.00 | -16.92 | Horizontal |
| 2483.50 | 39.43 | 27.53 | 5.47 | 33.92 | 38.51 | 54.00 | -15.49 | Vertical |
| 2500.00 | 35.80 | 27.55 | 5.49 | 29.93 | 38.91 | 54.00 | -15.09 | Vertical |

802.11 N 20 Low CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 49.61 | 27.59 | 5.38 | 34.01 | 48.57 | 74.00 | -25.43 | Horizontal |
| 2400.00 | 57.94 | 27.58 | 5.39 | 34.01 | 56.90 | 74.00 | -17.10 | Horizontal |
| 2390.00 | 51.15 | 27.59 | 5.38 | 34.01 | 50.11 | 74.00 | -23.89 | Vertical |
| 2400.00 | 59.19 | 27.58 | 5.39 | 34.01 | 58.15 | 74.00 | -15.85 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 36.96 | 27.59 | 5.38 | 34.01 | 35.92 | 54.00 | -18.08 | Horizontal |
| 2400.00 | 45.03 | 27.58 | 5.39 | 34.01 | 43.99 | 54.00 | -10.01 | Horizontal |
| 2390.00 | 38.62 | 27.59 | 5.38 | 34.01 | 37.58 | 54.00 | -16.42 | Vertical |
| 2400.00 | 46.00 | 27.58 | 5.39 | 34.01 | 44.96 | 54.00 | -9.04 | Vertical |

802.11 N 20 High CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 49.39 | 27.53 | 5.47 | 33.92 | 48.47 | 74.00 | -25.53 | Horizontal |
| 2500.00 | 45.87 | 27.55 | 5.49 | 29.93 | 48.98 | 74.00 | -25.02 | Horizontal |
| 2483.50 | 51.24 | 27.53 | 5.47 | 33.92 | 50.32 | 74.00 | -23.68 | Vertical |
| 2500.00 | 48.00 | 27.55 | 5.49 | 29.93 | 51.11 | 74.00 | -22.89 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 37.02 | 27.53 | 5.47 | 33.92 | 36.10 | 54.00 | -17.90 | Horizontal |
| 2500.00 | 33.51 | 27.55 | 5.49 | 29.93 | 36.62 | 54.00 | -17.38 | Horizontal |
| 2483.50 | 38.78 | 27.53 | 5.47 | 33.92 | 37.86 | 54.00 | -16.14 | Vertical |
| 2500.00 | 35.31 | 27.55 | 5.49 | 29.93 | 38.42 | 54.00 | -15.58 | Vertical |

802.11 N 40 Low CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 40.01 | 27.59 | 5.38 | 30.18 | 42.80 | 74.00 | -31.20 | Horizontal |
| 2400.00 | 53.69 | 27.58 | 5.39 | 30.18 | 56.48 | 74.00 | -17.52 | Horizontal |
| 2390.00 | 39.65 | 27.59 | 5.38 | 30.18 | 42.44 | 74.00 | -31.56 | Vertical |
| 2400.00 | 52.83 | 27.58 | 5.39 | 30.18 | 55.62 | 74.00 | -18.38 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2390.00 | 33.02 | 27.59 | 5.38 | 30.18 | 35.81 | 54.00 | -18.19 | Horizontal |
| 2400.00 | 40.83 | 27.58 | 5.39 | 30.18 | 43.62 | 54.00 | -10.38 | Horizontal |
| 2390.00 | 32.80 | 27.59 | 5.38 | 30.18 | 35.59 | 54.00 | -18.41 | Vertical |
| 2400.00 | 42.47 | 27.58 | 5.39 | 30.18 | 45.26 | 54.00 | -8.74 | Vertical |

802.11 N 40 High CH

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 50.95 | 27.53 | 5.47 | 33.92 | 50.03 | 74.00 | -23.97 | Horizontal |
| 2500.00 | 47.08 | 27.55 | 5.49 | 29.93 | 50.19 | 74.00 | -23.81 | Horizontal |
| 2483.50 | 53.01 | 27.53 | 5.47 | 33.92 | 52.09 | 74.00 | -21.91 | Vertical |
| 2500.00 | 49.41 | 27.55 | 5.49 | 29.93 | 52.52 | 74.00 | -21.48 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 37.96 | 27.53 | 5.47 | 33.92 | 37.04 | 54.00 | -16.96 | Horizontal |
| 2500.00 | 34.24 | 27.55 | 5.49 | 29.93 | 37.35 | 54.00 | -16.65 | Horizontal |
| 2483.50 | 39.82 | 27.53 | 5.47 | 33.92 | 38.90 | 54.00 | -15.10 | Vertical |
| 2500.00 | 36.08 | 27.55 | 5.49 | 29.93 | 39.19 | 54.00 | -14.81 | Vertical |

Notes:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

8 CONDUCTED EMISSION TEST

8.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

| FREQUENCY (MHz) | Conducted Emissionlimit (dBuV) | |
|-----------------|--------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

8.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

8.1.3 TEST SETUP

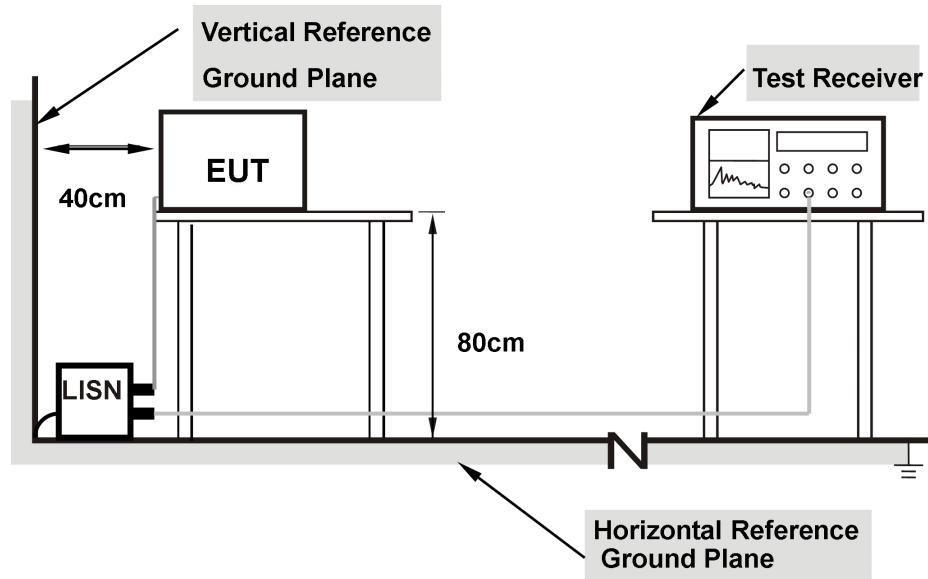


Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


8.1.4 TEST RESULT

| | | | |
|---------------|----------------|--------------------|-----|
| Temperature: | 22.1 °C | Relative Humidity: | 56% |
| Test Voltage: | AC 120V/60Hz | Phase: | L |
| Test Mode: | 802.11b(worst) | | |

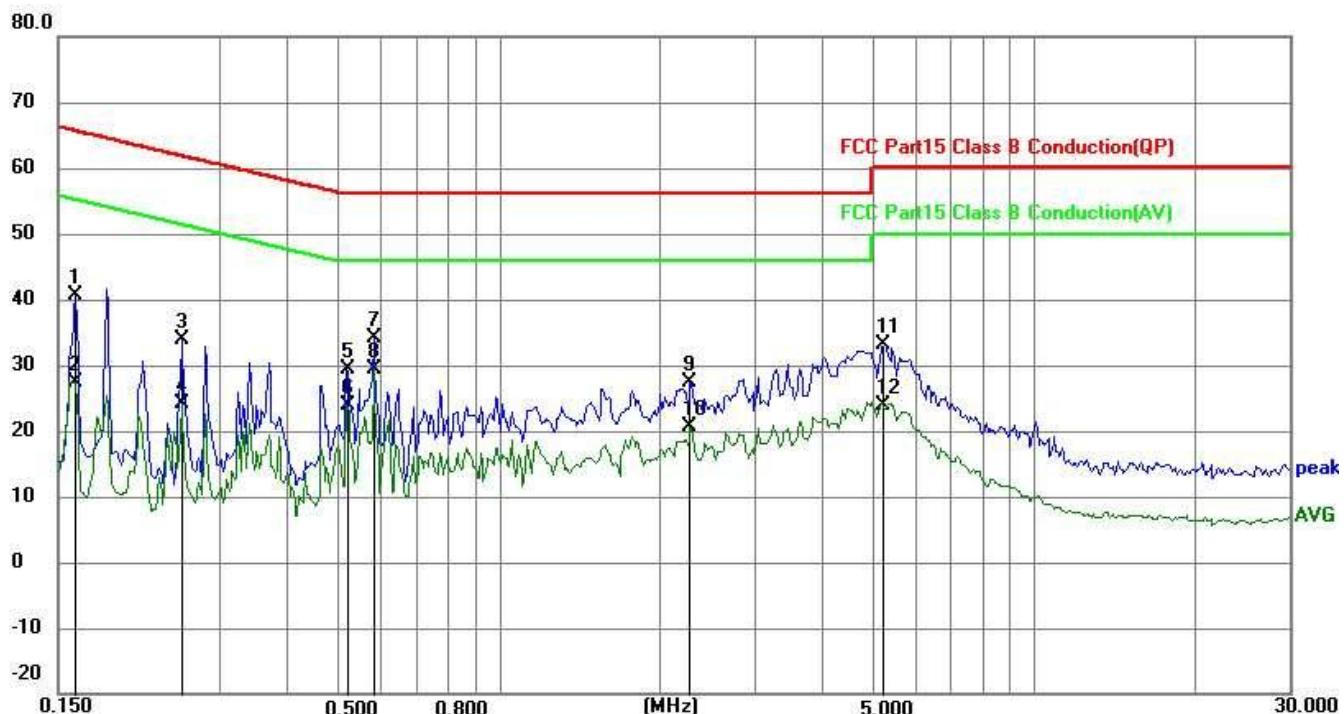

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.1617 | 30.76 | 9.78 | 40.54 | 65.38 | 24.84 | QP |
| 2 | 0.1617 | 17.70 | 9.78 | 27.48 | 55.38 | 27.90 | AVG |
| 3 | 0.2553 | 24.00 | 9.82 | 33.82 | 61.58 | 27.76 | QP |
| 4 | 0.2553 | 14.34 | 9.82 | 24.16 | 51.58 | 27.42 | AVG |
| 5 | 0.5205 | 19.50 | 9.87 | 29.37 | 56.00 | 26.63 | QP |
| 6 | 0.5205 | 13.96 | 9.87 | 23.83 | 46.00 | 22.17 | AVG |
| 7 | 0.5829 | 24.36 | 9.88 | 34.24 | 56.00 | 21.76 | QP |
| 8 | 0.5829 | 19.50 | 9.88 | 29.38 | 46.00 | 16.62 | AVG |
| 9 | 2.2833 | 17.36 | 9.94 | 27.30 | 56.00 | 28.70 | QP |
| 10 | 2.2833 | 10.66 | 9.94 | 20.60 | 46.00 | 25.40 | AVG |
| 11 | 5.2213 | 23.24 | 9.96 | 33.20 | 60.00 | 26.80 | QP |
| 12 | 5.2213 | 13.84 | 9.96 | 23.80 | 50.00 | 26.20 | AVG |

| | | | |
|---------------|----------------|--------------------|-----|
| Temperature: | 22.1 °C | Relative Humidity: | 56% |
| Test Voltage: | AC 120V/60Hz | Phase: | N |
| Test Mode: | 802.11b(worst) | | |

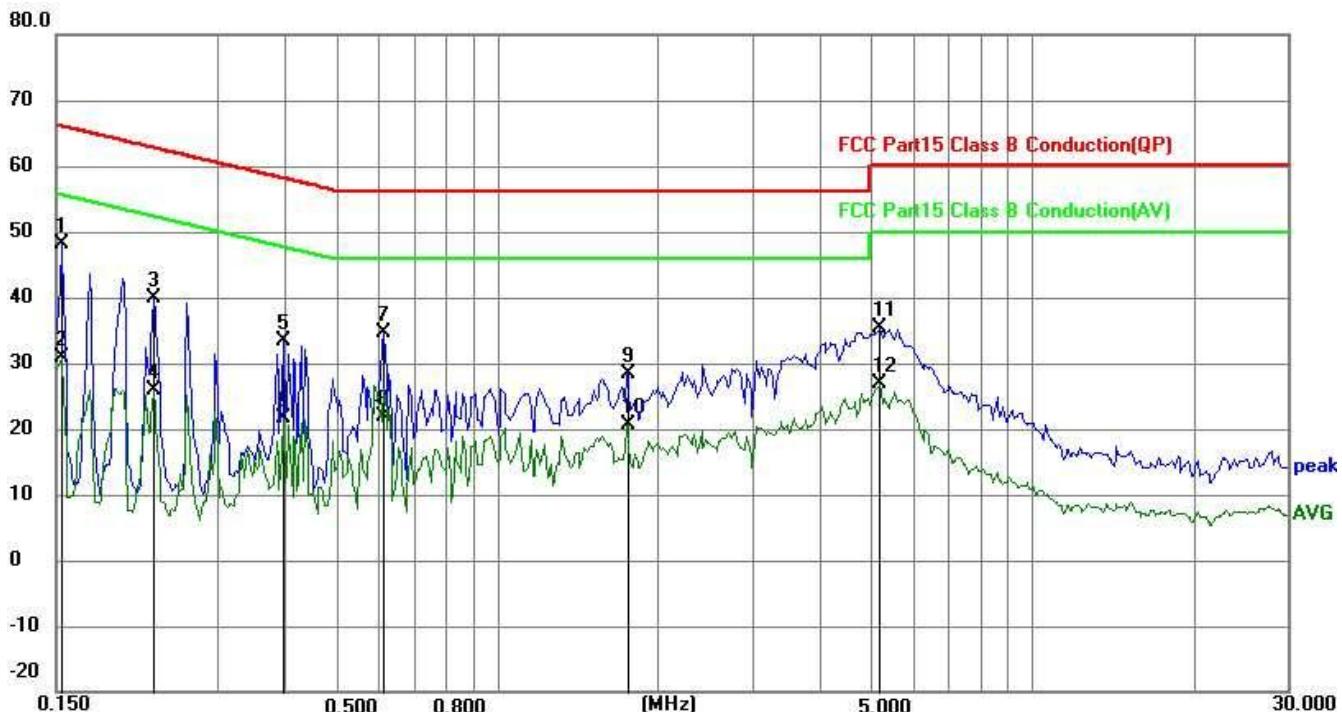

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1 | 0.1539 | 38.48 | 9.77 | 48.25 | 65.79 | 17.54 | QP |
| 2 | 0.1539 | 21.18 | 9.77 | 30.95 | 55.79 | 24.84 | AVG |
| 3 | 0.2280 | 30.12 | 9.80 | 39.92 | 62.52 | 22.60 | QP |
| 4 | 0.2280 | 16.00 | 9.80 | 25.80 | 52.52 | 26.72 | AVG |
| 5 | 0.3996 | 23.60 | 9.85 | 33.45 | 57.86 | 24.41 | QP |
| 6 | 0.3996 | 11.82 | 9.85 | 21.67 | 47.86 | 26.19 | AVG |
| 7 | 0.6108 | 24.82 | 9.88 | 34.70 | 56.00 | 21.30 | QP |
| 8 | 0.6108 | 11.95 | 9.88 | 21.83 | 46.00 | 24.17 | AVG |
| 9 | 1.7529 | 18.54 | 9.93 | 28.47 | 56.00 | 27.53 | QP |
| 10 | 1.7529 | 10.66 | 9.93 | 20.59 | 46.00 | 25.41 | AVG |
| 11 | 5.1996 | 25.24 | 10.03 | 35.27 | 60.00 | 24.73 | QP |
| 12 | 5.1996 | 16.80 | 10.03 | 26.83 | 50.00 | 23.17 | AVG |

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 RESULT

The antennas used for this product are FPC antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.4dBi.

*****END OF THE REPORT*****