



TEST REPORT


FCC PART 15.247

Report Reference No.....: **CTL2405071031-WF02**

Compiled by: Happy Guo
(position+printed name+signature) (File administrators)

Tested by: Yapeng Jin
(position+printed name+signature) (Test Engineer)

Approved by: Ivan Xie
(position+printed name+signature) (Manager)

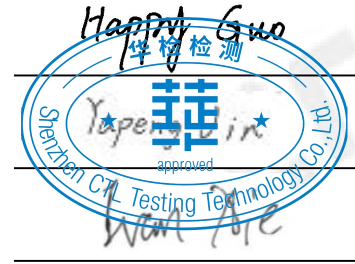

Product Name.....: Smart watch

Model/Type reference.....: E31

List Model(s).....: N/A

Trade Mark.....: Letsfit

FCC ID.....: **2BAS2-E31**

Applicant's name.....: **HOTOEM Information Technology Company Limited**

Address of applicant.....: Flat 1908, 19/F, Harbour Center, 25 Harbour Road, Wan Chai, Hong Kong

Test Firm.....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm.....: Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

Test specification.....:
Standard.....: **FCC Part 15.247**: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of receipt of test item.....: May 13, 2024

Date of Test Date.....: May 14, 2024 - May 24, 2024

Date of Issue.....: May 27, 2024

Result.....: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2405071031-WF02	May 27, 2024 Date of issue
--------------------------	---------------------------	-------------------------------

Equipment under Test : Smart watch

Sample No : CTL2405071031

Model /Type : E31

Listed Models : N/A

Applicant : **HOTOEM Information Technology Company Limited**

Address : Flat 1908,19/F,Harbour Center,25 Harbour Road,Wan Chai,Hong Kong

Manufacturer : **Chongqing zhouhai intelligent technology Co.,Ltd.**

Address : Floor 4, Building 9, Linkong Intelligent Industrial Park, No. 6, Langyue Road, Shuangfengqiao Street, Yubei District, Chongqing

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Table of Contents

Page

1. SUMMARY5

1.1. TEST STANDARDS 5

1.2. TEST DESCRIPTION 5

1.3. TEST FACILITY 6

1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY 6

2. GENERAL INFORMATION 8

2.1. ENVIRONMENTAL CONDITIONS 8

2.2. GENERAL DESCRIPTION OF EUT 8

2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY 9

2.4. EQUIPMENTS USED DURING THE TEST 10

2.5. RELATED SUBMITTAL(S) / GRANT (S) 11

2.6. MODIFICATIONS 11

3. TEST CONDITIONS AND RESULTS 12

3.1. CONDUCTED EMISSIONS TEST 12

3.2. RADIATED EMISSIONS AND BAND EDGE 15

3.3. MAXIMUM CONDUCTED OUTPUT POWER 29

3.4. POWER SPECTRAL DENSITY 30

3.5. 6DB BANDWIDTH 31

3.6. OUT-OF-BAND EMISSIONS 32

3.7. ANTENNA REQUIREMENT 33

4. TEST SETUP PHOTOS OF THE EUT 34

5. PHOTOS OF THE EUT 34

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	±2.20 dB	(1)
Radiated Emission 9KHz~30MHz	±3.66dB	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
DTS Bandwidth	±1.9%	(1)
Maximum Conducted Output Power	± 1.18 dB	(1)

Maximum Power Spectral Density Level	± 0.98 dB	(1)
Band-edge	± 1.21 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-7GHz: ± 1.09 dB 7GHz-26.5GHz: ± 3.27 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Smart watch
Model/Type reference:	E31
Power supply:	DC 3.8V from battery
Bluetooth LE	
Supported type:	Bluetooth Low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	Monopole Antenna
Antenna gain:	-1.74dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Test Modes	BLE 1M Continuous Transmitting	BLE 2M Continuous Transmitting
1	■	
2		■

Operation Frequency List :

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2024/04/30	2025/04/29
	LISN	R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
	Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2024/04/30	2025/04/29
Software:						
Name of Software:				Version:		
ES-K1				V1.71		

Radiated Emissions and Band Edge					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
Amplifier	Agilent	8449B	3008A02306	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2024/05/03	2025/05/02
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Test software					
Name of Software			Version		
EZ_EMG(Below 1GHz)			V1.1.4.2		
EZ_EMG(Above 1GHz)			V1.1.4.2		

Maximum Peak Output Power & 20dB Bandwidth & Frequency Separation & Number of hopping frequency & Dwell Time & Out-of-band Emissions					
Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Temperature/Humidity Meter	Ji Yu	MC501	/	2024/05/04	2025/05/03
Test Software					
Name of Software			Version		
TST-PASS			V2.0		

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

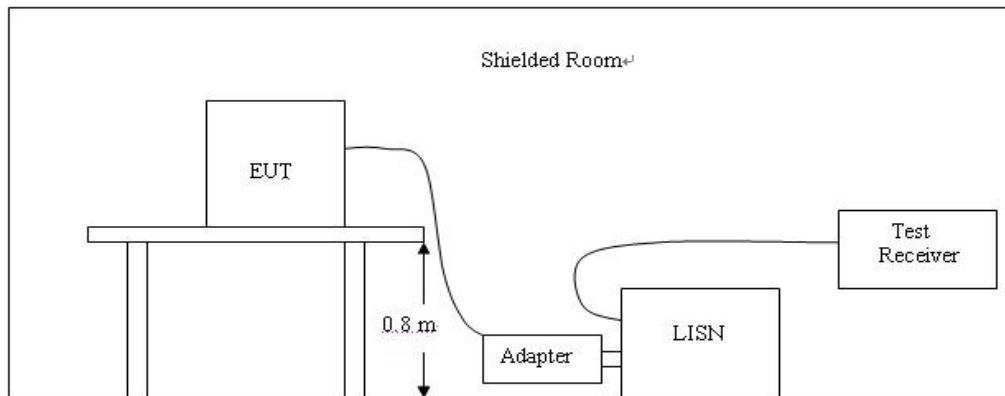

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes were test at , only the worst result of Test mode 2 was reported as below:

Line:	L																																																								
<p><i>Shenzhen CTL Testing Technology Co., Ltd.</i></p> <p>Voltage Mains Test FCC PART 15 C</p> <p>EUT: E31 Manufacturer: HOTOEM Information Technology Company Limited Operating Condition: BLE2M 2402MHz Test Site: / Operator: JYP Test Specification: AC 120V/60Hz Comment: / Start of Test: 5/16/2024 / 9:05:01AM</p> <p>SCAN TABLE: "Voltage (9K-30M) FIN" Short Description: 150K-30M Voltage</p> <div style="text-align: center;"> </div> <p>* * *MES CTL240516008_fin</p>																																																									
<p>MEASUREMENT RESULT: "CTL240516008_fin"</p> <p>5/16/2024 9:07AM</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.564000</td> <td>28.00</td> <td>10.0</td> <td>56</td> <td>28.0</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.618000</td> <td>31.90</td> <td>10.0</td> <td>56</td> <td>24.1</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.631500</td> <td>30.20</td> <td>10.0</td> <td>56</td> <td>25.8</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.640500</td> <td>33.10</td> <td>10.0</td> <td>56</td> <td>22.9</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.645000</td> <td>33.40</td> <td>10.0</td> <td>56</td> <td>22.6</td> <td>QP</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	0.564000	28.00	10.0	56	28.0	QP	L1	GND	0.618000	31.90	10.0	56	24.1	QP	L1	GND	0.631500	30.20	10.0	56	25.8	QP	L1	GND	0.640500	33.10	10.0	56	22.9	QP	L1	GND	0.645000	33.40	10.0	56	22.6	QP	L1	GND								
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
0.564000	28.00	10.0	56	28.0	QP	L1	GND																																																		
0.618000	31.90	10.0	56	24.1	QP	L1	GND																																																		
0.631500	30.20	10.0	56	25.8	QP	L1	GND																																																		
0.640500	33.10	10.0	56	22.9	QP	L1	GND																																																		
0.645000	33.40	10.0	56	22.6	QP	L1	GND																																																		
<p>MEASUREMENT RESULT: "CTL240516008_fin2"</p> <p>5/16/2024 9:07AM</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency MHz</th> <th>Level dBµV</th> <th>Transd dB</th> <th>Limit dBµV</th> <th>Margin dB</th> <th>Detector</th> <th>Line</th> <th>PE</th> </tr> </thead> <tbody> <tr> <td>0.330000</td> <td>12.00</td> <td>10.0</td> <td>50</td> <td>37.5</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>0.640500</td> <td>20.00</td> <td>10.0</td> <td>46</td> <td>26.0</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>1.135500</td> <td>11.10</td> <td>10.1</td> <td>46</td> <td>34.9</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>1.756500</td> <td>10.60</td> <td>10.1</td> <td>46</td> <td>35.4</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>3.763500</td> <td>13.10</td> <td>10.1</td> <td>46</td> <td>32.9</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> <tr> <td>4.735500</td> <td>9.60</td> <td>10.1</td> <td>46</td> <td>36.4</td> <td>AV</td> <td>L1</td> <td>GND</td> </tr> </tbody> </table>		Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE	0.330000	12.00	10.0	50	37.5	AV	L1	GND	0.640500	20.00	10.0	46	26.0	AV	L1	GND	1.135500	11.10	10.1	46	34.9	AV	L1	GND	1.756500	10.60	10.1	46	35.4	AV	L1	GND	3.763500	13.10	10.1	46	32.9	AV	L1	GND	4.735500	9.60	10.1	46	36.4	AV	L1	GND
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE																																																		
0.330000	12.00	10.0	50	37.5	AV	L1	GND																																																		
0.640500	20.00	10.0	46	26.0	AV	L1	GND																																																		
1.135500	11.10	10.1	46	34.9	AV	L1	GND																																																		
1.756500	10.60	10.1	46	35.4	AV	L1	GND																																																		
3.763500	13.10	10.1	46	32.9	AV	L1	GND																																																		
4.735500	9.60	10.1	46	36.4	AV	L1	GND																																																		


Line:	N
-------	---

Shenzhen CTL Testing Technology Co., Ltd.

Voltage Mains Test FCC PART 15 C

EUT: E31
 Manufacturer: HOTOEM Information Technology Company Limited
 Operating Condition: BLE2M 2402MHz
 Test Site: /
 Operator: JYP
 Test Specification: AC 120V/60Hz
 Comment: /
 Start of Test: 5/16/2024 / 9:16:11AM

SCAN TABLE: "Voltage (9K-30M)FIN"
 Short Description: 150K-30M Voltage

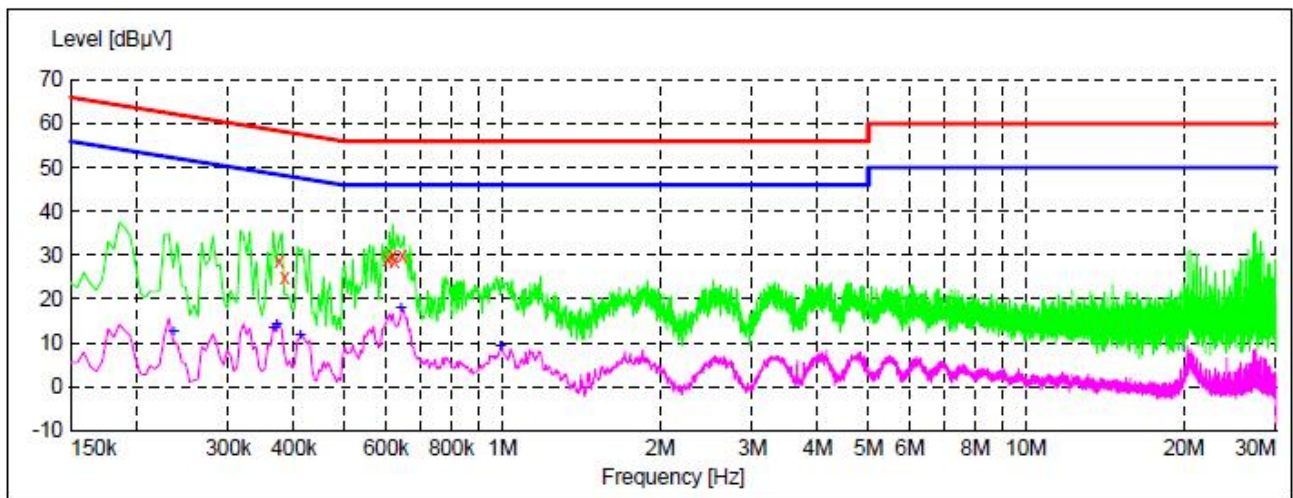

x x *MES CTL240516012_fin

MEASUREMENT RESULT: "CTL240516012_fin"

5/16/2024 9:18AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.375000	28.50	10.0	58	29.9	QP	N	GND
0.384000	24.90	10.0	58	33.3	QP	N	GND
0.604500	28.90	10.0	56	27.1	QP	N	GND
0.618000	30.00	10.0	56	26.0	QP	N	GND
0.622500	28.70	10.0	56	27.3	QP	N	GND
0.645000	30.10	10.0	56	25.9	QP	N	GND

MEASUREMENT RESULT: "CTL240516012_fin2"

5/16/2024 9:18AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.235500	12.60	10.0	52	39.7	AV	N	GND
0.366000	13.40	10.0	49	35.2	AV	N	GND
0.370500	14.10	10.0	49	34.4	AV	N	GND
0.411000	11.70	10.0	48	35.9	AV	N	GND
0.640500	17.70	10.0	46	28.3	AV	N	GND
0.991500	9.30	10.1	46	36.7	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

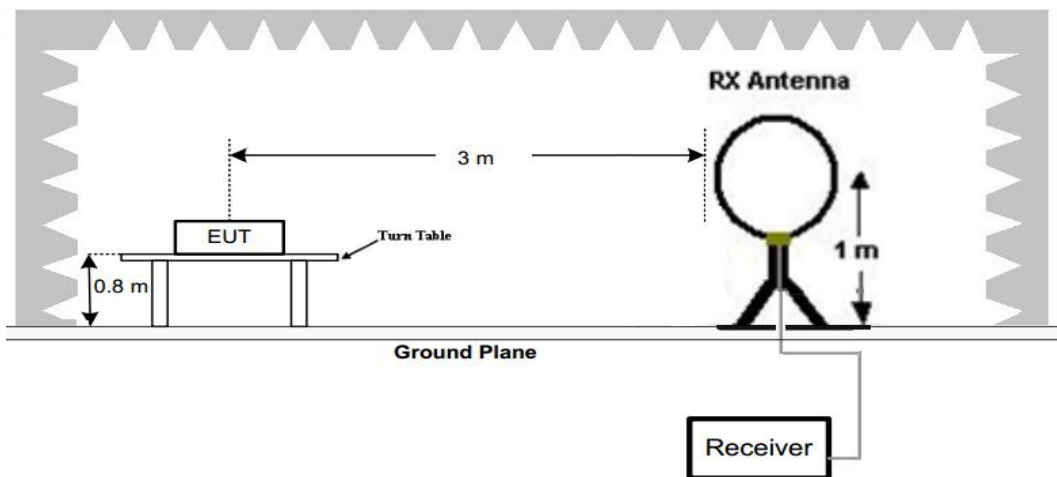

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

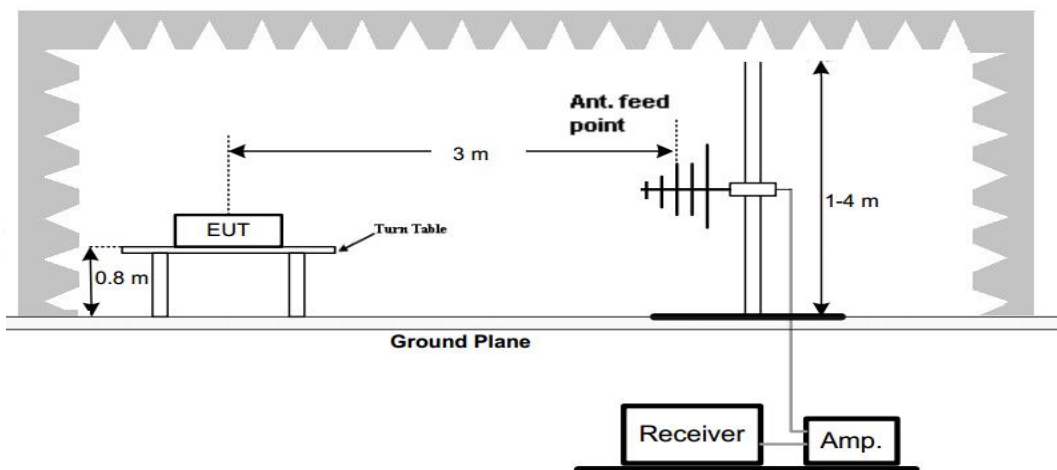

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

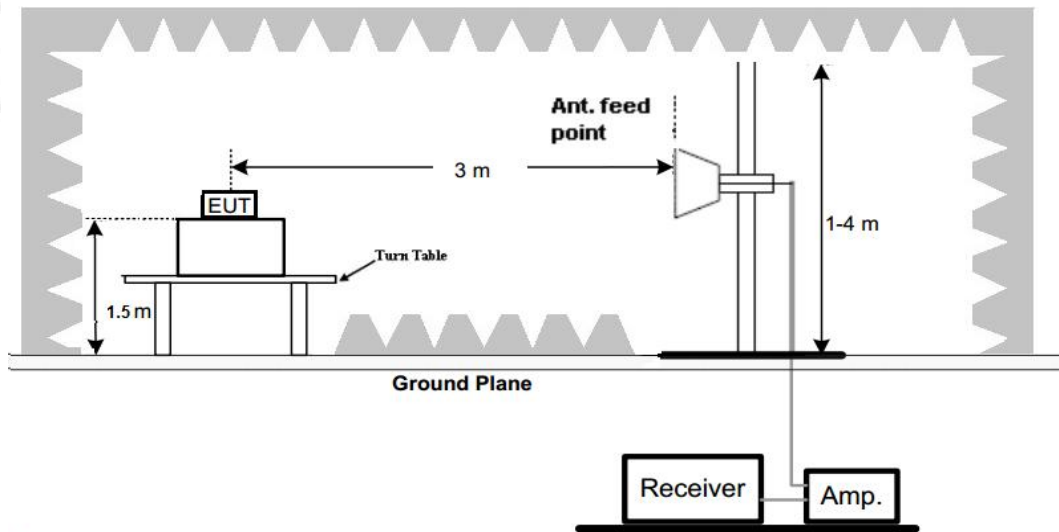

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

TEST RESULTS


Remark:

1. We have tested low channel, middle channel, high channel of all modes. Only the low channel of test mode 2 was recorded..
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not recorded in report.

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

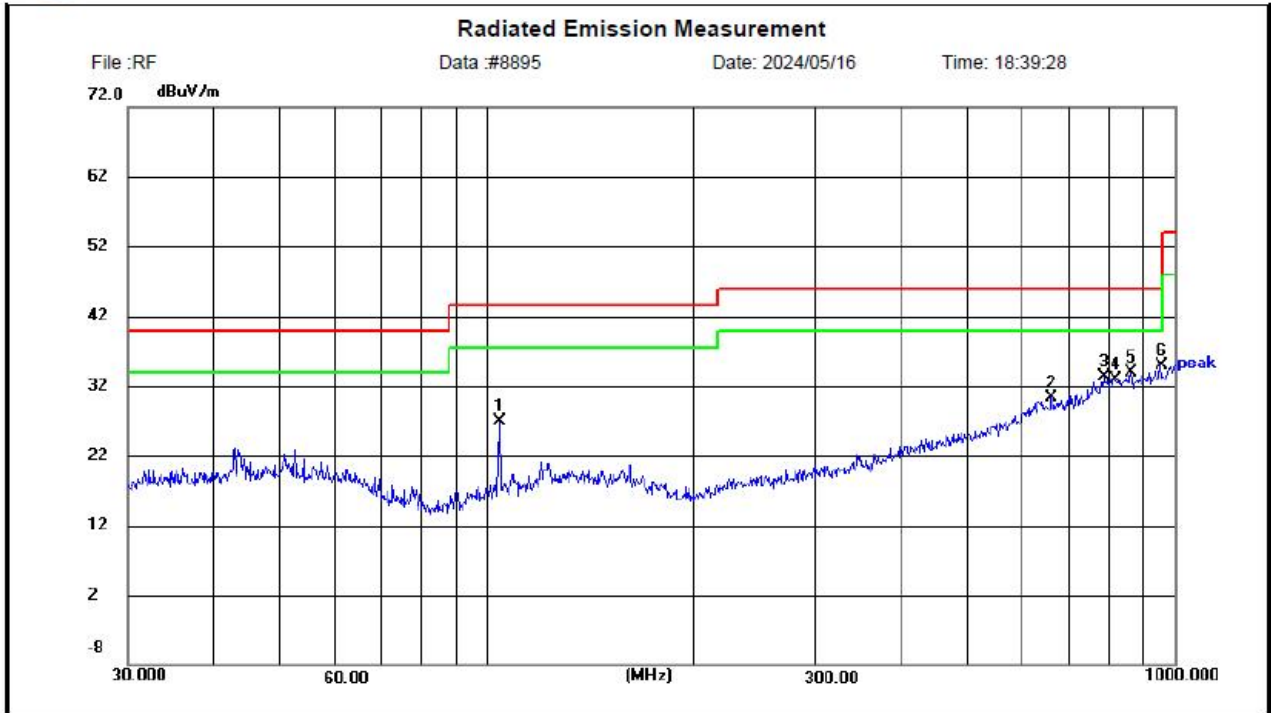

Site LAB Chamber 2
Limit: FCC Part15 RE-Class C_30-1000MHz
EUT: /
M/N: E31
Mode: BLE2M 2402MHz
Note: HOTOEM Information Technology Company Limited

Polarization: **Vertical**
Power:
Distance: 3m


Temperature: 25(C)
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	104.3072	15.16	11.74	26.90	43.50	16.60	peak	100	182	P	
2	659.4140	7.62	22.59	30.21	46.00	15.79	peak	100	7	P	
3	787.8513	7.99	25.38	33.37	46.00	12.63	peak	100	298	P	
4	818.4753	6.90	25.97	32.87	46.00	13.13	peak	100	138	P	
5	864.5707	7.51	26.45	33.96	46.00	12.04	peak	100	199	P	
6	953.7645	7.69	27.12	34.81	46.00	11.19	peak	100	178	P	

For 1GHz-18GHz

Note: All modes are tested, and only the worst mode above is captured (Test Mode 2).

BLE Mode (above 1GHz)

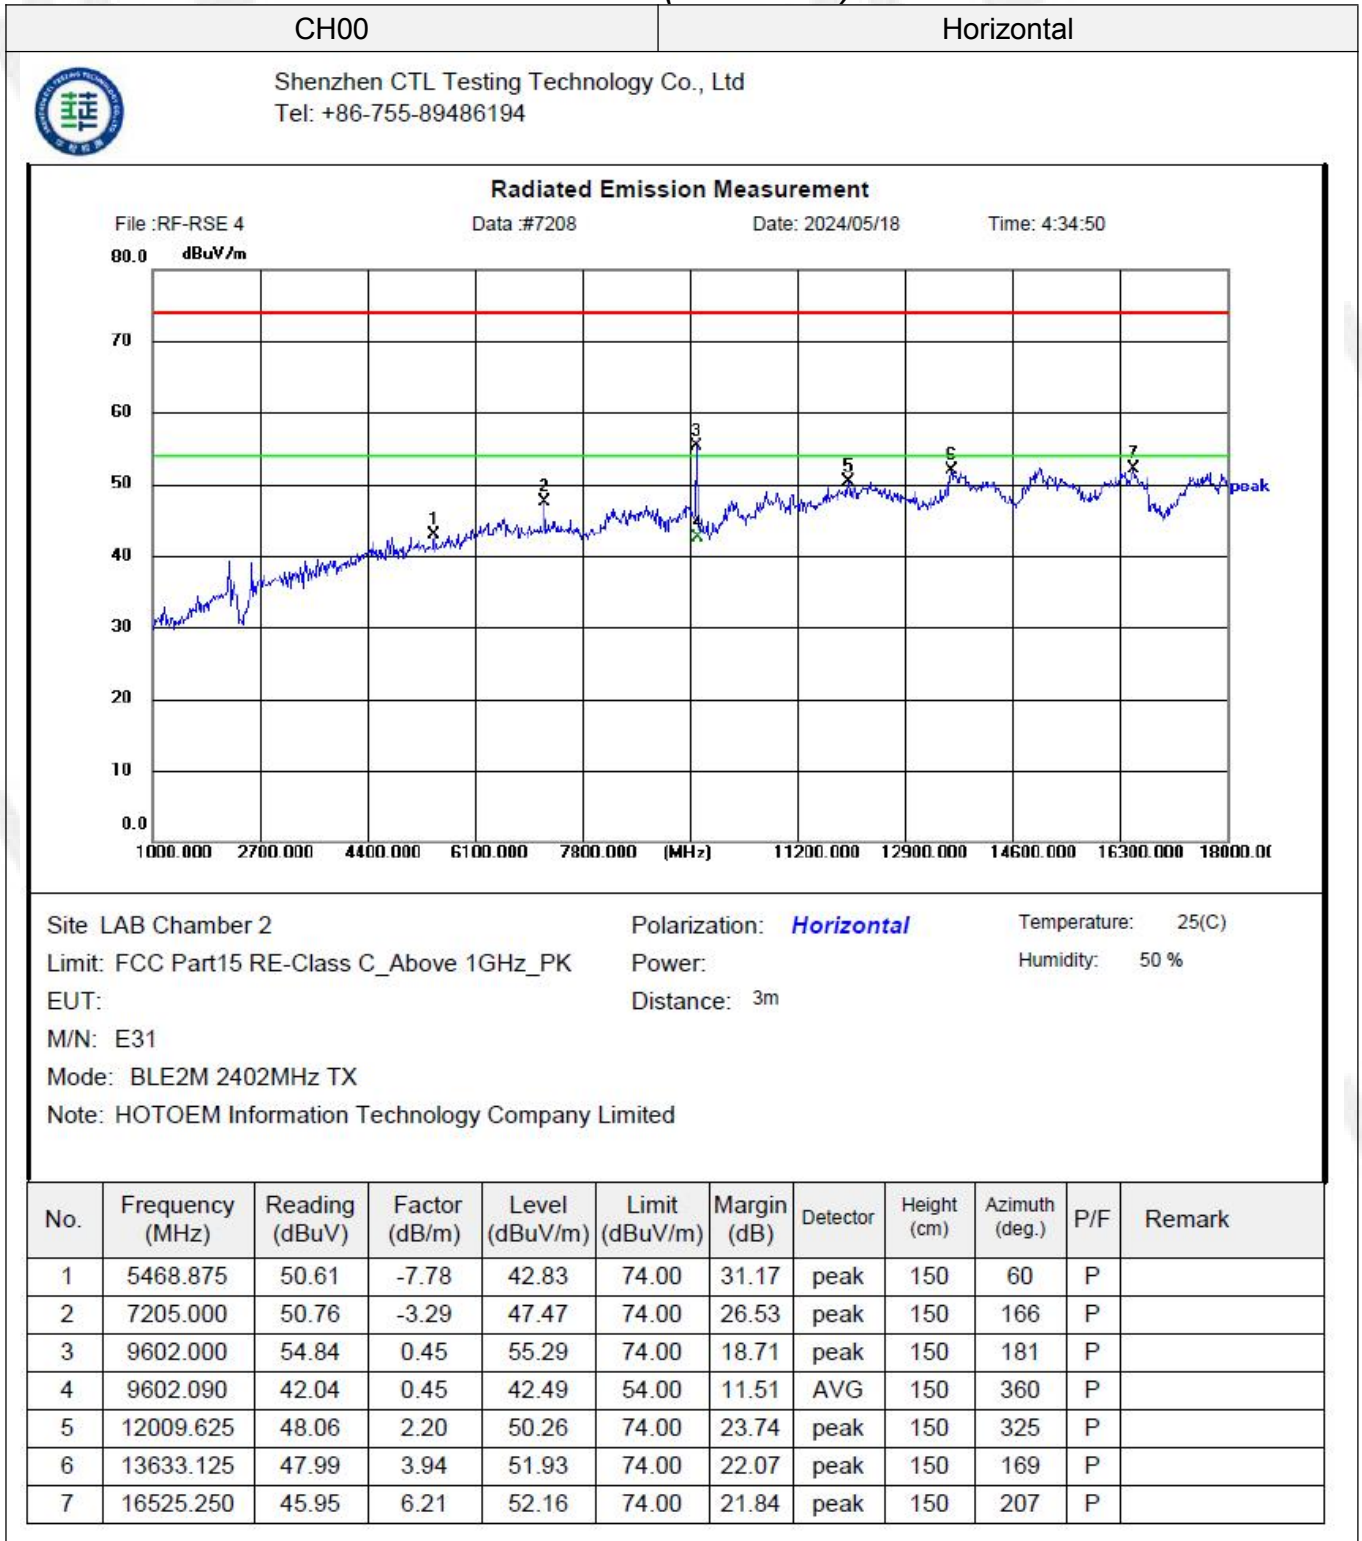


CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

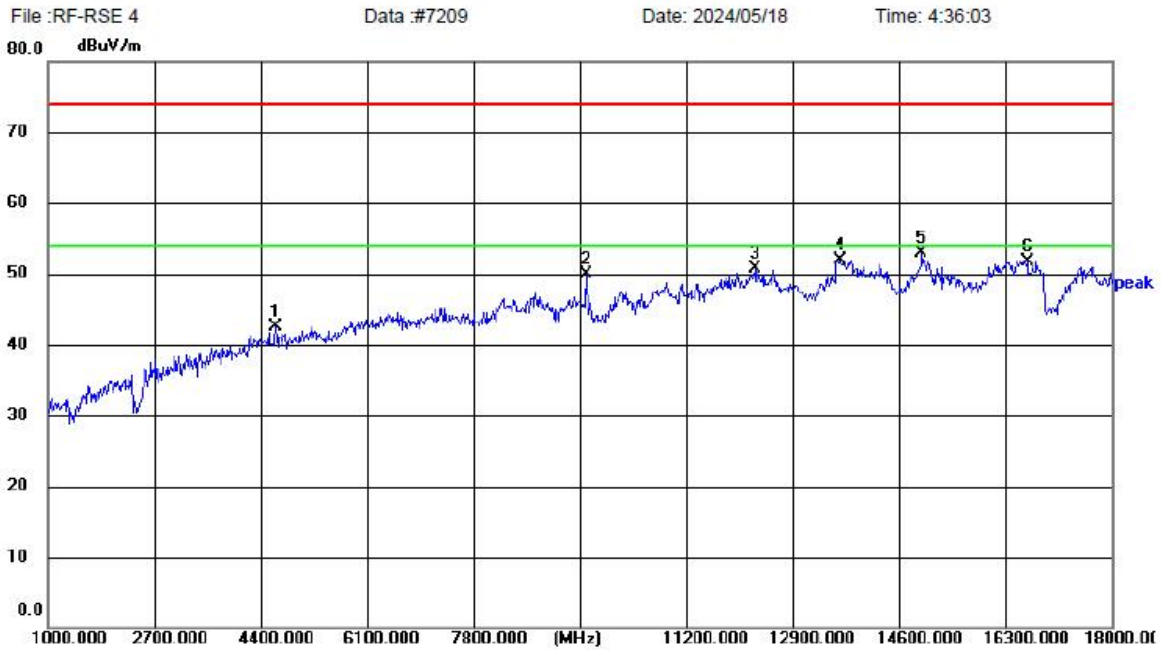

Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: FCC Part15 RE-Class C_Above 1GHz_PK Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2402MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4642.250	50.79	-8.24	42.55	74.00	31.45	peak	150	100	P	
2	9602.000	49.40	0.45	49.85	74.00	24.15	peak	150	108	P	
3	12302.875	48.51	2.17	50.68	74.00	23.32	peak	150	47	P	
4	13648.000	48.07	3.93	52.00	74.00	22.00	peak	150	271	P	
5	14961.250	49.59	3.26	52.85	74.00	21.15	peak	150	249	P	
6	16650.625	45.38	6.38	51.76	74.00	22.24	peak	150	142	P	


CH19

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

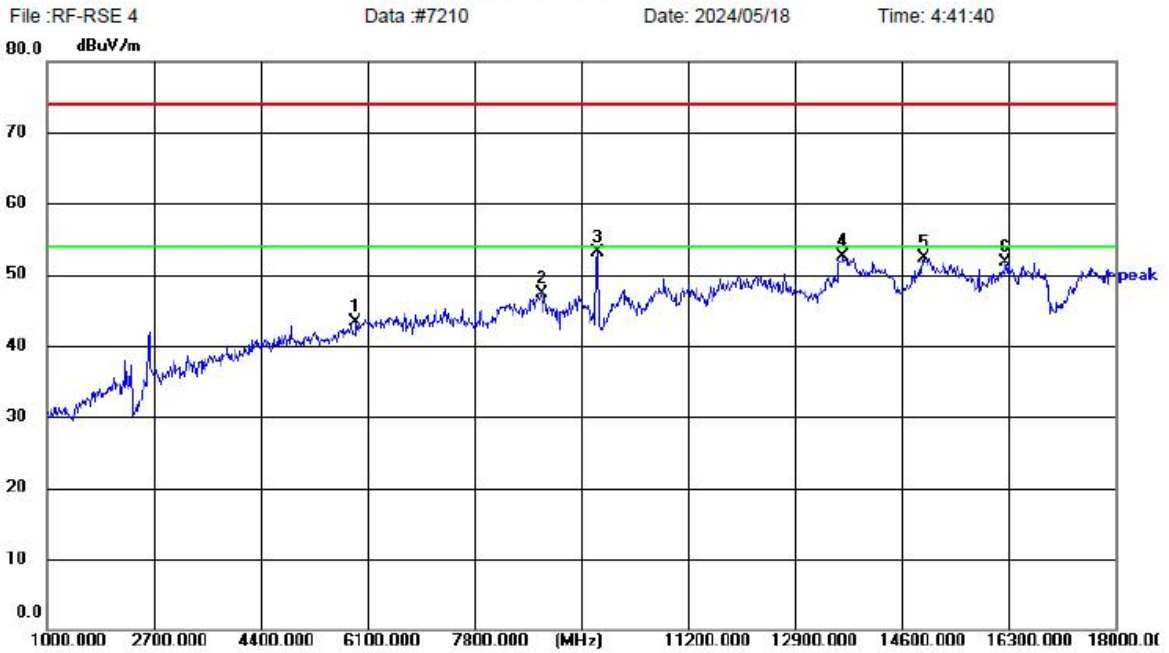

Site LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)
 Limit: FCC Part15 RE-Class C_Above 1GHz_PK Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2440MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5919.375	49.21	-5.98	43.23	74.00	30.77	peak	150	138	P	
2	8885.875	47.92	-0.57	47.35	74.00	26.65	peak	150	38	P	
3	9755.000	52.62	0.50	53.12	74.00	20.88	peak	150	187	P	
4	13673.500	48.54	3.92	52.46	74.00	21.54	peak	150	52	P	
5	14948.500	49.09	3.24	52.33	74.00	21.67	peak	150	327	P	
6	16249.000	46.42	5.38	51.80	74.00	22.20	peak	150	359	P	


CH19

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

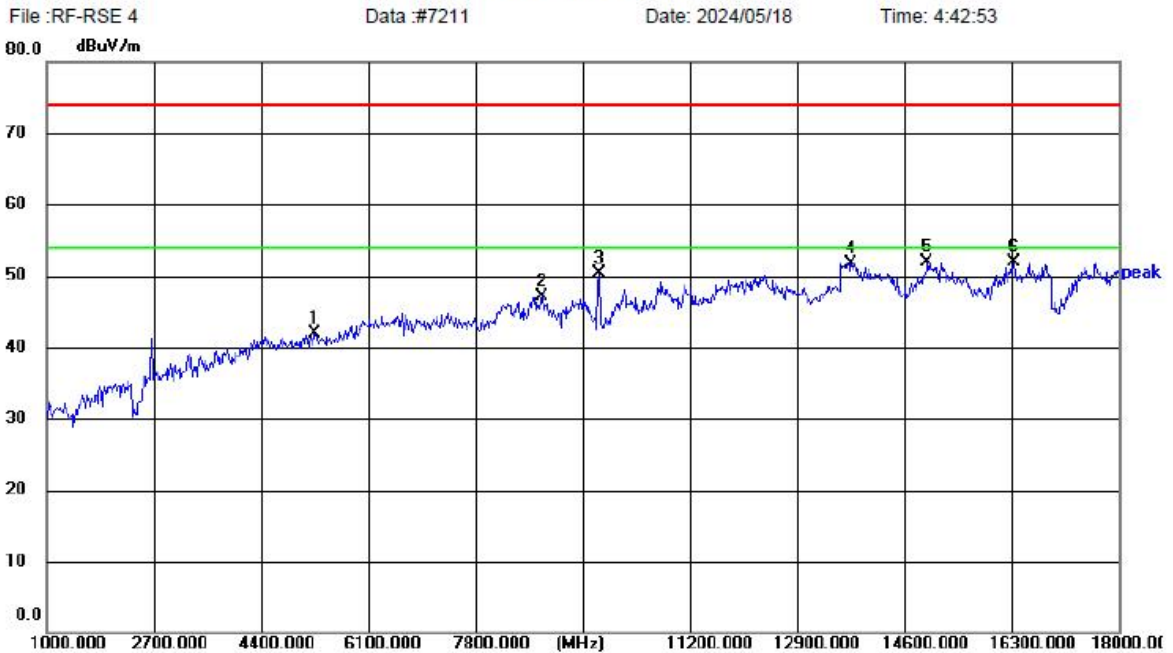

Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: FCC Part15 RE-Class C_Above 1GHz_PK Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2440MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5260.625	49.73	-7.76	41.97	74.00	32.03	peak	150	97	P	
2	8856.125	47.84	-0.64	47.20	74.00	26.80	peak	150	267	P	
3	9755.000	49.88	0.50	50.38	74.00	23.62	peak	150	188	P	
4	13750.000	47.97	3.82	51.79	74.00	22.21	peak	150	46	P	
5	14967.625	48.64	3.27	51.91	74.00	22.09	peak	150	137	P	
6	16348.875	46.17	5.66	51.83	74.00	22.17	peak	150	90	P	


CH39

Horizontal




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

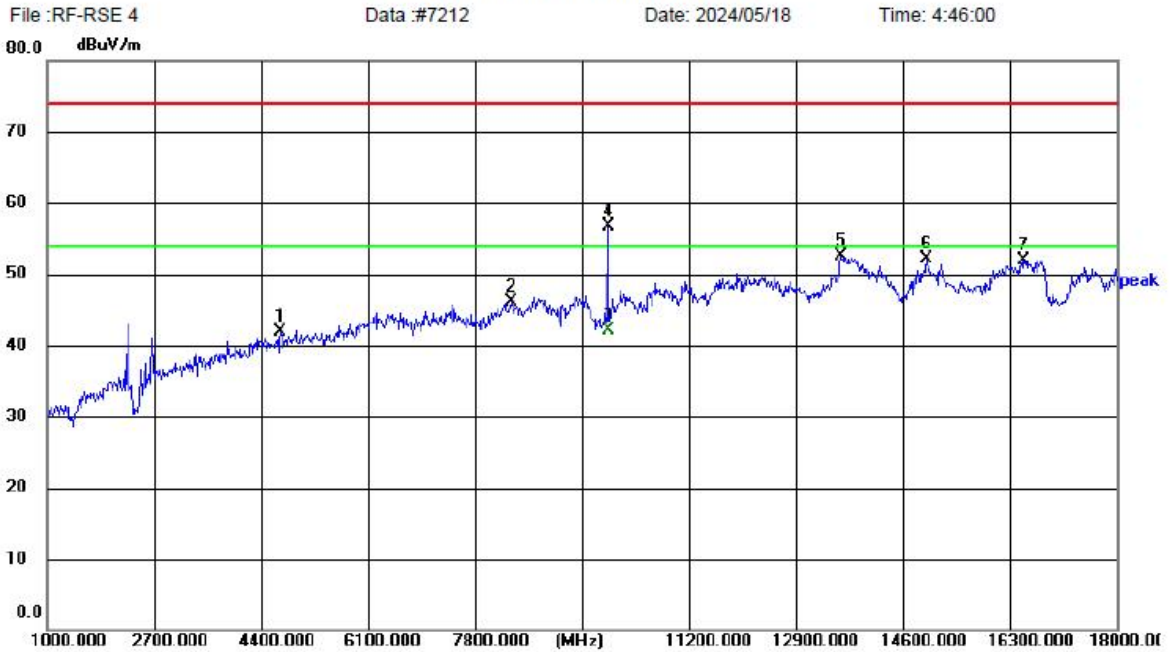

Site LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)
 Limit: FCC Part15 RE-Class C_Above 1GHz_PK Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2480MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4714.500	50.09	-8.17	41.92	74.00	32.08	peak	150	122	P	
2	8382.250	48.18	-2.06	46.12	74.00	27.88	peak	150	139	P	
3	9914.050	41.48	0.59	42.07	54.00	11.93	AVG	150	360	P	
4	9914.375	56.02	0.59	56.61	74.00	17.39	peak	150	185	P	
5	13626.750	48.49	3.95	52.44	74.00	21.56	peak	150	276	P	
6	14978.250	48.84	3.29	52.13	74.00	21.87	peak	150	139	P	
7	16508.250	45.72	6.20	51.92	74.00	22.08	peak	150	18	P	

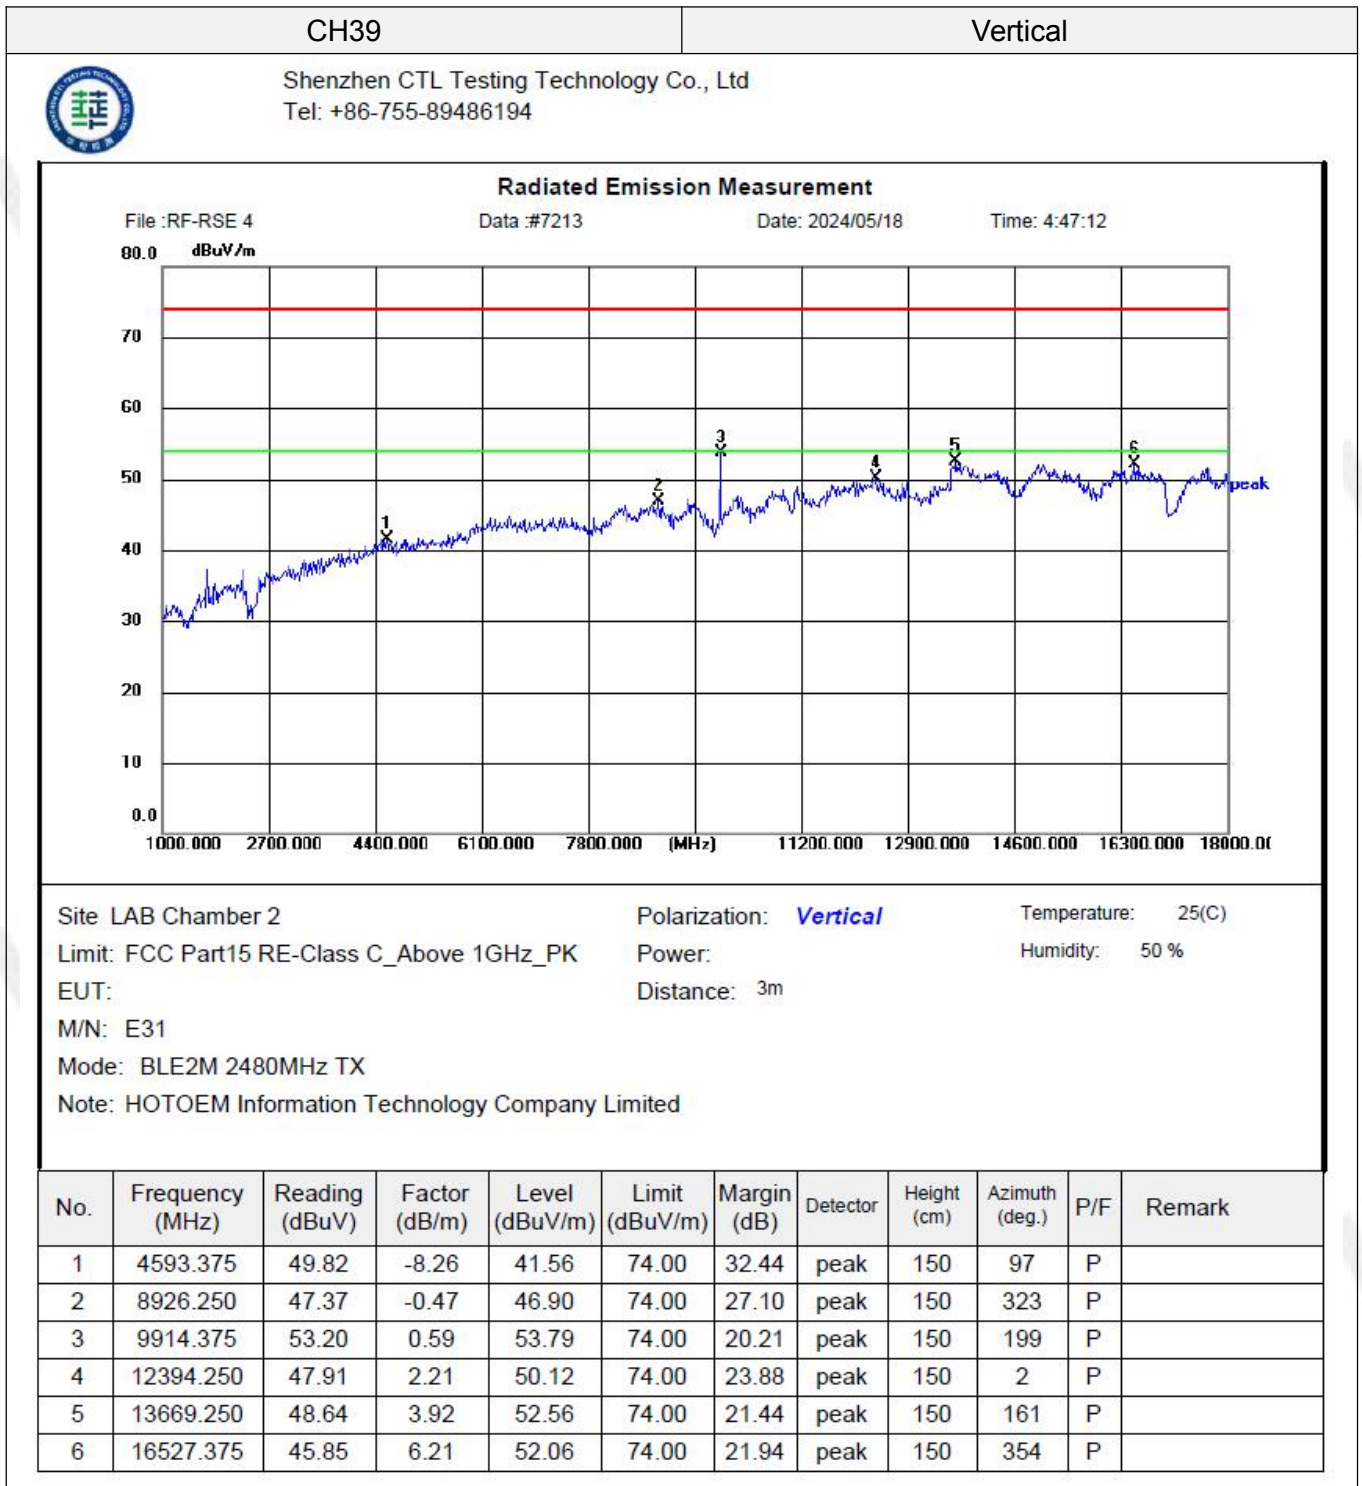


REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. PK detector measurement value is lower than the average limit. Therefore, there is no need to test AV detector measurements.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Other emissions are attenuated 20dB below the limits from 9kHz to 30MHz, so it does not recorded in report.
7. 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

Results of Band Edges Test (Radiated)

Note: All models have been tested, only worse case Test mode 2 is reported.

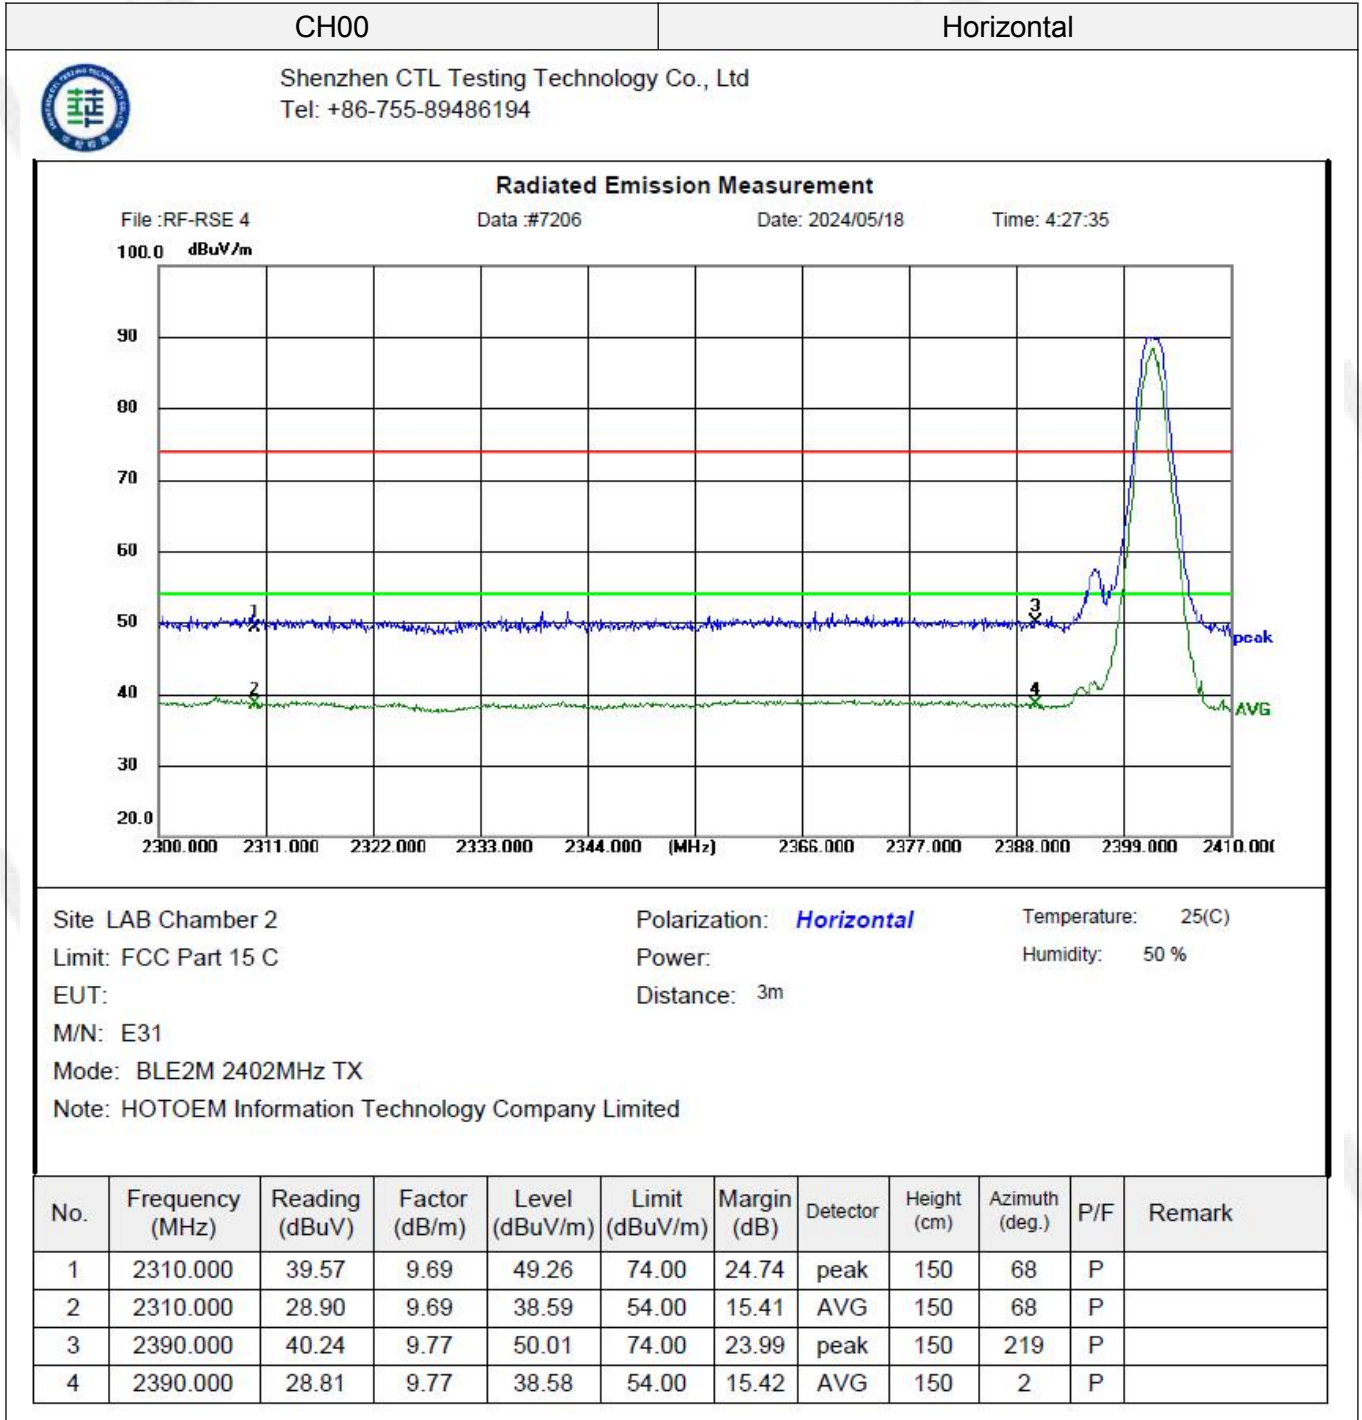

CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF-RSE 4

Data :#7207

Date: 2024/05/18

Time: 4:28:48

100.0 dBuV/m

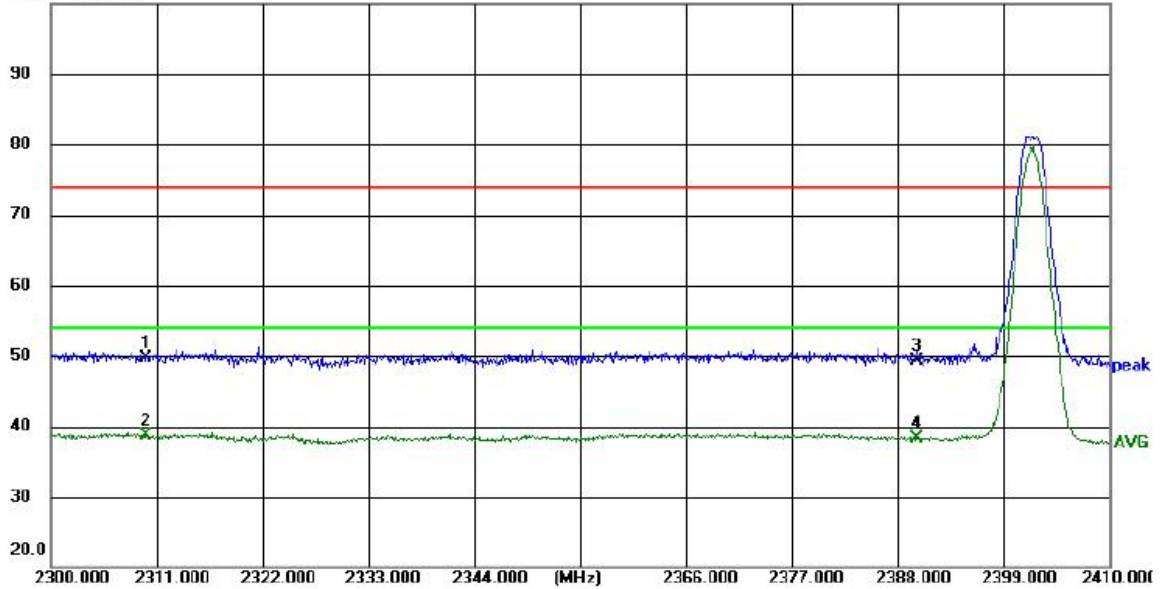

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part 15 C

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: E31

Mode: BLE2M 2402MHz TX

Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.00	9.69	49.69	74.00	24.31	peak	150	258	P	
2	2310.000	28.97	9.69	38.66	54.00	15.34	AVG	150	199	P	
3	2390.000	39.57	9.77	49.34	74.00	24.66	peak	150	274	P	
4	2390.000	28.56	9.77	38.33	54.00	15.67	AVG	150	274	P	

CH39


Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF-RSE 4 Data :#7200 Date: 2024/05/18 Time: 4:11:55

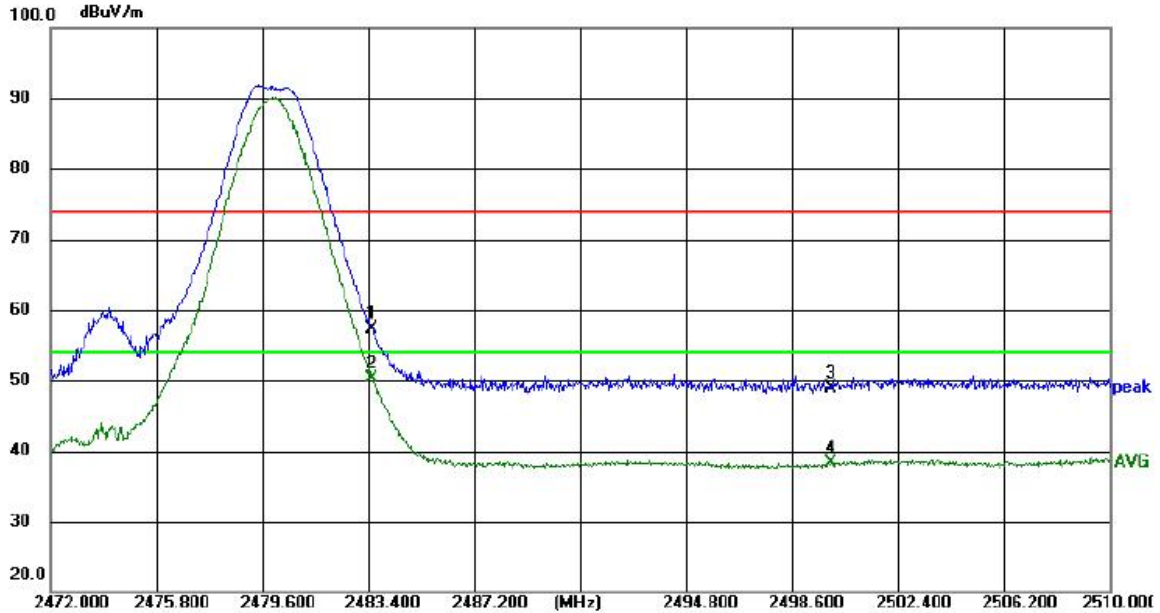

Site: LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)
 Limit: FCC Part 15 C Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2480MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	47.36	9.93	57.29	74.00	16.71	peak	150	27	P	
2	2483.500	40.42	9.93	50.35	54.00	3.65	AVG	150	27	P	
3	2500.000	38.94	10.00	48.94	74.00	25.06	peak	150	205	P	
4	2500.000	28.28	10.00	38.28	54.00	15.72	AVG	150	307	P	


CH39

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

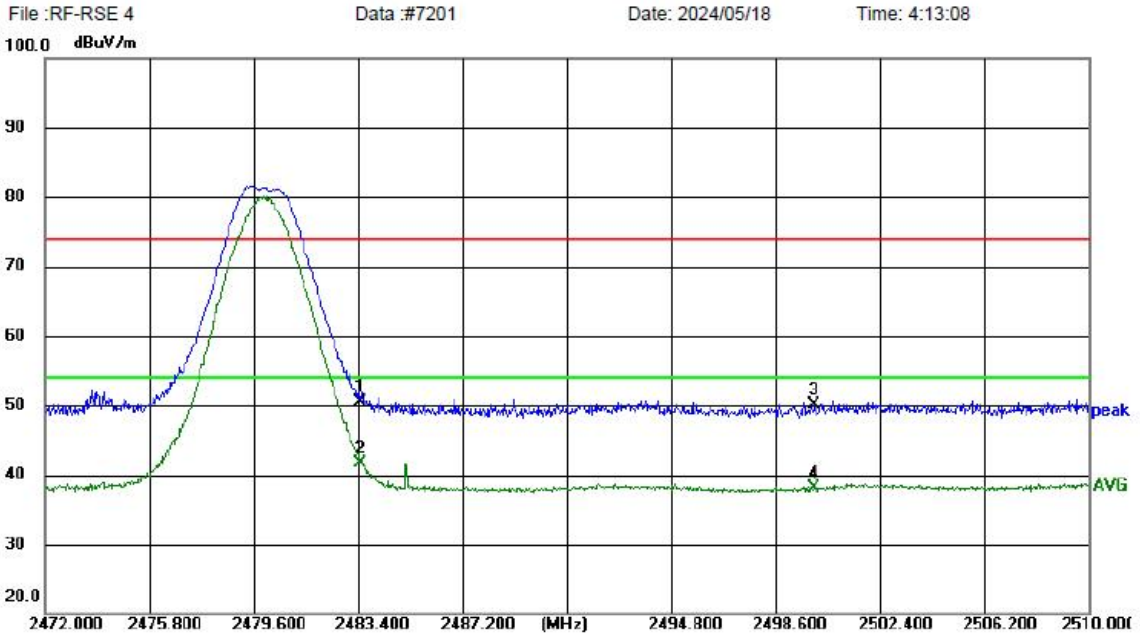

Site: LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: FCC Part 15 C Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: E31
 Mode: BLE2M 2480MHz TX
 Note: HOTOEM Information Technology Company Limited

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	40.60	9.93	50.53	74.00	23.47	peak	150	333	P	
2	2483.500	31.78	9.93	41.71	54.00	12.29	AVG	150	333	P	
3	2500.000	40.12	10.00	50.12	74.00	23.88	peak	150	350	P	
4	2500.000	28.13	10.00	38.13	54.00	15.87	AVG	150	350	P	

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

Test Configuration



Test Results

Raw data reference to Section 2 of document No. CTL2405071031-WF02_Appendix of BLE.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW \geq 3 kHz.
3. Set the VBW \geq 3 \times RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

Raw data reference to Section 3 of document No. CTL2405071031-WF02_Appendix of BLE.

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Raw data reference to Section 1 of document No. CTL2405071031-WF02_Appendix of BLE.

3.6. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Raw data reference to Section 4 of document No. CTL2405071031-WF02_Appendix of BLE.

4. Test Setup Photos of the EUT

Reference to the test report No. CTL2405071031-WF01.

5. Photos of the EUT

Reference to the test report No. CTL2405071031-WF01.

***** End of Report *****