

Test Report

Product: Qi2 Magnetic Wireless Charging Phone
Mount with Active Cooling

Trade Mark: AMEGAT

Model Number: HDQ1011

FCC ID: 2BAST-HDQ1011

Prepared for

Shenzhen Autral Technology Innovation Co., Ltd.
6q, Guanglong building, no.162, North Pingxin Road, Hehua community,
Pinghu Street, Longgang District, ShenZhenShi

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd
Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	DESCRIPTION OF EUT	5
1.2	TEST MODE.....	5
1.3	TEST SETUP	6
1.4	ANCILLARY EQUIPMENT	6
2	SUMMARY OF TEST RESULT	7
3	TEST FACILITIES AND ACCREDITATIONS	8
3.1	TEST LABORATORY	8
3.2	ENVIRONMENTAL CONDITIONS	8
3.3	MEASUREMENT UNCERTAINTY	8
3.4	TEST SOFTWARE	8
4	LIST OF TEST EQUIPMENT	9
5	TEST ITEM AND RESULTS	11
5.1	ANTENNA REQUIREMENT	11
5.2	CONDUCTED EMISSION	12
5.3	RADIATED EMISSION	14
5.4	OCCUPIED BANDWIDTH	22
6	PHOTOGRAPHS OF THE TEST SETUP.....	24
7	PHOTOGRAPHS OF THE EUT	25

TEST RESULT CERTIFICATION

Applicant's Name..... : Shenzhen Autral Technology Innovation Co., Ltd.
Address : 6q, Guanglong building, no.162, North Pingxin Road, Hehua community, Pinghu Street, Longgang District, ShenZhenShi
Manufacturer's Name : Shenzhen Autral Technology Innovation Co., Ltd.
Address : 6q, Guanglong building, no.162, North Pingxin Road, Hehua community, Pinghu Street, Longgang District, ShenZhenShi

Product description

Product name : Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling

Model Number : HDQ1011

Standards : FCC Part 15C


Test procedure..... : IEEE/ANSI C63.10-2020


This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.


Date of Test..... :

Date (s) of performance of tests : May 29, 2024~July 08, 2024

Test Result..... : **Pass**

Testing Engineer : 
(Z o e S u)

Technical Manager : 
(G a r y L u)

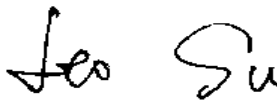Authorized Signatory : 
(L e o S u)

1 General Description

1.1 Description of EUT

Product name:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling
Model name:	HDQ1011
Series Model:	N/A
Different of series model:	N/A
Operation frequency:	BPP/EPP: 115kHz-205kHz MPP: 360kHz
Operational mode:	Wireless charging
Modulation type:	FSK
Antenna type:	Coil Antenna
Hardware version:	V3
Software version:	V1.0
Battery:	N/A
Power supply:	Input: DC 5V/3A, 9V/3A Wireless Output: 5W, 7.5W, 10W, 15W
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	Wireless Output: 5W
2	Wireless Output: 7.5W
3	Wireless Output: 10W
4	Wireless Output: 15W

Test Item	Final Test Mode
Conducted Emissions	N/A
Radiated Emissions	3/4
20dB bandwidth	2/4

Note: All modes have been tested, and the report only reflects the test results of the worst mode (Final Test Mode).

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Load	YBZ 3.1	/	YBZ
Phone	iPhone 13 Pro Max	PMFXXN3PV2	Apple Inc.
Battery	6-QW-45(370)	2C24H6K1660C	Camel Group Cable Co., Ltd
Car charger	P0015	HKPJV24106000 898	Huawei Terminal Co., Ltd

Note:

1. YBZ 3.1 for BPP/EPP: 115-205kHz test mode 1/2/3.
2. iPhone 13pro for MPP: 360kHz test mode 4.

2 Summary of Test Result

Test procedures according to the technical standards:

FCC Part 15C				
No.	Standard Section	Test Item	Result	Remark
1	FCC Part 15.203	Antenna Requirement	Pass	
2	FCC Part 15.207	Conducted Emission	N/A	
3	FCC Part 15.209	Radiated Emission	Pass	
4	FCC Part 15.215	20dB Bandwidth	Pass	

Note:
1. "N/A" means the test case does not apply to the test object.

3 Test Facilities and Accreditations

3.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

3.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
RF power, conducted	± 0.57 dB	
Conducted emission(150kHz~30MHz)	± 2.5 dB	
Radiated emission(9kHz-30MHz)	± 2.5 dB	
Radiated emission(30MHz~1GHz)	± 4.2 dB	
Radiated emission (above 1GHz)	± 4.7 dB	
Occupied Bandwidth	$\pm 3\%$	
Temperature	± 1 degree	
Humidity	± 5 %	

3.4 Test Software

Software name	Manufacturer	Model	Version
EMI Measurement	Farad	EZ-EMC	V1.1.4.2
Conducted test system	MWRF-test	MTS 8310	V2.0.0

4 List of Test Equipment

Radiation emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E001	Horn Antenna	Schwarzbeck	BBHA 9120D	02592	2024-05-18	2026-05-17
2	HB-E002	Biconical log-periodic composite antenna	Schwarzbeck	VULB 9168	01340	2024-05-18	2026-05-17
3	HB-E003	SHF-EHF Horn	Schwarzbeck	BBHA 91270	01193	2024-05-18	2026-05-17
4	HB-E005	Preamplifier	Noyetec	LAN-0118	NYCM1420102	2024-05-17	2025-05-16
5	HB-E006	Preamplifier	Noyetec	LAN-1840	NYCM1420103	2024-05-17	2025-05-16
6	HB-E007	EMI TEST RECEIVER	R&S	ESR7	102520	2024-05-17	2025-05-16
7	HB-E009	POSITINAL COTROLLE R	Noyetec	N/A	N/A	/	/
8	HB-E013	RF switch	Noyetec	NY-RF4	NY0CM1420204	/	/
9	HB-E066	Illuminance Tester	TASI	TA8121	N/A	2024-05-21	2025-05-20
10	HB-E075	Active loop antenna	Schwarzbeck	FMZB 1519B	1519B-245	2024-05-18	2026-05-17
11	HB-E076	Preamplifier	Hewlett Packard	8447D	1937A02278	2024-05-17	2025-05-16
Conduction emission							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E014	4 Path V-LISN	Schwarzbeck	NNLK 8121	00770	2024-05-17	2025-05-16
2	HB-E015	Pulse Limiter	Schwarzbeck	VTSD 9561-F	00949	2024-05-17	2025-05-16
3	HB-E016	ZN23201	Noyetec	ZN23201	N/A	2024-05-21	2025-05-20
4	HB-E059	Attenuator	Xianghua	TS2-6-1	220215166	2024-05-17	2025-05-16
5	HB-E069	EMI TEST RECEIVER	R&S	ESCI	N/A	2024-05-17	2025-05-16
RF							
Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E041	MXG Anaioq Signal Generator	Agilent	N5181A	MY47070421	2024-05-17	2025-05-16
2	HB-E042	WIDEBAND RADIO COMMUNICA	R&S	CMW500	132108	2024-05-17	2025-05-16

		TION TESTER					
3	HB-E043	MXG Anaioq Signal Generator	Agilent	N5182A	US46240335	2024-05-17	2025-05-16
4	HB-E044	Signal& spectrum Analyzer	R&S	FSV3044	101264	2024-05-17	2025-05-16
5	HB-E045	RF Control Box	Noyetec	NY100-R FCB	N/A	/	/
6	HB-E058	Thermometer Clock Humidity Monitor	N/A	HTC-1	N/A	/	/

Note: the calibration interval of the above test instruments is 12&24 months and the calibrations are traceable to international system unit (SI).

5 Test Item And Results

5.1 Antenna Requirement

5.1.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 Test Result

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted Emission


5.2.1 Limits

Limits – Class A		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	79	66
0.5 to 30	73	60
Limits – Class B		
Frequency (MHz)	Limit (dBµV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50
Note: 1. the tighter limit applies at the band edges. 2. the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.		

5.2.2 Test Procedures

- a) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d) LISN is at least 80 cm from nearest part of EUT chassis.
- e) For the actual test configuration, please refer to the related Item – photographs of the test setup.

5.2.3 Test setup

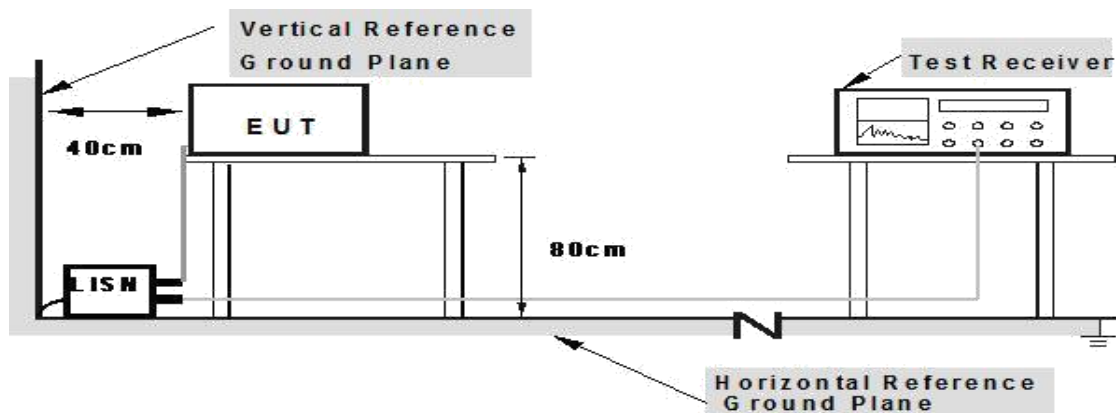

5.2.4 Test Result

Note: The EUT is not intended to be connected to AC mains power. Therefore, this test is not applicable.

5.3 Radiated Emission

5.3.1 Limits

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

5.3.2 Test Procedures


- a) The radiated emission tests were performed in the 3 meters.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) If the peak mode measured value compliance with and lower than quasi peak mode limit, the EUT shall be deemed to meet QP limits and then no additional QP mode measurement performed.
- e) If the peak mode measured value compliance with and lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.
- f) For the actual test configuration, please refer to the related item – EUT test photos.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

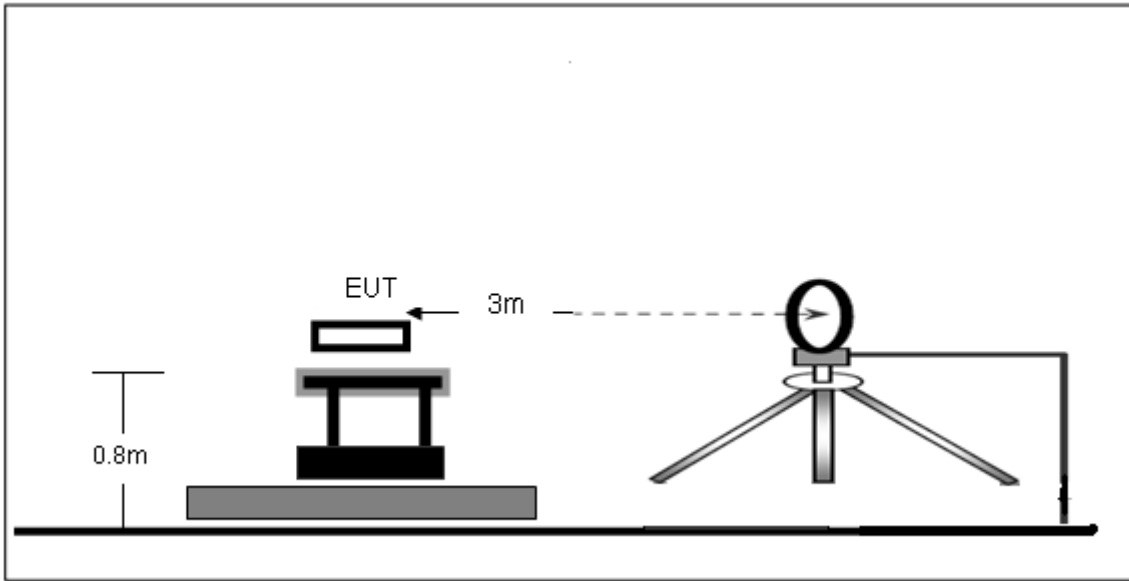


Radiated Emission Test-Up Frequency 30MHz~1GHz

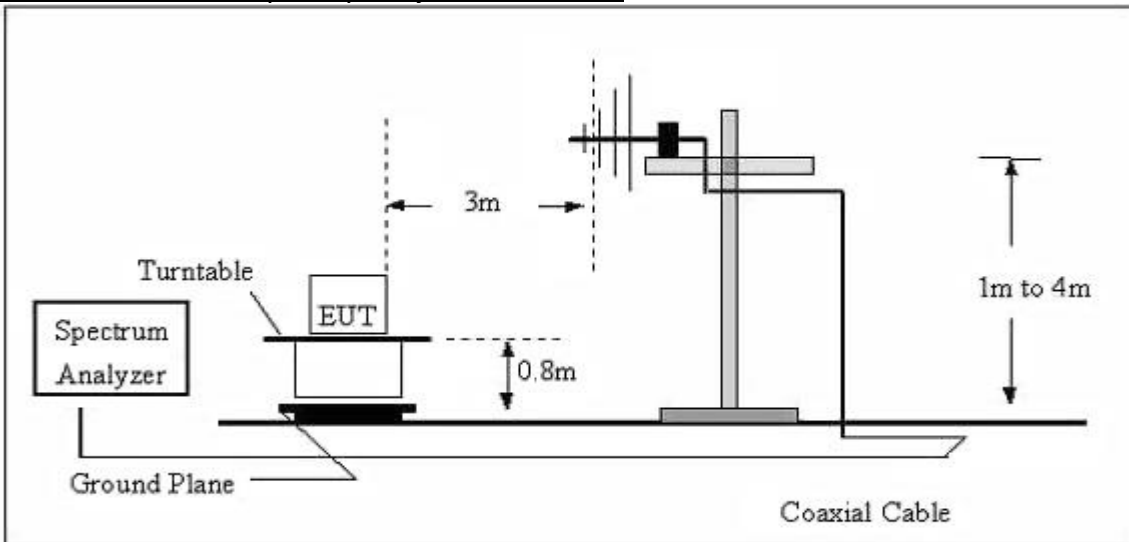

5.3.4 Test Result


Frequency range (9kHz – 30MHz)

EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 3(115-205kHz)	Phase:	Coaxial
Test Voltage:	DC 9V from car charger		

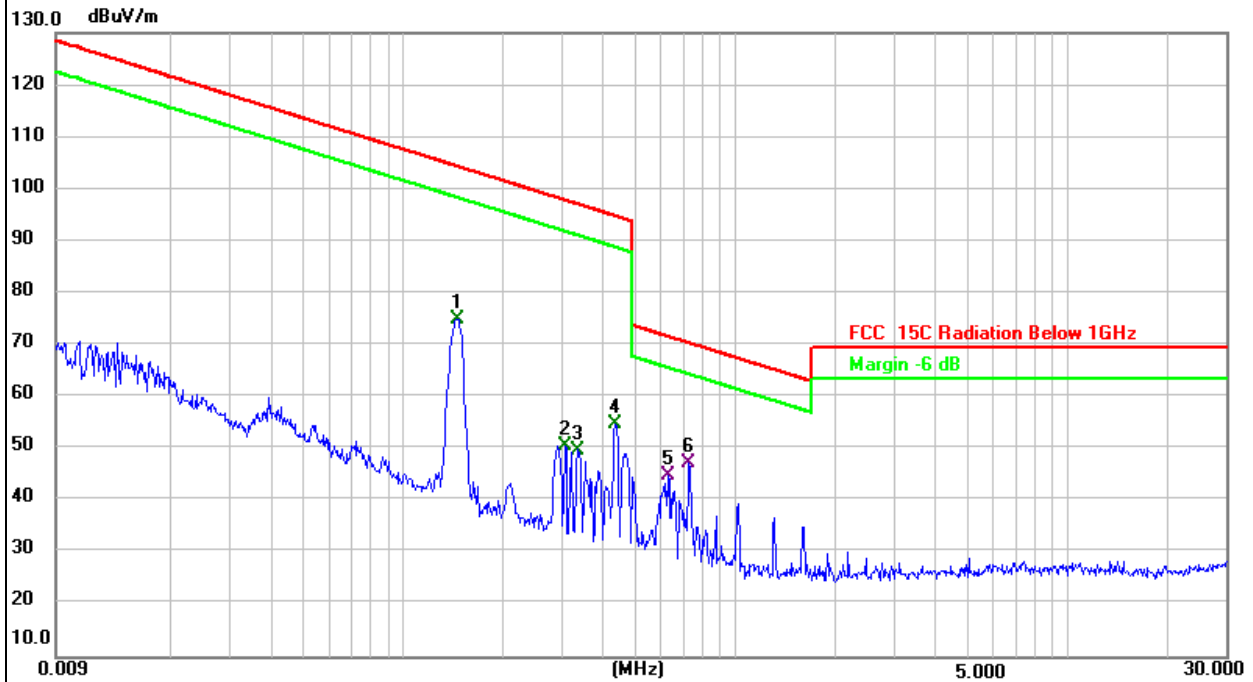

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1454	55.76	19.22	74.98	104.37	-29.39	AVG
2	0.3067	31.39	19.28	50.67	97.88	-47.21	AVG
3	0.3353	30.61	19.29	49.90	97.10	-47.20	AVG
4	0.4347	35.54	19.31	54.85	94.84	-39.99	AVG
5	0.6262	25.68	19.35	45.03	71.68	-26.65	QP
6 *	0.7246	26.43	20.78	47.21	70.41	-23.20	QP


EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 4 (360kHz)	Phase:	Coaxial
Test Voltage:	DC 9V from car charger		

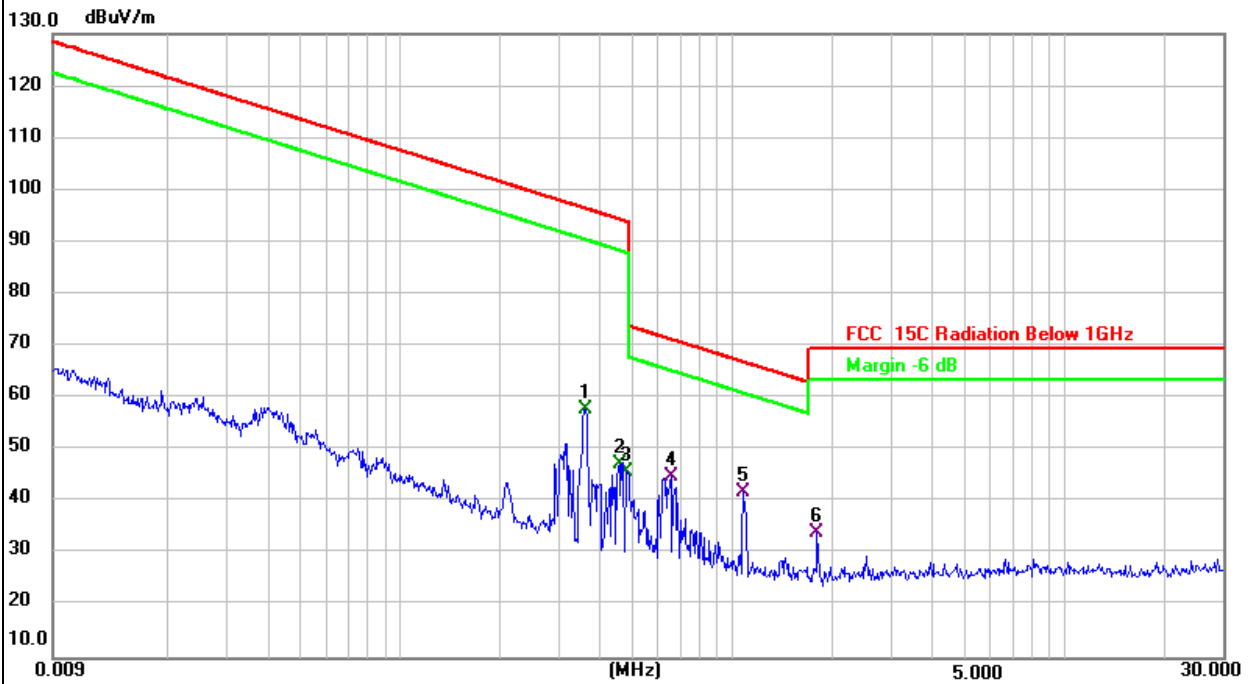

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.3607	38.57	19.29	57.86	96.47	-38.61	AVG
2	0.4564	28.01	19.33	47.34	94.42	-47.08	AVG
3	0.4791	26.61	19.33	45.94	94.00	-48.06	AVG
4	0.6521	25.65	19.35	45.00	71.32	-26.32	QP
5 *	1.0783	22.49	19.34	41.83	66.97	-25.14	QP
6	1.7976	14.73	19.41	34.14	69.50	-35.36	QP


Frequency range (30MHz – 1GHz)

EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 3 (115-205kHz)	Phase:	Vertical
Test Voltage:	DC 9V from car charger		

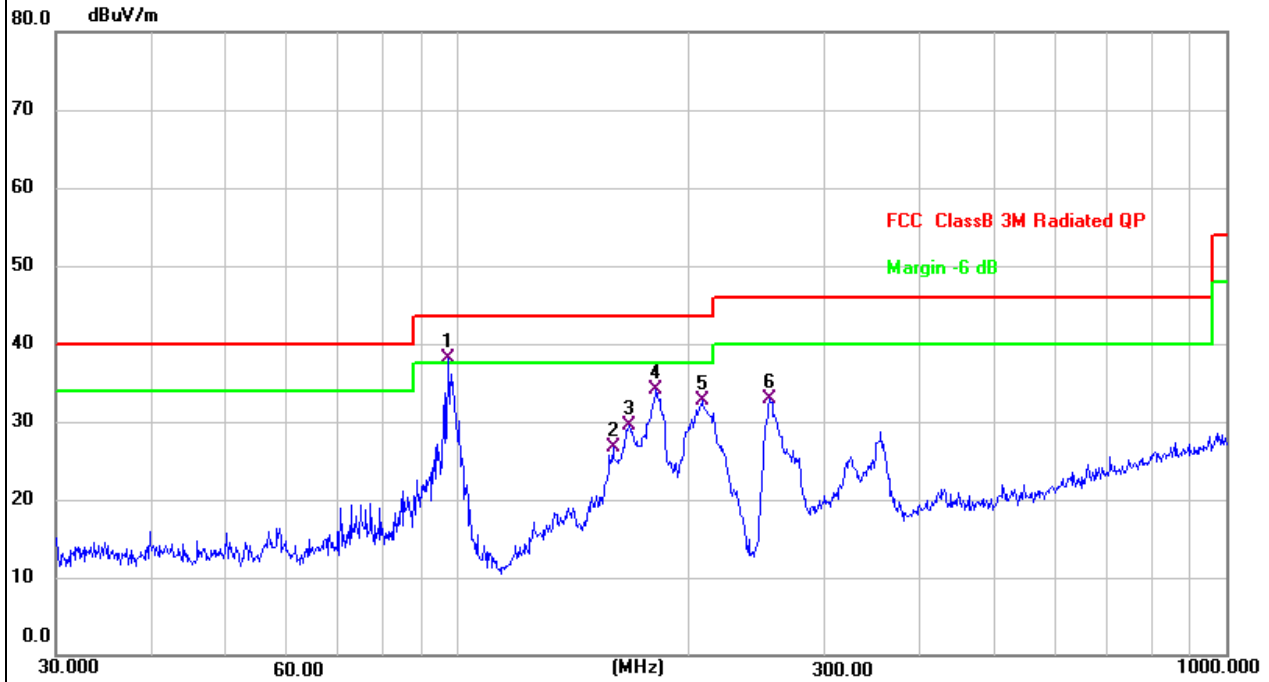

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	97.1148	55.83	-17.70	38.13	43.50	-5.37	QP
2	159.2251	40.12	-13.38	26.74	43.50	-16.76	QP
3	167.2368	42.95	-13.50	29.45	43.50	-14.05	QP
4	181.2834	49.33	-15.31	34.02	43.50	-9.48	QP
5	207.8501	49.51	-16.87	32.64	43.50	-10.86	QP
6	254.7284	47.30	-14.38	32.92	46.00	-13.08	QP

EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 3 (115-205kHz)	Phase:	Horizontal
Test Voltage:	DC 9V from car charger		

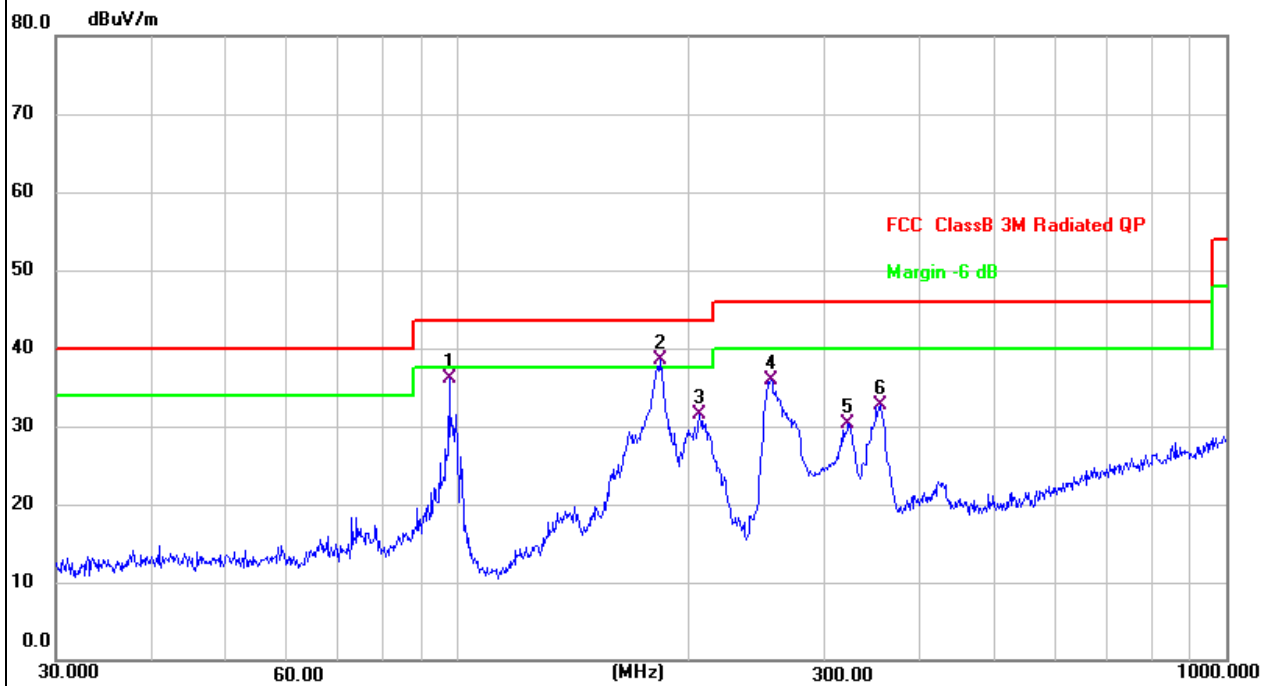

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	97.4560	53.71	-17.66	36.05	43.50	-7.45	QP
2 *	183.2005	54.06	-15.53	38.53	43.50	-4.97	QP
3	206.3976	48.33	-16.85	31.48	43.50	-12.02	QP
4	255.6231	50.21	-14.32	35.89	46.00	-10.11	QP
5	322.1886	42.33	-12.01	30.32	46.00	-15.68	QP
6	355.4273	43.59	-10.85	32.74	46.00	-13.26	QP

EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 4 (360kHz)	Phase:	Vertical
Test Voltage:	DC 9V from car charger		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	96.7749	53.39	-17.72	35.67	43.50	-7.83	QP
2	167.2368	47.21	-13.50	33.71	43.50	-9.79	QP
3	181.9202	52.10	-15.42	36.68	43.50	-6.82	QP
4 *	209.3129	56.34	-16.89	39.45	43.50	-4.05	QP
5	257.4222	47.82	-14.25	33.57	46.00	-12.43	QP
6	355.4273	41.04	-10.85	30.19	46.00	-15.81	QP

EUT:	Qi2 Magnetic Wireless Charging Phone Mount with Active Cooling	Model Name:	HDQ1011
Test Mode:	Mode 4 (360kHz)	Phase:	Horizontal
Test Voltage:	DC 9V from car charger		



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	97.1148	50.92	-17.70	33.22	43.50	-10.28	QP
2	169.0054	49.74	-13.71	36.03	43.50	-7.47	QP
3 *	180.6488	54.30	-15.19	39.11	43.50	-4.39	QP
4 !	208.5803	54.51	-16.88	37.63	43.50	-5.87	QP
5	257.4222	53.23	-14.25	38.98	46.00	-7.02	QP
6	352.9433	48.43	-10.95	37.48	46.00	-8.52	QP

5.4 Occupied Bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.4.2 Test result

Frequency (kHz)	20dB emission bandwidth (Hz)
128	749.30

BPP/EPP:Test plots as below:



Frequency (kHz)	20dB emission bandwidth (Hz)
360	749.30

MPP: Test plots as below:




6 Photographs of the Test Setup

Radiated Emission Below 30MHz



Radiated Emission Above 30MHz

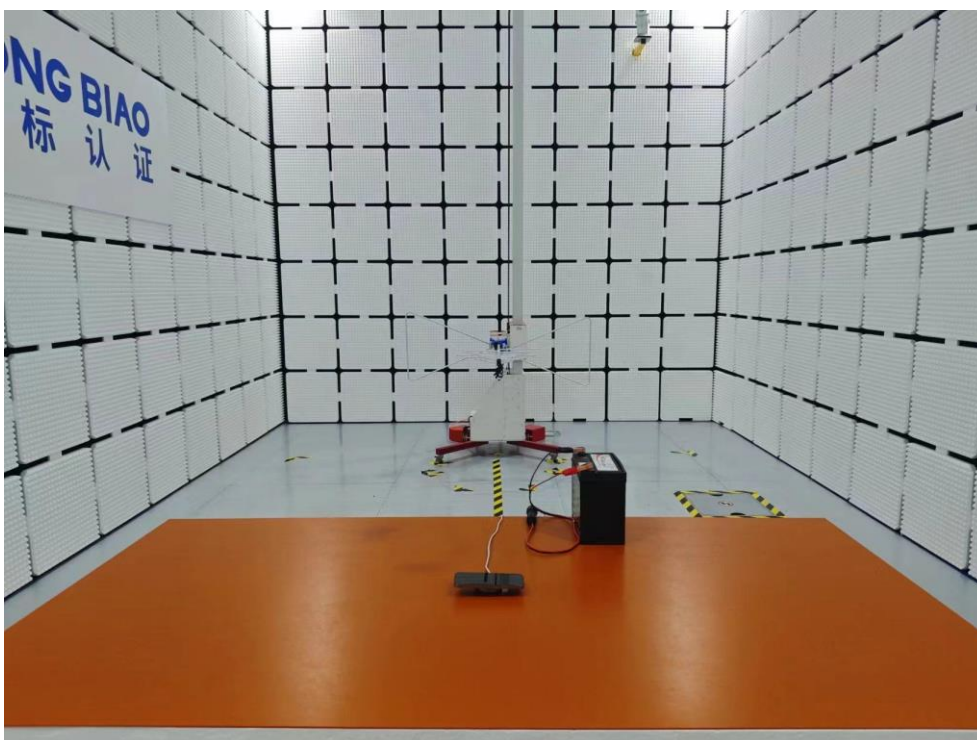

7 Photographs of the EUT

Photo 1

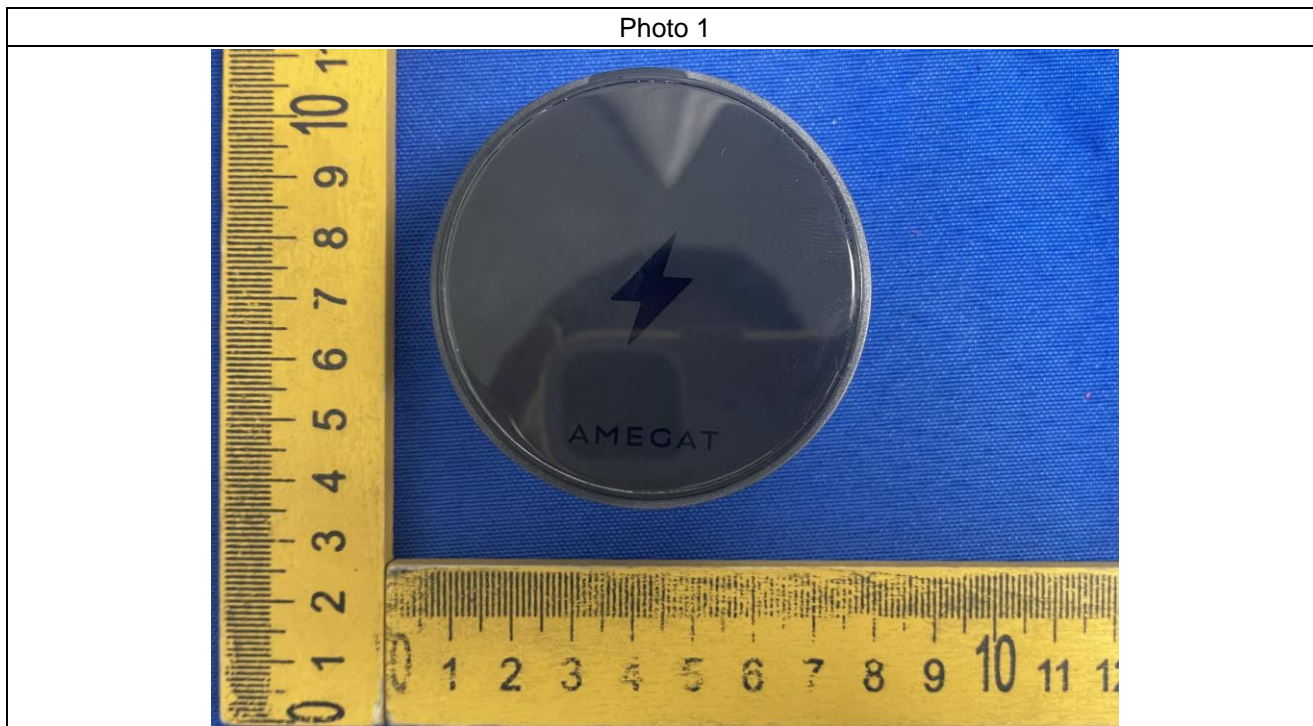


Photo 2

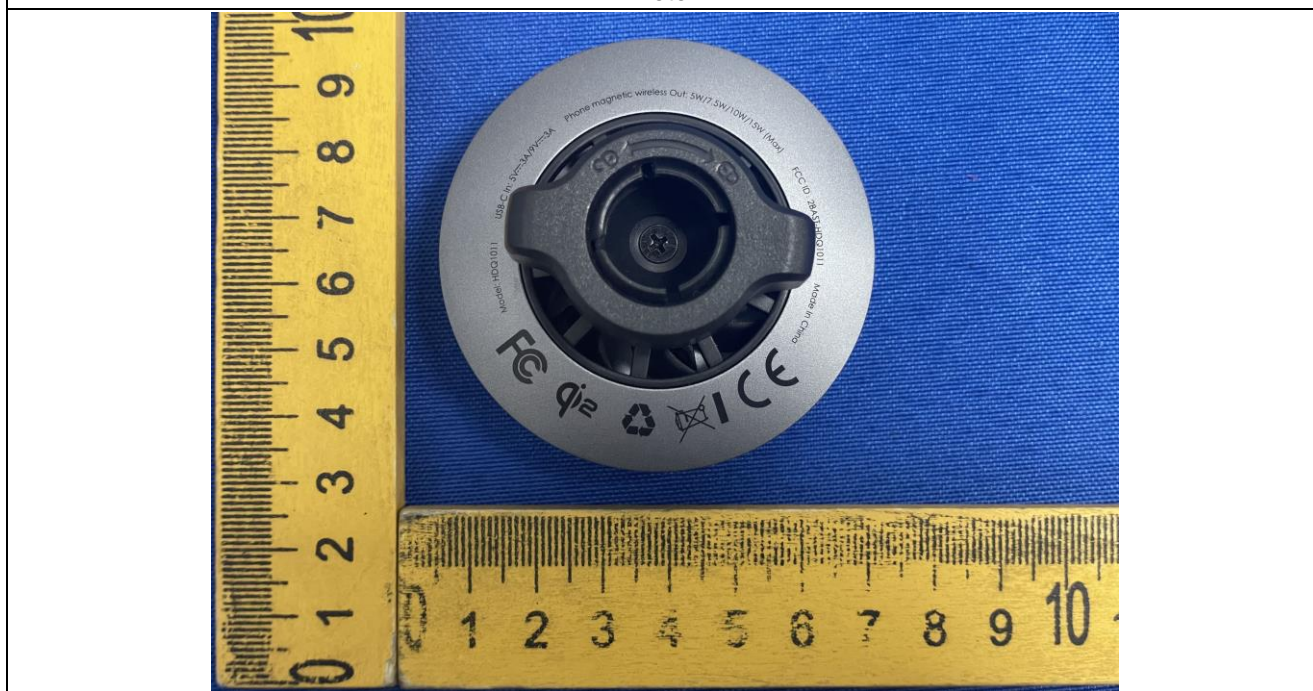


Photo 3

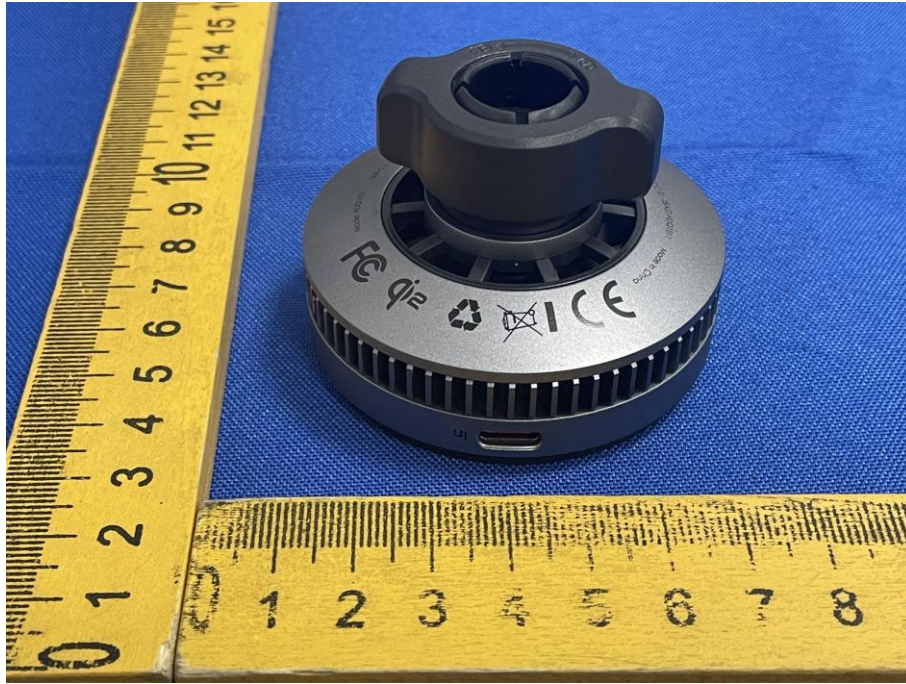


Photo 4

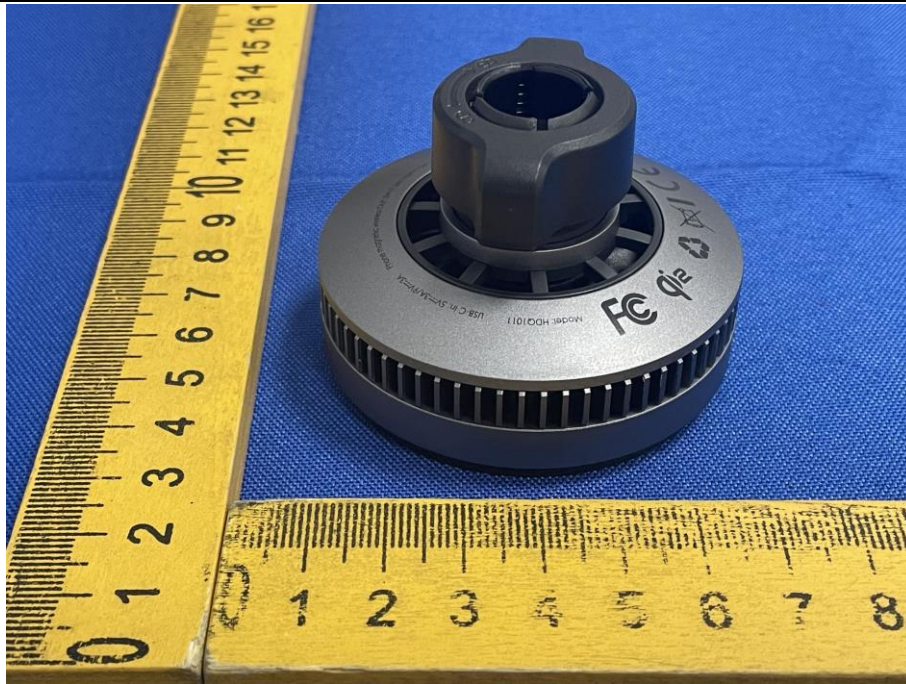


Photo 5

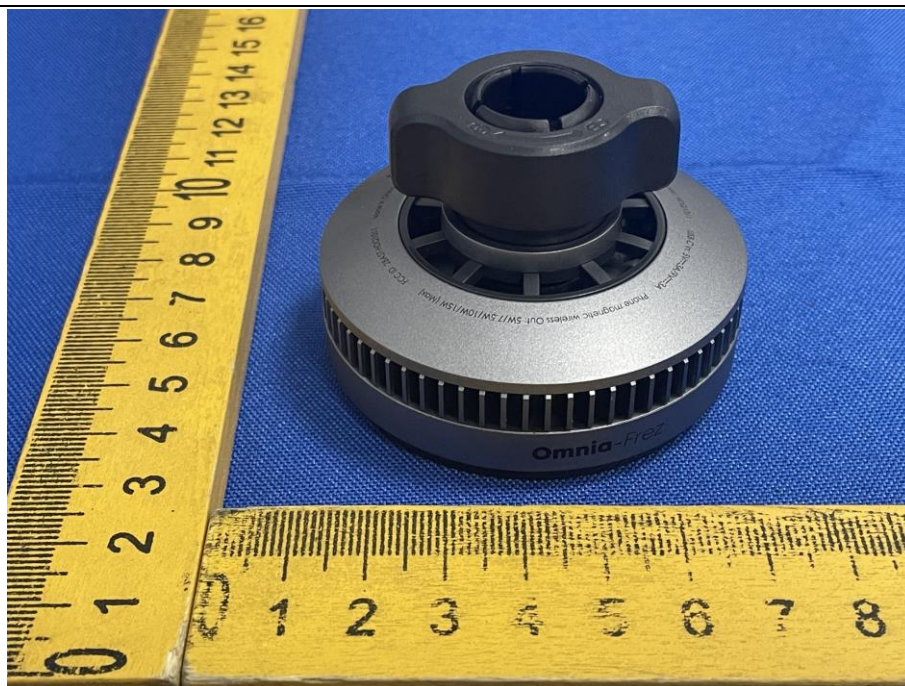


Photo 6

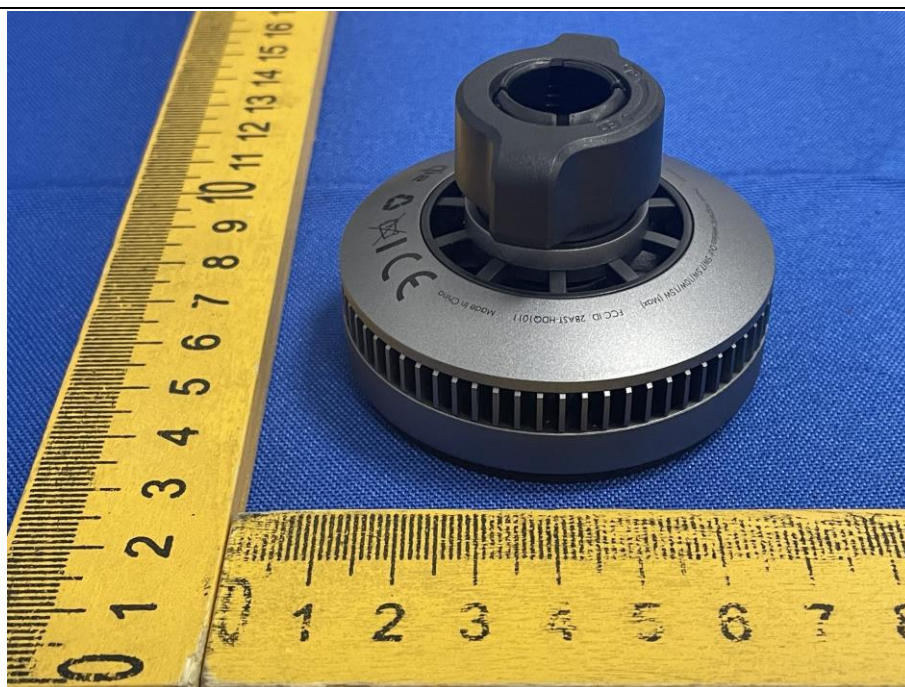


Photo 7

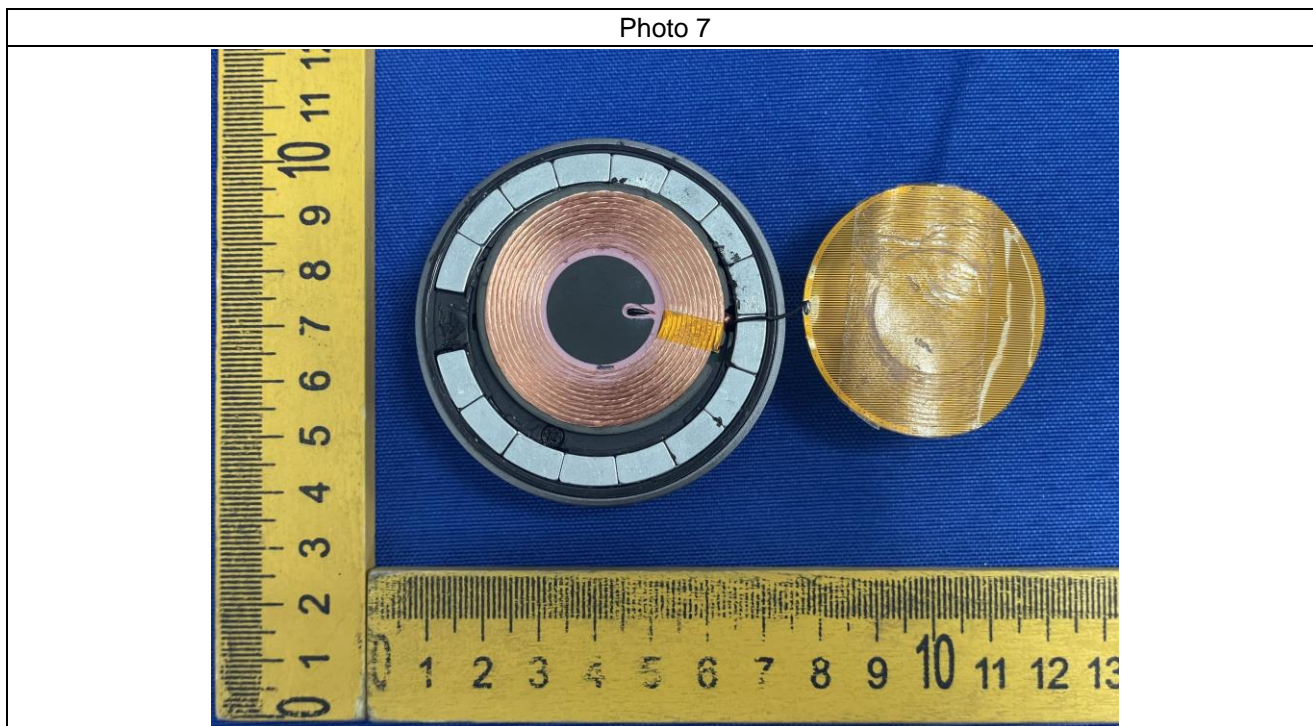


Photo 8

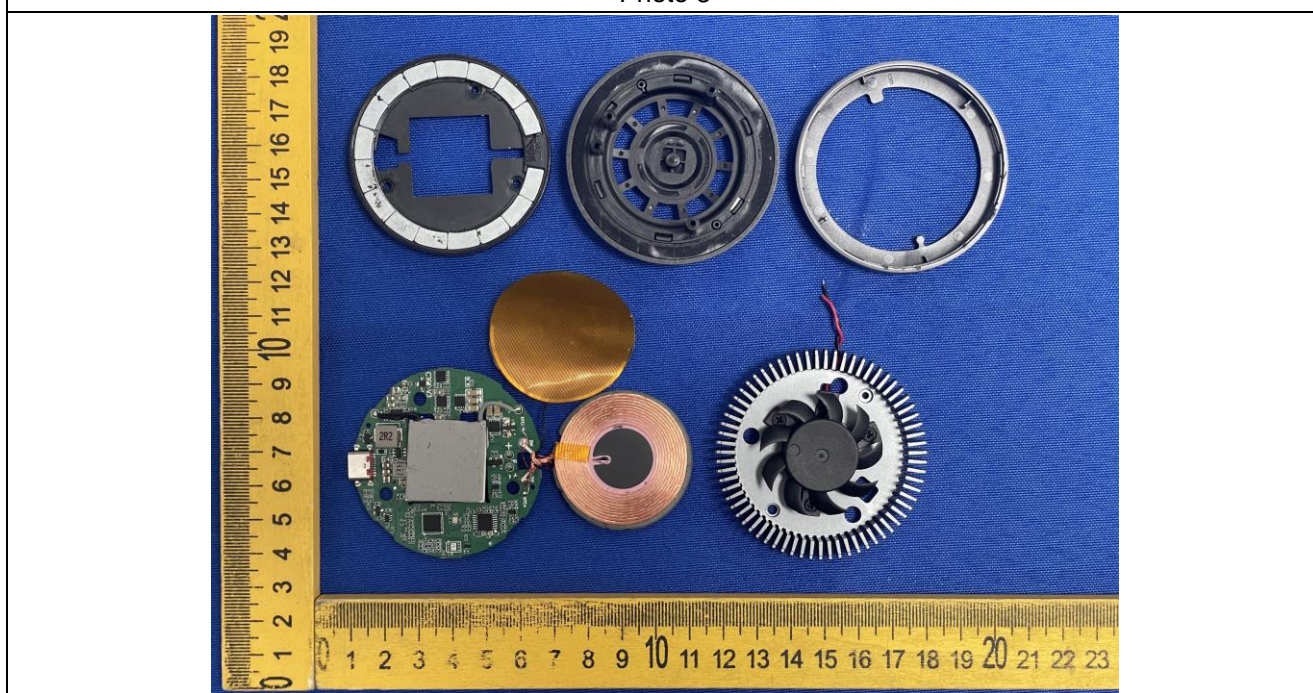


Photo 9


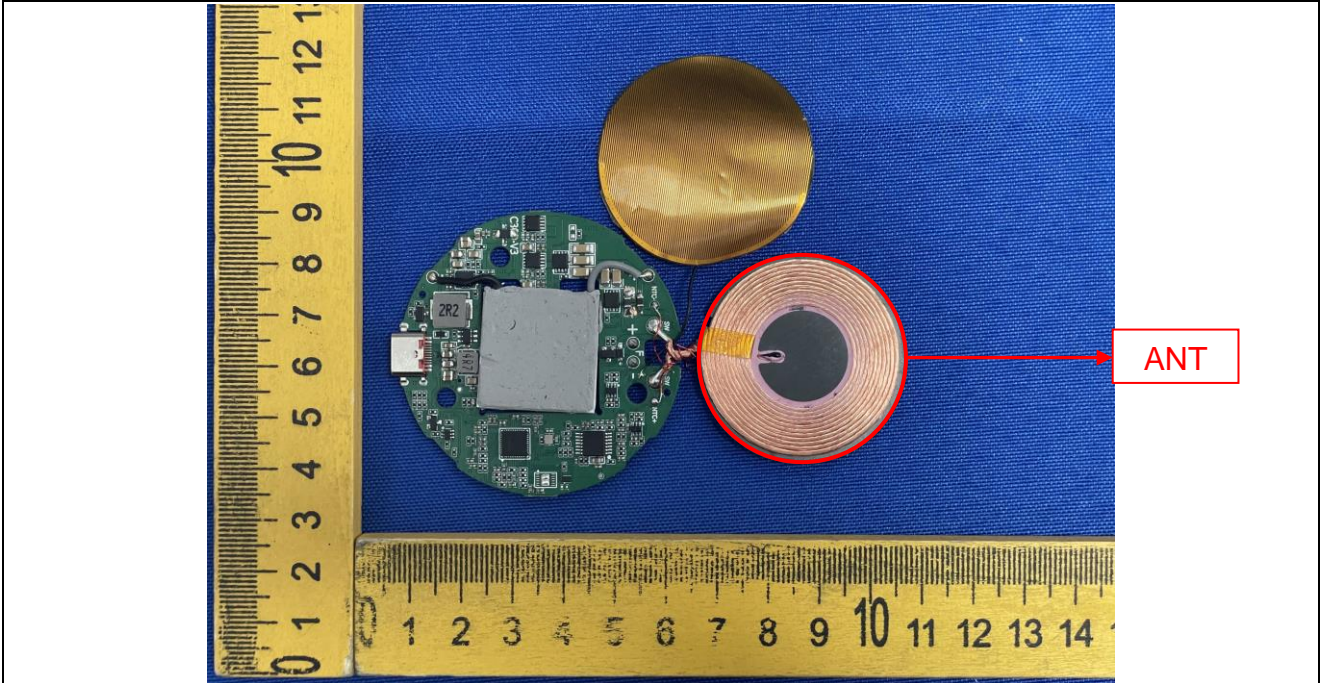


Photo 10

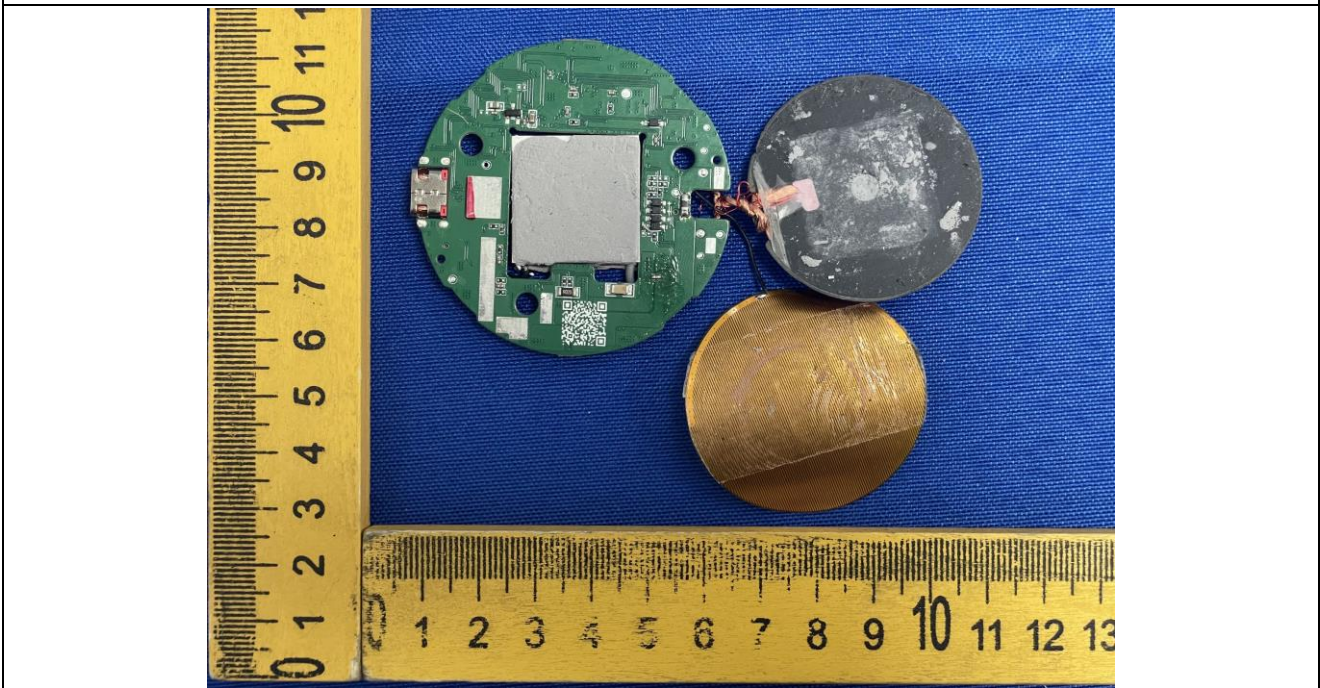

***** END OF REPORT *****