




Plot 72:

Test Date	2024-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 26
Signal	LTE FDD
Frequency	841.5
SAR 10g (W/Kg)	0.103
SAR 1g (W/Kg)	0.185
ConvF	1.70
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=6.00, Y=6.00 ; SAR Peak: 0.33 W/kg

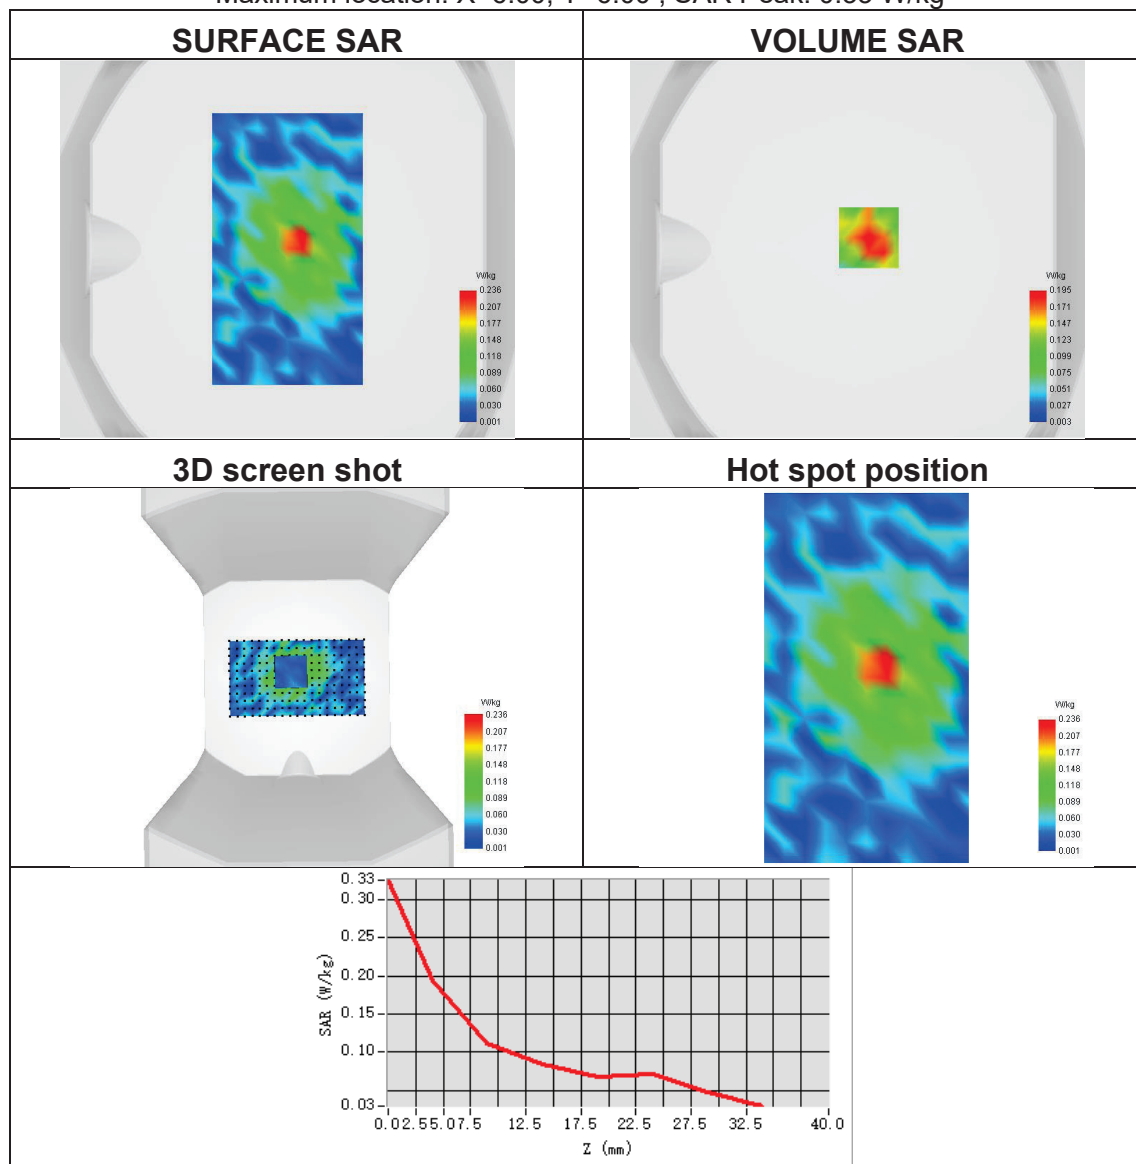




Plot 73:

Test Date	2024-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE TDD
Frequency	2580
SAR 10g (W/Kg)	0.073
SAR 1g (W/Kg)	0.140
ConvF	2.35
Relative permittivity	39.72
Conductivity (S/m)	1.94

Maximum location: X=-7.00, Y=-16.00 ; SAR Peak: 0.37 W/kg

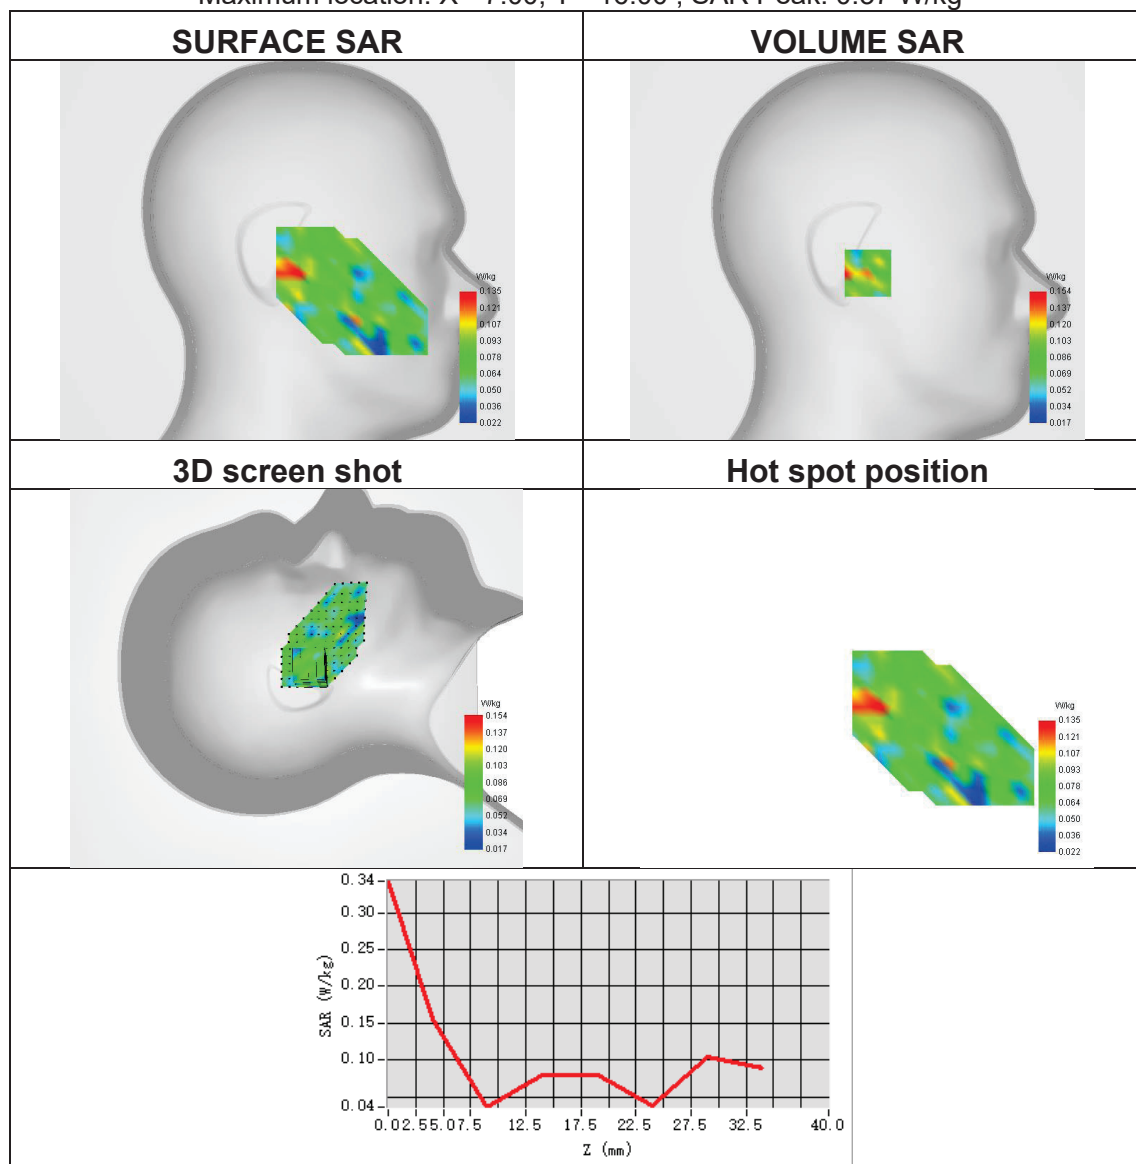




Plot 74:

Test Date	2024-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2580
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.178
ConvF	2.35
Relative permittivity	39.72
Conductivity (S/m)	1.94

Maximum location: X=8.00, Y=2.00 ; SAR Peak: 0.40 W/kg

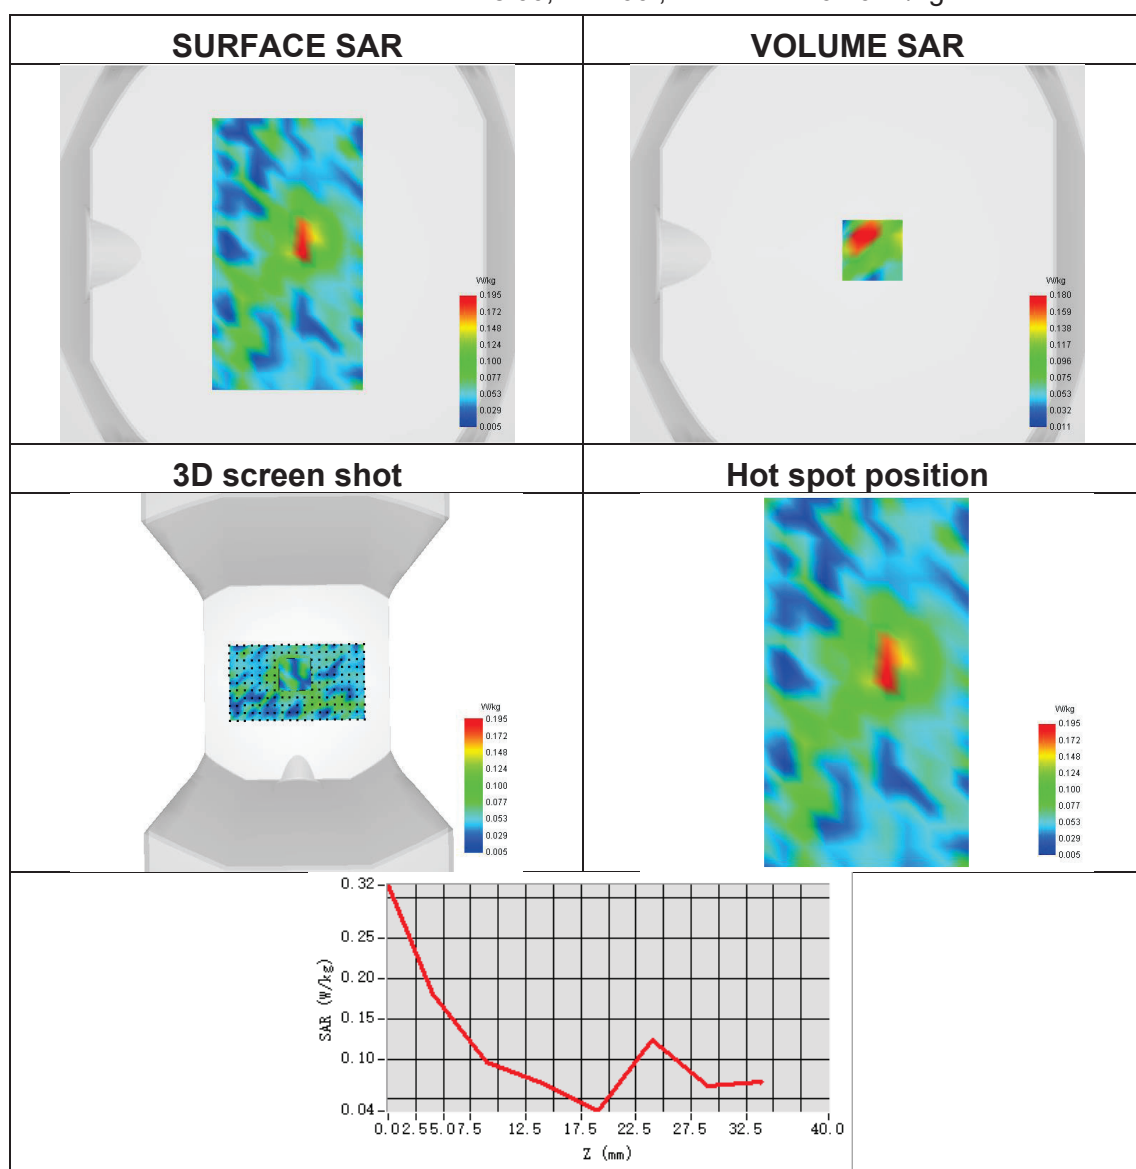




Plot 75:

Test Date	2024-05-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.157
ConvF	2.31
Relative permittivity	40.32
Conductivity (S/m)	1.65

Maximum location: X=-1.00, Y=-7.00 ; SAR Peak: 0.34 W/kg

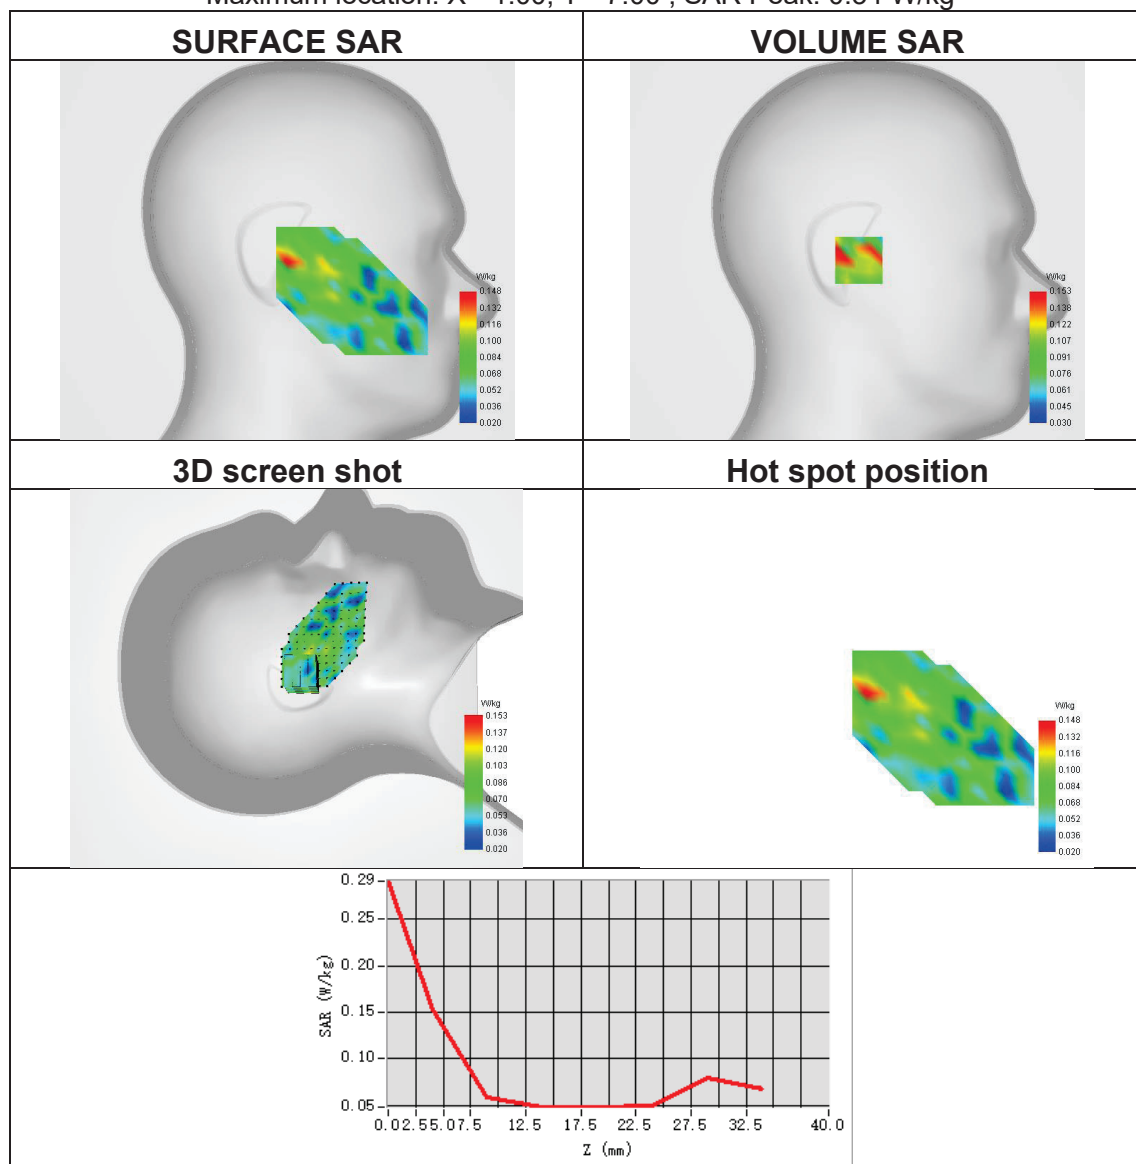




Plot 76:

Test Date	2024-05-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE band 40
Signal	LTE TDD
Frequency	2310
SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.332
ConvF	2.31
Relative permittivity	40.32
Conductivity (S/m)	1.65

Maximum location: X=15.00, Y=9.00 ; SAR Peak: 0.56 W/kg

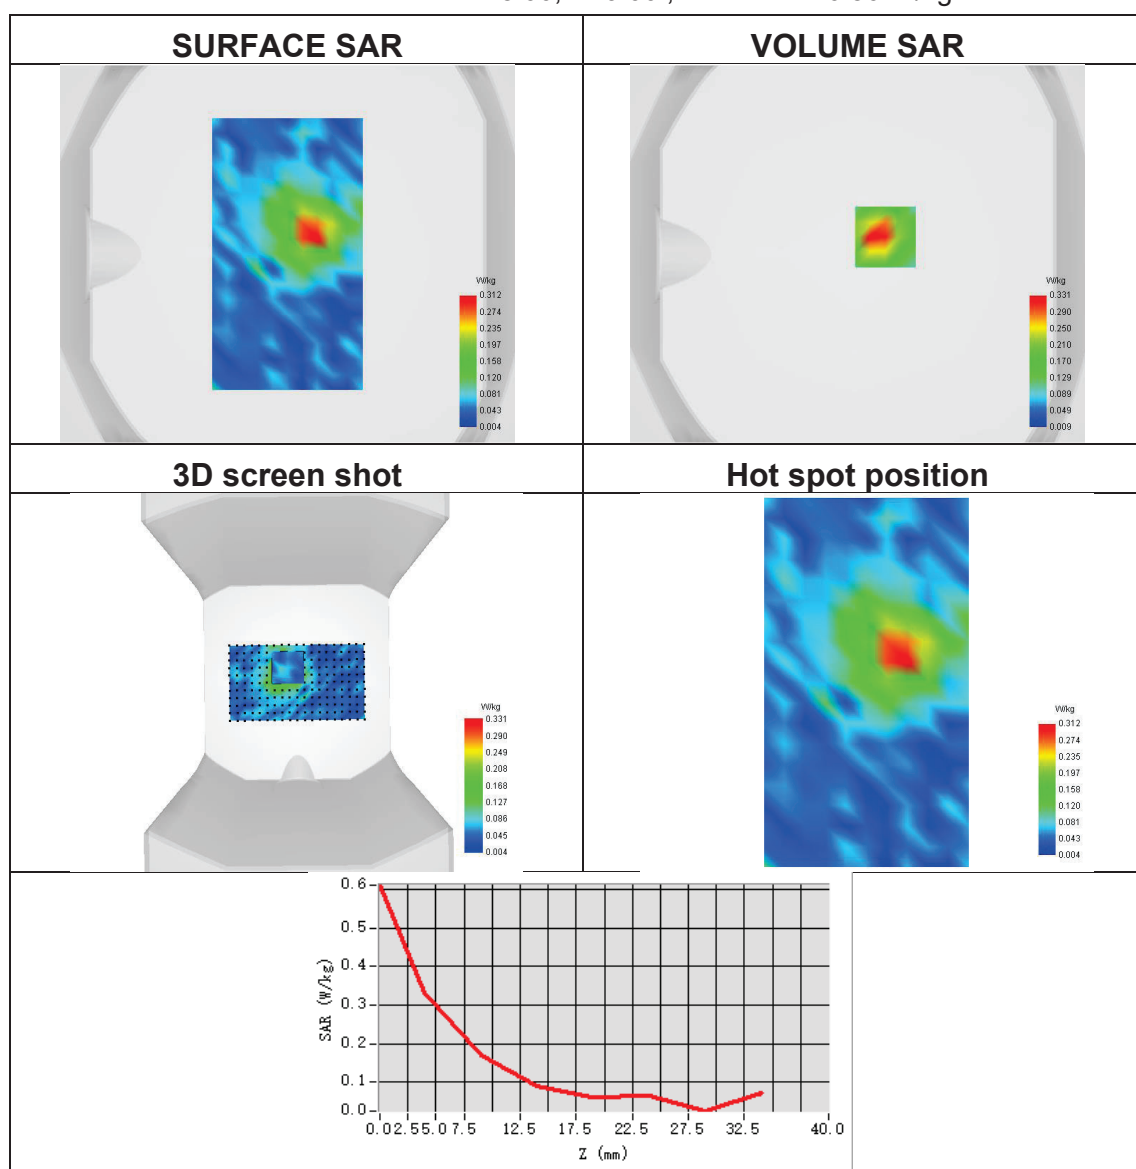




Plot 77:

Test Date	2024-05-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.054
SAR 1g (W/Kg)	0.111
ConvF	2.35
Relative permittivity	39.36
Conductivity (S/m)	2.00

Maximum location: X=0.00, Y=-7.00 ; SAR Peak: 0.32 W/kg

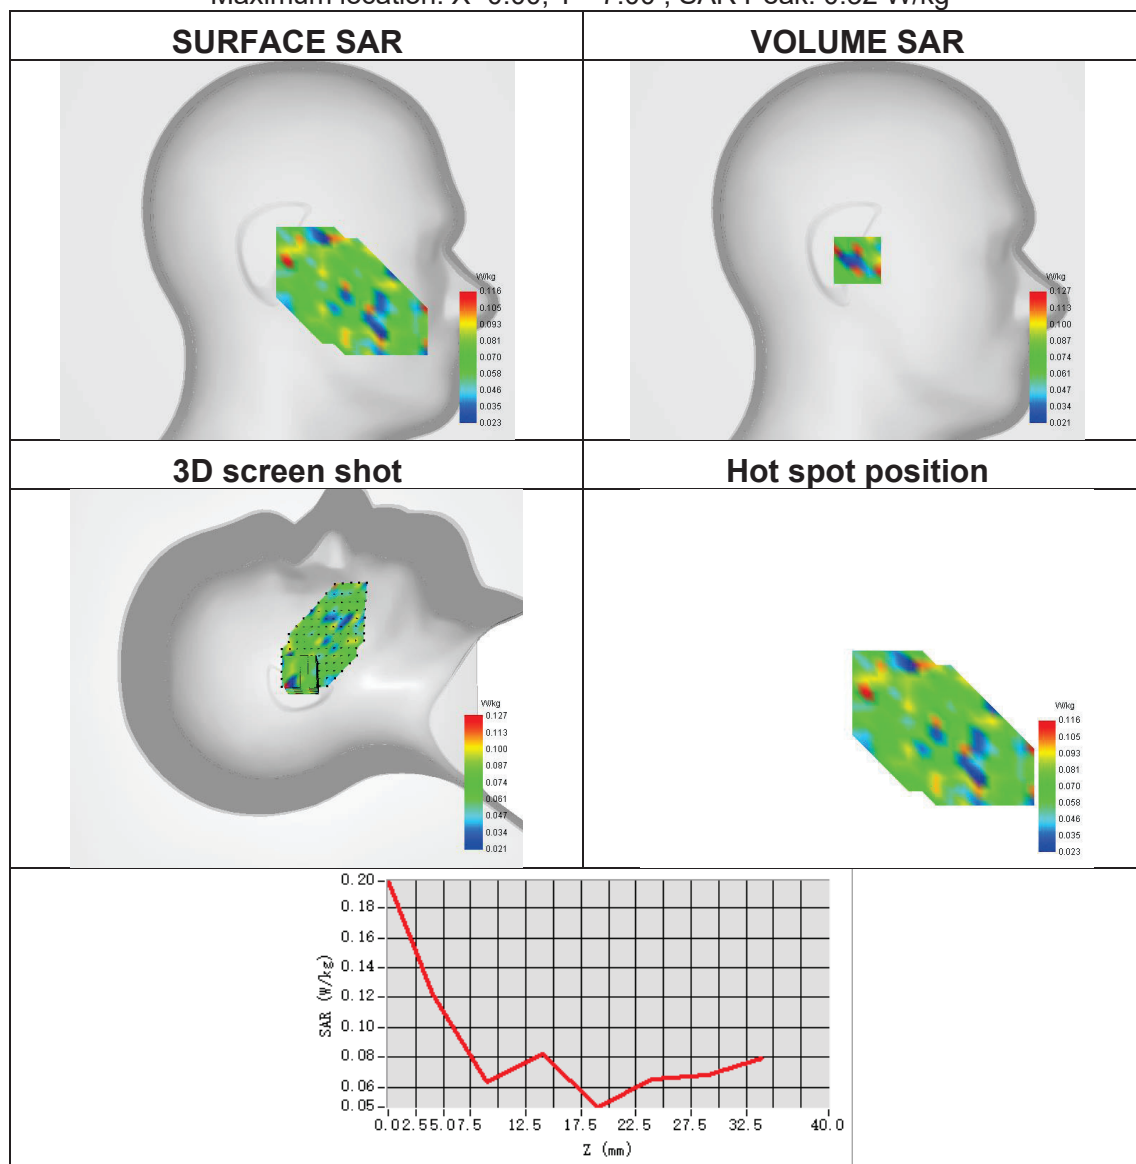




Plot 78:

Test Date	2024-05-12
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2506
SAR 10g (W/Kg)	0.084
SAR 1g (W/Kg)	0.159
ConvF	2.35
Relative permittivity	39.36
Conductivity (S/m)	2.00

Maximum location: X=1.00, Y=8.00 ; SAR Peak: 0.33 W/kg

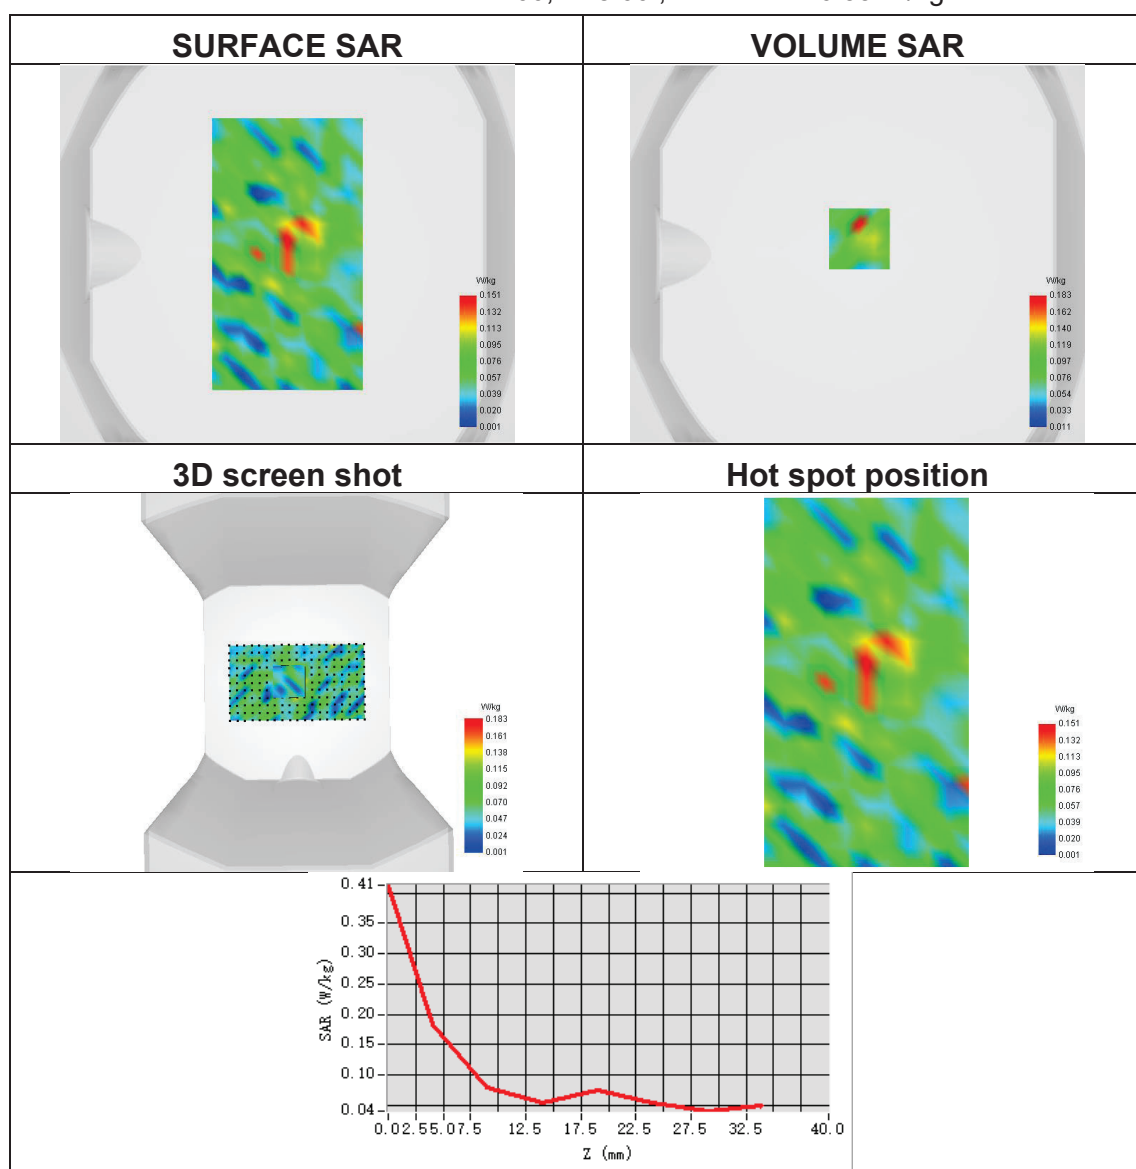




Plot 79:

Test Date	2024-06-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.126
ConvF	1.91
Relative permittivity	40.82
Conductivity (S/m)	1.38

Maximum location: X=-53.00, Y=-50.00 ; SAR Peak: 0.34 W/kg

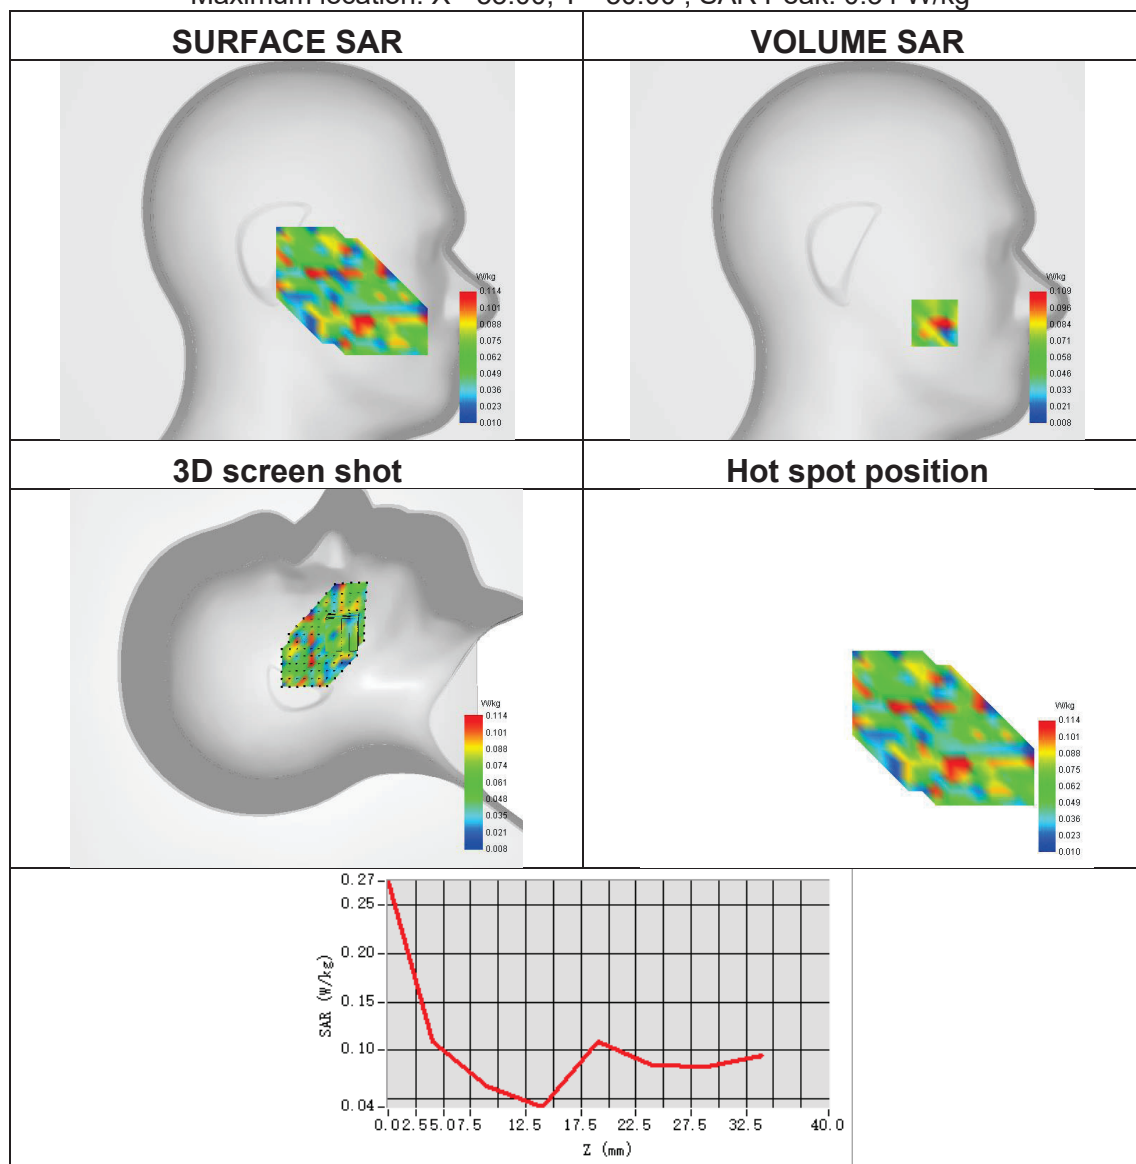




Plot 80:

Test Date	2024-06-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.459
SAR 1g (W/Kg)	0.857
ConvF	1.91
Relative permittivity	40.82
Conductivity (S/m)	1.38


Maximum location: X=8.00, Y=0.00 ; SAR Peak: 1.45 W/kg

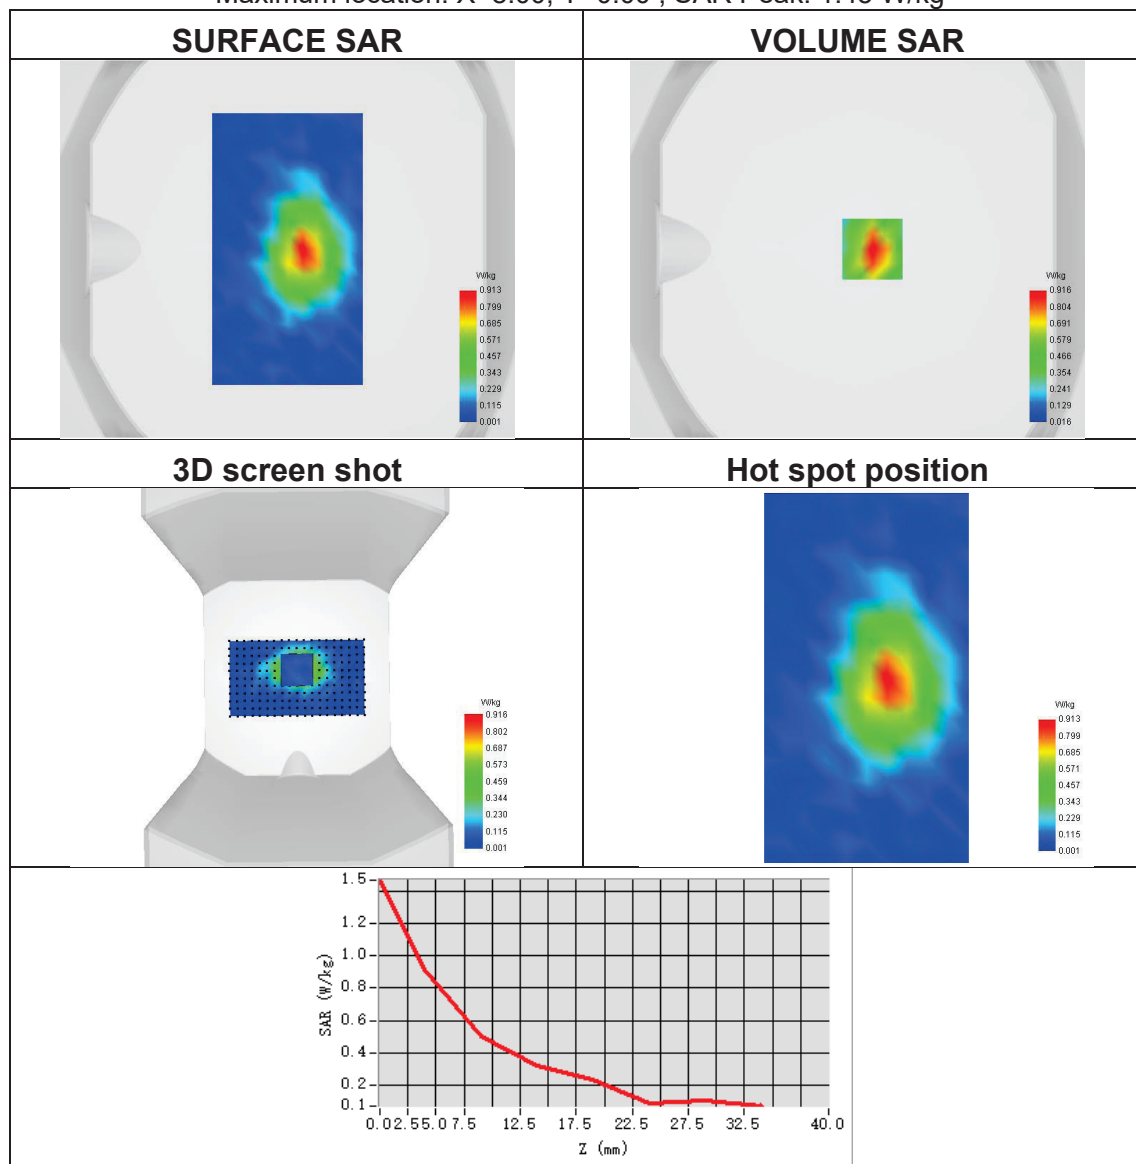

Plot 81:

Test Date	2024-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.061
ConvF	2.24
Relative permittivity	40.22
Conductivity (S/m)	1.42

Maximum location: X=0.00, Y=8.00 ; SAR Peak: 0.17 W/kg

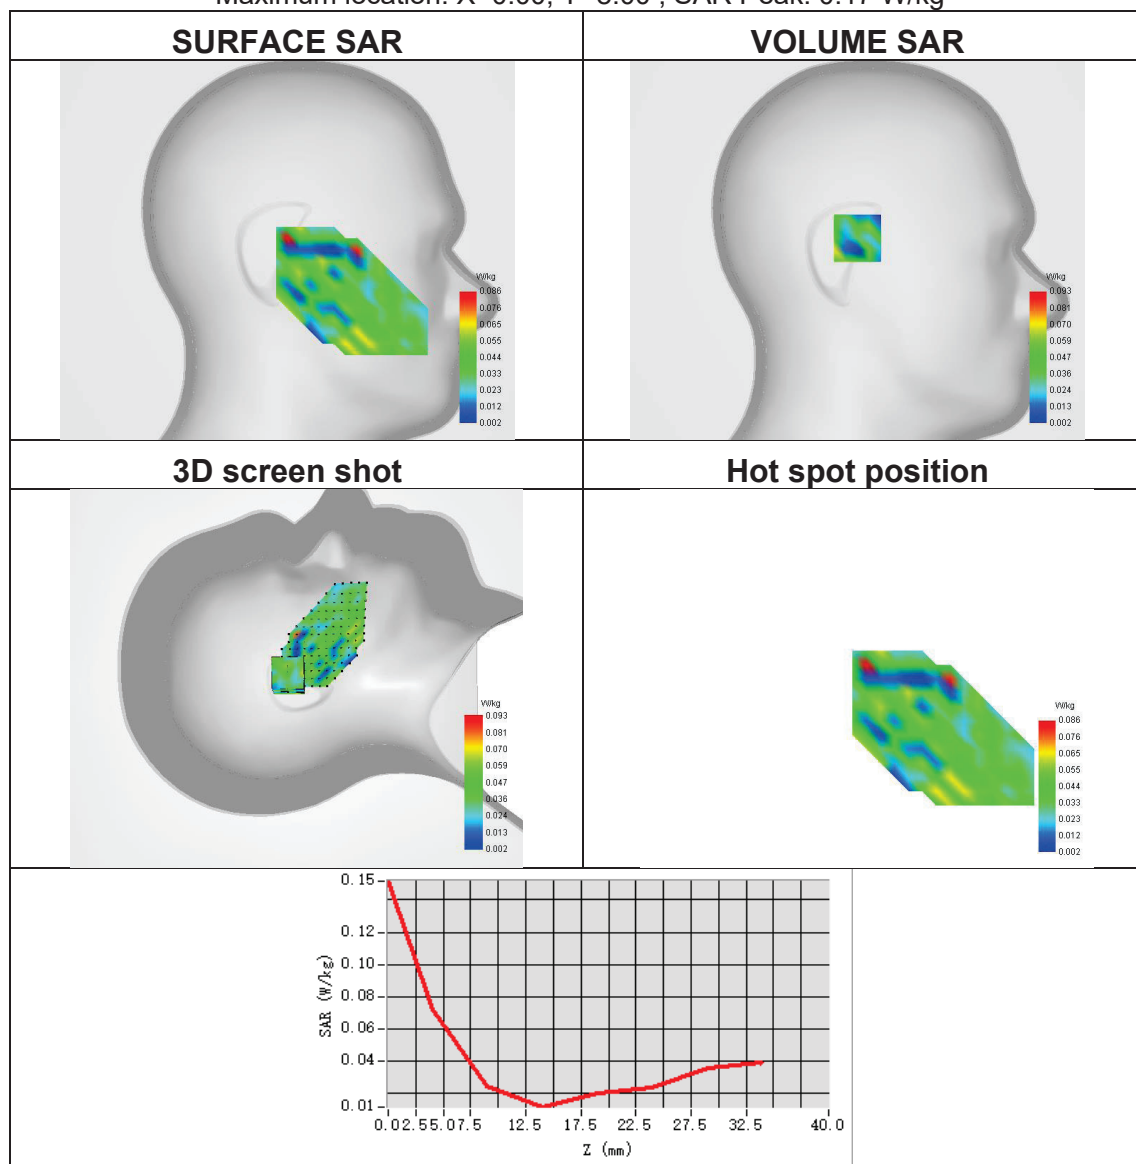




Plot 82:

Test Date	2024-05-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 2
Signal	NR FDD
Frequency	1900
SAR 10g (W/Kg)	0.299
SAR 1g (W/Kg)	0.511
ConvF	2.24
Relative permittivity	40.22
Conductivity (S/m)	1.42

Maximum location: X=9.00, Y=-3.00 ; SAR Peak: 0.85 W/kg

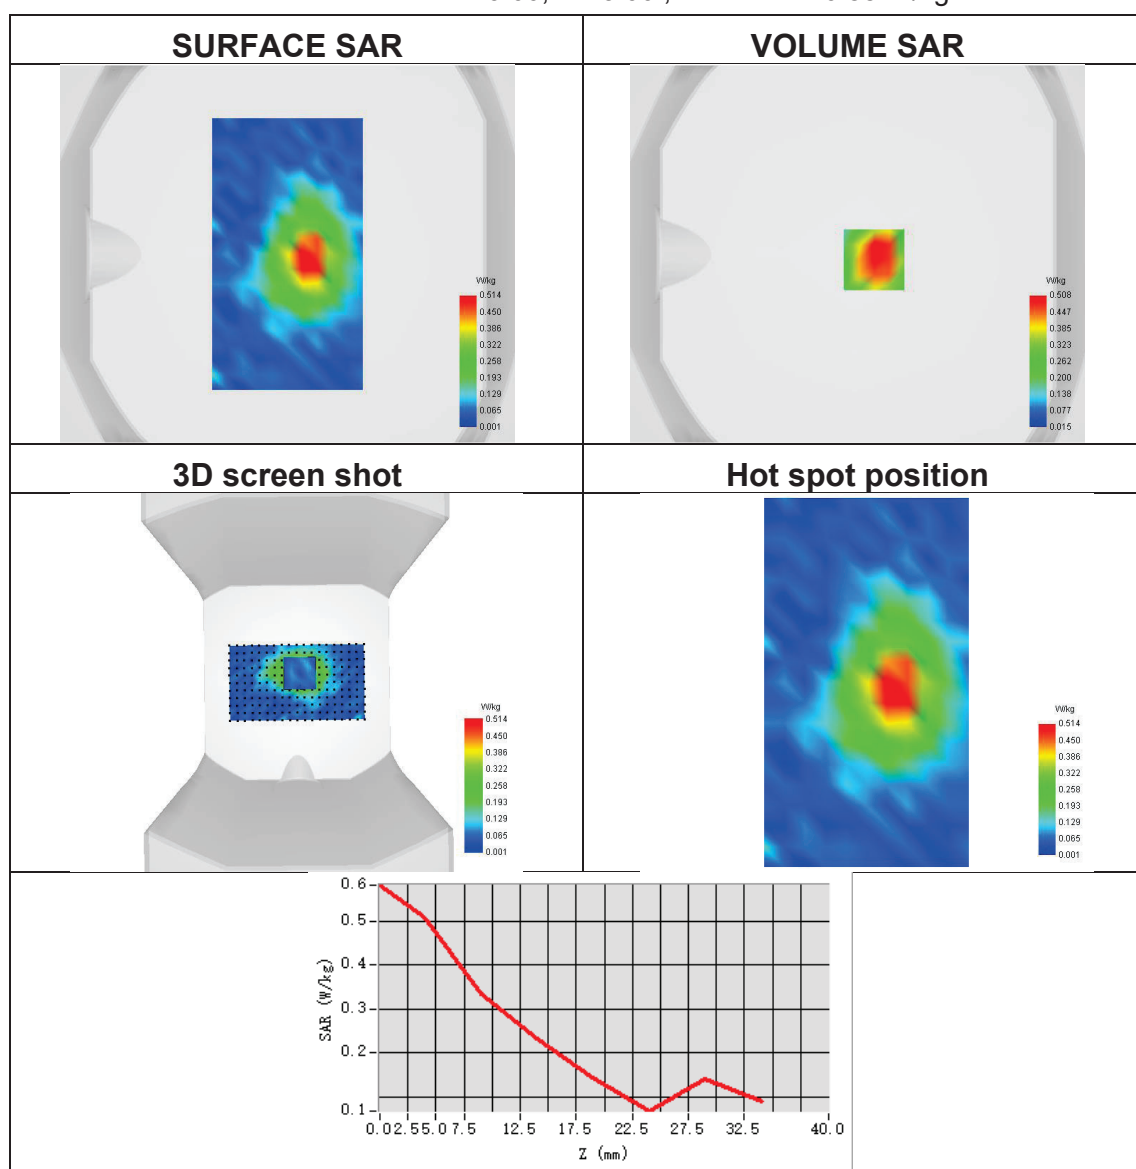




Plot 83:

Test Date	2024-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.155
ConvF	1.70
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=-32.00, Y=-24.00 ; SAR Peak: 0.29 W/kg

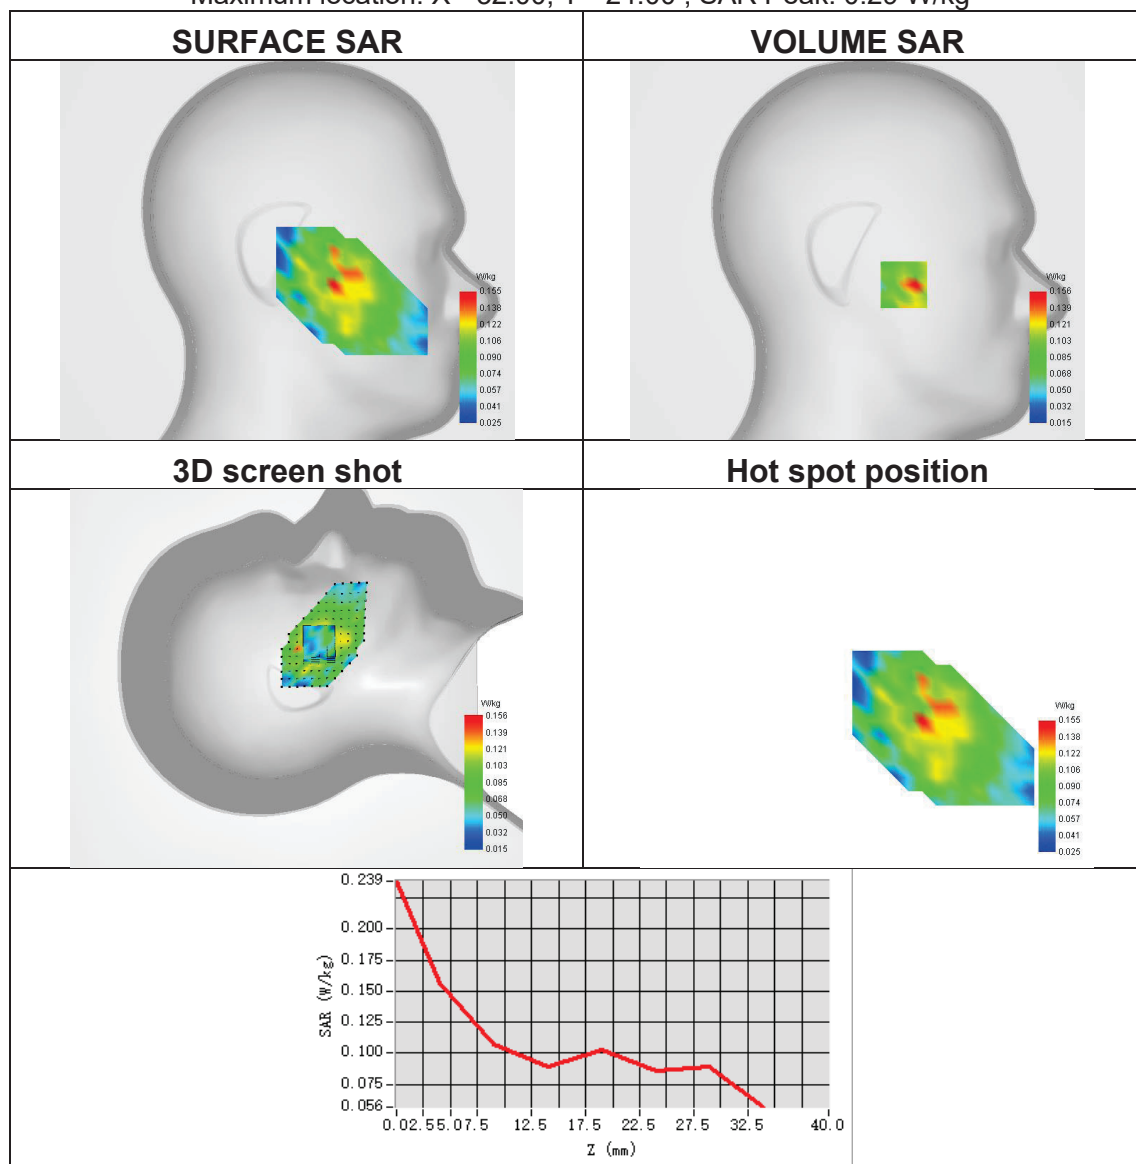




Plot 84:

Test Date	2024-06-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 5
Signal	NR FDD
Frequency	839
SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.248
ConvF	1.70
Relative permittivity	41.87
Conductivity (S/m)	0.91

Maximum location: X=8.00, Y=7.00 ; SAR Peak: 0.46 W/kg

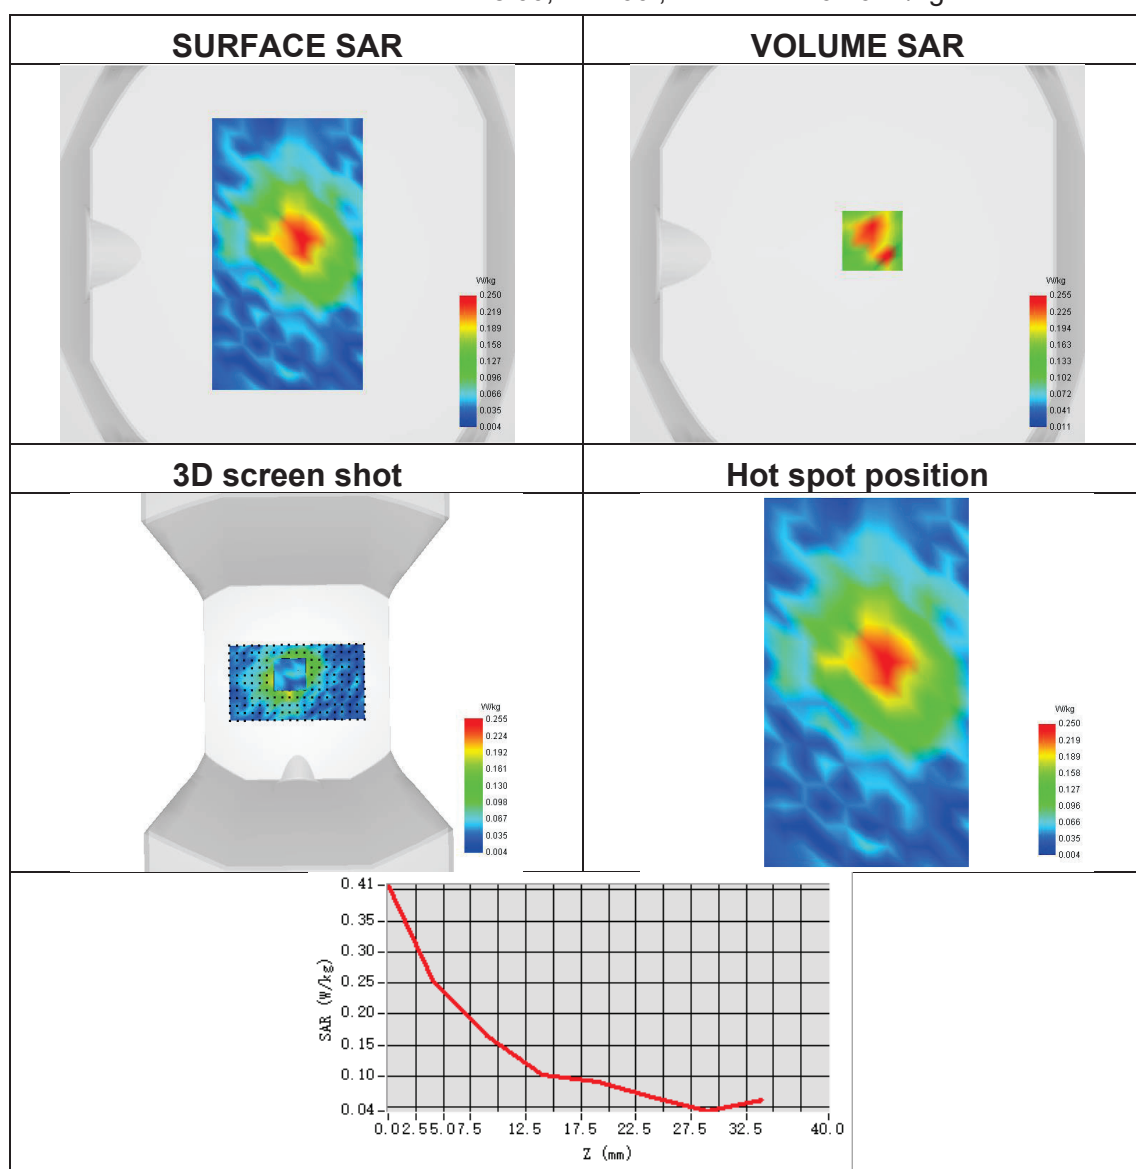




Plot 85:

Test Date	2024-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.042
SAR 1g (W/Kg)	0.097
ConvF	2.35
Relative permittivity	39.72
Conductivity (S/m)	1.94

Maximum location: X=-16.00, Y=-40.00 ; SAR Peak: 0.24 W/kg

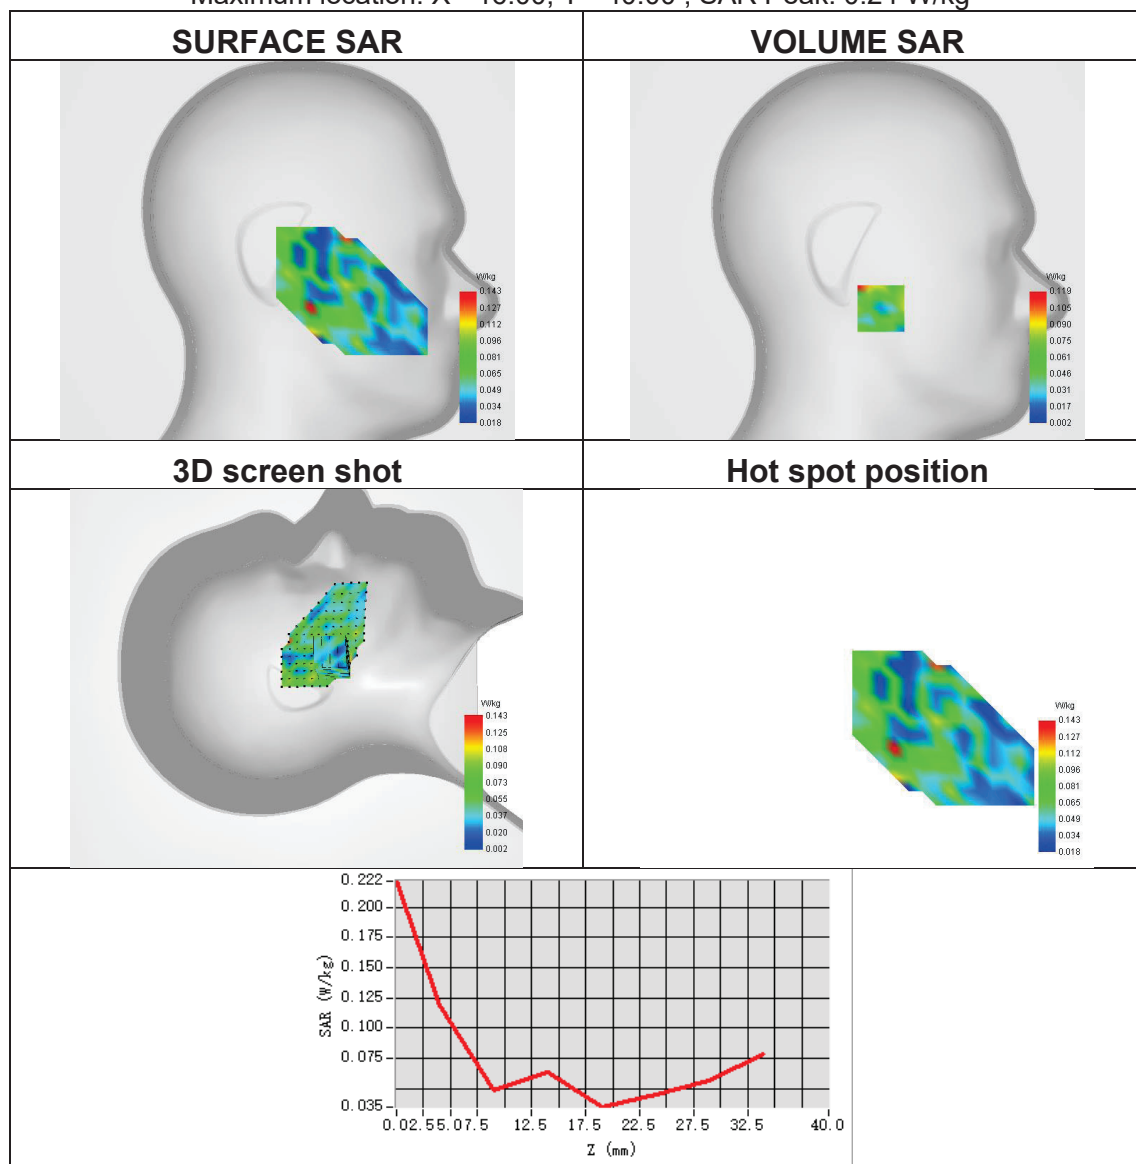




Plot 86:

Test Date	2024-05-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 7
Signal	NR FDD
Frequency	2560
SAR 10g (W/Kg)	0.157
SAR 1g (W/Kg)	0.312
ConvF	2.35
Relative permittivity	39.72
Conductivity (S/m)	1.94

Maximum location: X=10.00, Y=7.00 ; SAR Peak: 0.53 W/kg

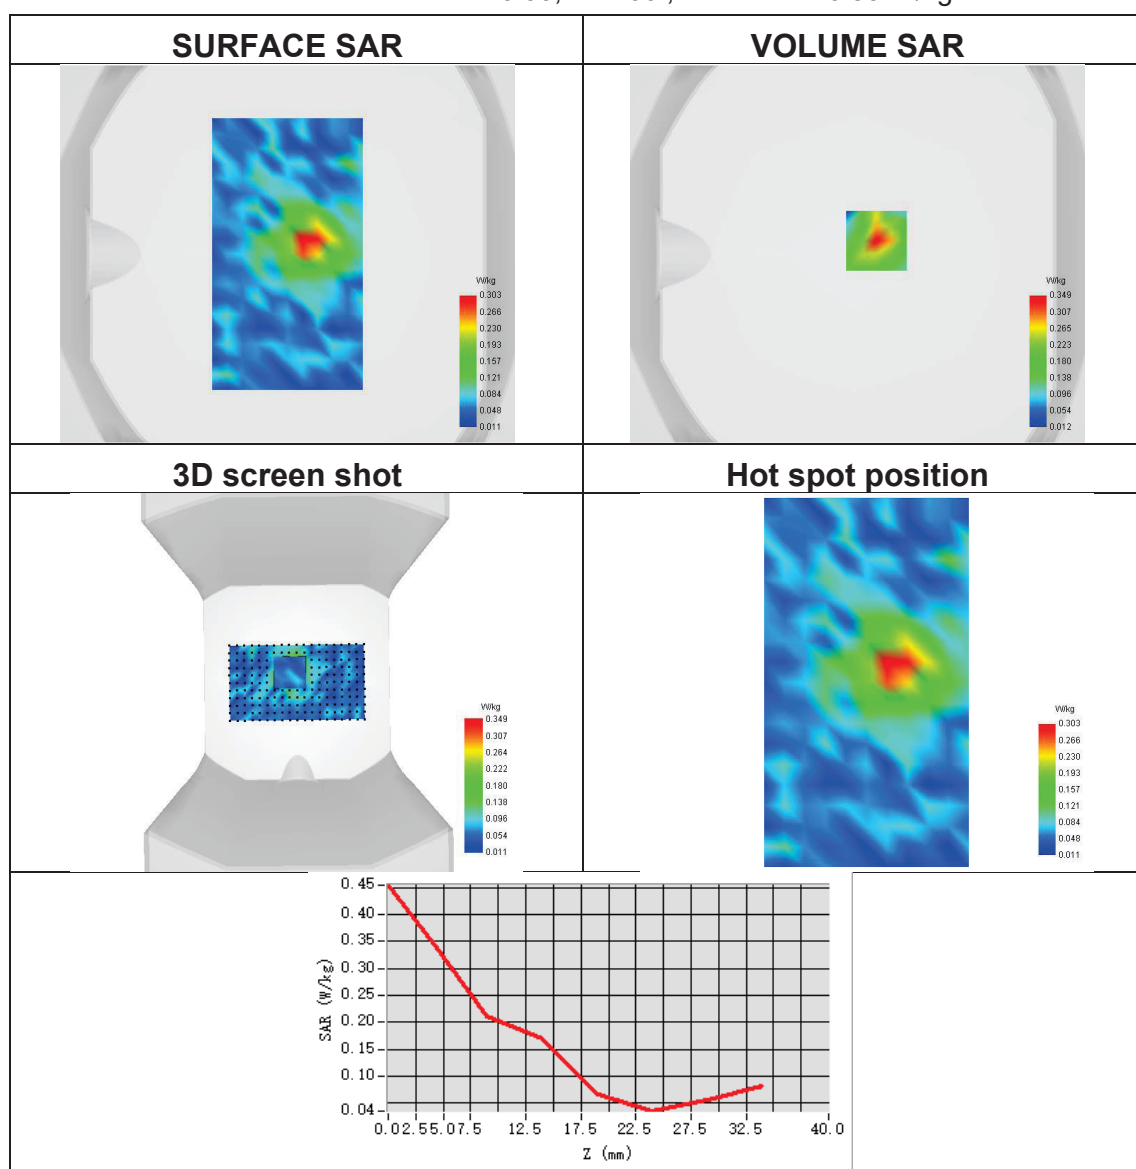




Plot 87:

Test Date	2024-05-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 25
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.025
SAR 1g (W/Kg)	0.040
ConvF	2.24
Relative permittivity	40.93
Conductivity (S/m)	1.46

Maximum location: X=-32.00, Y=-24.00 ; SAR Peak: 0.13 W/kg

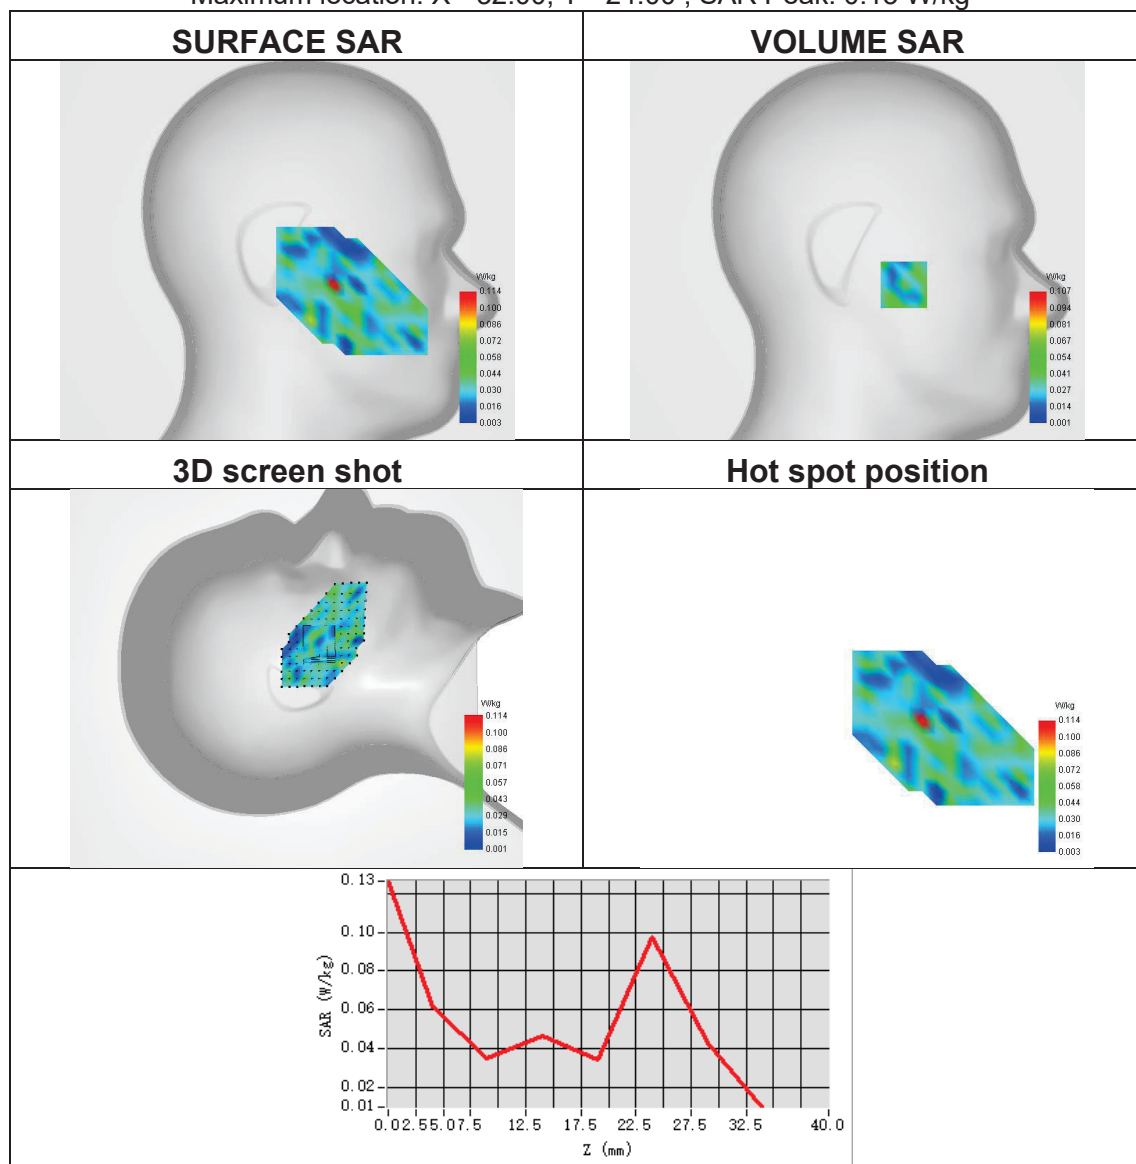




Plot 88:

Test Date	2024-05-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	NR band 25
Signal	NR FDD
Frequency	1860
SAR 10g (W/Kg)	0.260
SAR 1g (W/Kg)	0.438
ConvF	2.24
Relative permittivity	40.93
Conductivity (S/m)	1.46

Maximum location: X=7.00, Y=-7.00 ; SAR Peak: 0.67 W/kg

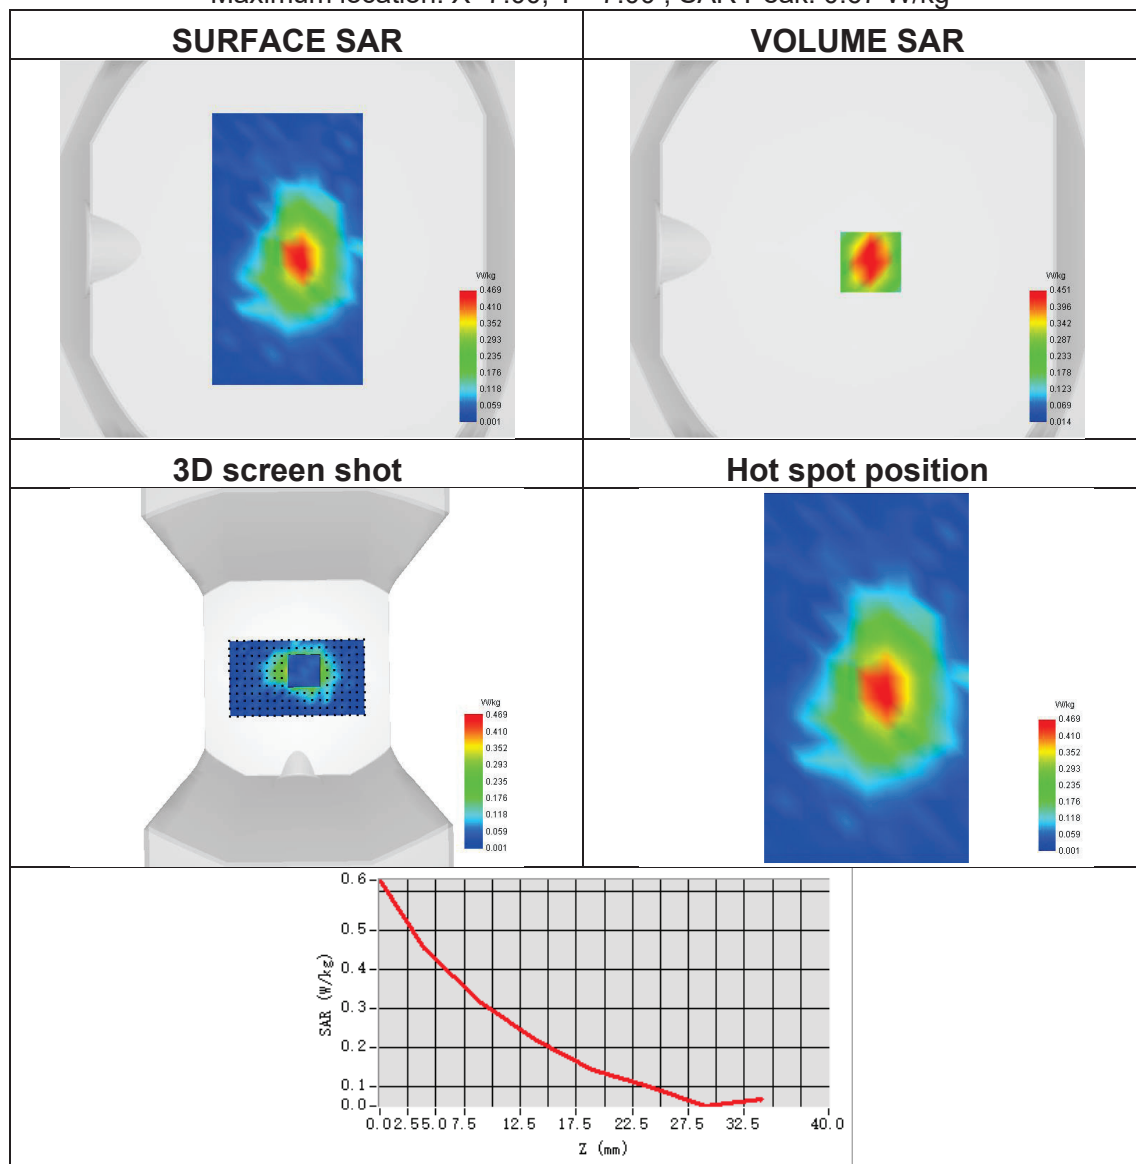




Plot 89:

Test Date	2024-06-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.039
SAR 1g (W/Kg)	0.075
ConvF	2.35
Relative permittivity	39.11
Conductivity (S/m)	2.01

Maximum location: X=-17.00, Y=-8.00 ; SAR Peak: 0.25 W/kg

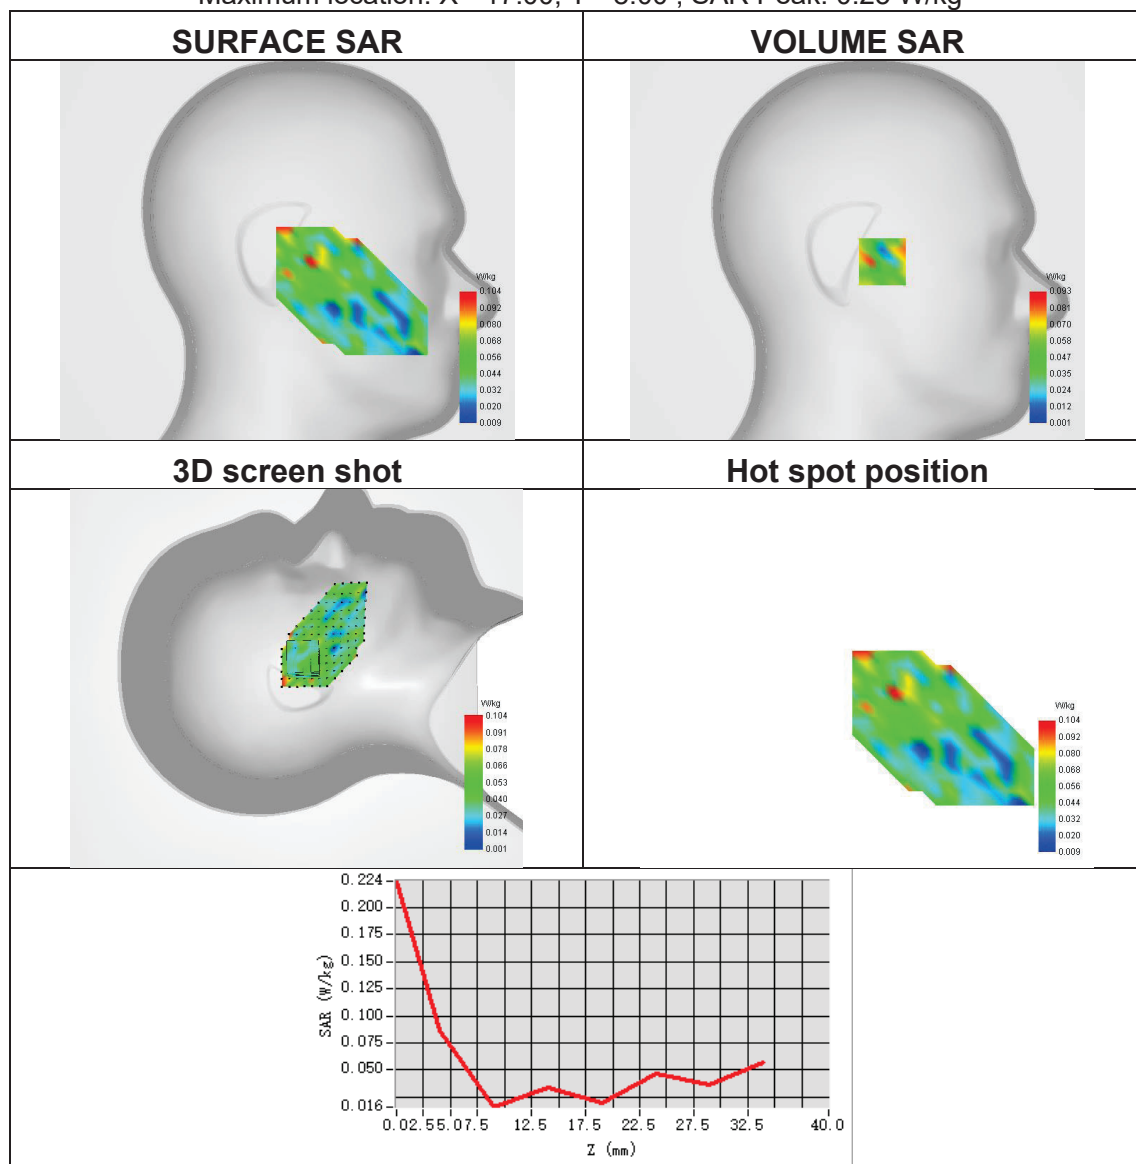




Plot 90:

Test Date	2024-06-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 38
Signal	NR TDD
Frequency	2600
SAR 10g (W/Kg)	0.117
SAR 1g (W/Kg)	0.220
ConvF	2.35
Relative permittivity	39.11
Conductivity (S/m)	2.01

Maximum location: X=7.00, Y=6.00 ; SAR Peak: 0.48 W/kg

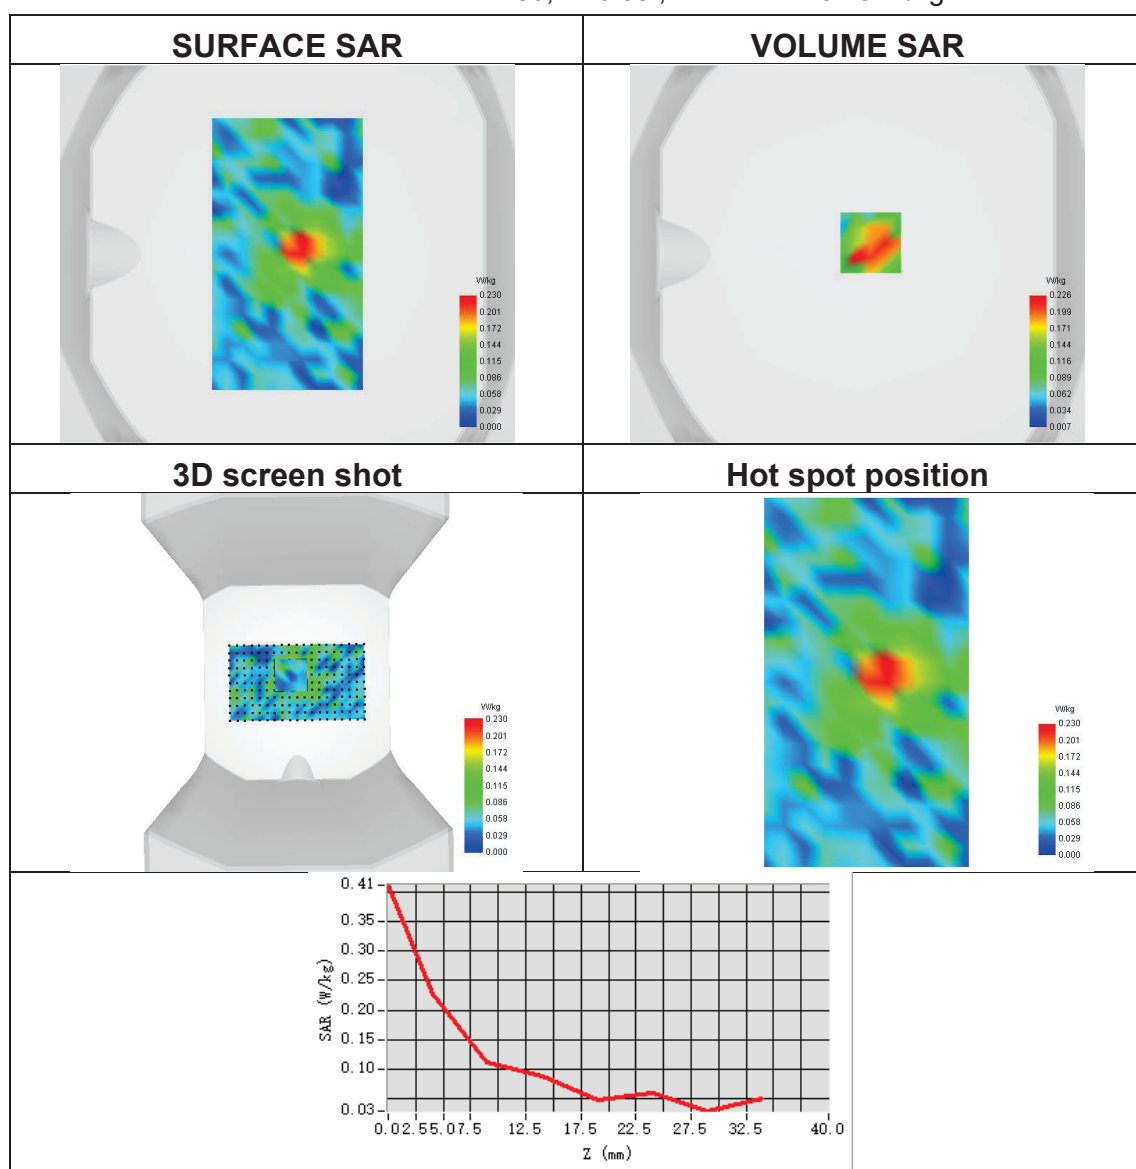




Plot 91:

Test Date	2024-06-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.127
ConvF	2.35
Relative permittivity	39.11
Conductivity (S/m)	2.01

Maximum location: X=-40.00, Y=-16.00 ; SAR Peak: 0.26 W/kg

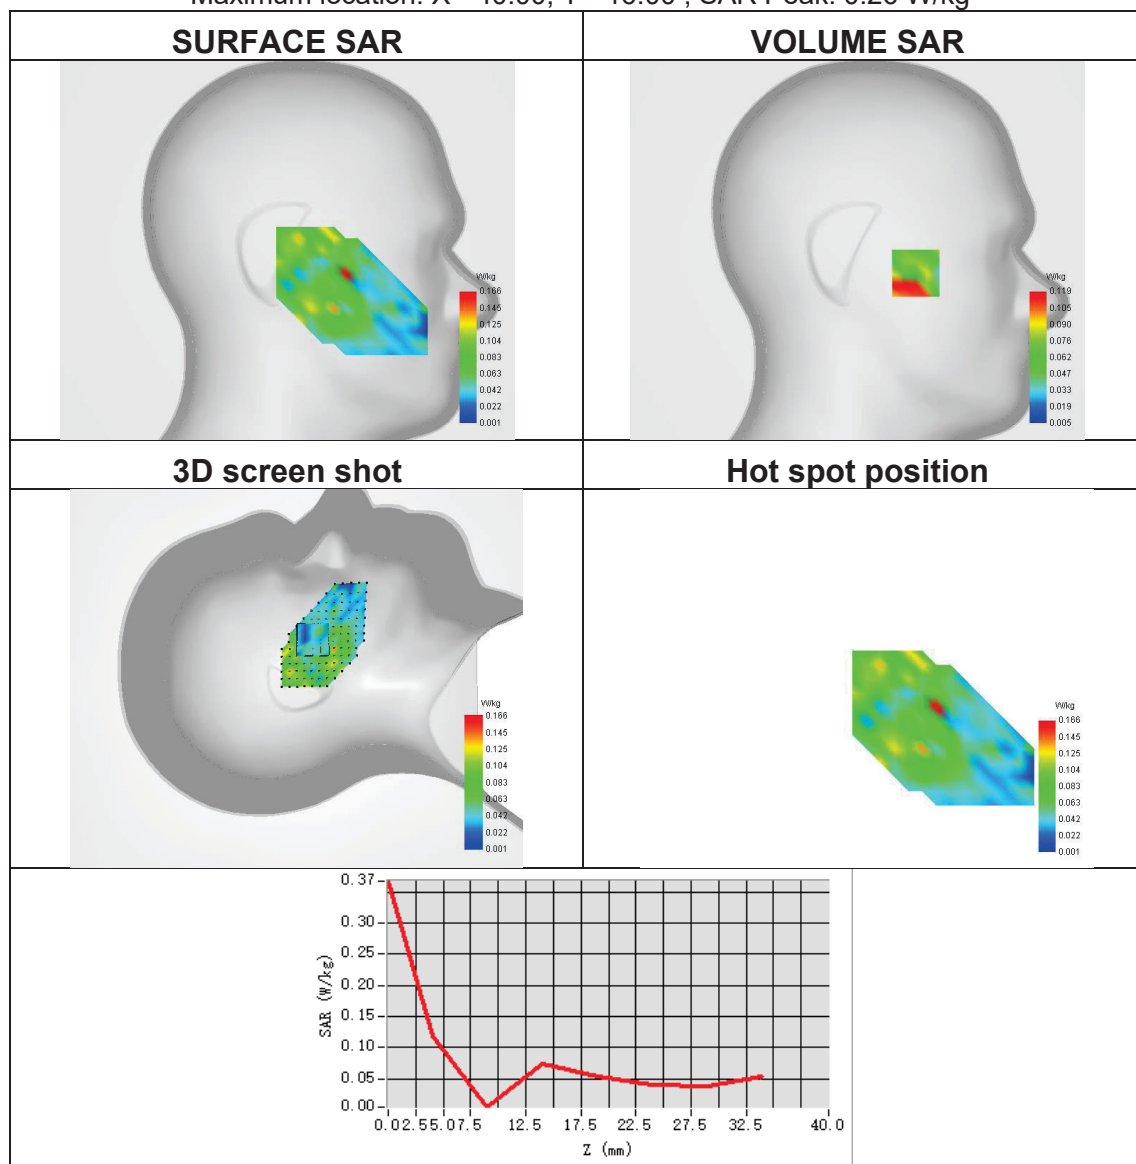




Plot 92:

Test Date	2024-06-03
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Top Side
Band	NR band 41
Signal	NR TDD
Frequency	2640
SAR 10g (W/Kg)	0.141
SAR 1g (W/Kg)	0.284
ConvF	2.35
Relative permittivity	39.11
Conductivity (S/m)	2.01

Maximum location: X=11.00, Y=8.00 ; SAR Peak: 0.53 W/kg

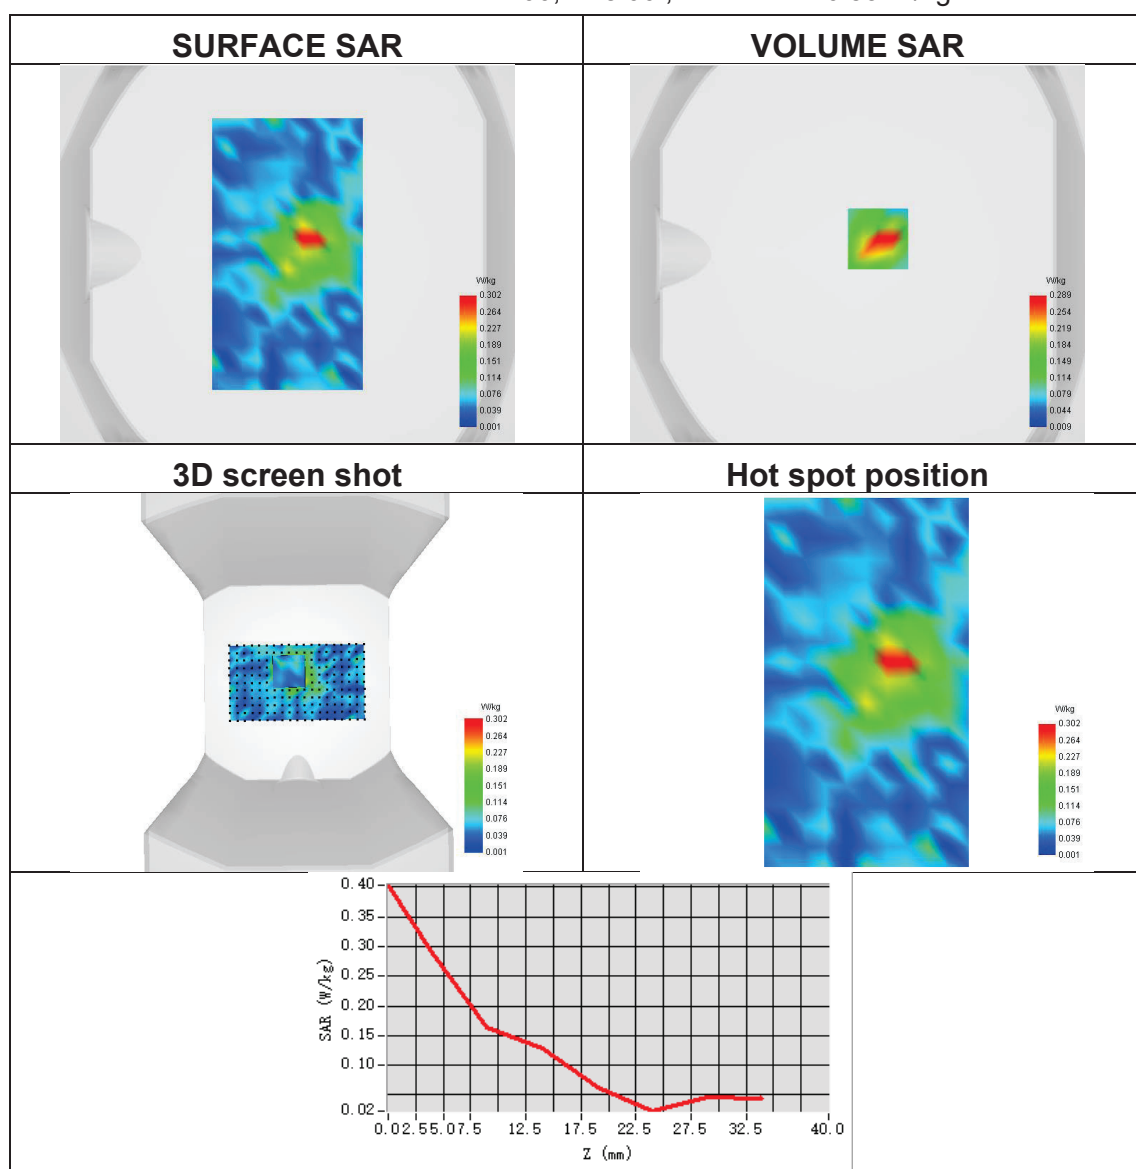




Plot 93:

Test Date	2024-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.216
ConvF	1.84
Relative permittivity	38.19
Conductivity (S/m)	3.08

Maximum location: X=0.00, Y=-16.00 ; SAR Peak: 0.77 W/kg

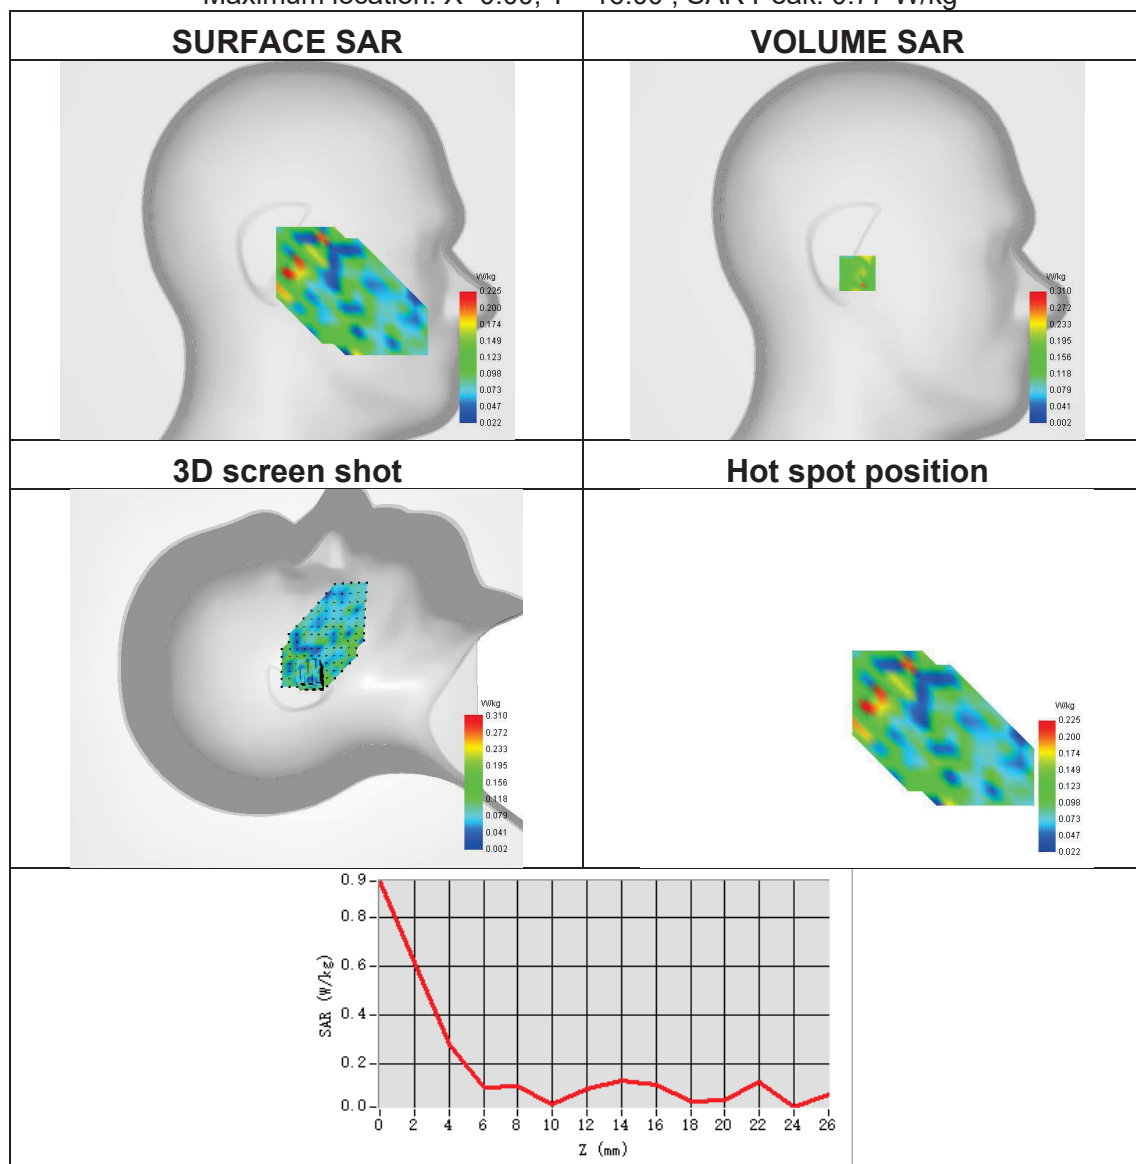




Plot 94:

Test Date	2024-05-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	NR band 77
Signal	NR TDD
Frequency	3750
SAR 10g (W/Kg)	0.195
SAR 1g (W/Kg)	0.371
ConvF	1.84
Relative permittivity	38.19
Conductivity (S/m)	3.08

Maximum location: X=22.00, Y=1.00 ; SAR Peak: 1.34 W/kg

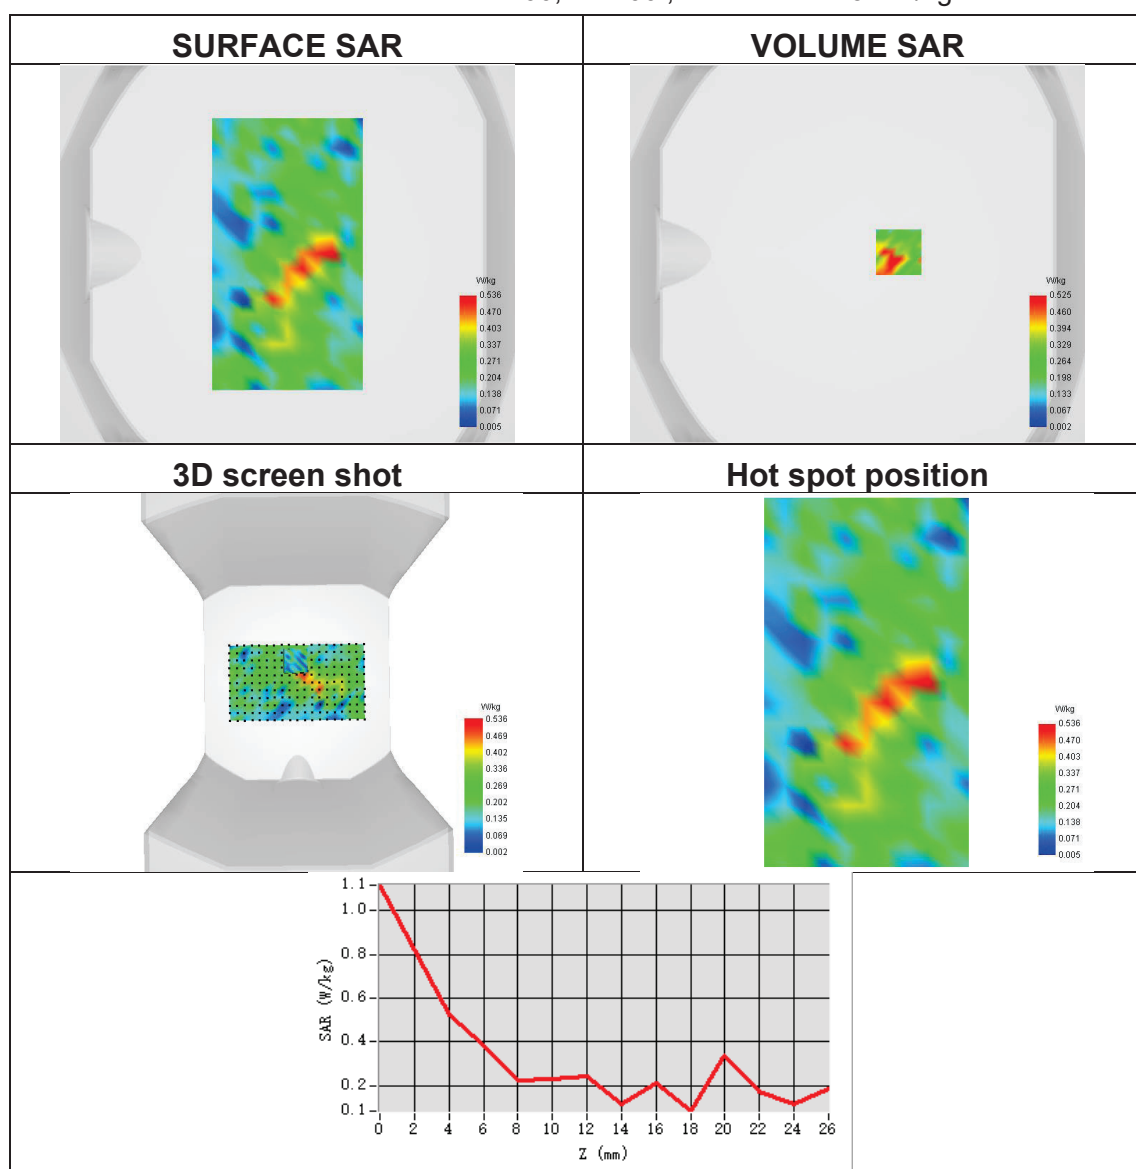



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※