

# FCC Test Report

Report No.: AGC12060230401FE06

FCC ID	:	2BAWU-MPC43
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Mini PC
BRAND NAME	:	N/A
MODEL NAME	:	MPC43
APPLICANT	:	Shenzhen MADIGI Electronic Technology Co., Ltd
DATE OF ISSUE	:	Jun. 27, 2023
STANDARD(S)	:	FCC Part 15 Subpart E §15.407
<b>REPORT VERSION</b>	:	V1.0







# **REPORT REVISE RECORD**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 27, 2023	Valid	Initial Release



#### TABLE OF CONTENTS

1. VERIFICA	TION OF CONFORMITY	5
2. GENERAL	INFORMATION	6
2.1. PROD	UCT DESCRIPTION	6
2.2. TABLE	OF CARRIER FREQUENCYS	7
2.3. RELA	FED SUBMITTAL(S) / GRANT (S)	11
2.4. TEST	METHODOLOGY	11
2.5. SPEC	IAL ACCESSORIES	11
2.6. EQUIF	PMENT MODIFICATIONS	11
2.7. ANTEI	NNA REQUIREMENT	11
2.8. DESC	RIPTION OF AVAILABLE ANTENNAS	
3. TEST ENV	IRONMENT	
3.1 ADDRE	ESS OF THE TEST LABORATORY	
3.2 TEST F	FACILITY	
3.3 ENVIR	ONMENTAL CONDITIONS	
3.4 MEASI	JREMENT UNCERTAINTY	
3.5 LIST O	F EQUIPMENTS USED	
4. DESCRIPT	TION OF TEST MODES	
5. SYSTEM 1	EST CONFIGURATION	
5.1. CONF	IGURATION OF EUT SYSTEM	
5.2. EQUIF	PMENT USED IN EUT SYSTEM	
5.3. SUMN	IARY OF TEST RESULTS	
6. RF OUTPL	JT POWER MEASUREMENT	
6.1 MEASU	JREMENT LIMITS	
6.2 MEASU	JREMENT PROCEDURE	
6.3 MEASU	JREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
6.4 MEASU	JREMENT RESULT	
7.6DB&26D	B BANDWIDTH MEASUREMENT	
7.1 MEASU	JREMENT LIMITS	
7.2 MEASU	JREMENT PROCEDURE	
7.3 MEASI	JREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
7.4 MEASU	JREMENT RESULTS	
8. POWER S	PECTRAL DENSITY MEASUREMENT	
8.1 MEASU	JREMENT LIMITS	
8.2 MEASU	JREMENT PROCEDURE	
8.3 MEASI	JREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
		00



9. CONDUCTED SPURIOUS EMISSION	24
9.1 MEASUREMENT LIMIT	24
9.2 MEASUREMENT PROCEDURE	24
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.4 MEASUREMENT RESULTS	25
10. RADIATED EMISSION	
10.1 LIMITS OF RADIATED EMISSION TEST	
10.2 MEASUREMENT PROCEDURE	
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
10.4 MEASUREMENT RESULT	
11. AC POWER LINE CONDUCTED EMISSION TEST	69
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	69
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	69
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	70
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	73
APPENDIX II: PHOTOGRAPHS OF EUT	73



Applicant	Shenzhen MADIGI Electronic Technology Co., Ltd
Address Room 111, 1A Floor, Kanghesheng Blgg, No.1.Chuangsheng Rd. Nan: District, Shenzhen, P.R. China	
Manufacturer	Shenzhen MADIGI Electronic Technology Co., Ltd
Address	Room 111, 1A Floor, Kanghesheng Blgg, No.1.Chuangsheng Rd. Nanshan District, Shenzhen, P.R. China
Factory	SHENZHEN 3NOD ELECTRONICS CO., LTD
Address	2F, No. 74, Yangchong Road, Tangxiachong Community, Yanluo Street , Bao'an District, Shenzhen, GUANGDONG P.R. CHINA
Product Designation	Mini PC
Brand Name	N/A
Test Model	MPC43
Date of receipt of test item	Apr. 12, 2023
Date of Test	Apr. 12, 2023 to Jun. 27, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Jouk Gai Prepared By Jack Gui Jun. 27, 2023 (Project Engineer) Jun. 27, 2023 **Reviewed By** Calvin Liu (Reviewer) Max Zhang Approved By Max Zhang Jun. 27, 2023 Authorized Officer



# 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

Equipment Type	<ul> <li>Outdoor access points</li> <li>Fixed P2P access points</li> <li>Client devices</li> </ul>				
Operation Frequency	U-NII 1:5150MHz~5250MHz 🛛 U-NII 2A: 5250MHz~5350MHz				
	U-NII 2C:5470MHz~5725MHz U-NII 3: 5725MHz~5850MHz				
DFS Design Type	☐ Master ☐ Slave with radar detection ⊠ Slave without radar detection				
TPC Function	🗌 Yes 🛛 No				
Hardware Version	MPC43_MB_V20				
Software Version	Window 11				
Test Frequency Range:	For 802.11a/n/ax-HT20-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5700MHz, 5745~5825MHz For 802.11n/ax-HT40-HE 40: 5190~5230MHz, 5270~5310MHz, 5510~5670MHz, 5755~5795MHz For 802.11ac/ax-VHT80-HE80: 5210MHz, 5290MHz, 55300MHz, 5610MHz, 5775MHz For 802.11ac/ax-VHT160-HE160: 5250MHz, 5570MHz				
Output Power	IEEE 802.11a(HT20):21.25dBm; IEEE 802.11n(HT20):21.08dBm; IEEE802.11n(HT40):21.30dBm; IEEE802.11ac(VHT80):20.87dBm; IEEE802.11ac(VHT160):17.00dBm; IEEE802.11ax(HE20):22.11dBm; IEEE802.11ax(HE40):21.26dBm; IEEE802.11ax(HE80):21.12dBm; IEEE802.11ax(HE160):20.63dBm				
Output Power_MIMO	IEEE 802.11nHT(20):24.04dBm; IEEE802.11n(HT40):24.28dBm IEEE802.11ac(VHT80):23.50dBm; IEEE802.11ac(VHT160):17.80dBm; IEEE802.11ax(HE20):24.14dBm; IEEE802.11ax(HE40):24.21dBm; IEEE802.11ax(HE80):23.90dBm; IEEE802.11ax(HE160):22.55dBm				
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ax :(1024-QAM,256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDMA				
Data Rate         802.11a: 6/9/12/18/24/36/48/54Mbps;           802.11n: up to 300Mbps;           802.11ac: up to 866.6Mbps;           802.11ax: up to 1201Mbps					
Number of channels       8 channels of U-NII-1 Band         8 channels of U-NII-2A Band         22 channels of U-NII-2C Band         8 channels of U-NII-3 Band					
Antenna Designation	PIFA Antenna (Comply with requirements of the FCC part 15.203)				
Antenna Gain	Refer to Chapter 2.8 of the report.				
Power Supply					
Stamp" is deemed to be invalid. Conving of	iz Dep 1997, BY a Gapte I tered without authorization, or having not been stamped by the "Dedicated Testing/Inspection or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test result				

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



#### 2.2. TABLE OF CARRIER FREQUENCYS

#### For 5150~5250MHz:

#### 4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

#### 1 channel is provided for 802.11ac (VHT80), 802.11ax (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

#### 1 channel is provided for 802.11ac (VHT160), 802.11ax (VHT160):

Channel	Frequency	Channel	Frequency
50	5250 MHz		



#### For 5250~5320MHz:

#### 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

#### 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

#### 1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
58	5290 MHz		

# 1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency	Channel	Frequency
50	5250 MHz		



#### For 5500~5720MHz:

#### 12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency	
100	5500 MHz	: 124 5620 MHz		
104	5520 MHz	Hz 128 5640 MHz		
108	5540 MHz	MHz 132 5660 MH:		
112	5560 MHz	136 5680 MHz		
116	5580 MHz	140 5700 MHz		
120	5600 MHz	144 5720 MHz		

#### 6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency	
102	5510 MHz	126	5630 MHz	
110	5550 MHz	134	5670 MHz	
118	5590 MHz	142	5710 MHz	

#### 3 channels is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Frequency Channel	
106	5530 MHz	122	5610 MHz
138	5690 MHz		

#### 1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency	Channel	Frequency
114	5570 MHz		



#### For 5745~5825MHz:

# 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40) , 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

#### 1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
155	5775 MHz		



# 2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2BAWU-MPC43** filing to comply with the FCC Part 15 requirements.

#### 2.4. TEST METHODOLOGY

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 662911	662911 D01 Multiple Transmitter Output v02r01
5	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7. ANTENNA REQUIREMENT

#### **Standard Requirement**

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna refer to Section 2.8 of the report



Antenna	Frequency	TX Bandwidth Paths (MHz)	Max Peak (	Gain (dBi)	Max Directional Gain		
Туре	Band (MHz)		(MHz)	Ant 1	Ant 2	(dBi)	
	5G WIFI PIFA Antenna List (5GHz 2*2 MIMO)						
	5150 ~ 5250	2	20,40,80,160	2.78	2.36	5.79	
PIFA	5250 ~ 5350	2	20,40,80,160	2.78	2.36	5.79	
Antenna	5470 ~ 5725	2	20,40,80,160	2.94	2.80	5.95	
	5725 ~ 5850	2	20,40,80,160	2.94	2.80	5.95	

# 2.8. DESCRIPTION OF AVAILABLE ANTENNAS

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11n/ac/ax mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, GANT, Directional gain = GANT + Array Gain, where Array Gain is as follows.

• For power spectral density (PSD) measurements on devices:

Array Gain =  $10 \log (N_{ANT}/N_{SS}) dB = 3.01;$ 

• For power measurements on IEEE 802.1 devices:

Array Gain = 0 dB for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less, for 20 MHz channel widths with  $N_{ANT} \ge 5$ .

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain.



# **3. TEST ENVIRONMENT**

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

# **3.2 TEST FACILITY**

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



#### **3.3 ENVIRONMENTAL CONDITIONS**

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range (°C)	15 - 35	-20 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply DC 19.0V				
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.				

# **3.4 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement y  $\pm$ U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2.7 %



# 3.5 LIST OF EQUIPMENTS USED

#### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Aug. 04, 2022	Aug. 03, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A

# TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 02, 2023
5GHz Fliter	EM Electronics	5150-5880MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Sep. 01, 2022	Aug. 31, 2023
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2023	Apr. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Aug. 31, 2023
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



# 4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate (Mbps)
802.11a/n/ax20	36,40,44,48,	36,40,48,	OFDM/OFDMA	6Mbps/MCS0
802.11a/n/ax20	149,153,157,161,165	149,157,165		olvibps/lvic30
802.11n/ax40	38,46,151,159	38,46, 151,159	OFDM/OFDMA	MCS0
802.11ac/ax80	42, 155	42, 155	OFDM/OFDMA	MCS0
802.11ac/ax160	50, 114	50, 114	OFDM/OFDMA	MCS0

#### Note:

1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%.

2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.


3. All radiated spurious emission and conducted interference modes have been pre scanned, and the report only records that antenna 1+antenna 2 work in the worst mode.

This product contains WIFI& Bluetooth module (Model: AX211D2W), FCC ID: PD9AX211D2. RF component data can be obtained by reference to report number: 201120-03.TR01, 201120-03.TR02 and 201120-03.TR03. The test report only reevaluates Radiated Spurious Emissions.



# 5. SYSTEM TEST CONFIGURATION

# 5.1. CONFIGURATION OF EUT SYSTEM

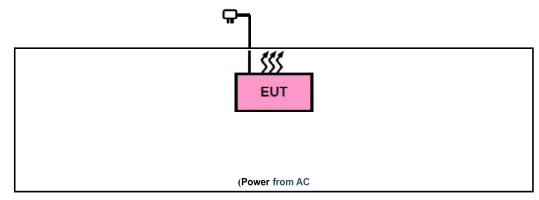

# 5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	NewCube Mini PC	N104	2BAWU-MPC43	EUT
2	Mouse	EMS-538A	1.7m,unshielded	AE
3	Keyboard	KB4021	1.8m,unshielded	AE
4	U Disc	DT100G3	N/A	AE
5	Monitor	U27N3	1.5m,unshielded	AE

#### **5.3. SUMMARY OF TEST RESULTS**

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2/3)	RF Output Power	Pass
3	§15.407(e)	6dB Bandwidth Measurement	Pass
4	§2.1049	26dB bandwidth Measurement	Pass
5	§15.407(a/1/2/3)	Power Spectral Density	Pass
6	§15.407(b)(1/2/3/4)	Conducted Spurious Emission	Pass
7	§15.209,§15.407(b)(1/2/3/4)	Radiated Emission& Band Edge	Pass
8	§15.207	AC Power Line Conducted Emission	Pass



# 6. RF OUTPUT POWER MEASUREMENT

#### **6.1 MEASUREMENT LIMITS**

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
0.111.1		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	$\boxtimes$	Client devices	250mW (23.98 dBm)
U-NII-2A	/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-2C	/		250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3		/	1 Watt (30 dBm)

Note: Where B is the 26dB emission bandwidth in MHz.


# 6.2 MEASUREMENT PROCEDURE

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.



# 6.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

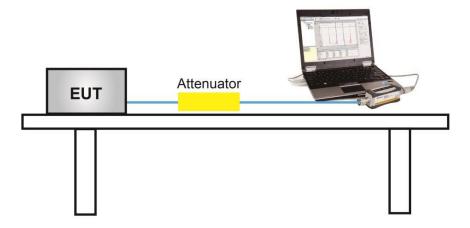

# 6.4 MEASUREMENT RESULT

Note: Please refer to the module RF report No.: (201120-03.TR01, 201120-03.TR02 and 201120-03.TR03).

Report No.: AGC12060230401FE06 Page 20 of 73



# 7. 6DB&26DB BANDWIDTH MEASUREMENT

# 7.1 MEASUREMENT LIMITS

The minimum 6dB bandwidth shall be at least 500 kHz.

# 7.2 MEASUREMENT PROCEDURE

- 7.2.1 -6dB bandwidth (DTS bandwidth) Test setting:
  - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
  - 2. Set the EUT Work on operation frequency individually.
  - 3. Set RBW = 100kHz.
  - 4. Set the VBW  $\geq$ 3\*RBW. Detector = Peak. Trace mode = max hold.
  - 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
- 7.2.2 99% occupied bandwidth test setting:
  - 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
  - 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
  - 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
  - 4. Set SPA Trace 1 Max hold, then View.


#### 7.2.3 -26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.

5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

# 7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

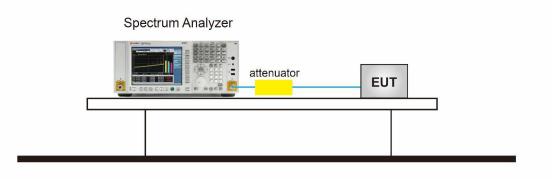



#### 7.4 MEASUREMENT RESULTS

Note: Please refer to the module RF report No.: (201120-03.TR01, 201120-03.TR02 and 201120-03.TR03).



# 8. POWER SPECTRAL DENSITY MEASUREMENT

#### **8.1 MEASUREMENT LIMITS**


Operation Band	EUT Category		LIMIT
		Outdoor Access Point	17dBm/ MHz
U-NII-1		Fixed point-to-point Access Point	17dBm/ MHz
0-111-1		Indoor Access Point	17dBm/ MHz
		Client devices	11dBm/ MHz
U-NII-2A	/		11dBm/ MHz
U-NII-2C	/		11dBm/ MHz
U-NII-3		/	30 dBm/500kHz

#### **8.2 MEASUREMENT PROCEDURE**

 $\square$  For Average power spectral density test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 2. Span was set to encompass the entire 26dB EBW of the signal.
- 3. RBW = 1MHz.
- 4. If measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 100KHz
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 100 kHz, add a constant factor 10\*log(500kHz/100kHz) = 6.99 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1/D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.

# 8.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

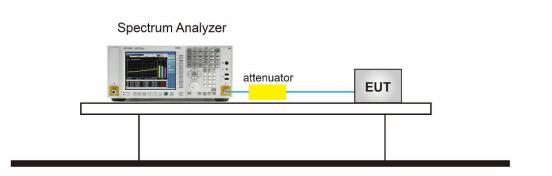



#### **8.4 MEASUREMENT RESULT**

Note: Please refer to the module RF report No.: (201120-03.TR01, 201120-03.TR02 and 201120-03.TR03).



# 9. CONDUCTED SPURIOUS EMISSION

#### 9.1 MEASUREMENT LIMIT

	Applicable to	Limit		
Restricted	789033 D02 General UNII Test	Field strength at 3m (dBuV/m)		
bands	Procedures New Rules v02r01	PK: 74	AV: 54	
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)	
Out of the	FCC 15.407(b)(1)			
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2	
	15.407(b)(3)			
15.407(b)(4)			See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000 \sqrt{30 P}}{3} \quad \mu V/m, \text{ where P is the eirp (Watts)}$$

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at 5 MHz above or below the band edge.

#### 9.2 MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.(Test frequency below 1GHz)
- 5. RBW = 1 MHz; VBW= 3 MHz; Sweep = auto; Detector function = peak.(Test frequency Above 1GHz)
- 6. Set SPA Trace 1 Max hold, then View.
- 7. Mark the maximum useless stray point and compare it with the limit value to record the result.

# 9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

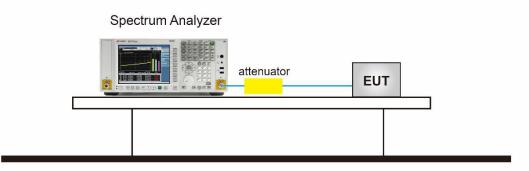



# 9.4 MEASUREMENT RESULTS

Note: Please refer to the module RF report No.: (201120-03.TR01, 201120-03.TR02 and 201120-03.TR03).



# **10. RADIATED EMISSION**

# **10.1 LIMITS OF RADIATED EMISSION TEST**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

	Applicable to	Limit		
Restricted	Restricted 789033 D02 General UNII Test		ength at 3m (dBuV/m)	
bands	Procedures New Rules v02r01	PK: 74	AV: 54	
	Applicable to	EIRP Limit (dBm/MHz)	Equivalent field Strength at 3m (dBuV/m)	
Out of the	FCC 15.407(b)(1)			
restricted bands	15.407(b)(2)	PK: -27	PK: 68.2	
	15.407(b)(3)			
	15.407(b)(4)		See Note 2	

Note 1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$\mathsf{E} = \frac{1000000 \sqrt{30 P}}{3} \quad \mu V/m, \text{ where P is the eirp (Watts).}$$

Note 2: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

#### edge.



# **10.2 MEASUREMENT PROCEDURE**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.Section G) Unwanted emissions measurement.

# (1) Procedure for Unwanted Emissions Measurements Below 1000MHz:

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

# (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz:

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

# (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.

• VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


# (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz:

- RBW = 1 MHz
- VBW = 3 MHz Detector = power averaging (rms), set span/(# of points in sweep)  $\ge$  RBW/2.
- Averaging type = power averaging (RMS)
- The correction factor shall be offset is  $10 \log (1/x)$ , where x is the duty cycle.




# **10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)**


RADIATED EMISSION TEST SETUP 9KHz-30MHz

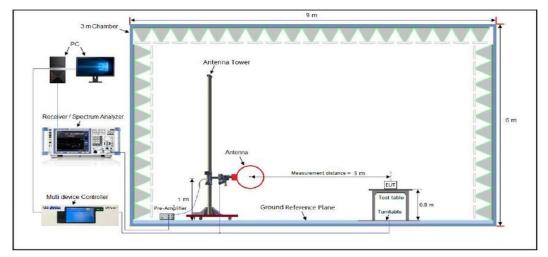

# RADIATED EMISSION TEST SETUP 30MHz-1000MHz

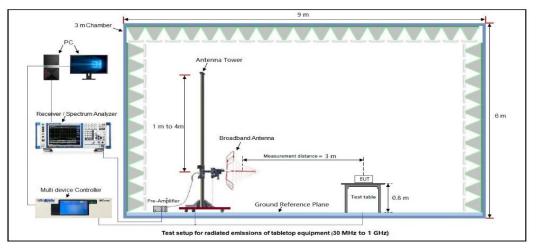

# RADIATED EMISSION TEST SETUP ABOVE 1000MHz

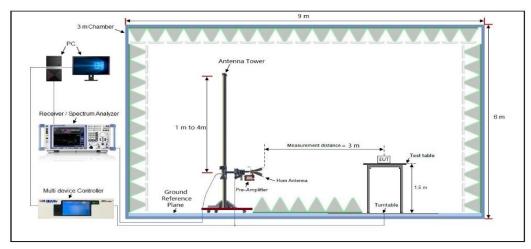

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/




#### **10.4 MEASUREMENT RESULT**

#### **Radiated Emission Below 30MHz**

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

#### Radiated emission from 30MHz to 1000MHz

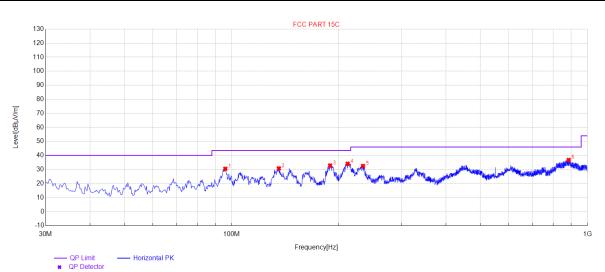


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	95.96	30.51	19.11	43.50	12.99	100	203	Horizontal
2	135.73	30.77	14.18	43.50	12.73	100	203	Horizontal
3	189.08	32.87	13.02	43.50	10.63	100	321	Horizontal
4	211.875	34.10	13.72	43.50	9.40	100	358	Horizontal
5	233.9425	32.52	16.50	46.00	13.48	100	1	Horizontal
6	885.54	36.80	32.82	46.00	9.20	100	181	Horizontal

# **RESULT: PASS**





EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

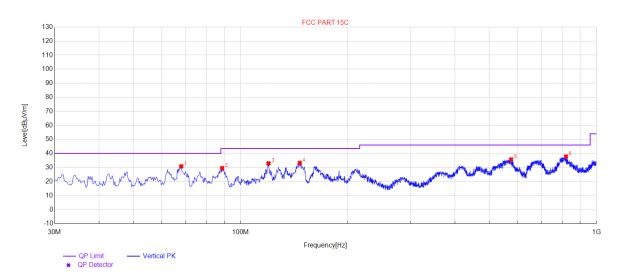

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	68.0725	30.83	13.79	40.00	9.17	100	299	Vertical
2	88.685	29.58	12.47	43.50	13.92	100	290	Vertical
3	119.725	32.99	17.41	43.50	10.51	100	207	Vertical
4	146.6425	33.28	20.55	43.50	10.22	100	225	Vertical
5	575.3825	35.72	25.59	46.00	10.28	100	359	Vertical
6	820.7925	37.78	31.62	46.00	8.22	100	190	Vertical

# **RESULT: PASS**

**Note:** All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



#### Radiated emission above 1GHz

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical

#### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10360.042	48.51	9.14	57.65	68.20	-10.55	peak	
15540.063	41.94	10.22	52.16	74.00	-21.84	peak	
15540.000	32.55	10.22	42.77	54.00	-11.23	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

#### RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type		
10360.042	49.34	9.14	58.48	68.20	-9.72	peak		
15540.063	42.18	10.22	52.40	74.00	-21.60	peak		
15540.000	32.57	10.22	42.79	54.00	-11.21	AVG		
Remark:	Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								



EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

# RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	48.63	9.14	57.77	68.20	-10.43	peak	
15600.063	42.15	10.22	52.37	74.00	-21.63	peak	
15600.063	33.74	10.22	43.96	54.00	-10.04	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

# RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10400.042	47.68	9.14	56.82	68.20	-11.38	peak	
15600.063	42.15	10.22	52.37	74.00	-21.63	peak	
15600.063	32.15	10.22	42.37	54.00	-11.63	AVG	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



#### Report No.: AGC12060230401FE06 Page 34 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

# RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10480.042	48.64	9.27	57.91	68.20	-10.29	peak			
15720.063	42.15	10.38	52.53	74.00	-21.47	peak			
15720.063	32.48	10.38	42.86	54.00	-11.14	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

#### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10480.042	48.64	9.27	57.91	68.20	-10.29	peak			
15720.063	42.15	10.38	52.53	74.00	-21.47	peak			
15720.063	31.57	10.38	41.95	54.00	-12.05	AVG			
Remark:	Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5260MHz	Antenna	Horizontal/Vertical

#### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)			
10520.044	48.64	9.29	57.93	68.20	-10.27	peak		
15780.066	42.13	10.42	52.55	74.00	-21.45	peak		
15780.066	33.57	10.42	43.99	54.00	-10.01	AVG		
Remark:								
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.					

#### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
10520.044	47.54	9.29	56.83	68.20	-11.37	peak	
15780.066	42.13	10.42	52.55	74.00	-21.45	peak	
15780.066	32.54	10.42	42.96	54.00	-11.04	AVG	
Remark:							
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5300MHz	Antenna	Horizontal/Vertical

### RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10600.044	47.94	9.31	57.25	74.00	-16.75	peak
10600.044	37.84	9.31	47.15	54.00	-6.85	AVG
15900.066	42.15	10.44	52.59	74.00	-21.41	peak
15900.066	33.54	10.44	43.98	54.00	-10.02	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10600.044	48.64	9.31	57.95	74.00	-16.05	peak
10600.044	38.64	9.31	47.95	54.00	-6.05	AVG
15780.066	42.97	10.44	53.41	74.00	-20.59	peak
15780.066	33.56	10.44	44.00	54.00	-10.00	AVG
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.			



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10640.044	47.65	9.35	57.00	74.00	-17.00	peak
10640.044	38.21	9.35	47.56	54.00	-6.44	AVG
15960.066	42.15	10.46	52.61	74.00	-21.39	peak
15960.066	32.46	10.46	42.92	54.00	-11.08	AVG
Remark:						•
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
10640.044	47.64	9.35	56.99	74.00	-17.01	peak			
10640.044	38.54	9.35	47.89	54.00	-6.11	AVG			
15960.066	42.15	10.46	52.61	74.00	-21.39	peak			
15960.066	32.49	10.46	42.95	54.00	-11.05	AVG			
Remark:									
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11000.044	47.65	9.37	57.02	74.00	-16.98	peak
11000.044	38.54	9.37	47.91	54.00	-6.09	AVG
16500.066	42.15	10.48	52.63	68.20	-15.57	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

### RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11000.044	47.69	9.37	57.06	74.00	-16.94	peak
11000.044	38.12	9.37	47.49	54.00	-6.51	AVG
16500.066	42.57	10.48	53.05	68.20	-15.15	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5600MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
11200.044	49.64	9.38	59.02	74.00	-14.98	peak			
11200.044	38.54	9.38	47.92	54.00	-6.08	AVG			
16800.066	42.15	10.49	52.64	68.20	-15.56	peak			
Remark:	Remark:								
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

#### **RADIATED EMISSION ABOVE 1GHZ-Vertical**

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11200.044	47.64	9.38	57.02	74.00	-16.98	peak
11200.044	37.54	9.38	46.92	54.00	-7.08	AVG
16800.066	41.26	10.49	51.75	68.20	-16.45	peak
Remark:						
Factor = Anten	ina Factor + Cabl	e Loss – Pre-a	amplifier.			



EUT	Portable Wi-Fi Phone	Model Name	W610W
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5700MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11400.044	48.64	9.39	58.03	74.00	-15.97	peak
11400.044	37.54	9.39	46.93	54.00	-7.07	AVG
17100.066	41.25	10.49	51.74	68.20	-16.46	peak

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11400.044	47.64	9.39	57.03	74.00	-16.97	peak
11400.044	38.24	9.39	47.63	54.00	-6.37	AVG
17100.066	42.15	10.49	52.64	68.20	-15.56	peak
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.042	48.64	9.42	58.06	74.00	-15.94	peak
11490.042	32.45	9.42	41.87	54.00	-12.13	AVG
17235.063	32.48	10.51	42.99	68.20	-25.21	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

### RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11490.042	46.31	9.42	55.73	74.00	-18.27	peak	
11490.042	32.49	9.42	41.91	54.00	-12.09	AVG	
17235.063	38.54	10.51	49.05	68.20	-19.15	peak	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	46.25	9.42	55.67	74.00	-18.33	peak
11570.042	33.48	9.42	42.90	54.00	-11.10	AVG
17355.063	32.18	10.51	42.69	68.20	-25.51	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

### RADIATED EMISSION ABOVE 1GHZ–Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11570.042	47.64	9.42	57.06	74.00	-16.94	peak	
11570.042	34.25	9.42	43.67	54.00	-10.33	AVG	
17355.063	42.13	10.51	52.64	68.20	-15.56	peak	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11650.042	48.64	9.62	58.26	74.00	-15.74	peak	
11650.042	32.19	9.62	41.81	54.00	-12.19	AVG	
17475.063	38.54	10.75	49.29	68.20	-18.91	peak	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

#### RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11650.042	47.15	9.62	56.77	74.00	-17.23	peak	
11650.042	32.45	9.62	42.07	54.00	-11.93	AVG	
17475.063	37.49	10.75	48.24	68.20	-19.96	peak	
Remark:	Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

Note: All test channels had been tested. The 802.11a20 is the worst case and recorded in the test report.

Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.


Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.




EUT	NewCube Mini PC	Model Name	N104		
Temperature	25°C	Relative Humidity	60%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	802.11a20 5180MHz	Antenna	Horizontal		

## Test result for band edge emission at restricted bands

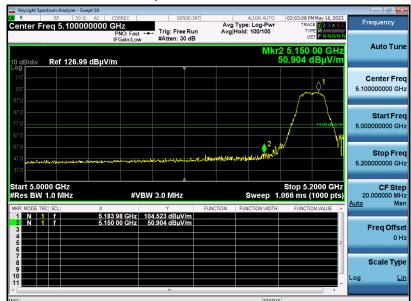

#### Test Graph for Peak Measurement

Test Graph for Average Measurement

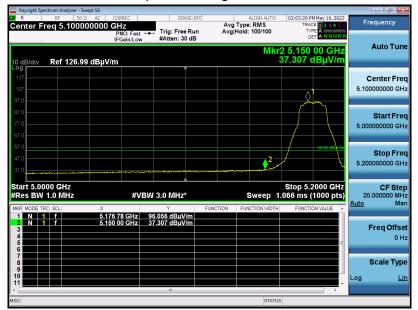


### **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 45 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement

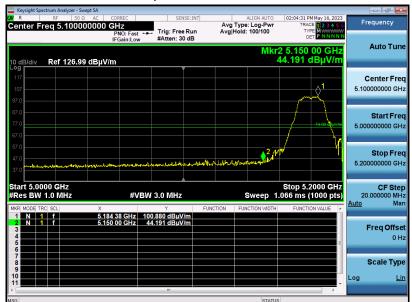

Test Graph for Average Measurement

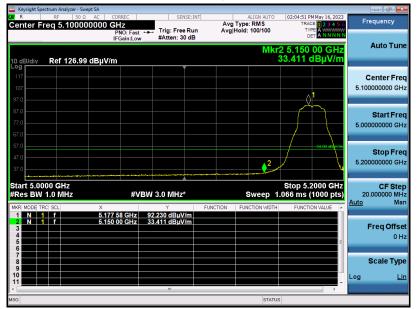

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 46 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

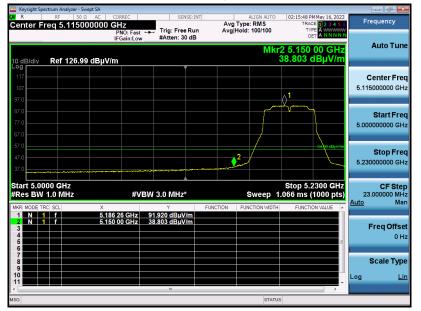


## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 47 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement

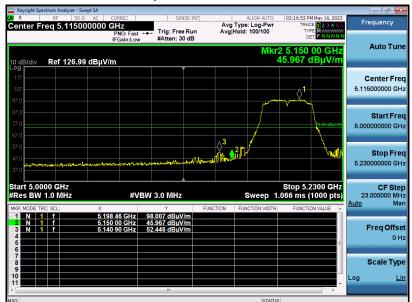

Test Graph for Average Measurement

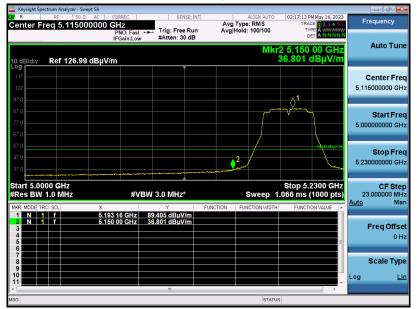

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 48 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

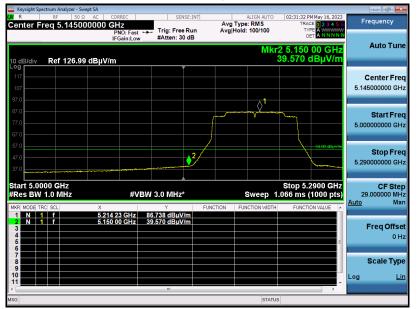

## **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 49 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 50 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5210MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



## **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 51 of 73

EUT	NewCube Mini PC	Model Name	N104
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5210MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




## **RESULT: PASS**



EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Horizontal

#### Test Graph for Peak Measurement

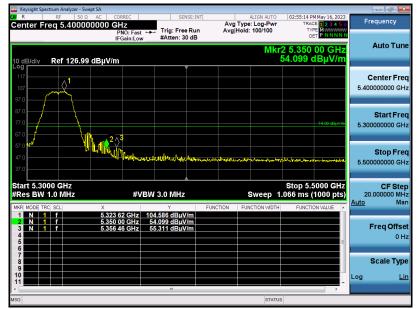

Test Graph for Average Measurement



## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 53 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5320MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

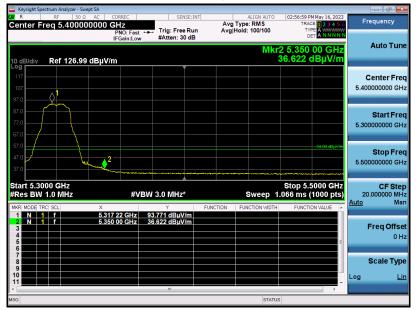

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 54 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

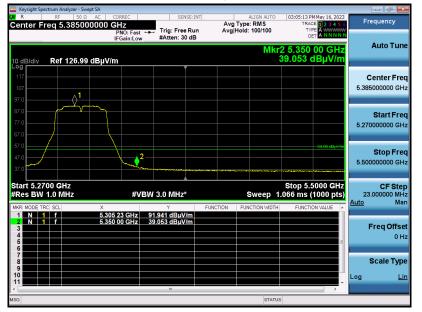

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 55 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5310MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

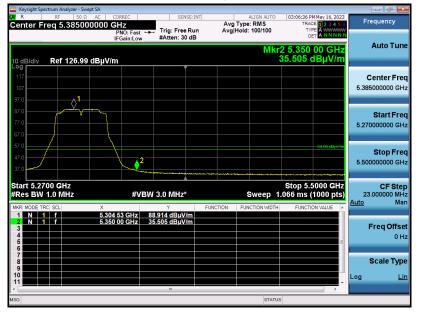


## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 56 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Horizontal

Test Graph for Peak Measurement

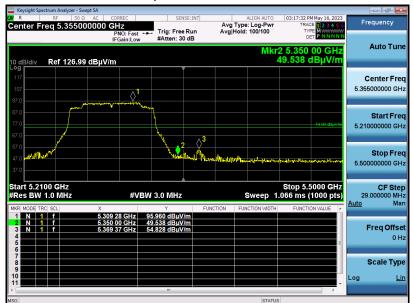

Test Graph for Average Measurement

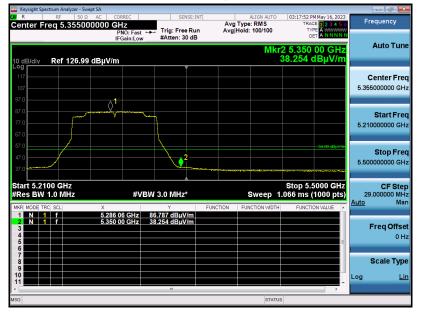


## **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 57 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5290MHz	Antenna	Vertical

Test Graph for Peak Measurement

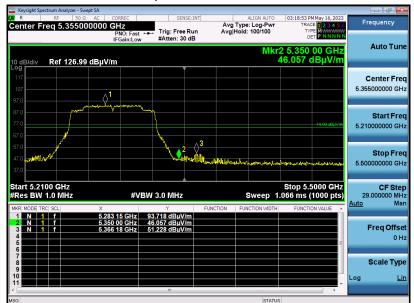

Test Graph for Average Measurement




### **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 58 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5290MHz	Antenna	Horizontal

Test Graph for Peak Measurement

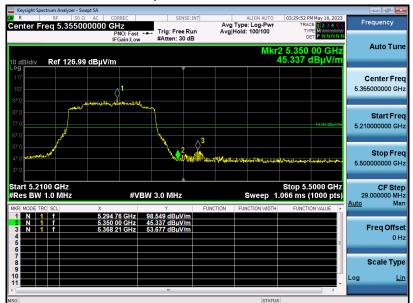

Test Graph for Average Measurement



## **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 59 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5290MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



### **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 60 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity 60%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

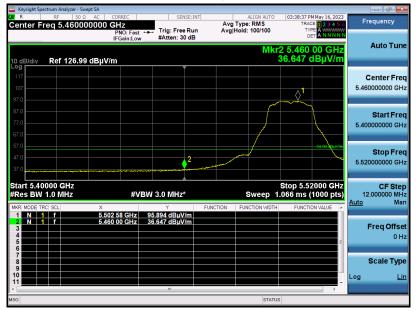

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 61 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

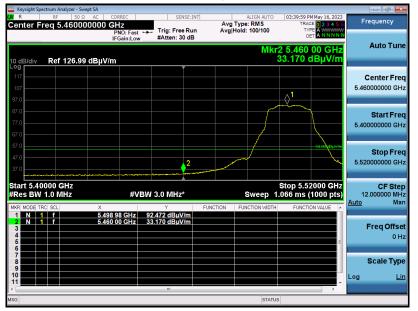

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 62 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5510MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

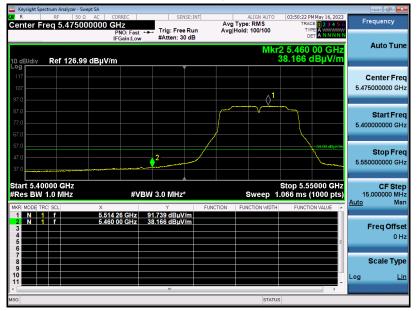

## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 63 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5510MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

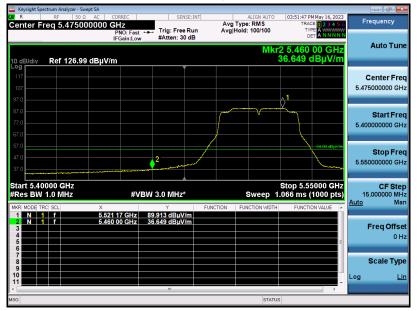


## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 64 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity60%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5530MHz	Antenna	Horizontal

Test Graph for Peak Measurement

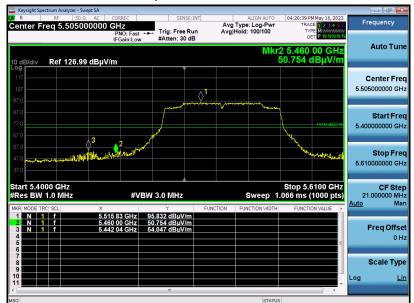

Test Graph for Average Measurement

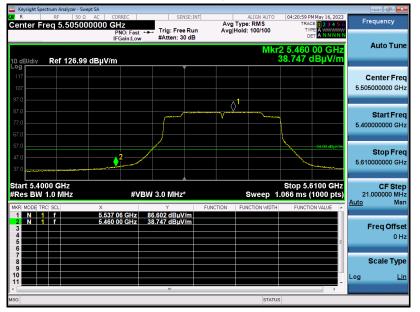


## **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 65 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ac80 5530MHz	Antenna	Vertical

Test Graph for Peak Measurement

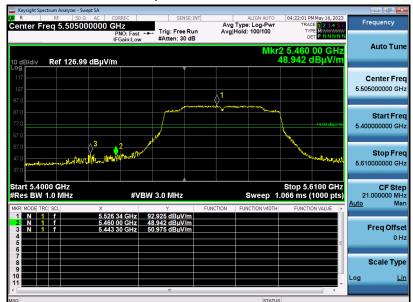

Test Graph for Average Measurement

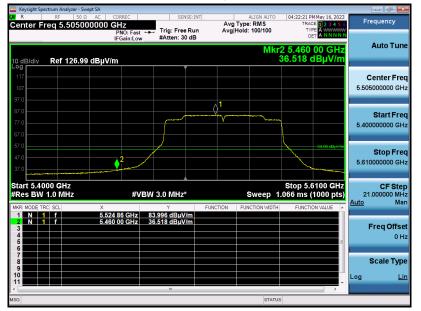


### **RESULT: PASS**




#### Report No.: AGC12060230401FE06 Page 66 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity60%	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5530MHz	Antenna	Horizontal

Test Graph for Peak Measurement

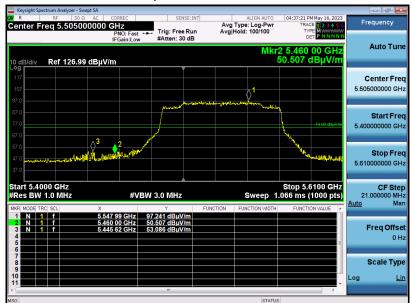

Test Graph for Average Measurement

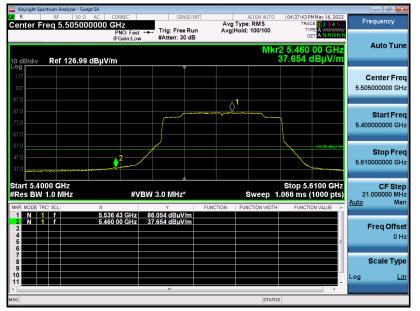


## **RESULT: PASS**



#### Report No.: AGC12060230401FE06 Page 67 of 73

EUT	Mini PC	Model Name	MPC43
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11ax80 5530MHz	Antenna	Vertical


Test Graph for Peak Measurement

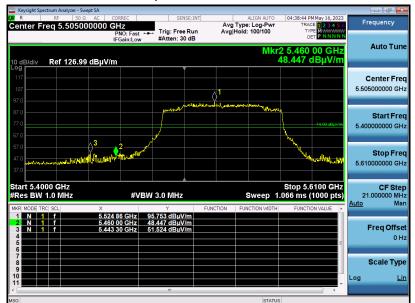

Test Graph for Average Measurement



### **RESULT: PASS**





Note: 1. All the modes are tested. All the 20MHz bandwidth modulation had been tested, the 802.11a20and 802.11ax20 at 5180MHz, 5320MHz, 5500MHz, was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 at 5190MHz, 5310MHz, 5510MHz, was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11AC80 at 5210MHz, 5290MHz, 5530MHz was the worst case and record in his test report.

2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

3. Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No recording in the test report.

4. The sideband standard of U NII-3 frequency band is not defined, the transmitted signal does not fall in the restricted band, and the edge signal is far away from the edge of other restricted bands, and it is not recorded in the report.



# 11. AC POWER LINE CONDUCTED EMISSION TEST

## **11.1. LIMITS OF LINE CONDUCTED EMISSION TEST**


<b>Francisco</b>	Maximum RF Line Voltage			
Frequency	Q.P (dBµV)	Average (dBµV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

## 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

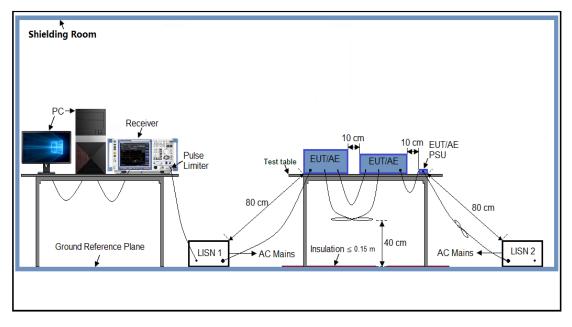



## **11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.
- 4. The worst mode is 802.11a20 5180MHz, antenna 1 and antenna 2 work together.



### 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



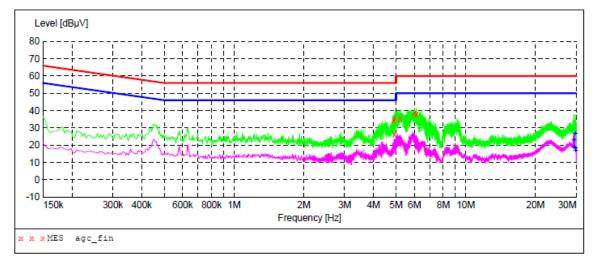

#### MEASUREMENT RESULT: "agc\_fin"

2023/5/9 14:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
4.894000 4.922000 4.950000 5.222000 6.014000 6.126000	34.30 26.20 35.30 35.30 38.20 37.70	6.4 6.4 6.5 6.5 6.5	56 56 60 60	21.7 29.8 20.7 24.7 21.8 22.3	-	L1 L1 L1 L1 L1 L1

#### MEASUREMENT RESULT: "agc fin2"

2023/5/9 14:3 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
29.282000 29.306000 29.330000 29.714000 29.742000 29.766000	18.60 18.50 22.90 26.50 18.10 16.60	9.1 9.1 9.2 9.2 9.2	50 50 50 50 50 50		AV AV	L1 L1 L1 L1 L1 L1

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



### AC POWER LINE CONDUCTED EMISSION TEST-N

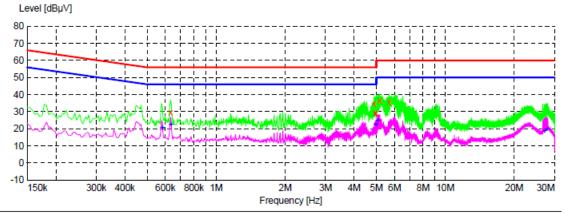

x x x MES agc\_fin

#### MEASUREMENT RESULT: "agc\_fin"

2023/5/9 14:22

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.634000	29.60	6.3	56	26.4	QP	N
4.894000	34.40	6.4	56	21.6	QP	N
4.934000	29.20	6.4	56	26.8	QP	N
4.974000	28.80	6.4	56	27.2	QP	N
5.178000	36.60	6.4	60	23.4	QP	N
5.694000	35.60	6.5	60	24.4	QP	N

### MEASUREMENT RESULT: "agc\_fin2"

2023/5/9 14:22 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.582000	20.50	6.2	46	25.5	AV	N
0.634000	22.60	6.3	46	23.4	AV	N
4.966000	22.20	6.4	46	23.8	AV	N
5.074000	24.90	6.4	50	25.1	AV	N
27.074000	18.60	8.9	50	31.4	AV	N
27.750000	19.60	9.0	50	30.4	AV	Ν

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., LtdAttestation of Global Compliance(Shenzhen)Std & Tech Co., LtdTel: +86-755 2523 4088E-mail: agc@agccert.comWeb: http://www.agccert.com/



# **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC12060230401AP02

# **APPENDIX II: PHOTOGRAPHS OF EUT**

Refer to the Report No.: AGC12060230401AP03

## ----END OF REPORT----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.