



Re-imagining Cellular IoT Solutions

# Cavli C16QS

## LTE CAT1.bis Module

### Hardware Manual

### External Release Version 4.1

Connect to our website and feel free to contact our technical support team for any assistance.

## Cavli Inc.,

99 South Almaden Blvd., Suite 600, San Jose, California, 95113

Phone: 1-650-535-1150

Web: [www.cavliwireless.com](http://www.cavliwireless.com)

IoT Connectivity Platform: [www.cavlihubble.io](http://www.cavlihubble.io)

## Support Center

<https://www.cavliwireless.com/support-center.html>

e-Mail: [support@cavliwireless.com](mailto:support@cavliwireless.com)

## For sales enquiries

<https://www.cavliwireless.com/contact-us.html>

e-Mail: [sales@cavliwireless.com](mailto:sales@cavliwireless.com)

## More IoT Modules

<https://www.cavliwireless.com/iot-modules/cellular-modules.html>

### **COPYRIGHT**

THE INFORMATION CONTAINED HERE IS PROPRIETARY TECHNICAL INFORMATION OF CAVLI WIRELESS INC. TRANSMITTING, REPRODUCTION, DISSEMINATION AND EDITING OF THIS DOCUMENT AS WELL AS UTILIZATION OF THE CONTENT ARE FORBIDDEN WITHOUT PERMISSION. OFFENDERS WILL BE HELD LIABLE FOR PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF A PATENT GRANT OR REGISTRATION OF A UTILITY MODEL OR DESIGN. EVERY EFFORT HAS BEEN MADE IN PREPARATION OF THIS DOCUMENT TO ENSURE ACCURACY OF THE CONTENTS. BUT ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS DOCUMENT DO NOT CONSTITUTE A WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE DUE TO PRODUCT VERSION UPDATE OR OTHER REASONS. FOR MOST RECENT DOCUMENTS, ALWAYS REFER THE PRODUCT PORTFOLIO SECTION AT [www.cavliwireless.com](http://www.cavliwireless.com).

**Copyright © Cavli Inc. All rights reserved**



## Table of Contents

<b>1 Introduction .....</b>	<b>10</b>
<b>2 Module Overview .....</b>	<b>11</b>
<b>2.1 Module Introduction .....</b>	<b>11</b>
<b>2.2 Module Characteristics .....</b>	<b>12</b>
<b>2.3 Module Function .....</b>	<b>14</b>
<b>2.4 Module Working Mode .....</b>	<b>15</b>
<b>3 Interface Application Description .....</b>	<b>16</b>
<b>3.1 Chapter Overview .....</b>	<b>16</b>
<b>3.2 Module Interface .....</b>	<b>17</b>
3.2.1 C16QS Pin Layout .....	17
3.2.2 C16QS Pin Interface .....	18
<b>3.3 Power interface .....</b>	<b>21</b>
3.3.1 Power Supply Design .....	21
3.3.2 Power Reference Circuit.....	23
3.3.3 VREF 1.8 Voltage Output .....	23
<b>3.4 Switching Machine Reset Mode .....</b>	<b>24</b>
3.4.1 Turn ON Module .....	24
3.4.2 Reset Control.....	25
<b>3.5 USB Interface .....</b>	<b>25</b>
<b>3.6 UART Interface.....</b>	<b>27</b>
3.6.1 UART0 Serial Port .....	27
3.6.2 UART1 Serial Port.....	27
3.6.3 UART2 Serial Port.....	28



3.6.4 Serial Port Application Circuit .....	29
<b>3.7 USIM Interface.....</b>	<b>31</b>
3.7.1 USIM Card Reference Circuit.....	31
<b>3.8 General Purpose GPIO Interface.....</b>	<b>32</b>
<b>3.9 Network Status Indication Interface .....</b>	<b>33</b>
3.9.1 Network Status.....	33
3.9.2 Module Status Indication .....	35
<b>3.10 I2S Interface.....</b>	<b>36</b>
<b>3.11 I2C Bus .....</b>	<b>36</b>
<b>3.12 SWD Interface.....</b>	<b>37</b>
<b>3.13 ADC Interface.....</b>	<b>37</b>
<b>3.14 Antenna .....</b>	<b>38</b>
3.14.1 RF Trace Reference .....	40
3.14.2 RF Connector Size.....	42
<b>3.15 Control Interface .....</b>	<b>44</b>
<b>3.16 GNSS Interface .....</b>	<b>44</b>
<b>3.17 SPI Interface.....</b>	<b>46</b>
<b>4 Overall Technical Indicators.....</b>	<b>47</b>
4.1 Chapter Overview .....	47
4.2 Working Frequency .....	47
4.3 GNSS Performances .....	48
4.4 Antenna Requirements.....	49
<b>5 Interface Electrical Characteristics.....</b>	<b>50</b>
5.1 Chapter Overview .....	50
5.2 Working Storage Temperature .....	50



<b>5.3 Electrostatic Property .....</b>	<b>50</b>
<b>5.4 Module IO Level .....</b>	<b>51</b>
<b>5.5 Power Supply.....</b>	<b>52</b>
<b>5.6 Power Consumption Characteristics.....</b>	<b>52</b>
<b>6 Structural and Mechanical Properties.....</b>	<b>55</b>
<b>6.1 Chapter Overview .....</b>	<b>55</b>
<b>6.2 C16QS Module Mechanical Size .....</b>	<b>56</b>
<b>7 Ordering Information .....</b>	<b>59</b>
<b>8 Packaging and Production.....</b>	<b>61</b>
<b>8.1 Chapter Overview .....</b>	<b>61</b>
<b>8.2 Module Packaging and Storage .....</b>	<b>61</b>
<b>8.3 Production Welding.....</b>	<b>63</b>
<b>9 Warnings .....</b>	<b>65</b>
<b>9.1 CE EU Conformity Statement .....</b>	<b>65</b>
<b>9.2 NCC Caution .....</b>	<b>65</b>
<b>9.3 IC Information .....</b>	<b>65</b>
<b>9.4 FCC Warnings.....</b>	<b>66</b>
9.4.1 FCC Modular Approval Information Examples for Manual.....	66
9.4.2 FCC Radiation Exposure Statement.....	67
9.4.3 OEM Integration Instructions.....	67
9.4.4 Validity of using the module certification .....	68
9.4.5 Upgrade Firmware.....	68
9.4.6 End Product Labeling .....	68
9.4.7 Information that must be placed in the end user manual.....	68
9.4.8 Requirement per KDB996369 D03.....	68



**10 Appendix ..... 72**

**10.1 Chapter Overview ..... 72**

**10.2 Abbreviations..... 72**

**10.3 Safety and Precautions ..... 74**



## VERSION HISTORY

Version	Edit	Date (DD/MM/YYYY)
1.0	Initial Version	13/09/2022
1.1	<p>Updated reference circuits</p> <ul style="list-style-type: none"> <li>• VBAT power supply</li> <li>• LDO linear power supply</li> <li>• Power ON</li> <li>• Reset</li> <li>• USB connection</li> <li>• UART Serial port</li> <li>• Level conversion chip</li> <li>• Main Antenna matching circuit</li> <li>• GNSS Active antenna matching circuit</li> <li>• GNSS Passive antenna matching circuit</li> <li>• GNSS VRTC power</li> </ul> <p>Updated module voltage information</p>	19/09/2022
1.2	<p>Updated reference figures of</p> <ul style="list-style-type: none"> <li>• Power ON</li> <li>• Reset</li> <li>• GNSS active antenna</li> <li>• USIM reference circuit</li> </ul> <p>Update SPQ values in ordering information</p>	20/09/2022
1.3	Updated the Interface Application Description	08/11/2022
1.4	Updated basic module information	28/11/2022
1.5	Updated Power Key and RESET Key reference circuits	14/12/2022
1.6	Updated the count of GPIOs from thirteen to four under Heading 3.8	20/12/2022
1.7	Updated power consumption details	18/01/2023
1.8	Updated Band List for N.A Variant	18/01/2023
1.9	Updated the tape reel capacity	20/01/2023
2.0	Updated the ordering information (NA bands)	30/01/2023
2.1	Changed GNSS bands and ADC	07/02/2023



2.2	GNSS Performance parameters updated	15/02/2023
2.3	Updated table 2-1 and 5-1 with new Temperature values Changed the reset reference circuit (Fig 6)	20/02/2023
2.4	Power Consumption characteristics (Table 5-6) updated	07/03/2023
2.5	AP_READY description updated	10/03/2023
2.6	Power supply information updated (Section 3.3.3)	03/04/2023
2.7	Tx Idle Current Consumption added	10/04/2023
2.8	NET_STATUS Pins updated	18/04/2023
2.9	Net_Status Pin description updated	24/04/2023
3.0	UART 1 Baud Rate updated	10/05/2023
3.1	Updated GNSS and UART interface Changed pin layout	15/06/2023
3.2	Updated new variants (A.N., L.N., W.W.)	11/07/2023
3.3	Updated uSIM and USB reference circuits	12/07/2023
3.4	UART details updated, Device Driver information added, IN variant added, ordering information updated	31/07/2023
3.5	Added CE EU Conformity Statement	04/08/2023
3.6	Updated Functional Block diagram	24/08/2023
3.7	Changed pin layout, Bottom view to Top view	31/08/2023
3.8	Updated information related to USIM interface	05/09/2023
3.9	Updated GNSS VRTC input figure	06/09/2023
4.0	Updated Warnings and GNSS Interface note	07/09/2023
4.1	Updated Optimal Working Temperature Added FCC warnings and IC Information	18/09/2023





## Table of Figures

Figure 1 C16QS Functional Block Diagram .....	14
Figure 2 C16QS module Interface definition (top view).....	17
Figure 3 VBAT power supply .....	22
Figure 4 LDO linear power reference circuit .....	23
Figure 5 Power-on reference circuit.....	24
Figure 6 Reset reference circuit .....	25
Figure 7 USB connection design circuit diagram .....	26
Figure 8 Full-featured serial port design .....	29
Figure 9 UART serial port design.....	30
Figure 10 Level conversion chip circuit .....	30
Figure 11 USIM design circuit diagram.....	31
Figure 12 Net light circuit diagram .....	34
Figure 13 STATUS Pin Reference Circuit .....	35
Figure 14 I2C interface reference circuit diagram .....	37
Figure 15 Main antenna matching circuit.....	38
Figure 16 GNSS active antenna matching circuit .....	39
Figure 17 GNSS passive antenna matching circuit.....	40
Figure 18 Coplanar antenna .....	41
Figure 19 The complete structure of the two-layer PCB microstrip line.....	41
Figure 20 The complete structure of the multilayer PCB strip line.....	42
Figure 21 RF connector size chart.....	42
Figure 22 Antenna connector matching plug diagram.....	43
Figure 23 Matching coaxial RF line size.....	43
Figure 24 Multi GNSS receiver Block diagram .....	45
Figure 25 GNSS VRTC Input.....	46
Figure 26 Top view and bottom view of the module .....	55
Figure 27 Front view and side view of the module (unit: mm) .....	56
Figure 28 Bottom view of the module (unit: mm) .....	57
Figure 29 Recommended Footprint (Top View) (unit: mm).....	58
Figure 30 Ordering Information.....	59
Figure 31 C16QS Tape Measurements (in mm).....	61
Figure 32 Reel Dimensions of C16QS (in mm).....	62
Figure 33 Reflow soldering temperature graph .....	63



# 1 Introduction

This document is the **Hardware Manual** of the Cavli Wireless solution product **C16QS Smart Module**, which describes:

- ✓ The hardware composition and functional features of the module
- ✓ The definition and usage of the application interface
- ✓ The electrical performance and mechanical properties of the module

This document and the other application documents combined will enable users to develop end devices with Cavli Modules.



# 2 Module Overview

## 2.1 Module Introduction

C16QS integrates an application processing subsystem, a communication subsystem, multimedia and connectivity peripherals to enable a single chip 4G LTE feature phone solution.

The C16QS communication subsystem integrates **LTE CAT.1bis** technology and a RF transceiver to cover 1/3/5/8/20(**E.A**), 2/4/5/12/13/66(**N.A**), 1/3/5/8/18/19/26/28(**A.N**), 2/3/4/7/8/28(**L.A**),

or 1/2/3/4/5/8/12/18/19/20/26/28/66 (**W.W**) bands for worldwide roaming.

The application subsystem runs on a single ARM Cortex M3 processor at 204MHz with integrated peripherals for connectivity and multimedia.



### NOTE

- **E.A** – Europe and Asia Regions
- **N.A** – North America Region
- **A.N** – Australia, New Zealand, Taiwan and South Korea
- **I.N** – India
- **L.A** – Latin America
- **W.W** – Global



## 2.2 Module Characteristics

Table 2-1 Key Features

Characteristics		Description
Physical Characteristics		26.5mm x 22.5mm x 2.3mm
Fixed Way		LGA package, patch mount
Operating Voltage		3.4V – 4.2V Typical Voltage 3.7V
Application Processor		ARM Cortex M3 with a clock frequency of 204MHz.
Application Interface	USIM card	Supports 3.0V/1.8V Supports hot swap function
	USB	<ul style="list-style-type: none"> <li>✓ USB2.0 (High-Speed) (only supports Slave mode)</li> <li>✓ Data transfer rate up to 480Mbps</li> </ul>
	UART	<ul style="list-style-type: none"> <li>✓ UART0(2 lines), UART1(7 lines) and UART2(2 lines)</li> <li>✓ AT commands and data transfer - U1</li> <li>✓ DM data - U0</li> <li>✓ GNSS NMEA - U2</li> <li>✓ The baud rate is up to 3000000bps. Default is 115200bps.</li> </ul>
	ADC	<ul style="list-style-type: none"> <li>✓ 2 Analogue to Digital converter</li> </ul>
	I2S	<ul style="list-style-type: none"> <li>✓ Compliant with I2S bus protocol</li> </ul>
	I2C	<ul style="list-style-type: none"> <li>✓ Compliant with I2C bus protocol</li> <li>✓ High speed mode supports 3.3Mbps rate</li> </ul>
	Network Indication	<ul style="list-style-type: none"> <li>✓ WWAN_STATE network status indication</li> <li>✓ STATUS Module status</li> </ul>
	GPIO	<ul style="list-style-type: none"> <li>✓ 4 GPIO Interfaces</li> </ul>
	GNSS	<ul style="list-style-type: none"> <li>✓ GPS, GLONASS, BEIDOU, GALILEO, QZSS, NAVIC</li> <li>✓ SBAS Ranging support</li> </ul>
	SPI	<ul style="list-style-type: none"> <li>✓ Standard SPI interface</li> </ul>
	SWD	<ul style="list-style-type: none"> <li>✓ Standard SWD interface (2 Lines)</li> </ul>



Frequency Band	<b>LTE BANDS:</b> <b>E.A:</b> - 1/3/5/8/20 <b>N.A:</b> - 2/4/5/12/13/66 <b>A.N:</b> - 1/3/5/8/18/19/26/28 <b>L.A:</b> - 2/3/4/7/8/28 <b>W.W:</b> - 1/2/3/4/5/8/12/18/19/20/26/28/66
Data Network	<ul style="list-style-type: none"> <li>✓ FDD/TDD LTE CAT 1.bis</li> <li>✓ Peak DL 10Mbps/ UL 5Mbps (CAT 1.bis)</li> </ul>
AT Command	<ul style="list-style-type: none"> <li>✓ Support for standard AT instruction sets (Hayes 3GPP TS 27.007 and 27.005)</li> <li>✓ Specific AT Query C16QS AT command set</li> </ul>
Network Protocol	<b>TCP(S)/HTTP(S)/MQTT(S)/FTP(S)/PPP</b> TLS versions supported as well
Antenna Interface	<ul style="list-style-type: none"> <li>✓ MAIN x 1</li> <li>✓ GNSS x 1</li> <li>✓ Characteristic impedance 50 Ω</li> </ul>
Virtual Network Card	Supports USB virtual network card
Device Drivers	<ul style="list-style-type: none"> <li>✓ USB Ethernet Driver: RNDIS</li> <li>✓ USB Communication Driver: CDC-ACM / COM</li> </ul>
Temperature Range	<ul style="list-style-type: none"> <li>✓ Normal working temperature: - 20°C to +55°C</li> <li>✓ Storage temperature: -45°C to +90°C</li> </ul>
Humidity	RH5%~RH95%
Module Function Distinction	S on the model number represents the single mode

 **NOTE**

- When the temperature is in the range of -40°C to -30°C or +75°C to +85°C, some RF specifications of the C16QS module may not meet the 3GPP standards.



## 2.3 Module Function

C16QS Module mainly consists of the following circuit units:

- ✓ RF Band SAW Duplex array
- ✓ Multi-Band PA
- ✓ Interfaces

The functional block diagram of the C16QS module is shown below :

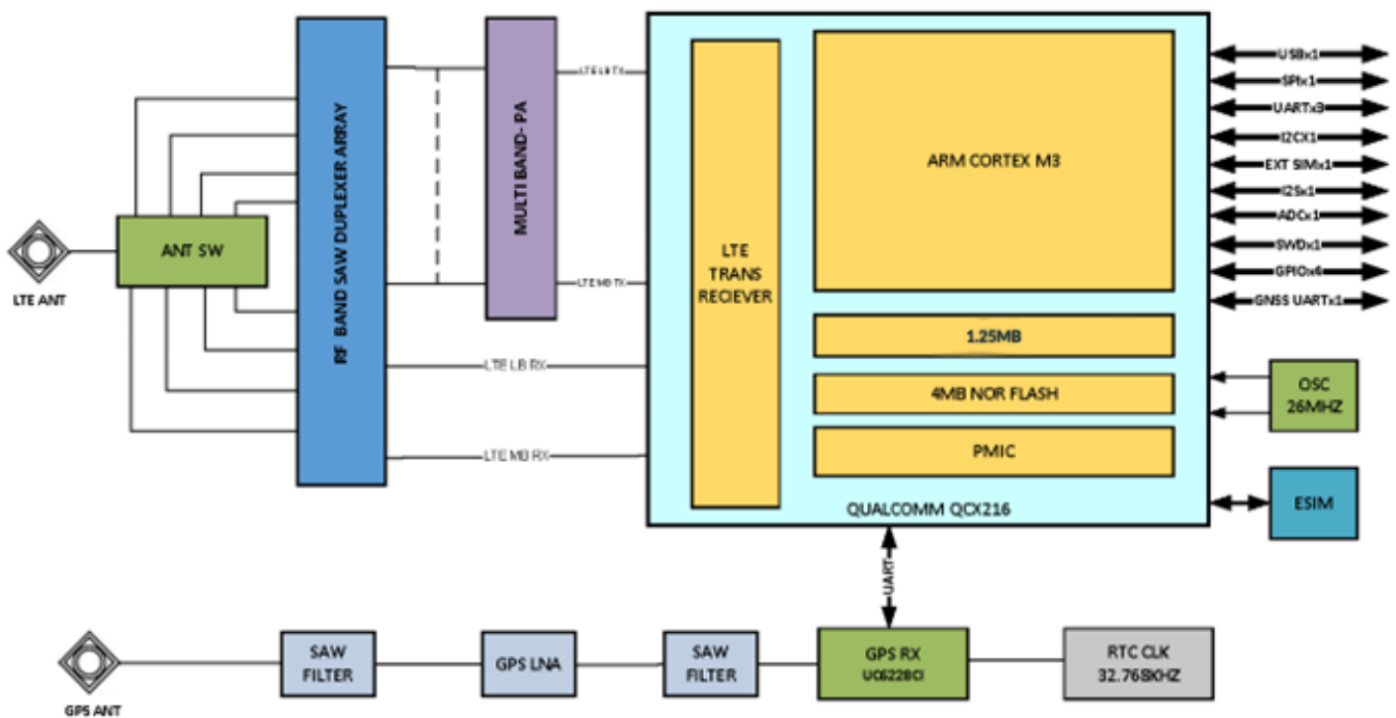


Figure 1 C16QS Functional Block Diagram



## 2.4 Module Working Mode

Table 2-2 work mode

Working mode	Description
Turn off the machine	In the case of shutdown, the module is fully powered off.
Flight Mode	The module closes the module RF circuit, unable to interact with the network.
Dormancy	The module closes most functions, and it will synchronize with the network.
Ideal state	Turn on the machine and register the network successfully, in the idle state
Data transmission	The module is in working state and has data interaction with the network.



# 3 Interface Application Description

## 3.1 Chapter Overview

This chapter mainly describes the interface definition and application of this module. It contains the following sections:

- Module Interface
- Power Interface
- Switching Machine Reset Mode
- USB Interface
- UART Interface
- USIM Interface
- GPIO Interface
- Network Status Indicator Interface
- I2S Interface
- I2C Bus
- SWD Interface
- Antenna
- Control Interface
- ADC Interface
- GNSS Interface
- SPI Interface





## 3.2 Module Interface

### 3.2.1 C16QS Pin Layout

C16QS pins are assigned as follows :

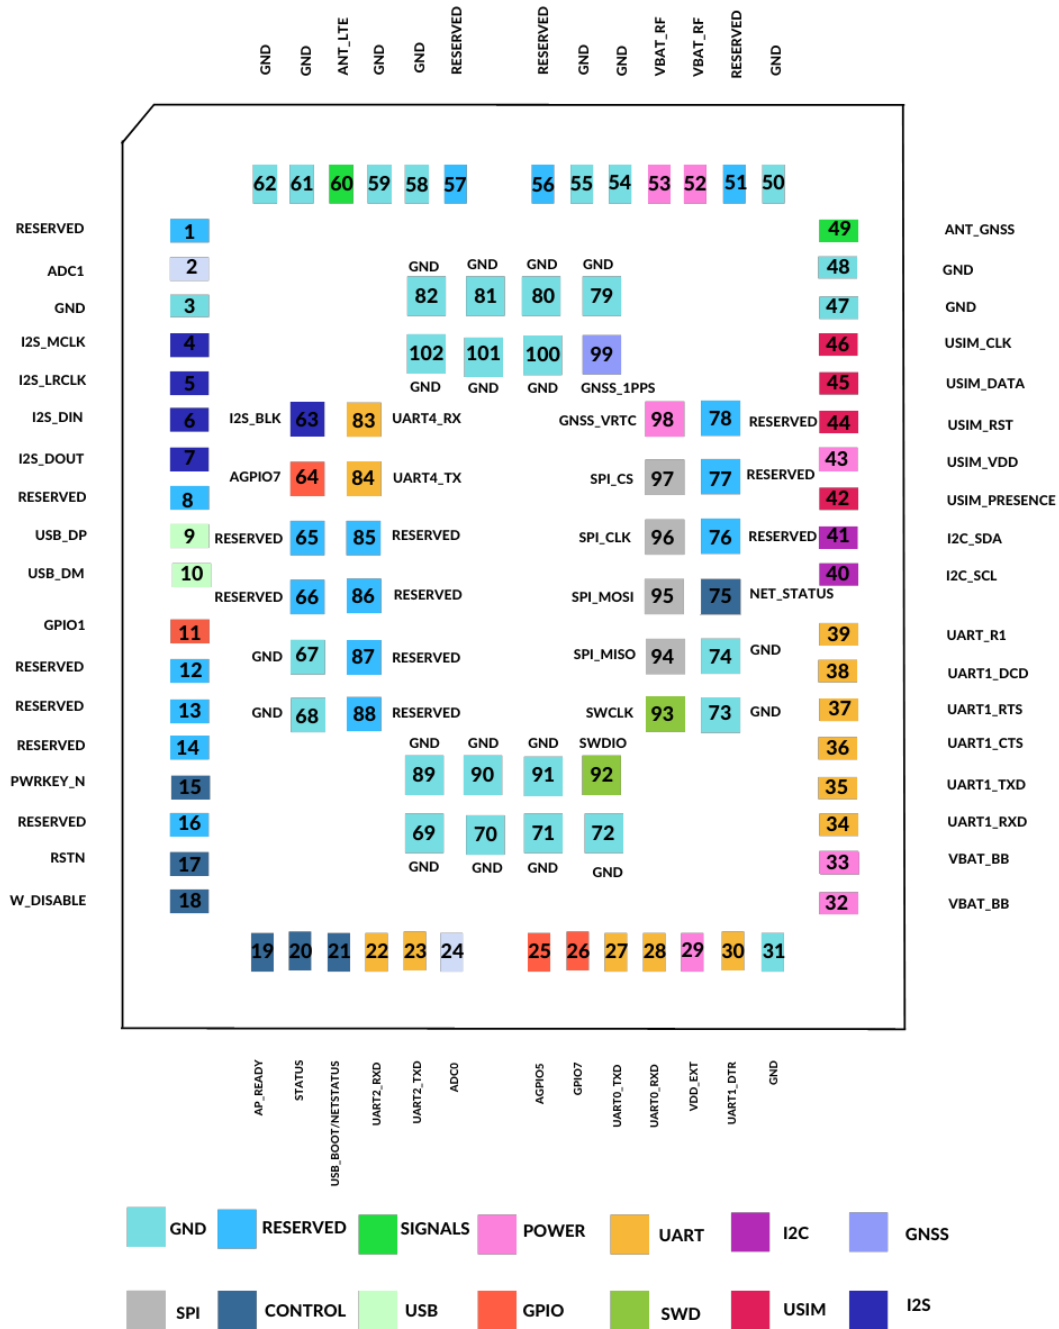


Figure 2 C16QS module Interface definition (top view)



## 3.2.2 C16QS Pin Interface

The C16QS module has the LGA interface. The module interface definition is shown in the following table:

Table 3-1 Pin name

Pin No.	Pin name	Pin No.	Pin name
1	RESERVED	2	ADC1
3	GND	4	I2S_MCLK
5	I2S_LRCK	6	I2S_DIN
7	I2S_DOUT	8	RESERVED
9	USB_DP	10	USB_DM
11	GPIO1	12	RESERVED
13	RESERVED	14	RESERVED
15	PWRKEY_N	16	RESERVED
17	RSTN	18	W_DISABLE
19	AP_READY	20	STATUS
21	USB_BOOT/NET_STATUS	22	UART2_RXD
23	UART2_TXD	24	ADC0
25	AGPIO5	26	GPIO7
27	UART0_TXD	28	UART0_RXD
29	VDD_EXT	30	UART1_DTR
31	GND	32	VBAT_BB
33	VBAT_BB	34	UART1_RXD
35	UART1_TXD	36	UART1_CTS
37	UART1_RTS	38	UART1_DCD
39	UART1_R1	40	I2C_SCL
41	I2C_SDA	42	USIM_PRESENCE



43	USIM_VDD	44	USIM_RST
45	USIM_DATA	46	USIM_CLK
47	GND	48	GND
49	ANT_GNSS	50	GND
51	RESERVED	52	VBAT_RF
53	VBAT_RF	54	GND
55	GND	56	RESERVED
57	RESERVED	58	GND
59	GND	60	ANT_LTE
61	GND	62	GND
63	I2S_BLK	64	AGPIO7
65	RESERVED	66	RESERVED
67	GND	68	GND
69	GND	70	GND
71	GND	72	GND
73	GND	74	GND
75	NET_STATUS	76	RESERVED
77	RESERVED	78	RESERVED
79	GND	80	GND
81	GND	82	GND
83	GNSS_RXD	84	GNSS_TXD
85	GNSS_VDD	86	GNSS_EN
87	RESERVED	88	RESERVED
89	GND	90	GND
91	GND	92	SWDIO



93	SWCLK	94	SPI_MISO
95	SPI_MOSI	96	SPI_CLK
97	SPI_CS	98	GNSS_VRTC
99	GNSS_1PPS	100	GND
101	GND	102	GND

Table 3-2 IO parameter definition

Pin Type	Full Form
IO	Input / Output
PI	Power Input
PO	Power Output
AI	Analog Input
AO	Analog Output
DI	Digital Input
DO	Digital Output
OD	Leaky Open Key

 **NOTE**

- The module typically has an IO port level of 1.8V (in addition to the SIM, the SIM card port level supports 1.8V and 3.0V).
- All **RESERVED** and unused pin feet need to be left floating



## 3.3 Power interface

The C16QS module power interface consists of three parts:

- ✓ **VBAT\_BB** is the module working power supply
- ✓ **VBAT\_RF** is the module RF power supply
- ✓ **GNSS\_VRTC** is the RTC power
- ✓ **USIM\_VDD** is the working power supply for SIM card

### 3.3.1 Power Supply Design

The power interface of the C16QS module is as follows:

Table 3-3 Power pin definitions

Power supply							
Pin No.	Definition	IO	Description	Remarks	Min	Typical	Max
32, 33	VBAT_BB	PI	Module input voltage	Input voltage 3.4~4.2V	3.4V	3.7V	4.2V
52, 53	VBAT_RF	PI	Module input voltage	Input voltage 3.4~4.2V	3.4V	3.7V	4.2V
43	USIM_VDD	PO	SIM card power supply			1.8V/ 2.85V	1.98/ 3.3V
98	GNSS_VRTC	PI	GNSS RTC Power supply	Input voltage 1.8V		1.8V	1.89V
29	VDD_EXT	PO	Reference voltage	Output voltage 1.8V		1.8V	
85	GNSS_VDD	PI	Input voltage			3.3V	
86	GNSS_EN	PI	Input voltage		1.2V	1.8V	



3, 31, 47, 48, 50, 54, 55, 58, 59, 61, 62, 67-74, 79-82, 89-91, 100-102	GND		Ground	Ground 0		0	
---	-----	--	--------	----------	--	---	--

The C16QS module can be powered by a single power supply mode.

- ✓ The module has 4 channels of power supply, two **VBAT\_BB** and two **VBAT\_RF** pins.
- ✓ The module power supply range is between 3.4V – 4.2V
- ✓ It is recommended to use 3.7 V/830 mA power supply.
- ✓ If the module's operating voltage drop causes the VCC supply voltage to be too low or the supply current is insufficient, the module may shut down or restart. Therefore, to reduce the power fluctuation of the module when working, it is necessary to use a low-ESR value of the voltage regulator capacitor, the power pin and the ground pin should be connected and can provide sufficient power supply capability.
- ✓ The external power supply is connected to the module from a single voltage source and can be expanded to two sub paths with star structure.
- ✓ The **VBAT\_BB** line width should be within 1mm, and the **VBAT\_RF** line width should not be less than 2mm.
- ✓ The **GNSS\_VDD** voltage is for powering ON GNSS IC and **GNSS\_EN** is to start the NMEA streaming in the independent operation mode of GNSS and LTE. In normal working mode, both pins can be left floating.
- ✓ For more information, refer *C16QS GNSS Application Note*.

To ensure that the power supply is sufficient, a 10pF, 33pF, 0.1μF, 22μF ceramic capacitors can be added to improve the performance and stability of the system.

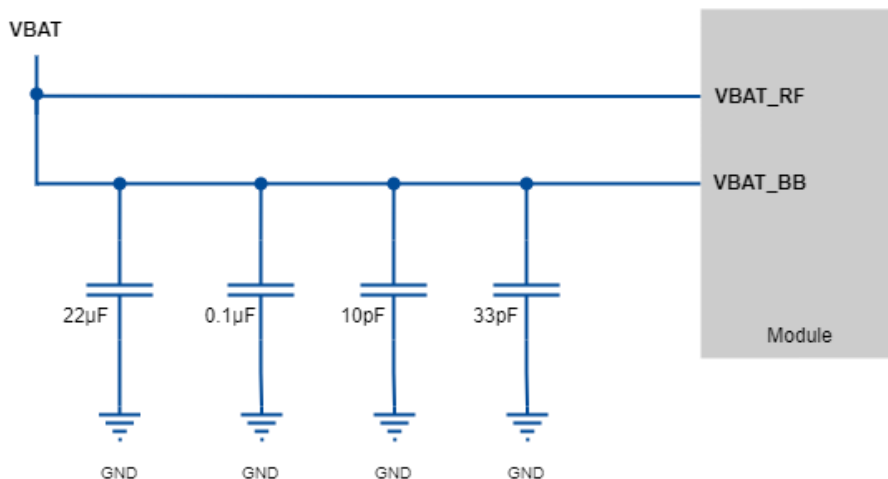


Figure 3 VBAT power supply



### 3.3.2 Power Reference Circuit

A linear LDO power supply to design the VBAT power supply. For better understanding, refer the circuit given below.

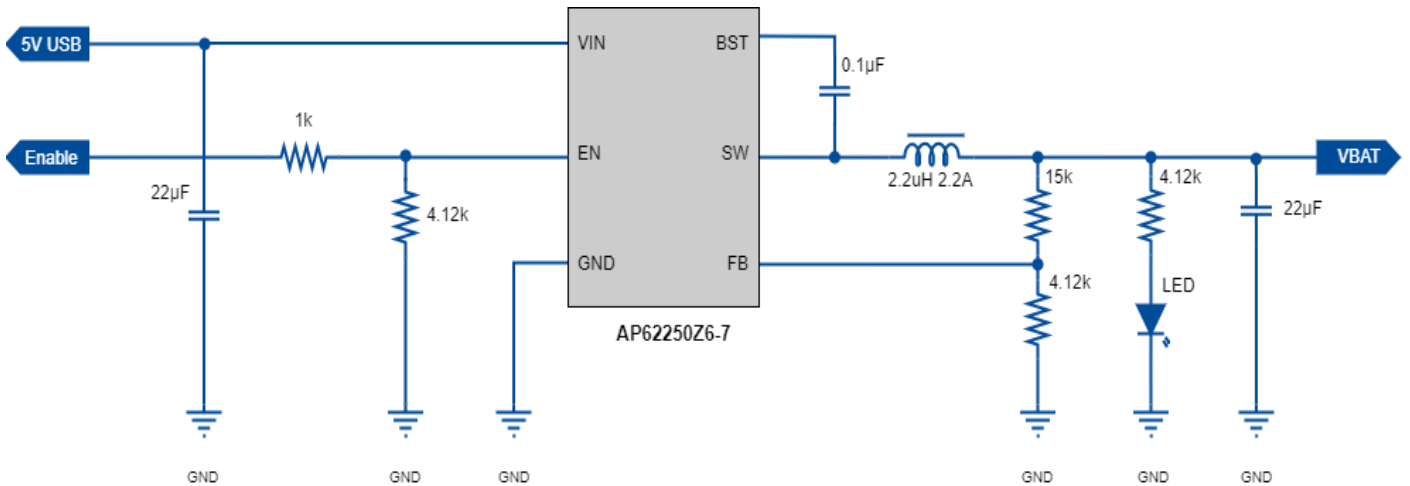


Figure 4 LDO linear power reference circuit

#### NOTE

- In order to prevent the module from being damaged by surge and overvoltage, a 5.1V/500mW Zener diode is suggested to be connected in parallel at the VBAT pin of the module.
- It is suggested that 3 ceramic capacitors (33pF, 10pF, 100nF) be added to the VBAT line and placed near the VBAT pin.

### 3.3.3 VREF 1.8 Voltage Output

The C16QS module outputs 1.8V through VREF for internal digital circuitry. This voltage is the logic level voltage of the module. After normal power-on, the 29<sup>th</sup> pin will output 1.8V and the current load will be 50mA. The external master can read the voltage of VREF to determine if the module is powered on. VREF can also be used as an external power supply, such as a level shifting chip, but maximum load should be within 50mA.



Table 3-4 VDD EXT pin definition

Pin No.	Signal name	I/O	High value	Description
29	VDD_EXT	PO	1.8V	Power on

### 3.4 Switching Machine Reset Mode

#### 3.4.1 Turn ON Module

The 15<sup>th</sup> pin of the C16QS module is POWER\_ON pin. The module can be powered on by pulling down the POWER\_KEY LOW for at least 500ms. The user can check whether the module is powered on by querying the high and low levels of the VDD\_EXT pin.

Table 3-5 Switch pin definition

Pin No.	Signal name	I/O	High value	Description
15	PWRKEY_N	PI	VBAT	Active Low pin

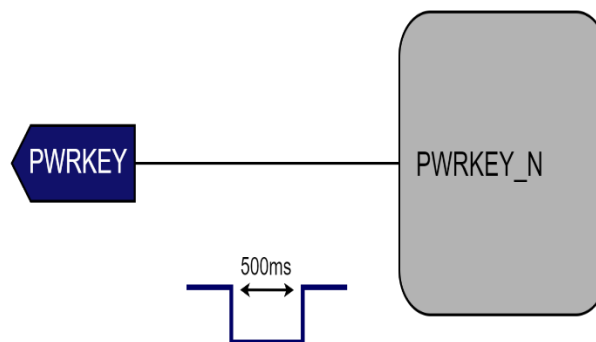


Figure 5 Power-on reference circuit





### 3.4.2 Reset Control

The C16QS module Pin 17<sup>th</sup> is a reset pin. The application detects that the module is abnormal. When the software does not respond, the module can be reset. Pull the pin low for 100-600ms to reset the module. The RESET pin is sensitive to interference. A 10nF to 0.1uF capacitor can be installed near the signal for signal filtering. Keep away from RF interference signals when routing.

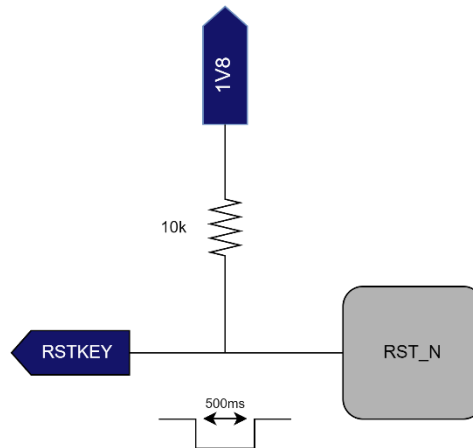


Figure 6 Reset reference circuit

Table 3-6 RESET pin parameters

Pin No.	Signal name	I/O	High value	Description
17	RSTN	DI	VBAT	Module Reset Control

The C16QS module supports AT command reset, and the AT command is **AT+TRB** to restart the module. Detailed instructions can be found in the C16QS AT Command Set Manual.

### 3.5 USB Interface

The C16QS module USB interface supports *USB2.0* high-speed protocol, only in slave mode, and does not support USB charging mode. USB input and output traces must comply with the *USB2.0* feature. The input power supply of USB\_VBUS is 3.3V - 5V. AT interfacing and Ethernet via USB is possible in Cavli C16QS module. The USB interface is defined as follows:

Table 3-7 USB interface pin definition

Pin No.	Signal name	I/O	Description
9	USB_DP	IO	USB differential signal +
10	USB_DM	IO	USB differential signal -



The module only acts as a USB slave device and supports *USB Sleep* and *Wake-Up* mechanisms. USB interface application reference circuit is as follows :

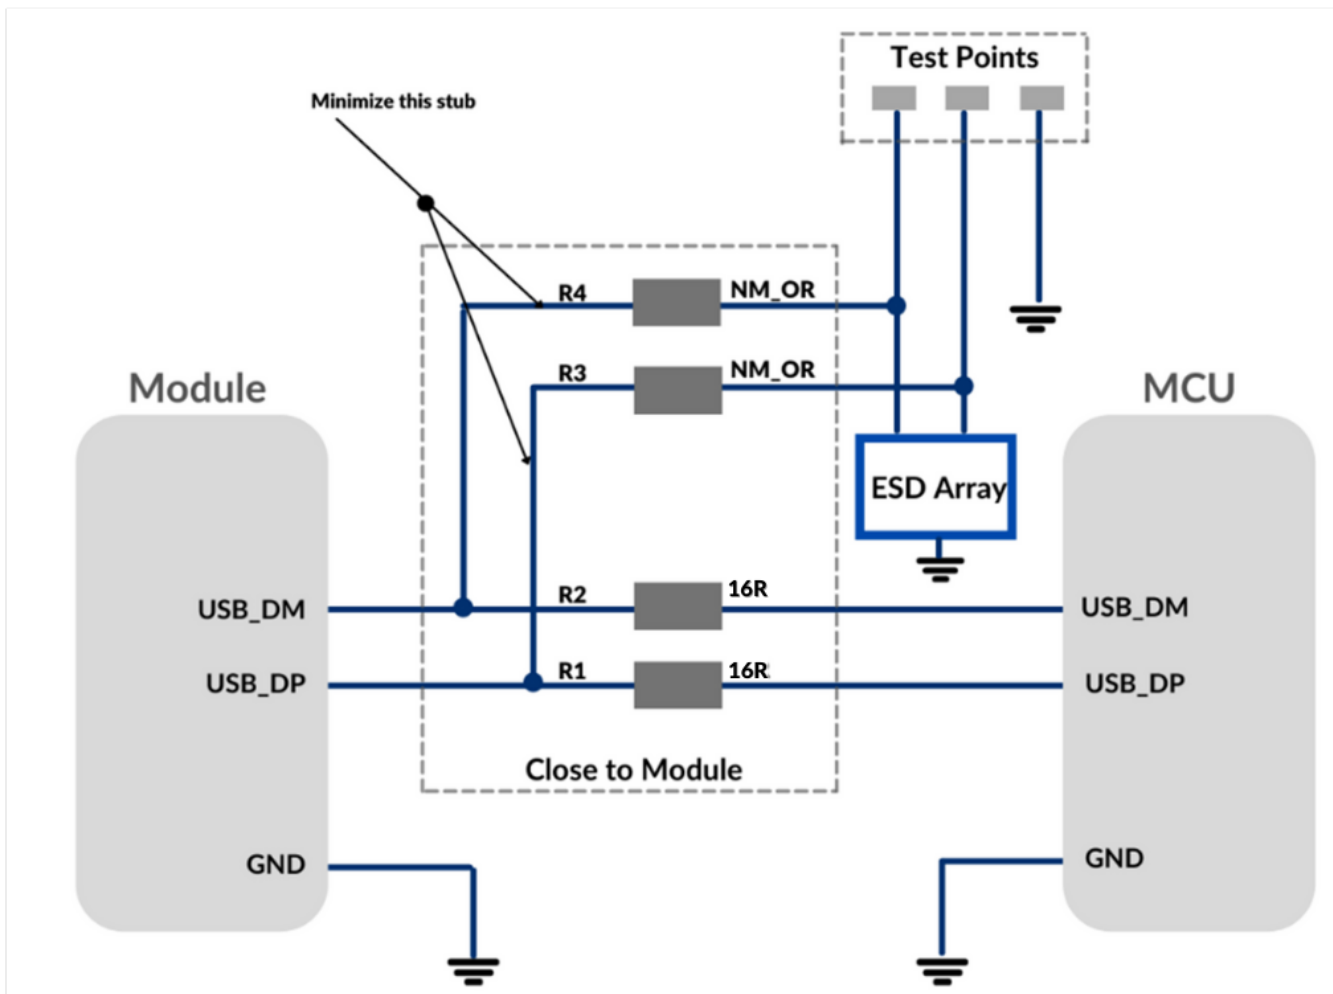


Figure 7 USB connection design circuit diagram

## NOTE

- Required a resistance of 16R for R1/R2.
- The USB interface supports high-speed (480Mbps) and full-speed (12Mbps) modes, so the trace design needs to strictly follow the USB2.0 protocol requirements, pay attention to the protection of the data line, differential trace, control impedance is 90Ω.
- In order to improve the antistatic performance of the USB interface, it is recommended to add an ESD protection device on the data line. The equivalent capacitance of the protection device is less than 2pF.
- The USB interface bus supply voltage is provided internally by the module and does not need to be externally supplied. At the same time, since the USB interface of the module does not provide USB bus power, the module can only be used as a slave device of the USB bus device.



## 3.6 UART Interface

The C16QS module provides three sets of UART interfaces. Main serial port and Auxiliary serial ports, serial port level is 1.8V.

### 3.6.1 UART0 Serial Port

The pins 27 and 28 of the module are UART0 serial port pins. UART0 serial interface can only be used as the debug UART of the module. The pins are defined as follows :

Table 3-8 UART0 serial port pin definition

Pin No.	Signal name	I/O	Description	Parameter	Level value (V)			Remark
					min	typical	max	
27	UART0_TX	DO	Data transmission	VIH	1.3	1.8	1.9	
				VIL	0		0.45	
28	UART0_RX	DI	Data reception	VOH	1.3	1.8	1.9	
				VOL	-0.3		0.6	

#### NOTE

- It is always advisable to have a test point for this UART in your design for debugging purposes.

### 3.6.2 UART1 Serial Port

The serial port can realize AT interactive instructions, print program log information, and interact with peripheral data and firmware update.

The module's serial port baud rate can be set to 600,1200,2400,4800, 9600, 19200, 38400, 57600, 115200, 230400, 460800,921600,1152000, 3000000 bps.

The default baud rate is 115200 bps and maximum baud rate is 3000000 bps



The UART interface is defined as follows :

Table 3-9 UART serial port signal definition

No.	Name	I/O	Description
39	UART1_RI	DOH	Ringing indication
38	UART1_DCD	DOH	Output carrier detection
36	UART1_CTS	DO	UART clear to send
37	UART1_RTS	DI	UART request to send
30	UART1_DTR	DI	Data terminal preparation
35	UART1_TXD	DO	Data transmission
34	UART1_RXD	DI	Data reception

### 3.6.3 UART2 Serial Port

The pins 22 and 23 of the module are UART2 serial port pins. This UART is used to obtain the GNSS NMEA data. The pins are defined as follows:

Table 3-10 UART2 serial port pin definition

Pin No.	Signal name	I/O	Description	Parameter	Level value (V)			Remark
					min	typical	max	
22	UART2_RX	DI	Data transmission	VIH	1.3	1.8	1.9	
				VIL	0		0.45	
23	UART2_TX	DO	Data reception	VOH	1.3	1.8	1.9	
				VOL	-0.3		0.6	



 **NOTE**

- UART2 and GNSS UART are internally connected so while using GNSS ensure that UART 2 is kept as floating and vice versa.

### 3.6.4 Serial Port Application Circuit

The serial level is 1.8V.

The module's serial port baud rate can be set to 600 to 3000000bps baud rate and the default is 115200bps.

The UART1 serial port can realize

- ✓ AT interactive instructions
- ✓ Print program log information
- ✓ Interact with peripheral data

When users want to use the full-featured serial port, they can refer to the following connection methods

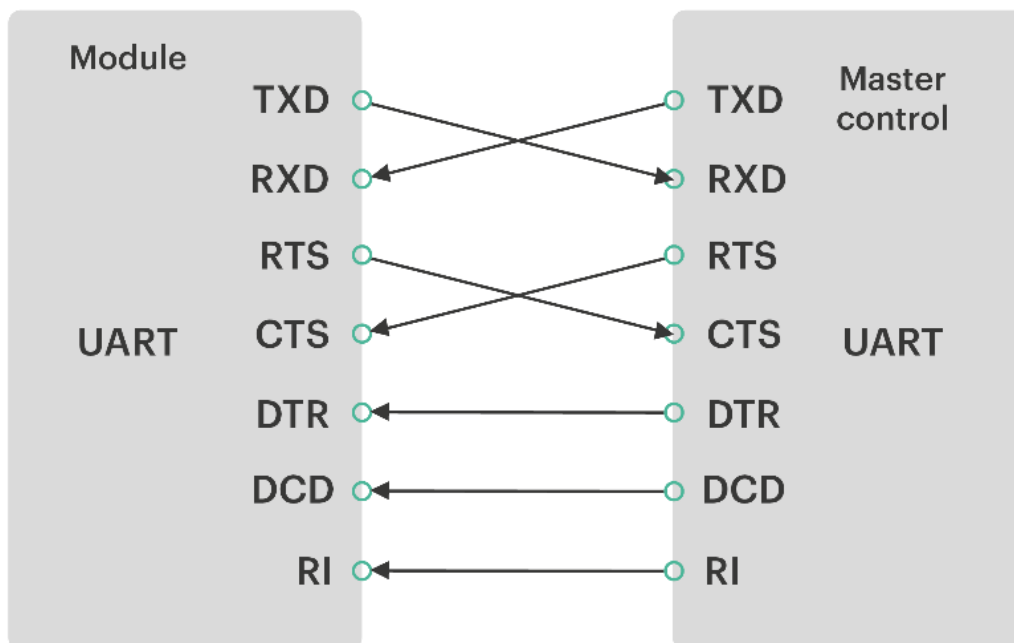


Figure 8 Full-featured serial port design



If you need to use a 2-wire serial port, you can refer to the following serial port design:

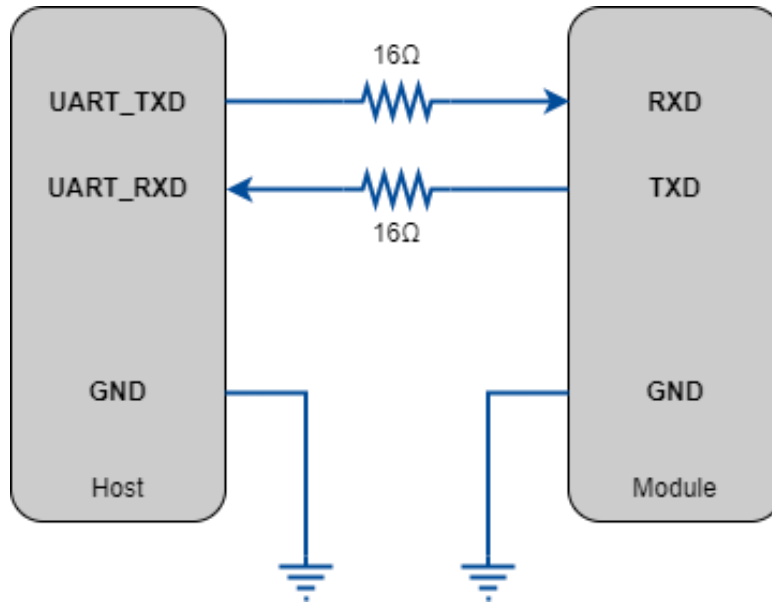


Figure 9 UART serial port design

The serial port of the module is TTL 1.8V level. If the serial port needs to be connected to the MCU of 3.3V level, it is necessary to add a level conversion chip externally to achieve level matching. Use an external 1.8V power source for VCCA. For the chip connection method, refer to the following circuit:

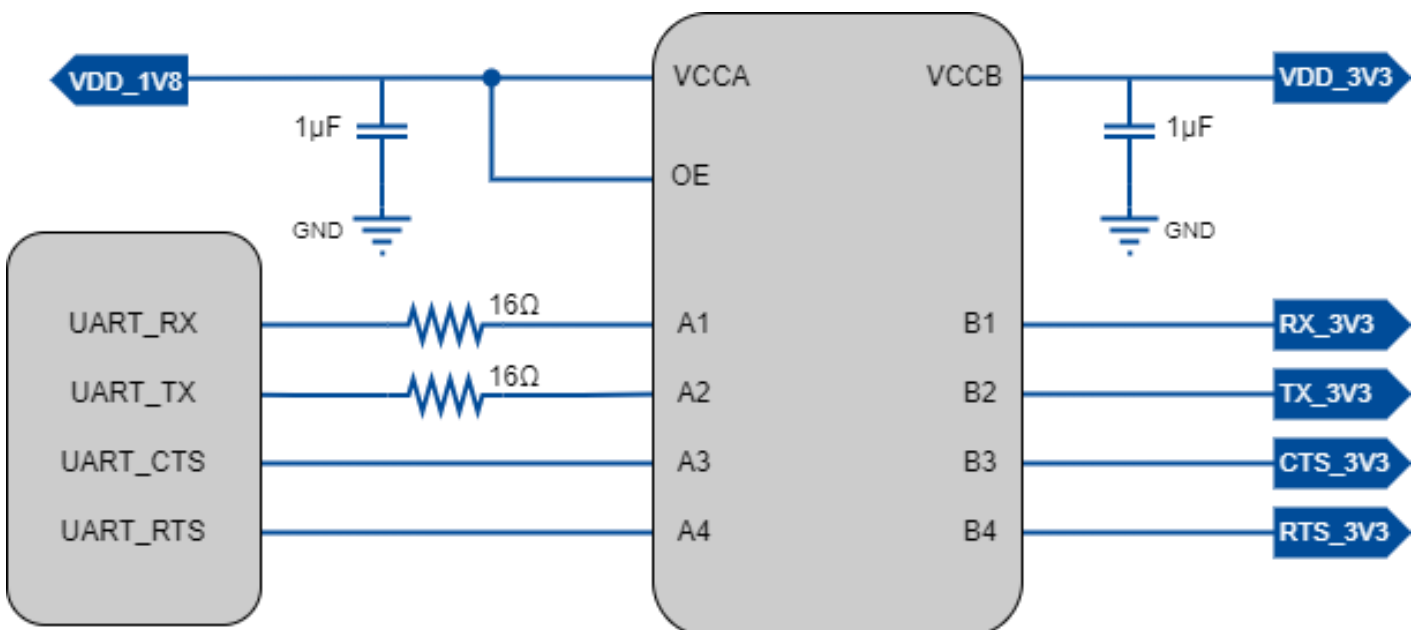


Figure 10 Level conversion chip circuit



### 3.7 USIM Interface

The C16QS module provides a USIM card interface compatible with the ISO 7816-3 standard. The USIM card power supply is provided by the module's internal power manager and supports 1.8V/3.0V

Table 3-12 SIM card signal definition

No	Signal name	I/O	Description
42	USIM_PRESENCE	I	Sim detect
43	USIM_VDD	PO	USIM card power supply
45	USIM_DATA	IO	USIM card data
46	USIM_CLK	DO	USIM card clock
44	USIM_RST	DO	USIM card reset

#### 3.7.1 USIM Card Reference Circuit

The C16QS module does not come with a uSIM card slot. Users need to design a USIM card slot on their own interface board. The module supports USIM of voltages 1.8V and 2.85V.

The USIM card interface reference circuit is as follows:

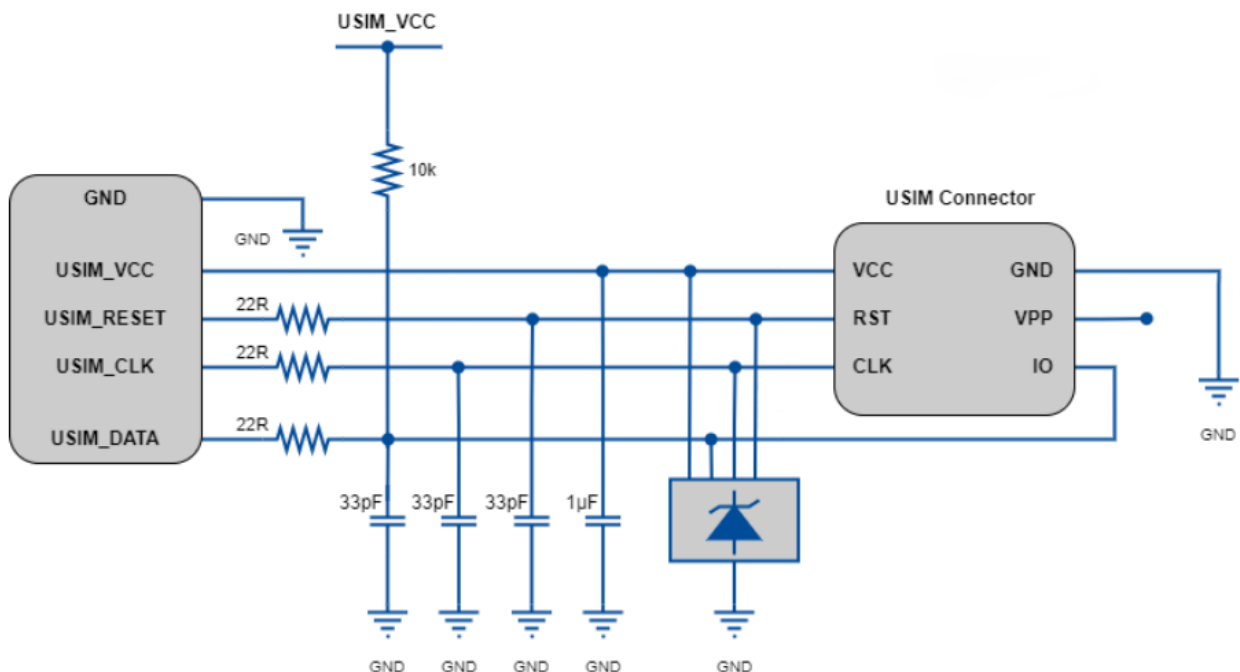


Figure 11 USIM design circuit diagram




**NOTE**

- The USIM interface cable is recommended to use ONSEMI's SMF15C device for ESD protection. The peripheral circuit components should be placed close to the card holder. The SIM card holder is close to the module layout.
- The USIM card circuit is susceptible to radio frequency interference and does not recognize or drop the card. Therefore, the card slot should be placed as far as possible from the RF radiation of the antenna. The card trace should be as far away as possible from the RF, power supply and high-speed signal lines.
- The USIM\_DATA has been internally pulled up to 1.8V (only resistor, use an external power source) through a 47K resistor, and no external pull-up is required.
- USIM\_PRESENCE is high by default. The SIM card status can be detected by this PIN during hot plug application. It is recommended to provide provision for pull-up.
- To avoid transient voltage overload, the USIM interface requires a 22R resistor in series with each other on the signal line path.
- The ground of the USIM deck and the ground of the module should maintain good connectivity.

## 3.8 General Purpose GPIO Interface

The C16QS module contains four general purpose control signals. The interface is defined as follows:

Table 3-13 General GPIO Pin Definitions

Pin No.	Definition	I/O	Functional description
11	GPIO1	IO	General Purpose Pin 1
26	GPIO7	IO	General Purpose Pin 2
25	AGPIO5	IO	Analog General Purpose Pin 3
64	AGPIO7	IO	Analog General Purpose Pin 4






**NOTE**

- Only GPIO7 is available for toggling via AT command (AT+GPSET=0/1).

## 3.9 Network Status Indication Interface

The C16QS module provides an open-drain GPIO signal to indicate the status of the RF communication.

### 3.9.1 Network Status

C16QS provides two network status indication pins: **NET\_STATUS** (Pins **21 & 75**). These pins are used to drive a network status indication LED. Since both the pins have the same functionality, use only one and keep the other floating.

The following tables describe the pin definition and logic level changes of NETLIGHT in different network activity status.

Table 1-14 Network Indicator Pin Definition

Pin	Signal name	I/O	Description
21	NET_STATUS / USB_BOOT	DO	Network status indication
75	NET_STATUS	DO	Network status indication

Table 3-15 Network Indication Status

Status	LED display status
No service	OFF
Searching for Network	Flashing
The module registers 4G network or module to register non-4G network for voice SMS and other services (Latched on to Network)	Constantly Bright



The LED network indicator reference design is as follows:

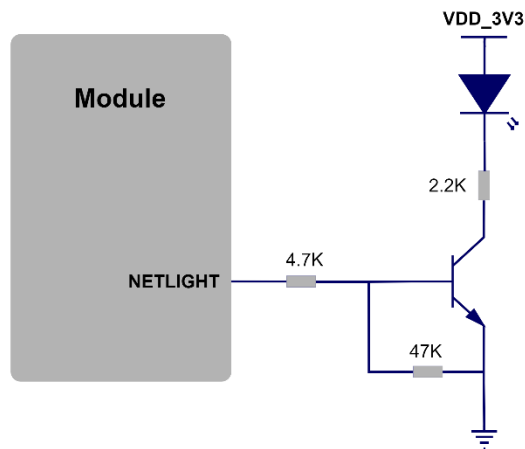


Figure 12 Net light circuit diagram

When the module enters flight mode, the RF function do not work and all AT commands related to RF functions will be inaccessible. This mode can be set by

- ✓ Software: **AT+CFUN=4**

Table 3-16 Network Indicator Pin Definition 2

Pin	Signal name	I/O	Description
19	AP-READY	-	Status Indicator
18	W_DISABLE	I	Wireless Functionality Disable

 **NOTE**

- The brightness of the network indicator can be adjusted by adjusting the current limiting resistor, which can be adjusted to a maximum of 40 mA.
- Remember to use only one among the pins 21 and 75. While using one, keep the other floating.



### 3.9.2 Module Status Indication

- ✓ The C16QS module provides a pin as a working status indicator for the module
- ✓ This pin can be used to connect to a GPIO or LED with pull-up
- ✓ It is used to indicate the power-on status of the module
- ✓ The drive current should be less than 0.8mA
- ✓ The STATUS pin will output a high level.

Table 3-17 Module Status Indicator Pin Definition

Pin	Signal name	I/O	Description	Remarks
20	STATUS	DO	Module power on status indication	External pull-up

The following figure shows the STATUS reference circuit design:

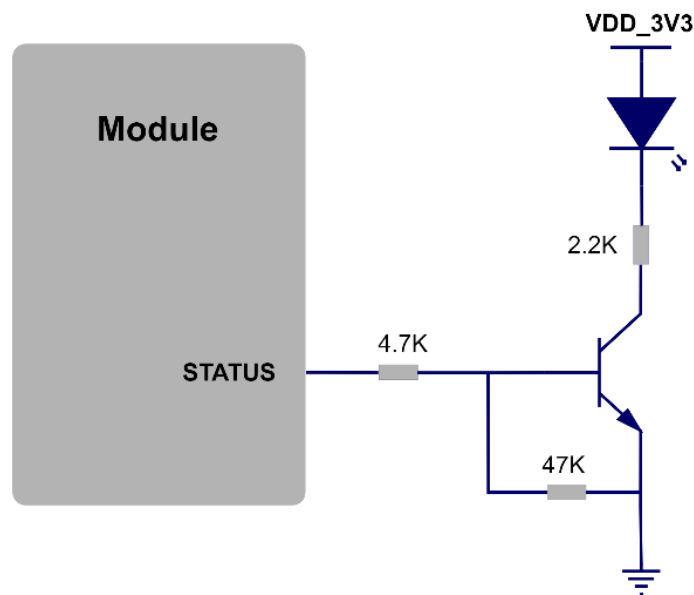


Figure 13 STATUS Pin Reference Circuit



## 3.10 I2S Interface

C16QS module provides a set of I2S bus interface which is used for connecting digital audio devices.

Table 3-19 I2S pin definition

No	Signal name	I/O	Description
7	I2S_DOUT	DO	Data Output
6	I2S_DIN	DI	Data Input
5	I2S_LRCK	DI	Word Clock or Left/Right clock
4	I2S_MCLK	DI	Master Clock
63	I2S_BLK	DI	Bit Clock

## 3.11 I2C Bus

The C16QS module provides a set of hardware bidirectional serial buses with an I2C interface of 1.8V level, a 5.0 Protocol interface, and a clock rate of 400 KHz.

Table 3-20 I2C pin definition

Pin No.	Signal name	I/O	Description	Parameter	Level value (V)		
					min	typical	max
40	I2C_SCL	DO	I2C bus clock output	VOH	1.3	1.8	1.9
				VOL	0		0.45
41	I2C_SDA	IO	I2C bus data input and output	VOH	1.3	1.8	1.9
				VOL	0		0.45
				VIH	1.3	1.8	1.9
				VIL	-0.3		0.6



The I2C reference circuit is connected as follows:

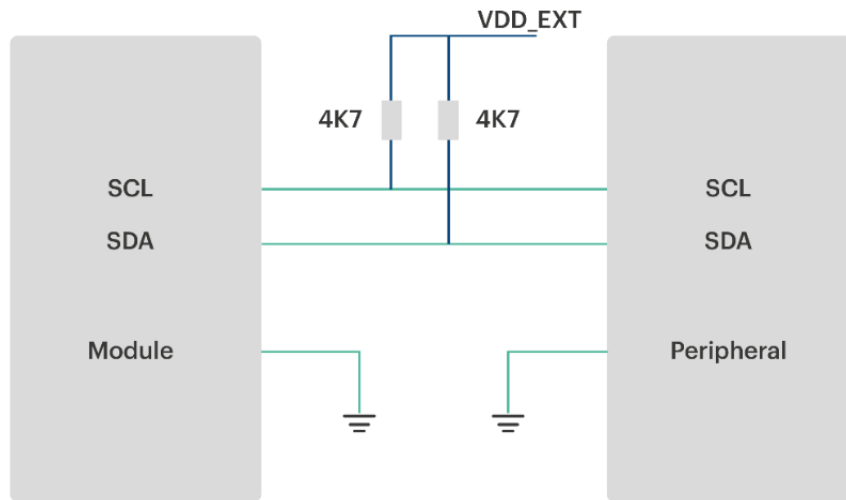


Figure 14 I2C interface reference circuit diagram

### 3.12 SWD Interface

C16QS module provides a 2-pin serial wire debug (SWD) interface which is an alternative to JTAG.

Table 3-21 SWDIO Pin Definitions

Pin No.	Pin name	IO	Definition
92	SWDIO	IO	Bidirectional information transfer pin
93	SWCLK	DI	Clock

### 3.13 ADC Interface

The C16QS provides two analog-to-digital converter interfaces to read the voltage value.

- ✓ The ADC interface input voltage cannot exceed VBAT
- ✓ It is recommended that the ADC pin be input with a voltage divider circuit



Table 3-22 ADC Pin Definitions

No.	Signal name	IO	Description
2	ADC1		Analog to digital converter interface 1
24	ADC0		Analog to digital converter interface 0

### 3.14 Antenna

The C16QS module provides two antenna interfaces, one main set antenna interface, which is responsible for the CAT .1bis signals of the transceiver module, and another GNSS antenna interface.

The GNSS antenna interface is L1.

The impedance of the antenna interfaces are 50 ohms.

Table 3-23 Antenna interface pin definition

Pin No.	Signal Name	IO	Description	Remarks
60	ANT_LTE	IO	Main antenna interface	50Ω characteristic impedance
49	ANT_GNSS	AI	GNSS L1 antenna interface	50Ω characteristic impedance

The pin-3 of the C16QS is the main set antenna interface.

To facilitate the debugging of the antenna, a  $\pi$ -type matching circuit needs to be added to the main board, and a 50-ohm impedance line is taken.

Recommended circuit is shown below :

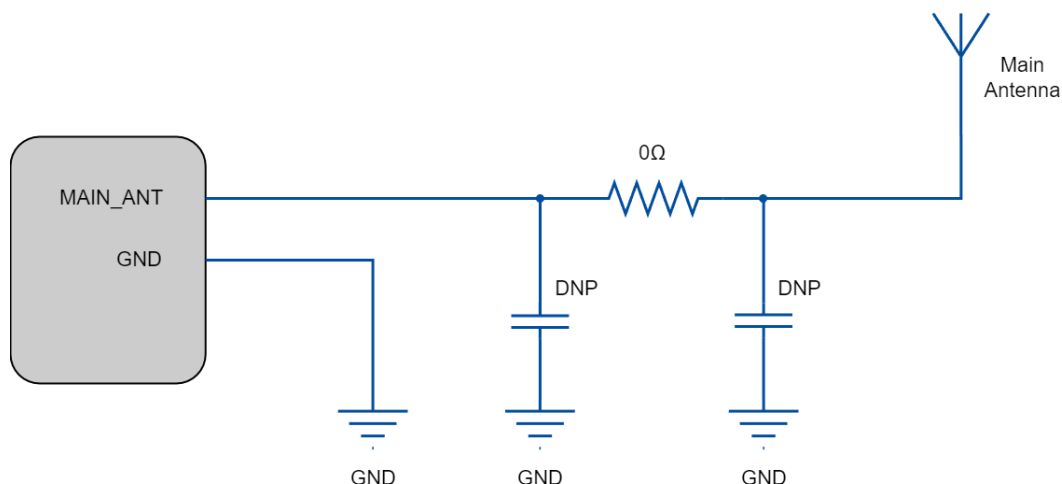


Figure 15 Main antenna matching circuit



The pin 33 of C16QS is the GNSS antenna interface.

The C16QS has a dedicated antenna L1, it supports GPS, GLONASS, BEIDOU, QZSS, Galileo and NAVIC.

SBAS Ranging support available

In order to facilitate antenna debugging, a  $\pi$ -type matching circuit needs to be added to the motherboard and a 50-ohm impedance line is used.

 NOTE

- The GNSS antenna needs to maintain a certain distance from the main antenna.
- The GNSS antenna has two antenna connection modes:  
Passive antenna mode and Active antenna mode. An external power supply is required while using an Active antenna, as the module cannot provide power to GNSS Active antenna.

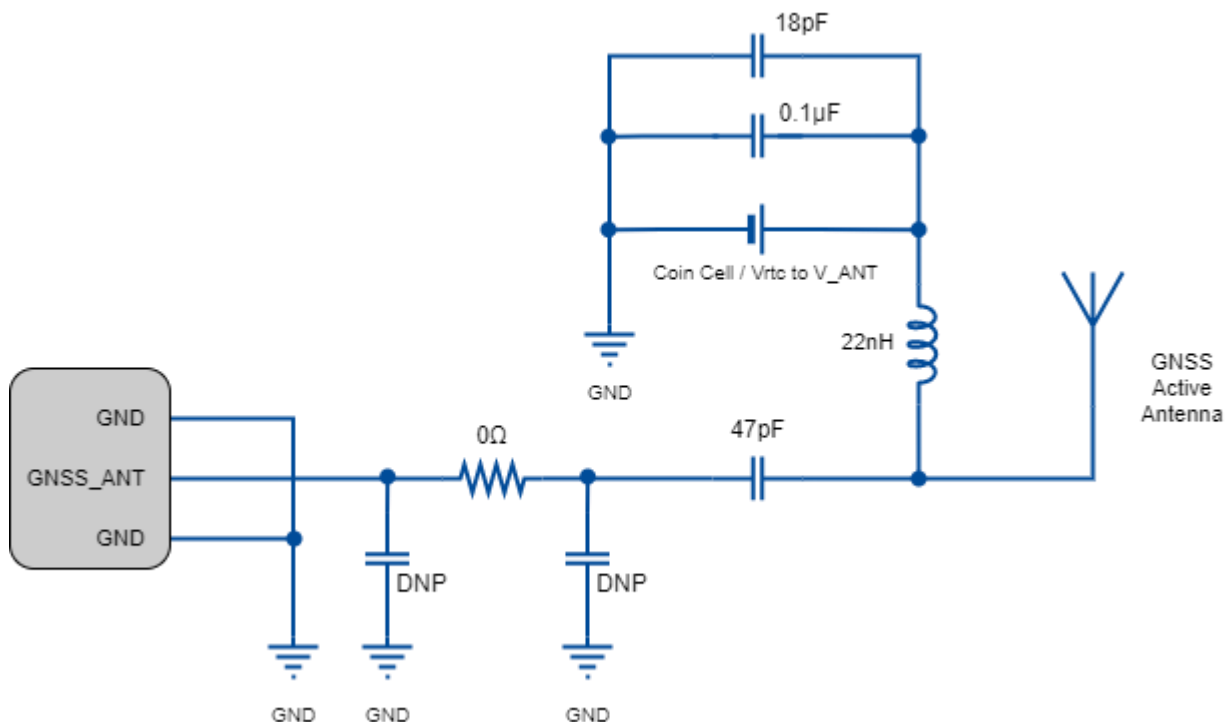


Figure 16 GNSS active antenna matching circuit



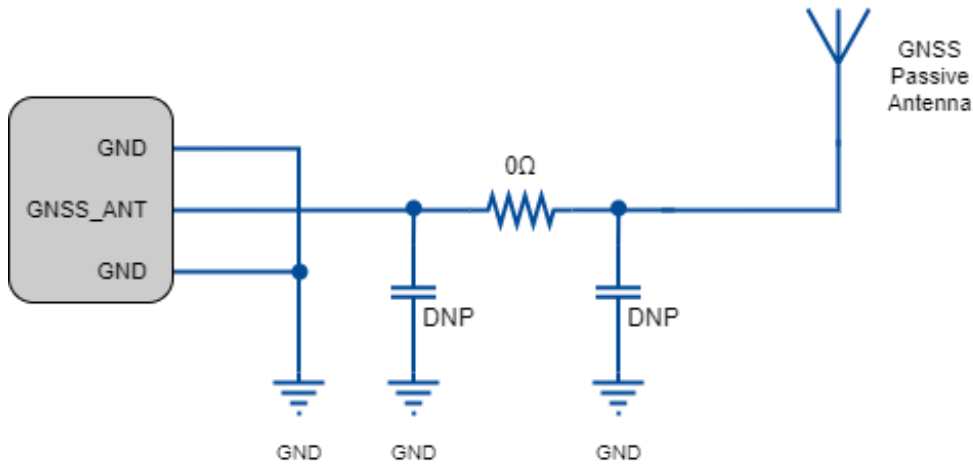


Figure 17 GNSS passive antenna matching circuit

 NOTE

- An external LDO can be selected to supply power according to the active antenna requirement.
- If the module is designed with a passive antenna, then the VDD circuit is not needed.
- The LTE\_MAIN antenna is distributed reasonably to improve the receiving sensitivity.
- In actual use, the antenna board can be debugged and optimized according to the user's circuit board.
- Antenna impedance traces need to be away from digital signal lines, power supplies and other interference signals.
- The antenna impedance traces need to be three-dimensionally packaged, and the ground holes are added on both sides of the trace to isolate.


### 3.14.1 RF Trace Reference

The main set of the C16QS module are extracted by pad. The antenna pad to the antenna feed point must use microstrip lines or other types of RF traces. The characteristic impedance of the signal line should be controlled at 50Ω.


The impedance of the RF signal line is determined by the material's dielectric constant, trace width (W), ground clearance (S), and reference ground plane height (H). Therefore, the RF trace requires an impedance simulation tool to calculate the impedance of the RF trace.





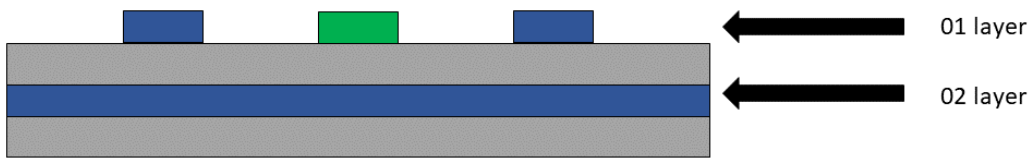

MODE 1 - Reference ground is the second layer PCB coplanar transmission line structure

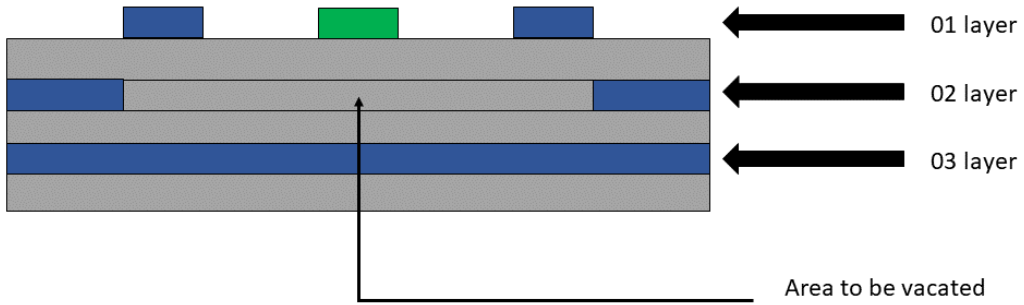

MODE 2 - Reference ground is the third layer PCB coplanar transmission line structure

Figure 18 Coplanar antenna

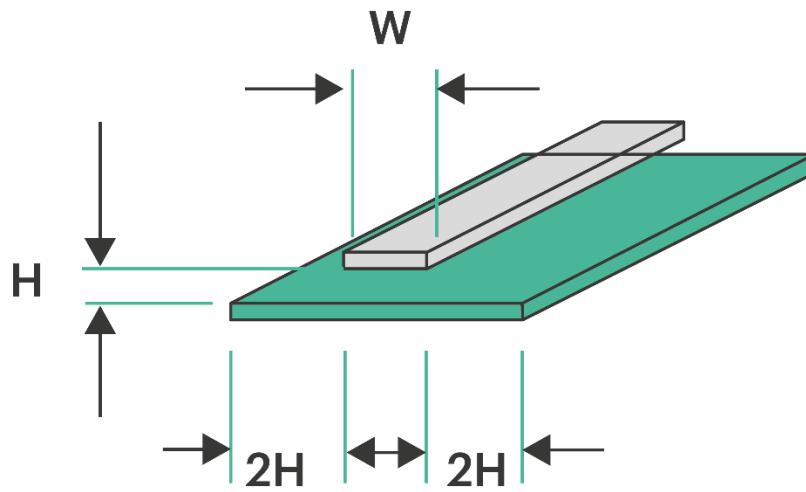


Figure 19 The complete structure of the two-layer PCB microstrip line



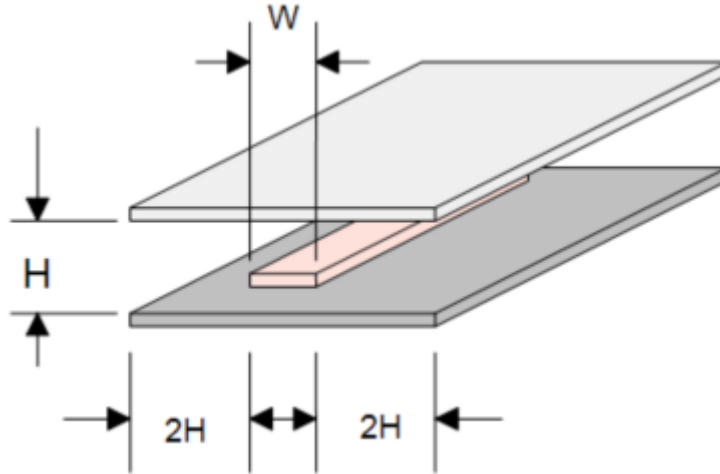


Figure 20 The complete structure of the multilayer PCB strip line

**NOTE**

- Since Coplanar antennas are having maximum noise immunity, it is preferred.

### 3.14.2 RF Connector Size

- ✓ If the RF connector is used, the antenna connector must use a coaxial connector with a 50-ohm characteristic impedance.
- ✓ Hirose's **U.FL-R-SMT** connector is recommended.

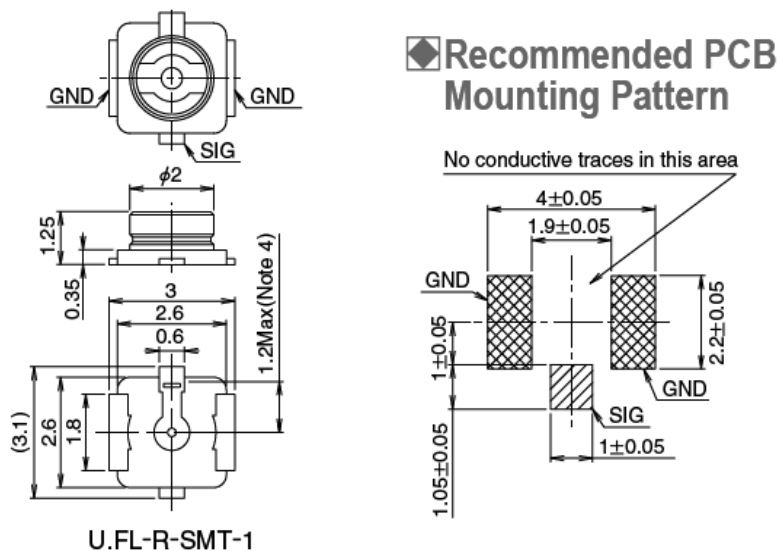


Figure 21 RF connector size chart



The RF connector plug for this connector is the U.FL-LP series from HRS.






Part No.	U.FL-LP-040	U.FL-LP-066	U.FL-LP(V)-040	U.FL-LP-062	U.FL-LP-088
					
Mated Height	2.5mm Max. (2.4mm Nom.)	2.5mm Max. (2.4mm Nom.)	2.0mm Max. (1.9mm Nom.)	2.4mm Max. (2.3mm Nom.)	2.4mm Max. (2.3mm Nom.)
Applicable cable	Dia. 0.81mm Coaxial cable	Dia. 1.13mm and Dia. 1.32mm Coaxial cable	Dia. 0.81mm Coaxial cable	Dia. 1mm Coaxial cable	Dia. 1.37mm Coaxial cable
Weight (mg)	53.7	59.1	34.8	45.5	71.7
RoHS	YES				

Figure 22 Antenna connector matching plug diagram

Table 3-24 Main parameters of the RF connector

Rated condition		Environmental conditions
Frequency Range	DC to 6 GHZ	-40°C to +85°C
Characteristic impedance	50 Ω	-40°C to +85°C

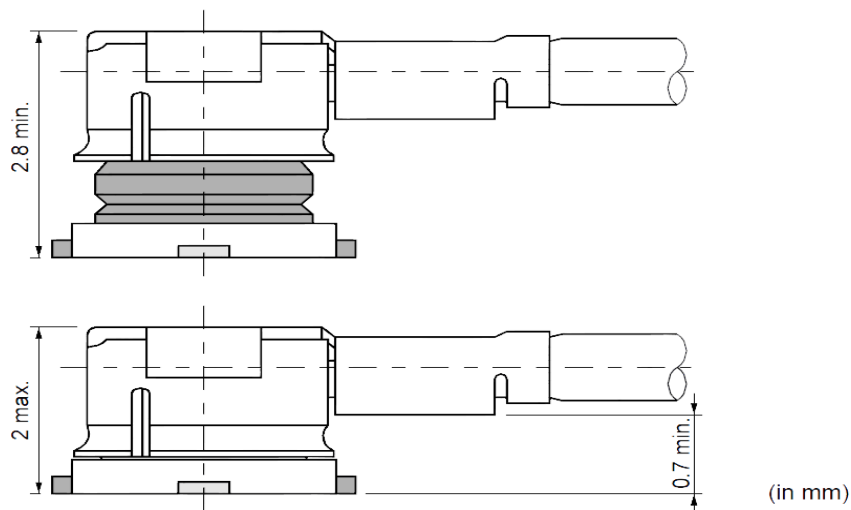


Figure 23 Matching coaxial RF line size



## 3.15 Control Interface

Table 3-25 Control interface pin definition

Pin No.	Signal name	I/O	Description
20	STATUS	O	Module status
18	FLIGHT_MODE	I	Module flight mode (W_DISABLE)

### STATUS:

This pin is used to get the status of the module.

### FLIGHT\_MODE:

This pin is used to disable RF transmission.

## 3.16 GNSS Interface

Multi – GNSS receiver:

- ✓ L1 multi-band GNSS receiver
- ✓ Multi-Constellation GPS/GLONASS/Galileo/Bei Dou/QZSS/NAVIC
- ✓ Support for **SBAS** Ranging, WAAS, EGNOS, MSAS and GAGAN
- ✓ Integrated 12 muti-tone active interference cancellers
- ✓ RTCM ready (RTCM v2.3 and v3.3)
- ✓ Indoor and Outdoor multi-path detection and compensation
- ✓ 132 tracking channels



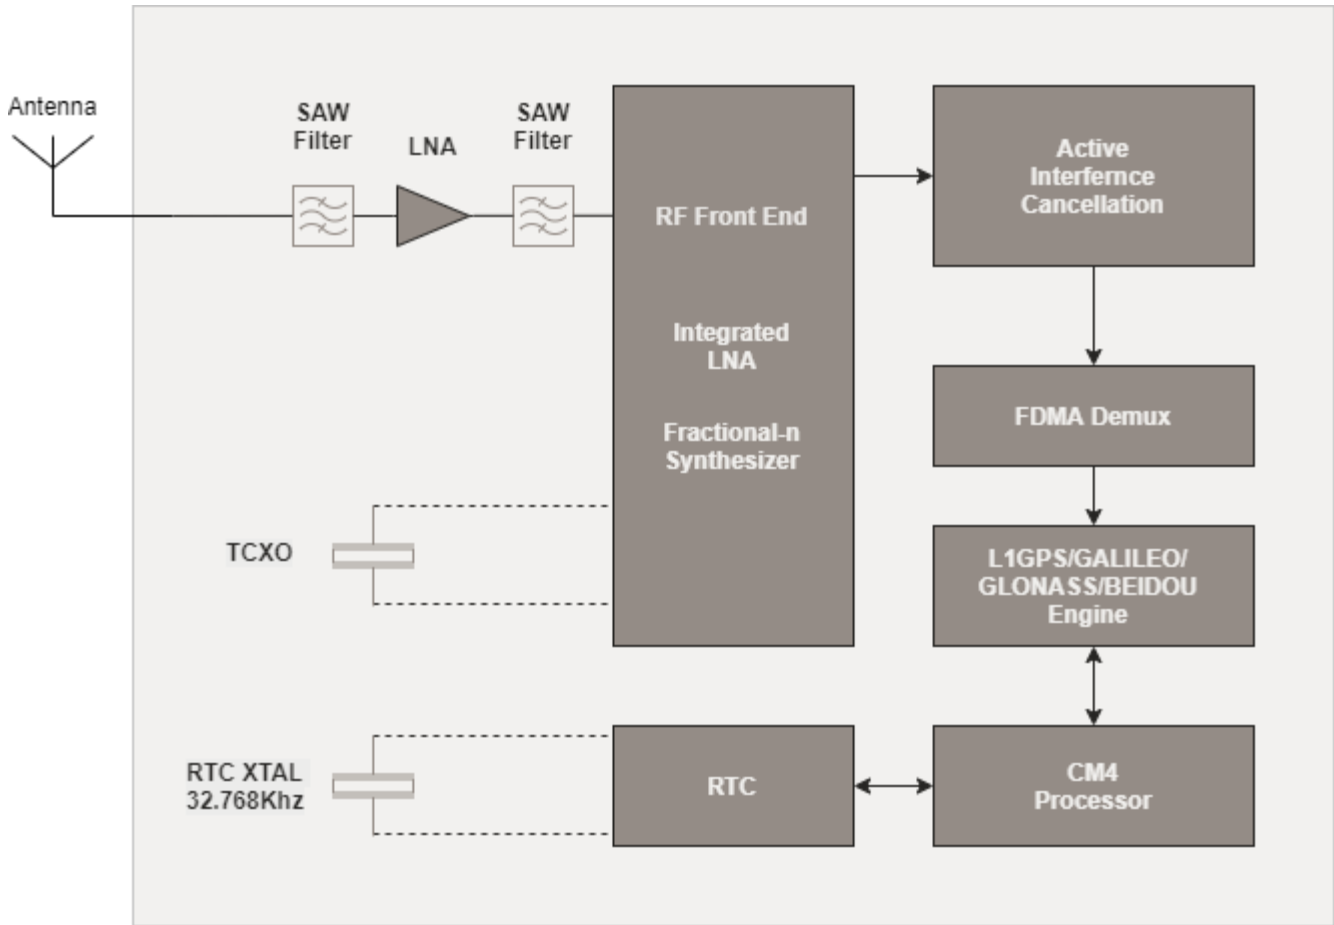


Figure 24 Multi GNSS receiver Block diagram

Table 3-26 GNSS interface pin definition

Pin No.	Signal name	I/O	Description
49	ANT_GNSS	AI	GNSS Antenna interface
99	GNSS_1PPS	O	One pulse per second signal
84	GNSS_TXD	O	GNSS UART Transmission
85	GNSS_VDD	I	GNSS Power supply
86	GNSS_EN	I	Hardware enable for GNSS
83	GNSS_RXD	I	GNSS UART Reception
98	GNSS_VRTC	PI	GNSS RTC Battery



## 1PPS:

Synchronized at rising edge, and the pulse width is 500ms. This pin must be low at start-up for normal operation. It has been pulled down internally with a 47KΩ resistor. If unused, keep this pin open.

## GNSS interface

GNSS\_TXD and GNSS\_RXD pins are used for fetching NMEA logs.

## GNSS RTC Battery

This pin is the power input of the RTC battery. The module can store the data if the GNSS\_VRTC pin is supplied with 1.8 voltage.



Figure 25 GNSS VRTC Input

## NOTE

- The recommended voltage rating of GNSS\_VDD is 3.3 V.
- To enable GNSS, the voltage level of GNSS\_EN should not go below 1.2V and should not exceed 1.8V.
- UART2 and GNSS UART are internally connected so while using GNSS ensure that UART 2 is kept as floating and vice versa.
- When GNSS is operating in independent mode, only GNSS\_VDD needs to be supplied; VBAT is not required.

As VBATT\_RF powers the entire RF of LTE and GNSS. GNSS\_VDD can power entire GNSS section

- Please refer the *C16QS GNSS Application note* for further information.

## 3.17 SPI Interface

Table 3-27 SPI interface pin definition

Pin No.	Signal name	I/O	Description
97	SPI_CS	DO	Slave select
95	SPI_MOSI	DI	Master output slave input
94	SPI_MISO	DI	Master input slave output
96	SPI_CLK	DO	Clock



# 4 Overall Technical Indicators

## 4.1 Chapter Overview

The C16QS module RF overall specifications include the following sections:

- ✓ Working frequency
- ✓ GNSS Performances
- ✓ Antenna requirements

## 4.2 Working Frequency

Table 4-1 RF frequency table

Frequency band	Uplink frequency	Downstream frequency	Mode
LTE B1	1920MHz-1980MHz	2110MHz-2170MHz	FDD
LTE B2	1850MHz-1910MHz	1930MHz-1990MHz	FDD
LTE B3	1710MHz-1785MHz	1805MHz-1880MHz	FDD
LTE B4	1710MHz-1755MHz	2110MHz-2155MHz	FDD
LTE B5	824MHz-849MHz	869MHz-894MHz	FDD
LTE B7	2500MHz - 2570MHz	2620MHz - 2690MHz	FDD
LTE B8	880MHz-915MHz	925MHz-960MHz	FDD
LTE B12	699MHz - 716 MHz	729 MHz - 746 MHz	FDD
LTE B13	777MHz - 787MHz	746MHz - 756MHz	FDD
LTE B18	815 MHz - 830 MHz	860 MHz - 875 MHz	FDD
LTE B19	830 MHz - 845 MHz	875 MHz - 890 MHz	FDD
LTE B20	832MHz- 862MHz	791MHz- 821MHz	FDD
LTE B26	814 MHz - 849 MHz	859 MHz - 894 MHz	FDD



LTE B28	703 MHz - 748 MHz	758 MHz - 803 MHz	FDD
LTE B66	1710 MHz - 1780 MHz	2110 MHz - 2200 MHz	FDD

## 4.3 GNSS Performances

C16QS Module GNSS performance parameters:

Table 4-2 GNSS performance parameters

Features	Description
Receiving Bands	<ul style="list-style-type: none"> <li>✓ GPS L1/ Galileo E1 C/A: 1575.42 Mhz</li> <li>✓ GLONASS L1 C/A: 1602.5625 MHz</li> <li>✓ BD2 B1 C/A: 1561.098 MHz</li> <li>✓ SBAS: WAAS, EGNOS, MSAS, GAGAN</li> <li>✓ NAVIC C/A: 1176.45 MHz</li> </ul>
Horizontal Positioning Accuracy:	< 2.0 m CEP50
Vertical Positioning accuracy	< 3.0 m CEP50
Velocity Accuracy:	Without Aid: < 0.01 m/s
TTFF@-130dBm	<ul style="list-style-type: none"> <li>✓ Cold Start &lt; 28s</li> <li>✓ Hot Start ≤ 1s</li> <li>✓ Reacquisition ≤ 1 s</li> </ul>
Sensitivity:	<ul style="list-style-type: none"> <li>✓ Cold Start: -147 dBm</li> <li>✓ Tracking: -160 dBm</li> <li>✓ Hot Start: -155 dBm</li> <li>✓ Reacquisition: -158 dBm</li> </ul>





## 4.4 Antenna Requirements

C16QS Module Antenna Design Requirements:

Table 4-3 Antenna indicator requirements

Frequency band	Standing wave ratio	Antenna gain	Effectiveness	TRP	TIS
B1 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B2 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B3 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B4 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B5 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B7 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B8 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B12 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B13 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B18 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B19 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B20 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B26 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B28 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88
B66 FDD	<2:1	> -2.5dbi	> 40%	>16.5	<-88



# 5 Interface Electrical Characteristics

## 5.1 Chapter Overview

- Working storage temperature
- Electrostatic property
- Reliability index
- Module IO level
- Power supply
- Power consumption characteristics

## 5.2 Working Storage Temperature

Table 5-1 C16QS module working storage temperature

Parameter	Minimum	Maximum
Normal operating temperature	-20°C	55°C
Storage temperature	-45°C	90°C

## 5.3 Electrostatic Property

There is no overvoltage protection inside the C16QS module.

The ESD protection is required when the module is used to ensure product quality.

ESD design recommendations:

- ✓ The USB port needs to add TVS on VDD, D+, D- for protection, and the TVS parasitic capacitance on D+/D- is <2pF
- ✓ The module's USIM card external pin needs to be protected by TVS, and the parasitic capacitance requirement is <10pF



- ✓ The PCB layout of the protective device should be as close as possible to the "V" line to avoid the "T" line
- ✓ The ground plane around the module guarantees integrity and should not be split
- ✓ ESD control of the surrounding environment and operators is required during module production, assembly and laboratory testing

Table 5-2 C16QS ESD Features

Test port	Contact discharge	Air discharge	Unit
USB interface	±4	±8	KV
USIM interface	±4	±8	KV
VBAT power supply	±4	±8	KV

## 5.4 Module IO Level

The C16QS module IO levels are as follows:

Table 5-4 Electrical Characteristics of C16QS module

Parameter	Description	Minimum	Maximum
VIH	High level input voltage	0.65* VDD_EXT	VDD_EXT+0.3V
VIL	Low level input voltage	-	0.35*VDD_EXT
VOH	High level output voltage	VDD_EXT-0.45V	VDD_EXT
VOL	Low level output voltage	0	0.45V



## 5.5 Power Supply

The C16QS module input power requirements are as follows:

Table 5-5 C16QS module Operating Voltage

Parameter	Minimum value	Typical value	Maximum value
Input Voltage	3.4V	3.7V	4.2V

The power-on time of any interface of the module must not be earlier than the boot time of the module, otherwise the module may be abnormal or damaged.

## 5.6 Power Consumption Characteristics

Table 5-6 LTE power consumption

Mode	Type/band	Rx CINR @ 80dBm (dB)	Sensitivity (dBm)	Current consumption @ 23dBm and @3.7 V			
				Typical	Tx Idle	Peak Tx @ Centre frequency	Unit
CAT 1.bis E.A. Bands (GNSS off)	Band1	15	-97.97	70	18	470	mA
	Band 3	11	-95.47	66	16	420	mA
	Band 5	15	-96.22	60	13	590	mA
	Band 7	TBD	TBD	TBD	TBD	TBD	mA
	Band 8	15	-95.97	62	11	530	mA
	Band 20	14	-94.47	58	15	620	mA
CAT 1.bis N.A. Bands (GNSS off)	Band 2	18	-96.08	68	16	410	mA
	Band 4	18	-98.52	66	15	480	mA
	Band 5	14	-94.72	60	13	560	mA
	Band 12	15	-95.31	59	11	620	mA
	Band 13	15	-95.44	59	12	620	mA



	Band 66	18	-98.25	71	18	430	mA
CAT 1.bis A.N. Bands (GNSS off)	Band 1	TBD	TBD	TBD	TBD	TBD	TBD
	Band 3	TBD	TBD	TBD	TBD	TBD	TBD
	Band 5	TBD	TBD	TBD	TBD	TBD	TBD
	Band 8	TBD	TBD	TBD	TBD	TBD	TBD
	Band 18	TBD	TBD	TBD	TBD	TBD	TBD
	Band 19	TBD	TBD	TBD	TBD	TBD	TBD
	Band 26	TBD	TBD	TBD	TBD	TBD	TBD
	Band 28	TBD	TBD	TBD	TBD	TBD	TBD
CAT 1.bis L.A. Bands (GNSS off)	Band 2	TBD	TBD	TBD	TBD	TBD	TBD
	Band 3	TBD	TBD	TBD	TBD	TBD	TBD
	Band 4	TBD	TBD	TBD	TBD	TBD	TBD
	Band 7	TBD	TBD	TBD	TBD	TBD	TBD
	Band 8	TBD	TBD	TBD	TBD	TBD	TBD
CAT 1.bis W.W. Bands (GNSS off)	Band 1	TBD	TBD	TBD	TBD	TBD	TBD
	Band 2	TBD	TBD	TBD	TBD	TBD	TBD
	Band 3	TBD	TBD	TBD	TBD	TBD	TBD
	Band 4	TBD	TBD	TBD	TBD	TBD	TBD
	Band 5	TBD	TBD	TBD	TBD	TBD	TBD
	Band 8	TBD	TBD	TBD	TBD	TBD	TBD
	Band 12	TBD	TBD	TBD	TBD	TBD	TBD
	Band 18	TBD	TBD	TBD	TBD	TBD	TBD
	Band 19	TBD	TBD	TBD	TBD	TBD	TBD
	Band 20	TBD	TBD	TBD	TBD	TBD	TBD
	Band 26	TBD	TBD	TBD	TBD	TBD	TBD



	Band 28	TBD	TBD	TBD	TBD	TBD	TBD
	Band 66	TBD	TBD	TBD	TBD	TBD	TBD
GNSS	Powering			50			mA
	Tracking			60			mA
	Fix			60			mA
Power Saving Mode				TBD			μA



# 6 Structural and Mechanical Properties

## 6.1 Chapter Overview

- ✓ Module structural image
- ✓ Module mechanical size

## 6.2 Module Structural Image

The figure below shows the top and bottom view of the module.

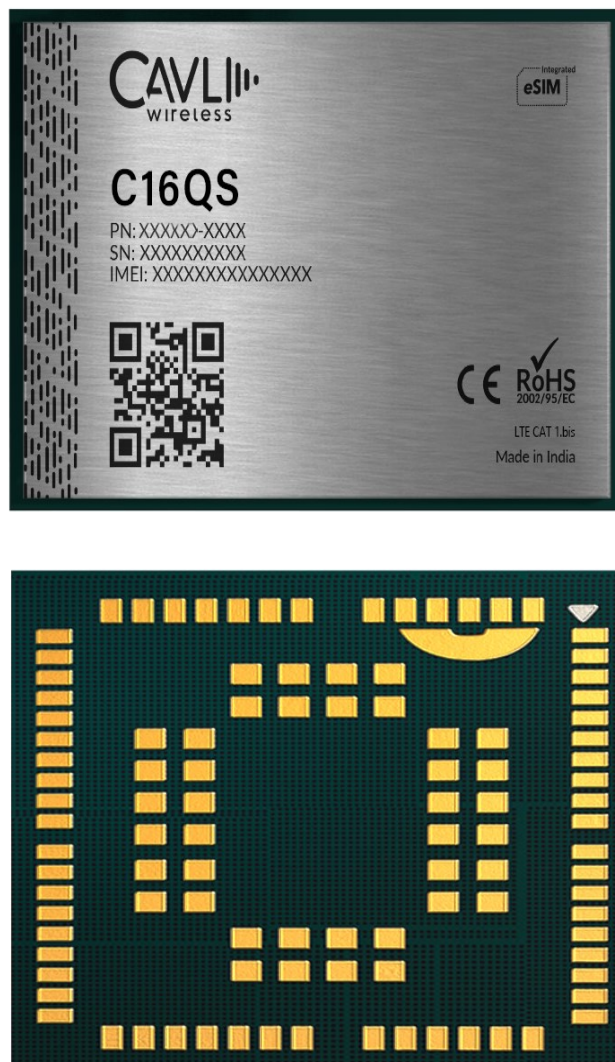


Figure 26 Top view and bottom view of the module



## 6.2 C16QS Module Mechanical Size

The figure below shows the bottom view size of the module:

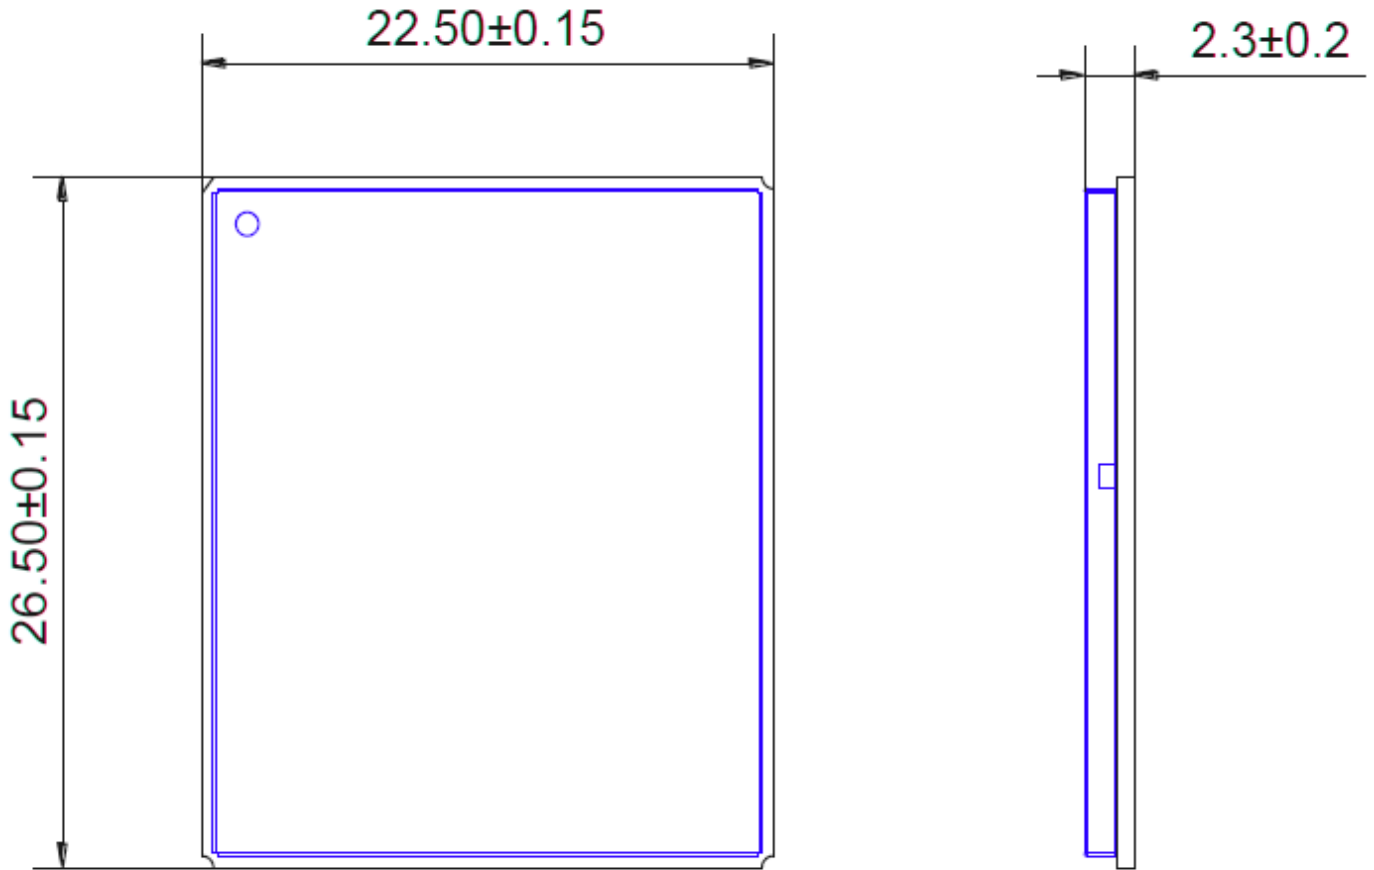


Figure 27 Front view and side view of the module (unit: mm)





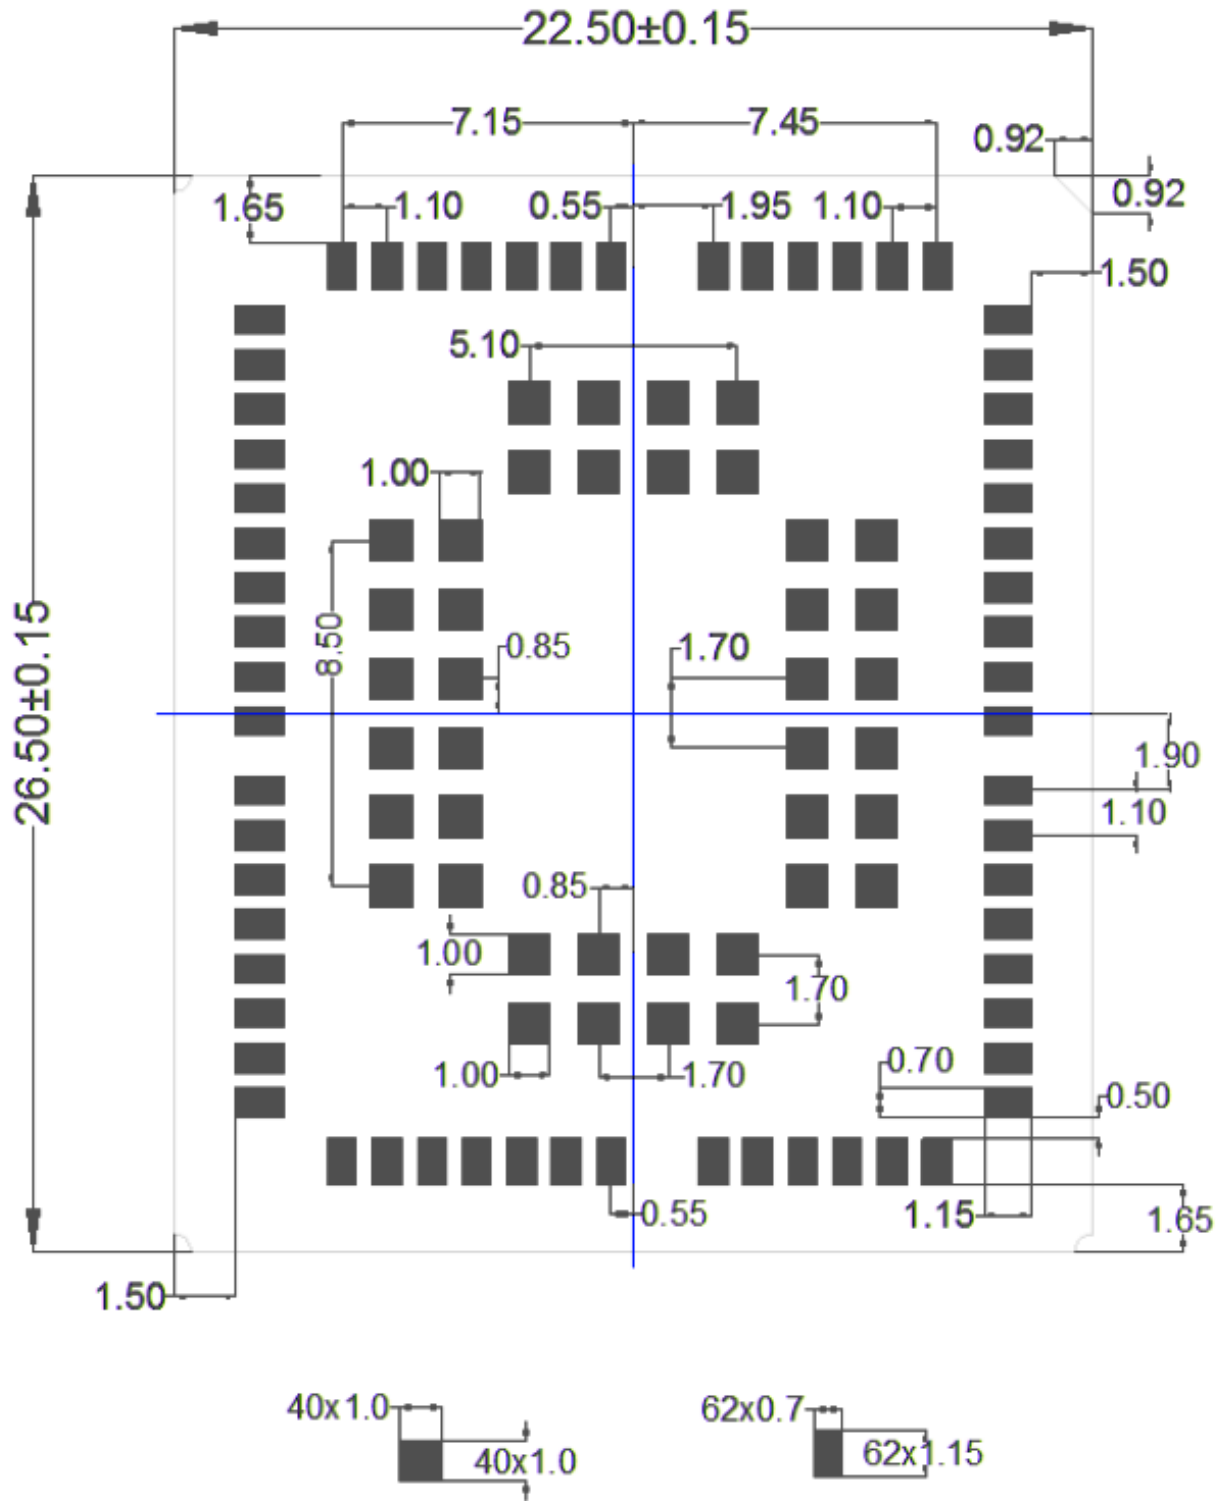


Figure 28 Bottom view of the module (unit: mm)



Module recommended footprint:

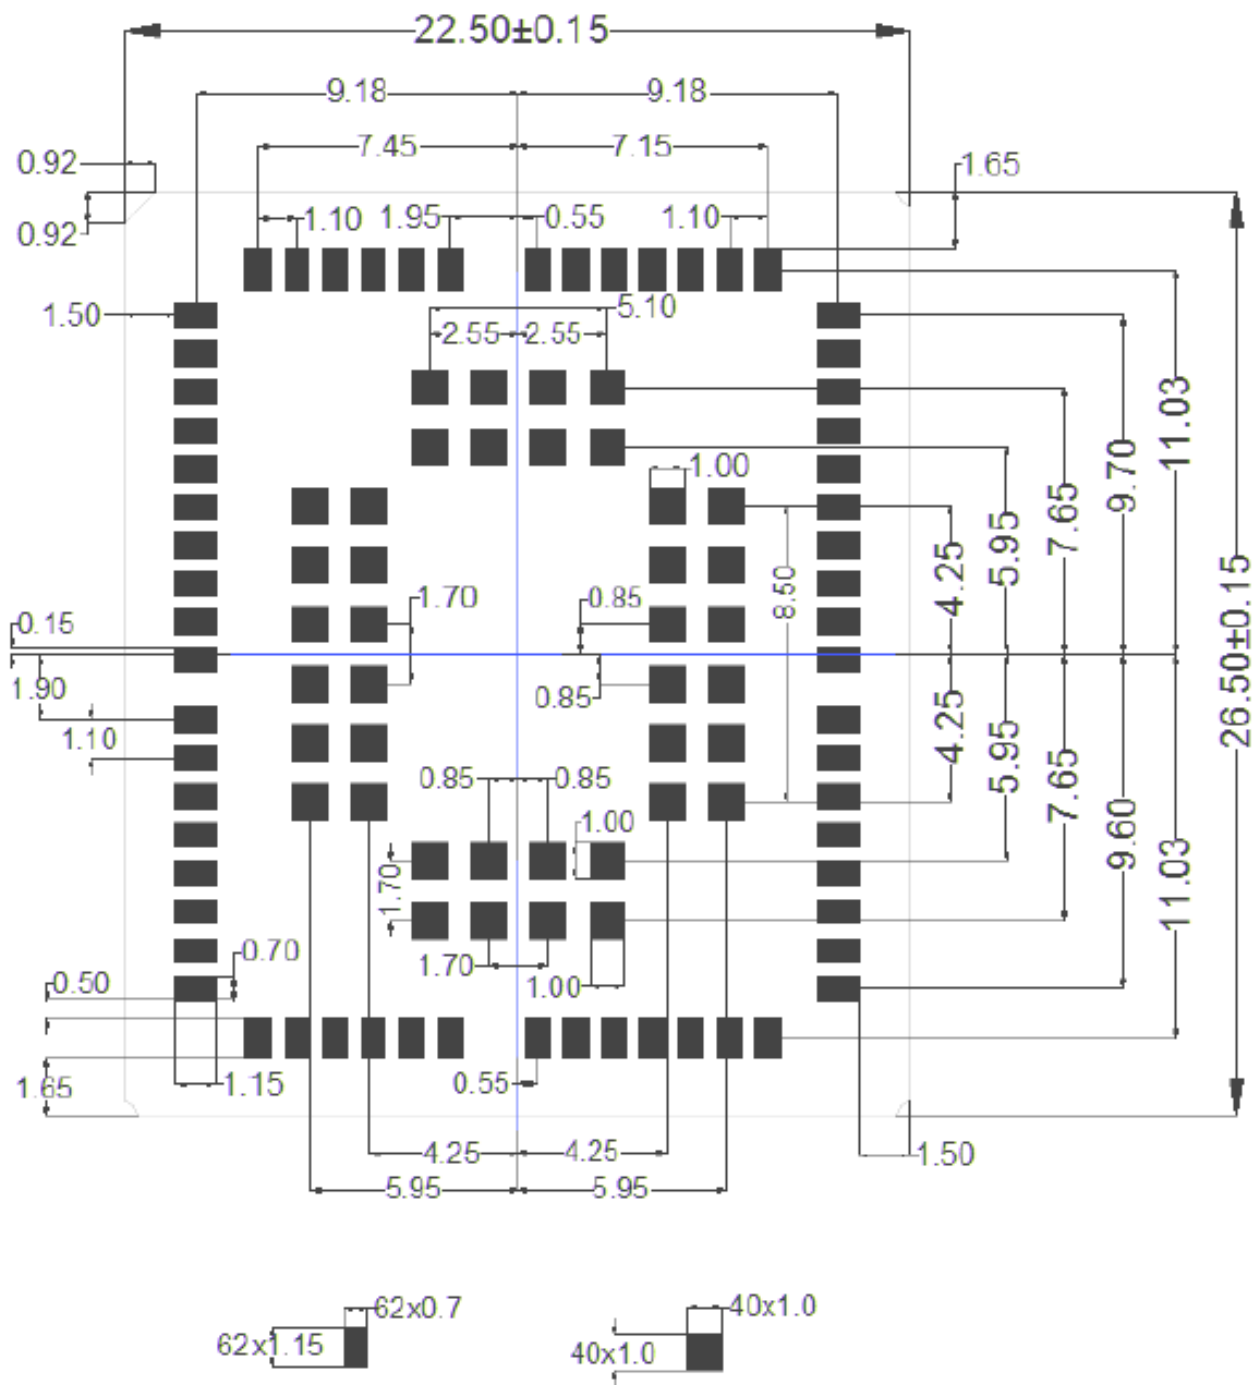


Figure 29 Recommended Footprint (Top View) (unit: mm)



# 7 Ordering Information

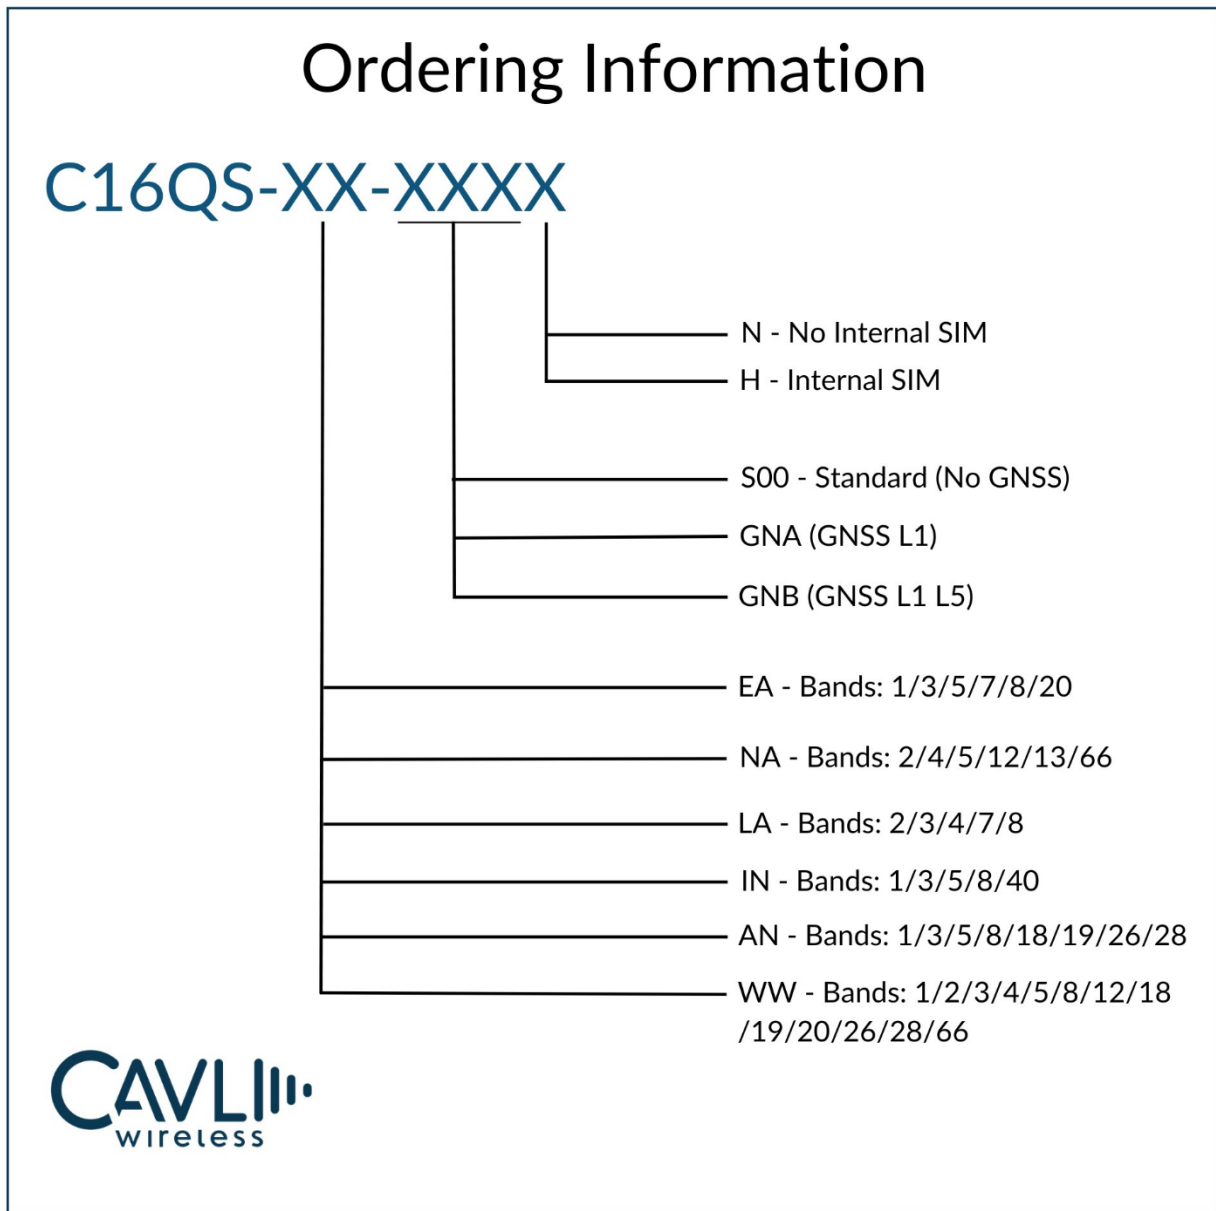


Figure 30 Ordering Information



Table 7-1 Ordering Information

Part Number	Package Type	Tape width	Tolerance	SPQ
C16QS-EA-S00N	Tape & Reel	44mm	0.2 mm	500
C16QS-EA-S00H	Tape & Reel	44mm	0.2 mm	500
C16QS-EA-GNAN	Tape & Reel	44mm	0.2 mm	500
C16QS-EA-GNAH	Tape & Reel	44mm	0.2 mm	500
C16QS-NA-S00N	Tape & Reel	44mm	0.2 mm	500
C16QS-NA-S00H	Tape & Reel	44mm	0.2 mm	500
C16QS-NA-GNAN	Tape & Reel	44mm	0.2 mm	500
C16QS-NA-GNAH	Tape & Reel	44mm	0.2 mm	500
C16QS-AN-S00N	Tape & Reel	44mm	0.2 mm	500
C16QS-AN-S00H	Tape & Reel	44mm	0.2 mm	500
C16QS-AN-GNAN	Tape & Reel	44mm	0.2 mm	500
C16QS-AN-GNAH	Tape & Reel	44mm	0.2 mm	500
C16QS-LA-S00N	Tape & Reel	44mm	0.2 mm	500
C16QS-LA-S00H	Tape & Reel	44mm	0.2 mm	500
C16QS-LA-GNAN	Tape & Reel	44mm	0.2 mm	500
C16QS-LA-GNAH	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-S00N	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-S00H	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-GNAN	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-GNAH	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-GNBN	Tape & Reel	44mm	0.2 mm	500
C16QS-WW-GNBH	Tape & Reel	44mm	0.2 mm	500



# 8 Packaging and Production

## 8.1 Chapter Overview

- ✓ Module packaging and storage
- ✓ Production welding

## 8.2 Module Packaging and Storage

The C16QS module is packaged in a tape reel with 500 pcs per reel, shipped as a tape reel sealed bag.

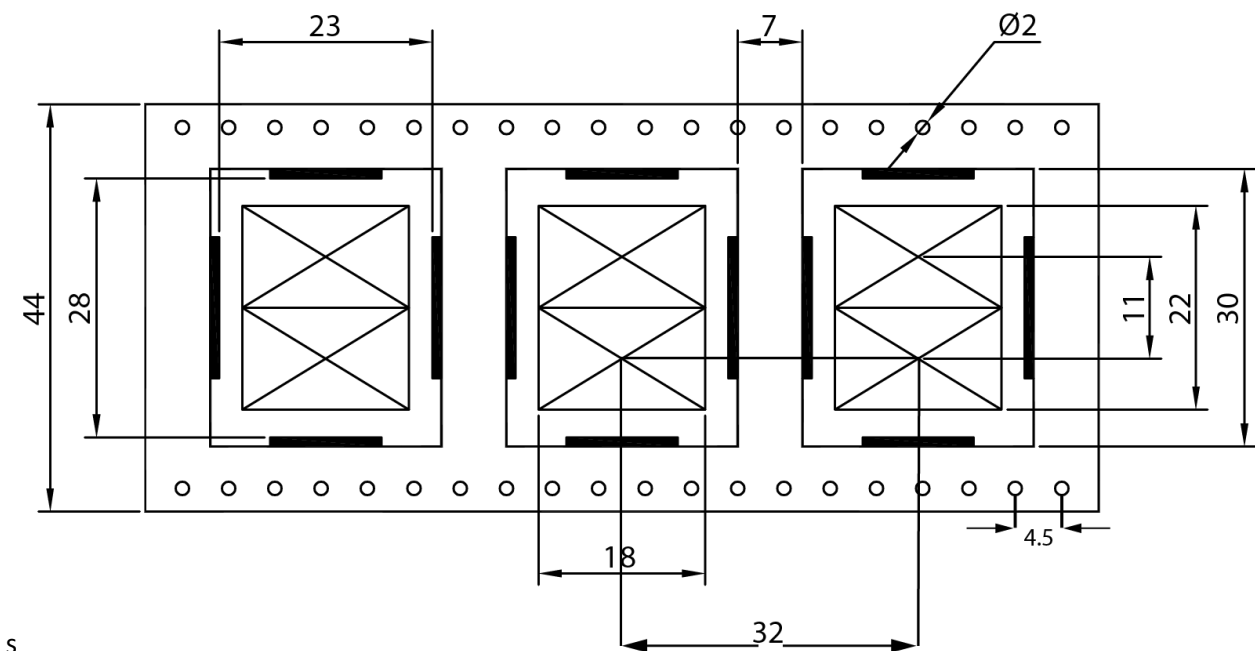


Figure 31 C16QS Tape Measurements (in mm)



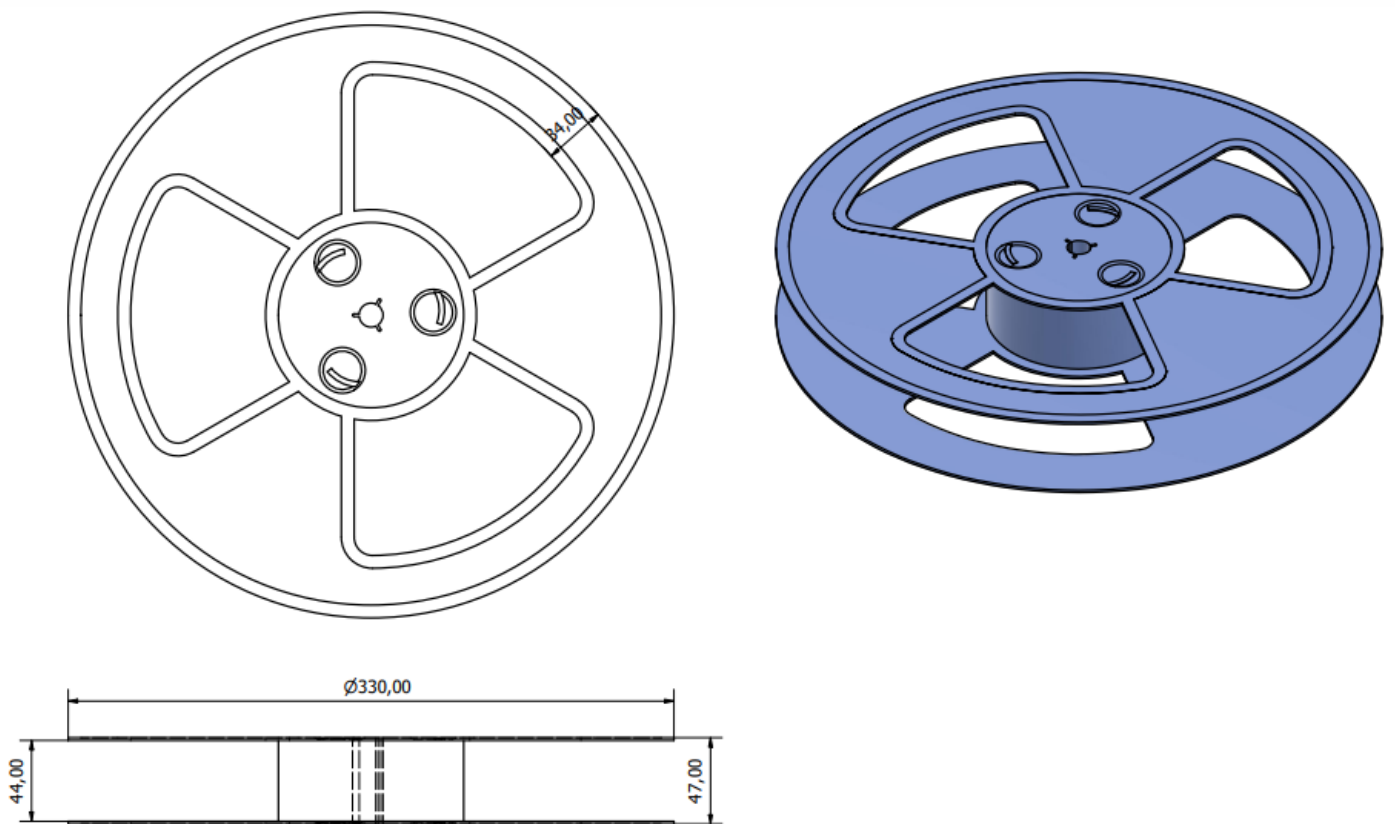


Figure 32 Reel Dimensions of C16QS (in mm)

The storage of the C16QS module is subject to the following conditions:

- ✓ The module has a moisture sensitivity rating of 3.
- ✓ When the ambient temperature is greater than 40 degrees Celsius and the air humidity is less than 90%, the module can be stored in a vacuum sealed bag for 12 months.
- ✓ When the vacuum sealed bag is opened, if the ambient temperature of the module is lower than 30 degrees Celsius and the air humidity is less than 60%, the factory can complete the patch within 72 hours, and the module can directly perform reflow soldering or other high temperature process.
- ✓ If the module is in other conditions, it needs to be baked before the patch.
- ✓ If the module needs to be baked, remove the module and bake for 48 hours at 125 degrees Celsius (allowing fluctuations of up to 5 degrees Celsius).



### 8.3 Production Welding

The C16QS module is packaged in an anti-static tray. The SMT wire body needs to be equipped with a Tray module. It is recommended to use a reflow oven above 7 temperature zones.

- ✓ To ensure the quality of the module paste, the thickness of the stencil corresponding to the pad portion of the C16QSmodule is recommended to be 0.18 mm.
- ✓ The recommended reflow temperature is 235~245oC, which cannot exceed 260oC.
- ✓ When the PCB is laid out on both sides, the LGA module layout must be machined on the 2nd side. Avoid module falling parts, welding and welding, and poor internal welding of the module caused by the gravity of the module.

The recommended furnace temperature curve is shown below:

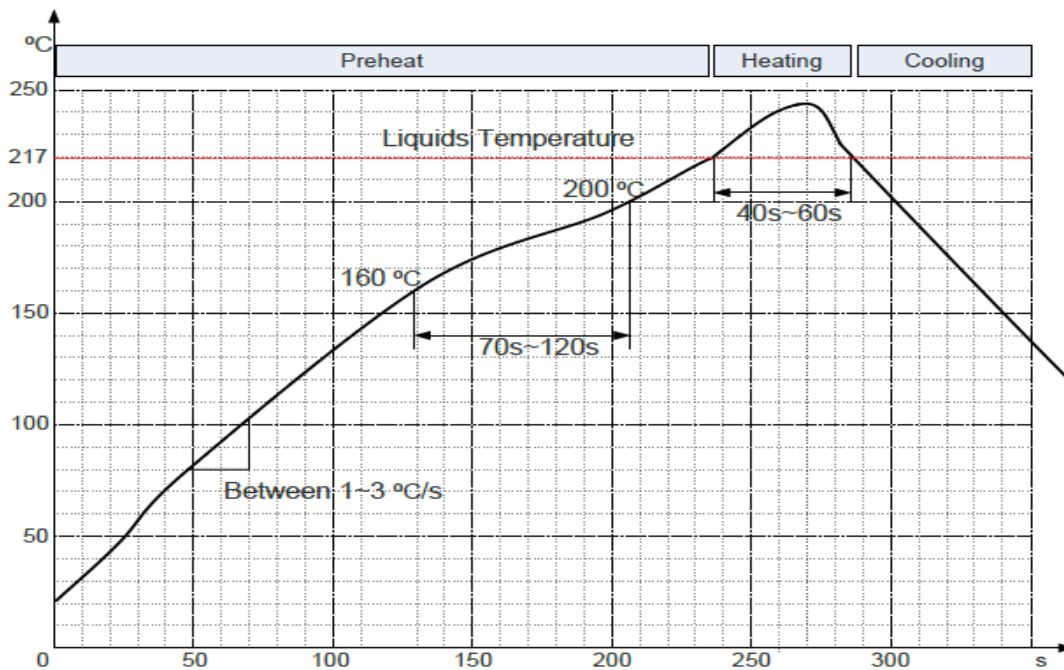


Figure 33 Reflow soldering temperature graph



Table 8-1 Reflow Process Parameter Table

Warm zone	Time	Key parameter
Preheating zone (4°C~ 165°C)		Heating rate: 1°C/ s ~ 3°C / s
Temperature zone (160°C~210°C)	(t1~t2) : 70s~120s	
Recirculation zone (> 217 °C)	(t3~t4) : 40s~60s	Peak temperature: 235°C~ 245 °C
Cooling zone		Cooling rate: 2°C/s ≤ Slope ≤ 5°C/s





# 9 Warnings

## 9.1 CE EU Conformity Statement

HEREBY, CAVLI INC DECLARES THAT THE EQUIPMENT TYPE LTE MODEM, MODEL C16QS IS IN COMPLIANCE WITH DIRECTIVE 2014/53/EU

MANUFACTURER ADDRESS: 99 SOUTH ALMADEN BLVD., SUITE 600, SAN JOSE, CA 95113 UNITED STATES.

THE FULL TEXT OF THE EU DECLARATION OF CONFORMITY IS AVAILABLE AT THE FOLLOWING INTERNET ADDRESS:

<https://www.cavliwireless.com/c-series/c16qs.html>

## 9.2 NCC Caution

For C16QS-AN

減少電磁波影響，請妥適使用

## 9.3 IC Information

For C16QS-NA

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference
- (2) this device must accept any interference including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s). L'opération est soumise aux deux conditions suivantes:

- (1) cet appareil ne peut causer d'interférences, et
- (2) cet appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de l'appareil

The end product must be labeled to display the industry Canada certificate number of the module.

Contains transmitter module IC: 3113-C16QSNA

Le dispositif d'accueil doivent être étiquetés pour afficher le numéro de certification d'Industrie Canada du module.

Contient module émetteur IC: 3113-C16QSNA



## Information for OEM Manager

This device is intended only for OEM integrators under the following conditions

- (1) The antenna must be installed such that 20cm is maintained between the antenna and the users  
and
- (2) The transmitter module may not be co-located with any other transmitter or antenna

## End product labelling

The label for end product must include “Contains IC: IC:3113-C16QSNA

“CAUTION: Exposure to Radio frequency Radiation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20cm between the radiator and your body. This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users.”

The Host Marketing Name (HMN) must be indicated at any location on the exterior of the host product or product packaging or product literature, which shall be available with the host product or online.

This radio transmitter [ IC: IC: 3113-C16QSNA] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Frequency Range	Manufacturer	Peak Gain	Impedance	Antenna Gain
FDD LTE Band 2	Cavli Inc	2.5 dbi	50 Ω	External
FDD LTE Band 5		2.5 dbi	50 Ω	External
FDD LTE Band 12		2.5 dbi	50 Ω	External
FDD LTE Band 13		2.5 dbi	50 Ω	External
FDD LTE Band 66		2.5 dbi	50 Ω	External

## 9.4 FCC Warnings

### 9.4.1 FCC Modular Approval Information Examples for Manual

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



 NOTE

- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.
- These limits are designed to provide reasonable protection against harmful interference in a residential installation.
- This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
- If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
  - Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio/TV technician for help.

## 9.4.2 FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## 9.4.3 OEM Integration Instructions

This device is intended only for OEM integrators under the following conditions:

The module must be installed in the host equipment such that 20 cm is maintained between the antenna and users, and the transmitter module may not be co-located with any other transmitter or antenna. The module shall be only used with the internal on-board antenna that has been originally tested and certified with this module. External antennas are not supported. As long as these 3 conditions above are met, further transmitter test will not be required.

However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.). The end-product may need Verification testing, Declaration of Conformity testing, a Permissive Class II Change or new Certification. Please involve a FCC certification specialist in order to determine what will be exactly applicable for the end-product.



## 9.4.4 Validity of using the module certification

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. In such cases, please involve a FCC certification specialist in order to determine if a Permissive Class II Change or new Certification is required.

## 9.4.5 Upgrade Firmware

The software provided for firmware upgrade will not be capable to affect any RF parameters as certified for the FCC for this module, in order to prevent compliance issues.

## 9.4.6 End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID : xxxxxxxxxx".

## 9.4.7 Information that must be placed in the end user manual

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

**CAUTION:** Exposure to Radio Frequency Radiation.

Antenna shall be mounted in such a manner to minimize the potential for human contact during normal operation. The antenna should not be contacted during operation to avoid the possibility of exceeding the FCC radio frequency exposure limit.

## 9.4.8 Requirement per KDB996369 D03

### 9.4.8.1 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.<sup>3</sup>

Explanation: This module meets the requirements of FCC part 15C(15.247). part 15E(15.407), part 22, part 24, part 27, part 90.

### 9.4.8.2 Summarize the specific operational use conditions

Describe use conditions that are applicable to the modular transmitter, including for example any limits on antennas, etc. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, then this information must be in the instructions. If the use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.



**Explanation:** The EUT needs an external Antenna.

## 9.4.8.3 Limited module procedures

If a modular transmitter is approved as a “limited module,” then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval.

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of the product into which the modular transmitter will be installed will be maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

**Explanation:** The module is not a limited module.

## 9.4.8.4 Trace Antenna designs

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects:

layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

**Explanation:** The EUT needs an external Antenna.



### 9.4.8.5 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

**Explanation:** This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, this equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: xxxxxxxxxx".

### 9.4.8.6 Antennas

A list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an "omni-directional antenna" is not considered to be a specific "antenna type"))).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

**Explanation:** The EUT needs an external Antenna.

### 9.4.8.7 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating "Contains FCC ID" with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

**Explanation:** The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: xxxxxxxxxxxxxx"

### 9.4.8.8 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.



The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulate or characterizes a connection by enabling a transmitter. This can greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.

**Explanation:** Top band can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

#### 9.4.8.9 Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

**Explanation:** The module without unintentional-radiator digital circuitry, so the module does not require an evaluation by FCC Part 15 Subpart B. The host should be evaluated by the FCC Subpart B.



# 10 Appendix

## 10.1 Chapter Overview

- ✓ Abbreviations
- ✓ Safety and precautions

## 10.2 Abbreviations

Table 9-1 Abbreviations

Abbreviations	Full name
3GPP	Third Generation Partnership Project
AP	Access Point
AMR	Adaptive Multi-rate
BER	Bit Error Rate
CCC	China Compulsory Certification
CDMA	Code Division Multiple Access
CE	European Conformity
CSD	Circuit Switched Data
CTS	Clear to Send
DC	Direct Current
DTR	Data Terminal Ready
DL	Down Link
DTE	Data Terminal Equipment
DRX	Discontinuous Reception





EDGE	Enhanced Data Rate for GSM Evolution
EU	European Union
EMC	Electromagnetic Compatibility
ESD	Electrostatic Discharge
FCC	Federal Communications Commission
GPRS	General Packet Radio Service
GSM	Global System for Mobile Communication
HSDPA	High-Speed Downlink Packet Access
HSPA	Enhanced High Speed Packet Access
HSUPA	High Speed Up-link Packet Access
IMEI	International Mobile Equipment Identity
LED	Light-Emitting Diode
LTE	Long Term Evolution
NC	Not Connected
PCB	Printed Circuit Board
PCM	Pulse Code Modulation
PDU	Protocol Data Unit
PMU	Power Management Unit
PPP	Point-to-point protocol
QPSK	Quadrature Phase Shift Keying
RF	Radio Frequency
RoHS	Restriction of the Use of Certain Hazardous Substances
SMS	Short Message Service
TIS	Total Isotropic Sensitivity
TVS	Transient Voltage Suppressor



TX	Transmitting Direction
UART	Universal Asynchronous Receiver-Transmitter
UMTS	Universal Mobile Telecommunications System
USIM	Universal Subscriber Identity Module
USSD	Unstructured Supplementary Service Data
VSWR	Voltage Standing Wave Ratio
WCDMA	Wideband Code Division Multiple Access
WWAN	Wireless Wide Area Network

## 10.3 Safety and Precautions

In order to use the wireless device safely, the terminal device informs the user of the relevant safety information:

- ✓ **Interference:** When the use of wireless devices is prohibited or the use of the device may cause interference and security of the electronic device, turn off the wireless device. Because the terminal will send and receive RF signals when it is powered on. It can interfere with TV, radio, computer or other electrical equipment.
- ✓ **Medical equipment:** In medical and health care facilities where the use of wireless devices is prohibited in the express text, please follow the regulations of the site and turn off the device. Some wireless devices may interfere with the medical device, causing the medical device to malfunction or cause errors. If interference occurs, turn off the wireless device and consult a physician.
- ✓ **Flammable and explosive areas:** In flammable and explosive areas, please turn off your wireless device and follow the relevant label instructions to avoid an explosion or fire. For example; gas stations, fuel zones, chemical products areas, chemical transportation and storage facilities, areas with explosion hazard signs, areas with “turn off radio equipment” signs, etc.
- ✓ **Traffic Safety:** Please comply with local laws or regulations in your country or region regarding the use of wireless devices when driving a vehicle.
- ✓ **Aviation Safety:** When flying, please follow the airline's regulations and regulations regarding the use of wireless devices. Before taking off, turn off the wireless device to prevent wireless signals from interfering with aircraft control signals.
- ✓ **Environmental Protection:** Please comply with local laws regarding the handling of equipment packaging materials, equipment or accessories, and support recycling operations.
- ✓ **Emergency call:** This device uses wireless signals for propagation. Therefore, there is no guarantee that the network can be connected in all situations, so in an emergency this wireless device cannot be used as the only contact method.

