



FCC TEST REPORT

FCC ID:2BB7B-AM02

Report Number..... : ZHT-240122034E-1

Date of Test..... Jan. 22, 2024 to Feb. 05, 2024

Date of issue Feb. 05, 2024

Test Result PASS

Testing Laboratory..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : Shenzhen Qingfen Tingxiu Information Technology Co. Ltd

Address 2405-06, Baotai Building, 182 Design Park, 182 Bulan Road, Lilang Community, Nanwan Street, Longgang District, Shenzhen

Manufacturer's name : Shenzhen Qingfen Tingxiu Information Technology Co. Ltd

Address 2405-06, Baotai Building, 182 Design Park, 182 Bulan Road, Lilang Community, Nanwan Street, Longgang District, Shenzhen

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247 Issue 3 August 2023
RSS-Gen Issue 5 Feb 2021

Test procedure : ANSI C63.10:2013

Non-standard test method : N/A

This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Product name : MINIPC

Trademark : FIREBAT

Model/Type reference : AM02, T8PRO,T8PLUS,T8MATE,T8NOTE,T8MIX,
AK2PRO,AK2PLUS,AK7,AK7PRO,CK11,TK11, JK01,
JK06,AMR5,A6,A8,MN55, MN56,MN57,MN66,MN77,MN78
MN84,SU5,SU6,SU7,SU8, MN88,AK8,AK8PRO,AK8PLUS,
S1,F1A,F1K,M1A,M1K,T9,T9PRO,T9PLUS

Model difference : Only model name is different.

Ratings..... : Adapter:
MODEL: K36A120300U
INPUT: 100-240V, 50/60Hz, 0.9A
OUTPUT: 12.0V, 3.0A Max



Testing procedure and testing location:

Testing Laboratory.....: **Guangdong Zhonghan Testing Technology Co., Ltd.**

Address.....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tested by (name + signature): Kimi Lu

Kimi Lu

Reviewer (name + signature).....: Baret Wu

Baret Wu

Approved (name + signature): Levi Lee

Levi Lee

Table of Contents

	Page
1. VERSION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 TEST FACILITY.....	7
2.2 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE).....	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
4. EMC EMISSION TEST.....	13
4.1 CONDUCTED EMISSION MEASUREMENT.....	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits.....	13
4.1.2 TEST PROCEDURE.....	13
4.1.3 DEVIATION FROM TEST STANDARD.....	13
4.1.4 TEST SETUP.....	14
4.1.5 EUT OPERATING CONDITIONS.....	14
4.2 RADIATED EMISSION MEASUREMENT.....	17
4.2.1 RADIATED EMISSION LIMITS.....	17
4.2.2 TEST PROCEDURE.....	17
4.2.3 DEVIATION FROM TEST STANDARD.....	18
4.2.4 TEST SETUP.....	18
4.2.5 EUT OPERATING CONDITIONS.....	19
4.2.6 TEST RESULTS.....	19
5.RADIATED BAND EMISSIONMEASUREMENT.....	26
5.1 TEST REQUIREMENT:.....	26
5.2 TEST PROCEDURE.....	26
5.3 DEVIATION FROM TEST STANDARD.....	26
5.4 TEST SETUP.....	27
5.5 EUT OPERATING CONDITIONS.....	27
5.6 TEST RESULT.....	28
6.POWER SPECTRAL DENSITY TEST.....	30
6.1 APPLIED PROCEDURES / LIMIT.....	30
6.2 TEST PROCEDURE.....	30
6.3 DEVIATION FROM STANDARD.....	30
6.4 TEST SETUP.....	30
6.5 EUT OPERATION CONDITIONS.....	30



6.6 TEST RESULT31

7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH.....32

7.1 APPLIED PROCEDURES / LIMIT32

7.2 TEST PROCEDURE.....32

7.3 DEVIATION FROM STANDARD32

7.4 TEST SETUP32

7.5 EUT OPERATION CONDITIONS32

7.6 TEST RESULT33

8.PEAK OUTPUT POWER TEST.....34

8.1 APPLIED PROCEDURES/LIMIT34

8.2 TEST PROCEDURE.....34

8.3 DEVIATION FROM STANDARD34

8.4 TEST SETUP34

8.5 EUT OPERATION CONDITIONS34

8.6 TEST RESULT35

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION36

9.1 APPLICABLE STANDARD36

9.2 TEST PROCEDURE.....36

9.3 DEVIATION FROM STANDARD36

9.4 TEST SETUP36

9.5 EUT OPERATION CONDITIONS36

9.6 TEST RESULTS36

10. ANTENNA REQUIREMENT37

10. APPENDIX WIFI38

10.1 DUTY CYCLE38

10.2 MAXIMUM AVERAGE CONDUCTED OUTPUT POWER.....51

10.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER52

10.4 6DB BANDWIDTH.....53

10.5 OCCUPIED CHANNEL BANDWIDTH.....66

10.6 MAXIMUM POWER SPECTRAL DENSITY LEVEL.....79

10.7 BAND EDGE85

10.8 CONDUCTED RF SPURIOUS EMISSION102

11. TEST SETUP PHOTO127

12. EUT CONSTRUCTIONAL DETAILS127



1. VERSION

Report No.	Version	Description	Approved
ZHT-240122034E-1	Rev.01	Initial issue of report	Feb. 05, 2024



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C RSS-247 Issue 3			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4) RSS-Gen 6.8	Antenna requirement	PASS	
FCC part 15.207 RSS-Gen 8.8	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3) RSS 247 5.4 (d)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2) RSS 247 5.2(a) RSS GEN	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e) RSS 247 5.2(b)	Power Spectral Density	PASS	
FCC part 15.247(d) RSS-Gen 8.10 RSS-247 5.5	Band Edge	PASS	
FCC part 15.205/15.209 RSS-Gen 8.9 RSS-Gen 8.10	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.

Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

IC Registered No.: 29832

CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF powerconducted	$\pm 0.16\text{dB}$
3	Spurious emissionsconducted	$\pm 0.21\text{dB}$
4	All emissions radiated(9k-30MHz)	$\pm 4.68\text{dB}$
5	All emissionsradiated(<1G)	$\pm 4.68\text{dB}$
6	All emissionsradiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	MINIPC
Model No.:	AM02
Model Different.:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11 /802.11n(HT20):9
Operation Frequency:	802.11b/802.11g /802.11n(HT20): 2412-2462MHz/802.11n(HT40): 2422-2452MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	FPC antenna
Antenna gain:	Ant 1:-1.93dBi, Ant 2:-1.84dBi
Power supply:	Adapter: MODEL: K36A120300U INPUT: 100-240V, 50/60Hz, 0.9A OUTPUT: 12.0V, 3.0A Max
Sample Number:	240122034E-1#

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz


Test channel	Frequency (MHz)
	802.11n(HT40)
Lowest channel	2422MHz
Middle channel	2437MHz
Highest channel	2452MHz

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode			
Remark: EUT use new battery during the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.				
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13.5Mbps

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
/	/	/	/	/	/
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) The test software is the Amebad_mptool_2V1 which can set the EUT into the individual test modes. TX Power: Default

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Instrument number	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	ZH-E005	May 12, 2023	May 11, 2024
2	Loop antenna	EMCI	LAP600	ZH-E036	May 12, 2023	May 11, 2024
3	Amplifier	Schwarzbeck	BBV 9743 B	ZH-E019	May 12, 2023	May 11, 2024
4	Amplifier	Schwarzbeck	BBV 9718 B	ZH-E021	May 12, 2023	May 11, 2024
5	Bilog Antenna	Schwarzbeck	VULB9162	ZH-E017	May 17, 2023	May 16, 2024
6	Horn Antenna	Schwarzbeck	BBHA9120D	ZH-E020	May 17, 2023	May 16, 2024
7	Horn Antenna	A.H.SYSTEMS	SAS574	ZH-E062	May 12, 2023	May 11, 2024
8	Amplifier	AEROFLEX	100KHz-40GHz	ZH-E063	May 12, 2023	May 11, 2024
9	Spectrum Analyzer	R&S	FSV40	ZH-E064	May 12, 2023	May 11, 2024
10	CDNE	Schwarzbeck	CDNE M2 + CDNE M3	ZH-E029	May 12, 2023	May 11, 2024
11	966 Anechoic Chamber	EMToni	9m6m6m	ZH-E001	Nov. 25, 2021	Nov. 24, 2024
12	Spectrum Analyzer	KEYSIGHT	N9020A	ZH-E032	May 12, 2023	May 11, 2024
13	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	ZH-E033	May 12, 2023	May 11, 2024
14	Single Generator	Agilent	N5182A	ZH-E034	May 12, 2023	May 11, 2024
15	Power Sensor	MWRFTest	MW100-RFCB	ZH-E066	May 12, 2023	May 11, 2024
16	Audio analyzer	R&S	UPL	ZH-E067	May 12, 2023	May 11, 2024
17	Single Generator	R&S	SMB100A	ZH-E068	May 12, 2023	May 11, 2024
18	Power Amplifier Shielding Room	EMToni	2m3m3m	ZH-E003	Nov. 25, 2021	Nov. 24, 2024

Conduction Test equipment

Equipment	Manufacturer	Model	Instrument number	Last Cal.	Next Cal.
Receiver	R&S	ESCI	ZH-E005	May 12, 2023	May 11, 2024
LISN	R&S	ENV216	ZH-E006	May 12, 2023	May 11, 2024
ISN CAT 6	Schwarzbeck	NTFM 8158	ZH-E012	May 12, 2023	May 11, 2024
ISN CAT 5	Schwarzbeck	CAT5 8158	ZH-E013	May 12, 2023	May 11, 2024
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	ZH-E014	May 12, 2023	May 11, 2024
Current Transformer Clamp	Schwarzbeck	SW 9605	ZH-E015	May 12, 2023	May 11, 2024
CE Shielding Room	EMToni	9m4m3m	ZH-E002	Nov. 25, 2021	Nov. 24, 2024

Conducted Test equipment

Equipment	Manufacturer	Model	Instrument number	Last Cal.	Next Cal.
Spectrum Analyzer	KEYSIGHT	N9020A	ZH-E032	May 12, 2023	May 11, 2024
Single Generator	Agilent	N5182A	ZH-E034	May 12, 2023	May 11, 2024



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207;RSS-Gen 8.8
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	RSS-Gen 8.8
0.50 -5.0	56.00	46.00	RSS-Gen 8.8
5.0 -30.0	60.00	50.00	RSS-Gen 8.8

Note:


(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

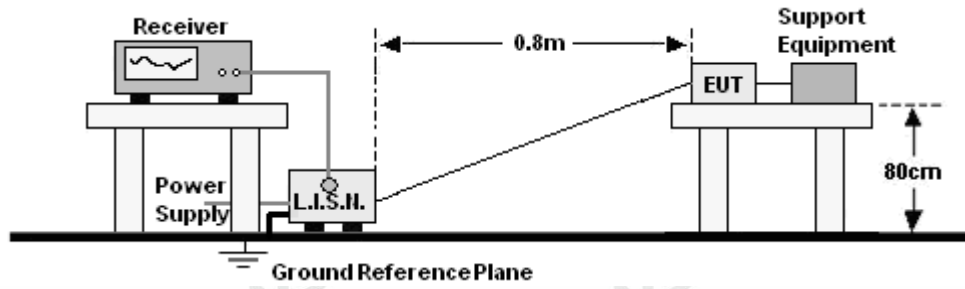


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 test result

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

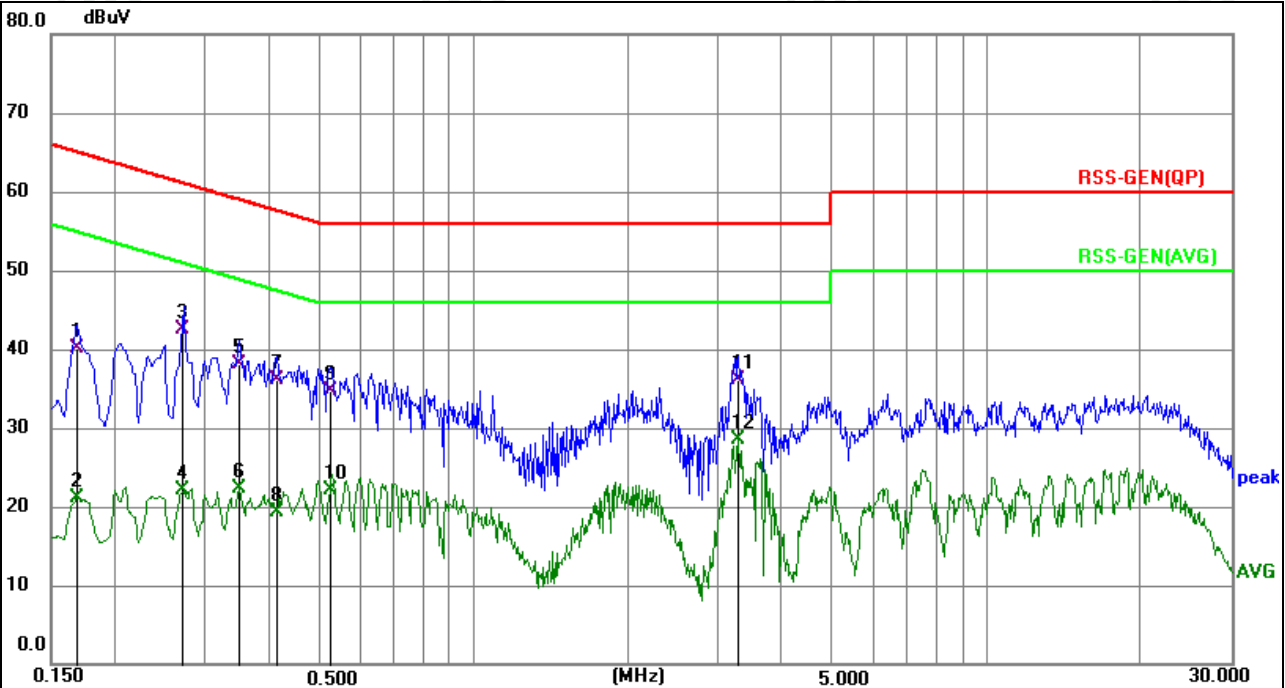


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1680	30.49	9.53	40.02	65.06	-25.04	QP	P	
2	0.1680	11.58	9.53	21.11	55.06	-33.95	AVG	P	
3	0.2714	32.85	9.59	42.44	61.07	-18.63	QP	P	
4	0.2714	12.45	9.59	22.04	51.07	-29.03	AVG	P	
5	0.3480	28.46	9.62	38.08	59.01	-20.93	QP	P	
6	0.3480	12.65	9.62	22.27	49.01	-26.74	AVG	P	
7	0.4110	26.36	9.66	36.02	57.63	-21.61	QP	P	
8	0.4110	9.63	9.66	19.29	47.63	-28.34	AVG	P	
9	0.5234	25.07	9.70	34.77	56.00	-21.23	QP	P	
10	0.5234	12.33	9.70	22.03	46.00	-23.97	AVG	P	
11	3.2910	26.34	9.81	36.15	56.00	-19.85	QP	P	
12 *	3.2910	18.64	9.81	28.45	46.00	-17.55	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. Pretest all modes and only record the worst case(ANT1- 802.11b low channel)



Temperature :	25.1°C	Relative Humidity :	50%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

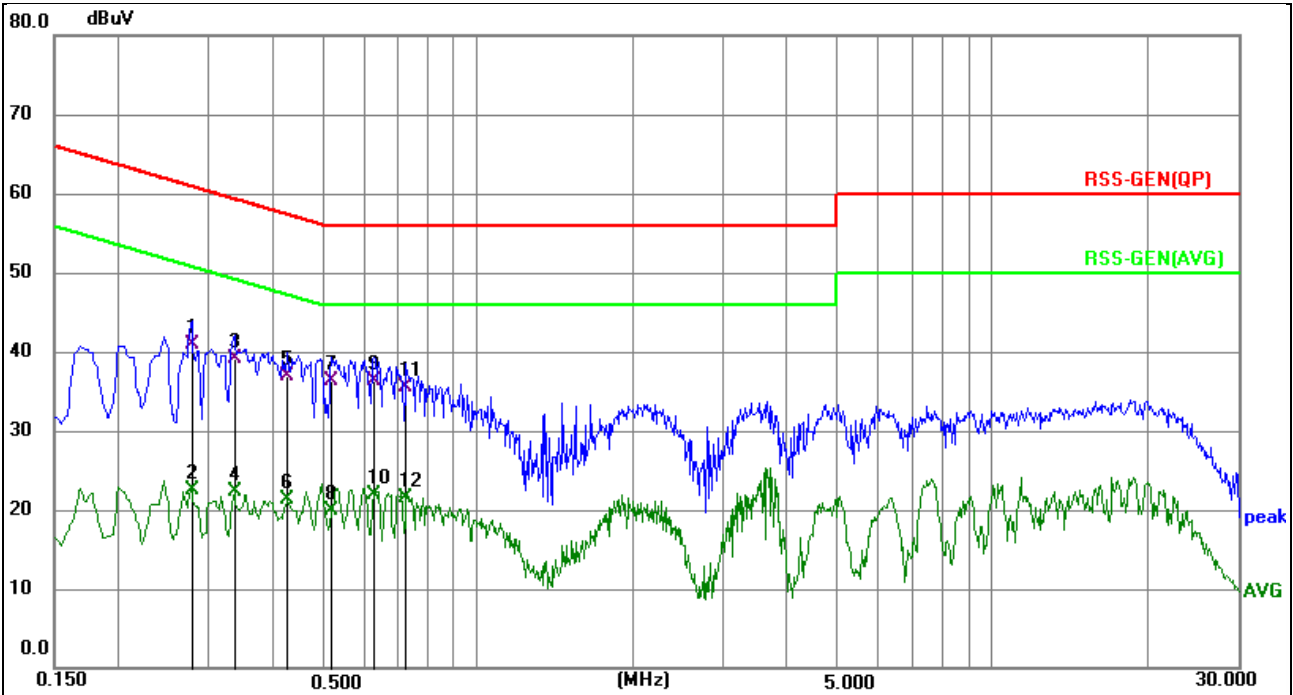

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2760	31.26	9.57	40.83	60.94	-20.11	QP	P	
2	0.2760	12.97	9.57	22.54	50.94	-28.40	AVG	P	
3	0.3345	29.48	9.60	39.08	59.34	-20.26	QP	P	
4	0.3345	12.63	9.60	22.23	49.34	-27.11	AVG	P	
5	0.4244	27.26	9.65	36.91	57.36	-20.45	QP	P	
6	0.4244	11.67	9.65	21.32	47.36	-26.04	AVG	P	
7 *	0.5190	26.66	9.69	36.35	56.00	-19.65	QP	P	
8	0.5190	10.26	9.69	19.95	46.00	-26.05	AVG	P	
9	0.6270	26.61	9.70	36.31	56.00	-19.69	QP	P	
10	0.6270	12.16	9.70	21.86	46.00	-24.14	AVG	P	
11	0.7260	25.75	9.71	35.46	56.00	-20.54	QP	P	
12	0.7260	11.81	9.71	21.52	46.00	-24.48	AVG	P	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor
- 4.Pretest all modes and only record the worst case(ANT1- 802.11b low channel)



Test Requirement:	FCC Part15 C Section 15.209 and 15.205; RSS-Gen 8.9, RSS-Gen 8.10				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to RSS-Gen 8.9.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

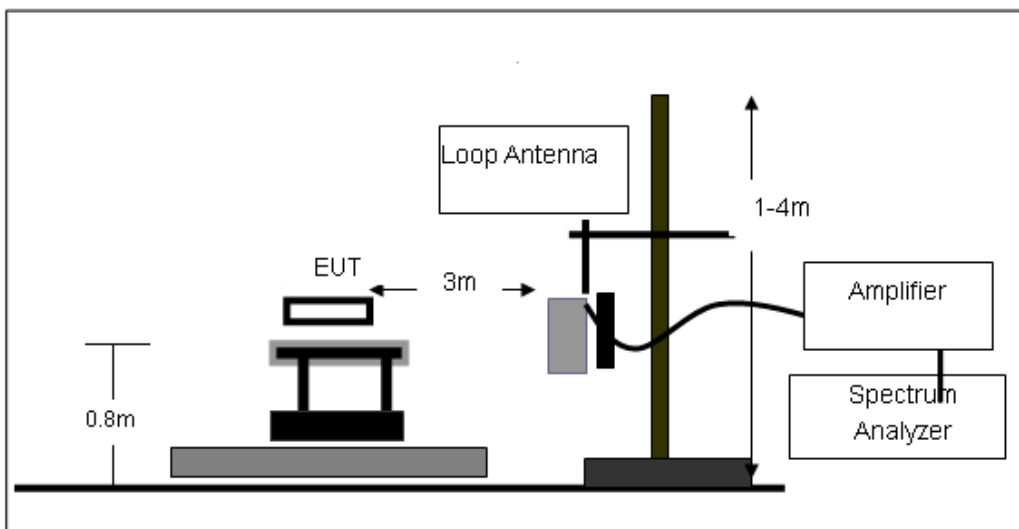

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

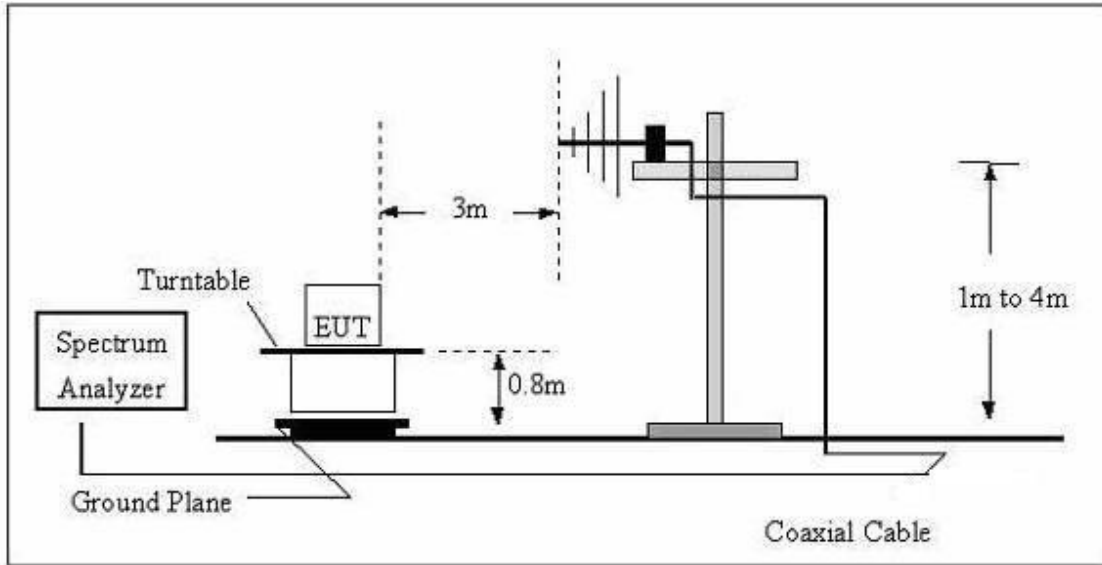

(C) Radiated Emission Test-Up Frequency Above 1GHz

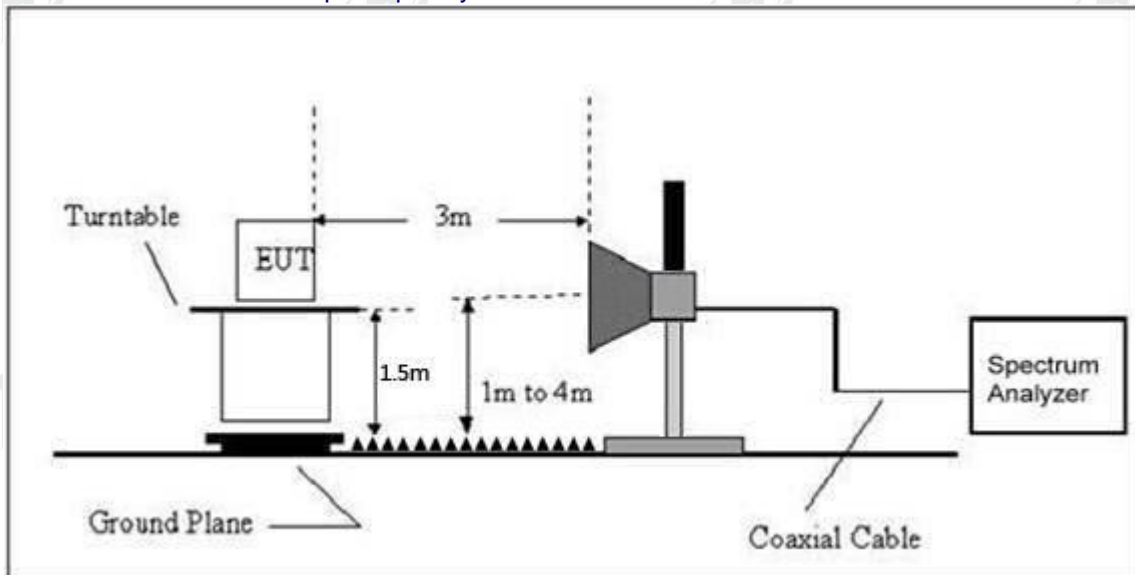

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.



Between 30MHz – 1GHz


Temperature :	25.1 °C	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		

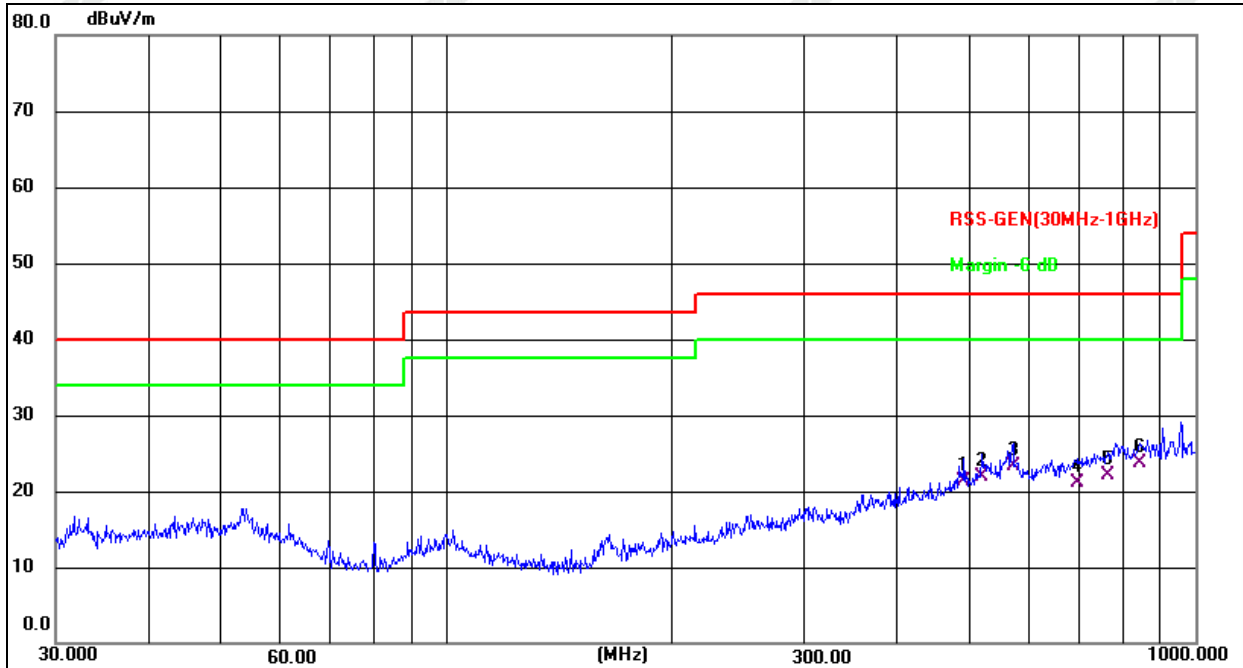

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	490.7446	25.49	-4.24	21.25	46.00	-24.75	QP
2	519.0650	25.59	-3.74	21.85	46.00	-24.15	QP
3	570.6100	26.18	-2.80	23.38	46.00	-22.62	QP
4	696.8567	21.81	-0.69	21.12	46.00	-24.88	QP
5	763.3757	21.93	0.19	22.12	46.00	-23.88	QP
6 *	842.1296	22.37	1.32	23.69	46.00	-22.31	QP



Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		

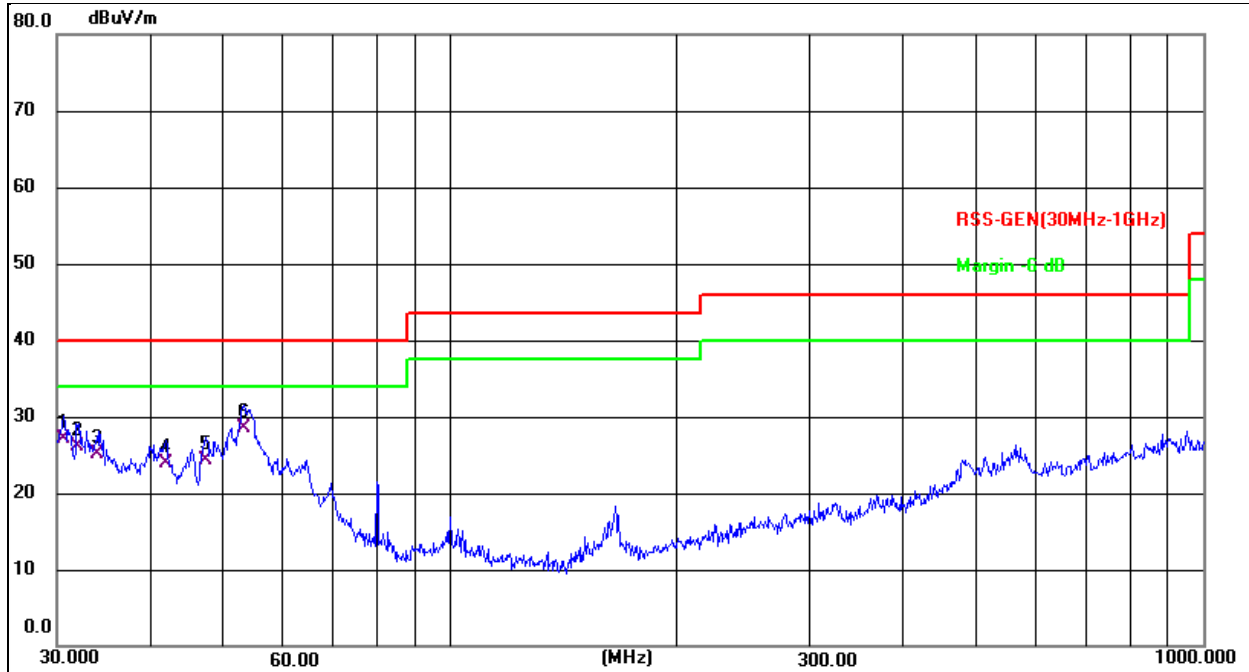

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.6378	38.47	-11.34	27.13	40.00	-12.87	QP
2	32.0667	37.22	-11.09	26.13	40.00	-13.87	QP
3	34.0363	35.79	-10.73	25.06	40.00	-14.94	QP
4	41.8595	33.45	-9.51	23.94	40.00	-16.06	QP
5	47.3255	33.22	-8.99	24.23	40.00	-15.77	QP
6 *	53.1313	37.63	-9.08	28.55	40.00	-11.45	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case ANT1- 802.11b mode (Low Channel:2412MHz).



1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	59.97	30.55	5.77	24.66	59.85	74	-14.15	PK
V	4824.00	44.25	30.55	5.77	24.66	44.13	54	-9.87	AV
V	7236.00	59.2	30.33	6.32	24.55	59.74	74	-14.26	PK
V	7236.00	41.06	30.33	6.32	24.55	41.6	54	-12.4	AV
H	4824.00	55.03	30.55	5.77	24.66	54.91	74	-19.09	PK
H	4824.00	42.39	30.55	5.77	24.66	42.27	54	-11.73	AV
H	7236.00	57.52	30.33	6.32	24.55	58.06	74	-15.94	PK
H	7236.00	41.4	30.33	6.32	24.55	41.94	54	-12.06	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	59.11	30.55	5.77	24.66	58.99	74	-15.01	PK
V	4874.00	41.72	30.55	5.77	24.66	41.6	54	-12.4	AV
V	7311.00	58.38	30.33	6.32	24.55	58.92	74	-15.08	PK
V	7311.00	43.82	30.33	6.32	24.55	44.36	54	-9.64	AV
H	4874.00	58.54	30.55	5.77	24.66	58.42	74	-15.58	PK
H	4874.00	41.54	30.55	5.77	24.66	41.42	54	-12.58	AV
H	7311.00	58.29	30.33	6.32	24.55	58.83	74	-15.17	PK
H	7311.00	42.06	30.33	6.32	24.55	42.6	54	-11.4	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	55.59	30.55	5.77	24.66	55.47	74	-18.53	PK
V	4924.00	41.97	30.55	5.77	24.66	41.85	54	-12.15	AV
V	7386.00	59.13	30.33	6.32	24.55	59.67	74	-14.33	PK
V	7386.00	42	30.33	6.32	24.55	42.54	54	-11.46	AV
H	4924.00	55.1	30.55	5.77	24.66	54.98	74	-19.02	PK
H	4924.00	41.5	30.55	5.77	24.66	41.38	54	-12.62	AV
H	7386.00	57.64	30.33	6.32	24.55	58.18	74	-15.82	PK
H	7386.00	43.43	30.33	6.32	24.55	43.97	54	-10.03	AV



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	58.74	30.55	5.77	24.66	58.62	74	-15.38	PK
V	4824.00	41.28	30.55	5.77	24.66	41.16	54	-12.84	AV
V	7236.00	55.63	30.33	6.32	24.55	56.17	74	-17.83	PK
V	7236.00	42.88	30.33	6.32	24.55	43.42	54	-10.58	AV
H	4824.00	59.12	30.55	5.77	24.66	59	74	-15.00	PK
H	4824.00	41.8	30.55	5.77	24.66	41.68	54	-12.32	AV
H	7236.00	57.9	30.33	6.32	24.55	58.44	74	-15.56	PK
H	7236.00	44.21	30.33	6.32	24.55	44.75	54	-9.25	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	55.5	30.55	5.77	24.66	55.38	74	-18.62	PK
V	4874.00	41.88	30.55	5.77	24.66	41.76	54	-12.24	AV
V	7311.00	55.5	30.33	6.32	24.55	56.04	74	-17.96	PK
V	7311.00	42.29	30.33	6.32	24.55	42.83	54	-11.17	AV
H	4874.00	56.93	30.55	5.77	24.66	56.81	74	-17.19	PK
H	4874.00	41.62	30.55	5.77	24.66	41.5	54	-12.5	AV
H	7311.00	57.37	30.33	6.32	24.55	57.91	74	-16.09	PK
H	7311.00	44.24	30.33	6.32	24.55	44.78	54	-9.22	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	55.4	30.55	5.77	24.66	55.28	74	-18.72	PK
V	4924.00	41.83	30.55	5.77	24.66	41.71	54	-12.29	AV
V	7386.00	55.24	30.33	6.32	24.55	55.78	74	-18.22	PK
V	7386.00	42.85	30.33	6.32	24.55	43.39	54	-10.61	AV
H	4924.00	56.27	30.55	5.77	24.66	56.15	74	-17.85	PK
H	4924.00	41.21	30.55	5.77	24.66	41.09	54	-12.91	AV
H	7386.00	58.94	30.33	6.32	24.55	59.48	74	-14.52	PK
H	7386.00	42.16	30.33	6.32	24.55	42.7	54	-11.3	AV



802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	61.61	30.55	5.77	24.66	61.49	74	-12.51	PK
V	4824.00	42.43	30.55	5.77	24.66	42.31	54	-11.69	AV
V	7236.00	53.29	30.33	6.32	24.55	53.83	74	-20.17	PK
V	7236.00	37.55	30.33	6.32	24.55	38.09	54	-15.91	AV
H	4824.00	59.91	30.55	5.77	24.66	59.79	74	-14.21	PK
H	4824.00	41.17	30.55	5.77	24.66	41.05	54	-12.95	AV
H	7236.00	59.14	30.33	6.32	24.55	59.68	74	-14.32	PK
H	7236.00	41.93	30.33	6.32	24.55	42.47	54	-11.53	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	60.55	30.55	5.77	24.66	60.43	74	-13.57	PK
V	4874.00	43.41	30.55	5.77	24.66	43.29	54	-10.71	AV
V	7311.00	53.13	30.33	6.32	24.55	53.67	74	-20.33	PK
V	7311.00	37.73	30.33	6.32	24.55	38.27	54	-15.73	AV
H	4874.00	59.16	30.55	5.77	24.66	59.04	74	-14.96	PK
H	4874.00	42.68	30.55	5.77	24.66	42.56	54	-11.44	AV
H	7311.00	57.95	30.33	6.32	24.55	58.49	74	-15.51	PK
H	7311.00	42.67	30.33	6.32	24.55	43.21	54	-10.79	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	58.80	30.55	5.77	24.66	58.68	74	-15.32	PK
V	4924.00	43.49	30.55	5.77	24.66	43.37	54	-10.63	AV
V	7386.00	53.15	30.33	6.32	24.55	53.69	74	-20.31	PK
V	7386.00	37.29	30.33	6.32	24.55	37.83	54	-16.17	AV
H	4924.00	55.97	30.55	5.77	24.66	55.85	74	-18.15	PK
H	4924.00	41.62	30.55	5.77	24.66	41.5	54	-12.5	AV
H	7386.00	59.79	30.33	6.32	24.55	60.33	74	-13.67	PK
H	7386.00	41.57	30.33	6.32	24.55	42.11	54	-11.89	AV



802.11n40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422MHz									
V	4844.00	57.96	30.55	5.77	24.66	57.84	74	-16.16	PK
V	4844.00	43.42	30.55	5.77	24.66	43.3	54	-10.7	AV
V	7266.00	55.29	30.33	6.32	24.55	55.83	74	-18.17	PK
V	7266.00	42.97	30.33	6.32	24.55	43.51	54	-10.49	AV
H	4844.00	57.55	30.55	5.77	24.66	57.43	74	-16.57	PK
H	4844.00	44.05	30.55	5.77	24.66	43.93	54	-10.07	AV
H	7266.00	57.18	30.33	6.32	24.55	57.72	74	-16.28	PK
H	7266.00	43.06	30.33	6.32	24.55	43.6	54	-10.4	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	56.27	30.55	5.77	24.66	56.15	74	-17.85	PK
V	4874.00	41.09	30.55	5.77	24.66	40.97	54	-13.03	AV
V	7311.00	56.21	30.33	6.32	24.55	56.75	74	-17.25	PK
V	7311.00	41.32	30.33	6.32	24.55	41.86	54	-12.14	AV
H	4874.00	57.2	30.55	5.77	24.66	57.08	74	-16.92	PK
H	4874.00	41.89	30.55	5.77	24.66	41.77	54	-12.23	AV
H	7311.00	57.83	30.33	6.32	24.55	58.37	74	-15.63	PK
H	7311.00	41.23	30.33	6.32	24.55	41.77	54	-12.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2452MHz									
V	4844.00	55.09	30.55	5.77	24.66	54.97	74	-19.03	PK
V	4844.00	41.14	30.55	5.77	24.66	41.02	54	-12.98	AV
V	7356.00	59.27	30.33	6.32	24.55	59.81	74	-14.19	PK
V	7356.00	44.8	30.33	6.32	24.55	45.34	54	-8.66	AV
H	4844.00	55	30.55	5.77	24.66	54.88	74	-19.12	PK
H	4844.00	43.82	30.55	5.77	24.66	43.7	54	-10.3	AV
H	7356.00	56.96	30.33	6.32	24.55	57.5	74	-16.5	PK
H	7356.00	43.06	30.33	6.32	24.55	43.6	54	-10.4	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. Pretest 802.11b, 802.11g , 802.11n of ANT1, ANT2 modes, only record the worst case (ANT1).



5.RADIATED BAND EMISSIONMEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	RSS-Gen 8.10, RSS-247 5.5				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to RSS-Gen 8.10, RSS-247 5.5.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation



Radiated Emission Test-Up Frequency Above 1GHz

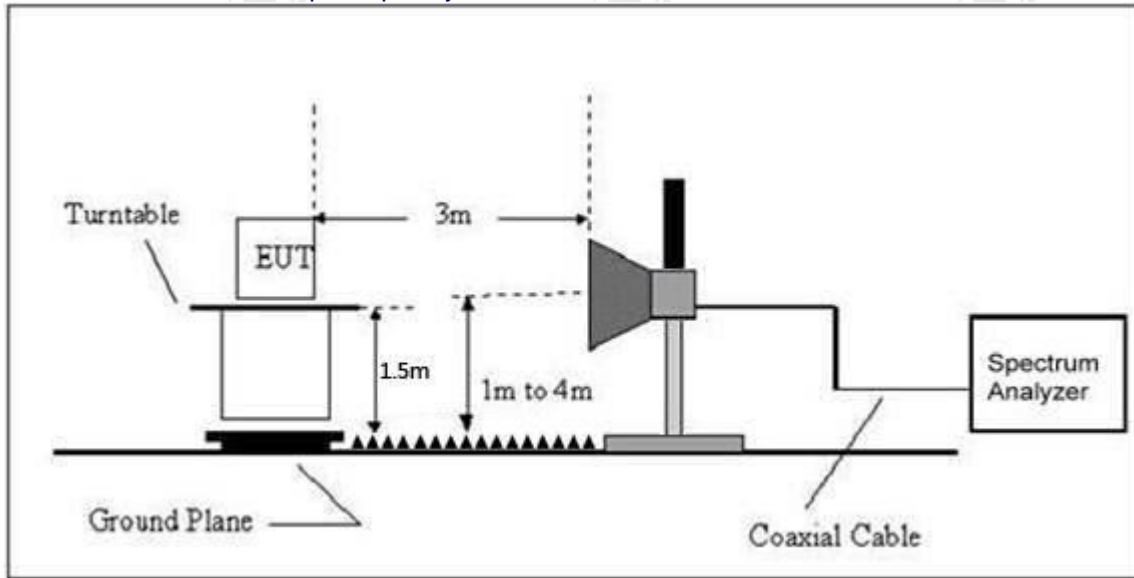

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margi n (dB)	Detec tor Type	Result
802.11b	Low Channel 2412MHz										
	H	2390.00	61.69	30.22	4.85	23.98	60.30	74.00	-13.70	PK	PASS
	H	2390.00	47.12	30.22	4.85	23.98	45.73	54.00	-8.27	AV	PASS
	H	2400.00	60.48	30.22	4.85	23.98	59.09	74.00	-14.91	PK	PASS
	H	2400.00	46.81	30.22	4.85	23.98	45.42	54.00	-8.58	AV	PASS
	V	2390.00	59.12	30.22	4.85	23.98	57.73	74.00	-16.27	PK	PASS
	V	2390.00	46.01	30.22	4.85	23.98	44.62	54.00	-9.38	AV	PASS
	V	2400.00	59.22	30.22	4.85	23.98	57.83	74.00	-16.17	PK	PASS
	V	2400.00	47.33	30.22	4.85	23.98	45.94	54.00	-8.06	AV	PASS
	High Channel 2462MHz										
	H	2483.50	60.05	30.22	4.85	23.98	58.66	74.00	-15.34	PK	PASS
	H	2483.50	46.71	30.22	4.85	23.98	45.32	54.00	-8.68	AV	PASS
	H	2500.00	60.36	30.22	4.85	23.98	58.97	74.00	-15.03	PK	PASS
	H	2500.00	47.12	30.22	4.85	23.98	45.73	54.00	-8.27	AV	PASS
	V	2483.50	62.44	30.22	4.85	23.98	61.05	74.00	-12.95	PK	PASS
	V	2483.50	47.27	30.22	4.85	23.98	45.88	54.00	-8.12	AV	PASS
V	2500.00	59.97	30.22	4.85	23.98	58.58	74.00	-15.42	PK	PASS	
V	2500.00	47.40	30.22	4.85	23.98	46.01	54.00	-7.99	AV	PASS	
802.11g	Low Channel 2412MHz										
	H	2390.00	61.49	30.22	4.85	23.98	60.10	74.00	-13.90	PK	PASS
	H	2390.00	47.55	30.22	4.85	23.98	46.16	54.00	-7.84	AV	PASS
	H	2400.00	61.37	30.22	4.85	23.98	59.98	74.00	-14.02	PK	PASS
	H	2400.00	48.93	30.22	4.85	23.98	47.54	54.00	-6.46	AV	PASS
	V	2390.00	59.35	30.22	4.85	23.98	57.96	74.00	-16.04	PK	PASS
	V	2390.00	47.74	30.22	4.85	23.98	46.35	54.00	-7.65	AV	PASS
	V	2400.00	61.91	30.22	4.85	23.98	60.52	74.00	-13.48	PK	PASS
	V	2400.00	46.18	30.22	4.85	23.98	44.79	54.00	-9.21	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.01	30.22	4.85	23.98	57.62	74.00	-16.38	PK	PASS
	H	2483.50	48.07	30.22	4.85	23.98	46.68	54.00	-7.32	AV	PASS
	H	2500.00	59.94	30.22	4.85	23.98	58.55	74.00	-15.45	PK	PASS
	H	2500.00	48.99	30.22	4.85	23.98	47.60	54.00	-6.40	AV	PASS
	V	2483.50	59.11	30.22	4.85	23.98	57.72	74.00	-16.28	PK	PASS
	V	2483.50	48.00	30.22	4.85	23.98	46.61	54.00	-7.39	AV	PASS
V	2500.00	59.18	30.22	4.85	23.98	57.79	74.00	-16.21	PK	PASS	
V	2500.00	46.37	30.22	4.85	23.98	44.98	54.00	-9.02	AV	PASS	
802.11n2 0	Low Channel 2412MHz										
	H	2390.00	60.32	30.22	4.85	23.98	58.93	74.00	-15.07	PK	PASS
	H	2390.00	47.90	30.22	4.85	23.98	46.51	54.00	-7.49	AV	PASS
	H	2400.00	62.16	30.22	4.85	23.98	60.77	74.00	-13.23	PK	PASS
	H	2400.00	48.23	30.22	4.85	23.98	46.84	54.00	-7.16	AV	PASS
	V	2390.00	61.55	30.22	4.85	23.98	60.16	74.00	-13.84	PK	PASS
	V	2390.00	47.38	30.22	4.85	23.98	45.99	54.00	-8.01	AV	PASS
	V	2400.00	60.17	30.22	4.85	23.98	58.78	74.00	-15.22	PK	PASS
	V	2400.00	47.19	30.22	4.85	23.98	45.80	54.00	-8.20	AV	PASS



		High Channel 2462MHz									
802.11n2 0	H	2483.50	61.32	30.22	4.85	23.98	59.93	74.00	-14.07	PK	PASS
	H	2483.50	48.69	30.22	4.85	23.98	47.30	54.00	-6.70	AV	PASS
	H	2500.00	59.56	30.22	4.85	23.98	58.17	74.00	-15.83	PK	PASS
	H	2500.00	46.33	30.22	4.85	23.98	44.94	54.00	-9.06	AV	PASS
	V	2483.50	59.77	30.22	4.85	23.98	58.38	74.00	-15.62	PK	PASS
	V	2483.50	47.23	30.22	4.85	23.98	45.84	54.00	-8.16	AV	PASS
	V	2500.00	59.17	30.22	4.85	23.98	57.78	74.00	-16.22	PK	PASS
	V	2500.00	47.80	30.22	4.85	23.98	46.41	54.00	-7.59	AV	PASS
		Low Channel 2422MHz									
802.11n4 0	H	2390.00	59.79	30.22	4.85	23.98	58.40	74.00	-15.60	PK	PASS
	H	2390.00	46.04	30.22	4.85	23.98	44.65	54.00	-9.35	AV	PASS
	H	2400.00	61.61	30.22	4.85	23.98	60.22	74.00	-13.78	PK	PASS
	H	2400.00	47.65	30.22	4.85	23.98	46.26	54.00	-7.74	AV	PASS
	V	2390.00	61.78	30.22	4.85	23.98	60.39	74.00	-13.61	PK	PASS
	V	2390.00	48.93	30.22	4.85	23.98	47.54	54.00	-6.46	AV	PASS
	V	2400.00	61.84	30.22	4.85	23.98	60.45	74.00	-13.55	PK	PASS
	V	2400.00	46.20	30.22	4.85	23.98	44.81	54.00	-9.19	AV	PASS
		High Channel 2452MHz									
802.11n 40	H	2483.50	61.44	30.22	4.85	23.98	60.05	74.00	-13.95	PK	PASS
	H	2483.50	47.71	30.22	4.85	23.98	46.32	54.00	-7.68	AV	PASS
	H	2500.00	60.65	30.22	4.85	23.98	59.26	74.00	-14.74	PK	PASS
	H	2500.00	46.82	30.22	4.85	23.98	45.43	54.00	-8.57	AV	PASS
	V	2483.50	60.03	30.22	4.85	23.98	58.64	74.00	-15.36	PK	PASS
	V	2483.50	47.35	30.22	4.85	23.98	45.96	54.00	-8.04	AV	PASS
	V	2500.00	59.83	30.22	4.85	23.98	58.44	74.00	-15.56	PK	PASS
	V	2500.00	48.78	30.22	4.85	23.98	47.39	54.00	-6.61	AV	PASS
Remark:											
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit											
2. Pretest 802.11b, 802.11g , 802.11n of ANT1, ANT2 modes, only record the worst case (ANT1).											



6.POWER SPECTRAL DENSITY TEST

Test Requirement:	RSS 247 5.2(b)
Test Method:	KDB558074 D0115.247 Meas Guidanceev05r02

6.1 APPLIED PROCEDURES / LIMIT

RSS 247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
5.2(b)	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

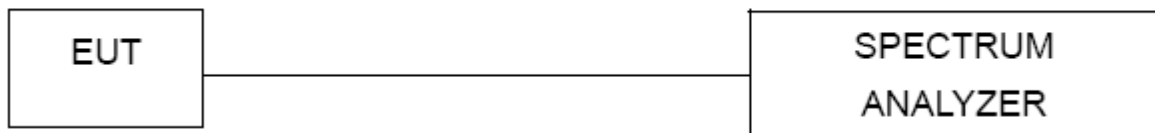

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.4℃	Relative Humidity :	47%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Please refer to APPENDIX WIFI

7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH

Test Requirement:	RSS 247 5.2(a), RSS GEN
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

RSS 247 5.2(a), RSS GEN			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 xRBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

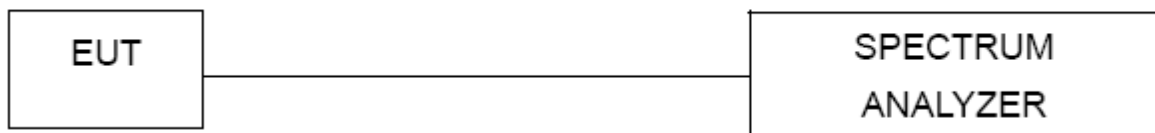

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.4℃	Relative Humidity :	47%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Mode		

Please refer to APPENDIX WIFI

8. PEAK OUTPUT POWER TEST

Test Requirement:	RSS 247 5.4 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

RSS 247				
Section	Test Item	Limit	Frequency Range (MHz)	Result
5.4 (d)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.4℃	Relative Humidity :	47%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Please refer to APPENDIX WIFI

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	RSS-Gen 8.10, RSS-247 5.5
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE


Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

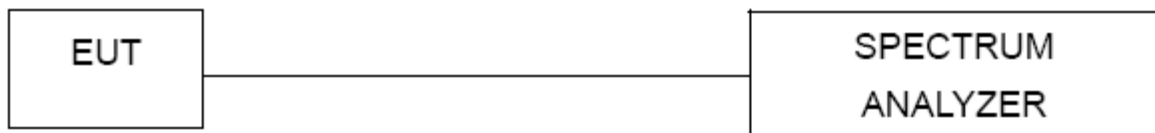

9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to APPENDIX WIFI



10. ANTENNA REQUIREMENT



Standard requirement:	RSS-Gen 6.8
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (5) The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (EIRP) limits specified in the applicable standard (RSS) for the licence-exempt apparatus. Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.⁹ When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.</p>	
EUT Antenna:	
The antenna is FPC antenna, the best case gain of the antenna is Ant 1:-1.93dBi, Ant 2:-1.84dBi, reference to the appendix II for details	







10. APPENDIX WIFI



10.1 DUTY CYCLE



Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)
NVNT	b	2412	Ant1	97.1
NVNT	b	2437	Ant1	96.98
NVNT	b	2462	Ant1	97.1
NVNT	b	2412	Ant2	99.4
NVNT	b	2437	Ant2	99.52
NVNT	b	2462	Ant2	99.52
NVNT	g	2412	Ant1	88.94
NVNT	g	2437	Ant1	88.94
NVNT	g	2462	Ant1	89.32
NVNT	g	2412	Ant2	93.67
NVNT	g	2437	Ant2	93.67
NVNT	g	2462	Ant2	94.94
NVNT	n20	2412	Ant1	94.82
NVNT	n20	2437	Ant1	94.82
NVNT	n20	2462	Ant1	95.02
NVNT	n20	2412	Ant2	93.9
NVNT	n20	2437	Ant2	95.06
NVNT	n20	2462	Ant2	95.06
NVNT	n40	2422	Ant1	94.83
NVNT	n40	2437	Ant1	94.83
NVNT	n40	2452	Ant1	94.83
NVNT	n40	2422	Ant2	93.98
NVNT	n40	2437	Ant2	93.9
NVNT	n40	2452	Ant2	93.98

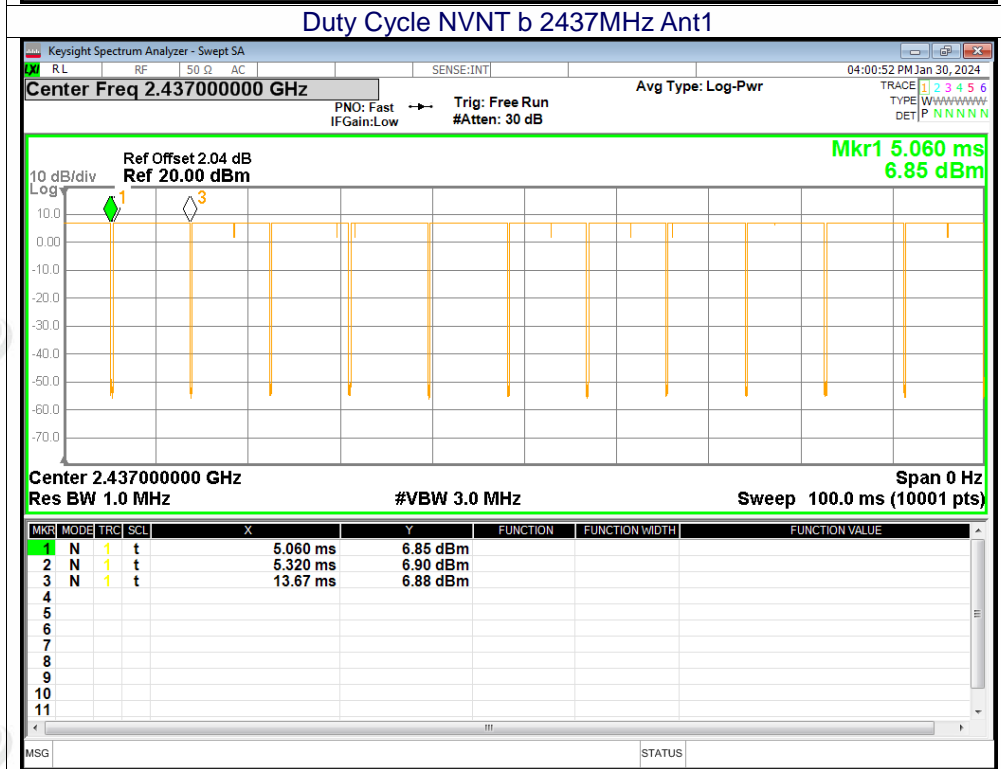
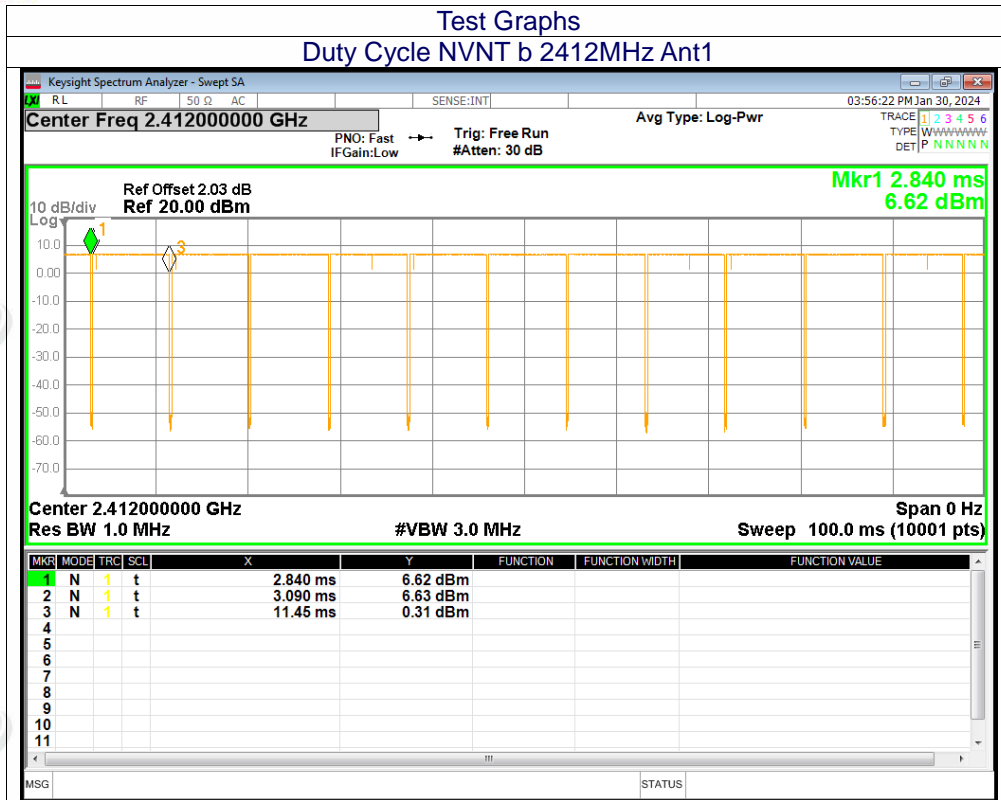


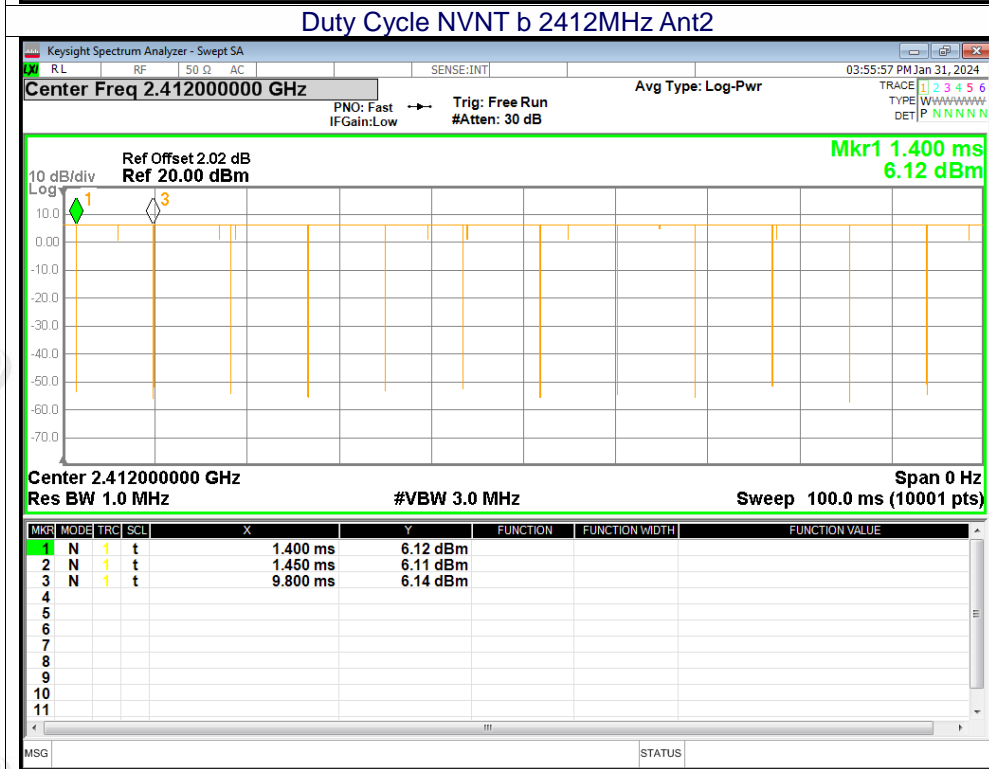
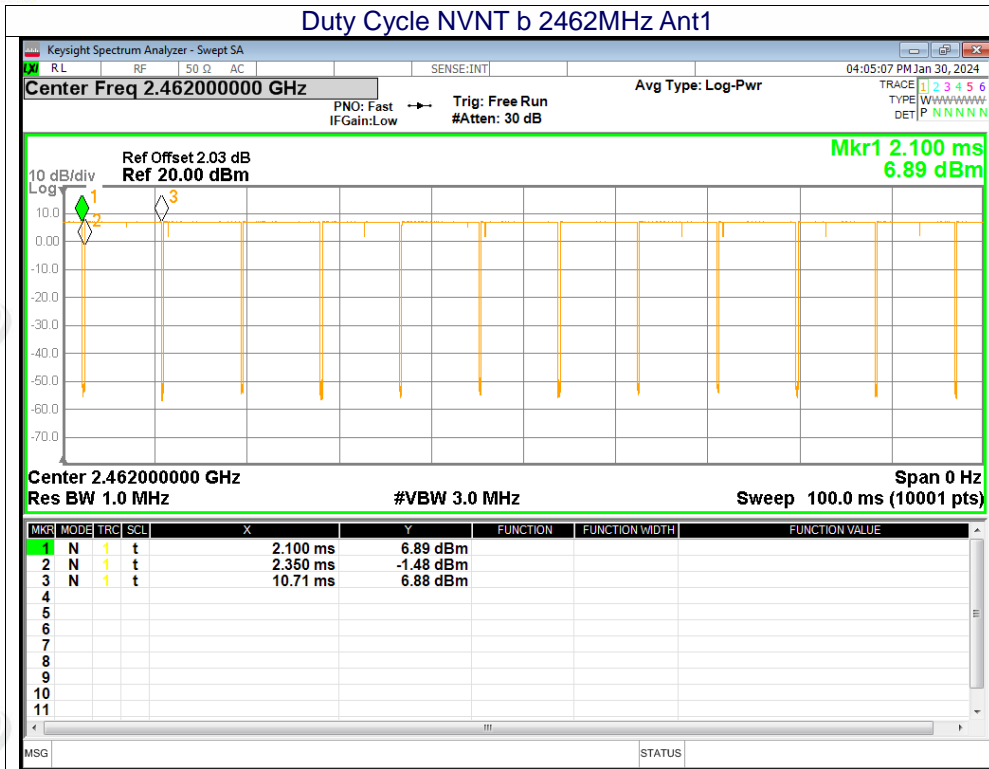


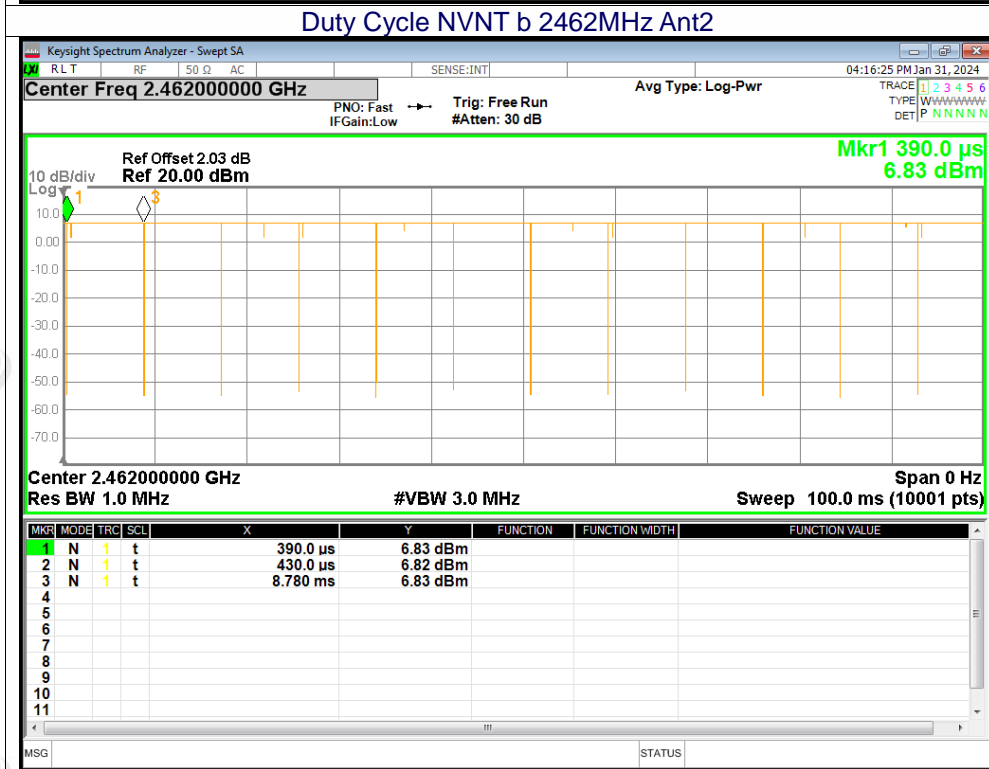
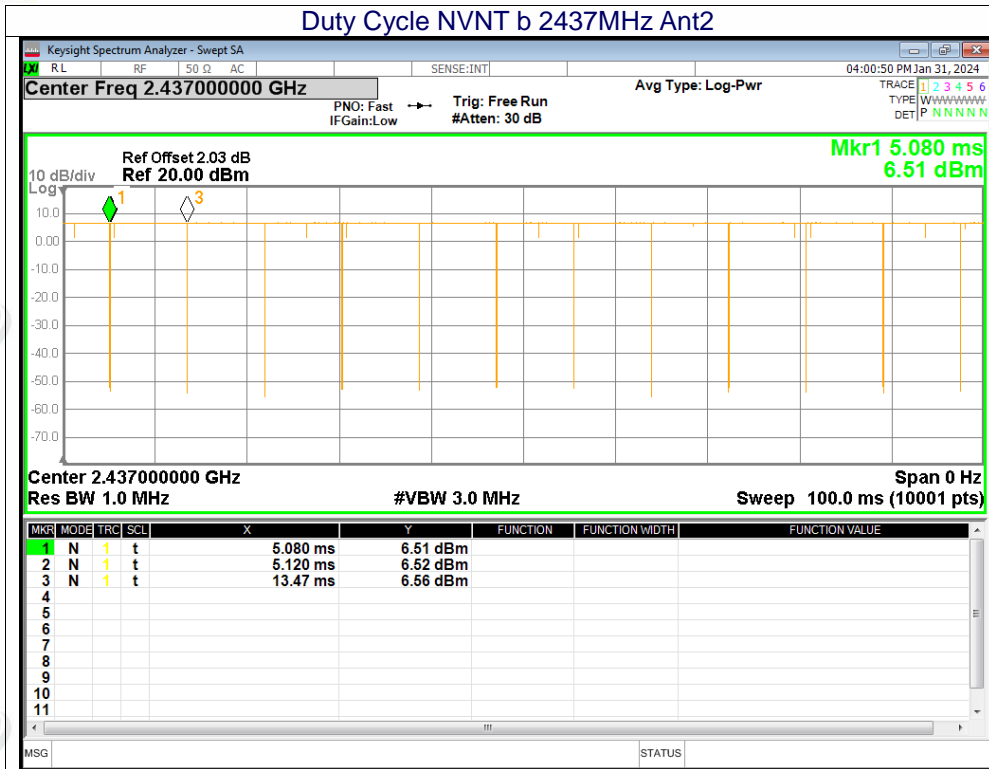


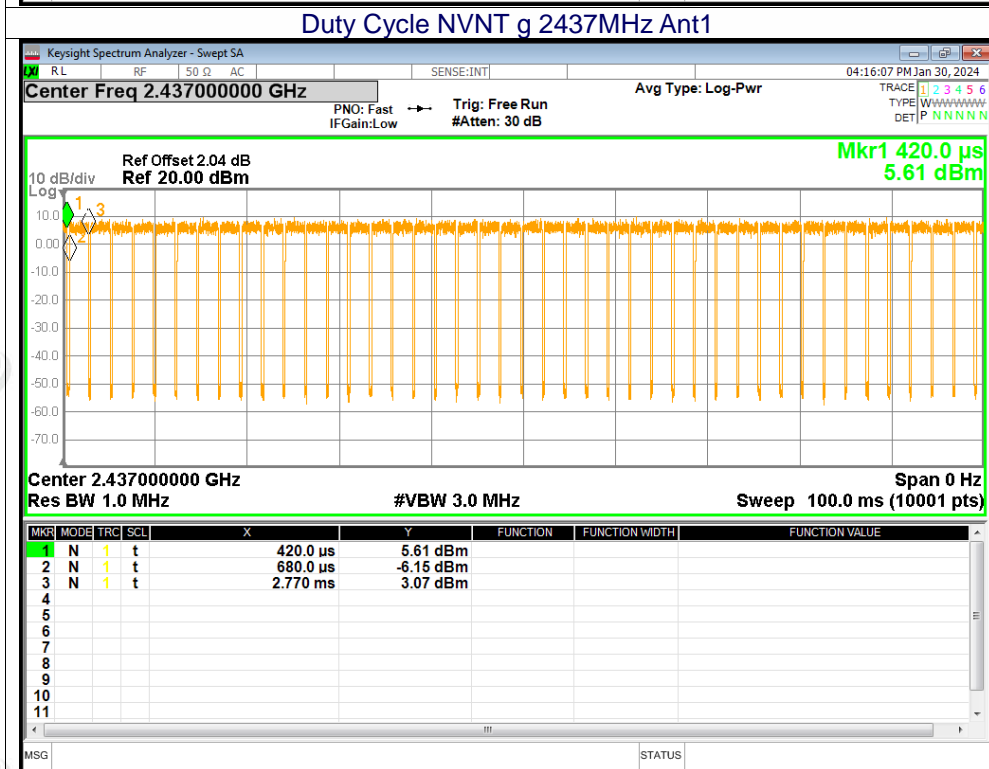
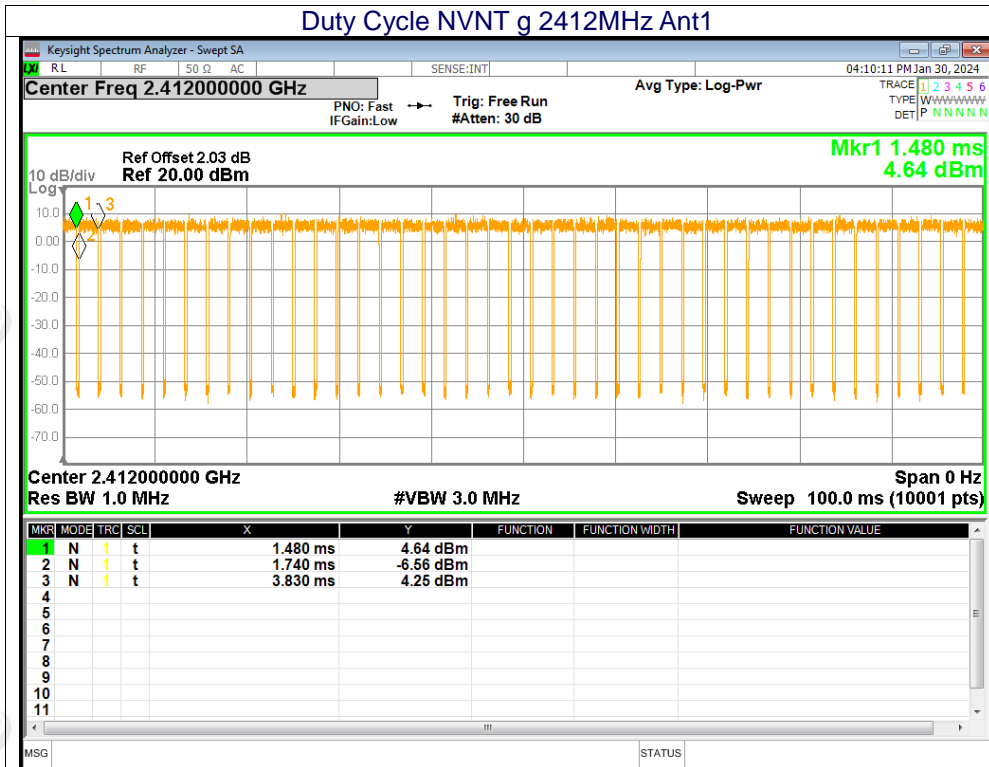


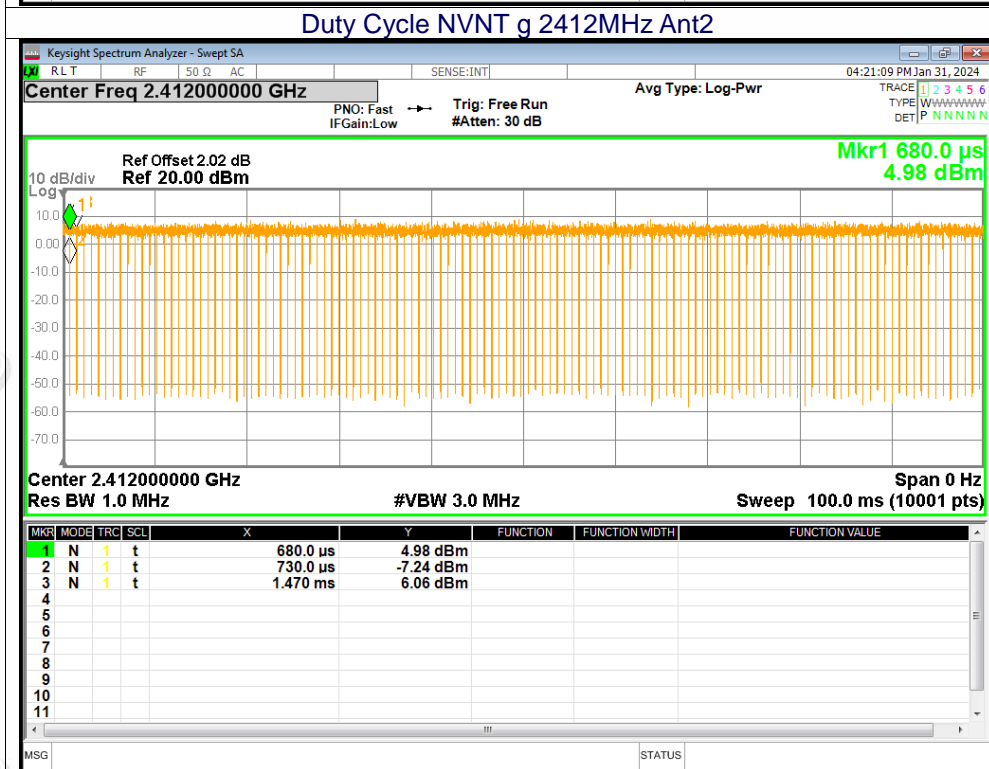
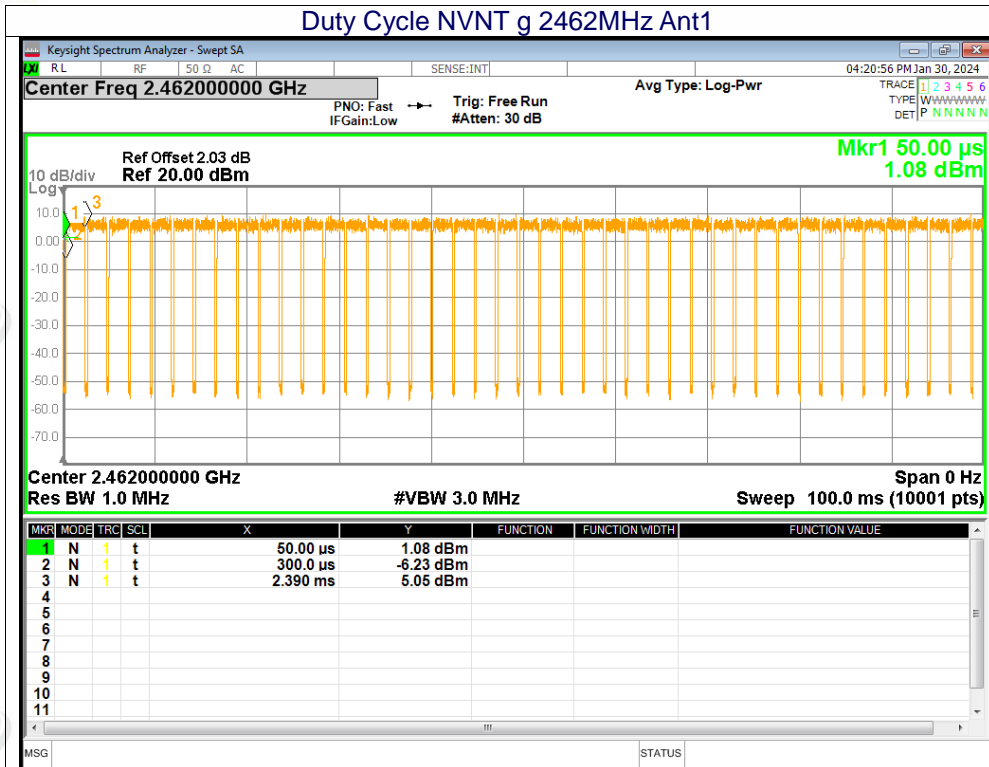


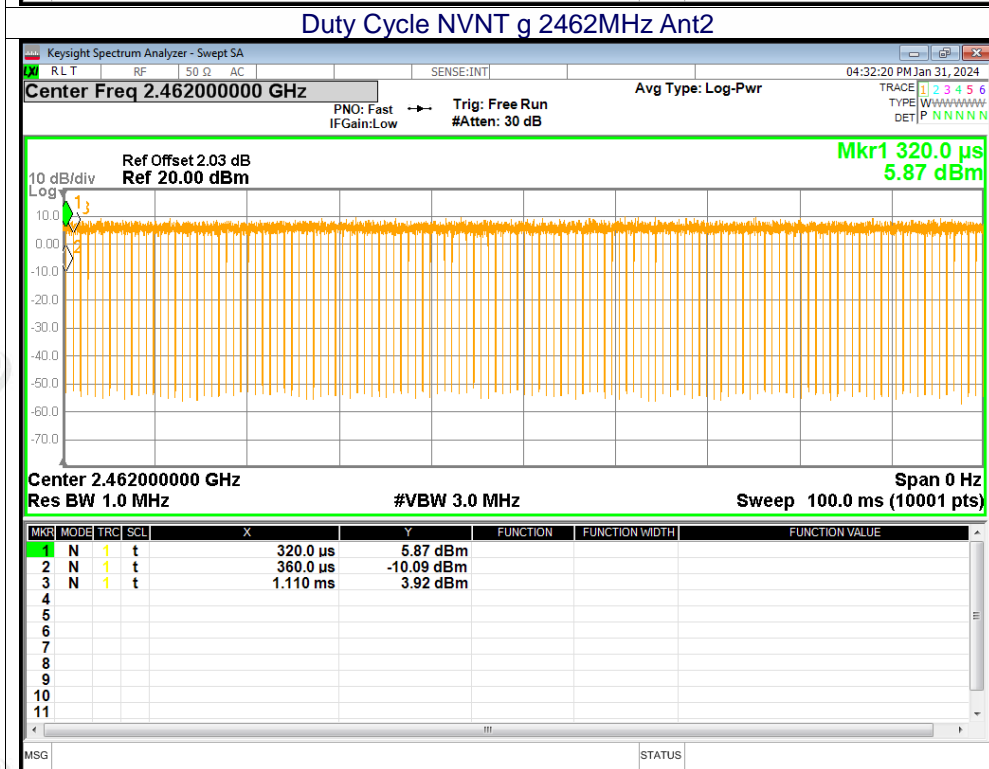
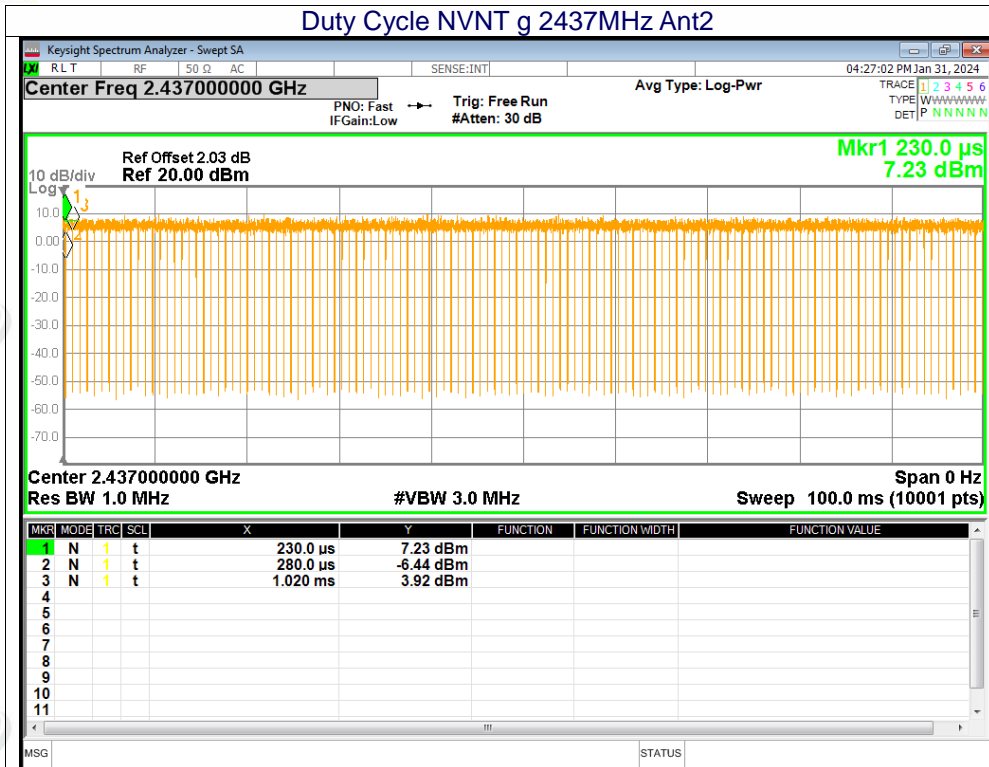


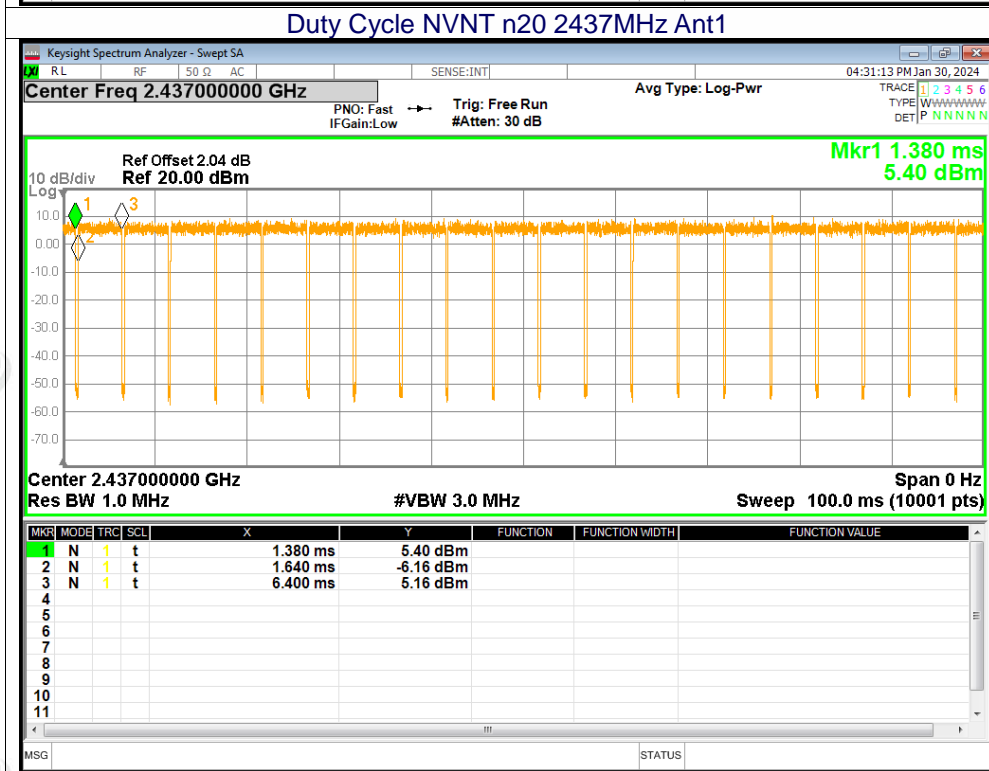
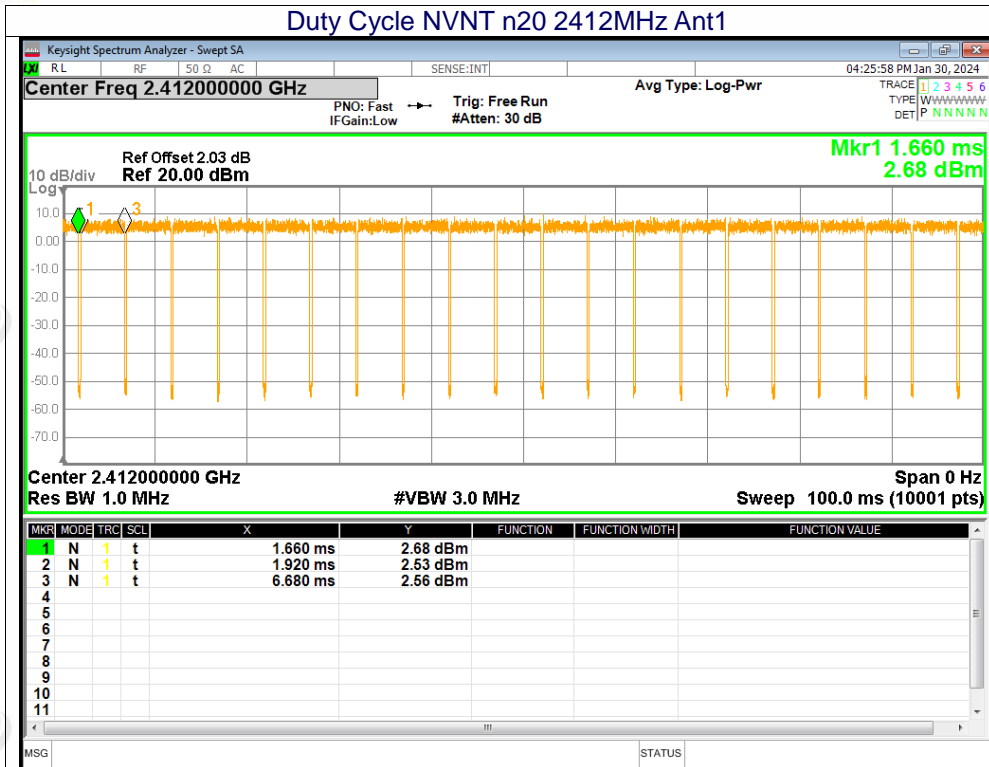


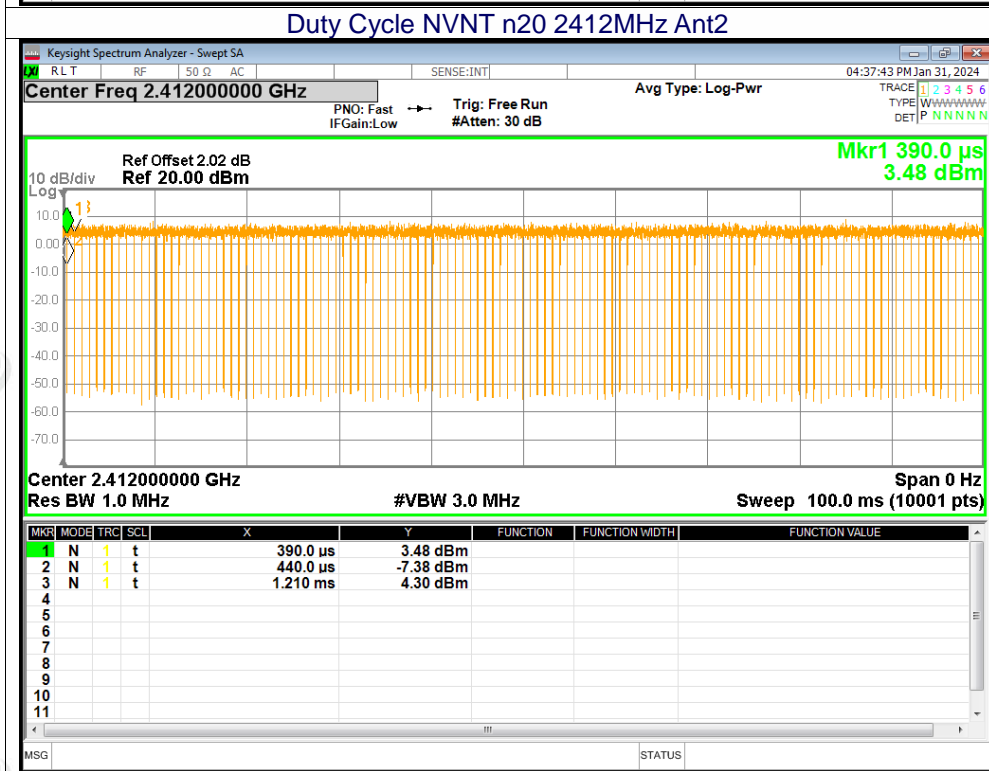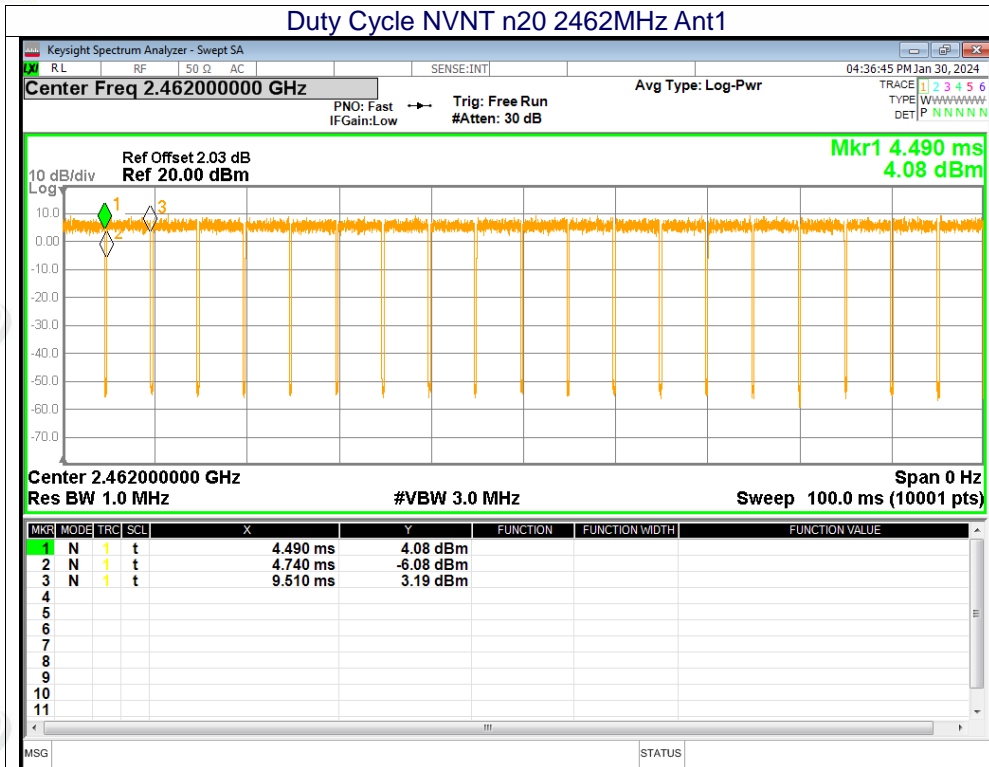

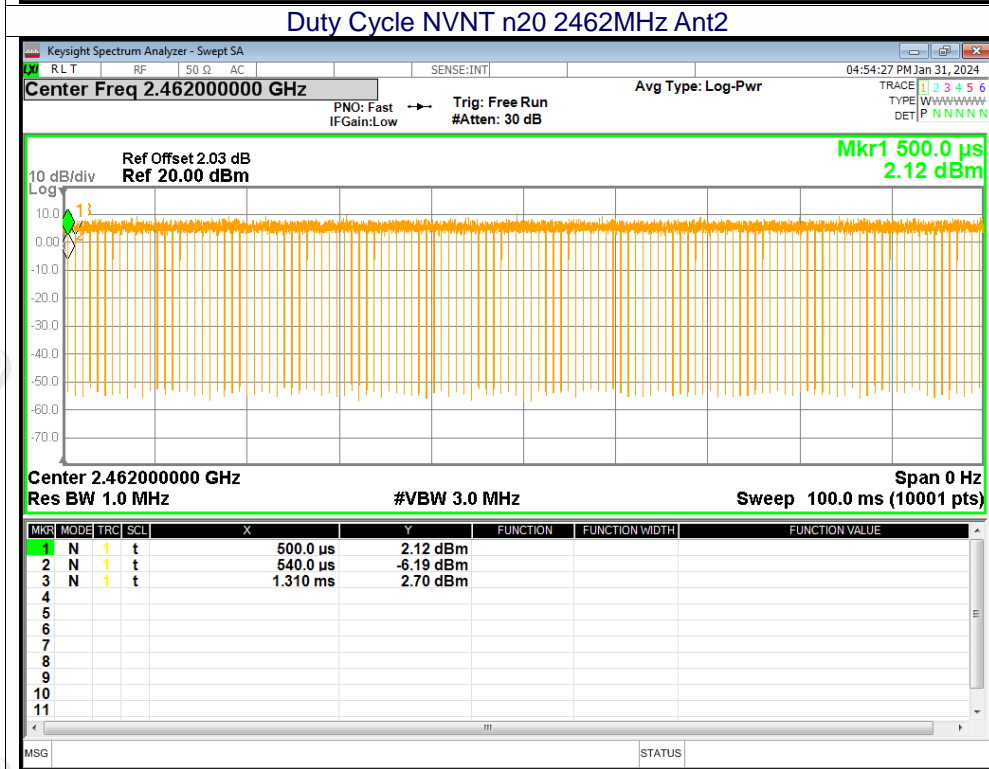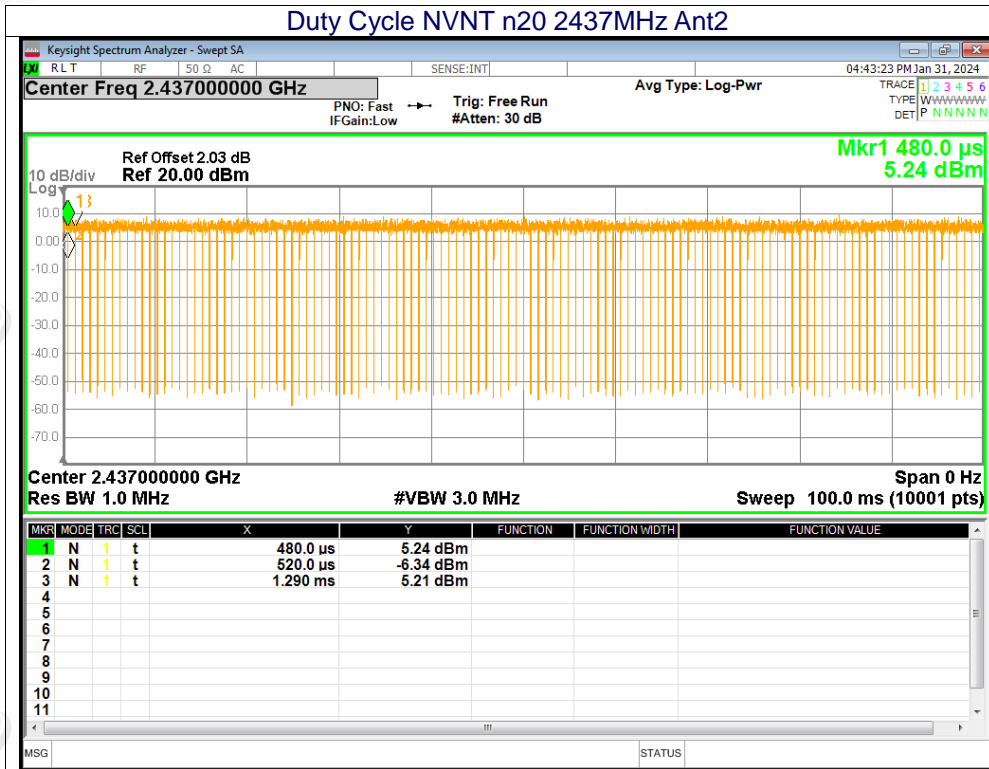

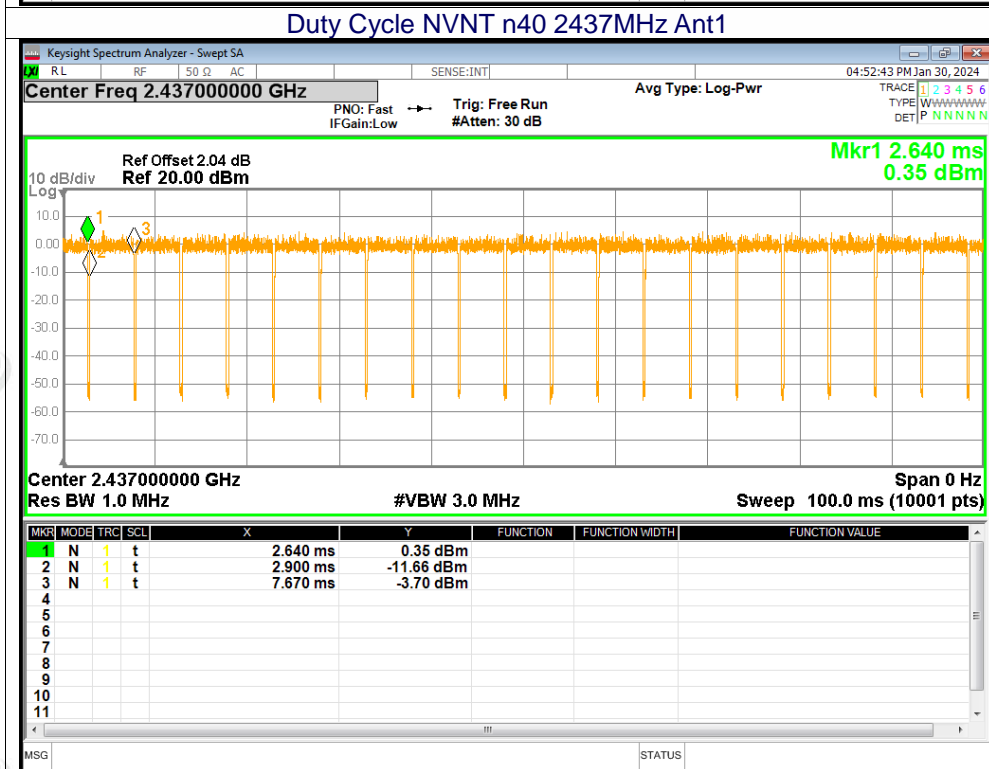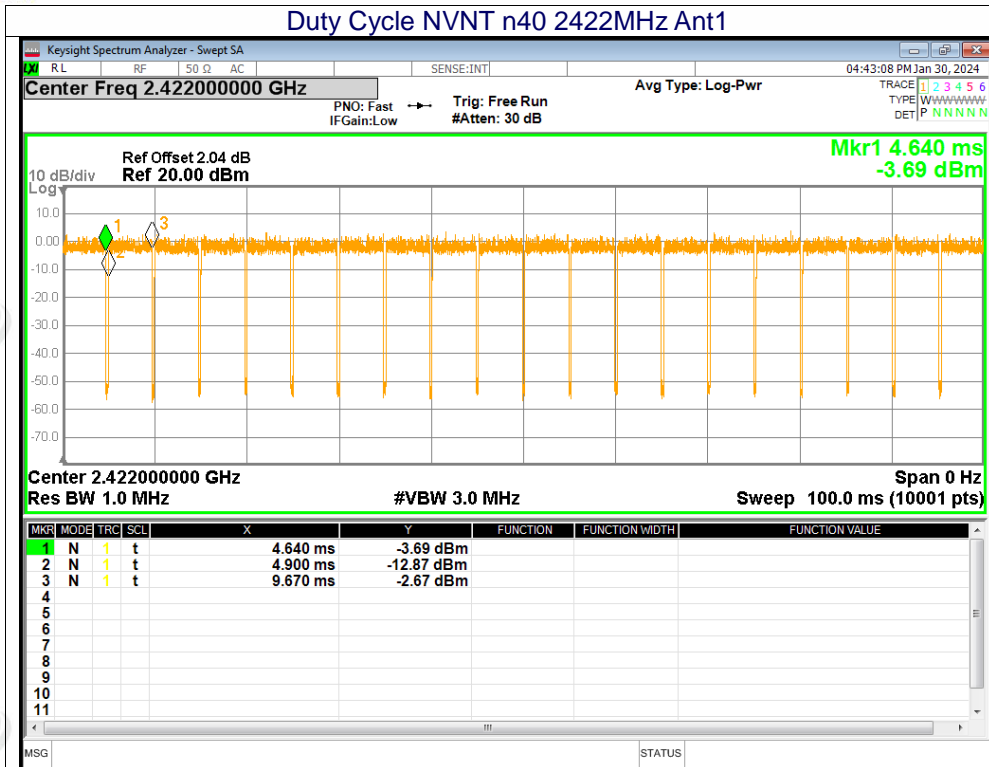

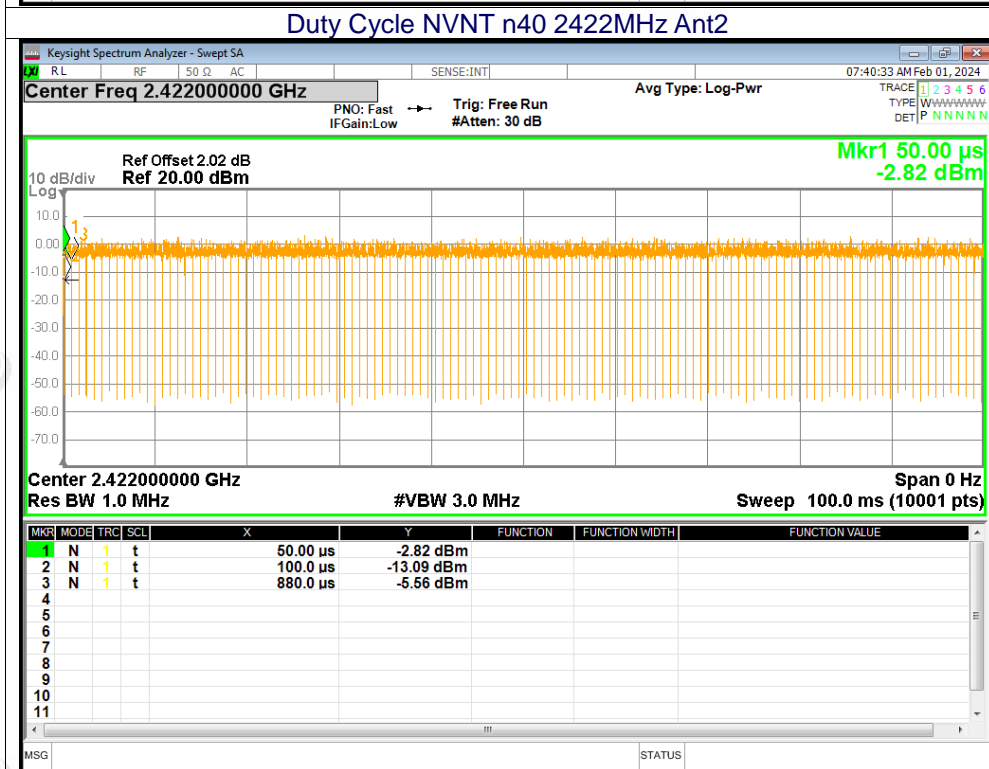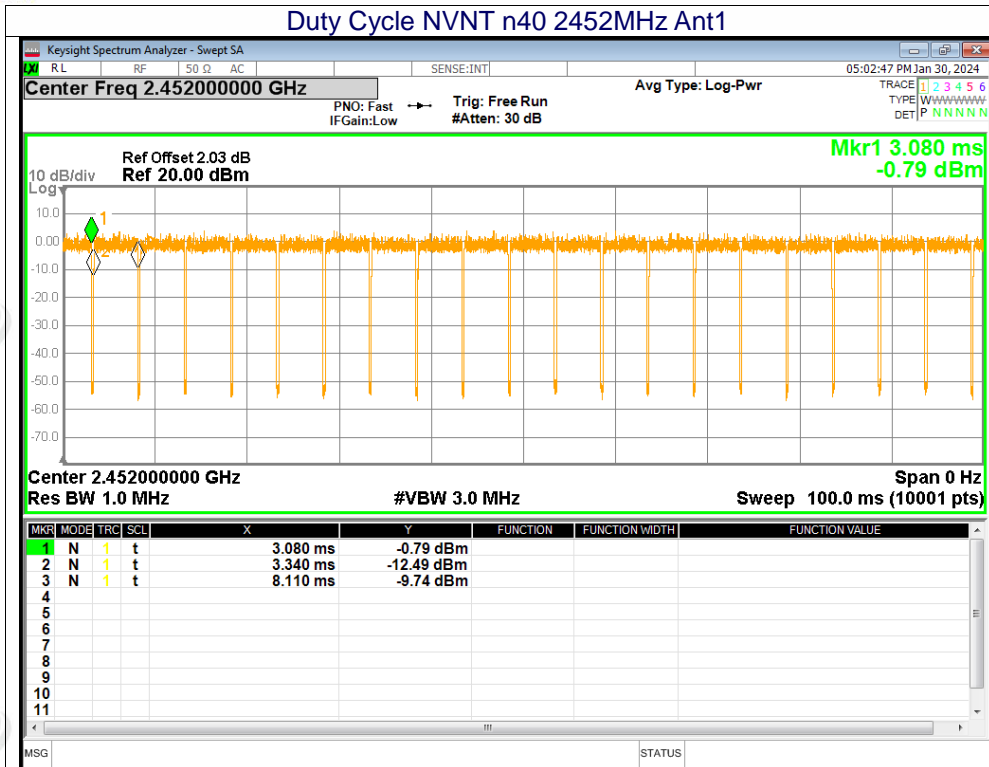

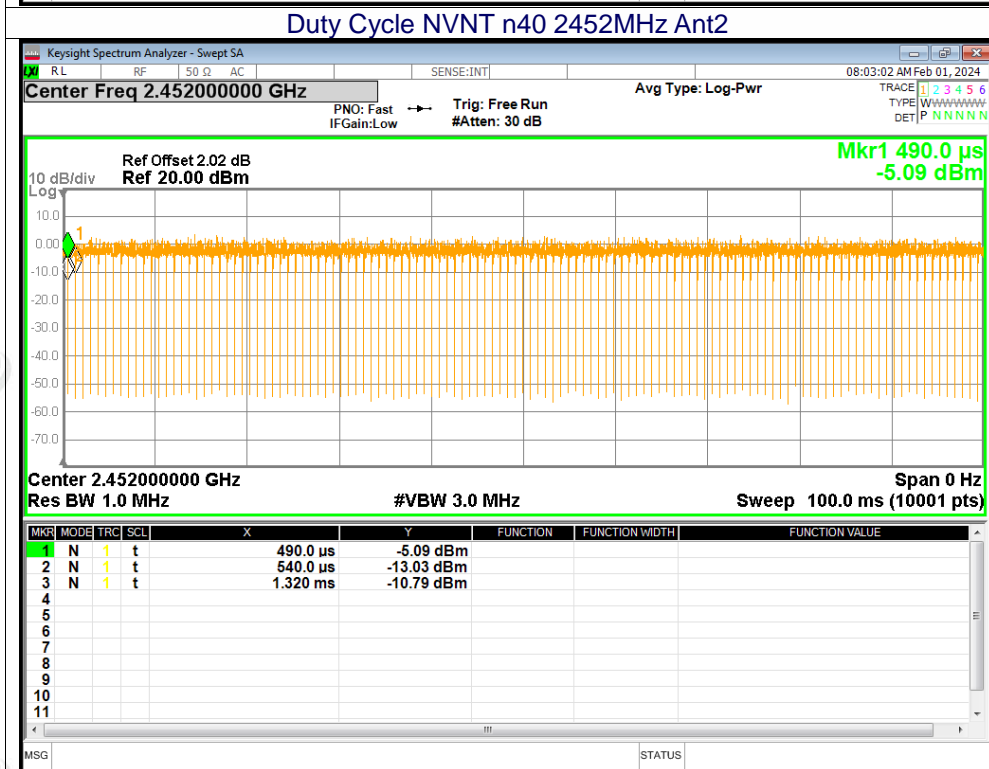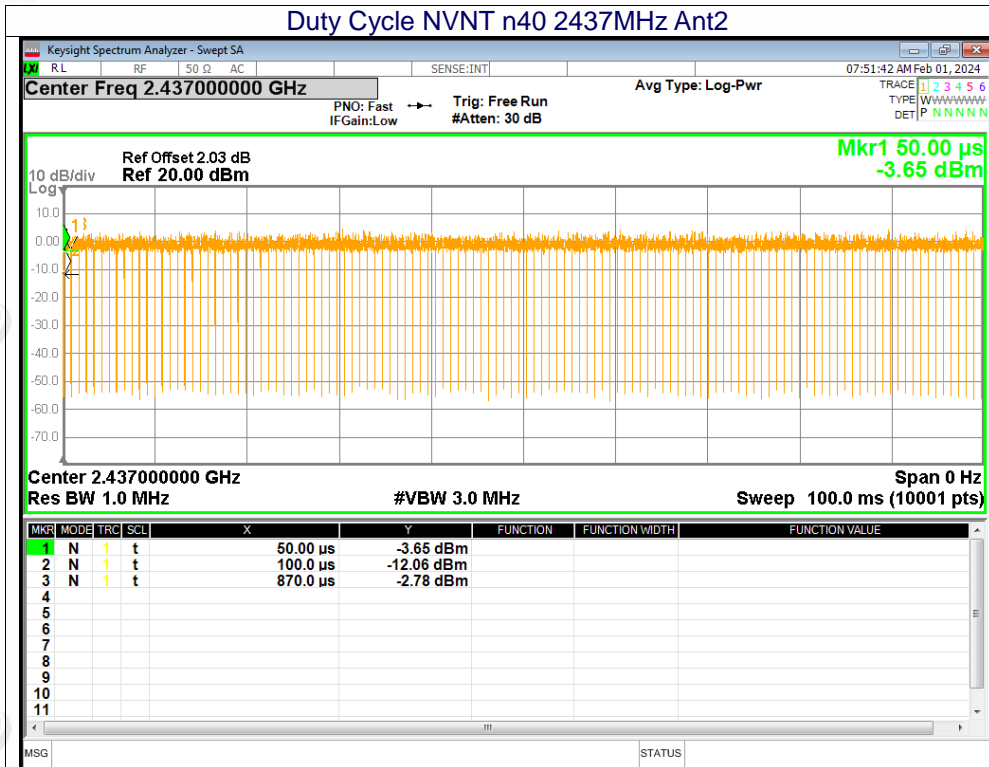



10.2 MAXIMUM AVERAGE CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	12.95	0.13	13.08	30	Pass
NVNT	b	2437	Ant1	13.16	0.13	13.29	30	Pass
NVNT	b	2462	Ant1	13.32	0.13	13.45	30	Pass
NVNT	b	2412	Ant2	12.57	0	12.57	30	Pass
NVNT	b	2437	Ant2	13	0	13	30	Pass
NVNT	b	2462	Ant2	13.4	0	13.4	30	Pass
NVNT	g	2412	Ant1	12.02	0.51	12.53	30	Pass
NVNT	g	2437	Ant1	12.33	0.51	12.84	30	Pass
NVNT	g	2462	Ant1	12.45	0.49	12.94	30	Pass
NVNT	g	2412	Ant2	11.58	0.28	11.86	30	Pass
NVNT	g	2437	Ant2	12.37	0.28	12.65	30	Pass
NVNT	g	2462	Ant2	12.54	0.23	12.77	30	Pass
NVNT	n20	2412	Ant1	12.27	0.23	12.5	30	Pass
NVNT	n20	2437	Ant1	12.44	0.23	12.67	30	Pass
NVNT	n20	2462	Ant1	12.57	0.22	12.79	30	Pass
NVNT	n20	2412	Ant2	11.41	0.27	11.68	30	Pass
NVNT	n20	2437	Ant2	12.32	0.22	12.54	30	Pass
NVNT	n20	2462	Ant2	12.49	0.22	12.71	30	Pass
NVNT	n40	2422	Ant1	11.83	0.23	12.06	30	Pass
NVNT	n40	2437	Ant1	13	0.23	13.23	30	Pass
NVNT	n40	2452	Ant1	12.27	0.23	12.5	30	Pass
NVNT	n40	2422	Ant2	11.24	0.27	11.51	30	Pass
NVNT	n40	2437	Ant2	12.53	0.27	12.8	30	Pass
NVNT	n40	2452	Ant2	11.58	0.27	11.85	30	Pass
NVNT	n20	2412	MIMO	/	/	14.87	30	Pass
NVNT	n20	2437	MIMO	/	/	15.39	30	Pass
NVNT	n20	2462	MIMO	/	/	15.54	30	Pass
NVNT	n40	2422	MIMO	/	/	14.56	30	Pass
NVNT	n40	2437	MIMO	/	/	15.78	30	Pass
NVNT	n40	2452	MIMO	/	/	14.95	30	Pass



10.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.45	30	Pass
NVNT	b	2437	Ant1	14.7	30	Pass
NVNT	b	2462	Ant1	14.75	30	Pass
NVNT	b	2412	Ant2	13.94	30	Pass
NVNT	b	2437	Ant2	14.39	30	Pass
NVNT	b	2462	Ant2	14.68	30	Pass
NVNT	g	2412	Ant1	16.99	30	Pass
NVNT	g	2437	Ant1	17.23	30	Pass
NVNT	g	2462	Ant1	17.38	30	Pass
NVNT	g	2412	Ant2	16.4	30	Pass
NVNT	g	2437	Ant2	17.15	30	Pass
NVNT	g	2462	Ant2	17.28	30	Pass
NVNT	n20	2412	Ant1	16.89	30	Pass
NVNT	n20	2437	Ant1	17.19	30	Pass
NVNT	n20	2462	Ant1	17.26	30	Pass
NVNT	n20	2412	Ant2	16.2	30	Pass
NVNT	n20	2437	Ant2	17.02	30	Pass
NVNT	n20	2462	Ant2	17.31	30	Pass
NVNT	n40	2422	Ant1	16.5	30	Pass
NVNT	n40	2437	Ant1	17.7	30	Pass
NVNT	n40	2452	Ant1	17.16	30	Pass
NVNT	n40	2422	Ant2	15.96	30	Pass
NVNT	n40	2437	Ant2	17.31	30	Pass
NVNT	n40	2452	Ant2	16.28	30	Pass
NVNT	n20	2412	MIMO	19.57	30	Pass
NVNT	n20	2437	MIMO	20.12	30	Pass
NVNT	n20	2462	MIMO	20.30	30	Pass
NVNT	n40	2422	MIMO	19.25	30	Pass
NVNT	n40	2437	MIMO	20.52	30	Pass
NVNT	n40	2452	MIMO	19.75	30	Pass




10.4 6DB BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	6 dB Bandwidth (MHz)	Limit 6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.024	0.5	Pass
NVNT	b	2437	Ant1	10.051	0.5	Pass
NVNT	b	2462	Ant1	10.103	0.5	Pass
NVNT	b	2412	Ant2	10.089	0.5	Pass
NVNT	b	2437	Ant2	10.111	0.5	Pass
NVNT	b	2462	Ant2	10.073	0.5	Pass
NVNT	g	2412	Ant1	15.055	0.5	Pass
NVNT	g	2437	Ant1	11.962	0.5	Pass
NVNT	g	2462	Ant1	11.9	0.5	Pass
NVNT	g	2412	Ant2	15.073	0.5	Pass
NVNT	g	2437	Ant2	13.893	0.5	Pass
NVNT	g	2462	Ant2	13.838	0.5	Pass
NVNT	n20	2412	Ant1	12.962	0.5	Pass
NVNT	n20	2437	Ant1	14.982	0.5	Pass
NVNT	n20	2462	Ant1	17.544	0.5	Pass
NVNT	n20	2412	Ant2	15.085	0.5	Pass
NVNT	n20	2437	Ant2	13.857	0.5	Pass
NVNT	n20	2462	Ant2	15.06	0.5	Pass
NVNT	n40	2422	Ant1	29.692	0.5	Pass
NVNT	n40	2437	Ant1	31.918	0.5	Pass
NVNT	n40	2452	Ant1	27.159	0.5	Pass
NVNT	n40	2422	Ant2	35.041	0.5	Pass
NVNT	n40	2437	Ant2	35.045	0.5	Pass
NVNT	n40	2452	Ant2	33.818	0.5	Pass



Test Graphs



6dB Bandwidth NVNT b 2412MHz Ant1


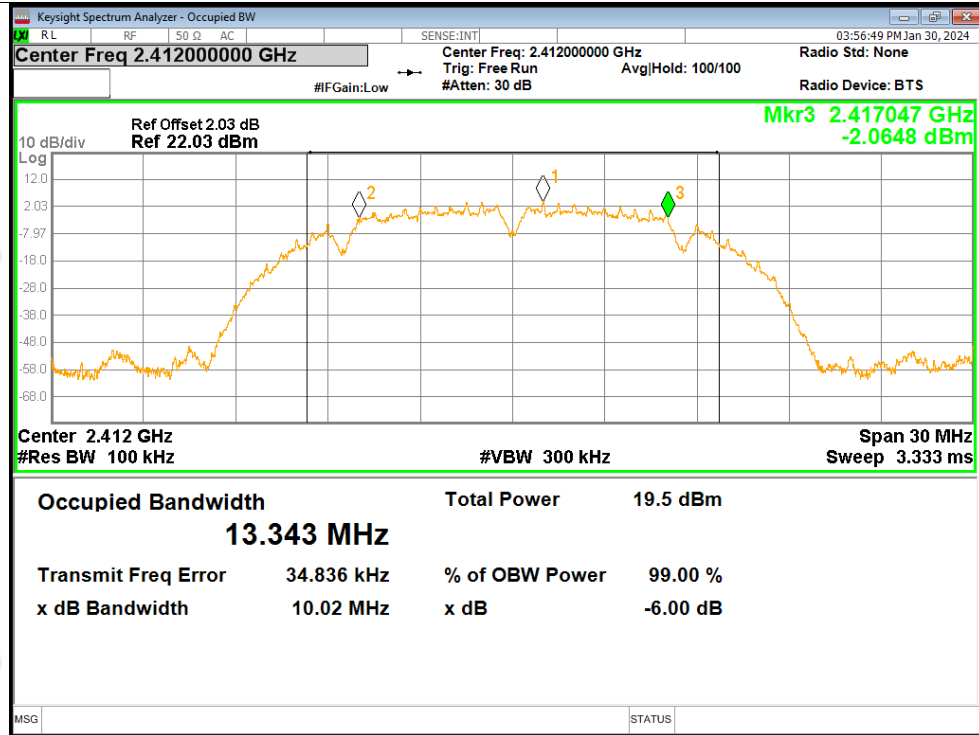




6dB Bandwidth NVNT b 2437MHz Ant1

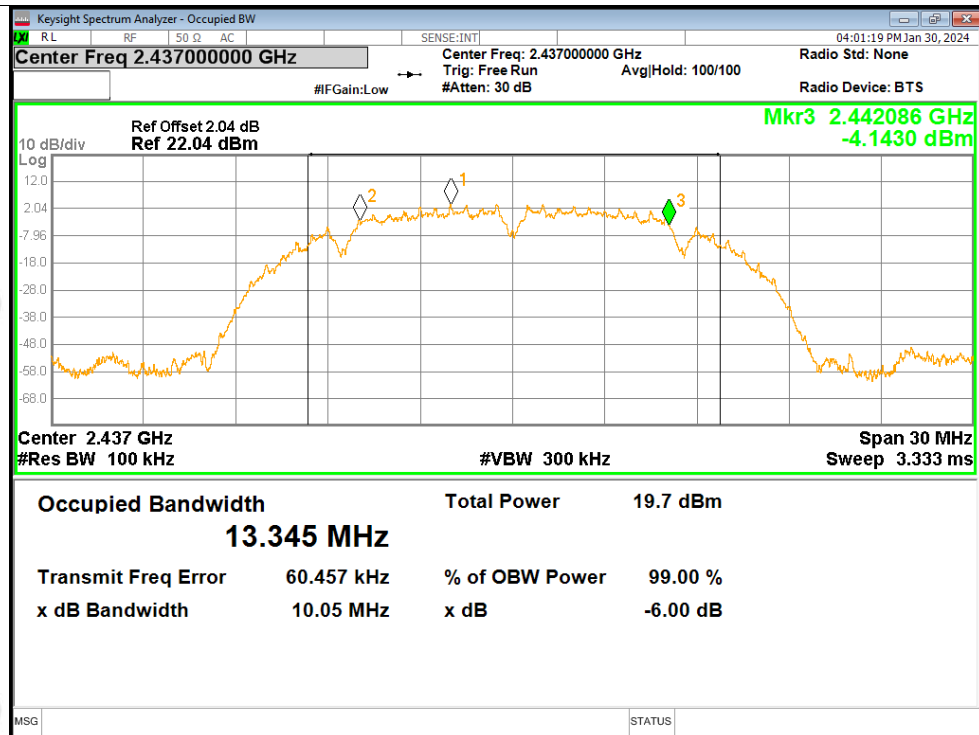

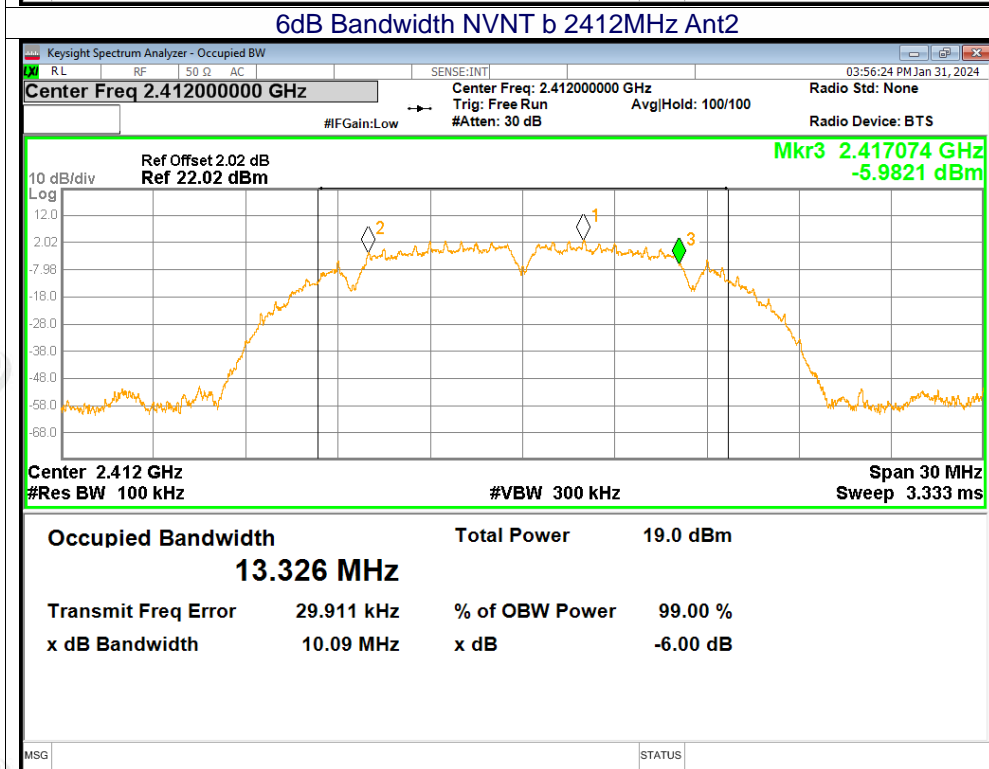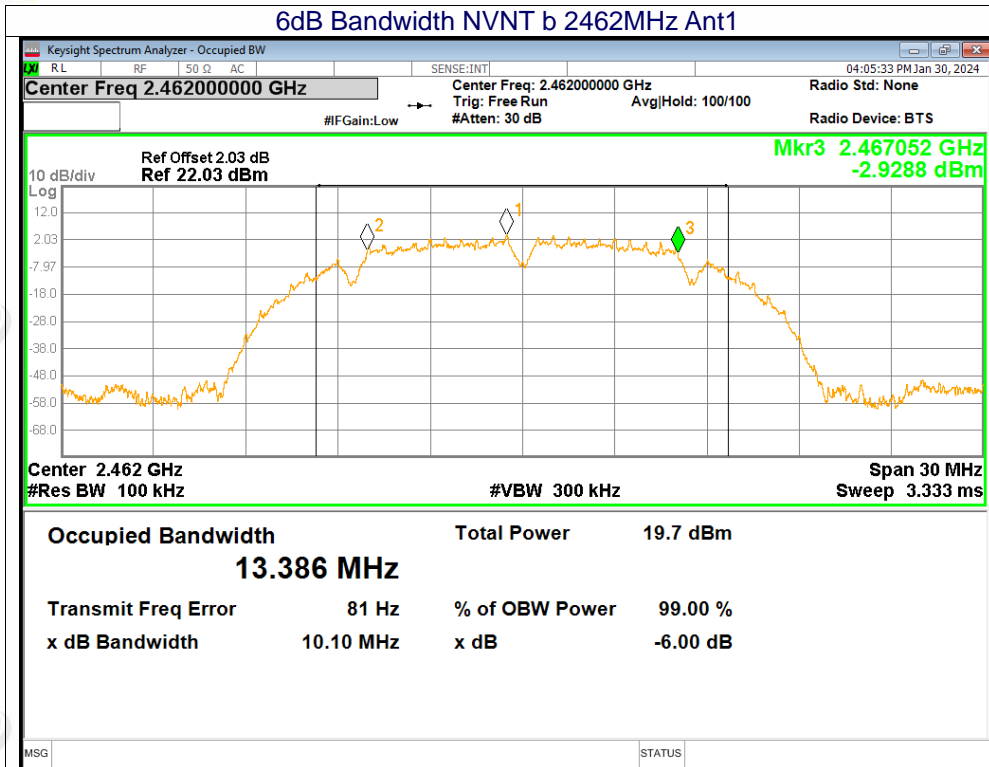


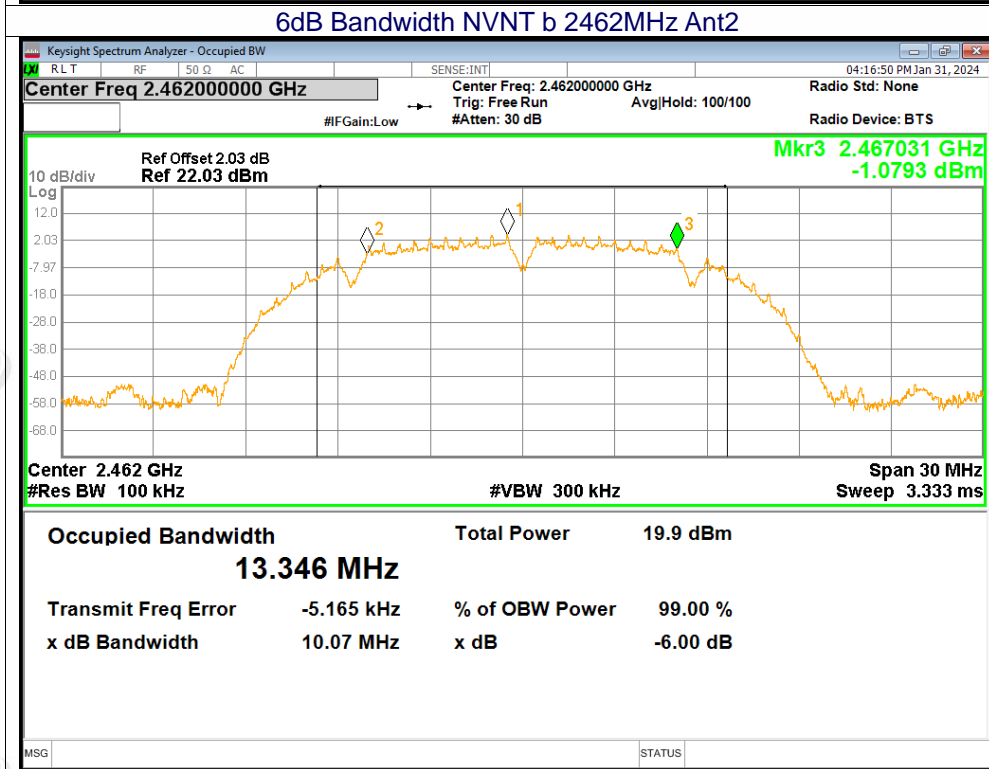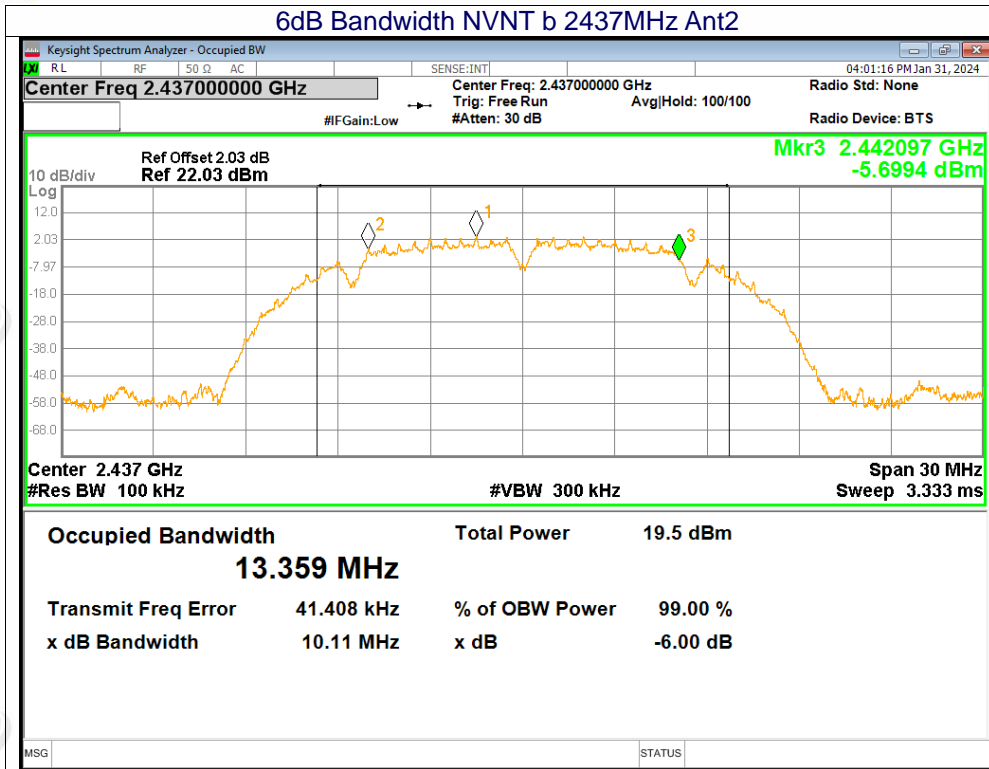

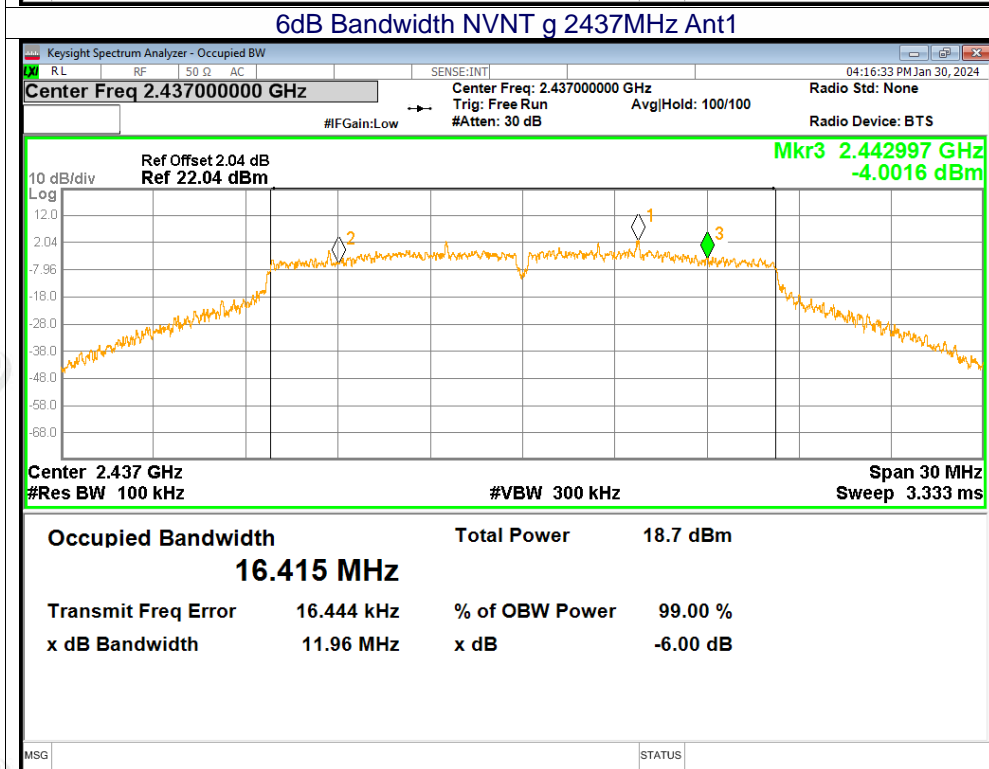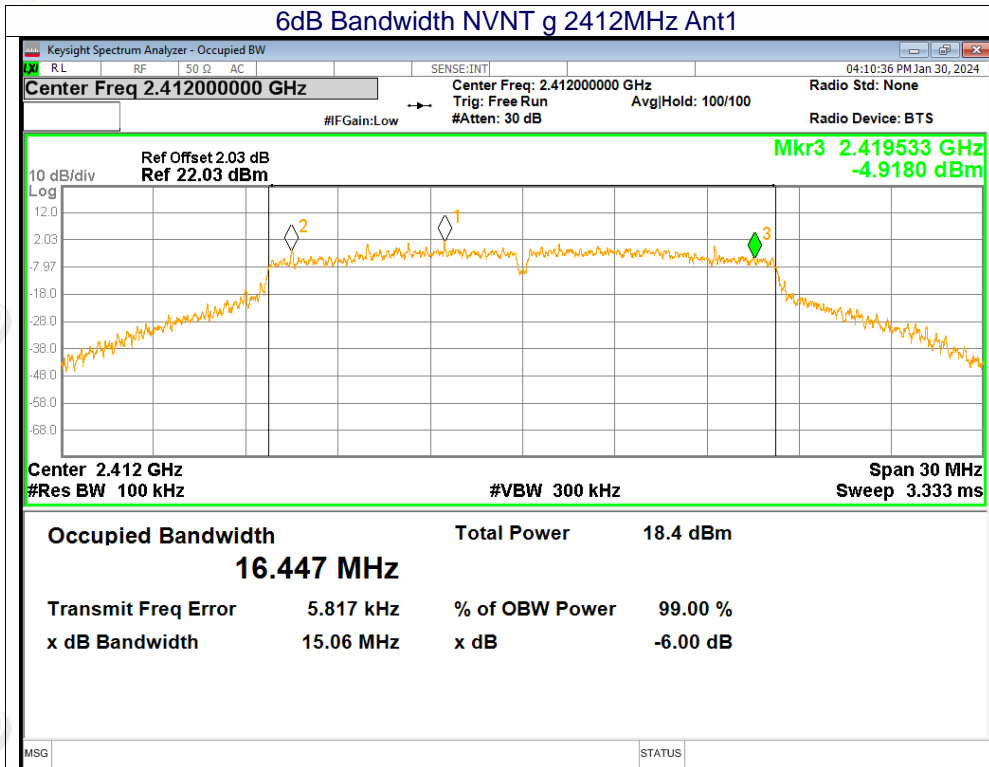


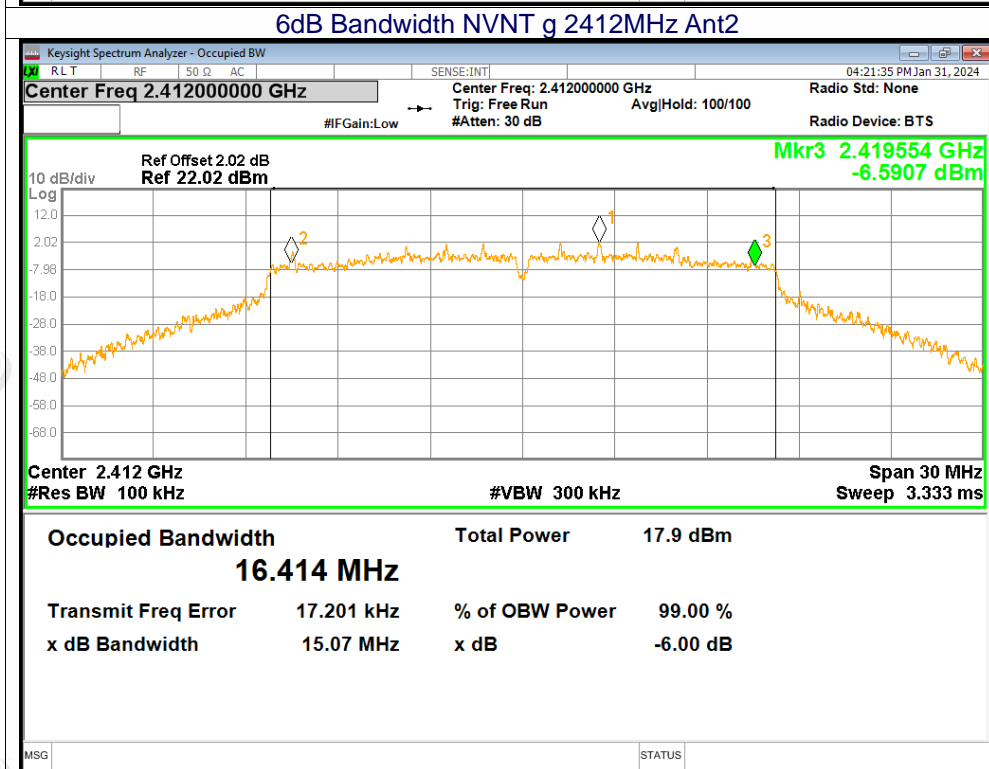
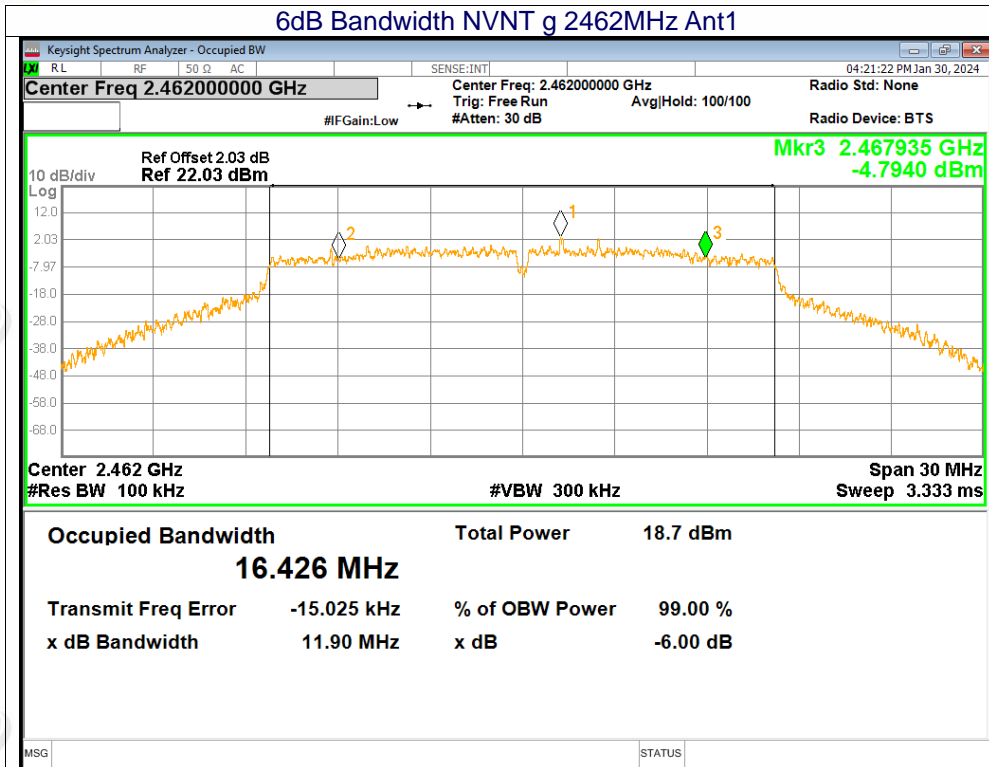


6dB Bandwidth NVNT g 2437MHz Ant2

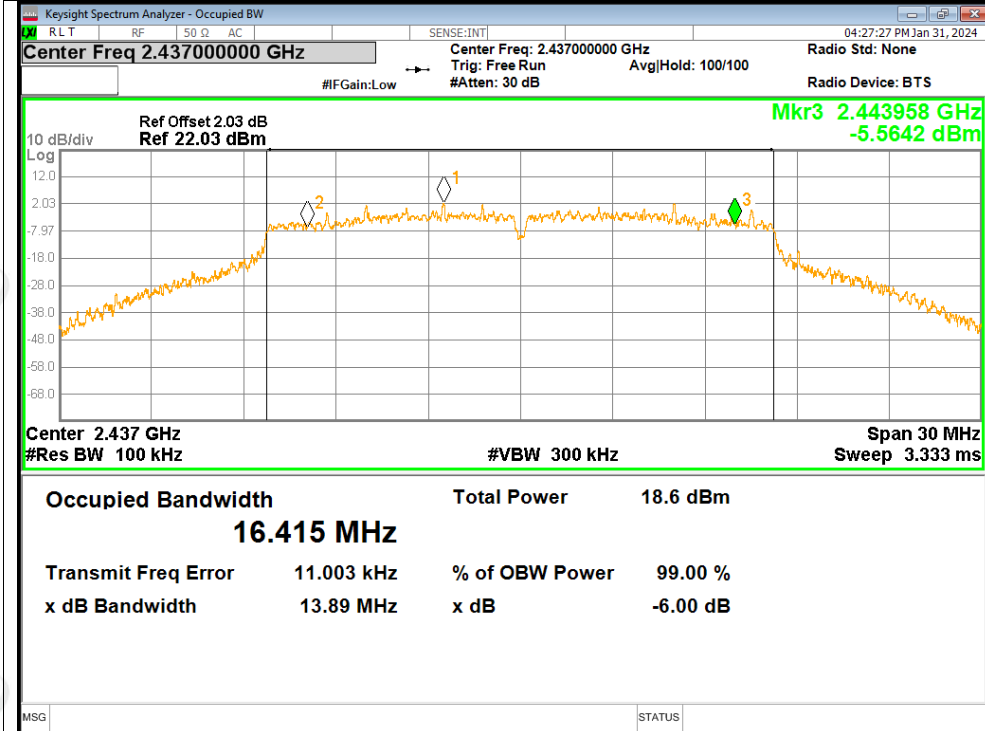


6dB Bandwidth NVNT g 2462MHz Ant2

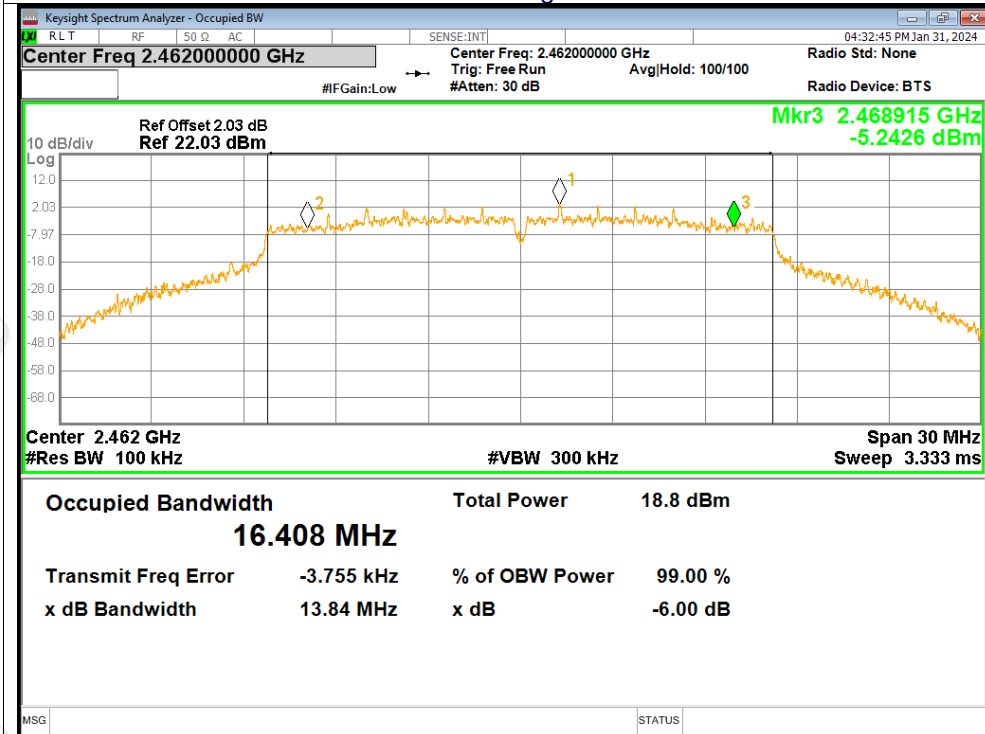

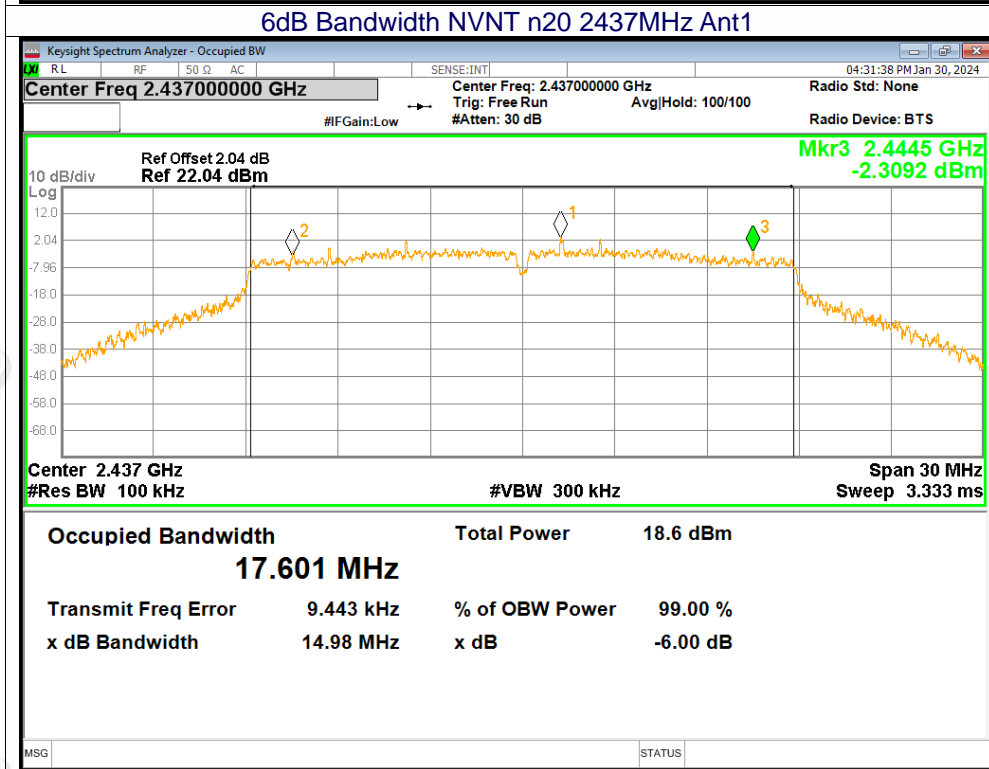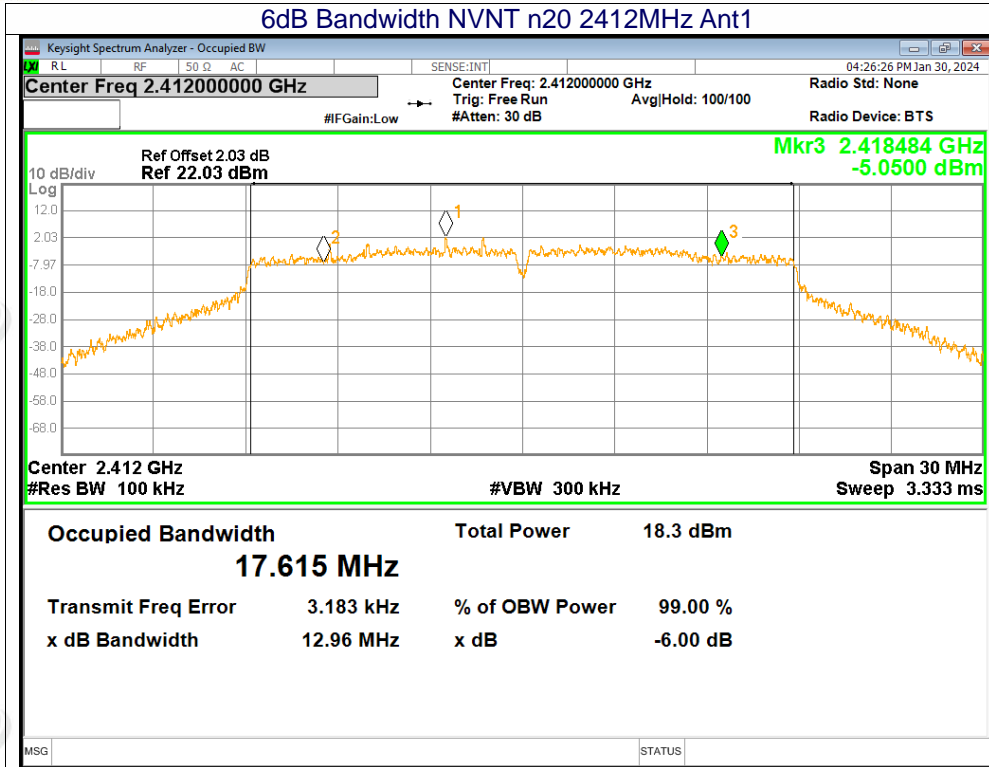




6dB Bandwidth NVNT n20 2462MHz Ant1

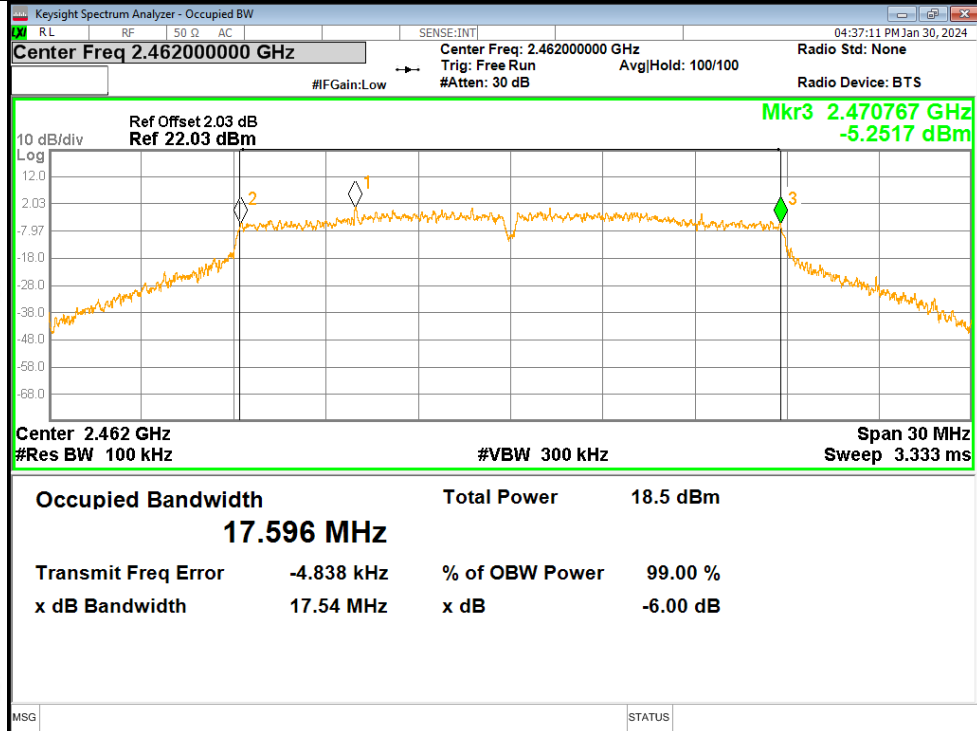


6dB Bandwidth NVNT n20 2412MHz Ant2

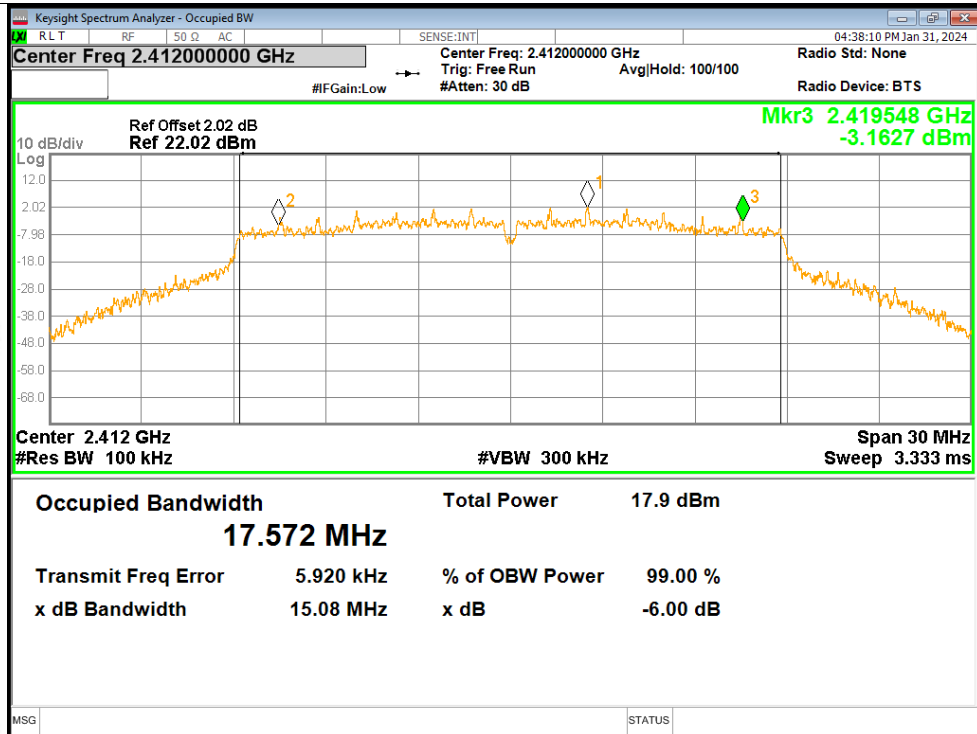






6dB Bandwidth NVNT n20 2437MHz Ant2

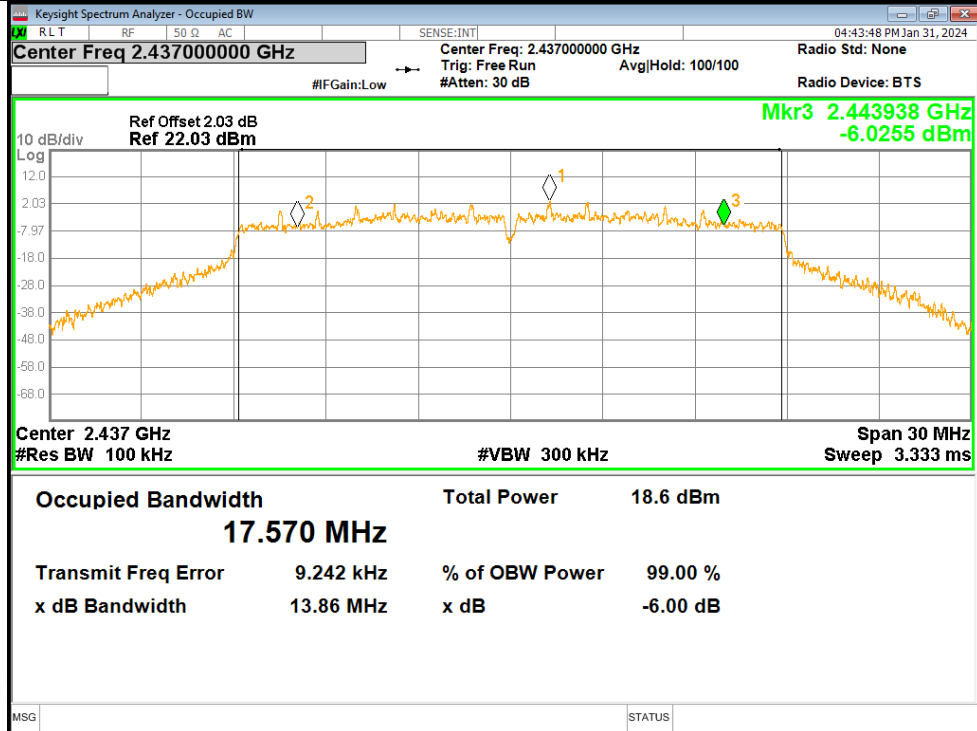


6dB Bandwidth NVNT n20 2462MHz Ant2

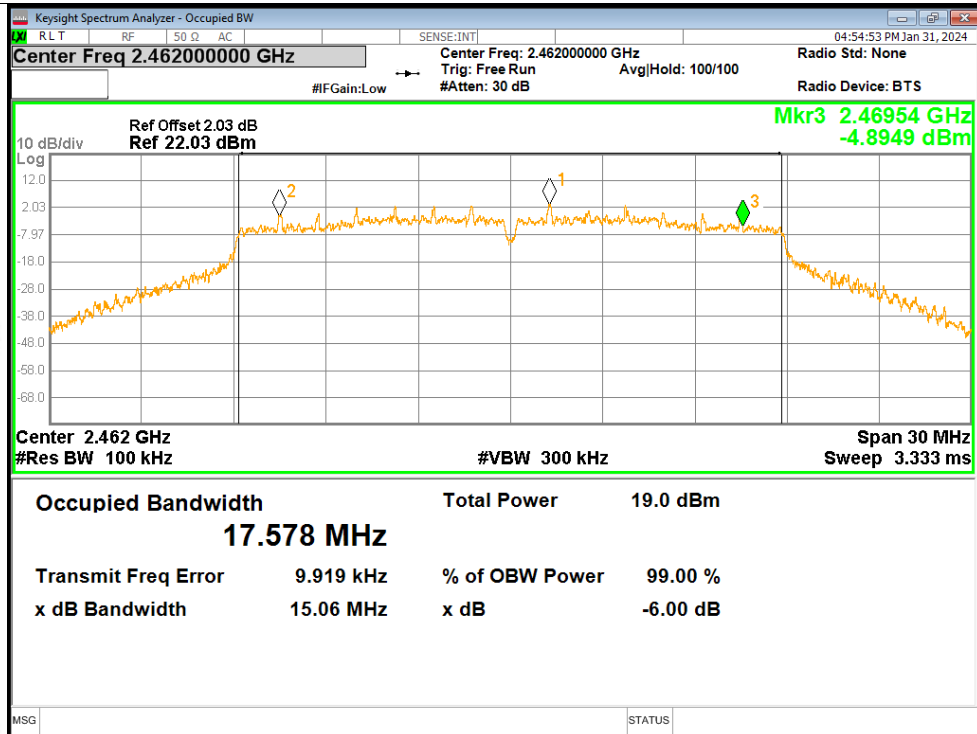

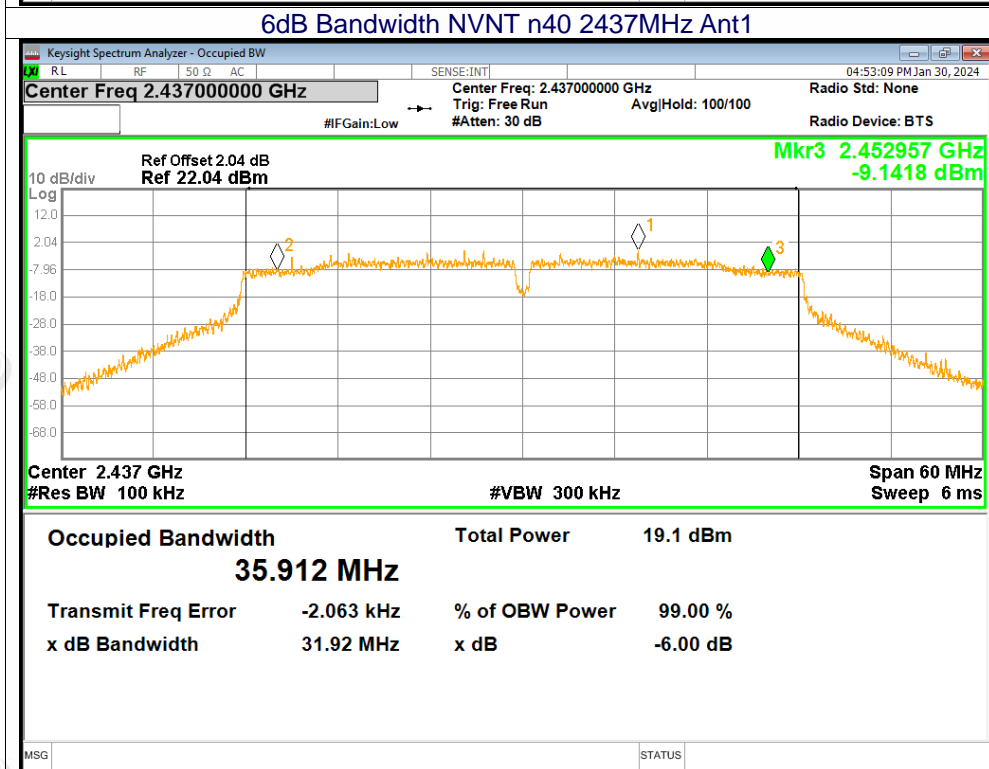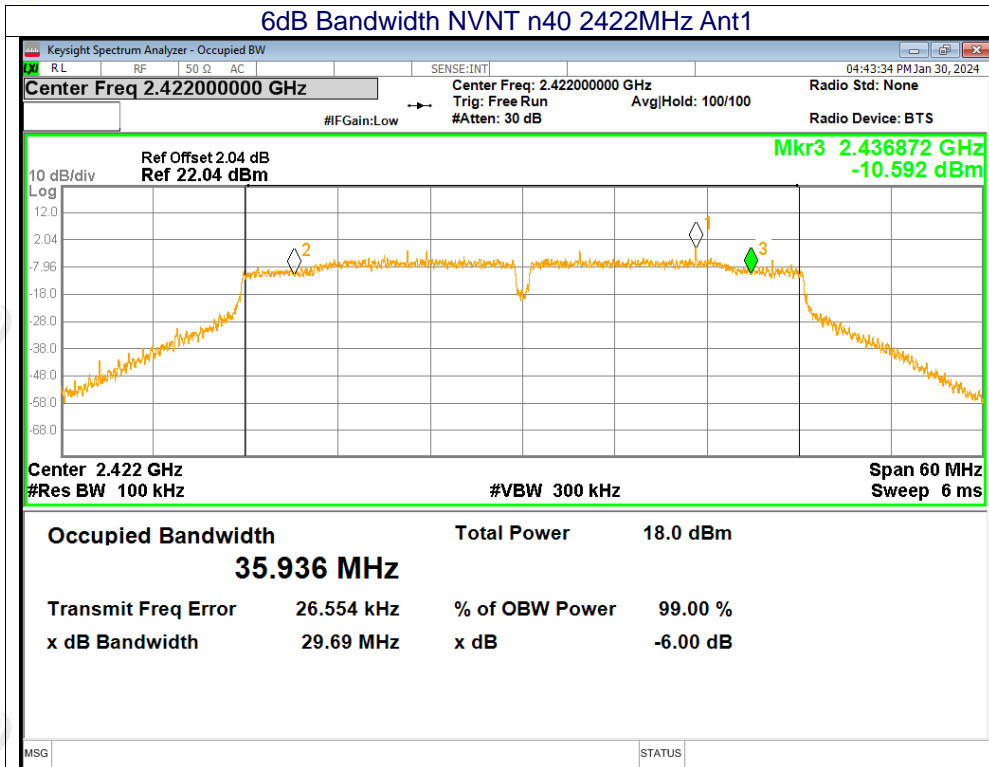




6dB Bandwidth NVNT n40 2452MHz Ant1

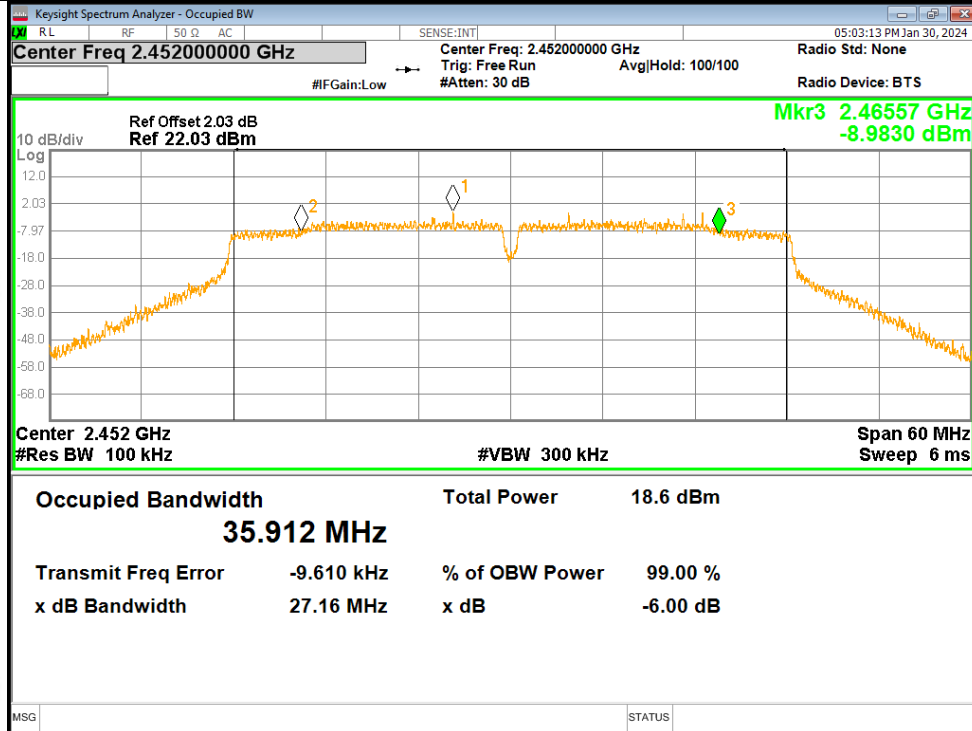


6dB Bandwidth NVNT n40 2422MHz Ant2

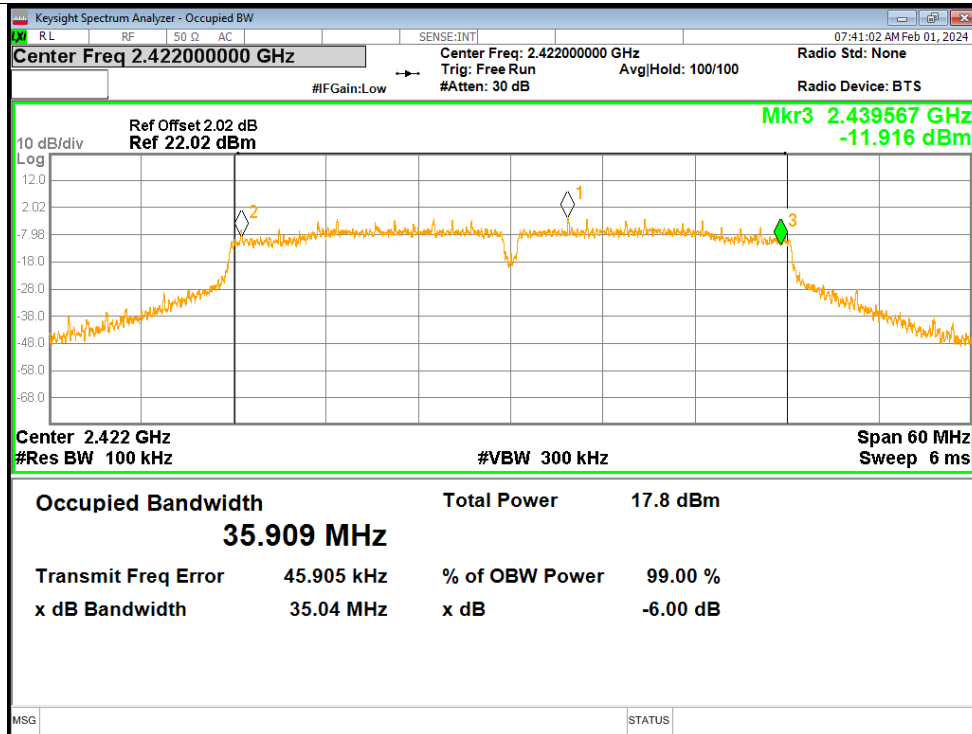




6dB Bandwidth NVNT n40 2437MHz Ant2

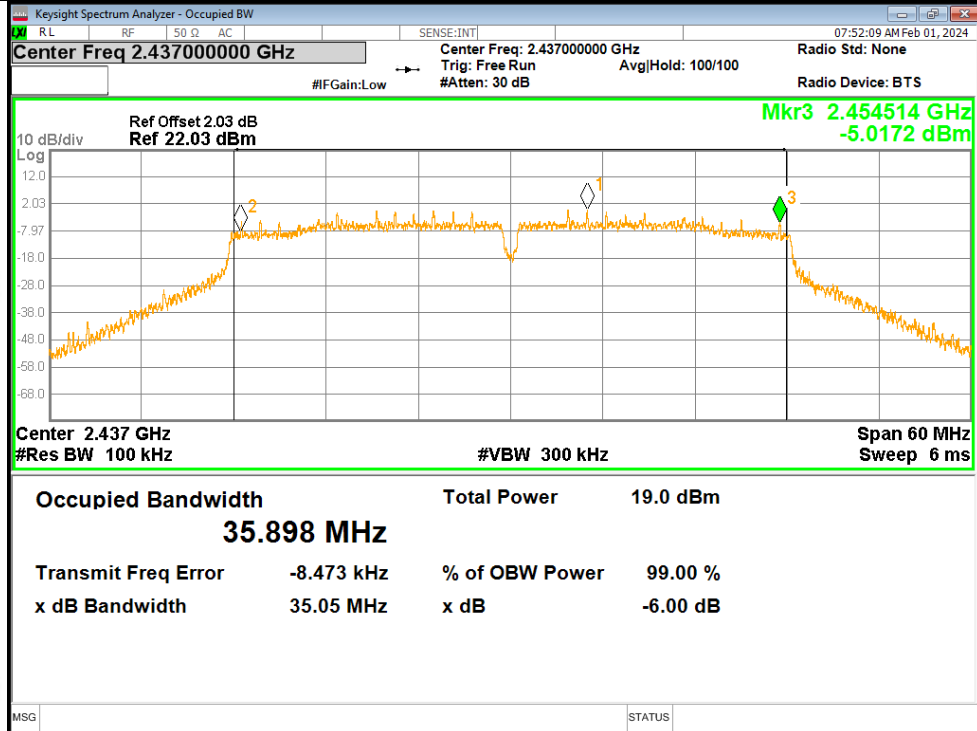

6dB Bandwidth NVNT n40 2452MHz Ant2

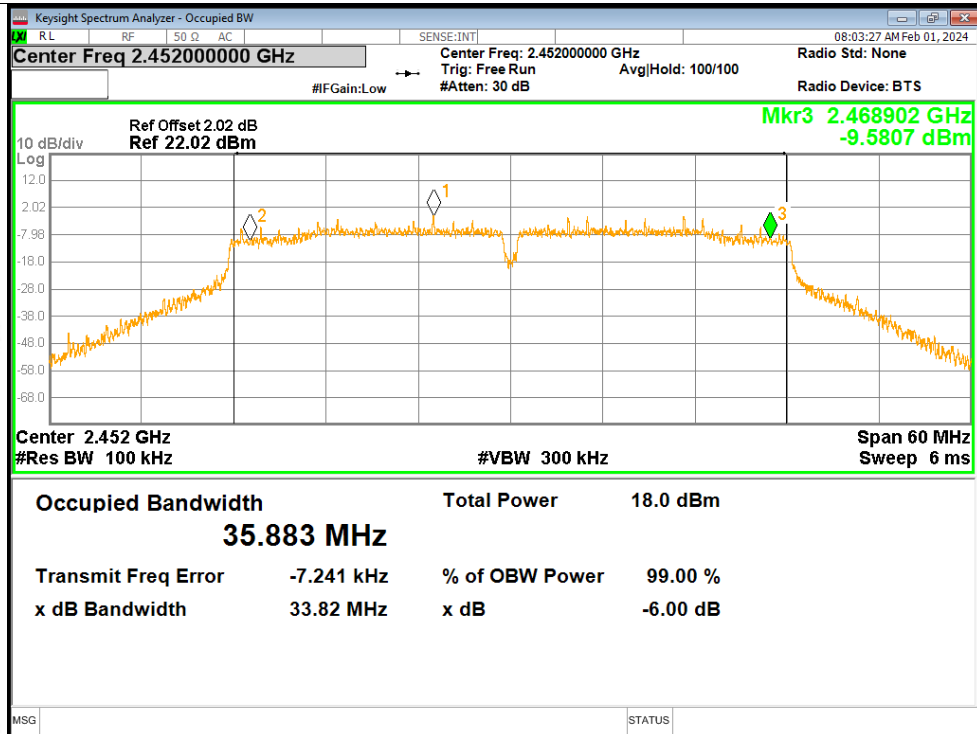





10.5 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	13.336
NVNT	b	2437	Ant1	13.327
NVNT	b	2462	Ant1	13.322
NVNT	b	2412	Ant2	13.33
NVNT	b	2437	Ant2	13.322
NVNT	b	2462	Ant2	13.339
NVNT	g	2412	Ant1	16.476
NVNT	g	2437	Ant1	16.463
NVNT	g	2462	Ant1	16.501
NVNT	g	2412	Ant2	16.483
NVNT	g	2437	Ant2	16.471
NVNT	g	2462	Ant2	16.453
NVNT	n20	2412	Ant1	17.655
NVNT	n20	2437	Ant1	17.638
NVNT	n20	2462	Ant1	17.637
NVNT	n20	2412	Ant2	17.597
NVNT	n20	2437	Ant2	17.638
NVNT	n20	2462	Ant2	17.62
NVNT	n40	2422	Ant1	35.97
NVNT	n40	2437	Ant1	35.943
NVNT	n40	2452	Ant1	35.94
NVNT	n40	2422	Ant2	36.006
NVNT	n40	2437	Ant2	35.943
NVNT	n40	2452	Ant2	35.981

Test Graphs
OBW NVNT b 2412MHz Ant1

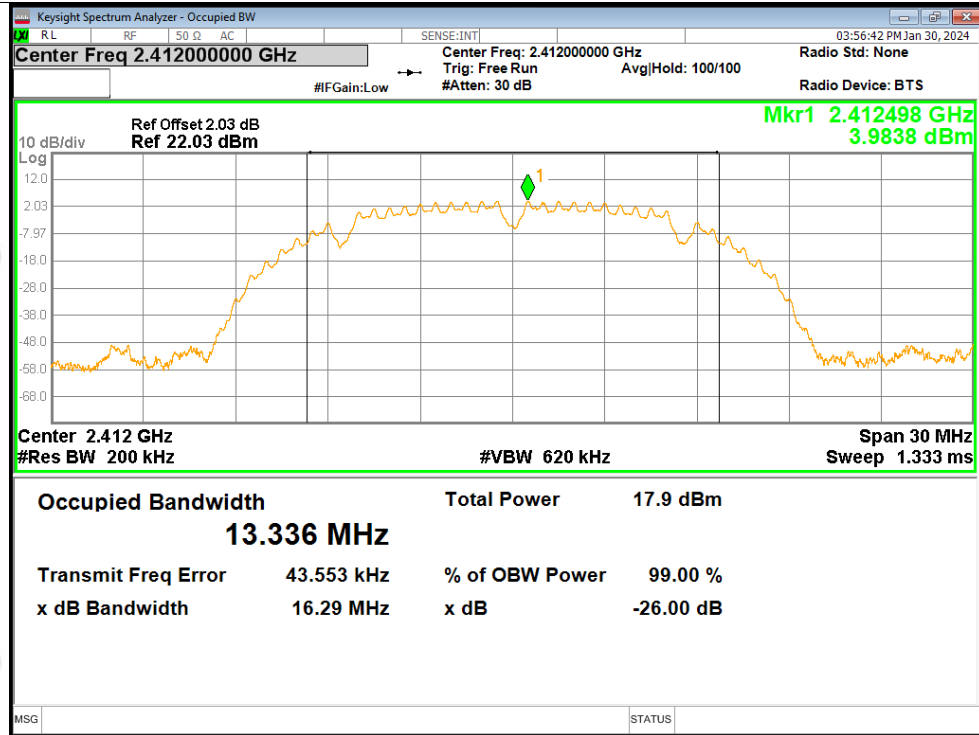


OBW NVNT b 2437MHz Ant1

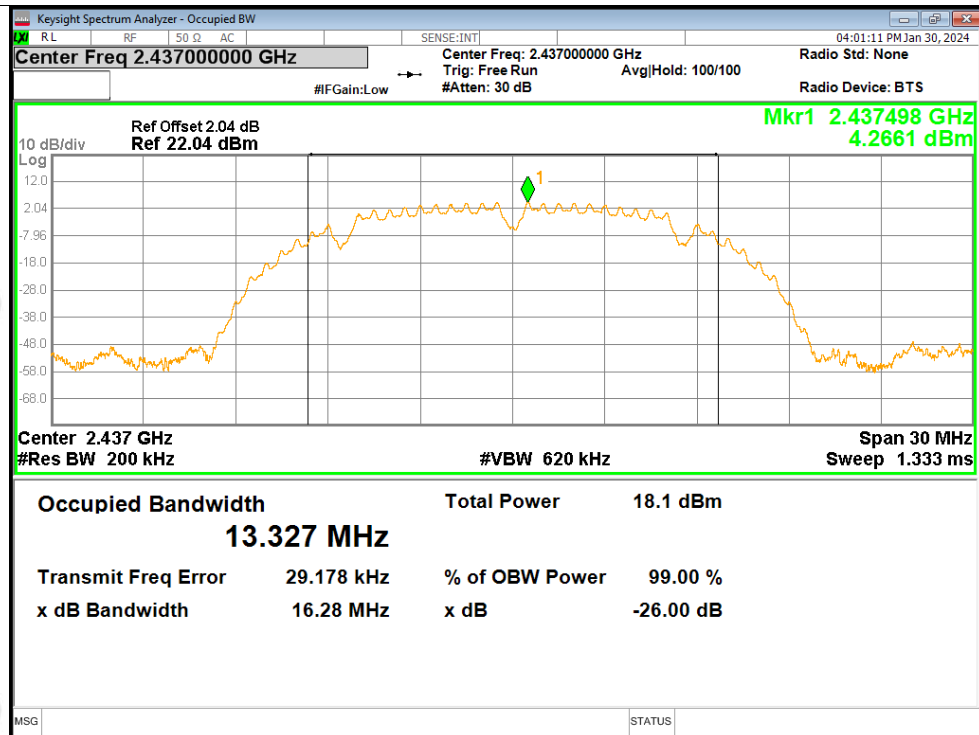






OBW NVNT b 2462MHz Ant1

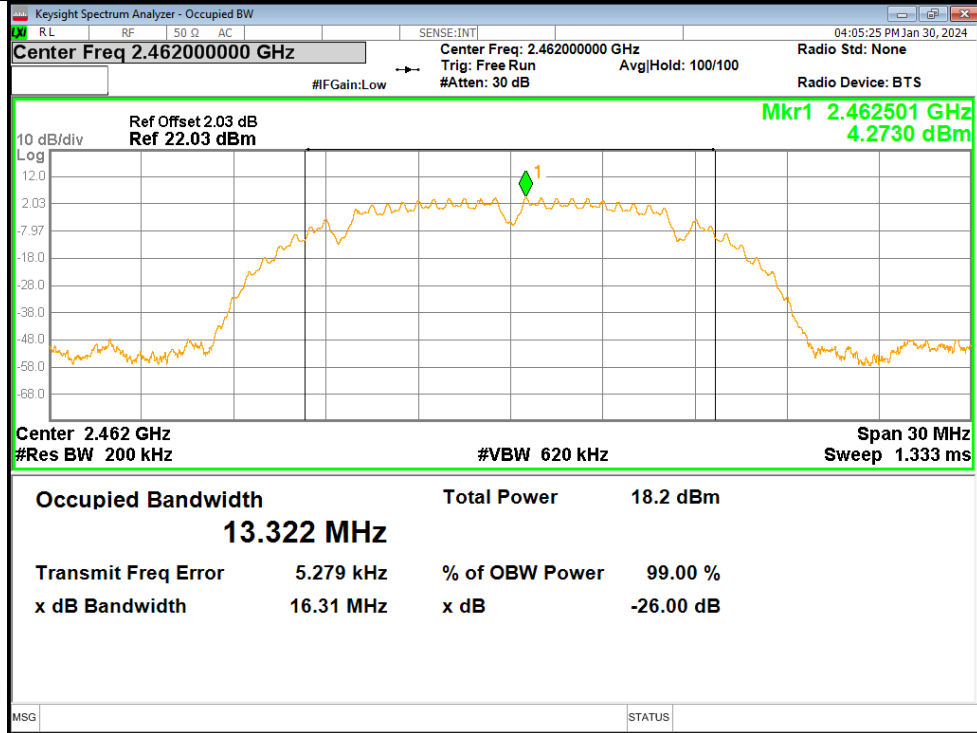


OBW NVNT b 2412MHz Ant2

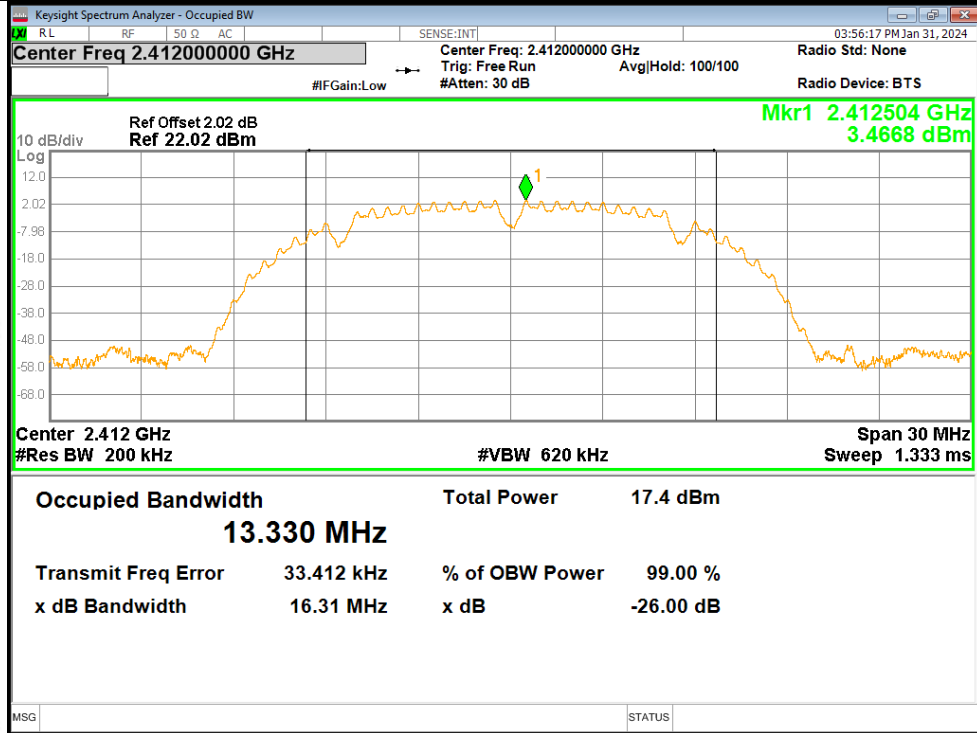


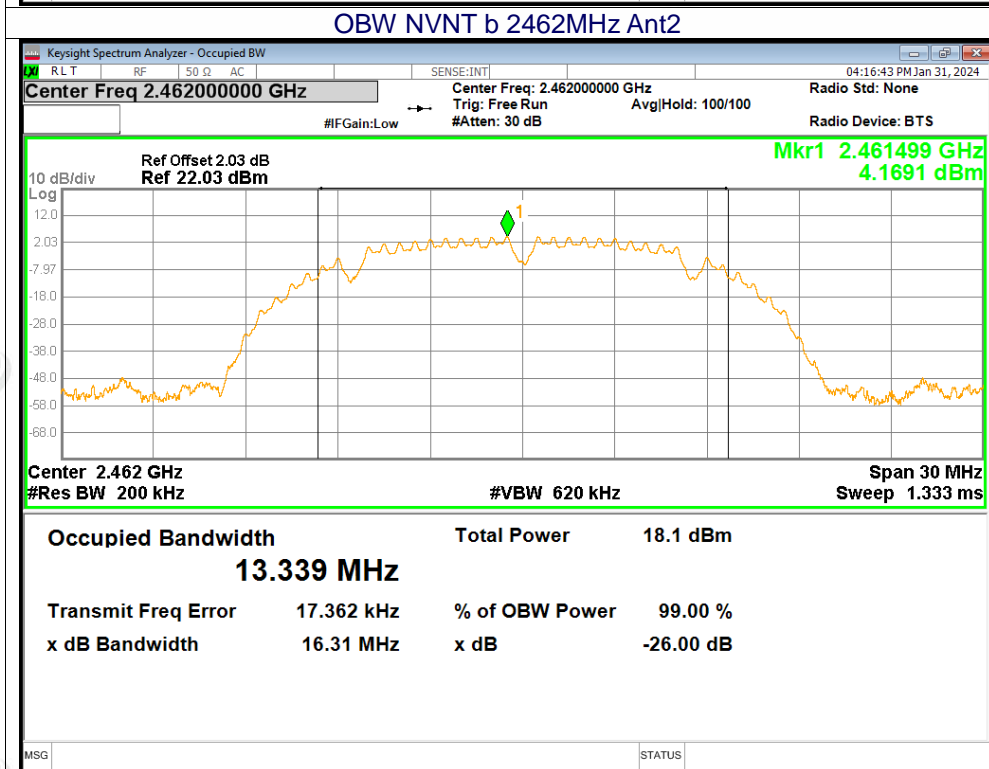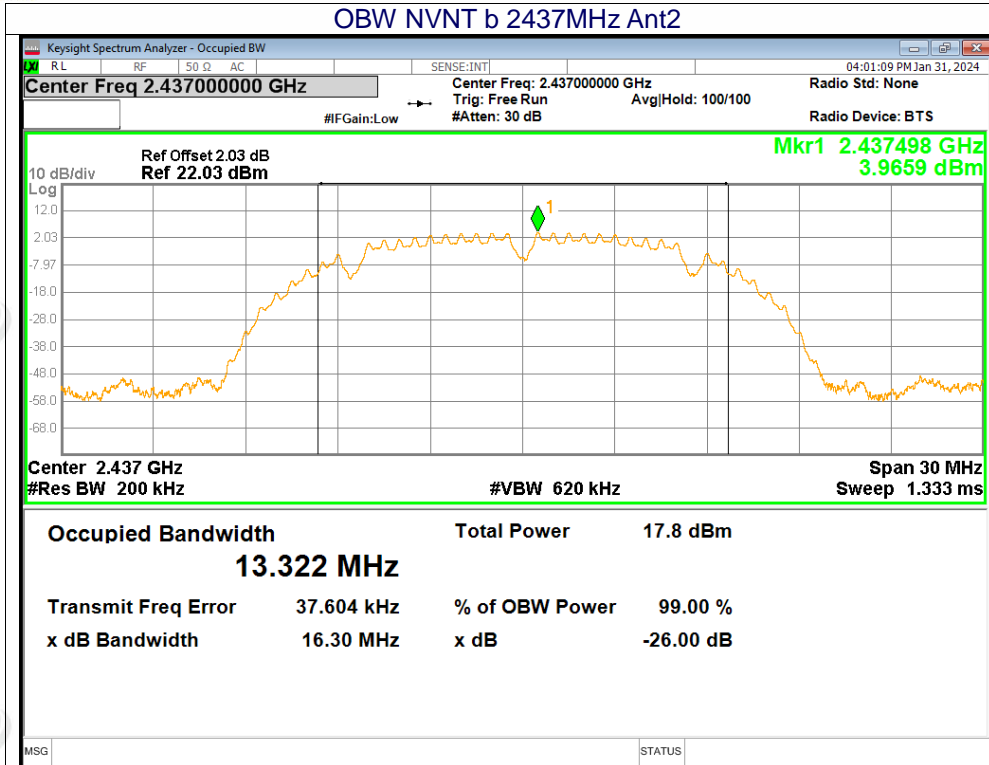


OBW NVNT g 2412MHz Ant1

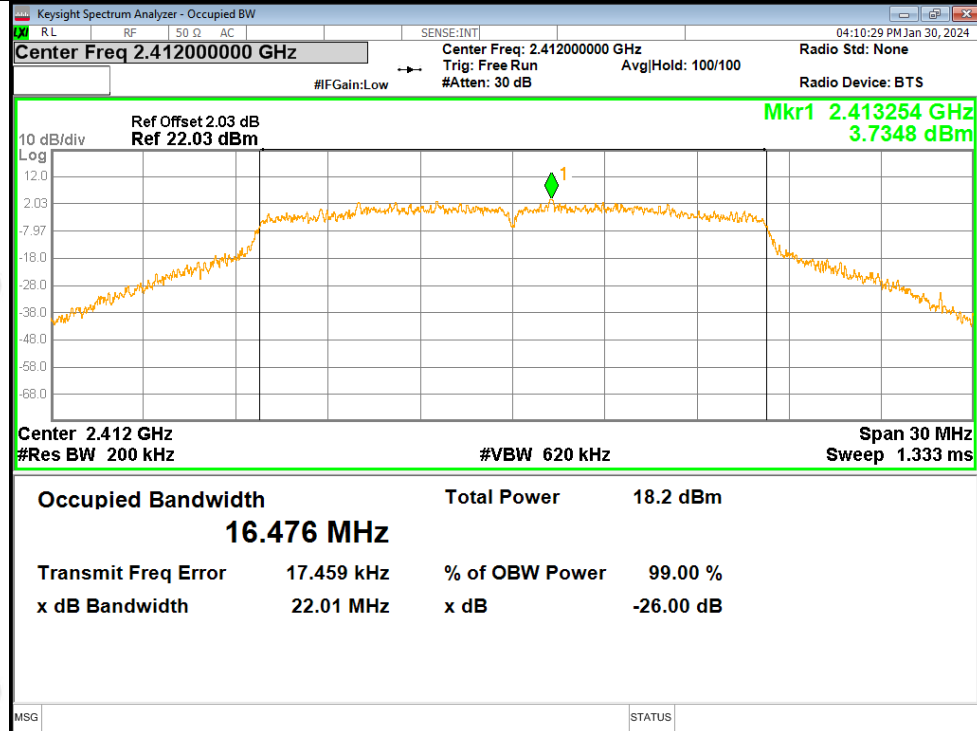


OBW NVNT g 2437MHz Ant1

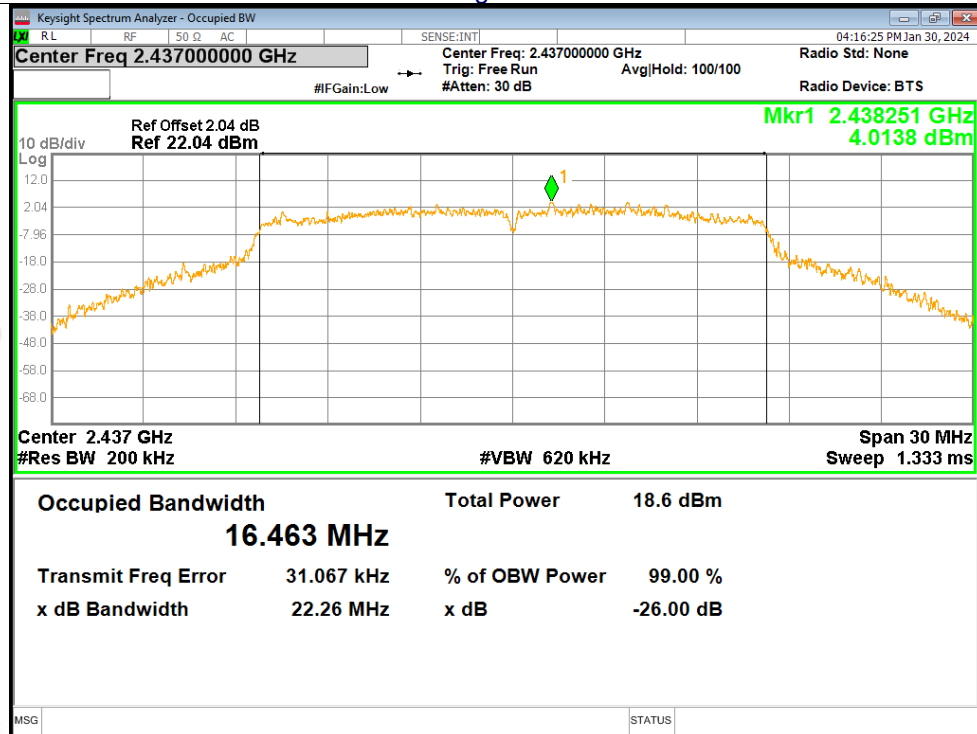


OBW NVNT g 2462MHz Ant1

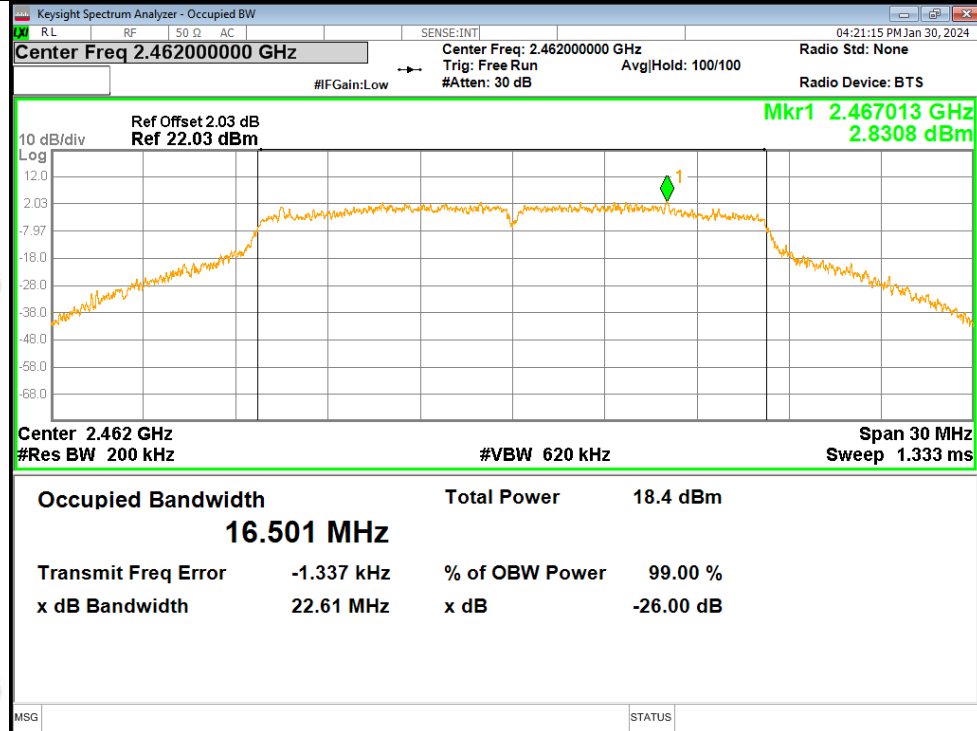

OBW NVNT g 2412MHz Ant2

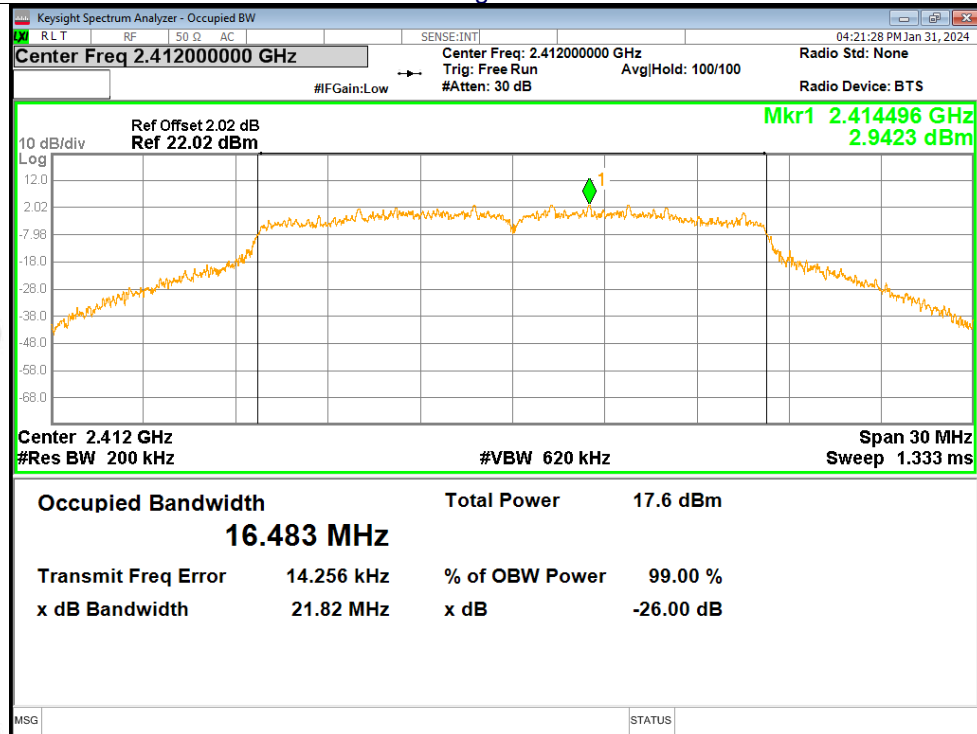

OBW NVNT g 2437MHz Ant2

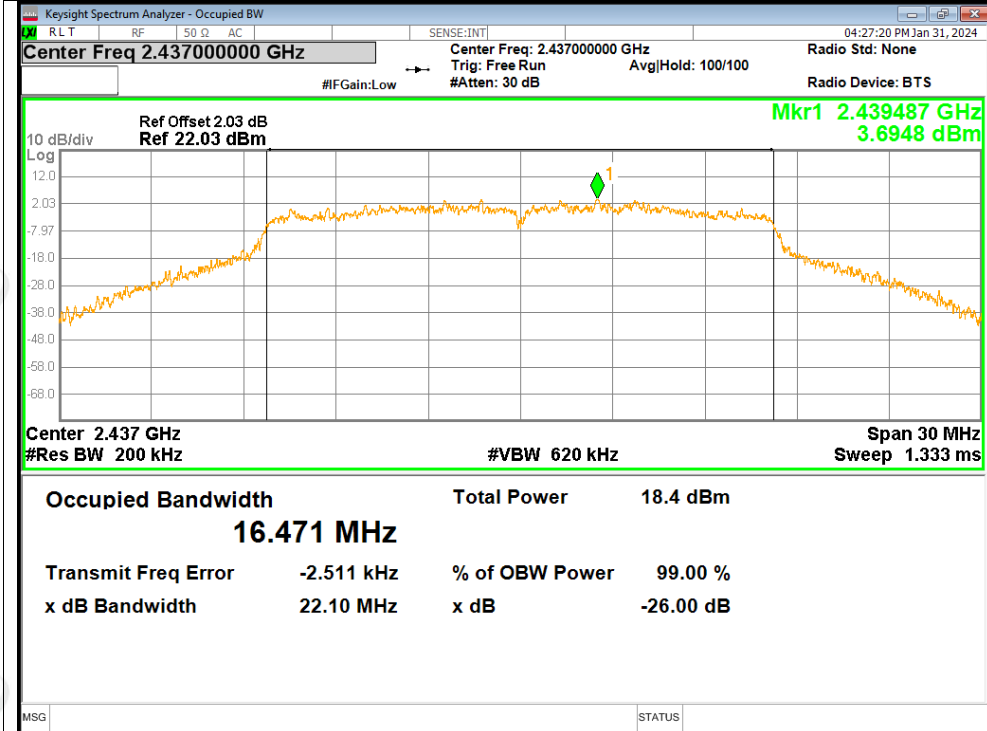

OBW NVNT g 2462MHz Ant2

