



FCC Part 15E Test Report

FCC ID: 2BB7T-D101

Applicant: Datrend Systems Inc

Address: 130-4020 Viking Way Richmond, BC Canada V6V2L4

Manufacturer: Shenzhen CWHT Technology Co., Ltd.

Address: 3rd Floor, Building A, No. 4, North District, Shangxue Science Park, Bantian, Longgang District, Shenzhen, China

EUT: Tab-D101-A

Trade Mark: N/A

Model Number: D101

Date of Receipt: Nov. 05, 2023

Test Date: Nov. 05, 2023 - Jan. 27, 2024

Date of Report: Jan. 27, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20231111034E

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~40GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	33
3.3.1 TEST REQUIREMENT:	33
3.3.2 TEST PROCEDURE	33
3.3.3 DEVIATION FROM TEST STANDARD	33
3.3.4 TEST SETUP	33
3.3.5 EUT OPERATING CONDITIONS	33
4 . PEAK OUTPUT POWER	36
4.1 APPLIED PROCEDURES / LIMIT	36
4.1.1 TEST PROCEDURE	36
4.1.2 DEVIATION FROM STANDARD	36
4.1.3 TEST SETUP	36



Table of Contents	Page
4.1.4 EUT OPERATION CONDITIONS	36
4.1.5 TEST RESULTS	37
5 . POWER SPECTRAL DENSITY TEST	41
5.1 APPLIED PROCEDURES / LIMIT	41
5.1.1 TEST PROCEDURE	41
5.1.2 DEVIATION FROM STANDARD	41
5.1.3 TEST SETUP	41
5.1.4 EUT OPERATION CONDITIONS	41
5.1.5 TEST RESULTS	42
6 . 26DB&99% BANDWIDTH TEST	46
6.1 APPLIED PROCEDURES / LIMIT	46
6.1.1 TEST PROCEDURE	46
6.1.2 DEVIATION FROM STANDARD	46
6.1.3 TEST SETUP	46
6.1.4 EUT OPERATION CONDITIONS	46
6.1.5 TEST RESULTS	47
7 . DUTY CYCLE TEST SIGNAL	51
7.1 APPLIED PROCEDURES / LIMIT	51
7.1.1 TEST PROCEDURE	51
7.1.2 DEVIATION FROM STANDARD	51
7.1.3 TEST SETUP	51
7.1.4 EUT OPERATION CONDITIONS	51
7.1.5 TEST RESULTS	52
8 . FREQUENCY STABILITY	54
8.1 APPLIED PROCEDURES / LIMIT	54
8.1.1 TEST PROCEDURE	54
8.1.2 DEVIATION FROM STANDARD	54
8.1.3 TEST SETUP	54
8.1.4 EUT OPERATION CONDITIONS	54
8.1.5 TEST RESULTS	55
9 . TRANSMISSION IN THE ABSENCE OF DATA	57
9.1 STANDARD REQUIREMENT	57
9.2 TEST RESULT	57
10 . ANTENNA REQUIREMENT	57
10.1 STANDARD REQUIREMENT	57
10.2 EUT ANTENNA	57
11 . TEST SEUUP PHOTO	58



Table of Contents	Page
12 . EUT PHOTO	60



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Peak Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.403(i) 15.407(e)	26dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$
8	Bandwidth	$\pm 0.2\text{MHz}$
9	Power Spectral Density	$\pm 2.45\text{dBm}$
10	Frequency Stability	$\pm 0.3\text{MHz}$
11	DUTY CYCLE	$\pm 0.53\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Tab-D101-A
Trademark	N/A
Model No.:	D101
Model Difference	N/A
Operation Frequency:	5180-5240MHz(802.11a/n/ac(HT20)) 5190-5230MHz(802.11n/ac(HT40)) 5210MHzMHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	10MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 500Mbps 802.11ac: up to 867Mbps
Antenna Type:	Internal Antenna
Antenna gain:	0.72dBi
Power supply:	DC 3.7V from battery DC 5V from adapter
Adapter:	Input: 100-240V~ 50/60Hz Output: 5V $\overline{\overline{=}}$ 2.4A MAX.

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	/	/

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Description		
Pretest Mode	Channel	Band 1
Mode 1	802.11a/n/acHT20	CH36, CH44, CH48
Mode 2	802.11n/acHT40	CH38, CH46
Mode 3	802.11acHT80	CH42
Mode 4	Other	Link Mode


For Radiated Emission		
Pretest Mode	Channel	Band 1
Mode 1	802.11a/n/acHT20	CH36, CH44, CH48
Mode 2	802.11n/acHT40	CH38, CH46
Mode 3	802.11acHT80	CH42
Mode 4	Other	Link Mode

Note: 1. The measurements are performed at the highest, middle, lowest available channels.
2. During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Tab-D101-A	D101	N/A	EUT
E-2	Adapter	AD65G	N/A	

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: MTK			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Softwave	60	60	66	66

**2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS**

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 05, 2023	Nov. 04, 2024
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 05, 2023	Nov. 04, 2024
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 05, 2023	Nov. 04, 2024
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 05, 2023	Nov. 04, 2024
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 05, 2023	Nov. 04, 2024
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 05, 2023	Nov. 04, 2024
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 05, 2023	Nov. 04, 2024
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 05, 2023	Nov. 04, 2024
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 05, 2023	Nov. 04, 2024
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 05, 2023	Nov. 04, 2024
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 05, 2023	Nov. 04, 2024
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 05, 2023	Nov. 04, 2024
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 05, 2023	Nov. 04, 2024
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 05, 2023	Nov. 04, 2024
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 05, 2023	Nov. 04, 2024
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 05, 2023	Nov. 04, 2024

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 05, 2023	Nov. 04, 2024
3	LISN	R&S	ENV216	102417	Nov. 05, 2023	Nov. 04, 2024
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 05, 2023	Nov. 04, 2024

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

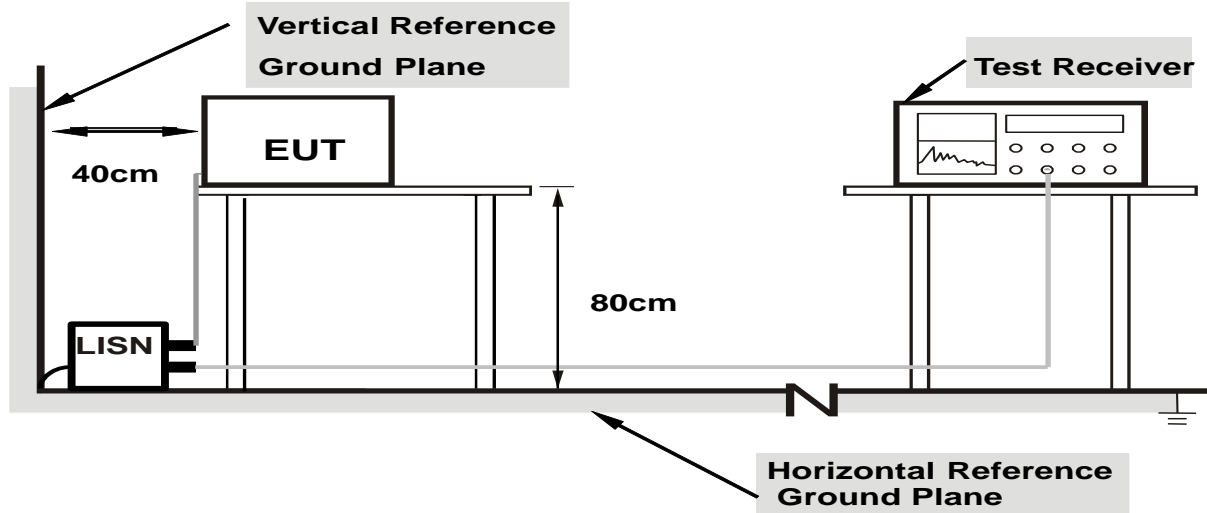

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

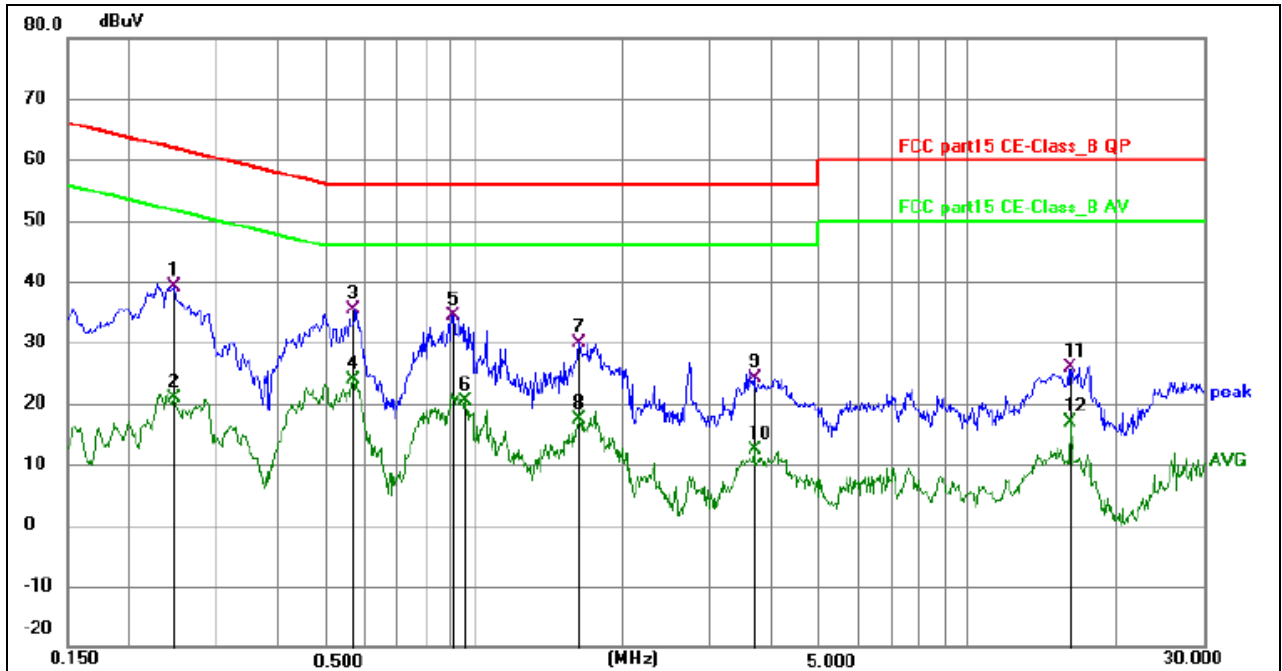


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.246700	29.78	9.35	39.13	61.87	-22.74	QP	P	
2	0.246700	11.60	9.35	20.95	51.87	-30.92	AVG	P	
3 *	0.568500	26.14	9.28	35.42	56.00	-20.58	QP	P	
4	0.568500	14.63	9.28	23.91	46.00	-22.09	AVG	P	
5	0.906000	24.97	9.32	34.29	56.00	-21.71	QP	P	
6	0.960000	11.13	9.30	20.43	46.00	-25.57	AVG	P	
7	1.630500	20.25	9.65	29.90	56.00	-26.10	QP	P	
8	1.630500	7.69	9.65	17.34	46.00	-28.66	AVG	P	
9	3.691500	14.87	9.30	24.17	56.00	-31.83	QP	P	
10	3.691500	3.02	9.30	12.32	46.00	-33.68	AVG	P	
11	16.083800	15.63	10.19	25.82	60.00	-34.18	QP	P	
12	16.083800	6.78	10.19	16.97	50.00	-33.03	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

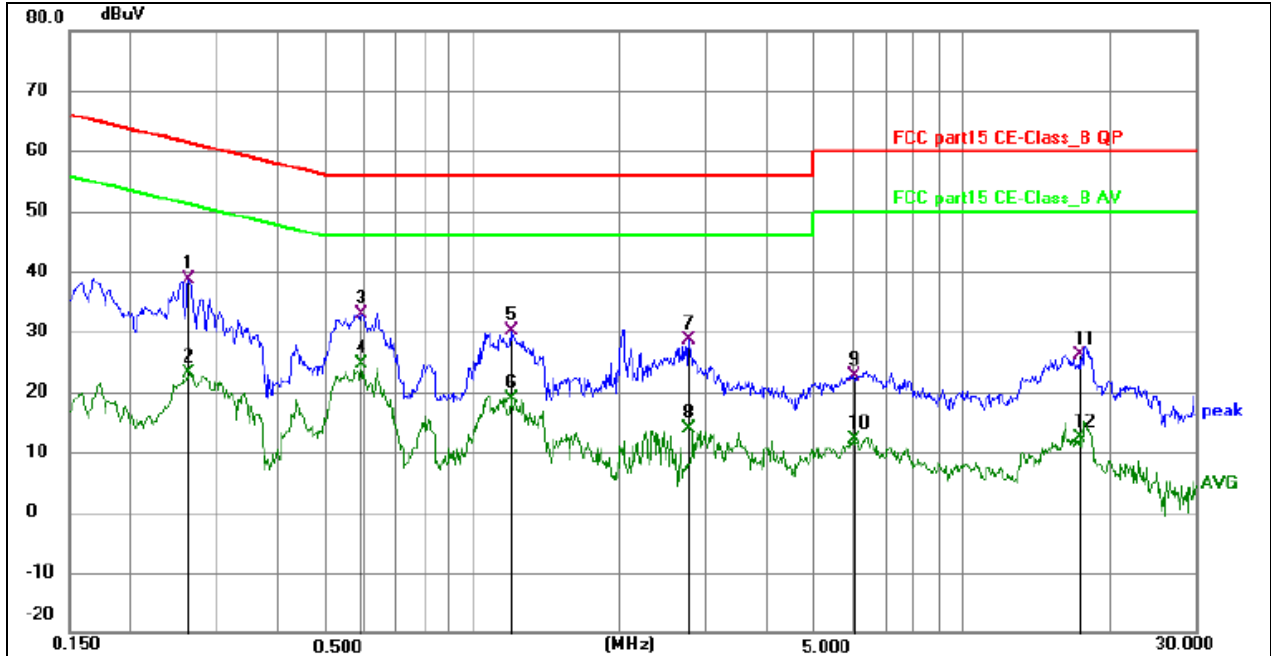

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.262500	29.71	8.98	38.69	61.35	-22.66	QP	P	
2	0.262500	14.18	8.98	23.16	51.35	-28.19	AVG	P	
3	0.590700	23.74	9.26	33.00	56.00	-23.00	QP	P	
4 *	0.590700	15.43	9.26	24.69	46.00	-21.31	AVG	P	
5	1.203000	20.73	9.50	30.23	56.00	-25.77	QP	P	
6	1.203000	9.33	9.50	18.83	46.00	-27.17	AVG	P	
7	2.769000	18.70	9.82	28.52	56.00	-27.48	QP	P	
8	2.769000	4.17	9.82	13.99	46.00	-32.01	AVG	P	
9	6.017900	12.86	9.83	22.69	60.00	-37.31	QP	P	
10	6.017900	2.20	9.83	12.03	50.00	-37.97	AVG	P	
11	17.298800	15.76	10.35	26.11	60.00	-33.89	QP	P	
12	17.298800	2.02	10.35	12.37	50.00	-37.63	AVG	P	

**3.2 RADIATED EMISSION MEASUREMENT****3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)**

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

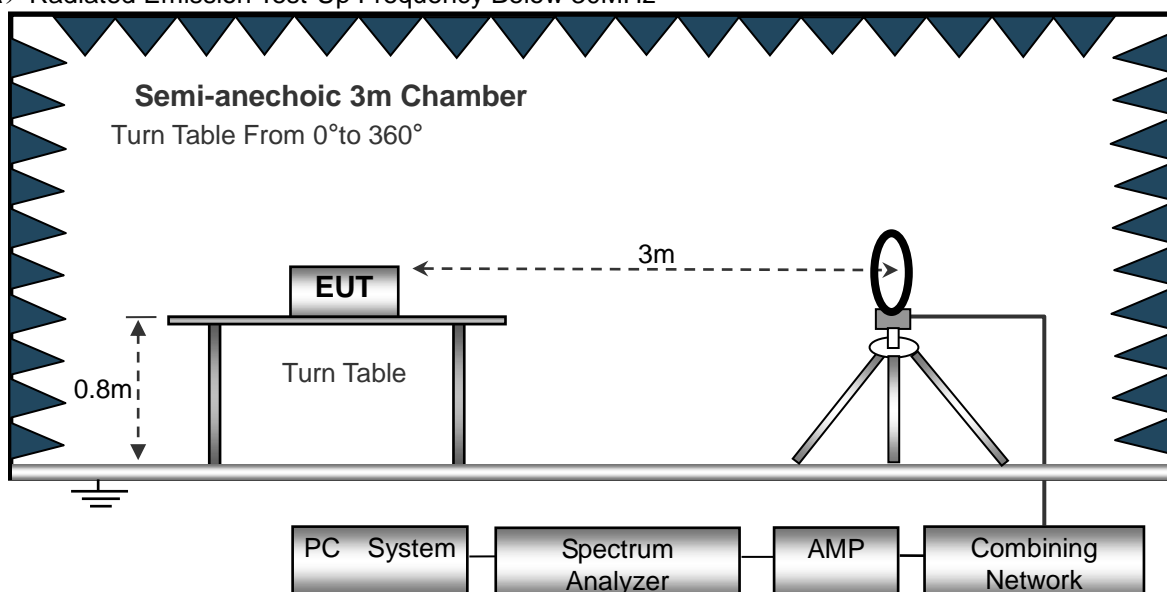

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

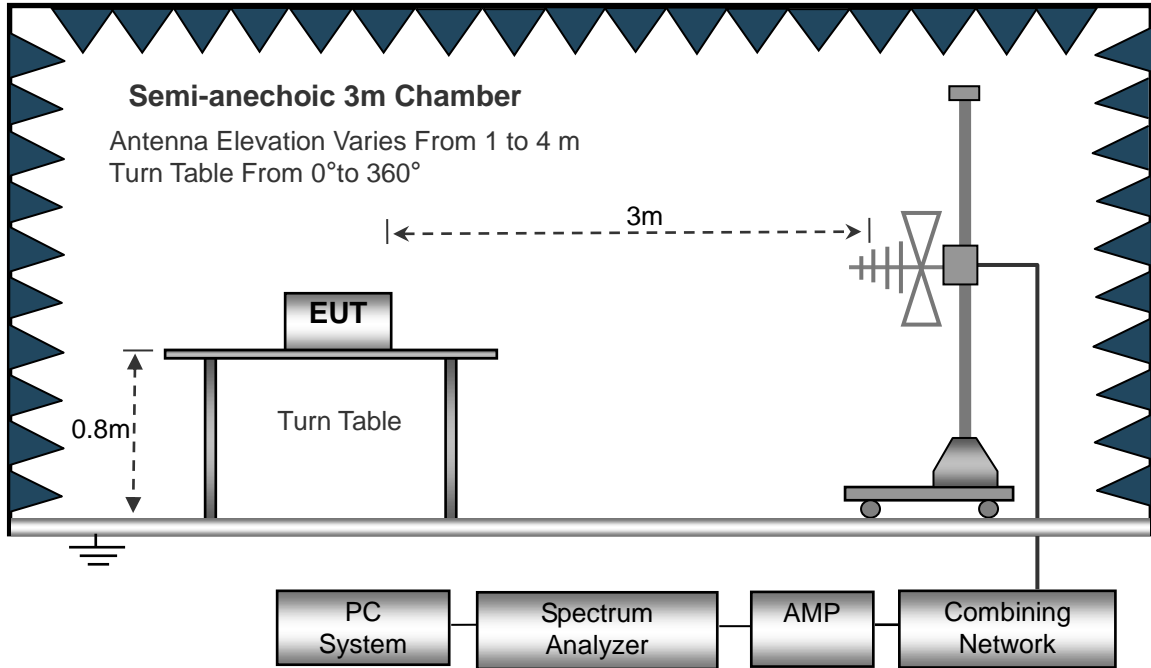

(C) Radiated Emission Test-Up Frequency Above 1GHz

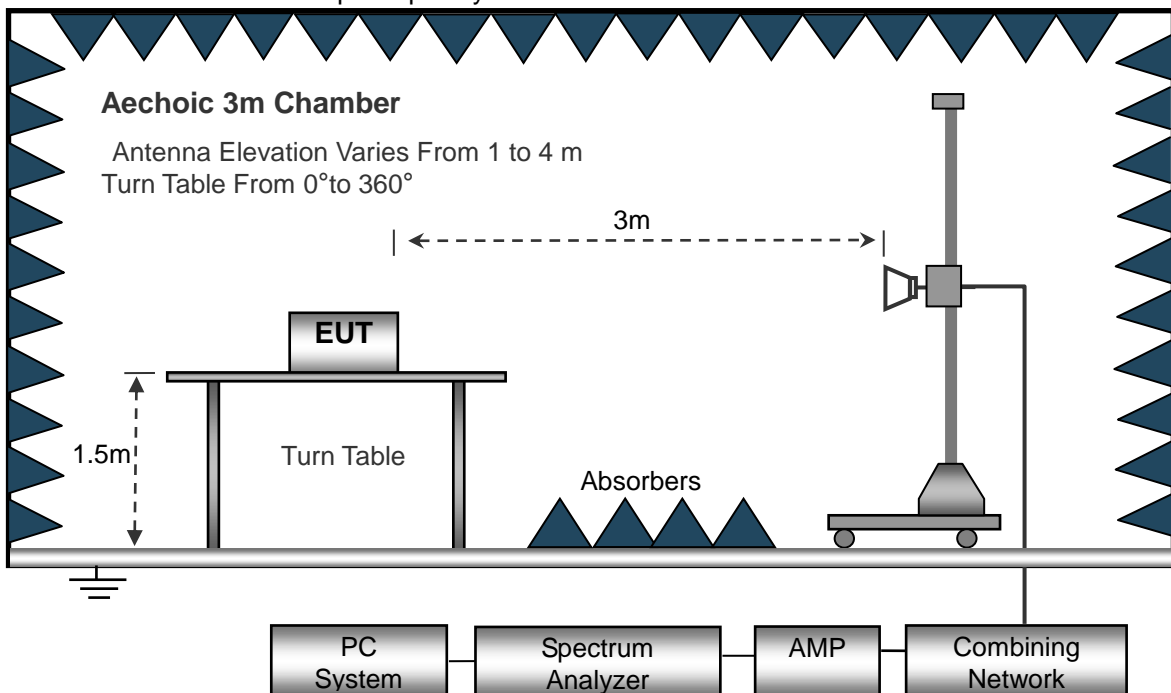

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 4	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 4		

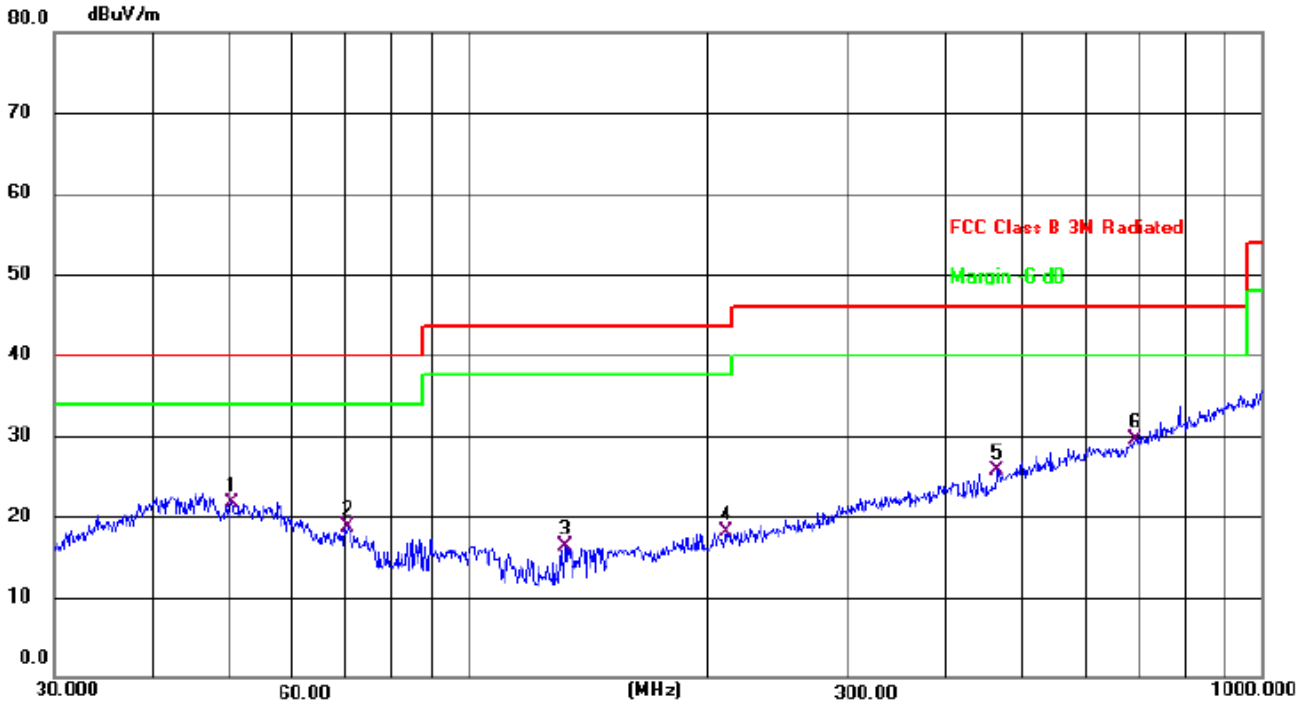

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		50.2323	34.99	-13.32	21.67	40.00	-18.33	QP
2		70.3365	36.05	-17.33	18.72	40.00	-21.28	QP
3		132.2204	34.66	-18.45	16.21	43.50	-27.29	QP
4		210.7860	33.57	-15.55	18.02	43.50	-25.48	QP
5		463.9696	34.83	-9.08	25.75	46.00	-20.25	QP
6	*	691.9864	34.16	-4.66	29.50	46.00	-16.50	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	DC 3.7V		
Test Mode :	Mode 4		

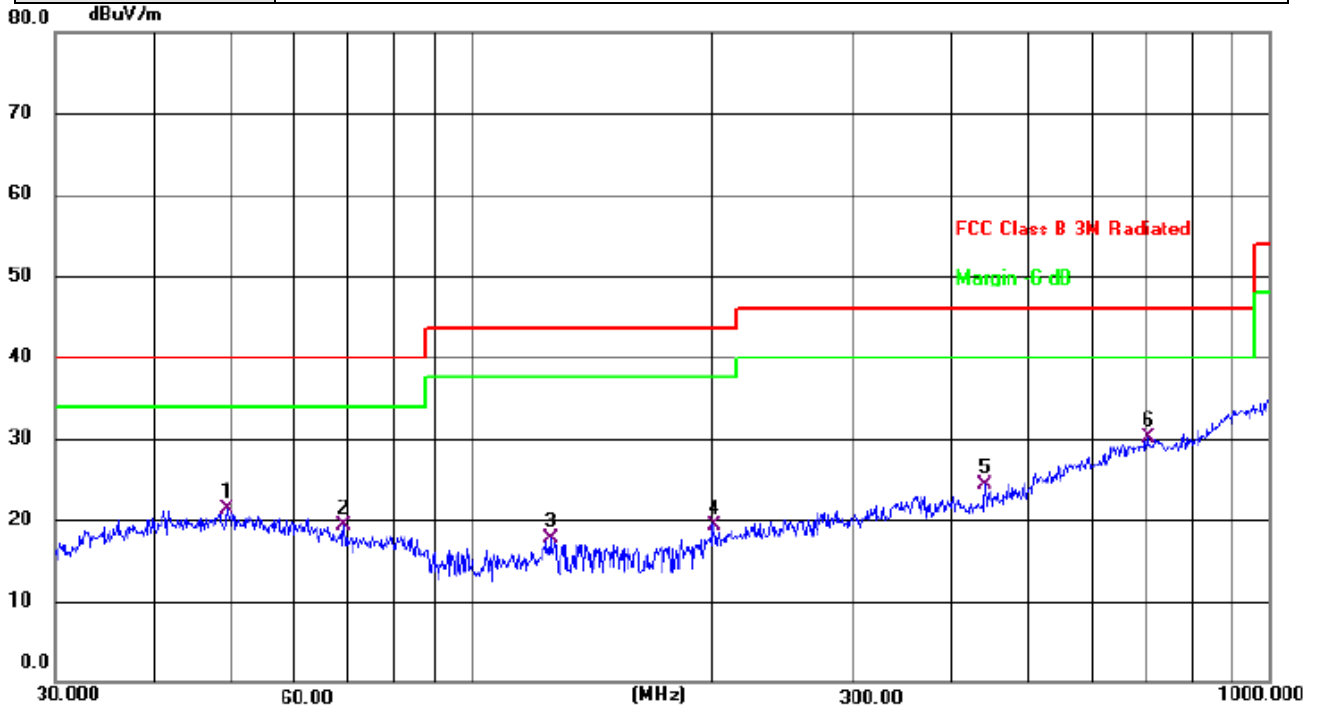

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		49.3594	34.73	-13.37	21.36	40.00	-18.64	QP
2		69.1140	36.33	-16.99	19.34	40.00	-20.66	QP
3		125.4457	35.94	-18.19	17.75	43.50	-25.75	QP
4		201.3930	35.17	-15.95	19.22	43.50	-24.28	QP
5		440.1961	34.12	-9.76	24.36	46.00	-21.64	QP
6	*	704.2259	34.48	-4.41	30.07	46.00	-15.93	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8 TEST RESULTS (1ghz~40ghZ)**

802.11a band 1

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.33	49.05	15.3	37.39	59.97	74	-14.03	PK
V	10360	41.27	49.05	15.3	37.39	44.91	54	-9.09	AV
V	15540	56.65	49.16	15.27	40.45	63.21	74	-10.79	PK
V	15540	39.12	49.16	15.27	40.45	45.68	54	-8.32	AV
H	10360	56.08	49.05	15.3	37.39	59.72	74	-14.28	PK
H	10360	40.46	49.05	15.3	37.39	44.1	54	-9.90	AV
H	15540	59.14	49.16	15.27	40.45	65.7	74	-8.30	PK
H	15540	38.26	49.16	15.27	40.45	44.82	54	-9.18	AV
operation frequency:5200									
V	10400	57.48	49.09	15.34	37.42	61.15	74	-12.85	PK
V	10400	39.33	49.09	15.34	37.42	43	54	-11.00	AV
V	15600	59.85	49.18	15.29	40.47	66.43	74	-7.57	PK
V	15600	38.16	49.18	15.29	40.47	44.74	54	-9.26	AV
H	10400	56.98	49.09	15.34	37.42	60.65	74	-13.35	PK
H	10400	39.76	49.09	15.34	37.42	43.43	54	-10.57	AV
H	15600	59.14	49.18	15.29	40.47	65.72	74	-8.28	PK
H	15600	38.85	49.18	15.29	40.47	45.43	54	-8.57	AV
operation frequency:5240									
V	10480	58.53	49.11	15.37	37.46	62.25	74	-11.75	PK
V	10480	39.28	49.11	15.37	37.46	43	54	-11.00	AV
V	15720	59.14	49.21	15.34	40.51	65.78	74	-8.22	PK
V	15720	38.39	49.21	15.34	40.51	45.03	54	-8.97	AV
H	10480	57.36	49.11	15.37	31.31	54.93	74	-19.07	PK
H	10480	45.58	49.11	15.37	31.31	43.15	54	-10.85	AV
H	15720	57.44	49.21	15.34	40.51	64.08	74	-9.92	PK
H	15720	37.52	49.21	15.34	40.51	44.16	54	-9.84	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.13	49.05	15.3	37.39	59.77	74	-14.23	PK
V	10360	38.68	49.05	15.3	37.39	42.32	54	-11.68	AV
V	15540	56.41	49.16	15.27	40.45	62.97	74	-11.03	PK
V	15540	38.23	49.16	15.27	40.45	44.79	54	-9.21	AV
H	10360	56.68	49.05	15.3	37.39	60.32	74	-13.68	PK
H	10360	39.33	49.05	15.3	37.39	42.97	54	-11.03	AV
H	15540	54.18	49.16	15.27	40.45	60.74	74	-13.26	PK
H	15540	38.34	49.16	15.27	40.45	44.9	54	-9.10	AV
operation frequency:5200									
V	10400	56.26	49.09	15.34	37.42	59.93	74	-14.07	PK
V	10400	39.37	49.09	15.34	37.42	43.04	54	-10.96	AV
V	15600	55.13	49.18	15.29	40.47	61.71	74	-12.29	PK
V	15600	38.28	49.18	15.29	40.47	44.86	54	-9.14	AV
H	10400	55.54	49.09	15.34	37.42	59.21	74	-14.79	PK
H	10400	40.63	49.09	15.34	37.42	44.3	54	-9.70	AV
H	15600	55.08	49.18	15.29	40.47	61.66	74	-12.34	PK
H	15600	39.24	49.18	15.29	40.47	45.82	54	-8.18	AV
operation frequency:5240									
V	10480	57.16	49.11	15.37	37.46	60.88	74	-13.12	PK
V	10480	40.58	49.11	15.37	37.46	44.3	54	-9.70	AV
V	15720	54.35	49.21	15.34	40.51	60.99	74	-13.01	PK
V	15720	38.36	49.21	15.34	40.51	45	54	-9.00	AV
H	10480	57.18	49.11	15.37	31.31	54.75	74	-19.25	PK
H	10480	44.64	49.11	15.37	31.31	42.21	54	-11.79	AV
H	15720	55.32	49.21	15.34	40.51	61.96	74	-12.04	PK
H	15720	39.29	49.21	15.34	40.51	45.93	54	-8.07	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.78	49.07	15.33	37.41	60.45	74	-13.55	PK
V	10380	39.36	49.07	15.33	37.41	43.03	54	-10.97	AV
V	15570	56.27	49.17	15.28	40.46	62.84	74	-11.16	PK
V	15570	38.34	49.17	15.28	40.46	44.91	54	-9.09	AV
H	10380	56.62	49.07	15.33	37.41	60.29	74	-13.71	PK
H	10380	40.38	49.07	15.33	37.41	44.05	54	-9.95	AV
H	15570	54.66	49.17	15.28	40.46	61.23	74	-12.77	PK
H	15570	38.35	49.17	15.28	40.46	44.92	54	-9.08	AV
operation frequency:5230									
V	10460	57.17	49.11	15.37	37.46	60.89	74	-13.11	PK
V	10460	39.64	49.11	15.37	37.46	43.36	54	-10.64	AV
V	15690	54.43	49.21	15.34	40.51	61.07	74	-12.93	PK
V	15690	38.38	49.21	15.34	40.51	45.02	54	-8.98	AV
H	10460	57.24	49.11	15.37	31.31	54.81	74	-19.19	PK
H	10460	44.86	49.11	15.37	31.31	42.43	54	-11.57	AV
H	15690	55.38	49.21	15.34	40.51	62.02	74	-11.98	PK
H	15690	39.04	49.21	15.34	40.51	45.68	54	-8.32	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	10360	56.77	49.05	15.3	37.39	60.41	74	-13.59	PK
V	10360	39.56	49.05	15.3	37.39	43.2	54	-10.80	AV
V	15540	56.18	49.16	15.27	40.45	62.74	74	-11.26	PK
V	15540	38.34	49.16	15.27	40.45	44.9	54	-9.10	AV
H	10360	56.85	49.05	15.3	37.39	60.49	74	-13.51	PK
H	10360	38.26	49.05	15.3	37.39	41.9	54	-12.10	AV
H	15540	54.27	49.16	15.27	40.45	60.83	74	-13.17	PK
H	15540	39.34	49.16	15.27	40.45	45.9	54	-8.10	AV
operation frequency:5200									
V	10400	56.56	49.09	15.34	37.42	60.23	74	-13.77	PK
V	10400	41.85	49.09	15.34	37.42	45.52	54	-8.48	AV
V	15600	55.54	49.18	15.29	40.47	62.12	74	-11.88	PK
V	15600	40.36	49.18	15.29	40.47	46.94	54	-7.06	AV
H	10400	55.74	49.09	15.34	37.42	59.41	74	-14.59	PK
H	10400	40.53	49.09	15.34	37.42	44.2	54	-9.80	AV
H	15600	55.25	49.18	15.29	40.47	61.83	74	-12.17	PK
H	15600	41.28	49.18	15.29	40.47	47.86	54	-6.14	AV
operation frequency:5240									
V	10480	57.44	49.11	15.37	37.46	61.16	74	-12.84	PK
V	10480	40.33	49.11	15.37	37.46	44.05	54	-9.95	AV
V	15720	54.47	49.21	15.34	40.51	61.11	74	-12.89	PK
V	15720	39.92	49.21	15.34	40.51	46.56	54	-7.44	AV
H	10480	57.36	49.11	15.37	31.31	54.93	74	-19.07	PK
H	10480	44.87	49.11	15.37	31.31	42.44	54	-11.56	AV
H	15720	55.41	49.21	15.34	40.51	62.05	74	-11.95	PK
H	15720	40.08	49.21	15.34	40.51	46.72	54	-7.28	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac 40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	10380	56.43	49.07	15.33	37.41	60.1	74	-13.90	PK
V	10380	40.67	49.07	15.33	37.41	44.34	54	-9.66	AV
V	15570	56.25	49.17	15.28	40.46	62.82	74	-11.18	PK
V	15570	39.53	49.17	15.28	40.46	46.1	54	-7.90	AV
H	10380	56.47	49.07	15.33	37.41	60.14	74	-13.86	PK
H	10380	40.34	49.07	15.33	37.41	44.01	54	-9.99	AV
H	15570	54.28	49.17	15.28	40.46	60.85	74	-13.15	PK
H	15570	39.93	49.17	15.28	40.46	46.5	54	-7.50	AV
operation frequency:5230									
V	10460	57.27	49.11	15.37	37.46	60.99	74	-13.01	PK
V	10460	41.65	49.11	15.37	37.46	45.37	54	-8.63	AV
V	15690	54.63	49.21	15.34	40.51	61.27	74	-12.73	PK
V	15690	39.21	49.21	15.34	40.51	45.85	54	-8.15	AV
H	10460	57.85	49.11	15.37	31.31	55.42	74	-18.58	PK
H	10460	44.26	49.11	15.37	31.31	41.83	54	-12.17	AV
H	15690	55.14	49.21	15.34	40.51	61.78	74	-12.22	PK
H	15690	40.03	49.21	15.34	40.51	46.67	54	-7.33	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5210									
V	10420	56.85	49.07	15.33	37.41	60.52	74	-13.48	PK
V	10420	41.64	49.07	15.33	37.41	45.31	54	-8.69	AV
V	15630	56.25	49.17	15.28	40.46	62.82	74	-11.18	PK
V	15630	39.16	49.17	15.28	40.46	45.73	54	-8.27	AV
H	10420	56.17	49.07	15.33	37.41	59.84	74	-14.16	PK
H	10420	41.34	49.07	15.33	37.41	45.01	54	-8.99	AV
H	15630	54.36	49.17	15.28	40.46	60.93	74	-13.07	PK
H	15630	40.25	49.17	15.28	40.46	46.82	54	-7.18	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

15.407 (b)

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5000MHz
Stop Frequency	5420MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

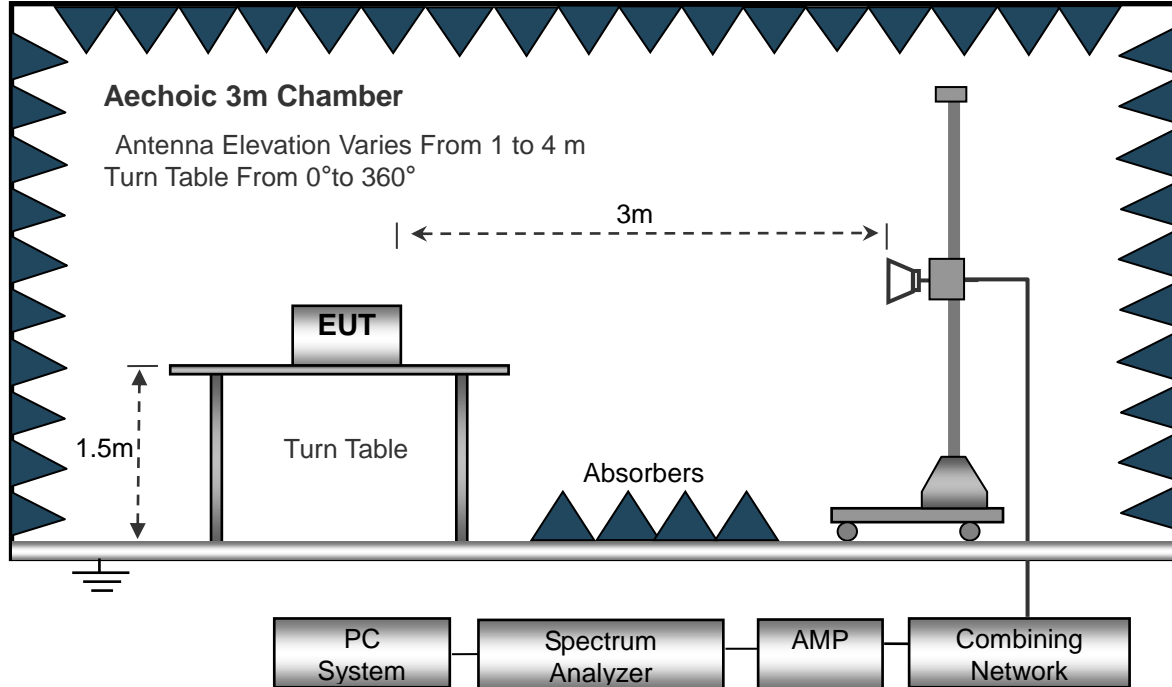

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.3.6 TEST RESULT**

802.11a

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	53.19	49.12	15.6	37.34	57.01	74	-16.99	PK
V	5150	39.38	49.12	15.6	37.34	43.2	54	-10.8	AV
V	5145	54.52	49.19	15.24	40.43	61	74	-13	PK
V	5145	36.33	49.19	15.24	40.43	42.81	54	-11.19	AV
H	5150	52.98	49.12	15.6	37.34	56.8	74	-17.2	PK
H	5150	37.57	49.12	15.6	37.34	41.39	54	-12.61	AV
H	5145	54.32	49.19	15.24	40.43	60.8	74	-13.2	PK
H	5145	33.16	49.19	15.24	40.43	39.64	54	-14.36	AV
operation frequency:5240									
V	5350	53.18	49.13	15.32	37.46	56.83	74	-17.17	PK
V	5350	35.52	49.13	15.32	37.46	39.17	54	-14.83	AV
V	5370	53.23	49.24	15.36	40.51	59.86	74	-14.14	PK
V	5370	32.85	49.24	15.36	40.51	39.48	54	-14.52	AV
H	5350	52.14	49.13	15.32	31.31	49.64	74	-24.36	PK
H	5350	40.22	49.13	15.32	31.31	37.72	54	-16.28	AV
H	5370	52.48	49.24	15.36	40.51	59.11	74	-14.89	PK
H	5370	32.56	49.24	15.36	40.51	39.19	54	-14.81	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	51.22	49.12	15.6	37.34	55.04	74	-18.96	PK
V	5150	33.17	49.12	15.6	37.34	36.99	54	-17.01	AV
V	5145	51.25	49.19	15.24	40.43	57.73	74	-16.27	PK
V	5145	33.63	49.19	15.24	40.43	40.11	54	-13.89	AV
H	5150	51.24	49.12	15.6	37.34	55.06	74	-18.94	PK
H	5150	33.74	49.12	15.6	37.34	37.56	54	-16.44	AV
H	5145	50.18	49.19	15.24	40.43	56.66	74	-17.34	PK
H	5145	32.63	49.19	15.24	40.43	39.11	54	-14.89	AV
operation frequency:5240									
V	5350	53.18	49.13	15.32	37.46	56.83	74	-17.17	PK
V	5350	34.14	49.13	15.32	37.46	37.79	54	-16.21	AV
V	5370	50.63	49.24	15.36	40.51	57.26	74	-16.74	PK
V	5370	33.58	49.24	15.36	40.51	40.21	54	-13.79	AV
H	5350	54.14	49.13	15.32	31.31	51.64	74	-22.36	PK
H	5350	36.27	49.13	15.32	31.31	33.77	54	-20.23	AV
H	5370	51.26	49.24	15.36	40.51	57.89	74	-16.11	PK
H	5370	33.85	49.24	15.36	40.51	40.48	54	-13.52	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5180									
V	5150	52.63	49.12	15.33	37.41	56.25	74	-17.75	PK
V	5150	34.25	49.12	15.33	37.41	37.87	54	-16.13	AV
V	5145	51.28	49.19	15.28	40.46	57.83	74	-16.17	PK
V	5145	33.64	49.19	15.28	40.46	40.19	54	-13.81	AV
H	5150	52.63	49.12	15.33	37.41	56.25	74	-17.75	PK
H	5150	34.68	49.12	15.33	37.41	38.3	54	-15.7	AV
H	5145	50.41	49.19	15.28	40.46	56.96	74	-17.04	PK
H	5145	33.85	49.19	15.28	40.46	40.4	54	-13.6	AV
operation frequency:5240									
V	5350	53.62	49.13	15.32	37.46	57.27	74	-16.73	PK
V	5350	36.52	49.13	15.32	37.46	40.17	54	-13.83	AV
V	5370	50.16	49.24	15.36	40.51	56.79	74	-17.21	PK
V	5370	33.67	49.24	15.36	40.51	40.3	54	-13.7	AV
H	5350	53.15	49.13	15.32	31.31	50.65	74	-23.35	PK
H	5350	40.63	49.13	15.32	31.31	38.13	54	-15.87	AV
H	5370	51.88	49.24	15.36	40.51	58.51	74	-15.49	PK
H	5370	35.34	49.24	15.36	40.51	41.97	54	-12.03	AV
Remark:									
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit									
2. If peak below the average limit, the average emission was no test.									
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11n HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5150	52.16	49.12	15.6	37.39	56.03	74	-17.97	PK
V	5150	35.48	49.12	15.6	37.39	39.35	54	-14.65	AV
V	5145	51.55	49.19	15.24	40.45	58.05	74	-15.95	PK
V	5145	34.63	49.19	15.24	40.45	41.13	54	-12.87	AV
H	5150	52.68	49.12	15.6	37.39	56.55	74	-17.45	PK
H	5150	34.14	49.12	15.6	37.39	38.01	54	-15.99	AV
H	5145	50.18	49.19	15.24	40.45	56.68	74	-17.32	PK
H	5145	35.63	49.19	15.24	40.45	42.13	54	-11.87	AV
operation frequency:5230									
V	5350	53.68	49.13	15.34	37.46	57.35	74	-16.65	PK
V	5350	37.66	49.13	15.34	37.46	41.33	54	-12.67	AV
V	5370	50.28	49.24	15.35	40.51	56.9	74	-17.1	PK
V	5370	36.25	49.24	15.35	40.51	42.87	54	-11.13	AV
H	5350	54.29	49.13	15.34	31.31	51.81	74	-22.19	PK
H	5350	41.24	49.13	15.34	31.31	38.76	54	-15.24	AV
H	5370	52.61	49.24	15.35	40.51	59.23	74	-14.77	PK
H	5370	36.87	49.24	15.35	40.51	43.49	54	-10.51	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT40

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5190									
V	5150	52.86	49.12	15.32	37.41	56.47	74	-17.53	PK
V	5150	37.64	49.12	15.32	37.41	41.25	54	-12.75	AV
V	5145	52.43	49.19	15.36	40.46	59.06	74	-14.94	PK
V	5145	36.58	49.19	15.36	40.46	43.21	54	-10.79	AV
H	5150	52.96	49.12	15.32	37.41	56.57	74	-17.43	PK
H	5150	37.68	49.12	15.32	37.41	41.29	54	-12.71	AV
H	5145	51.24	49.19	15.36	40.46	57.87	74	-16.13	PK
H	5145	36.74	49.19	15.36	40.46	43.37	54	-10.63	AV
operation frequency:5230									
V	5350	54.36	49.13	15.34	37.34	57.91	74	-16.09	PK
V	5350	36.27	49.13	15.34	37.34	39.82	54	-14.18	AV
V	5370	51.44	49.24	15.35	40.43	57.98	74	-16.02	PK
V	5370	36.96	49.24	15.35	40.43	43.5	54	-10.5	AV
H	5350	54.78	49.13	15.34	37.34	58.33	74	-15.67	PK
H	5350	41.41	49.13	15.34	37.34	44.96	54	-9.04	AV
H	5370	50.26	49.24	15.35	40.43	56.8	74	-17.2	PK
H	5370	35.88	49.24	15.35	40.43	42.42	54	-11.58	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT80

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5210									
V	5150	53.24	49.12	15.6	37.34	57.06	74	-16.94	PK
V	5150	39.56	49.12	15.6	37.34	43.38	54	-10.62	AV
V	5145	54.22	49.19	15.24	40.43	60.7	74	-13.3	PK
V	5145	36.99	49.19	15.24	40.43	43.47	54	-10.53	AV
H	5150	52.44	49.12	15.6	37.34	56.26	74	-17.74	PK
H	5150	37.85	49.12	15.6	37.34	41.67	54	-12.33	AV
H	5145	54.23	49.19	15.24	40.43	60.71	74	-13.29	PK
H	5145	33.48	49.19	15.24	40.43	39.96	54	-14.04	AV
V	5350	53.26	49.13	15.32	37.46	56.91	74	-17.09	PK
V	5350	35.18	49.13	15.32	37.46	38.83	54	-15.17	AV
V	5370	53.65	49.24	15.36	40.51	60.28	74	-13.72	PK
V	5370	32.23	49.24	15.36	40.51	38.86	54	-15.14	AV
H	5350	52.37	49.13	15.32	31.31	49.87	74	-24.13	PK
H	5350	40.96	49.13	15.32	31.31	38.46	54	-15.54	AV
H	5370	52.34	49.24	15.36	40.51	58.97	74	-15.03	PK
H	5370	32.93	49.24	15.36	40.51	39.56	54	-14.44	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 CONDUCTED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	5150MHz	5725MHz
Stop Frequency	5250MHz	5850MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	


3.3.2 TEST PROCEDURE

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

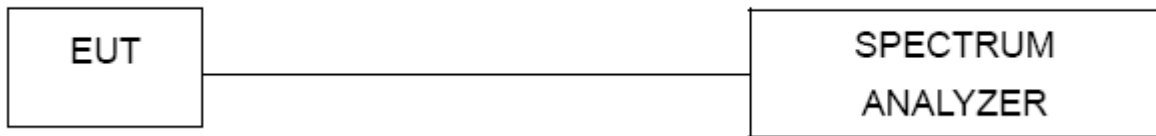

3.3.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




3.3.6 TEST RESULT

The antenna gain is compensated in the test data.

802.11a

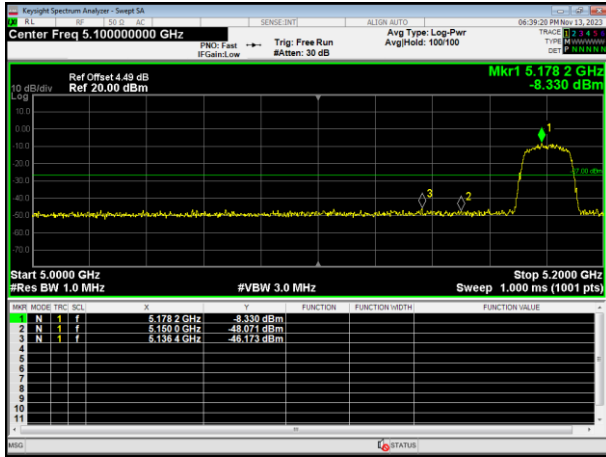


5180MHz

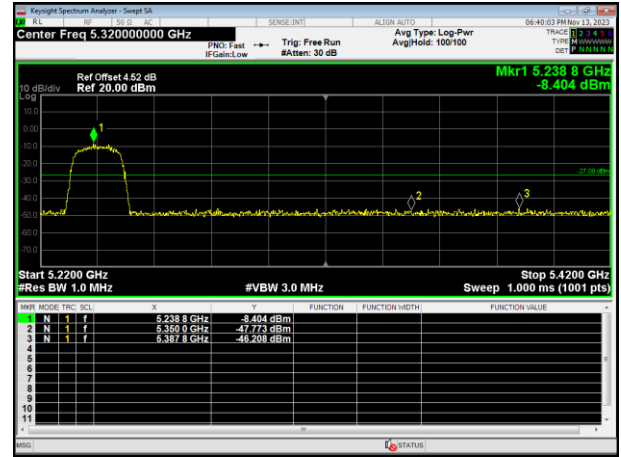


5240MHz

802.11n HT20

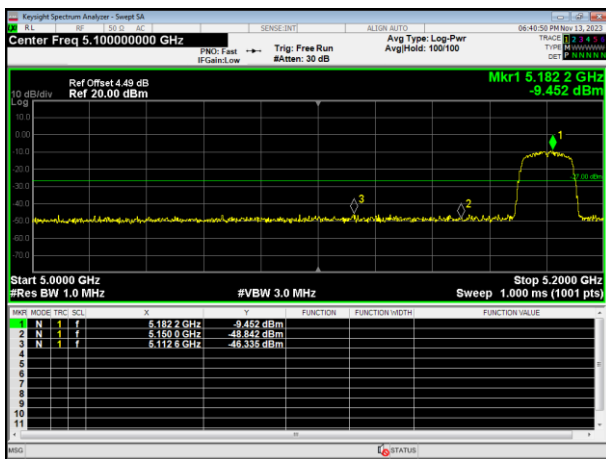


5180MHz

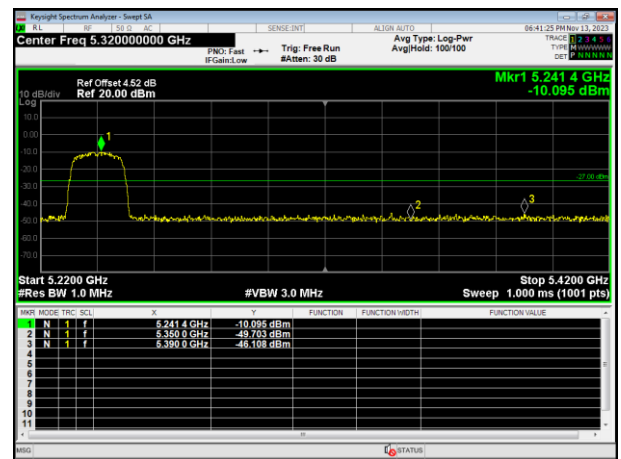


5240MHz

802.11n HT40

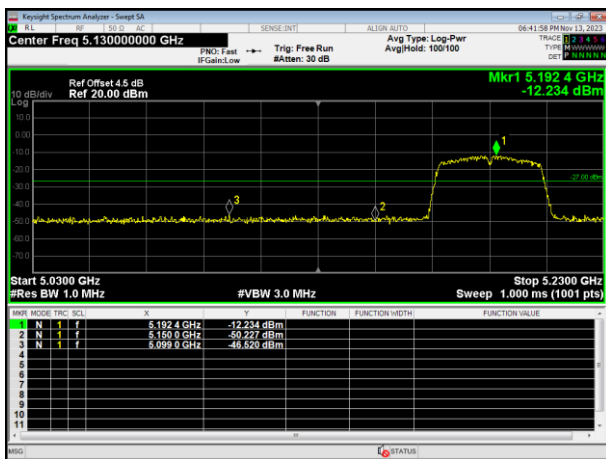


5190MHz

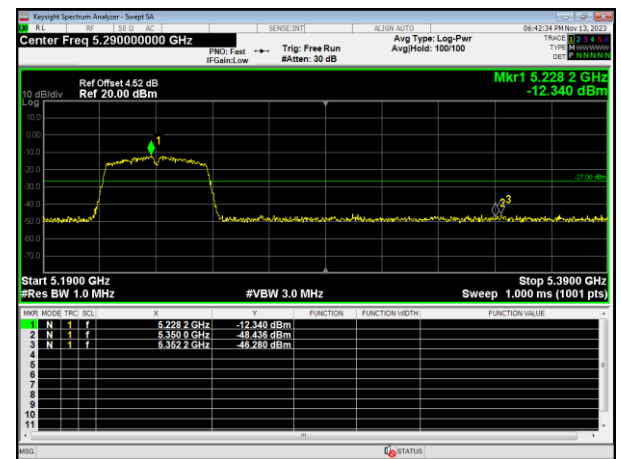


5230MHz



802.11ac HT20

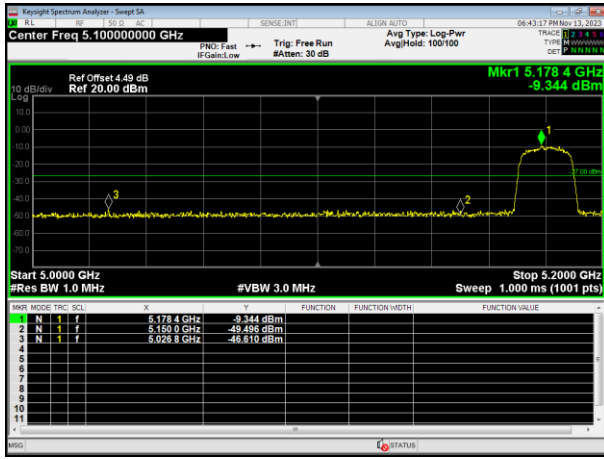


5180MHz

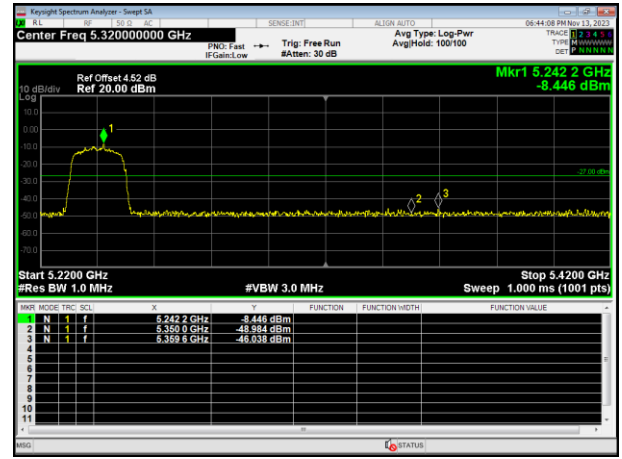


5240MHz

802.11ac HT40

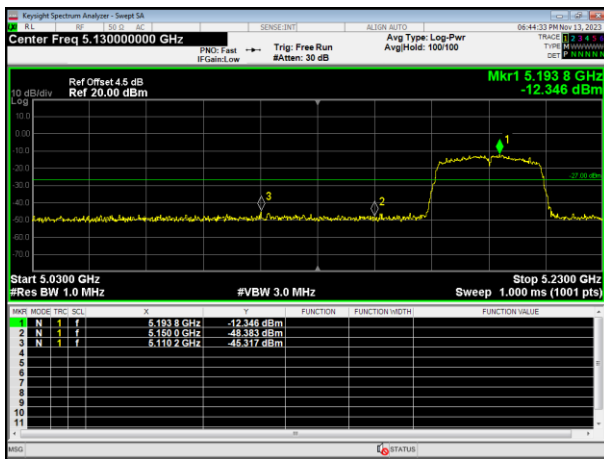


5190MHz

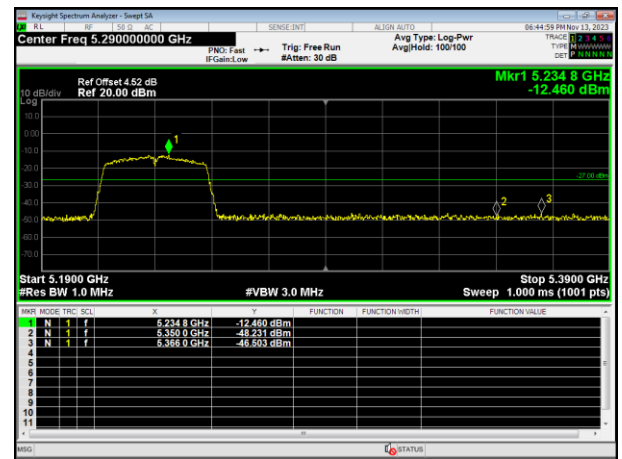

5230MHz

802.11ac HT80

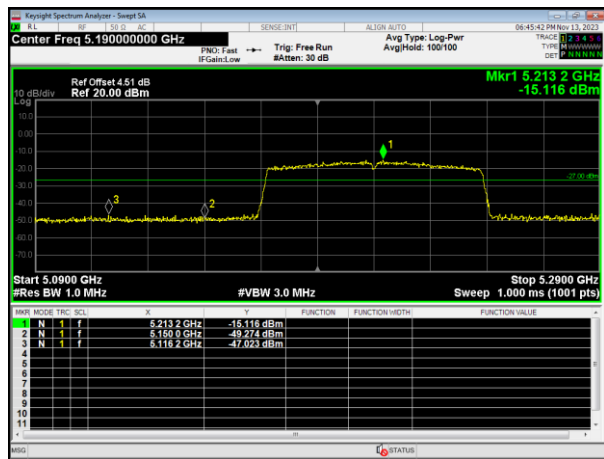

5210MHz



4. AVERAGE OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW ≥ RBW
Sweep = auto
Detector function = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



4.1.5 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	DC 3.7V




Band	Mode	Test Channel	Average Output Power (dBm)	Duty factor (dB)	Total Output Power(dB)	LIMIT (dBm)
Band 1	802.11a	Low	-3.72	0.69	-3.03	23.98
		Middle	-4.20	0.69	-3.51	23.98
		High	-3.19	0.69	-2.5	23.98
	802.11n HT20	Low	-3.00	0.11	-2.89	23.98
		Middle	-3.35	0.11	-3.24	23.98
		High	-3.26	0.11	-3.15	23.98
	802.11n HT40	Low	-3.02	0.21	-2.81	23.98
		High	-3.39	0.21	-3.18	23.98
	802.11ac HT20	Low	-3.20	0.1	-3.1	23.98
		Middle	-3.60	0.1	-3.5	23.98
		High	-3.46	0.1	-3.36	23.98
	802.11ac HT40	Low	-3.31	0.21	-3.1	23.98
		High	-3.64	0.21	-3.43	23.98
	802.11ac HT80	/	-3.96	0.4	-3.56	23.98

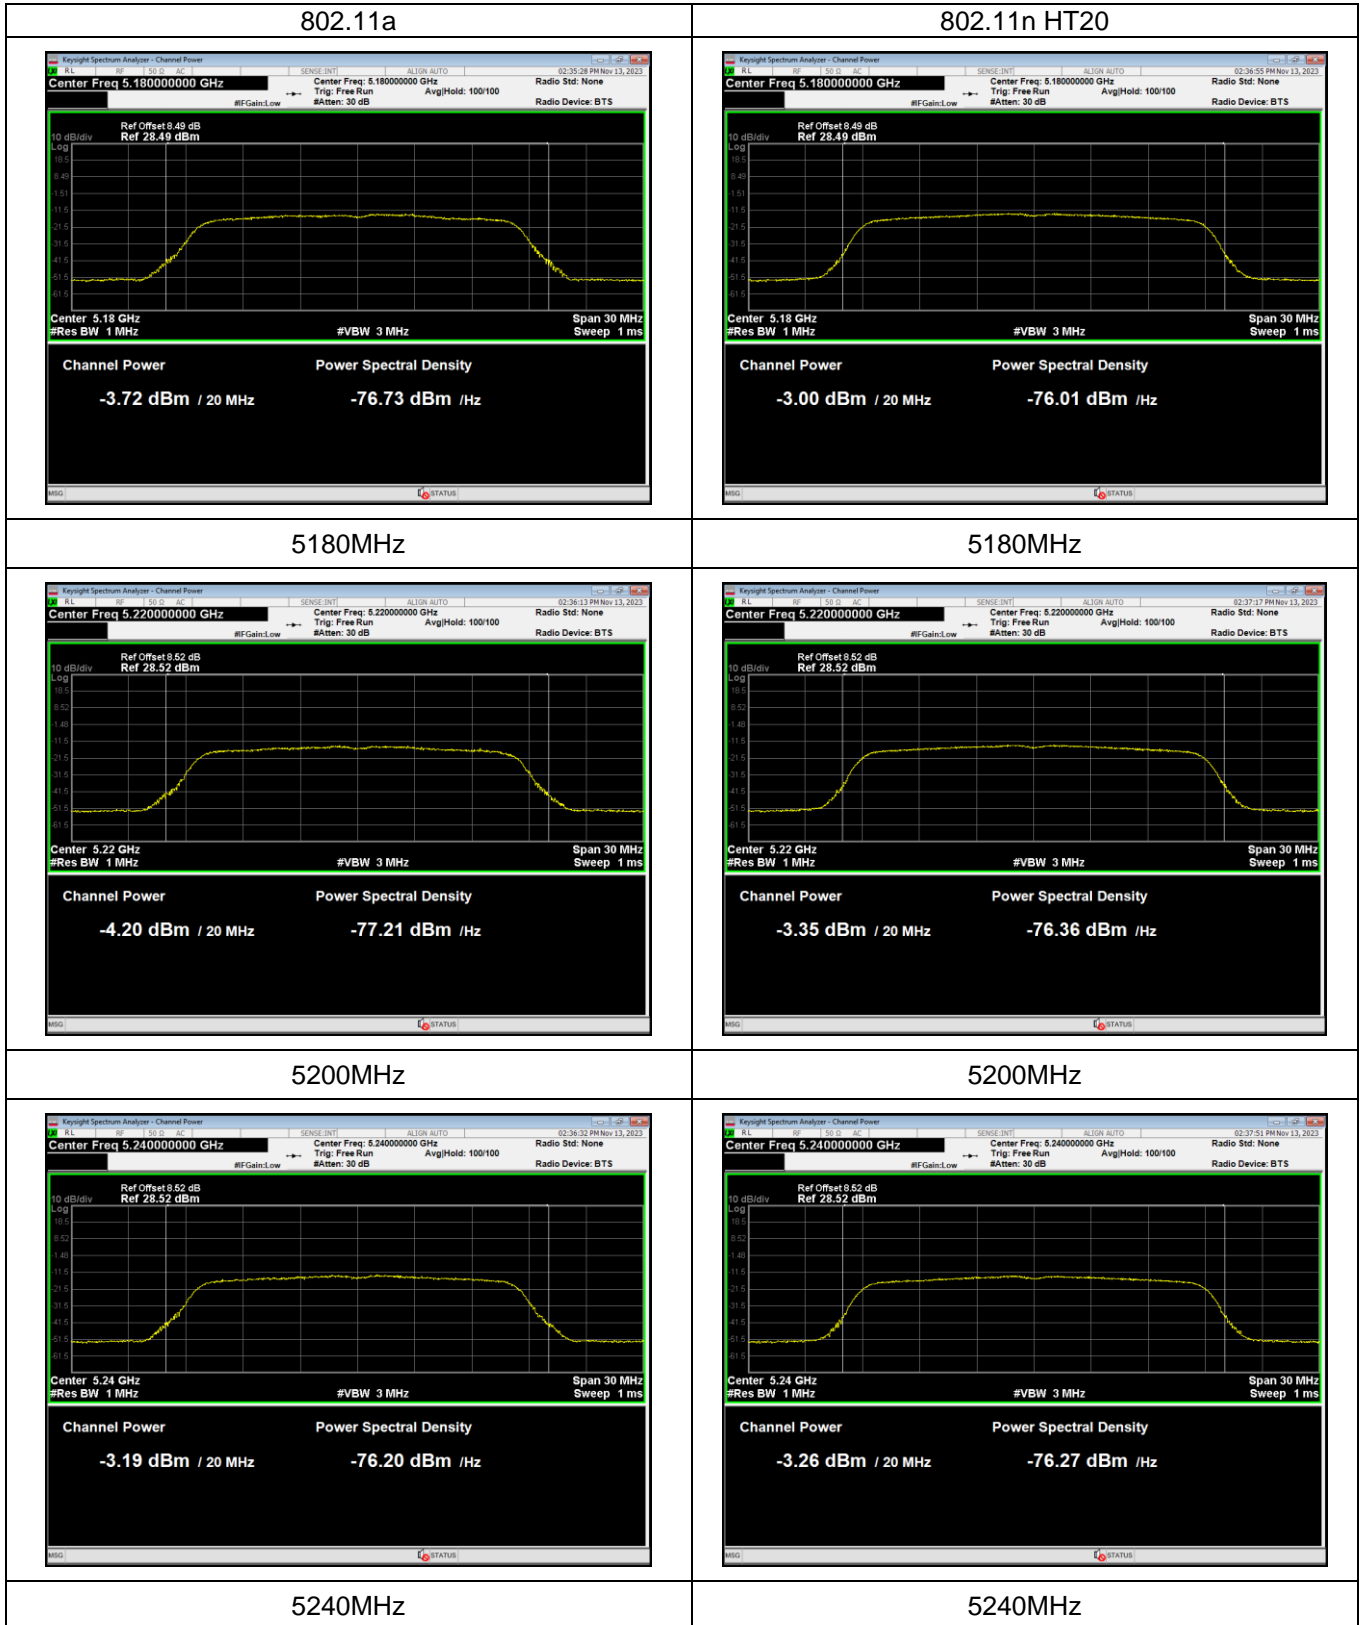



<p style="text-align: center;">802.11n HT40</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.02 dBm / 40 MHz -79.04 dBm / Hz</p>	<p style="text-align: center;">802.11ac HT20</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.20 dBm / 20 MHz -76.21 dBm / Hz</p>
<p style="text-align: center;">5190MHz</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.39 dBm / 40 MHz -79.41 dBm / Hz</p>	<p style="text-align: center;">5180MHz</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.60 dBm / 20 MHz -76.61 dBm / Hz</p>
<p style="text-align: center;">5230MHz</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.46 dBm / 20 MHz -76.47 dBm / Hz</p>	<p style="text-align: center;">5200MHz</p> <p style="text-align: center;">Channel Power Power Spectral Density -3.46 dBm / 20 MHz -76.47 dBm / Hz</p>
<p style="text-align: center;">5240MHz</p>	

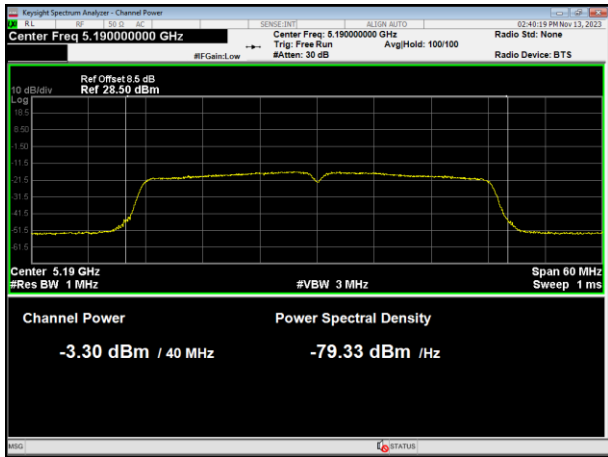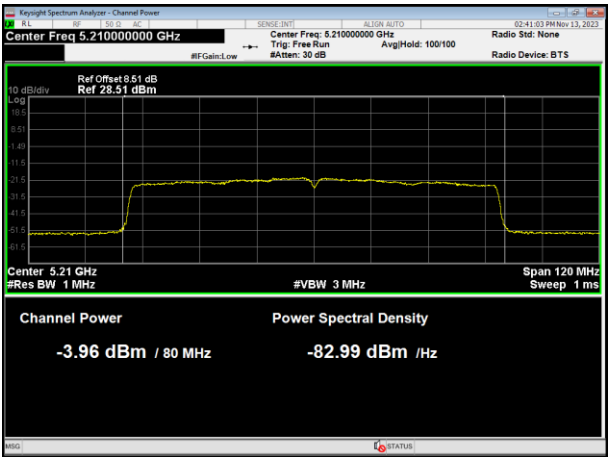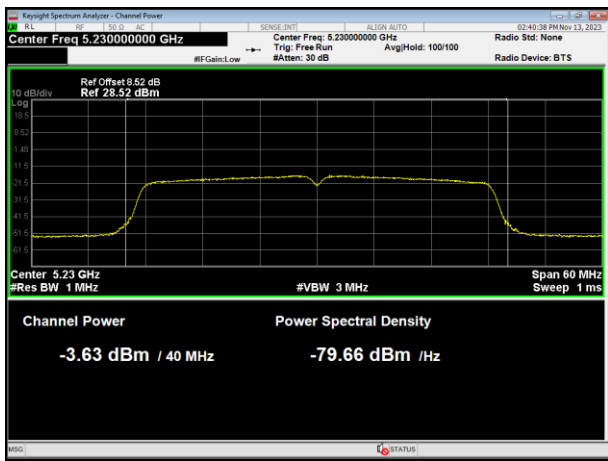

802.11ac HT40	802.11ac HT80
 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 5.190000000 GHz</p> <p>Ref Offset: 8.5 dB, Ref: 28.50 dBm</p> <p>Channel Power: -3.30 dBm / 40 MHz</p> <p>Power Spectral Density: -79.33 dBm / Hz</p>	 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 5.210000000 GHz</p> <p>Ref Offset: 8.51 dB, Ref: 28.51 dBm</p> <p>Channel Power: -3.96 dBm / 80 MHz</p> <p>Power Spectral Density: -82.99 dBm / Hz</p>
5190MHz	5210MHz
 <p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 5.230000000 GHz</p> <p>Ref Offset: 8.52 dB, Ref: 28.52 dBm</p> <p>Channel Power: -3.63 dBm / 40 MHz</p> <p>Power Spectral Density: -79.66 dBm / Hz</p>	
5230MHz	



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1MHz for band 1 RBW ≥ 510KHz for band 4
VB	VBW ≥ 3RBW
Detector	RMS (i.e., power averaging).
Trace	Max Hold
Sweep Time	Auto


5.1.1 TEST PROCEDURE

- Place the EUT on the table and set it in transmitting mode.
- The testing follows FCC KDB 789033 D02.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
- For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
- Use the cursor on spectrum to peak search the highest level of trace
- Record the max. reading and add 10 log(1/duty cycle).
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
- Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

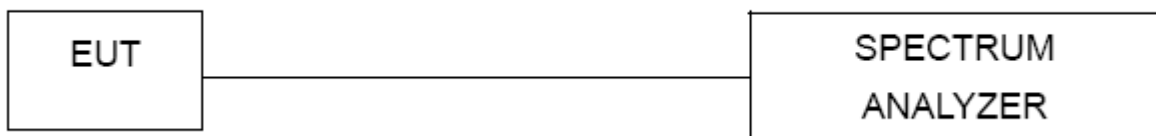

5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**


	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/MHz)	Limit (dBm)	Result
Band1	802.11a	Low	-14.206	0.69	-13.516	11.00	PASS
		Middle	-14.288	0.69	-13.598	11.00	PASS
		High	-14.369	0.69	-13.679	11.00	PASS
	802.11n20	Low	-13.67	0.11	-13.56	11.00	PASS
		Middle	-13.913	0.11	-13.803	11.00	PASS
		High	-13.916	0.11	-13.806	11.00	PASS
	802.11n40	Low	-16.633	0.21	-16.423	11.00	PASS
		High	-16.908	0.21	-16.698	11.00	PASS
	802.11ac20	Low	-13.924	0.1	-13.824	11.00	PASS
		Middle	-13.855	0.1	-13.755	11.00	PASS
		High	-14.048	0.1	-13.948	11.00	PASS
	802.11ac40	Low	-16.722	0.21	-16.512	11.00	PASS
		High	-16.905	0.21	-16.695	11.00	PASS
	802.11ac80	/	-20.457	0.4	-20.057	11.00	PASS




802.11a

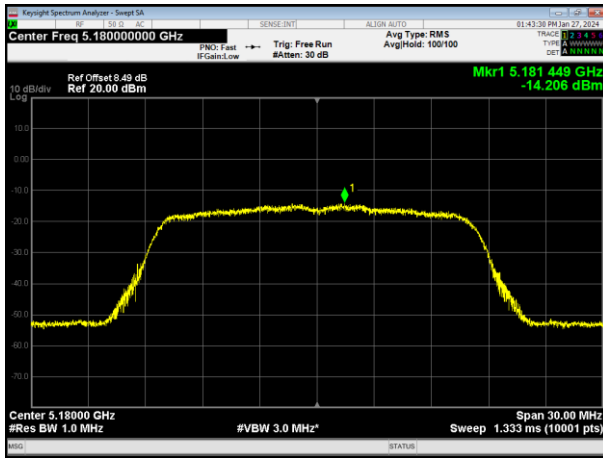


802.11n HT20

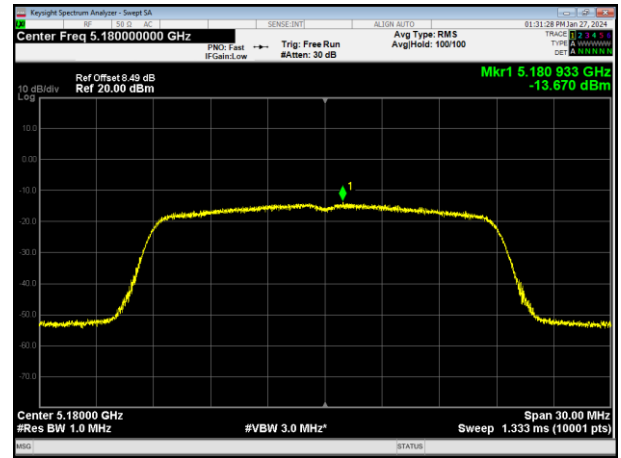


5180MHz

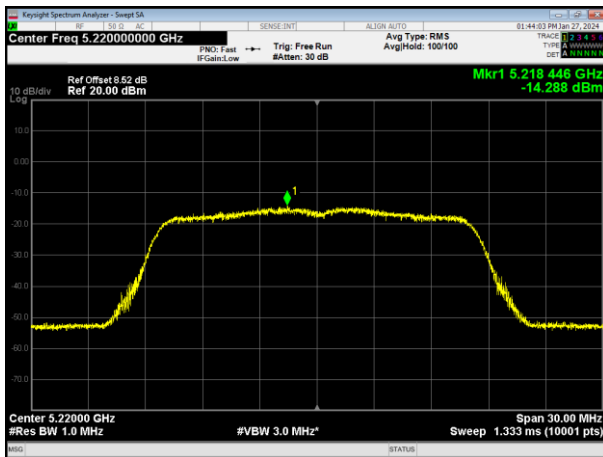


5180MHz

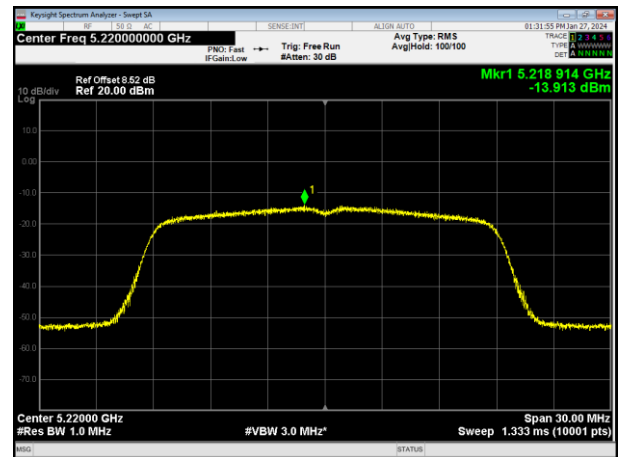

5200MHz

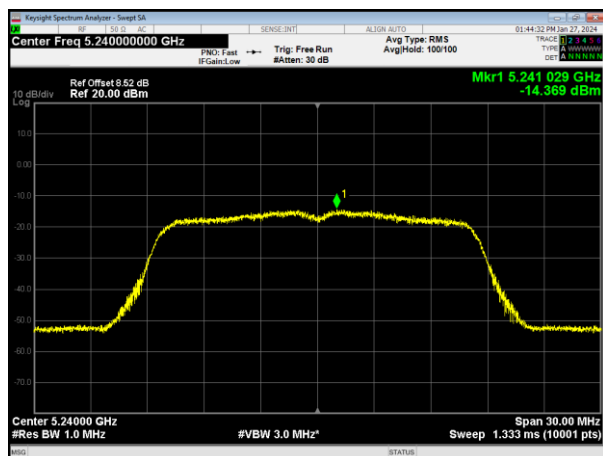

5200MHz

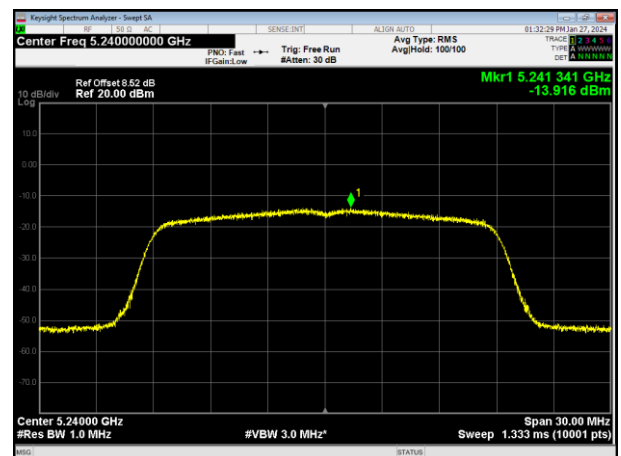


5240MHz


5240MHz




802.11n HT40

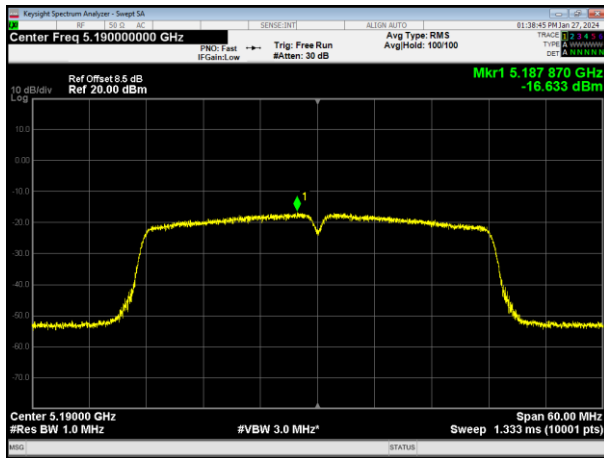


802.11ac HT20

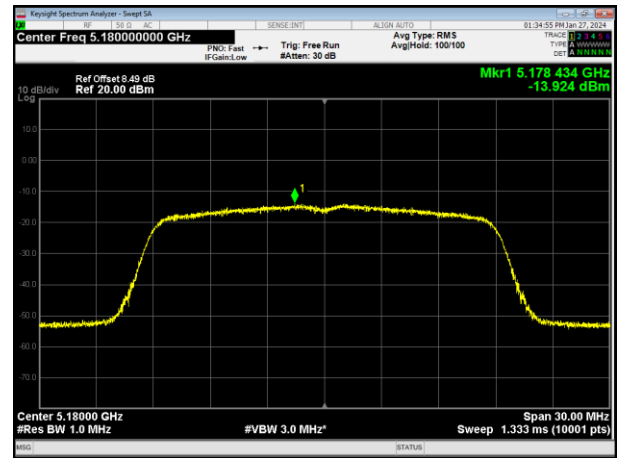

5190MHz

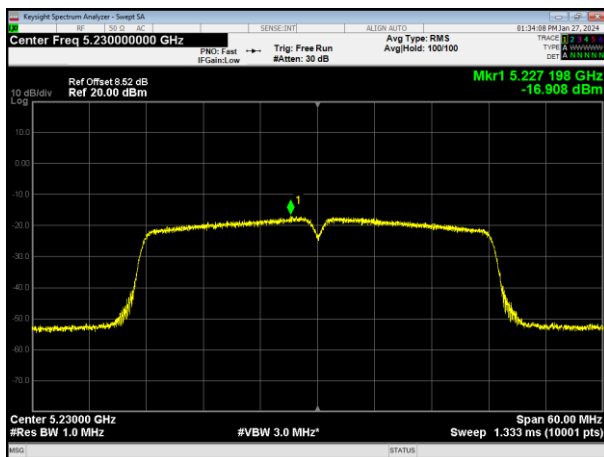


5180MHz

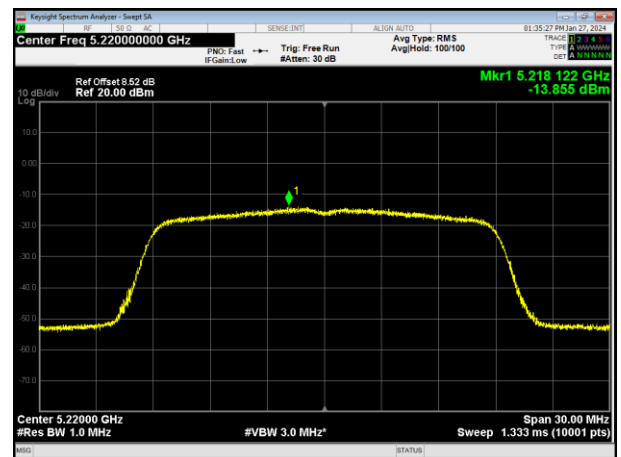

5230MHz




5200MHz

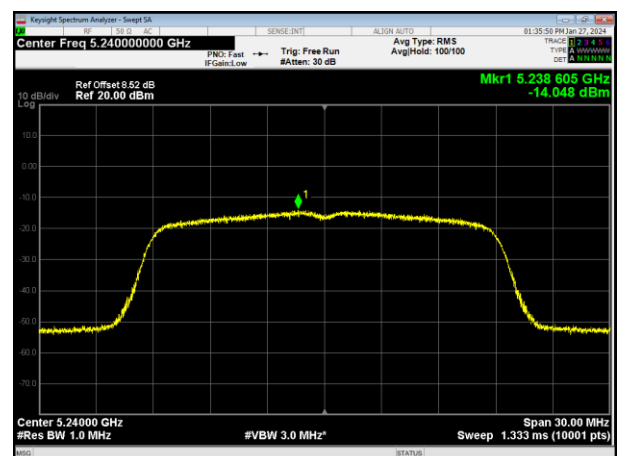


5240MHz




802.11ac HT40

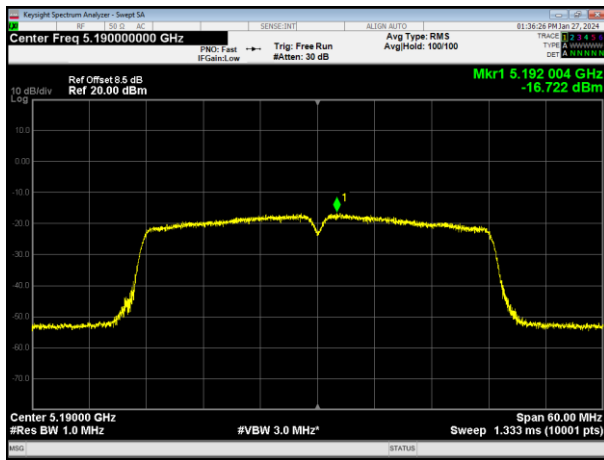

802.11ac HT80

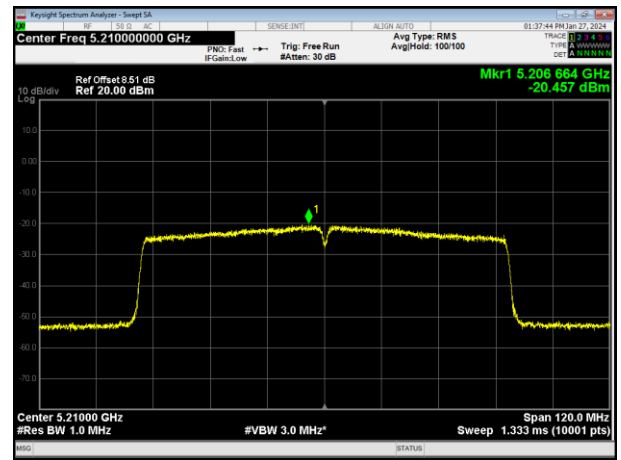

5190MHz

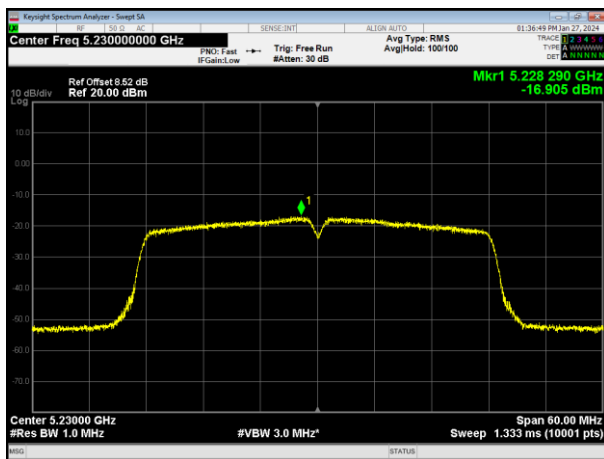

5210MHz

5230MHz