

Xiamen Linkpower Tech. Co., Ltd

RF TEST REPORT

Report Type:

FCC Part 15.225 RF report

Model:

CSxxx-xxA/xx/xx/xxC/xx,
HSxxx-xxA/xx/xx/xxC/xx

REPORT NUMBER:

2305A0778SHA-001

ISSUE DATE:

January 4, 2024

DOCUMENT CONTROL NUMBER:

TTRFFCCPART15C_V1 © 2018 Intertek



Applicant: Xiamen Linkpower Tech. Co., Ltd
4th Floor, Building 3, No.29 Xinle Road, Haicang District, Xiamen, Fujian,
361026, China

Manufacturer: Xiamen Linkpower Tech. Co., Ltd
4th Floor, Building 3, No.29 Xinle Road, Haicang District, Xiamen, Fujian,
361026, China

Manufacturing Site: Xiamen Linkpower Tech. Co., Ltd
4th Floor, Building 3, No.29 Xinle Road, Haicang District, Xiamen, Fujian,
361026, China

Product Name: Electric Vehicle Supply Equipment

Type/Model: CSxxx-xxA/xx/xx/xxC/xx, HSxxx-xxA/xx/xx/xxC/xx

FCC ID: 2BBSV-L2

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY: REVIEWED BY:



Project Engineer
Dylan Tang



Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY..... 4

MEASUREMENT RESULT SUMMARY 5

1 GENERAL INFORMATION 6

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 6

1.2 TECHNICAL SPECIFICATION 6

1.3 DESCRIPTION OF TEST FACILITY 7

2 TEST SPECIFICATIONS..... 8

2.1 STANDARDS OR SPECIFICATION 8

2.2 MODE OF OPERATION DURING THE TEST..... 8

2.3 TEST SOFTWARE LIST 8

2.4 TEST PERIPHERALS LIST 8

2.5 TEST ENVIRONMENT CONDITION:..... 8

2.6 INSTRUMENT LIST 9

2.7 MEASUREMENT UNCERTAINTY 11

3 FUNDAMENTAL EMISSION 12

3.1 LIMIT 12

3.2 MEASUREMENT PROCEDURE 12

3.3 TEST CONFIGURATION 13

3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS 14

4 SPURIOUS EMISSION 15

4.1 LIMIT 15

4.2 MEASUREMENT PROCEDURE 15

4.3 TEST RESULTS OF RADIATED EMISSIONS 16

5 FREQUENCY STABILITY (TEMPERATURE VARIATION) 19

5.1 TEST LIMIT 19

5.2 TEST CONFIGURATION 19

5.3 TEST PROCEDURE AND TEST SETUP 20

5.4 TEST PROTOCOL 20

6 FREQUENCY STABILITY (VOLTAGE VARIATION) 21

6.1 TEST LIMIT 21

6.2 TEST CONFIGURATION 21

6.3 TEST PROCEDURE AND TEST SETUP 21

6.4 TEST PROTOCOL 22

7 CONDUCTED EMISSIONS 23

7.1 LIMIT 23

7.2 TEST CONFIGURATION 23

7.3 MEASUREMENT PROCEDURE 24

7.4 TEST RESULTS OF CONDUCTED EMISSIONS..... 25

8 20DB BANDWIDTH 27

8.1 LIMIT..... 27

8.2 TEST CONFIGURATION 27

8.3 TEST PROCEDURE AND TEST SET UP 28

8.4 TEST PROTOCOL 29

9 ANTENNA REQUIREMENT 30

Revision History

Report No.	Version	Description	Issued Date
2305A0778SHA-001	Rev. 01	Initial issue of report	January 4, 2024

Measurement result summary

TEST ITEM	FCC REFERANCE	RESULT
Fundamental emission	15.225(a) (b) (c)	Pass
Spurious emission	15.225(d)	Pass
Frequency stability	15.225(e)	Pass
Conducted emissions	15.207	Pass
99% and 20dB Bandwidth	15.215(c)	Pass
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Electric Vehicle Supply Equipment
Type/Model:	CSxxx-xxA/xx/xx/xxC/xx,HSxxx-xxA/xx/xx/xxC/xx "xxx" denotes Appearance, can be 100=100type, 300=300 type "xxA" denotes Wattage, can be 16=16A, 32=32A, 40=40A, 48=48A "xx" denodenotes Functions, can be 01=WiFi, 02=WiFi+4G, 03=WiFi+ISO15118,04=WiFi+4G+ISO15118 "xx" denotes Screen, can be 5S=5 inch screen, 7S=7 inch screen "xxC" denotes Outlet type, can be 18C=18ft, 25C=25ft "xx" denotes Colour, can be BK=Black, WT=White, BL=Blue, SR=Sliver, GR=Grey
Description of EUT:	The EUT is Electric Vehicle Supply Equipment with RFID Function, it Supports WIFI and LTE function, the wireless modular FCC ID is 2AC7Z-ESP32WROOM32U and XMR201909EC25AFX. There are some series model. And they are same except the appearance. So choose CSxxx-xxA/xx/xx/xx/xxC/xx to test as representative.
Rating:	208-240Vac, 60Hz
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	V7.0
Hardware Version:	C13
Sample received date:	May 30, 2023
Date of test:	May 30, 2023 ~ January 4, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	AM 100%

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)

ANSI C63.10 (2013)

2.2 Mode of operation during the test

While testing, the internal modulation and continuously transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No	Description	Band and Model	S/No
-	-	-	-

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2024-02-08
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-10
<input type="checkbox"/>	A.M.N.	R&S	ENV 216	EC 3393	2024-07-17
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2024-06-05
<input type="checkbox"/>	Absorbing clamp	R&S	MDS 21	EC 2108	2024-06-25
<input type="checkbox"/>	CDN	Schwarzbeck	CDNM3	EC 6351	2024-10-10
<input type="checkbox"/>	CDN	Schwarzbeck	CDN M2	EC 6350	2024-10-10
<input checked="" type="checkbox"/>	Attenuator	Weinschel	68-6-44	EC 3043-9	2024-02-07
<input type="checkbox"/>	Tri-loop	Schwarzbeck	HXYZ 9170	EC 3384	2024-01-30
<input type="checkbox"/>	Voltage Probe	Schwarzbeck	Esh2-z3	EC 6204	2024-04-05
<input type="checkbox"/>	Current probe	R&S	EZ-17	EC 3221	2024-02-15
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T2-02	EC 3754	2024-02-08
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T4-02	EC 3755	2024-02-08
<input type="checkbox"/>	I.S.N.	FCC	FCC-TLISN -T8-02	EC 3756	2024-02-08
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-22
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	ESR	EC6501	2024-09-24
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input type="checkbox"/>	TRILOG broadband Antenna	Schwarzbeck	VULB9168	EC 6402	2024-02-14
<input type="checkbox"/>	Pre-amplifier	R&S	AFS42- 00101800-25-S- 42	EC 5262	2024-06-15
<input type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2024-12-08
<input type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2024-02-15
<input type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2024-09-15

TEST REPORT

<input type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2026-09-12
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input type="checkbox"/>	Horn antenna	ETS	3116c	EC 5955	2024-07-22
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-11
<input type="checkbox"/>	Shielded room	Zhongyu	-	EC 2839	2024-01-11
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
<input type="checkbox"/>	Fully-anechoic chamber	Albatross project	-	EC 3047	2024-07-08
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2024-03-09
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5201	2024-04-09
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2024-02-28
<input type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2024-04-11
<input type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2024-08-16

TEST REPORT**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.90 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

3 Fundamental Emission

Test result: Pass

3.1 Limit

Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50


3.2 Measurement Procedure

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

3.3 Test Configuration

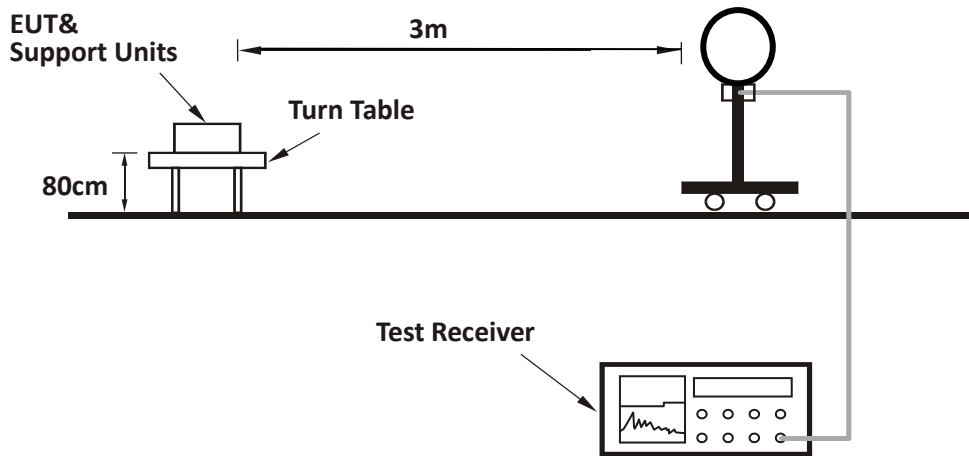

TEST REPORT

3.4 Test Results of Fundamental Emissions

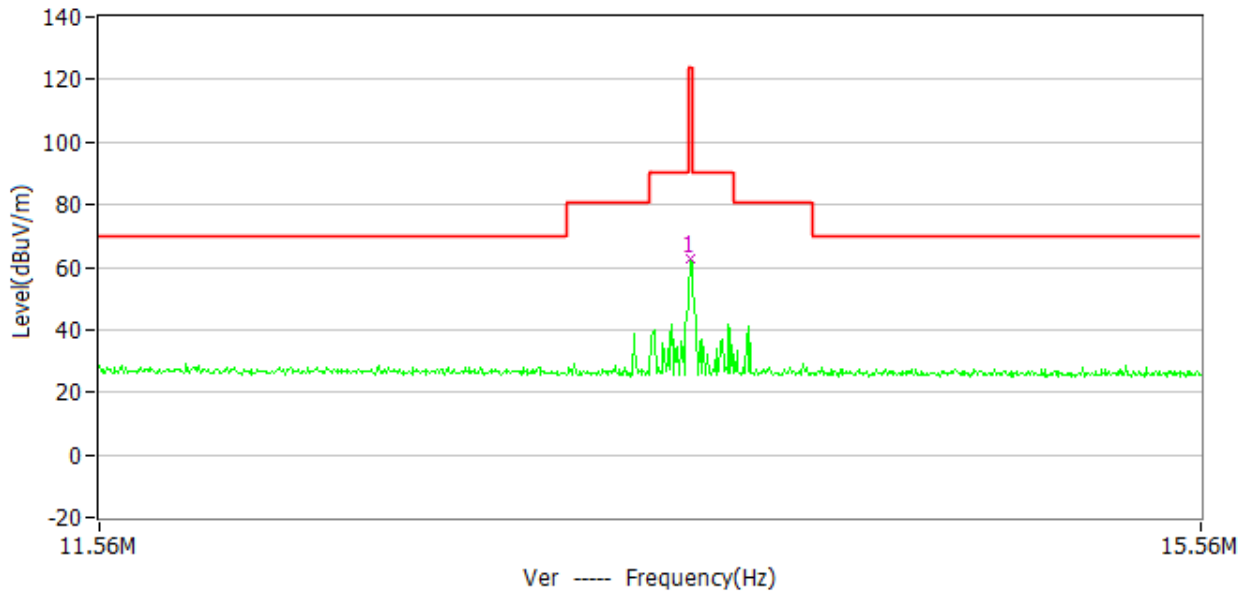

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
X	13.56	62.4	20.50	124.00	61.6	PK
Y	13.56	60.1	20.50	124.00	63.9	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

4 Spurious Emission

Test result: Pass

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- f) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- g) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- h) Both X and Y axes of the antenna are set to make the measurement.
- i) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- j) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- 2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- a) The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

TEST REPORT

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. All modes of operation were evaluated and the worst-case emissions were reported

4.3 Test Results of Radiated Emissions

The EUT has been tested in all three orthogonal planes, it has the worst case(RFID+RFID) when it is in horizontal position for both below 30MHz & above 30MHz.


Test data below 30MHz:

Antenna Polarization	Frequency	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector	Remark
X	10.100kHz	55.7	20.1	127.5	71.8	PK	Spurious
X	492.000kHz	68.4	20.2	73.8	5.4	PK	Spurious
X	573.000kHz	67.1	20.2	72.4	5.3	PK	Spurious
X	721.500kHz	64.9	20.1	70.4	5.6	PK	Spurious
X	843.000kHz	62.3	20.1	69.1	6.8	PK	Spurious
X	7.170MHz	44.3	20.4	69.5	25.2	PK	Spurious
Y	9.900kHz	68.2	20.1	127.7	59.5	PK	Spurious
Z	460.500kHz	69.0	20.1	94.3	25.3	PK	Spurious
Y	496.500kHz	68.4	20.2	73.7	5.3	PK	Spurious
Y	627.000kHz	66.5	20.2	71.7	5.1	PK	Spurious
Y	789.000kHz	64.1	20.1	69.7	5.6	PK	Spurious
Y	1.631MHz	41.2	20.2	63.4	22.2	PK	Spurious


TEST REPORT

30MHz to 1000MHz:

Horizontal

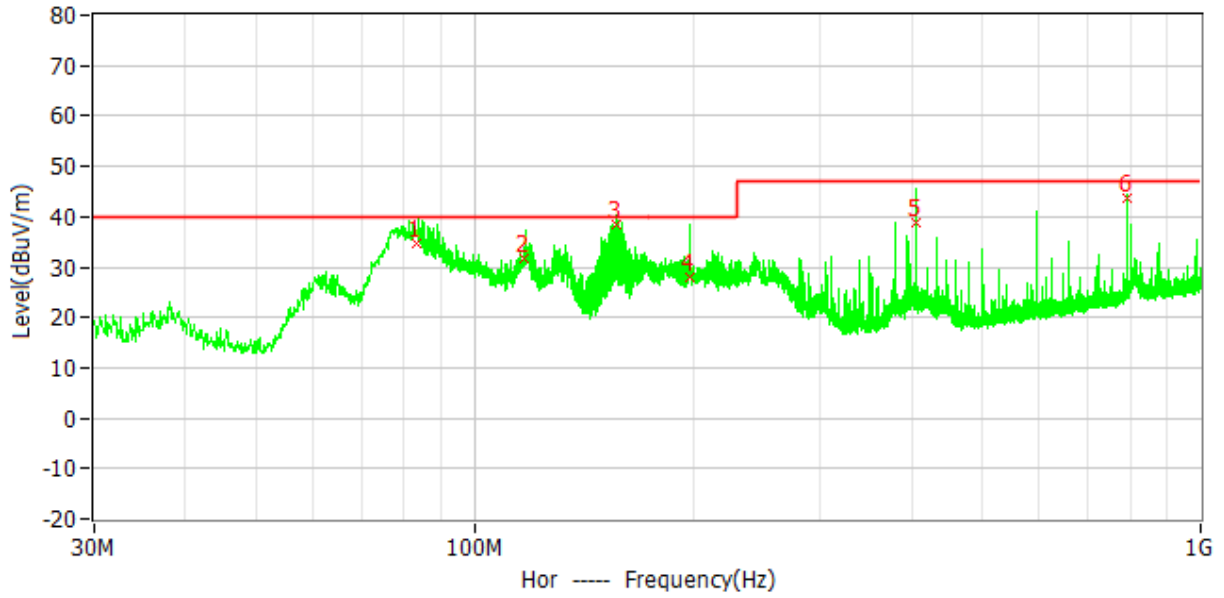

Vertical

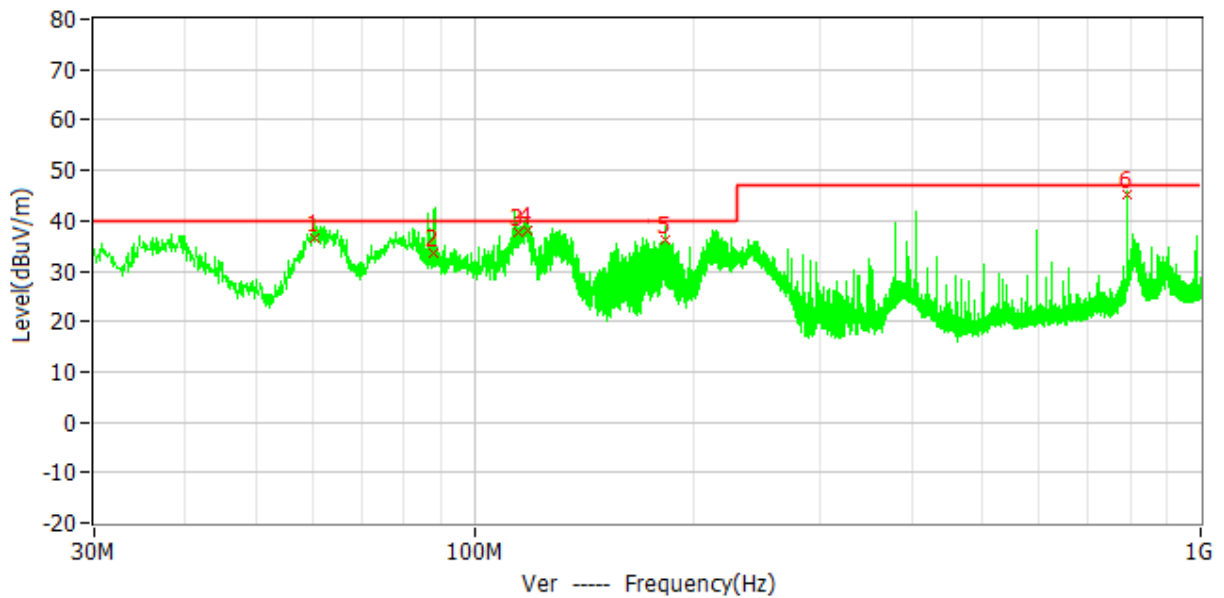

TEST REPORT

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin	Detector
H	83.095MHz	34.5	10.1	40.0	5.5	QP
H	117.283MHz	31.6	11.8	40.0	8.4	QP
H	156.573MHz	38.3	14.4	40.0	1.7	QP
H	198.245MHz	28.1	11.5	40.0	11.9	QP
H	406.804MHz	38.8	17.7	47.0	8.2	QP
H	792.001MHz	43.8	24.8	47.0	3.2	QP
V	60.465MHz	36.6	13.8	40.0	3.4	QP
V	88.062MHz	33.5	9.5	40.0	6.5	QP
V	115.045MHz	37.6	11.6	40.0	2.4	QP
V	118.346MHz	37.9	11.9	40.0	2.1	QP
V	182.944MHz	36.3	12.9	40.0	3.7	QP
V	792.033MHz	45.3	24.8	47.0	1.7	QP

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.


5 Frequency Stability (Temperature Variation)

Test result: PASS

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage.

5.2 Test Configuration

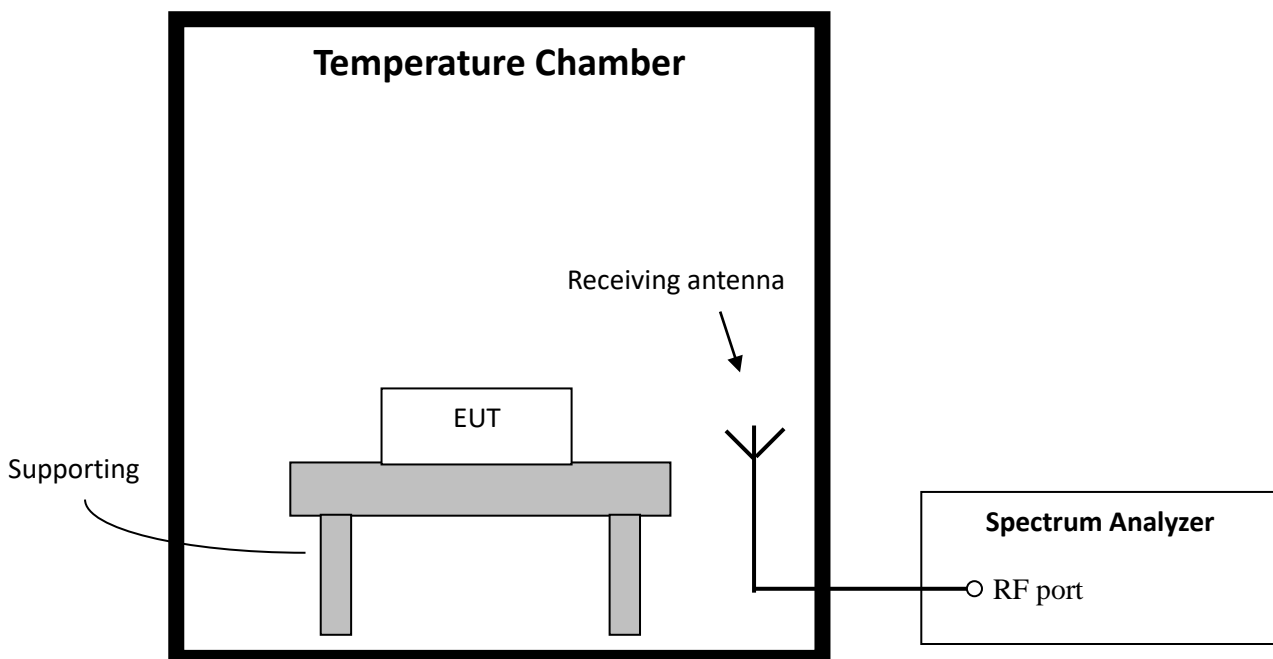

TEST REPORT

5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
240	-20	13.553	13.560	0.007	0.01
	-10	13.556		0.004	
	0	13.560		0	
	10	13.560		0	
	20	13.557		0.003	
	30	13.555		0.005	
	40	13.556		0.004	
	50	13.554		0.006	


6 Frequency Stability (Voltage Variation)

Test result: PASS

6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration

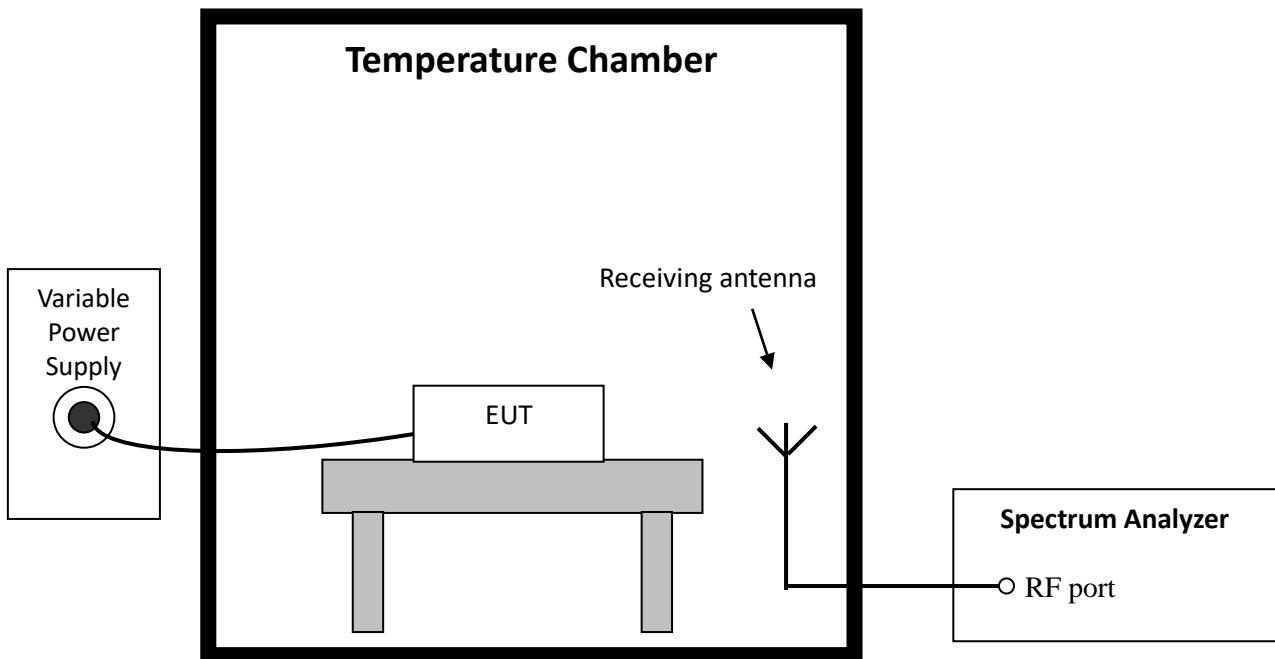

6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	240	13.560	13.560	0	0.01
	204	13.553		0.007	
	276	13.555		0.005	

7 Conducted emissions


Test result: Pass

7.1 Limit

Frequency of Emission (MHz)	Conducted Emissions Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

7.2 Test Configuration

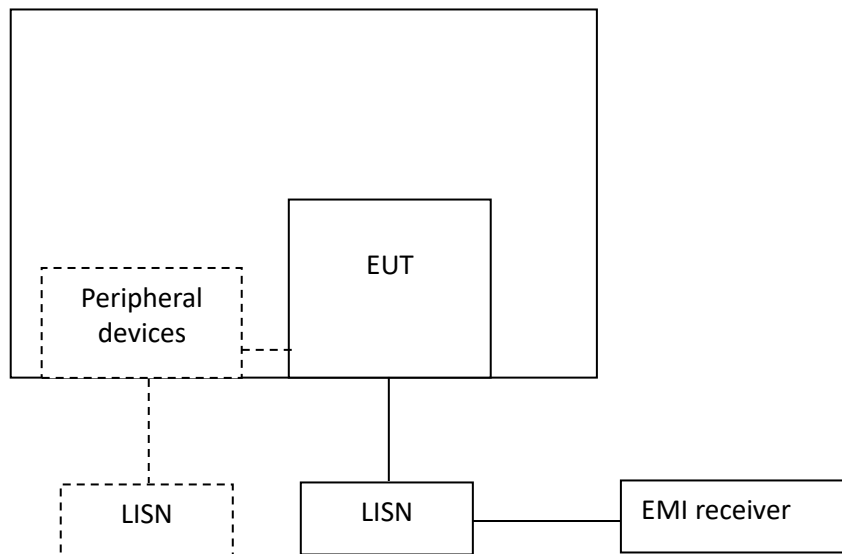

TEST REPORT**7.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.



Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT

7.4 Test Results of Conducted Emissions

Test Curve:

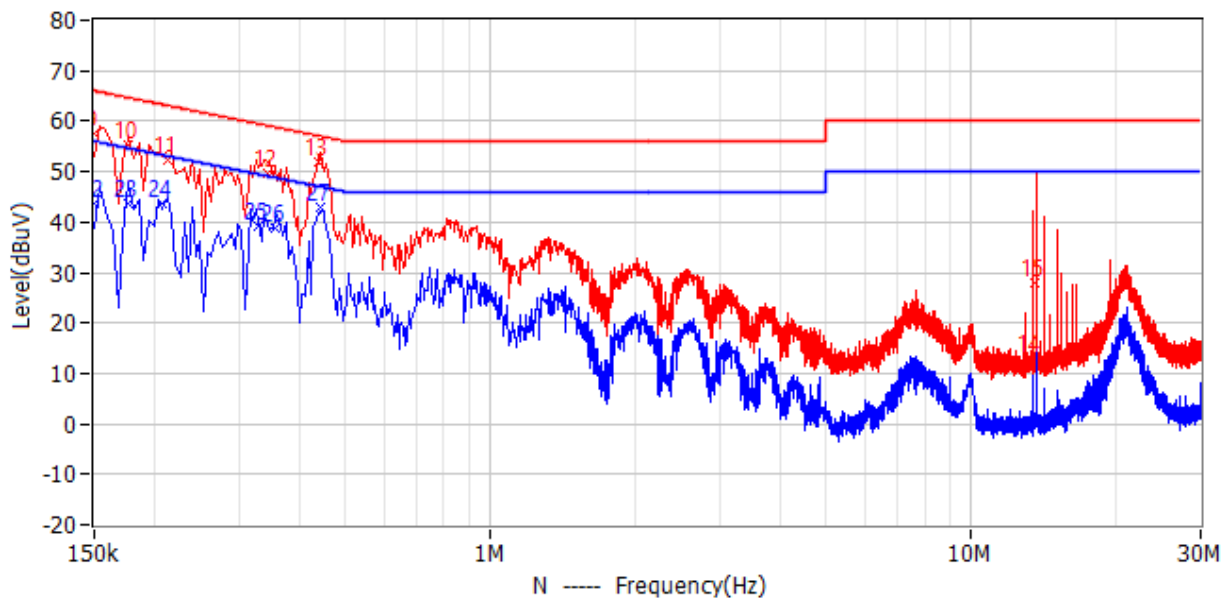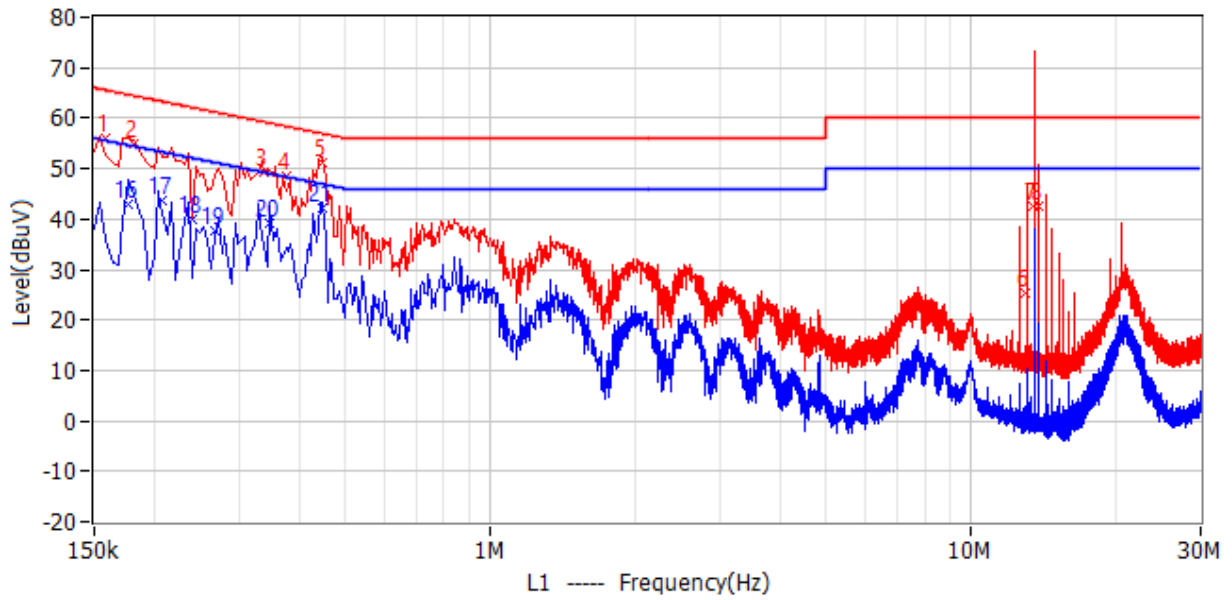

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	159.000kHz	65.5	55.9	9.6	49.7	6.2	QP	L1
2	181.500kHz	64.4	54.9	9.5	48.7	6.2	QP	L1
3	339.000kHz	59.2	49.3	9.9	43.1	6.2	QP	L1
4	375.000kHz	58.4	48.5	9.9	42.3	6.2	QP	L1
5	447.000kHz	56.9	51.3	5.6	45.1	6.2	QP	L1
6	12.993MHz	60.0	25.4	34.6	18.6	6.8	QP	L1
7	13.430MHz	60.0	42.6	17.4	35.8	6.8	QP	L1
8	13.776MHz	60.0	42.4	17.6	35.6	6.8	QP	L1
9	150.000kHz	66.0	57.4	8.6	51.2	6.2	QP	N
10	177.000kHz	64.6	55.4	9.2	49.3	6.1	QP	N
11	213.000kHz	63.1	52.1	11.0	45.9	6.2	QP	N
12	343.500kHz	59.1	49.8	9.3	43.6	6.2	QP	N
13	438.000kHz	57.1	51.9	5.2	45.7	6.2	QP	N
14	13.362MHz	60.0	12.9	47.1	6.1	6.8	QP	N
15	13.592MHz	60.0	28.0	32.0	21.2	6.8	QP	N
16	177.000kHz	54.6	43.1	11.5	37.0	6.1	AV	L1
17	208.500kHz	53.3	43.8	9.5	37.6	6.2	AV	L1
18	240.000kHz	52.1	39.9	12.2	33.7	6.2	AV	L1
19	267.000kHz	51.2	37.8	13.4	31.6	6.2	AV	L1
20	348.000kHz	49.0	39.0	10.0	32.8	6.2	AV	L1
21	447.000kHz	46.9	42.3	4.6	36.1	6.2	AV	L1
22	150.000kHz	56.0	43.7	12.3	37.5	6.2	AV	N
23	177.000kHz	54.6	43.5	11.1	37.4	6.1	AV	N
24	208.500kHz	53.3	43.5	9.8	37.3	6.2	AV	N
25	330.000kHz	49.5	39.1	10.4	32.9	6.2	AV	N
26	357.000kHz	48.8	38.7	10.1	32.5	6.2	AV	N
27	442.500kHz	47.0	42.8	4.2	36.6	6.2	AV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

5. The emissions of number 6, 13, 19 and 26 are the product's RF signal.


8 20dB Bandwidth

Test result: Pass

8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

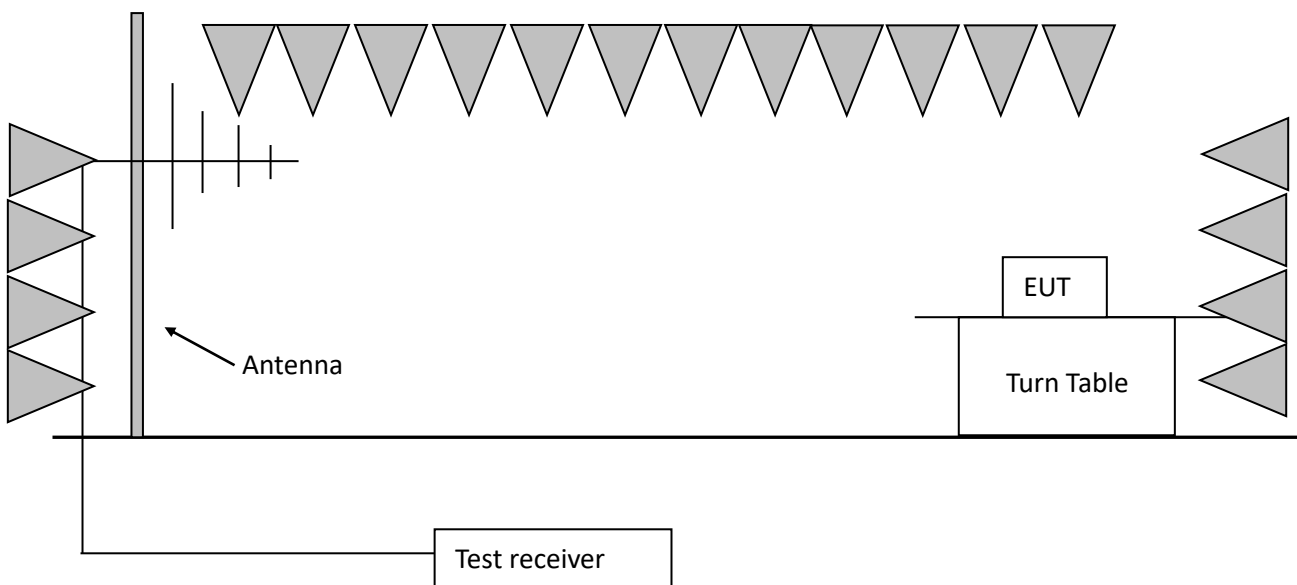

TEST REPORT**8.3 Test procedure and test set up**

The measurement was applied in a 3m semi-anechoic chamber.

The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

TEST REPORT

8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.559576	13.560248	0.672	13.553 ~ 13.567



9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****