

FCC PART 15 SUBPART C TEST REPORT**FCC PART 15.231**Report Reference No..... : **BSL23070101-P01R01**FCC ID..... : **2BBW4-JUMCC06B**Approved by
(position+printed name+signature).. : RF Manager Vivian Jiang

Date of issue..... : August 8, 2023

Testing Laboratory Name : BSL Testing Co., Ltd.Address..... : 1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District,
Shenzhen, Guangdong, 518052, People's Republic of China**Applicant's name..... : Dongguan Kaisen mechanical and electrical equipment
Technology Co., Ltd.**Address..... : Room 401, Building 4, No. 1, Bianpu 2nd Road, Qiaotou Town,
Dongguan City, Guangdong Province**Test specification..... :**Standard..... : **FCC Part 15.231****BSL Testing Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the BSL Testing Co., Ltd. is acknowledged as copyright owner and source of the material. BSL Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : Chicken Coop Door

Trade Mark..... : N/A

Manufacturer..... : Dongguan Kaisen mechanical and electrical equipment Technology
Co., Ltd.

Model/Type reference..... : JUMCC06B

Listed Models : JUMCC01, JUMCC02, JUMCC03, JUMCC04, JUMCC05,
JUMCC06, JUMCC07, JUMCC08, HW0120, HW0121

Ratings..... : ASK

Modulation : 433.92MHz

Frequency..... : DC 6.0V From Battery

Result..... : **PASS**

TEST REPORT

Equipment under Test : Chicken Coop Door

Model /Type : JUMCC06B

Listed Models : JUMCC01, JUMCC02, JUMCC03, JUMCC04, JUMCC05, JUMCC06, JUMCC07, JUMCC08, HW0120, HW0121

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested.

Applicant : Dongguan Kaisen mechanical and electrical equipment Technology Co., Ltd.

Address : Room 401, Building 4, No. 1, Bianpu 2nd Road, Qiaotou Town, Dongguan City, Guangdong Province

Manufacturer : Dongguan Kaisen mechanical and electrical equipment Technology Co., Ltd.

Address : Room 401, Building 4, No. 1, Bianpu 2nd Road, Qiaotou Town, Dongguan City, Guangdong Province

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | |
|--|-----------|
| 1 TEST STANDARDS | 4 |
| 2 SUMMARY | 5 |
| 2.1 General Remarks..... | 5 |
| 2.2 Product Description..... | 5 |
| 2.3 Equipment Under Test..... | 5 |
| 2.4 Short description of the Equipment under Test (EUT)..... | 5 |
| 2.5 Block Diagram of Test Setup..... | 5 |
| 2.6 Special Accessories..... | 5 |
| 2.7 Related Submittal(s) / Grant (s)..... | 6 |
| 2.8 Modifications..... | 6 |
| 3 TEST ENVIRONMENT | 7 |
| 3.1 Address of the test laboratory..... | 7 |
| 3.2 Test Facility..... | 7 |
| 3.3 Environmental conditions..... | 7 |
| 3.4 Summary of measurement results..... | 8 |
| 3.5 Statement of the measurement uncertainty..... | 8 |
| 3.6 Equipments Used during the Test..... | 8 |
| 4 TEST CONDITIONS AND RESULTS | 10 |
| 4.1 AC Power Conducted Emission..... | 10 |
| 4.2 Radiated Emission..... | 11 |
| 4.3 20dB Bandwidth..... | 17 |
| 4.4 Deactivation Time..... | 18 |
| 4.5 Antenna Requirement..... | 19 |
| 5 TEST SETUP PHOTOS OF THE EUT | 20 |
| 6 PHOTOS OF THE EUT | 21 |

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.231](#): Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

2 SUMMARY

2.1 General Remarks

| | | |
|--------------------------------|---|----------------|
| Date of receipt of test sample | : | June 22, 2023 |
| Testing commenced on | : | June 22, 2023 |
| Testing concluded on | : | August 8, 2023 |

2.2 Product Description

| | |
|-----------------------|--|
| Product Name: | Chicken Coop Door |
| Model/Type reference: | JUMCC06B |
| Testing sample ID: | BSL23070101-P01R01-1# (Engineer sample), BSL23070101-P01R01-2#(Normal sample) |
| Power supply: | DC 6.0V From Battery |
| Modulation: | ASK |
| Operation frequency: | 433.92MHz |
| Channel number: | 1 |
| Antenna type: | PCB Antenna |
| Antenna gain: | 0 dBi |

2.3 Equipment Under Test

Power supply system utilised


| | | | |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz | <input type="radio"/> 120V / 60Hz |
| | | <input type="radio"/> 12 V DC | <input type="radio"/> 24 V DC |
| | | <input checked="" type="radio"/> Other (specified in blank below) DC 6.0V From Battery | |

2.4 Short description of the Equipment under Test (EUT)

This is a Chicken Coop Door .

For more details, refer to the user's manual of the EUT.

2.5 Block Diagram of Test Setup



2.6 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description | Manufacturer | Model | Technical Parameters | Certificate | Provided by |
|-------------|--------------|-------|----------------------|-------------|-------------|
| / | / | / | / | / | / |



| | | | | | |
|---|---|---|---|---|---|
| / | / | / | / | / | / |
|---|---|---|---|---|---|

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

BSL Testing Co., Ltd.

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 562200 Designation Number: CN1338

BSL Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

A2LA-Lab Cert. No.: 4707.01

BSL Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

| | |
|-----------------------|--------------|
| Temperature: | 25 ° C |
| | |
| Humidity: | 45 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

| | |
|-----------------------|--------------|
| Temperature: | 25 ° C |
| | |
| Humidity: | 44 % |
| | |
| Atmospheric pressure: | 950-1050mbar |

3.4 Summary of measurement results

| FCC and IC Requirements | | |
|--------------------------------------|---|------|
| FCC Part 15.207 | Conducted Emission | N/A |
| FCC Part 15.231(a)(2) | Automatically Deactivate | PASS |
| FCC Part 15.231(b) | Electric Field Strength of Fundamental Emission | PASS |
| FCC Part 15.205 & 15.209 & 15.231(b) | Electric Field Strength of Spurious Emission | PASS |
| FCC Part 15.231(c) | -20dB bandwidth | PASS |

Remark: The measurement uncertainty is not included in the test result.

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the BSL Testing Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for BSL Testing Co., Ltd. :

| Test | Range | Measurement Uncertainty | Notes |
|-----------------------------|------------|-------------------------|-------|
| Radiated Emission | 9KHz~30MHz | 3.82 dB | (1) |
| Radiated Emission | 30~1000MHz | 4.06 dB | (1) |
| Radiated Emission | 1~18GHz | 5.14 dB | (1) |
| Radiated Emission | 18-40GHz | 5.38 dB | (1) |
| Conducted Disturbance | 0.15~30MHz | 2.14 dB | (1) |
| Transmitter power conducted | 1~40GHz | 0.57 dB | (1) |
| Conducted spurious emission | 1~40GHz | 1.60 dB | (1) |
| OBW | 1~40GHz | 25 Hz | (1) |
| PSD | 1~40GHz | 0.02 dBm | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
|--------------------------------|---------------|---------------|------------|--------------|------------|
| ESPI Test Receiver | ROHDE&SCHWARZ | ESPI 3 | 100379 | 2022-10-28 | 2023-10-27 |
| Absorbing Clamp | ROHDE&SCHWARZ | MDS-21 | 100126 | 2022-10-28 | 2023-10-27 |
| Electrostatic analog generator | LIONCEL | ESD-203B | 0210502 | 2022-10-28 | 2023-10-27 |
| Signal Generator | HP | 8648A | 3633A02081 | 2022-10-28 | 2023-10-27 |
| Amplifier | A&R | 500A100 | 17034 | 2022-10-28 | 2023-10-27 |
| Amplifier | A&R | 100W/1000M1 | 17028 | 2022-10-28 | 2023-10-27 |
| Isotropic Field Monitor | A&R | FM2000 | 16829 | 2022-10-28 | 2023-10-27 |
| Isotropic Field Probe | A&R | FLW220100 | 16755 | 2022-10-28 | 2023-10-27 |
| Biconic Antenna | EMCO | EVOD PROTANK8 | 9507-2534 | 2022-10-28 | 2023-10-27 |
| Log-periodic Antenna | A&R | AT1080 | 16812 | 2022-10-28 | 2023-10-27 |


| | | | | | |
|---------------------------------|------------------------|------------------|-----------------------|------------|------------|
| Injection Clamp | EMTEST | F-2031-23MM | 368 | 2022-10-28 | 2023-10-27 |
| Attenuator | EMTEST | ATT6 | 0010222a | 2022-10-28 | 2023-10-27 |
| Computer | IBM | 8434 | 1S8434KCE99BLX LO* | - | - |
| Oscillator | KENWOOD | AG-203D | 3070002 | 2022-10-28 | 2023-10-27 |
| Spectrum Analyzer | HAMEG | HM5012 | - | - | - |
| Power Supply | LW | APS1502 | - | - | - |
| 5K VA AC Power Source | California Instruments | 5001iX | 56060 | 2022-10-28 | 2023-10-27 |
| CDN | EM TEST | CDN M2/M3 | - | 2022-10-28 | 2023-10-27 |
| Attenuation | EM TEST | ATT6/75 | - | 2022-10-28 | 2023-10-27 |
| Resistance | EM TEST | R100 | - | 2022-10-28 | 2023-10-27 |
| Electromagnetic Injection Clamp | LITTHI | EM101 | 35708 | 2022-10-28 | 2023-10-27 |
| Inductive Components | EM TEST | MC2630 | - | 2022-10-28 | 2023-10-27 |
| Antenna | EM TEST | MS100 | - | 2022-10-28 | 2023-10-27 |
| Signal Generator | ROHDE&SCHWARZ | SMT03 | 100029 | 2022-10-28 | 2023-10-27 |
| Power DJ MIXER | AR | 150W1000 | 300999 | 2022-10-28 | 2023-10-27 |
| Field probe | Holaday | HI-6005 | 105152 | 2022-10-28 | 2023-10-27 |
| Bilog Antenna | Chase | CBL6111C | 2576 | 2022-10-28 | 2023-10-27 |
| Loop Antenna | EMCO | 6502 | 00042960 | 2022-10-28 | 2023-10-27 |
| ESPI Test Receiver | ROHDE&SCHWARZ | ESI7 | 838786/013 | 2022-10-28 | 2023-10-27 |
| 3m OATS | -- | -- | N/A | 2022-10-28 | 2023-10-27 |
| Horn Antenna | SCHWARZBECK | VULB9168 | N/A | 2022-10-28 | 2023-10-27 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | N/A | 2022-10-28 | 2023-10-27 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2022-10-28 | 2023-10-27 |
| Power sensor | Anritsu | MA2491A | 32263 | 2022-10-28 | 2023-10-27 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 9163/340 | 2022-10-28 | 2023-10-27 |
| 9*6*6 Anechoic | -- | -- | N/A | 2021-08-21 | 2024-8-20 |
| Test Receiver | Rohde&Schwarz | ESC17(9kHz-7GHz) | 100336 | 2022-10-28 | 2023-10-27 |
| Broadband antenna | Schwarzbeck | VULB9168 | 01222 | 2022-10-28 | 2023-10-27 |
| Horn antenna | Schwarzbeck | BBHA9120D | 02476 | 2022-10-28 | 2023-10-27 |
| Preamplifier | Schwarzbeck | BBV9745 | 00250 | 2022-10-28 | 2023-10-27 |
| Preamplifier | N/A | TRLA-01018G440B | 21081001 | 2022-10-28 | 2023-10-27 |
| 3M method semi anechoic chamber | SKET | 9m*6m*6m | 2021082304 | 2021-8-23 | 2024-8-22 |
| Pointer hygrometer | M&G | ARC92570 | N/A | 2022-10-28 | 2023-10-27 |
| Spectrometer | ROHDE&SCHWARZ | FSP 9kHz-40GHz | N/A | 2022-10-28 | 2023-10-27 |
| Synthesizer | ROHDE&SCHWARZ | CMW500 | N/A | 2022-10-28 | 2023-10-27 |

Note: The Cal.Interval was one year.

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

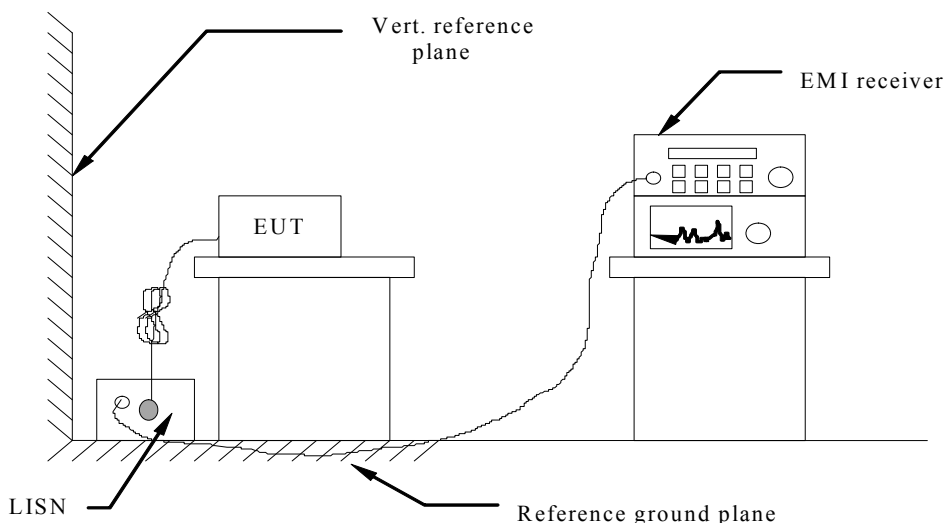

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST RESULTS

The EUT is powered by the Battery, So this test item is not applicable for the EUT.

4.2 Radiated Emission

Limit

For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m) | Radiated (μV/m) |
|-----------------|-------------------|--|-----------------------|
| 0.009-0.49 | 3 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$ |
| 0.49-1.705 | 3 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30 | 3 | $20\log(30)+40\log(30/3)$ | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


| Funda- mental fre- quency (MHz) | Field strength of funda- mental (microvolts/ meter) | Field strength of spurious emissions (microvolts/meter) |
|--|---|---|
| 40.66– 40.70. | 2,250 | 225 |
| 70–130 | 1,250 | 125 |
| 130–174 | ¹ 1,250 to 3,750 | ¹ 125 to 375 |
| 174–260 | 3,750 | 375 |
| 260–470 | ¹ 3,750 to 12,500 | ¹ 375 to 1,250 |
| Above 470 | 12,500 | 1,250 |

¹ Linear interpolations.


[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz, $20*\log(41.6667*433.890-7083.3333)=80.82\text{dB}\mu\text{V/m}$ The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

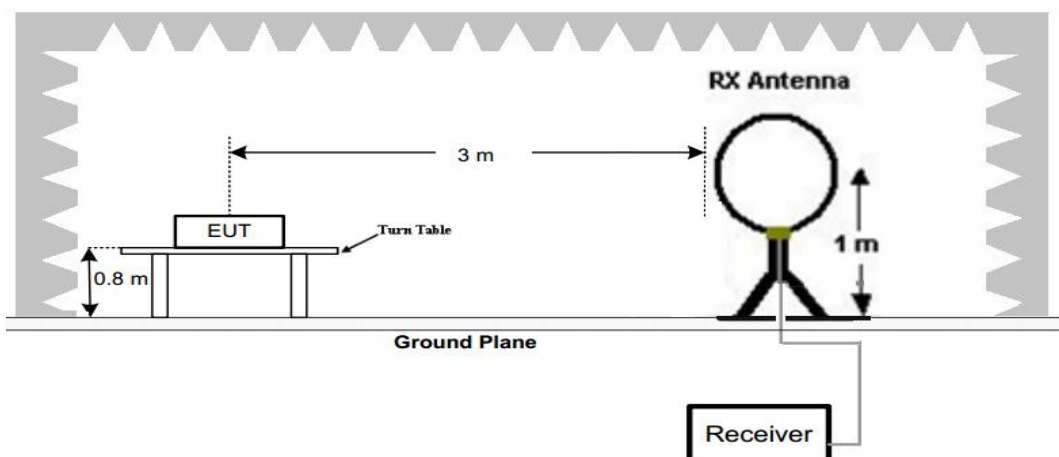

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

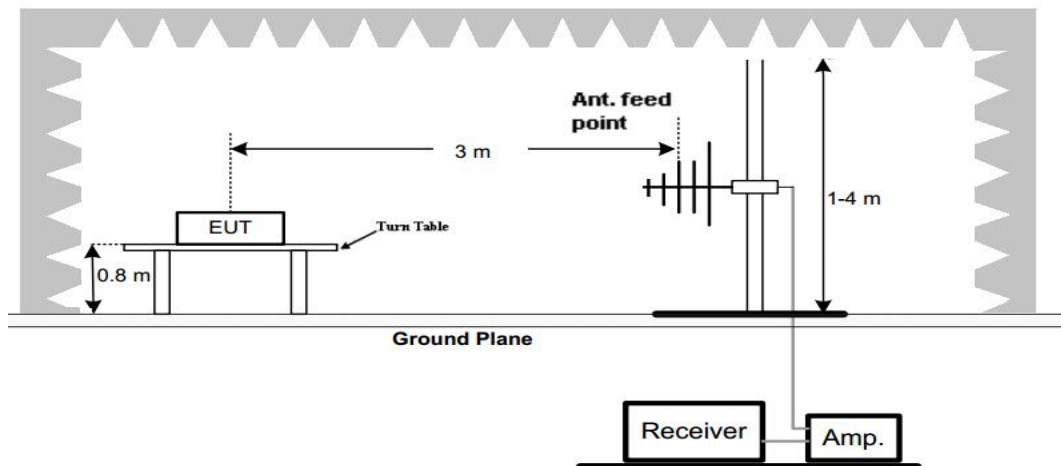

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

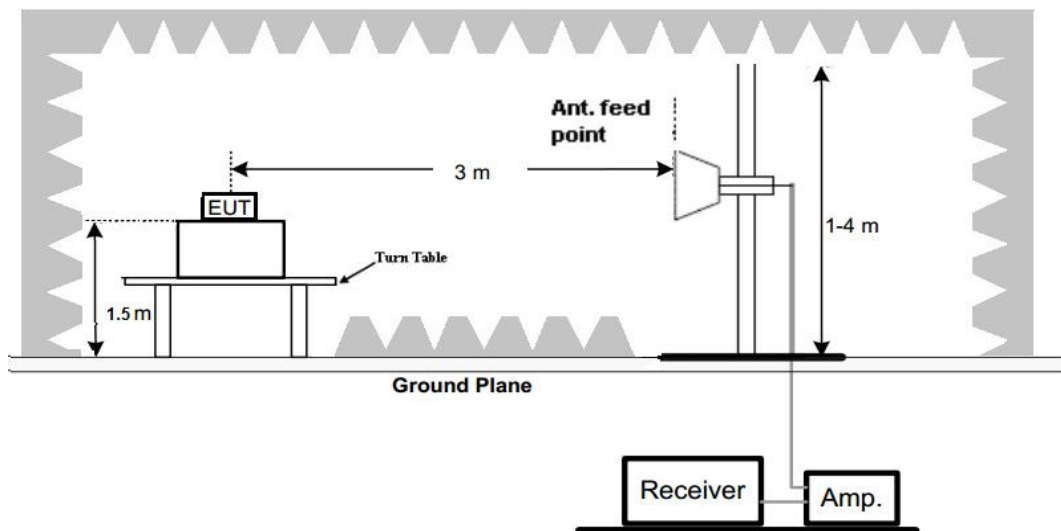**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.


TEST RESULTS

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.

Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

Radiated Spurious Emission (Between 30MHz – 1GHz)

Horizontal

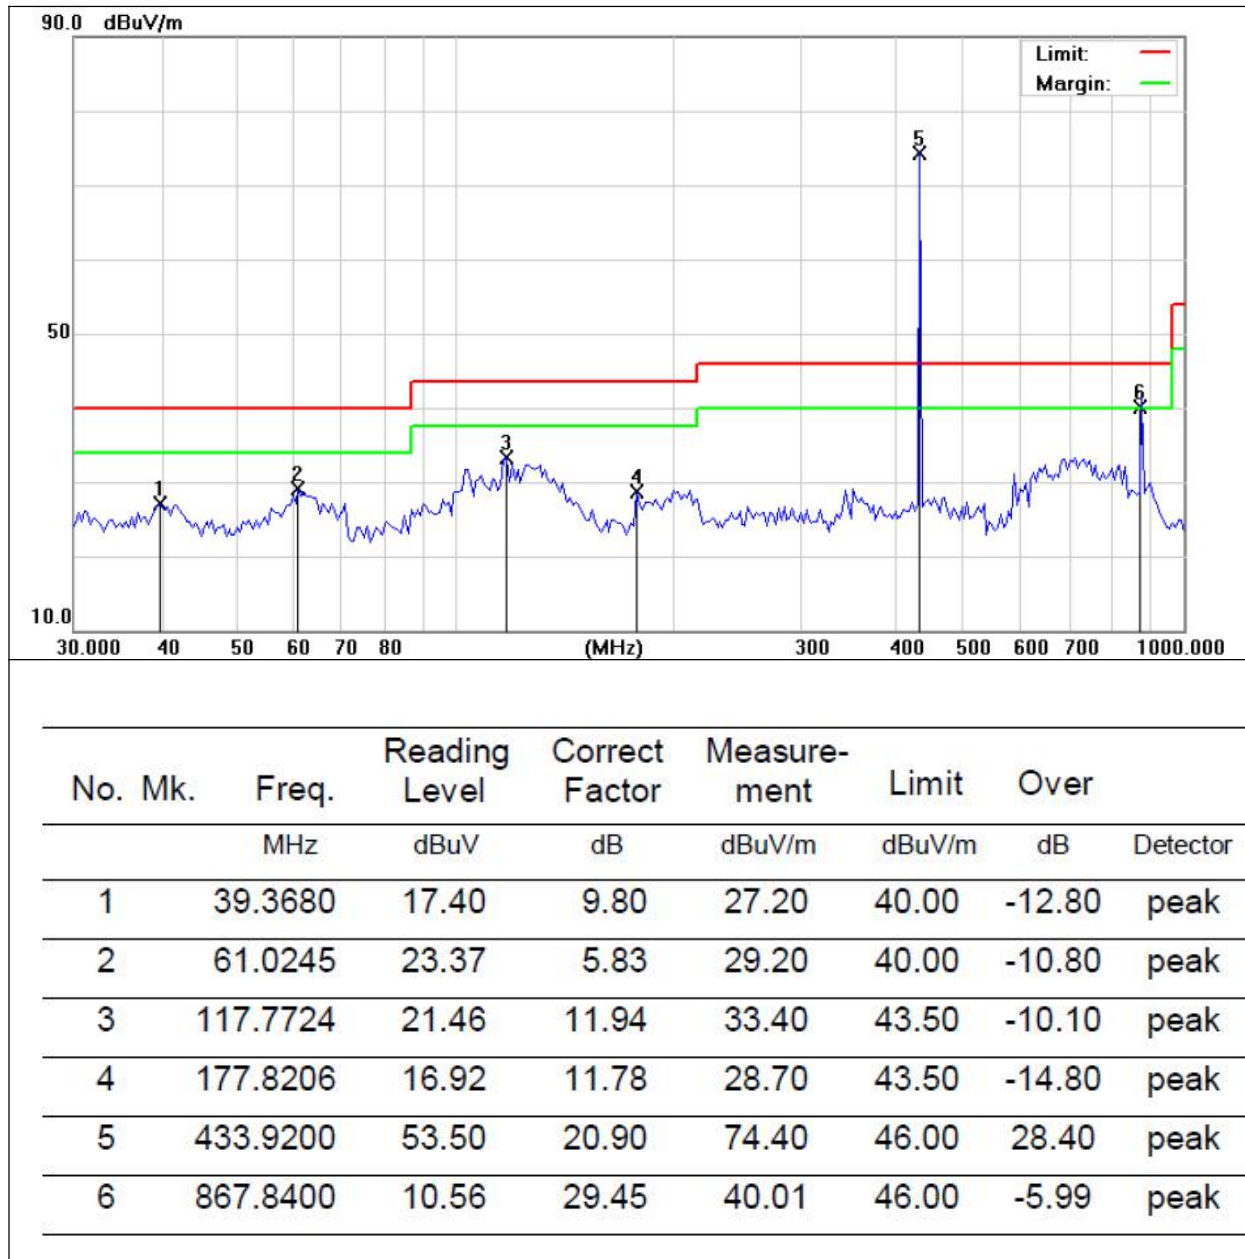


| Fundamental and Harmonics Result | | | | | | |
|----------------------------------|---------------------|--------------------|------------------------|--------------------|--------------------|------------|
| Frequency MHz | Peak Level (dBuV/m) | AV Factor (dBuV/m) | Average Level (dBuV/m) | Limitd AV (dBuV/m) | Limitd PK (dBuV/m) | Conclusion |
| 433.92 | 74.40 | -8.27 | 66.13 | 80.8 | 100.8 | PASS |
| 867.84 | 40.01 | -8.27 | 37.74 | 60.8 | 80.8 | PASS |

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dBuV/m)

Vertical

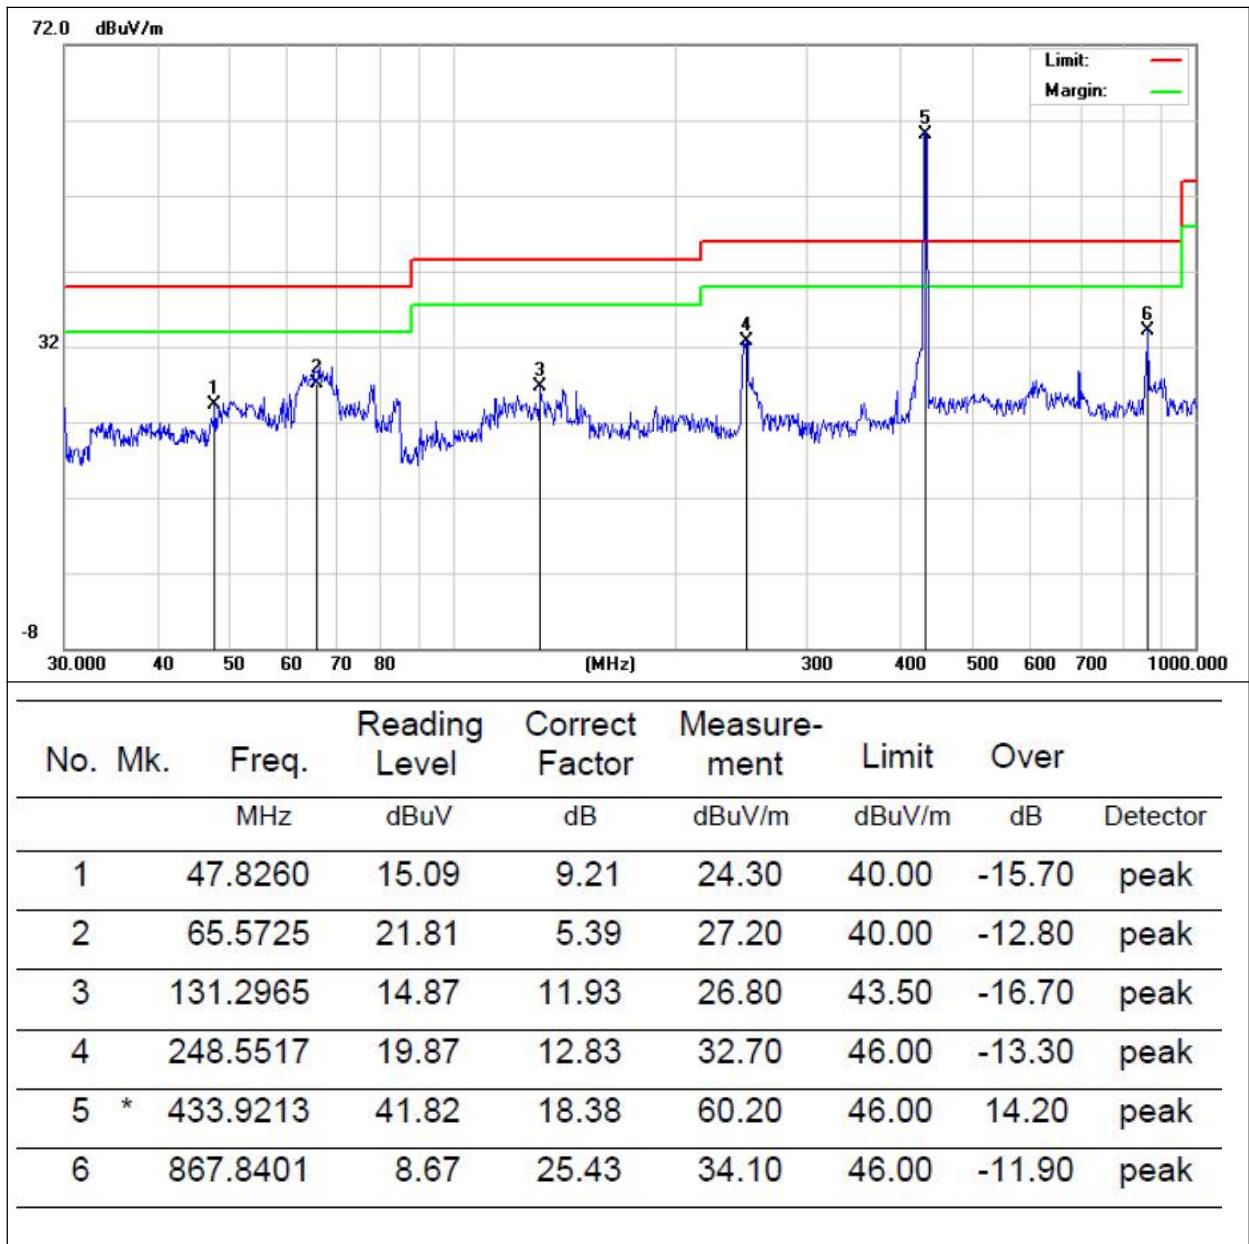

| Fundamental and Harmonics Result | | | | | | |
|----------------------------------|------------------------|-----------------------|---------------------------|-----------------------|-----------------------|------------|
| Frequency MHz | Peak Level (dBuV/m) | AV Factor (dBuV/m) | Average Level (dBuV/m) | Limitd AV (dBuV/m) | Limitd PK (dBuV/m) | Conclusion |
| 433.92 | 60.20 | -8.27 | 51.93 | 80.8 | 100.8 | PASS |
| 867.84 | 34.10 | -8.27 | 25.83 | 60.8 | 80.8 | PASS |

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dBuV/m)

Radiated Spurious Emission (1GHz to 10th harmonics)

| Frequency MHz | Peak Level dBuV/m | Duty cycle factor | Average Level dBuV/m | Limit | | Margin dB | | Polarization |
|------------------|----------------------|----------------------|----------------------------|-------|------|-----------|--------|--------------|
| | | | | PK | AV | PK | AV | |
| 1301.72 | 48.36 | -8.27 | 40.09 | 74.0 | 54.0 | -25.64 | -13.91 | Vertical |
| 1735.25 | 45.52 | -8.27 | 37.25 | 74.0 | 54.0 | -28.48 | -16.75 | Vertical |
| 2603.55 | 43.21 | -8.27 | 34.94 | 74.0 | 54.0 | -30.79 | -19.06 | Vertical |
| 3037.46 | 39.21 | -8.27 | 30.94 | 74.0 | 54.0 | -34.79 | -23.06 | Vertical |
| 3471.35 | 34.65 | -8.27 | 26.38 | 74.0 | 54.0 | -39.35 | -27.62 | Vertical |
| 3905.28 | 31.05 | -8.27 | 22.78 | 74.0 | 54.0 | -42.95 | -31.22 | Vertical |
| 1301.72 | 47.36 | -8.27 | 39.09 | 74.0 | 54.0 | -26.64 | -14.91 | Horizontal |
| 1735.25 | 42.36 | -8.27 | 34.09 | 74.0 | 54.0 | -31.64 | -19.91 | Horizontal |
| 2603.55 | 39.63 | -8.27 | 31.36 | 74.0 | 54.0 | -34.37 | -22.64 | Horizontal |
| 3037.46 | 34.65 | -8.27 | 26.38 | 74.0 | 54.0 | -39.35 | -27.62 | Horizontal |
| 3471.35 | 30.24 | -8.27 | 21.97 | 74.0 | 54.0 | -43.76 | -32.03 | Horizontal |
| 3905.28 | 28.67 | -8.27 | 20.40 | 74.0 | 54.0 | -45.33 | -33.60 | Horizontal |


Notes:

1. Average emission Level = Peak Level + Duty cycle factor
2. In a transmit cycle 100ms period found burst 46pcs, the Duty Cycle can calculate as below:


$$\text{Duty Cycle} = (1.07 \times 24 + 0.29 \times 22) / 83.04 = 0.3861$$

$$\text{AV Factor} = 20 \times \log(\text{Duty Cycle}) = 20 \times \log(0.3861) = -8.27$$


(The plot of Duty Cycle See the follow page)

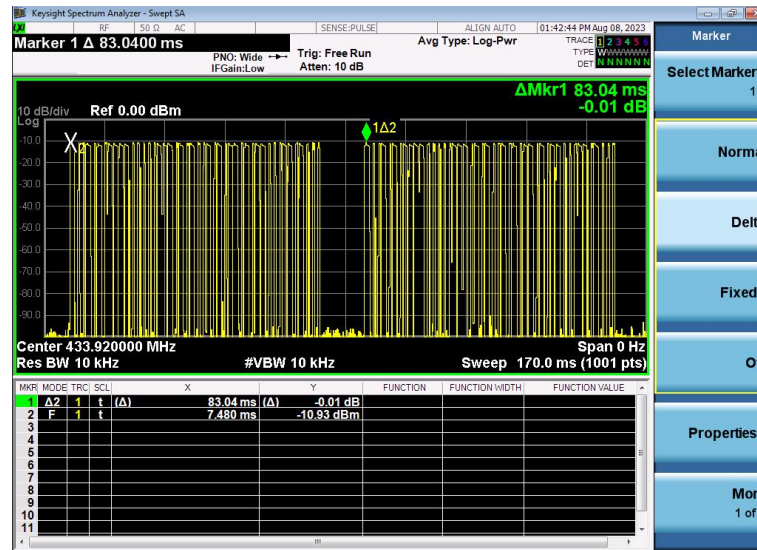

(Transmit cycle 83.04ms)

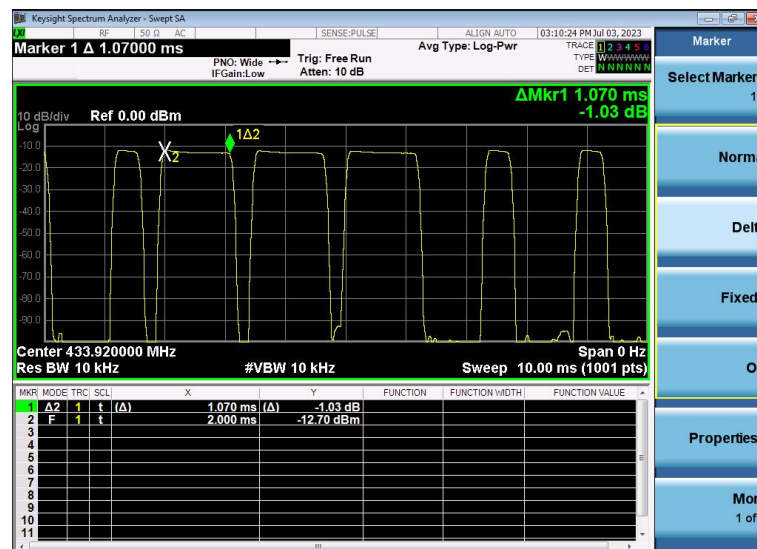

(Time per burst: 1.070ms*24pcs)

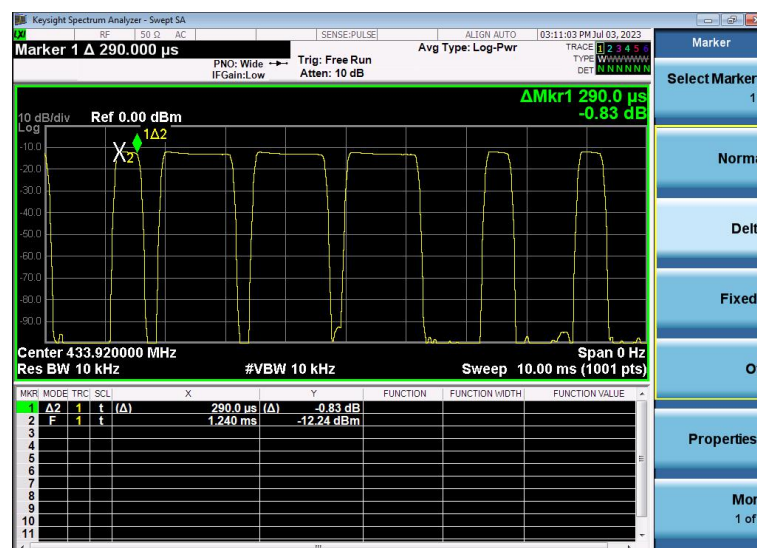


(Time per burst: 0.29ms*22pcs)

4.3 20dB Bandwidth

Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

Test Configuration



Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Test Results

| Modulation | Channel Frequency (MHz) | 20dB bandwidth (KHz) | Limit (KHz) | Result |
|------------|-------------------------|----------------------|---------------------------------|--------|
| ASK | 433.92 | 39.75 | $0.25\% \times 433.92 = 1084.8$ | Pass |

Test plot as follows:

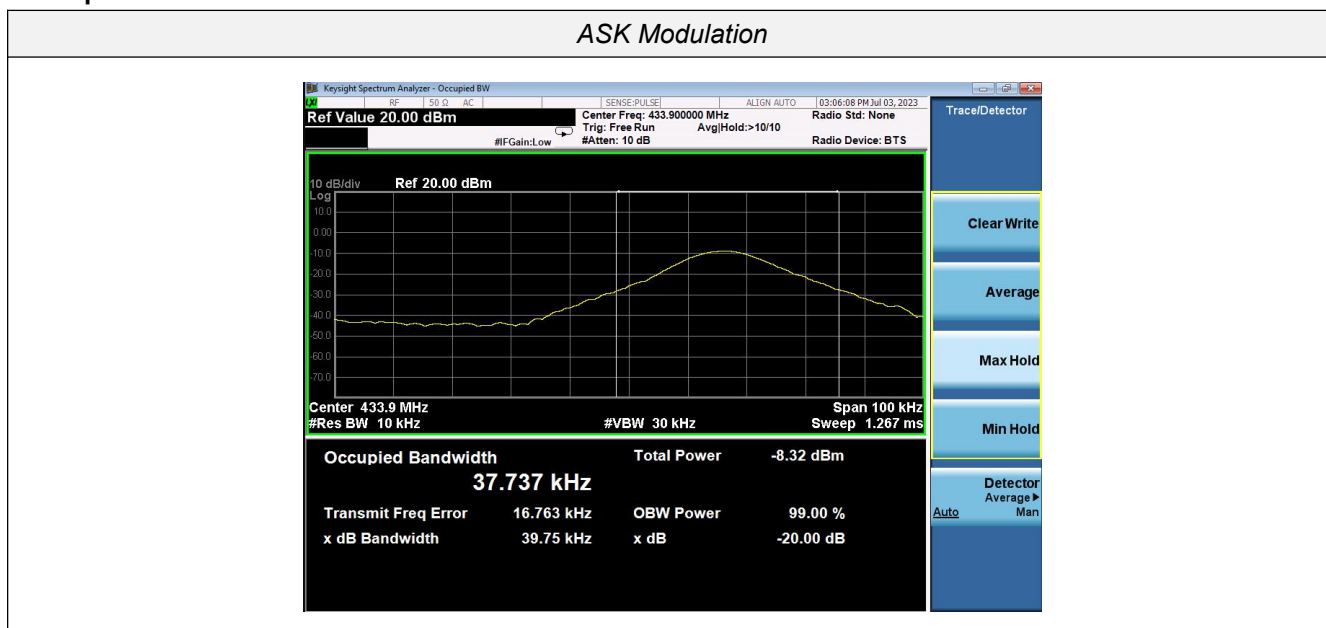


4.4 Deactivation Time

Limit

According to FCC §15.231(a)(2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test Configuration



Test Procedure

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

TEST RESULTS

Note: The transmitter was automatically activated, and the carrier frequency 433.92MHz :

| Frequency (MHz) | One transmission time (S) | Limit (S) | Result |
|--------------------|------------------------------|-----------|--------|
| 433.92 | 0.275 | 5 | Pass |



4.5 Antenna Requirement

Standard Applicable

According to FCC Part 15C 15.203

- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 0 dBi.

Remark:The antenna gain is provided by the customer , if the data provided by the customer is not accurate, BSL Testing Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

