



FCC TEST REPORT

For

Beijing Huaqing Technology Co.,Ltd

Furniture Power Distribution Unit

Test Model: PS002-PC-BK2M-2A2U1W

Additional Model No.: Please Refer to Page 6

Prepared for : Beijing Huaqing Technology Co.,Ltd
Address : High-end Industrial area, China (Beijing) Pilot Free Trade Zone, No.3679, Block D, No.12, Yushun Road, Daxing District,Beijing China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 20, 2023
Number of tested samples : 2
Serial number : A061623109-1, A061623109-2
Date of Test : June 20, 2023 ~ August 11, 2023
Date of Report : August 11, 2023





**FCC TEST REPORT
FCC CFR 47 PART 15C**

Report Reference No. : **LCSA061623109EA**

Date Of Issue..... : August 11, 2023

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park
Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China

Testing Location/ Procedure..... : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name..... : **Beijing Huaqing Technology Co.,Ltd**

Address..... : High-end Industrial area, China (Beijing) Pilot Free Trade Zone,
No.3679, Block D, No.12, Yushun Road, Daxing District,Beijing
China

Test Specification

Standard..... : FCC CFR 47 PART 15C

Test Report Form No..... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : **Furniture Power Distribution Unit**

Trade Mark..... : N/A

Test Model..... : PS002-PC-BK2M-2A2U1W

Power Supply..... : Input: AC 125V, 60Hz, 13A, 1625W
USB-A Output:5V= 2.4A each 12W(Total)
USB Output Power:5V= 3A 15W(Total)
Type-C Output: 5V=
Wirsless Output:5W/7.5W/10W/15W(Max)

Result : **Positive**

Compiled by:

Rory Huang/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



FCC TEST REPORT

Test Report No. : LCSA061623109EA	<u>August 11, 2023</u> Date of issue
--	---

Test Model.....	: PS002-PC-BK2M-2A2U1W
EUT.....	: Furniture Power Distribution Unit
Applicant.....	: Beijing Huaqing Technology Co.,Ltd
Address.....	: High-end Industrial area, China (Beijing) Pilot Free Trade Zone, No.3679, Block D, No.12, Yushun Road, Daxing District,Beijing China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: PYS High-Tech Co., Ltd
Address.....	: 1F~12F, Block 9, Lianhua Industrial Zone, Longhua Shenzhen China
Telephone.....	: /
Fax.....	: /
Factory.....	: PYS High-Tech Co., Ltd
Address.....	: 1F~12F, Block 9, Lianhua Industrial Zone, Longhua Shenzhen China
Telephone.....	: /
Fax.....	: /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





Revision History

Report Version	Issue Date	Revision Content	Revised By
000	August 11, 2023	Initial Issue	---





TABLE OF CONTENTS

- 1. GENERAL INFORMATION 6**
 - 1.1 Description of Device (EUT) 6
 - 1.2 Support equipment List 6
 - 1.3 External I/O Cable 6
 - 1.4 Description of Test Facility 6
 - 1.5 Statement of the Measurement Uncertainty 7
 - 1.6 Measurement Uncertainty 7
 - 1.7 Description of Test Modes 8
- 2. TEST METHODOLOGY 9**
 - 2.1 EUT Configuration 9
 - 2.2 EUT Exercise 9
 - 2.3 General Test Procedures 9
 - 2.3.1 Conducted Emissions 9
 - 2.3.2 Radiated Emissions 9
- 3. SYSTEM TEST CONFIGURATION 10**
 - 3.1 Justification 10
 - 3.2 EUT Exercise Software 10
 - 3.3 Special Accessories 10
 - 3.4 Block Diagram/Schematics 10
 - 3.5 Equipment Modifications 10
 - 3.6 Test Setup 10
- 4. SUMMARY OF TEST EQUIPMENT 11**
- 5. SUMMARY OF TEST RESULT 12**
- 6. POWER LINE CONDUCTED MEASUREMENT 13**
- 7. RADIATED EMISSION MEASUREMENT 16**
 - 7.1. Block Diagram of Test Setup 16
 - 7.2. Radiated Emission Limit 17
 - 7.3. EUT Configuration on Measurement 17
 - 7.4. Operating Condition of EUT 18
 - 7.5. Measuring Setting 18
 - 7.6. Test Procedure 18
 - 7.7. Test Results 19
- 8. 20 DB BANDWIDTH MEASUREMENT 28**
 - 8.1. Block Diagram of Test Setup 28
 - 8.2. Test Procedure 28
 - 8.3. Test Results 29
- 9. ANTENNA REQUIREMENT 30**
- 10. PHOTOGRAPHS OF TEST SETUP 31**
- 11. EXTERNAL PHOTOGRAPHS OF THE EUT 31**
- 12. INTERNAL PHOTOGRAPHS OF THE EUT 31**





1. GENERAL INFORMATION

1.1 Description of Device (EUT)

EUT : Furniture Power Distribution Unit
 Test Model : PS002-PC-BK2M-2A2U1W
 Additional Model No. : PS002-PC-WT2M-2A2U1W, PS003-PC-BK2M-2A2U1C1W, PS003-PC-WT2M-2A2U1C1W
 Model Declaration : The difference between all models is the appearance color of the products. PS003-PC-BK2M-2A2U1C1W and PS003-PC-WT2M-2A2U1C1W have an extra Type-C port.
 Power Supply : Input: AC 125V, 60Hz, 13A, 1625W
 USB-A Output: 5V= 2.4A each 12W(Total)
 USB Output Power: 5V= 3A 15W(Total)
 Type-C Output: 5V=
 Wireless Output: 5W/7.5W/10W/15W(Max)
 Hardware Version : V1.0
 Software Version : V1.0
 Wireless Charging :
 Operating Frequency : 110.2~205.0KHz
 Modulation Type : ASK
 Antenna Type : Coil Antenna

1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
HONOR	Phone	V30Pro	--	FCC

Note: Auxiliary equipment is provided by the laboratory.

1.3 External I/O Cable

I/O Port Description	Quantity	Cable
USB Port	2	N/A
Type-C	1	N/A

1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.





1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)
Occupied Channel Bandwidth	1GHz-40GHz	±5%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.





1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Modulation Type: CW (ASK)

Test Modes		
Mode 1	AC Adapter + EUT + Phone (Battery Status: <1%)	Record
Mode 2	AC Adapter + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 3	AC Adapter + EUT + Phone (Battery Status: <100%)	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

For AC conducted emission, pre-test at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;

For AC conducted emission, pre-test at both AC charge from power adapter modes, recorded worst case.





2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

2.3 General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a normal condition.

3.2 EUT Exercise Software

N/A.

3.3 Special Accessories

N/A.

3.4 Block Diagram/Schematics

Please refer to the related document.

3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6 Test Setup

Please refer to the test setup photo.





4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2023-06-15	2024-06-14
2	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2023-10-28
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2023-06-15	2024-06-14
4	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2023-06-15	2024-06-14
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
9	EMI Test Receiver	R&S	ESPI	101940	2022-08-17	2023-08-16
10	Artificial Mains	R&S	ENV216	101288	2023-06-15	2024-06-14
11	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2023-06-15	2024-06-14
12	EMI Test Software	Farad	EZ	/	N/A	N/A
13	Broadband Preamplifier	SCHWARZBECK	BBV9745	9719-025	2023-06-15	2024-06-14



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant
§15.203	Antenna Requirement	Sample 1	Compliant


Remark: The measurement uncertainty is not included in the test result.

N/A – Not Applicable!!!



6. POWER LINE CONDUCTED MEASUREMENT

6.1. Block Diagram of Test Setup

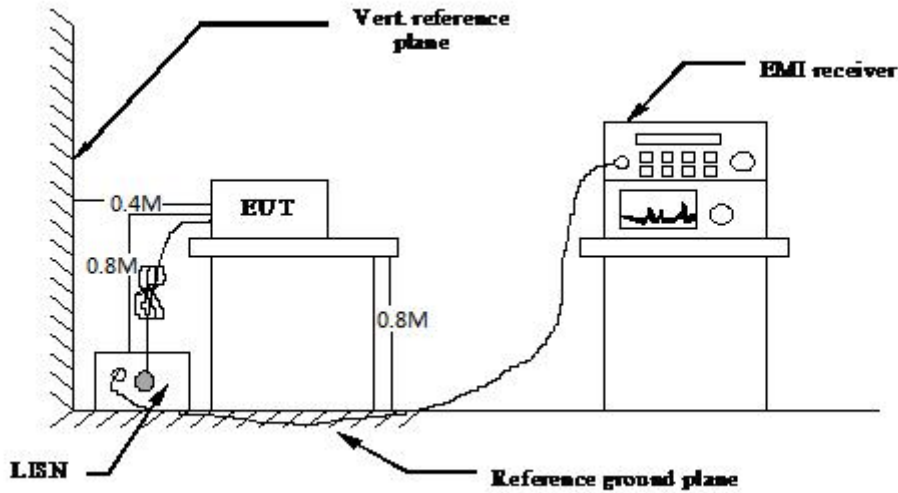

6.2. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test Results

PASS

The test data please refer to following page.


Temperature	23.5°C	Humidity	53.6%
Test Engineer	Nick Peng	Configurations	Transmit





AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))

Line

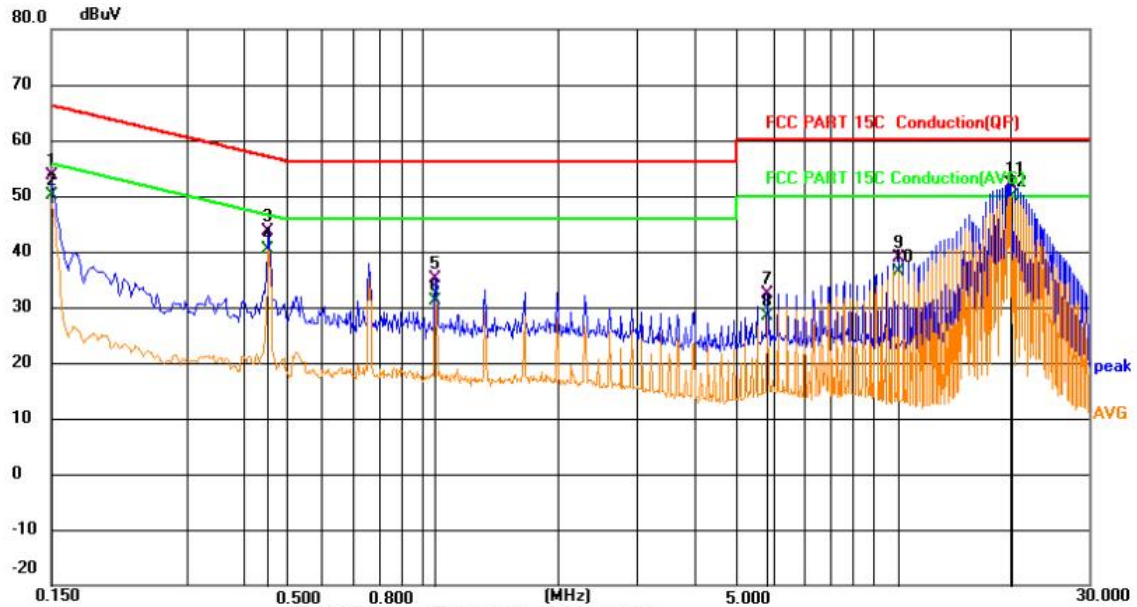

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	34.03	19.63	53.66	66.00	-12.34	QP	
2		0.1500	30.54	19.63	50.17	56.00	-5.83	AVG	
3		0.4561	24.09	19.64	43.73	56.76	-13.03	QP	
4		0.4561	20.84	19.64	40.48	46.76	-6.28	AVG	
5		1.0680	15.41	19.65	35.06	56.00	-20.94	QP	
6		1.0680	11.48	19.65	31.13	46.00	-14.87	AVG	
7		5.8291	12.74	19.70	32.44	60.00	-27.56	QP	
8		5.8291	8.79	19.70	28.49	50.00	-21.51	AVG	
9		11.3551	19.02	19.85	38.87	60.00	-21.13	QP	
10		11.3551	16.61	19.85	36.46	50.00	-13.54	AVG	
11		19.9501	31.96	20.21	52.17	60.00	-7.83	QP	
12	*	20.2516	29.78	20.19	49.97	50.00	-0.03	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Neutral

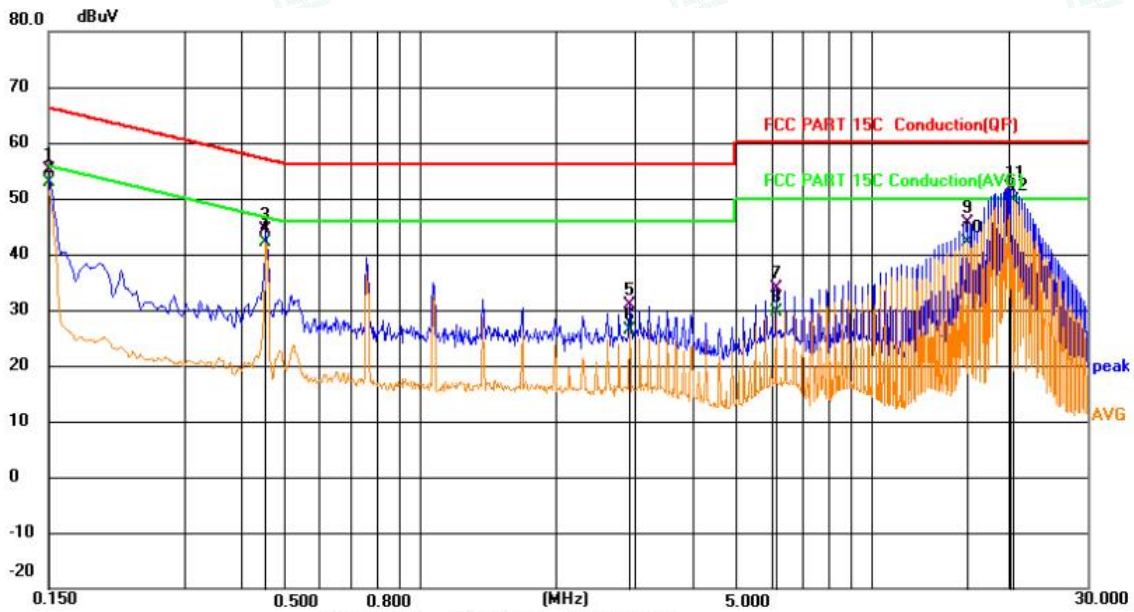

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	35.60	19.63	55.23	66.00	-10.77	QP	
2		0.1500	33.29	19.63	52.92	56.00	-3.08	AVG	
3		0.4561	24.64	19.64	44.28	56.76	-12.48	QP	
4		0.4561	22.53	19.64	42.17	46.76	-4.59	AVG	
5		2.9131	11.14	19.73	30.87	56.00	-25.13	QP	
6		2.9131	6.55	19.73	26.28	46.00	-19.72	AVG	
7		6.1351	14.11	19.80	33.91	60.00	-26.09	QP	
8		6.1351	9.91	19.80	29.71	50.00	-20.29	AVG	
9		16.2691	25.63	19.95	45.58	60.00	-14.42	QP	
10		16.2691	22.30	19.95	42.25	50.00	-7.75	AVG	
11		20.2561	31.60	20.19	51.79	60.00	-8.21	QP	
12	*	20.5576	29.41	20.18	49.59	50.00	-0.41	AVG	



***Note: Pre-scan all modes and recorded the worst case results in this report.
 Margin=Reading level + Correct - Limit





7. RADIATED EMISSION MEASUREMENT

7.1. Block Diagram of Test Setup

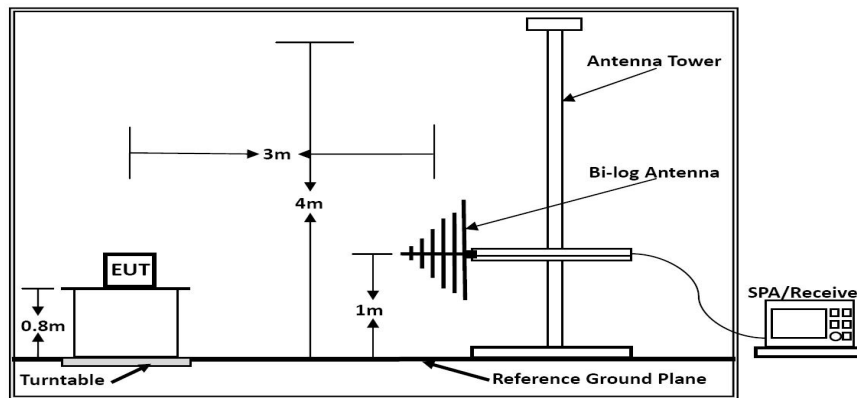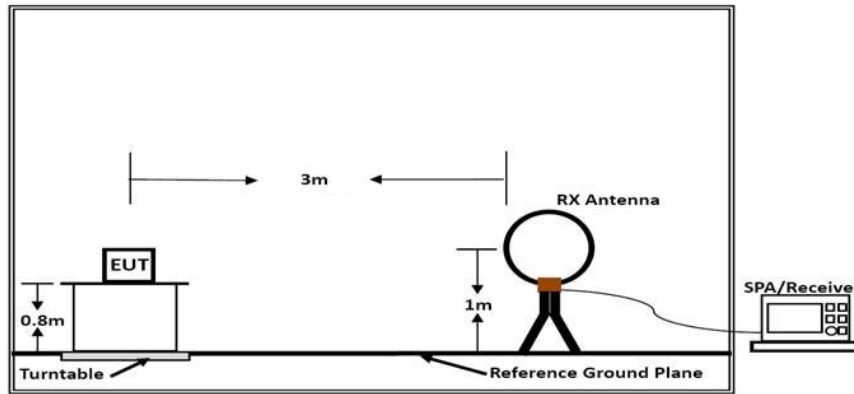

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.





7.4. Operating Condition of EUT

- (1) Setup the EUT as shown in Section 7.1.
- (2) Let the EUT work in worst test mode1 and measure it.

7.5. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

7.6. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.





2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

7.7. Test Results

PASS.

Only report the worst test data mode 1 in test report;


The test data please refer to following page:

Temperature	23.8°C	Humidity	52.5%
Test Engineer	Nick Peng	Configurations	Transmit





0.009 MHz – 30 MHz
0 degree

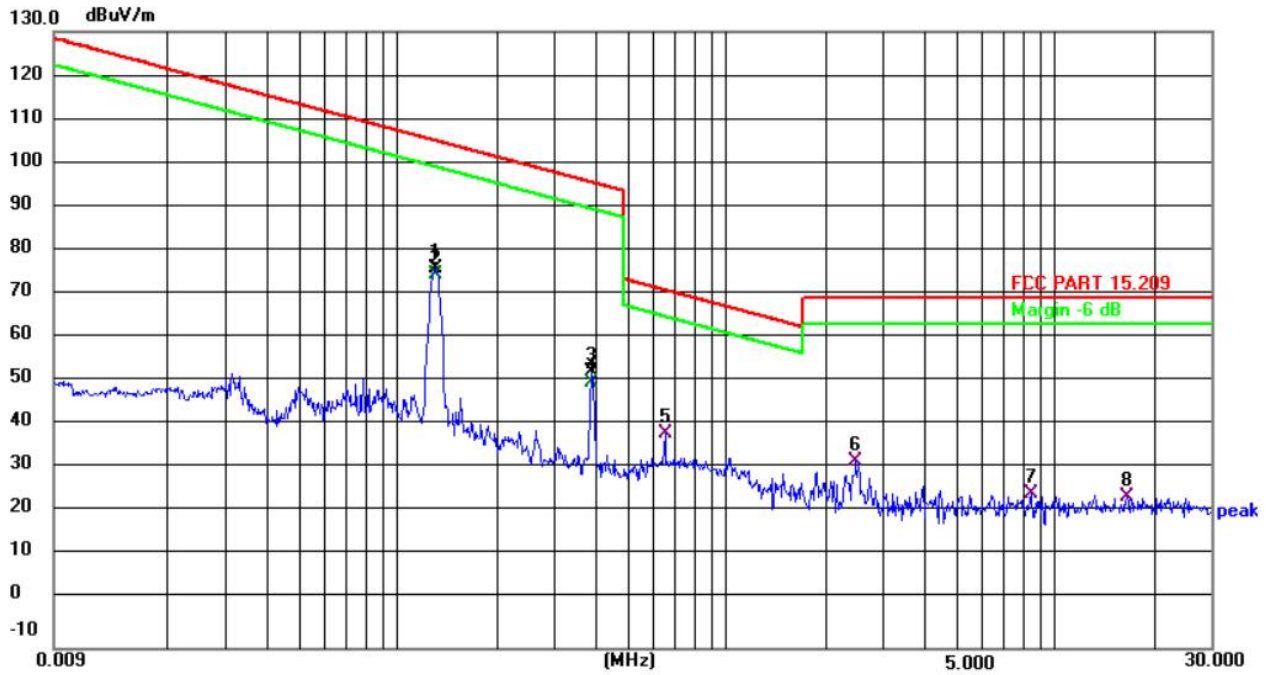


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1307	86.14	-9.79	76.35	105.21	-28.86	peak
2	0.1307	84.68	-9.79	74.89	105.21	-30.32	AVG
3	0.3911	62.51	-9.73	52.78	95.75	-42.97	peak
4	0.3911	60.03	-9.73	50.30	95.75	-45.45	AVG
5	0.6521	48.31	-9.57	38.74	71.32	-32.58	QP
6	2.4864	41.98	-9.42	32.56	69.54	-36.98	QP
7	8.4634	34.61	-9.54	25.07	69.54	-44.47	QP
8	16.5940	34.41	-9.96	24.45	69.54	-45.09	QP





90 degree

130.0 dBuV/m

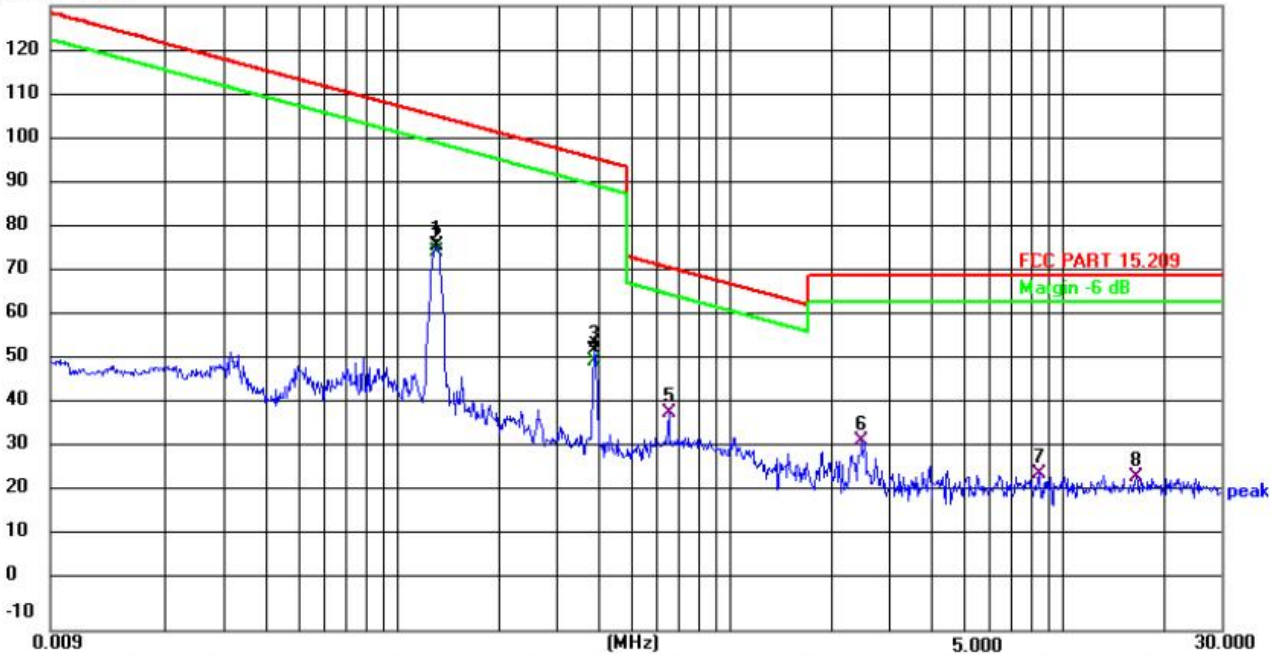

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1307	86.14	-9.79	76.35	105.21	-28.86	peak
2	0.1307	84.68	-9.79	74.89	105.21	-30.32	AVG
3	0.3911	62.51	-9.73	52.78	95.75	-42.97	peak
4	0.3911	60.03	-9.73	50.30	95.75	-45.45	AVG
5	0.6521	48.31	-9.57	38.74	71.32	-32.58	QP
6	2.4864	41.98	-9.42	32.56	69.54	-36.98	QP
7	8.4634	34.61	-9.54	25.07	69.54	-44.47	QP
8	16.5940	34.41	-9.96	24.45	69.54	-45.09	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree.

2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Below 1GHz

Temperature	23.8°C	Humidity	52.1%
Test Engineer	Nick Peng	Configurations	Transmit

Horizontal

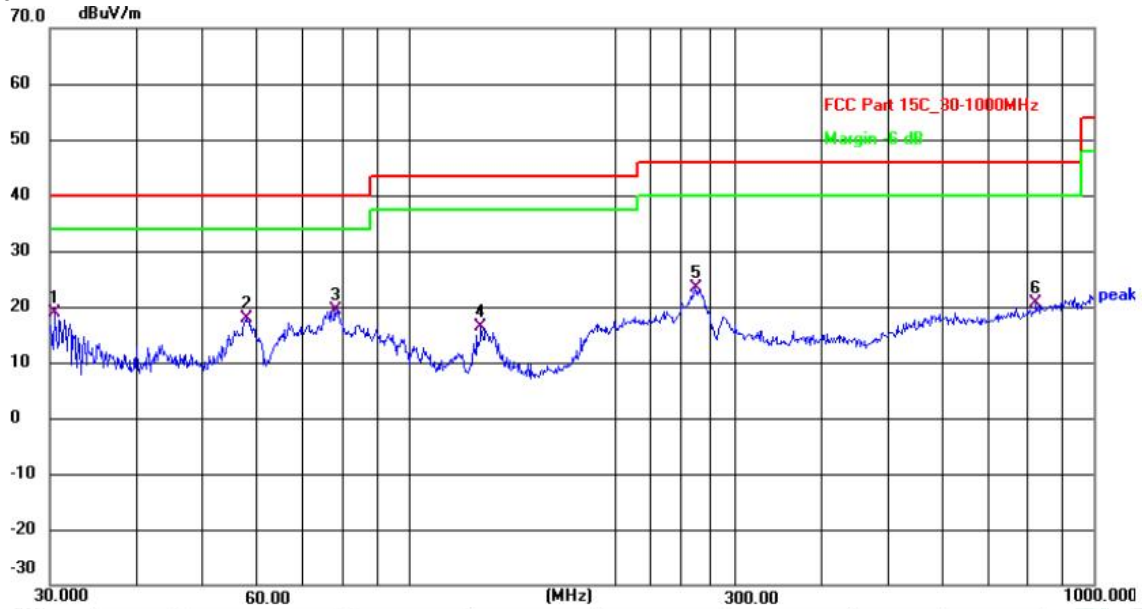

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4238	37.35	-18.40	18.95	40.00	-21.05	QP
2	57.9993	36.42	-18.49	17.93	40.00	-22.07	QP
3	78.1389	39.26	-19.80	19.46	40.00	-20.54	QP
4	127.6645	36.72	-20.42	16.30	43.50	-27.20	QP
5	261.9753	38.95	-15.48	23.47	46.00	-22.53	QP
6	824.5968	29.73	-9.07	20.66	46.00	-25.34	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

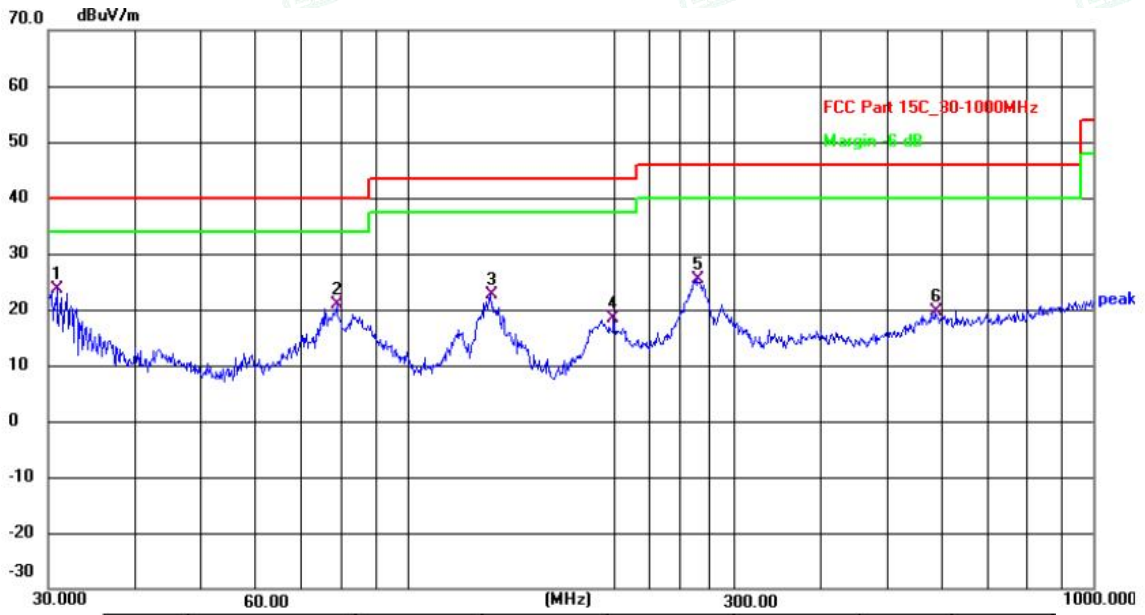

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.8534	42.05	-18.34	23.71	40.00	-16.29	QP
2	78.9652	40.64	-19.84	20.80	40.00	-19.20	QP
3	132.2205	43.18	-20.65	22.53	43.50	-20.97	QP
4	199.9855	35.84	-17.39	18.45	43.50	-25.05	QP
5	264.7457	40.74	-15.46	25.28	46.00	-20.72	QP
6	588.9050	30.38	-10.63	19.75	46.00	-26.25	QP






Model: PS003-PC-BK2M-2A2U1C1W

0.009 MHz – 30 MHz

0 degree

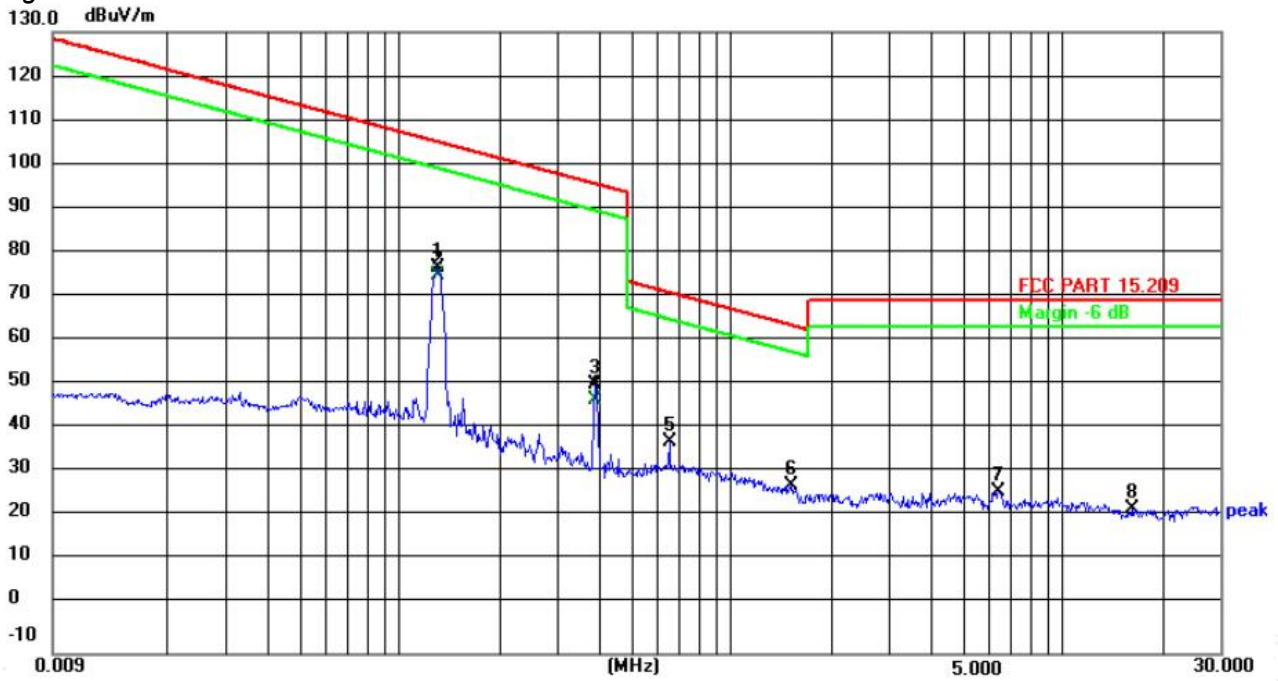

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1307	86.64	-9.79	76.85	105.21	-28.36	peak
2	0.1307	85.17	-9.79	75.38	105.21	-29.83	AVG
3	0.3911	60.51	-9.73	50.78	95.75	-44.97	peak
4	0.3911	57.06	-9.73	47.33	95.75	-48.42	AVG
5	0.6521	47.31	-9.57	37.74	71.32	-33.58	QP
6	1.5282	37.17	-9.31	27.86	63.92	-36.06	QP
7	6.4233	36.08	-9.40	26.68	69.54	-42.86	QP
8	16.1950	32.80	-10.01	22.79	69.54	-46.75	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



90 degree

130.0 dBuV/m

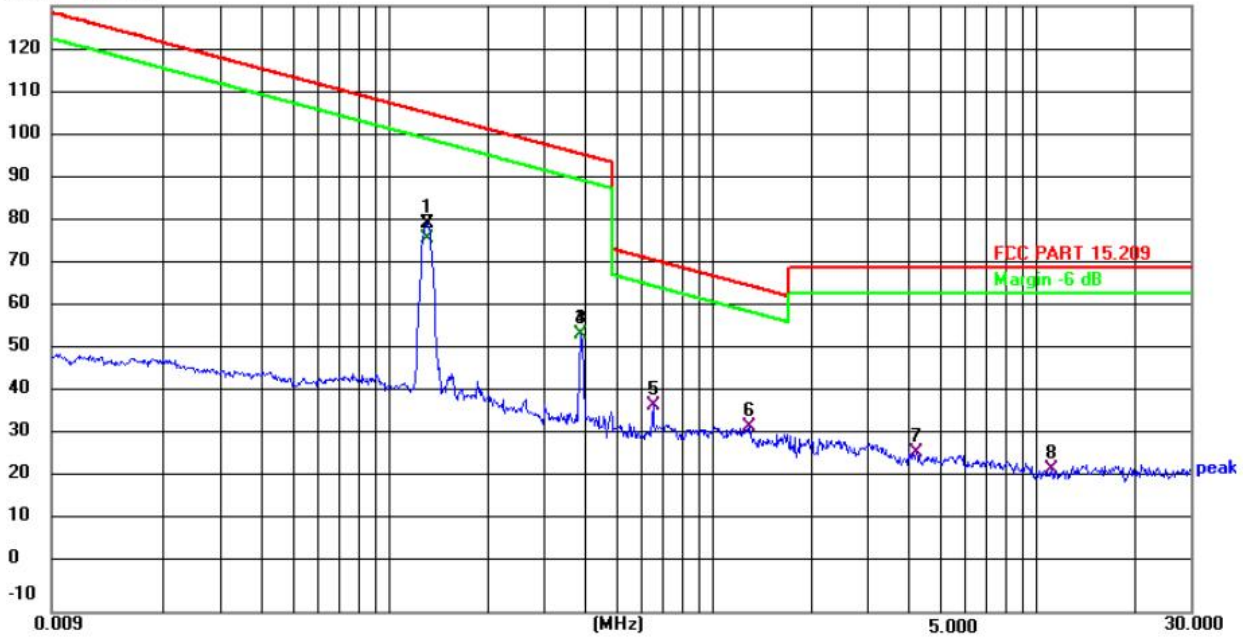

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1307	89.66	-9.79	79.87	105.21	-25.34	peak
2	0.1307	86.13	-9.79	76.34	105.21	-28.87	AVG
3	0.3911	63.91	-9.73	54.18	95.75	-41.57	peak
4	0.3911	63.91	-9.73	54.18	95.75	-41.57	AVG
5	0.6521	47.33	-9.57	37.76	71.32	-33.56	QP
6	1.2994	41.99	-9.28	32.71	65.33	-32.62	QP
7	4.2472	36.22	-9.43	26.79	69.54	-42.75	QP
8	11.1514	33.09	-10.01	23.08	69.54	-46.46	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree.

2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Horizontal

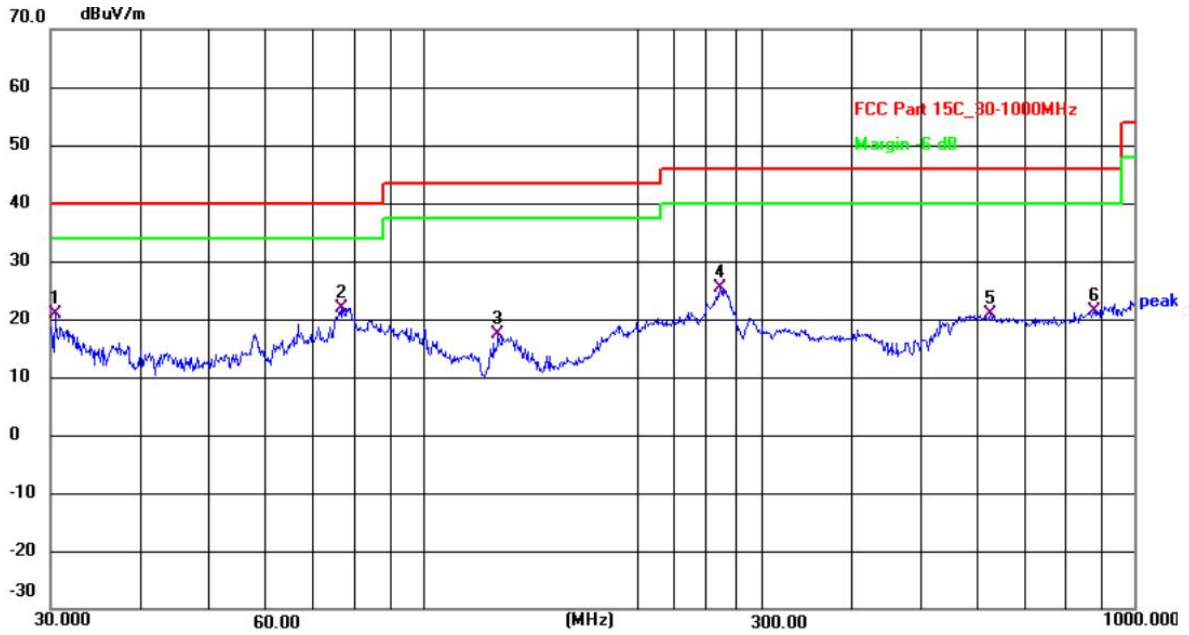

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.4237	39.35	-18.40	20.95	40.00	-19.05	QP
2	76.7806	41.71	-19.75	21.96	40.00	-18.04	QP
3	127.6645	37.72	-20.42	17.30	43.50	-26.20	QP
4	261.9750	40.95	-15.48	25.47	46.00	-20.53	QP
5	627.2735	31.99	-11.08	20.91	46.00	-25.09	QP
6	878.3214	30.04	-8.64	21.40	46.00	-24.60	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Vertical

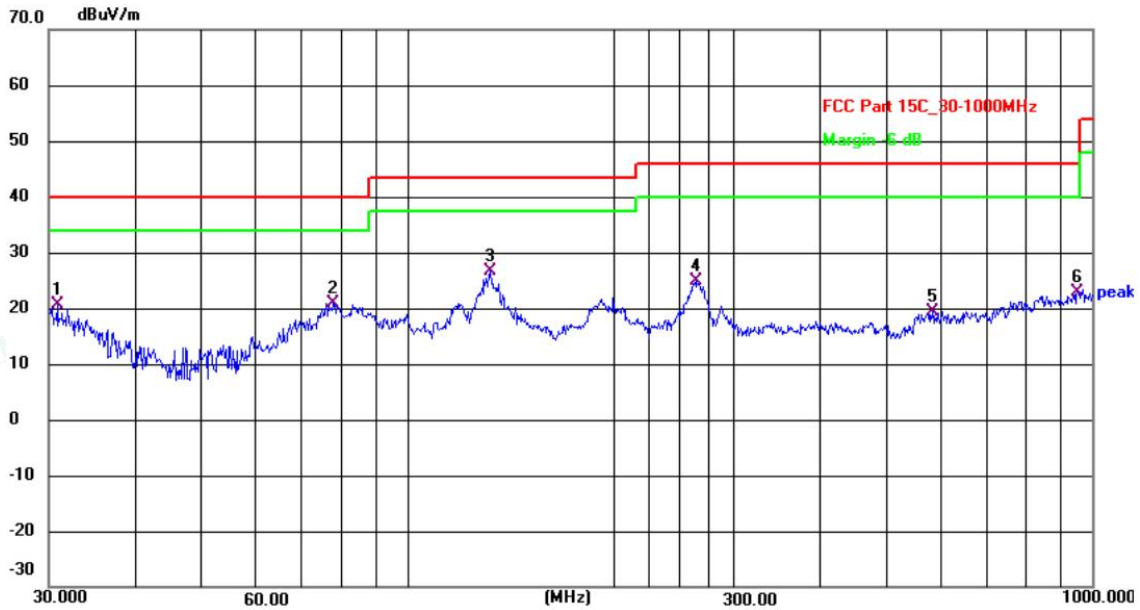

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.8534	39.05	-18.34	20.71	40.00	-19.29	QP
2	77.8653	40.73	-19.78	20.95	40.00	-19.05	QP
3	132.2204	47.18	-20.65	26.53	43.50	-16.97	QP
4	264.7456	40.24	-15.46	24.78	46.00	-21.22	QP
5	584.7894	29.97	-10.69	19.28	46.00	-26.72	QP
6	952.0937	31.01	-8.13	22.88	46.00	-23.12	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



8. 20 DB BANDWIDTH MEASUREMENT

8.1. Block Diagram of Test Setup

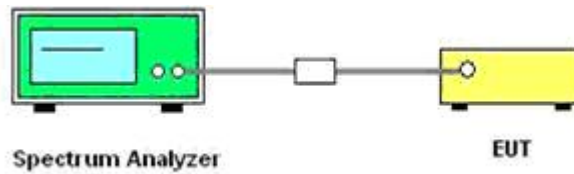

8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 1KHz

RBW = 3Hz

VBW = 10Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




8.3. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (KHz)
0.1307	0.174	Non-Specified

Result: Pass

Please refer to the following page for test plot.

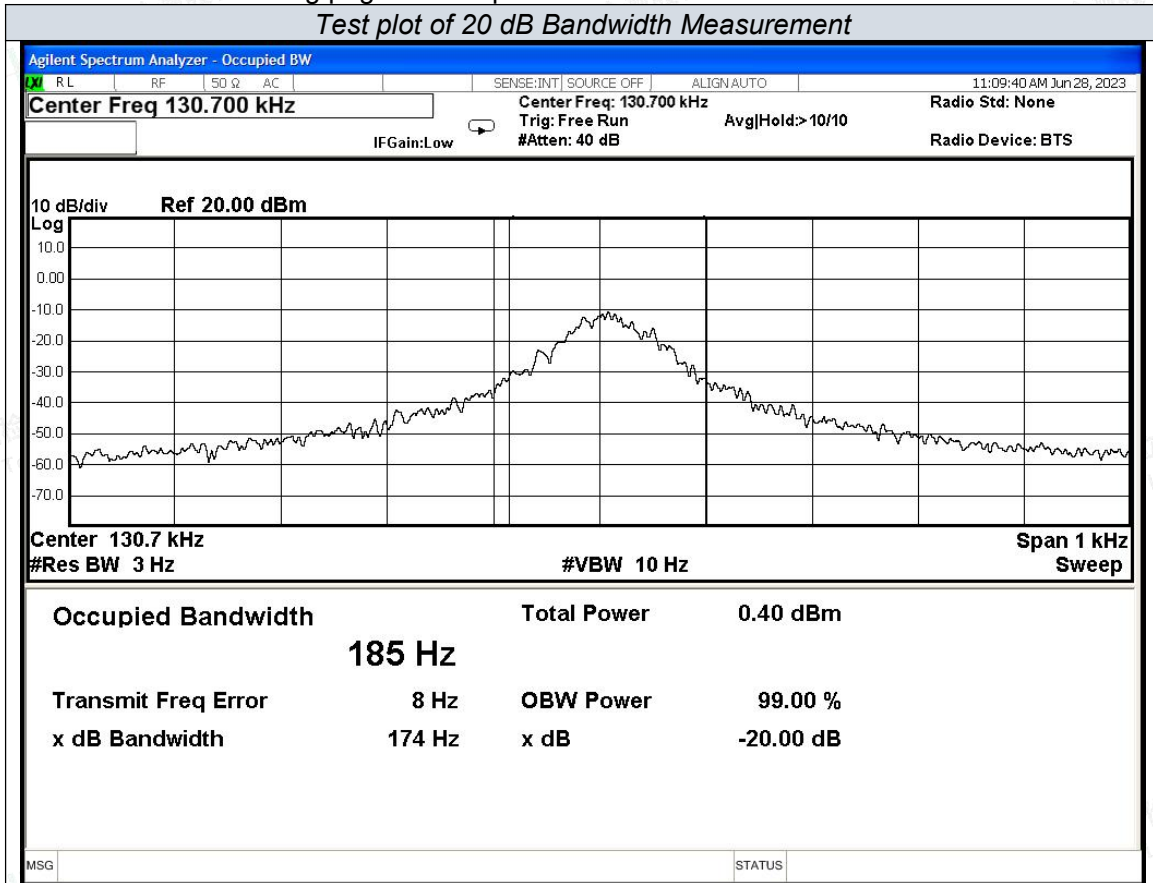



9. ANTENNA REQUIREMENT

9.1. Standard Applicable

According to § 15.203 and RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction

The EUT use Coil Antenna and maximum antenna gain is 0dBi, antenna cannot replacement, meets FCC Part §15.203 antenna requirement. Please see EUT photo for details.

9.3. Results

Compliance



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



10. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

11. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

12. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity