



# RF TEST REPORT

Product Name: Magnetic Levitation Keyboard

Model Name: 110MB01

IC: 31162-110MB01

Issued For : Guangdong Jinmo Intelligent Technology Co., Ltd

Building 2, No.28, Juyuan 2nd Road, Shangtun, Liaobu  
Town, Dongguan City, Guangdong Province

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,  
No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan  
District, Shenzhen, Guangdong, China

Report Number: LGT23G055RF03

Sample Received Date: Jul. 18, 2023

Date of Test: Jul. 18, 2023 – Aug. 10, 2023

Date of Issue: Aug. 10, 2023

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## TEST REPORT CERTIFICATION

**Applicant:** Guangdong Jinmo Intelligent Technology Co., Ltd  
Address: Building 2, No.28, Juyuan 2nd Road, Shangtun, Liaobu Town, Dongguan City, Guangdong Province

**Manufacturer:** Guangdong Jinmo Intelligent Technology Co., Ltd  
Address: Building 2, No.28, Juyuan 2nd Road, Shangtun, Liaobu Town, Dongguan City, Guangdong Province

**Product Name:** Magnetic levitation keyboard

**Trademark:** N/A

**Model Name:** 110MB01

**Sample Status:** Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C RSS-247 Issue 2, February 2017 RSS-Gen Issue 5, March 2019 ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan  
Engineer

Approved by:

Vita Li

Vita Li  
Technical Director





## Table of Contents

Page

<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 FREQUENCY HOPPING SYSTEM REQUIREMENTS	10
2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	12
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	13
<b>3. EMC EMISSION TEST</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>30</b>
4.1 LIMIT	30
4.2 TEST PROCEDURE	30
4.3 TEST SETUP	31
4.4 EUT OPERATION CONDITIONS	31
4.5 TEST RESULTS	31
<b>5. NUMBER OF HOPPING CHANNEL</b>	<b>32</b>
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 TEST SETUP	32
5.4 EUT OPERATION CONDITIONS	32
5.5 TEST RESULTS	32
<b>6. AVERAGE TIME OF OCCUPANCY</b>	<b>33</b>
6.1 LIMIT	33
6.2 TEST PROCEDURE	33
6.3 TEST SETUP	33
6.4 EUT OPERATION CONDITIONS	33
6.5 TEST RESULTS	33
<b>7. HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>34</b>
7.1 LIMIT	34
7.2 TEST PROCEDURE	34



## Table of Contents

Page

7.3 TEST SETUP	34
7.4 EUT OPERATION CONDITIONS	34
7.5 TEST RESULTS	34
<b>8. BANDWIDTH TEST</b>	<b>35</b>
8.1 LIMIT	35
8.2 TEST PROCEDURE	35
8.3 TEST SETUP	35
8.4 EUT OPERATION CONDITIONS	35
8.5 TEST RESULTS	35
<b>9. OUTPUT POWER TEST</b>	<b>36</b>
9.1 LIMIT	36
9.2 TEST PROCEDURE	36
9.3 TEST SETUP	36
9.4 EUT OPERATION CONDITIONS	36
9.5 TEST RESULTS	36
<b>10. ANTENNA REQUIREMENT</b>	<b>37</b>
10.1 STANDARD REQUIREMENT	37
10.2 EUT ANTENNA	37
<b>11. FREQUENCY STABILITY</b>	<b>38</b>
11.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	38
11.2 TEST PROCEDURE	38
11.3 TEST RESULT	38
<b>APPENDIX I:TEST RESULTS</b>	<b>39</b>
<b>DUTY CYCLE</b>	<b>39</b>
<b>MAXIMUM AVERAGE CONDUCTED OUTPUT POWER</b>	<b>41</b>
<b>MAXIMUM PEAK CONDUCTED OUTPUT POWER</b>	<b>42</b>
<b>-20DB BANDWIDTH</b>	<b>43</b>
<b>OCCUPIED CHANNEL BANDWIDTH</b>	<b>45</b>
<b>CARRIER FREQUENCIES SEPARATION</b>	<b>47</b>
<b>BAND EDGE</b>	<b>49</b>
<b>BAND EDGE(HOPPING)</b>	<b>51</b>
<b>CONDUCTED RF SPURIOUS EMISSION</b>	<b>53</b>



## Table of Contents

Page

<b>NUMBER OF HOPPING CHANNEL</b>	<b>56</b>
<b>DWELL TIME</b>	<b>57</b>
<b>FREQUENCY STABILITY</b>	<b>58</b>

### Revision History

Rev.	Issue Date	Contents
00	Aug. 10, 2023	Initial Issue



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

<b>FCC Part 15.247, Subpart C RSS-247 Issue 2</b>			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-Gen (8.8)	Conducted Emission	PASS	--
15.247(a)(1) RSS-247 (5.1)	Hopping Channel Separation	PASS	--
15.247(a)(1)&(b)(1) RSS-247 (5.1)	Output Power	PASS	--
15.209 RSS-Gen (8.9&8.10)	Radiated Spurious Emission	PASS	--
15.247(d) RSS-247 (5.5)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(1)(iii) RSS-247 (5.1)	Number of Hopping Frequency	PASS	--
15.247(a)(1)(iii) RSS-247 (5.1)	Dwell Time	PASS	--
15.247(a)(1) RSS-247 (5.1)	Bandwidth	PASS	--
15.205 RSS-Gen (8.9&8.10)	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a) RSS-247 (5.5) RSS-Gen (8.9&8.10)	Band Edge Emission	PASS	--
15.203 RSS-Gen (6.8)	Antenna Requirement	PASS	--
RSS-Gen (6.11&8.11)	Frequency Stability	PASS	--

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



## 1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$

Note: The measurement uncertainty is not included in the test result.



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Magnetic levitation keyboard
Trademark:	N/A
Model Name:	110MB01
Series Model:	N/A
Model Difference:	Only the model is different.
Channel List:	Please refer to the Note 3.
Frequency:	2402 – 2480 MHz
Modulation:	GFSK
Antenna Type:	PCB
Antenna Gain:	1.87dBi
Rating:	Input: DC 5V, 320mA, 1.6W
Battery:	Rated Voltage: 3.7V
Hardware Version:	1.3 2023.06.27
Software Version:	V08_20230710_0x2541D96
Connecting I/O Port(s):	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.





3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	11	2422	21	2442	31	2462
02	2404	12	2424	22	2444	32	2464
03	2406	13	2426	23	2446	33	2466
04	2408	14	2428	24	2448	34	2468
05	2410	15	2430	25	2450	35	2470
06	2412	16	2432	26	2452	36	2472
07	2414	17	2434	27	2454	37	2474
08	2416	18	2436	28	2456	38	2476
09	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Modulation
Mode 1	TX CH01(2402MHz)	GFSK
Mode 2	TX CH20(2440MHz)	GFSK
Mode 3	TX CH40(2480MHz)	GFSK
Mode 4	Hopping	GFSK

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.
- (3) The battery is fully charged during the radiated and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 5: Keeping TX

## 2.3 FREQUENCY HOPPING SYSTEM REQUIREMENTS

(1) Standard and Limit

According to FCC Part 15.247(a)(1)& RSS-247 Issue 2, The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(2) The Pseudorandom sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones: i.e. the shift register is initialized with nine ones.

Number of shift register stages:9

Length of pseudo-random sequence: $2^9-1=511$ bits

Longest sequence of zeros: 8(non-inverted signal)

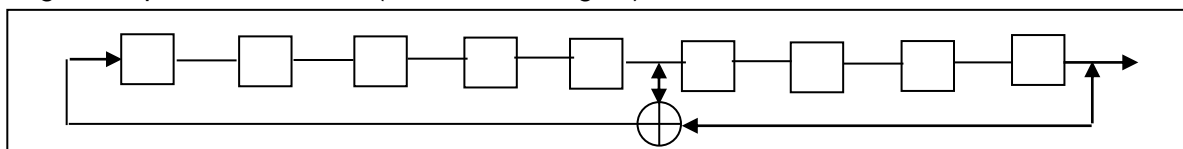





## 2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS.

Test software Version	Test program: 2.4G	
Engineering Mode	Mode Or Modulation type	Power setting
	1M	Default

## 2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

Description	Manufacturer	Model	S/N	Rating

### Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	HUAWEI	HKF-16	N/A	N/A

### Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.6 EQUIPMENTS LIST

<b>Conducted Emission</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Until</b>
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
LISN	COM-POWER	LI-115	02032	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8121	00847	2023.04.07	2024.04.06
LISN	SCHWARZBECK	NNLK 8122	00160	2023.04.07	2024.04.06
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2023.04.07	2024.04.06
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

<b>Radiated Test equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Until</b>
EMI Test Receiver	R&S	ESU8	100372	2023.04.13	2024.04.12
Active loop Antenna	ETS	6502	00049544	2022.06.02	2025.06.01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Bilog Antenna(30M-1G)	SCHWARZBECK	VULB 9168	01447	2022.06.05	2025.06.04
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(18-40G)	A-INFO	LB-180400-KF	J211060273	2022.06.08	2025.06.07
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2023.04.07	2024.04.06
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2023.04.07	2024.04.06
Pre-amplifier(18-40G)	com-mw	LNPA_18-40-01	18050003	2023.04.07	2024.04.06
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Testing Software	EMC-I_V1.4.0.3_SKET				

<b>Conducted Test equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Until</b>
Signal Analyzer	Keysight	N9010B	MY60242508	2023.04.10	2024.04.09
Wireless Communications Test Set	R&S	CMW 500	137737	2023.04.13	2024.04.12
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2023.04.07	2024.04.06
Power Sensor	MW	MW100-RFCB	MW220324LG-33	2023.04.13	2024.04.12
Temperature & Humidity	KTJ	TA218B	N.A	2023.04.24	2024.04.23
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2023.05.10	2024.05.09
Attenuator	eastsheep	90db	N.A	2023.04.10	2024.04.09
Testing Software	MTS8200_V2.0.0.0_MW				



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



### 3.1.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

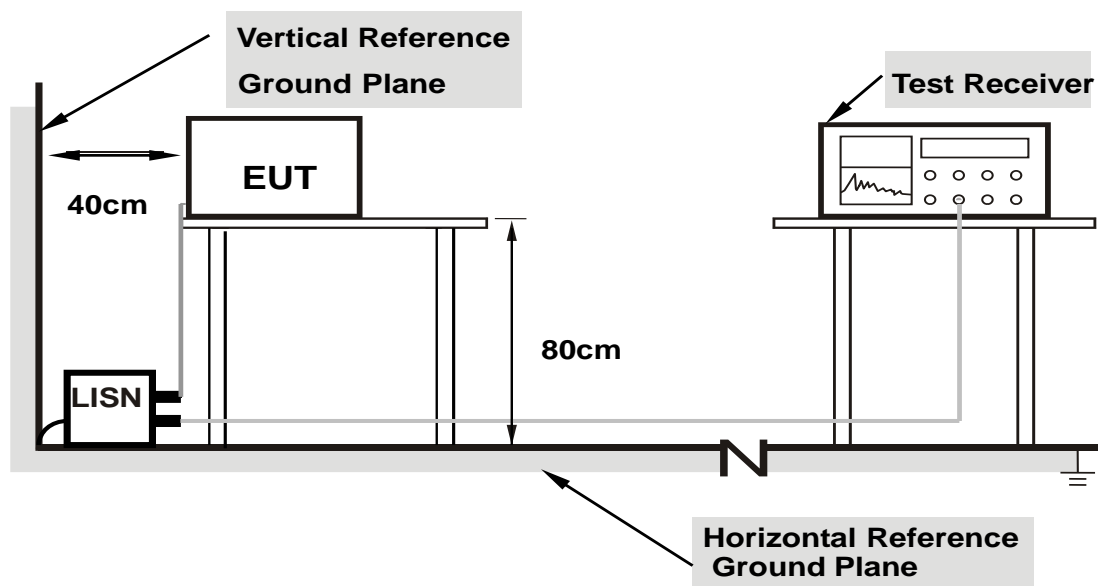

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**


### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



### 3.1.5 TEST RESULT

Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 29.5°C
M/N: 110MB01	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-07-22
Test Mode: TX	
Note:	

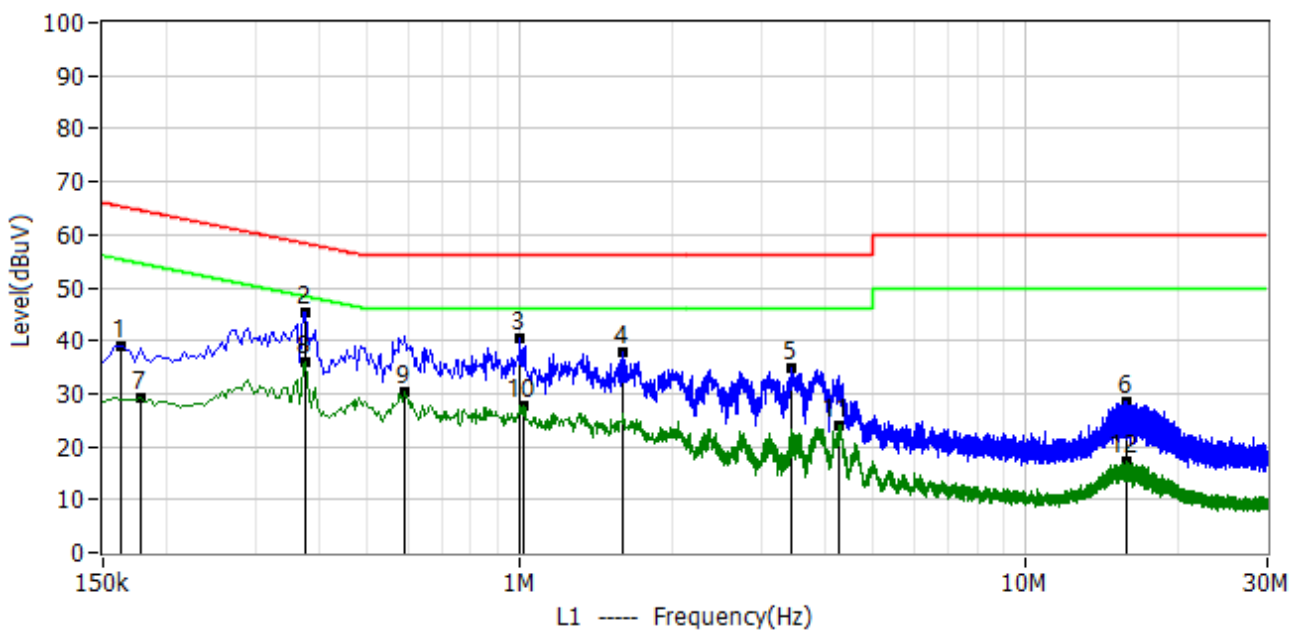


No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.162	28.46	10.57	39.03	65.36	-26.34	QP	L1
2*	0.378	34.91	10.59	45.50	58.32	-12.82	QP	L1
3*	1.002	30.02	10.59	40.61	56.00	-15.39	QP	L1
4*	1.602	27.14	10.69	37.83	56.00	-18.17	QP	L1
5*	3.446	24.16	10.73	34.89	56.00	-21.11	QP	L1
6*	15.786	17.35	11.13	28.48	60.00	-31.52	QP	L1
7*	0.178	18.77	10.58	29.35	54.58	-25.22	AV	L1
8*	0.378	25.29	10.59	35.88	48.32	-12.44	AV	L1
9*	0.594	19.85	10.58	30.43	46.00	-15.57	AV	L1
10*	1.014	17.29	10.59	27.88	46.00	-18.12	AV	L1
11*	4.282	13.19	10.71	23.90	46.00	-22.10	AV	L1
12*	15.786	6.10	11.13	17.23	50.00	-32.77	AV	L1





Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 29.5°C
M/N: 110MB01	Humidity: 47%RH
Test Voltage: AC 120V/60Hz	Test Data: 2023-07-22
Test Mode: TX	
Note:	

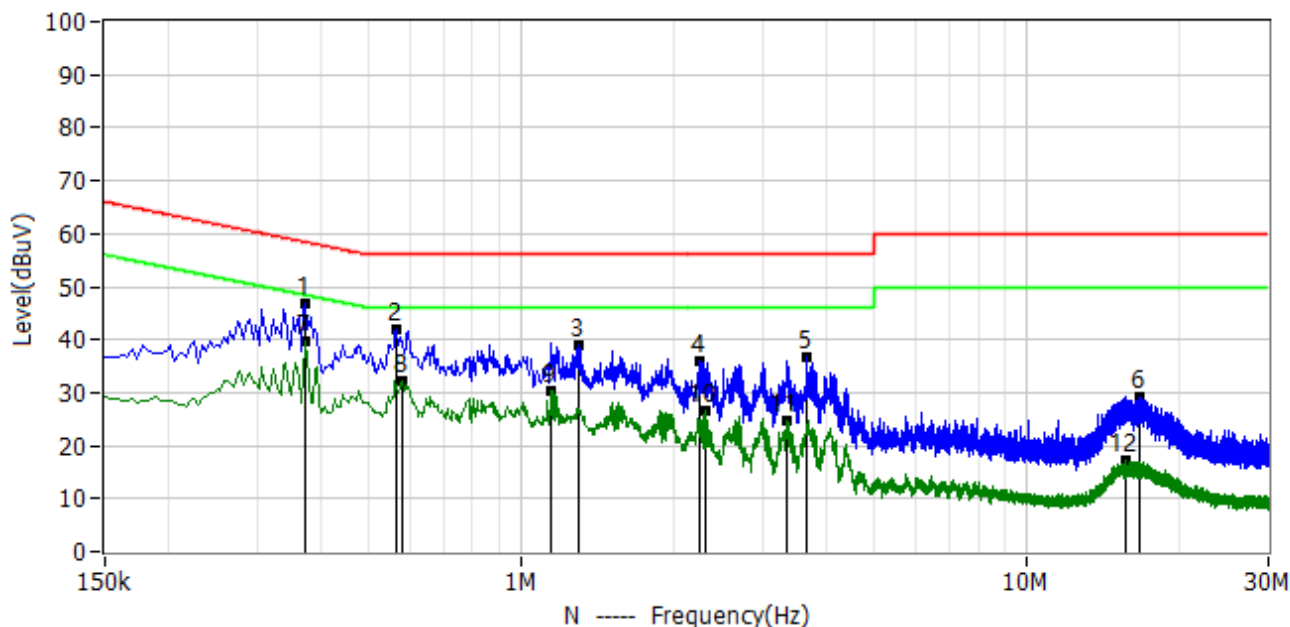

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.374	36.05	10.58	46.63	58.41	-11.78	QP	N
2*	0.566	31.20	10.58	41.78	56.00	-14.22	QP	N
3*	1.302	28.34	10.64	38.98	56.00	-17.02	QP	N
4*	2.250	25.14	10.75	35.89	56.00	-20.11	QP	N
5*	3.674	26.03	10.72	36.75	56.00	-19.25	QP	N
6*	16.750	17.85	11.23	29.08	60.00	-30.92	QP	N
7*	0.374	29.12	10.58	39.70	48.41	-8.71	AV	N
8*	0.582	21.59	10.58	32.17	46.00	-13.83	AV	N
9*	1.142	19.82	10.61	30.43	46.00	-15.57	AV	N
10*	2.302	16.03	10.74	26.77	46.00	-19.23	AV	N
11*	3.358	13.90	10.73	24.63	46.00	-21.37	AV	N
12*	15.674	5.92	11.17	17.09	50.00	-32.91	AV	N



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a), RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013 below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz (Peak/QP/AV)
Stop Frequency	150KHz/30MHz (Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz (Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz (Peak/AV)
Stop Frequency	10th carrier hamonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2476 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



### 3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation.

### 3.2.4 TESTSETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

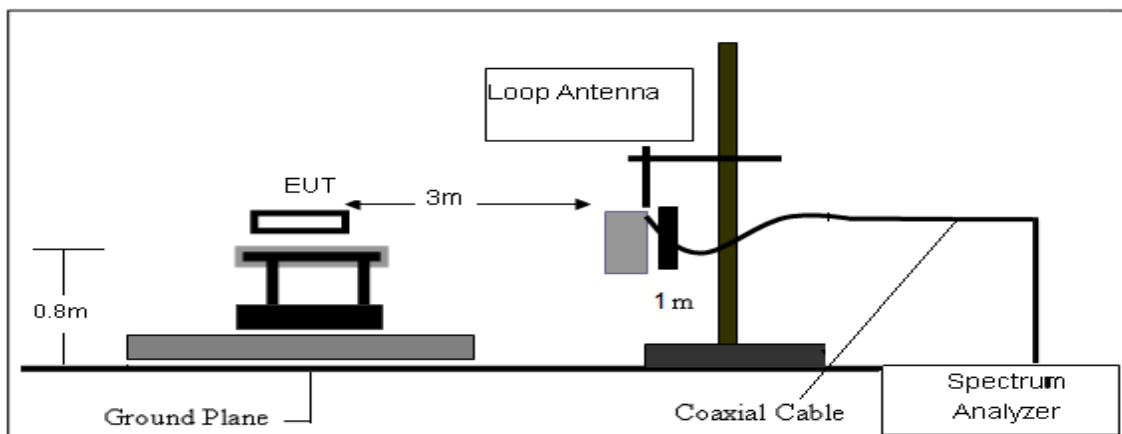

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

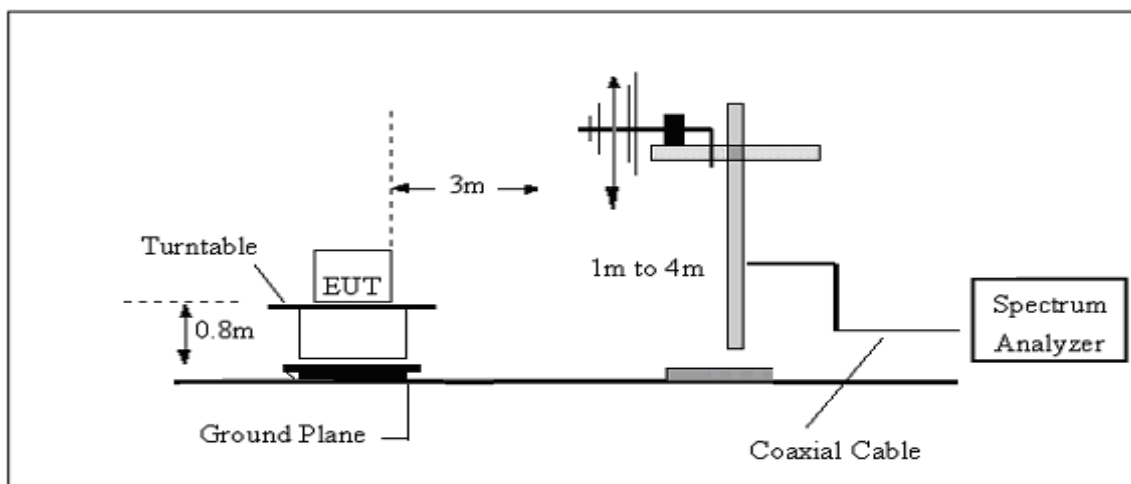

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

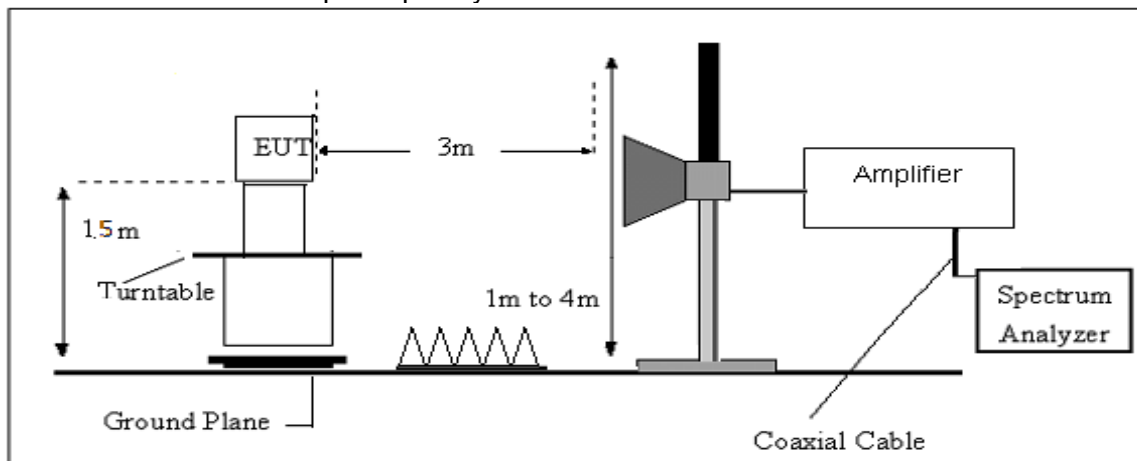

### 3.2.5 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



### 3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



### 3.2.7 TEST RESULTS

#### Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




## Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT23G055	Test Engineer: Xiangdong Ma
EUT: Magnetic levitation keyboard	Temperature: 25.3°C
M/N: 110MB01	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-07-20
Test Mode: 2402	
Note:	

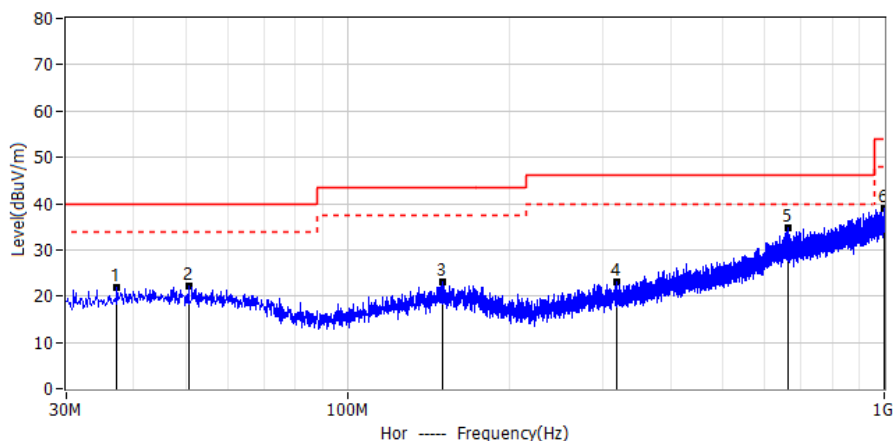

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	37.275MHz	3.05	18.92	21.97	40.00	-18.03	QP	Hor
2*	50.613MHz	2.89	19.32	22.21	40.00	-17.79	QP	Hor
3*	150.159MHz	2.96	19.99	22.95	43.50	-20.55	QP	Hor
4*	318.454MHz	2.71	20.50	23.21	46.00	-22.79	QP	Hor
5*	660.743MHz	5.54	29.36	34.90	46.00	-11.10	QP	Hor
6*	998.666MHz	4.28	34.56	38.84	54.00	-15.16	QP	Hor

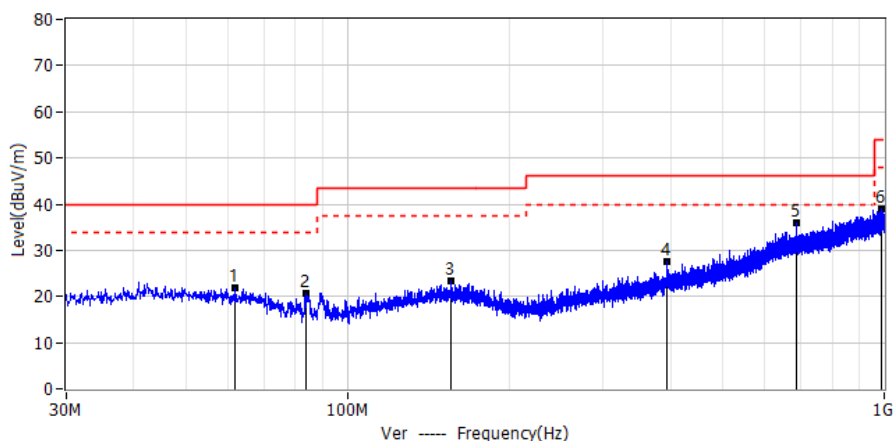


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	61.646MHz	3.45	18.54	21.99	40.00	-18.01	QP	Ver
2*	83.593MHz	5.49	15.15	20.64	40.00	-19.36	QP	Ver
3*	155.736MHz	3.46	19.90	23.36	43.50	-20.14	QP	Ver
4*	394.963MHz	4.76	22.69	27.45	46.00	-18.55	QP	Ver
5*	687.539MHz	6.19	29.69	35.88	46.00	-10.12	QP	Ver
6*	986.663MHz	4.37	34.51	38.88	54.00	-15.12	QP	Ver






### Results of Radiated Emissions (Above 1000MHz)

Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 28.9°C
M/N: 110MB01	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-07-27
Test Mode: 2402	
Note:	

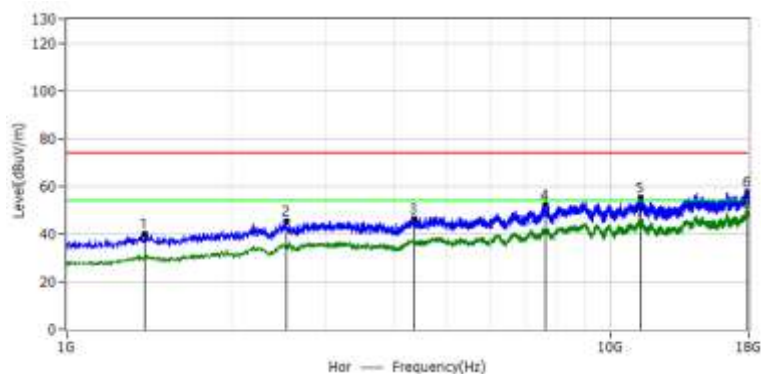


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3931GHz	61.18	-21.44	39.74	74.00	-34.26	PK	Hor
2*	2.5300GHz	56.35	-10.83	45.52	74.00	-28.48	PK	Hor
3*	4.3596GHz	52.52	-6.35	46.17	74.00	-27.83	PK	Hor
4*	7.5917GHz	56.49	-4.24	52.25	74.00	-21.75	PK	Hor
5*	11.3934GHz	53.14	1.86	55.00	74.00	-19.00	PK	Hor
6*	17.9044GHz	48.94	8.45	57.39	74.00	-16.61	PK	Hor
7*	11.3934GHz	43.14	1.86	45.00	54.00	-9.00	AV	Hor
8*	17.9044GHz	39.55	8.45	48.00	54.00	-6.00	AV	Hor

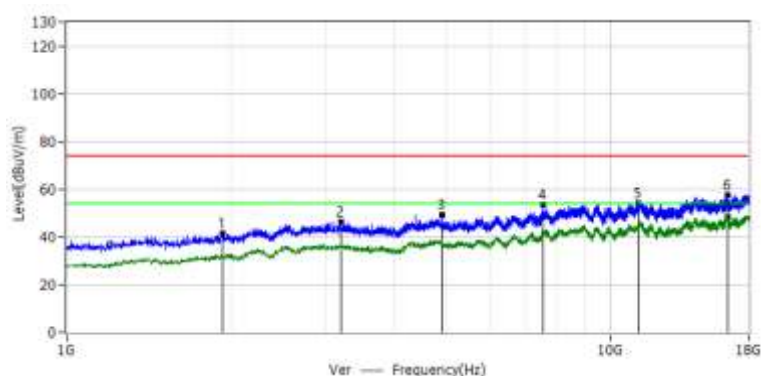


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.9350GHz	58.21	-16.89	41.32	74.00	-32.68	PK	Ver
2*	3.1972GHz	54.57	-8.41	46.16	74.00	-27.84	PK	Ver
3*	4.8972GHz	55.19	-6.06	49.13	74.00	-24.87	PK	Ver
4*	7.5407GHz	57.86	-4.27	53.59	74.00	-20.41	PK	Ver
5*	11.2850GHz	52.08	1.80	53.88	74.00	-20.12	PK	Ver
6*	16.4636GHz	50.60	6.98	57.58	74.00	-16.42	PK	Ver
7*	16.4636GHz	41.22	6.98	48.20	54.00	-5.80	AV	Ver



Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 28.9°C
M/N: 110MB01	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-07-27
Test Mode: 2440	
Note:	

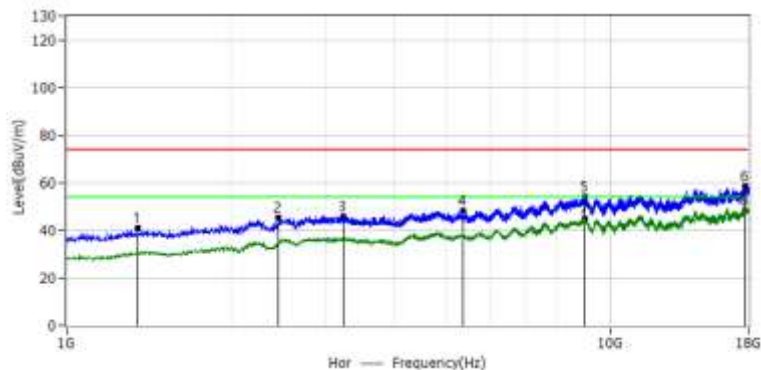


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3506GHz	62.85	-21.77	41.08	74.00	-32.92	PK	Hor
2*	2.4514GHz	56.78	-11.50	45.28	74.00	-28.72	PK	Hor
3*	3.2355GHz	54.43	-8.42	46.01	74.00	-27.99	PK	Hor
4*	5.3584GHz	55.51	-7.29	48.22	74.00	-25.78	PK	Hor
5*	9.0006GHz	55.38	-1.17	54.21	74.00	-19.79	PK	Hor
6*	17.7131GHz	50.00	8.32	58.32	74.00	-15.68	PK	Hor
7*	9.0006GHz	45.87	-1.17	44.70	54.00	-9.30	AV	Hor
8*	17.7131GHz	39.68	8.32	48.00	54.00	-6.00	AV	Hor

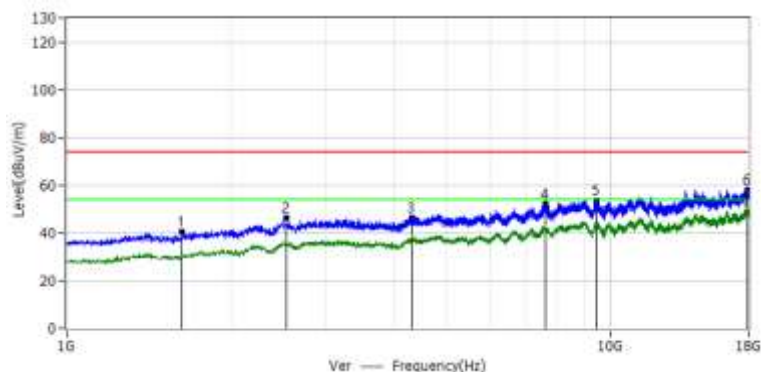


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6311GHz	60.39	-19.88	40.51	74.00	-33.49	PK	Ver
2*	2.5364GHz	57.16	-10.79	46.37	74.00	-27.63	PK	Ver
3*	4.3214GHz	52.88	-6.51	46.37	74.00	-27.63	PK	Ver
4*	7.5896GHz	56.34	-4.24	52.10	74.00	-21.90	PK	Ver
5*	9.4447GHz	54.72	-1.17	53.55	74.00	-20.45	PK	Ver
6*	17.8937GHz	49.64	8.45	58.09	74.00	-15.91	PK	Ver
7*	17.8937GHz	40.05	8.45	48.50	54.00	-5.50	AV	Ver



Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 28.9°C
M/N: 110MB01	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-07-27
Test Mode: 2480	
Note:	

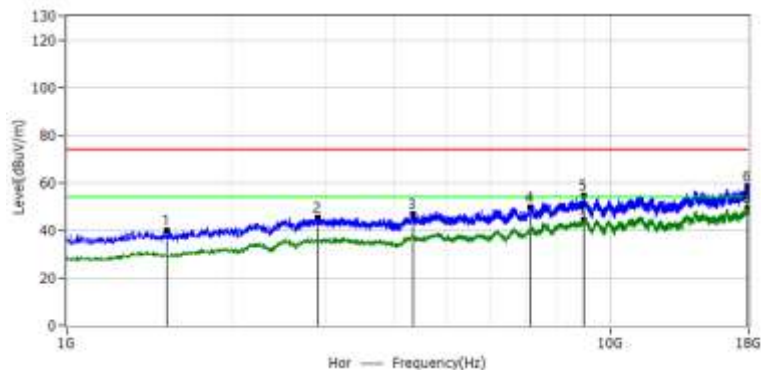

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.5270GHz	60.78	-20.66	40.12	74.00	-33.88	PK	Hor
2*	2.8934GHz	54.36	-8.90	45.46	74.00	-28.54	PK	Hor
3*	4.3299GHz	53.18	-6.47	46.71	74.00	-27.29	PK	Hor
4*	7.1242GHz	55.13	-5.34	49.79	74.00	-24.21	PK	Hor
5*	8.9305GHz	55.68	-1.37	54.31	74.00	-19.69	PK	Hor
6*	17.9065GHz	49.77	8.45	58.22	74.00	-15.78	PK	Hor
7*	8.9305GHz	45.47	-1.37	44.10	54.00	-9.90	AV	Hor
8*	17.9065GHz	40.65	8.45	49.10	54.00	-4.90	AV	Hor

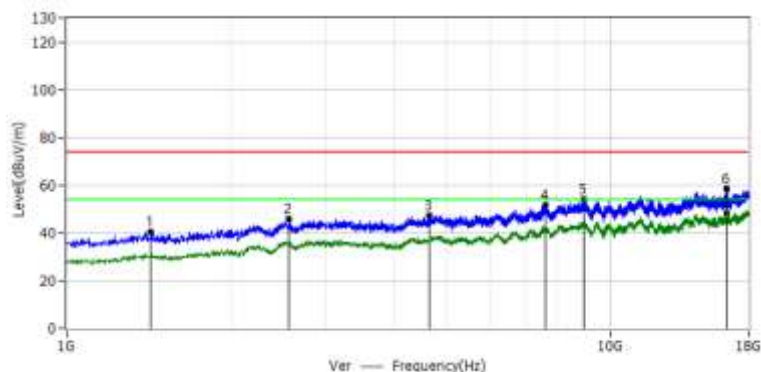

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.4271GHz	61.40	-21.23	40.17	74.00	-33.83	PK	Ver
2*	2.5661GHz	56.38	-10.64	45.74	74.00	-28.26	PK	Ver
3*	4.6422GHz	53.21	-5.86	47.35	74.00	-26.65	PK	Ver
4*	7.5875GHz	55.91	-4.24	51.67	74.00	-22.33	PK	Ver
5*	8.9347GHz	55.16	-1.35	53.81	74.00	-20.19	PK	Ver
6*	16.3744GHz	51.40	6.84	58.24	74.00	-15.76	PK	Ver
7*	16.3744GHz	41.36	6.84	48.20	54.00	-5.80	AV	Ver


**Remark:**

In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.




### 3.2.8 TEST RESULTS (BAND EDGE REQUIREMENTS)

Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 28.9°C
M/N: 110MB01	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-07-27
Test Mode: 2402	
Note:	

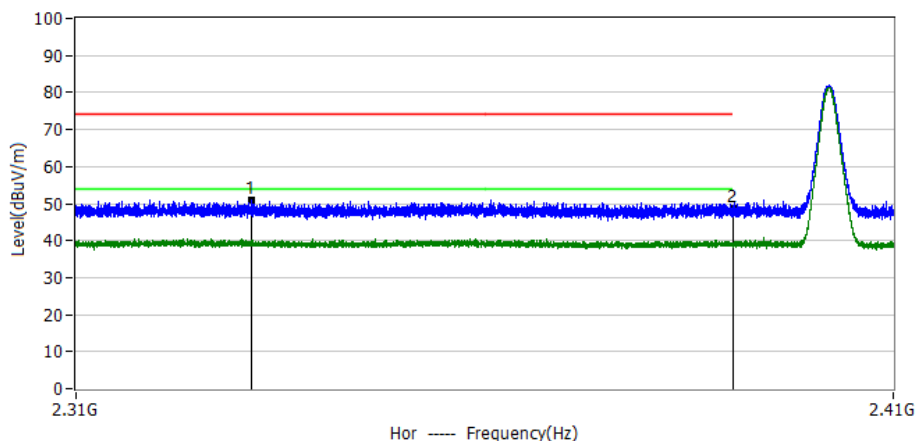


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3311GHz	16.97	34.09	51.06	74.00	-22.94	PK	Hor
2*	2.3900GHz	14.65	33.95	48.60	74.00	-25.40	PK	Hor

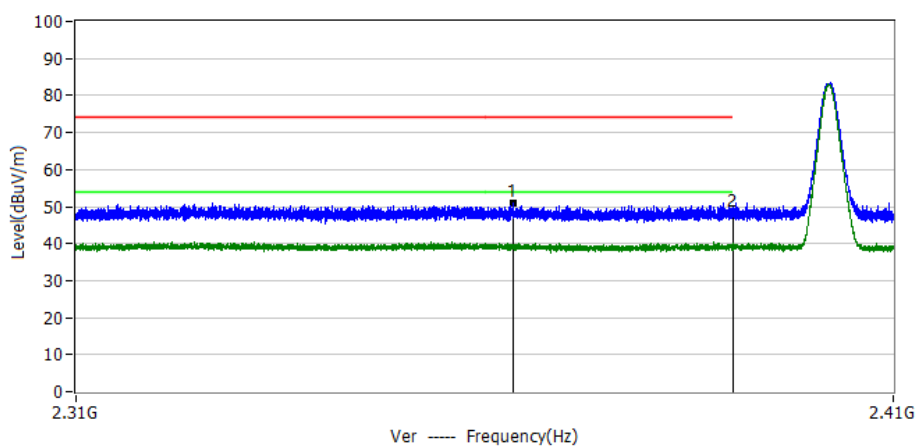


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3630GHz	16.83	34.02	50.85	74.00	-23.15	PK	Ver
2*	2.3900GHz	14.45	33.95	48.40	74.00	-25.60	PK	Ver



Project: LGT23G055	Test Engineer: LiuH
EUT: Magnetic levitation keyboard	Temperature: 28.9°C
M/N: 110MB01	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-07-27
Test Mode: 2480	
Note:	

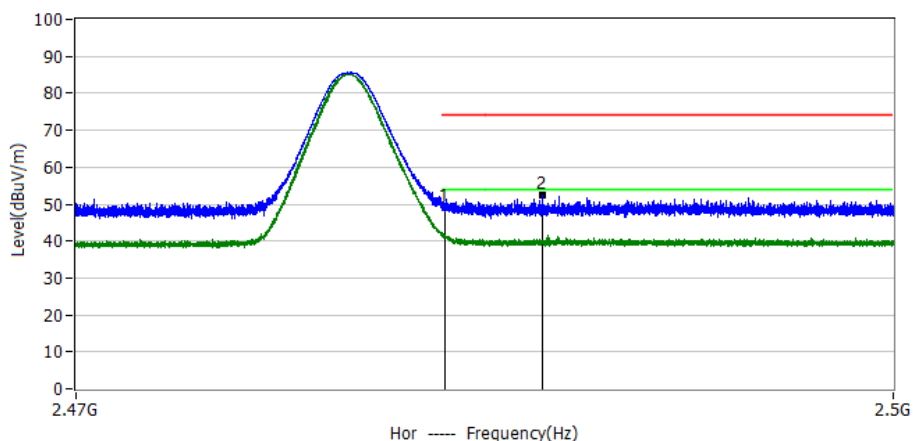

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	14.97	34.13	49.10	74.00	-24.90	PK	Hor
2*	2.4871GHz	18.16	34.13	52.29	74.00	-21.71	PK	Hor

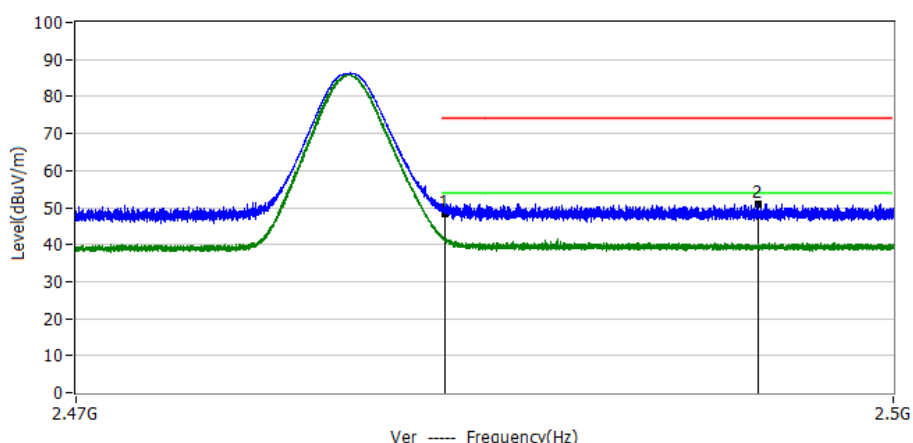

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	14.27	34.13	48.40	74.00	-25.60	PK	Ver
2*	2.4950GHz	16.94	34.15	51.09	74.00	-22.91	PK	Ver



## 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 4.1 LIMIT

According to FCC section 15.247(d) and RSS-247 Issue 2, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

<b>Spectrum Parameter</b>	<b>Setting</b>
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

<b>Spectrum Parameter</b>	<b>Setting</b>
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Hopping Band edge

<b>Spectrum Parameter</b>	<b>Setting</b>
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300– 2403 MHz Upper Band Edge: 2479 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold



#### 4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Tune the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, the span is set to be greater than RBW.

#### 4.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

#### 4.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 5. NUMBER OF HOPPING CHANNEL

### 5.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2, February 2017				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

### 5.3 TEST SETUP



### 5.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

### 5.5 TEST RESULTS

For the measurement records · refer to the appendix I.





## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2, February 2017				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii) RSS-247	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.  
Set the center frequency on any frequency would be measure and set the frequency span to
- e. zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $3.37 \times 31.6 = 106.6$ .
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $5.06 \times 31.6 = 160$ .
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is  $10.12 \times 31.6 = 320$ .

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

### 6.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part15 15.247, Subpart C RSS-247 Issue 2, February 2017				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1) RSS-247(5.1) RSS-Gen(6.7)	Bandwidth	N/A	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

### 8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 9. OUTPUT POWER TEST

### 9.1 LIMIT

FCC Part 15.247, Subpart C RSS-247 Issue 2, February 2017				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1) RSS-247	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97dBm)		
RSS-247	EIRP	4W	2400-2483.5	PASS

### 9.2 TEST PROCEDURE

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW  $\geq$  RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.


e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DSS bandwidth and shall use a fast-responding diode detector.

### 9.3 TEST SETUP

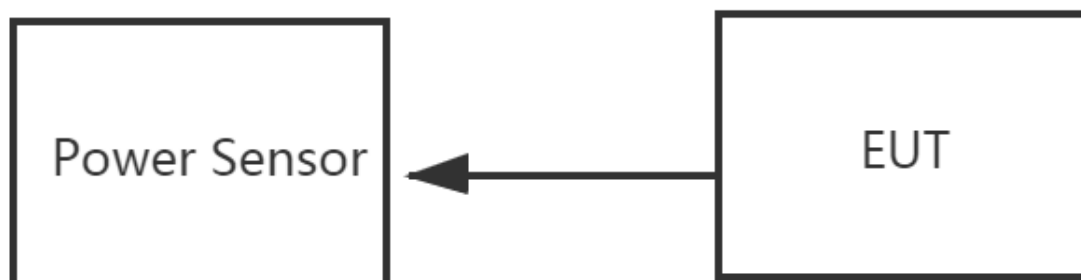

### 9.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

### 9.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 and RSS Gen requirement: For intentional device, according to 15.203 and RSS Gen: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.



## 11. FREQUENCY STABILITY

### 11.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/-0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage and for a variation in primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees.

### 11.2 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2,5 and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 11.3 TEST RESULT

For the measurement records, refer to the appendix I.



## APPENDIX I: TEST RESULTS

### Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	2.4G	2402	Ant1	22.08	6.56	7.25
NVNT	2.4G	2440	Ant1	22.08	6.56	7.25
NVNT	2.4G	2480	Ant1	22.08	6.56	7.25



### Test Graphs

#### Duty Cycle NVNT 2.4G 2402MHz Ant1



#### Duty Cycle NVNT 2.4G 2440MHz Ant1



#### Duty Cycle NVNT 2.4G 2480MHz Ant1







### Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	Ant1	-8.54	6.56	-1.98	30	Pass
NVNT	2.4G	2440	Ant1	-9.1	6.56	-2.54	30	Pass
NVNT	2.4G	2480	Ant1	-10.13	6.56	-3.57	30	Pass



### Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2402	Ant1	-1.79	21	Pass
NVNT	2.4G	2440	Ant1	-2.17	21	Pass
NVNT	2.4G	2480	Ant1	-2.55	21	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	ANT GAIN (dBi)	EIRP (dBm)	EIRP LIMIT(dBm)	Verdict
NVNT	2.4G	2402	Ant1	-1.79	1.87	0.08	36.02	Pass
NVNT	2.4G	2440	Ant1	-2.17	1.87	-0.3	36.02	Pass
NVNT	2.4G	2480	Ant1	-2.55	1.87	-0.68	36.02	Pass



### -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2402	Ant1	1.064	Pass
NVNT	2.4G	2440	Ant1	1.043	Pass
NVNT	2.4G	2480	Ant1	1.04	Pass



### Test Graphs

#### -20dB Bandwidth NVNT 2.4G 2402MHz Ant1



#### -20dB Bandwidth NVNT 2.4G 2440MHz Ant1



#### -20dB Bandwidth NVNT 2.4G 2480MHz Ant1





### Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	2.4G	2402	Ant1	1.052
NVNT	2.4G	2440	Ant1	1.025
NVNT	2.4G	2480	Ant1	1.016





### Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	2.4G	Ant1	2402.02	2404.016	1.996	0.709	Pass
NVNT	2.4G	Ant1	2438.02	2440.02	2	0.695	Pass
NVNT	2.4G	Ant1	2478.024	2480.016	1.992	0.693	Pass







### Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	Ant1	No-Hopping	-35	-20	Pass
NVNT	2.4G	2480	Ant1	No-Hopping	-34.48	-20	Pass






### Band Edge NVNT 2.4G 2480MHz Ant1 No-Hopping Ref




### Band Edge NVNT 2.4G 2480MHz Ant1 No-Hopping Emission

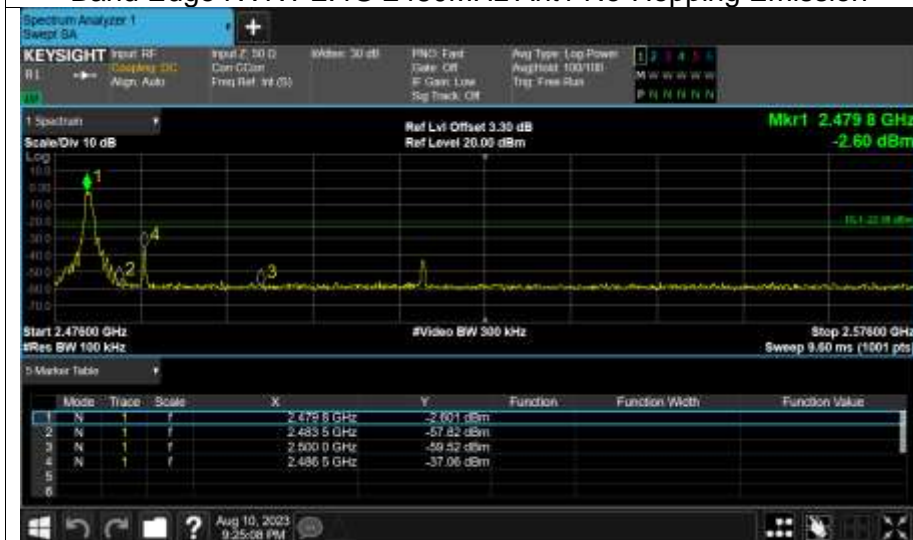



### Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	Ant1	Hopping	-40.16	-20	Pass
NVNT	2.4G	2480	Ant1	Hopping	-35.17	-20	Pass

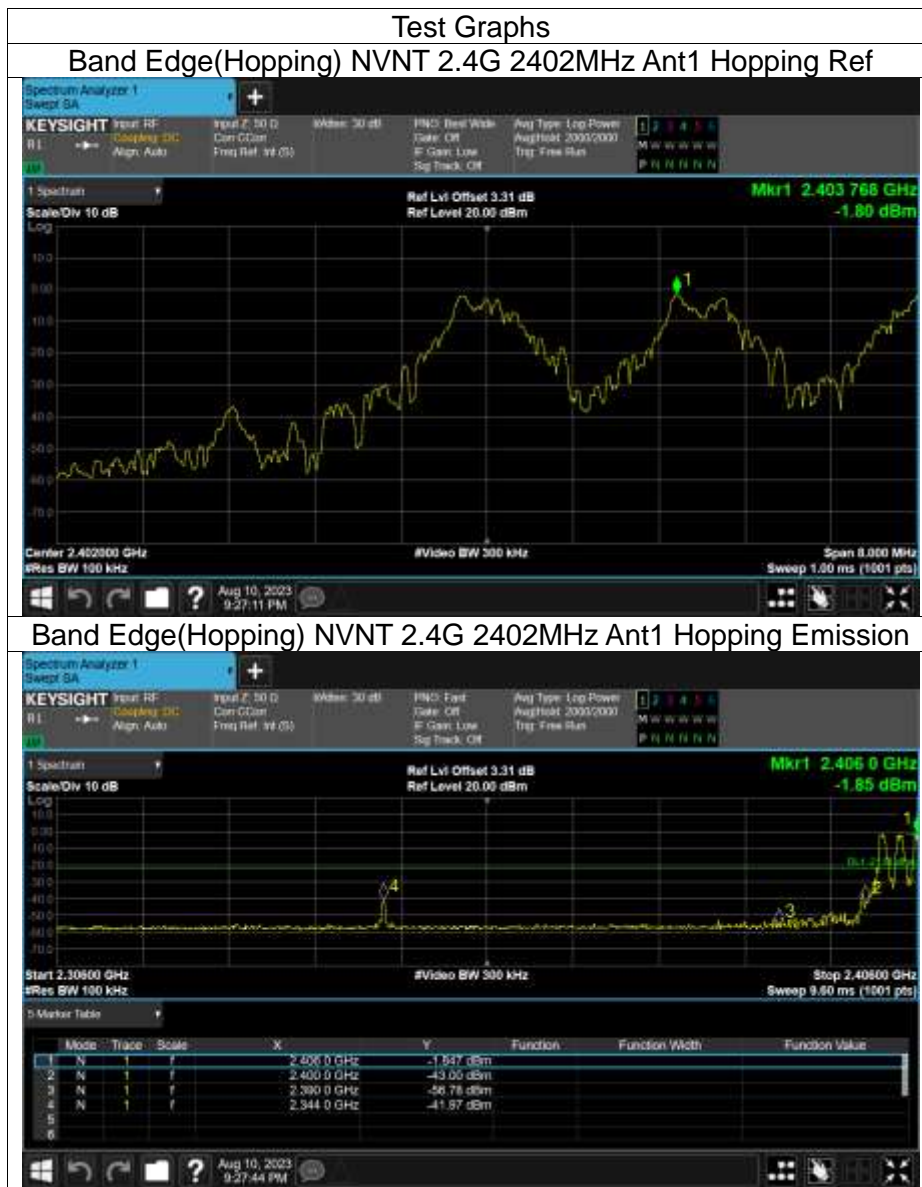




### Band Edge(Hopping) NVNT 2.4G 2480MHz Ant1 Hopping Ref



### Band Edge(Hopping) NVNT 2.4G 2480MHz Ant1 Hopping Emission

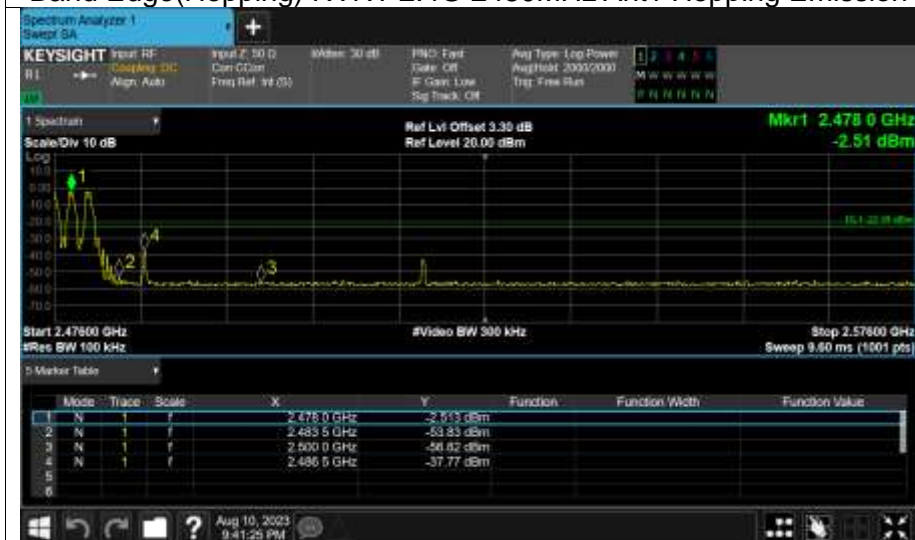



### Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2402	Ant1	-46.89	-20	Pass
NVNT	2.4G	2440	Ant1	-47.96	-20	Pass
NVNT	2.4G	2480	Ant1	-43.67	-20	Pass




### Test Graphs

Tx. Spurious NVNT 2.4G 2402MHz Ant1 Ref






Tx. Spurious NVNT 2.4G 2402MHz Ant1 Emission

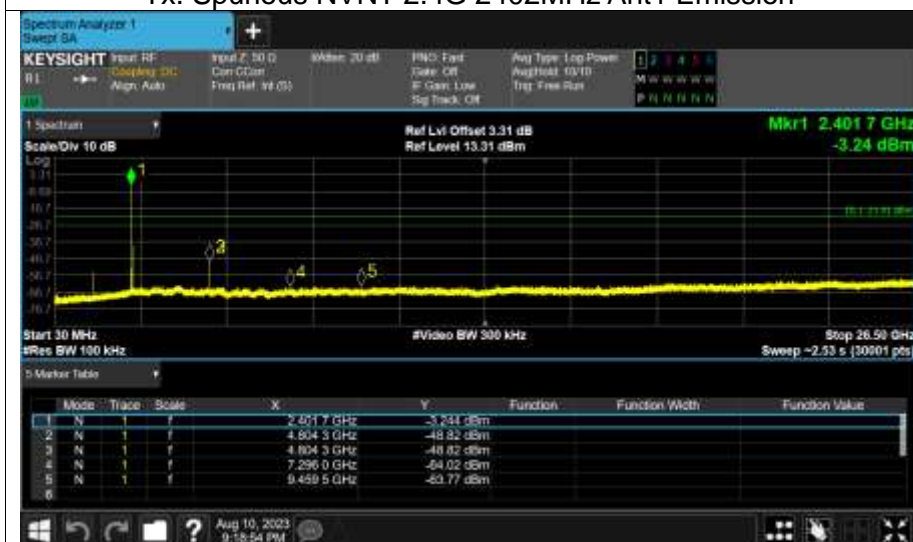

Tx. Spurious NVNT 2.4G 2440MHz Ant1 Ref






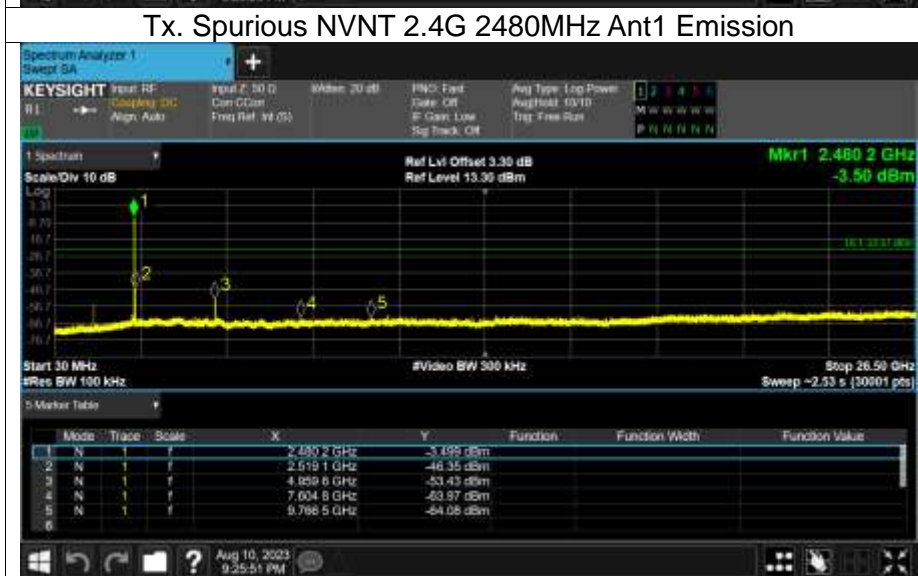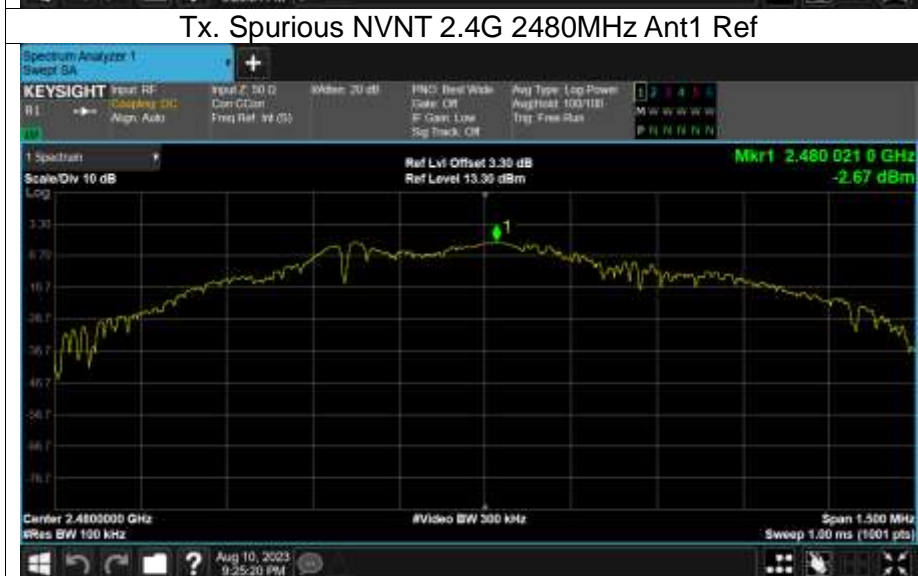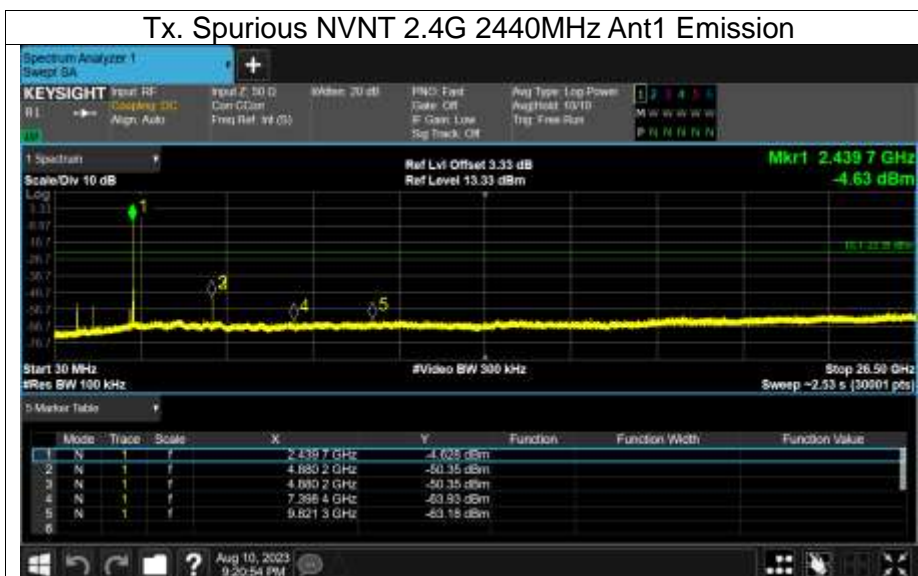



### Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	2.4G	Ant1	40	15	Pass

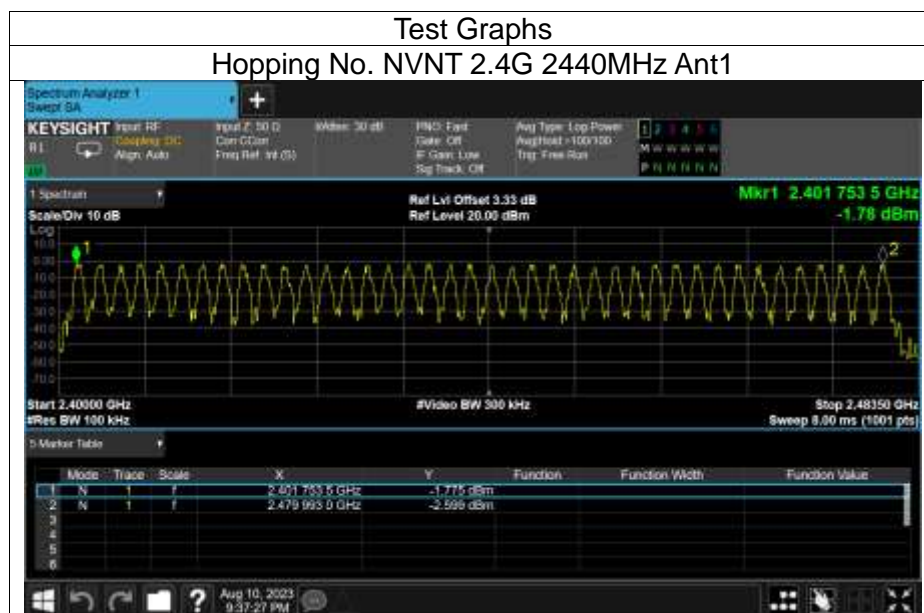






### Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	2.4G	2440	Ant1	0.136	10.472	77	31600	400	Pass

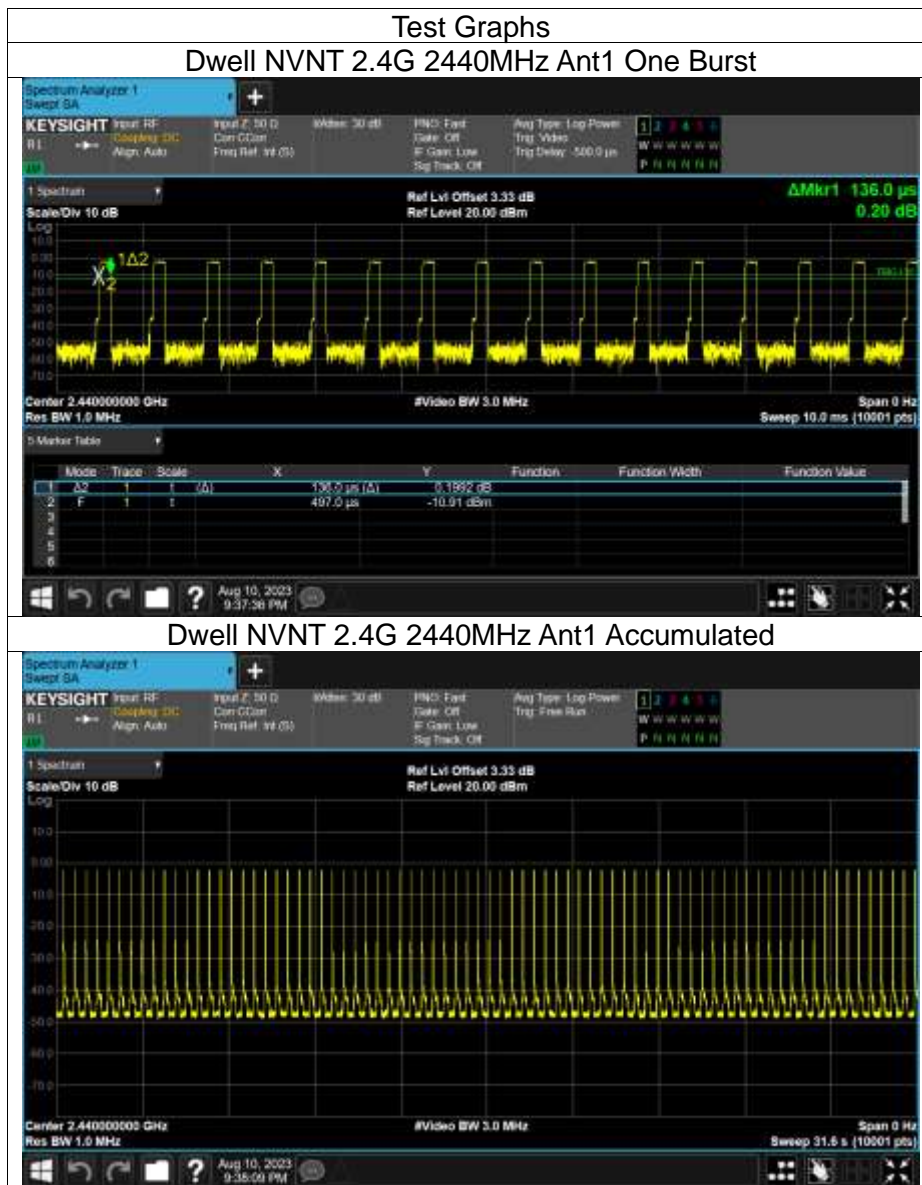



## FREQUENCY STABILITY

Channel 20	2440.0000
Voltage(V)	Measurement Frequency (MHz)
4.255	2440.0024
3.7	2440.0026
3.145	2440.0024
Max.Deviation(MHz)	0.0026
Max.Deviation(ppm)	0.0001%

Temperature(°C)	Measurement Frequency (MHz)
-30	2440.0037
-20	2440.0031
-10	2440.0038
0	2440.0031
10	2440.0032
20	2440.0035
30	2440.0032
40	2440.0030
50	2440.0028
Max.Deviation(MHz)	0.0038
Max.Deviation(ppm)	0.0002%

※※※※END OF THE REPORT※※※※