

# **FCC Test Report**

Report No.: AGC10514231205FR02

FCC ID : 2BCRN-BREAKX2

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Smart Karaoke Machine

**BRAND NAME** : Ikarao

**MODEL NAME** : BREAK X2, BREAK i200

**APPLICANT**: Dongguan Aika Electronic Technology Co., Ltd.

**DATE OF ISSUE** : Feb. 23, 2023

**STANDARD(S)** : FCC Part 15 Subpart C §15.247

**REPORT VERSION**: V1.0

Attestation of Global Conciliance (Shenzhen) Co., Ltd



Page 2 of 91


## **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 07, 2024	Valid	Initial Release




## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	8
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	10
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	12
3.4 Measurement Uncertainty	12
3.5 List of Equipment Used	13
4.System Test Configuration	15
4.1 EUT Configuration	15
4.2 EUT Exercise	15
4.3 Configuration of Tested System	15
4.4 Equipment Used in Tested System	15
4.5 Summary of Test Results	16
5. Description of Test Modes	17
6. Duty Cycle Measurement	
7. RF Output Power Measurement	20
7.1 Provisions Applicable	20
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	21
8. 6dB Bandwidth Measurement	22
8.1 Provisions Applicable	
8.2 Measurement Procedure	22
8.3 Measurement Setup (Block Diagram of Configuration)	22
8.4 Measurement Result	23
9. Power Spectral Density Measurement	36





	9.1 Provisions Applicable	. 36
	9.2 Measurement Procedure	. 36
	9.3 Measurement Setup (Block Diagram of Configuration)	. 37
	9.4 Measurement Result	. 37
10	. Conducted Band Edge and Out-of-Band Emissions	. 44
	10.1 Provisions Applicable	. 44
	10.2 Measurement Procedure	. 44
	10.3 Measurement Setup (Block Diagram of Configuration)	. 44
	10.4 Measurement Result	. 45
11.	. Radiated Spurious Emission	. 60
	11.1 Measurement Limits	. 60
	11.2 Measurement Procedure	. 60
	11.3 Measurement Setup (Block Diagram of Configuration)	. 63
	11.4 Measurement Result	. 64
12	. AC Power Line Conducted Emission	. 85
	12.1 Measurement Limits	. 85
	12.2 Block Diagram of Line Conducted Emission Test	. 85
	12.3 Preliminary Procedure of Line Conducted Emission Test	. 86
	12.4 Final Procedure of Line Conducted Emission Test	. 86
	12.5 Test Result of Line Conducted Emission Test	. 86
Αp	pendix I: Photographs of Test Setup	. 91
Αp	pendix II: Photographs of Test EUT	. 91





## 1. General Information

Applicant	Dongguan Aika Electronic Technology Co., Ltd.
Address	Room 201, Building 2, No. 388, Bihu Road, Fenggang Town, Dongguan City, Guangdong Province, China
Manufacturer	GUANGDONG TAIDE ZHILIAN TECHNOLOGY CO., LTD
Address	No. 388 Bihu Road, Fenggang Town, Dongguan city, Guangdong Province, China
Factory	GUANGDONG TAIDE ZHILIAN TECHNOLOGY CO., LTD
Address	No. 388 Bihu Road, Fenggang Town, Dongguan city, Guangdong Province, China
Product Designation	Smart Karaoke Machine
Brand Name	Ikarao
Test Model	BREAK X2
Series Model(s)	BREAK i200
Difference Description	There is no difference in the products, but there is a small difference in the packaging
Date of receipt of test item	Dec. 21, 2023
Date of Test	Dec. 21, 2023~Mar. 07, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-2.4GWLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Mar. 07, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Mar. 07, 2024
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Mar. 07, 2024



Page 6 of 91

## 2. Product Information

## 2.1 Product Technical Description

Equipment Type	WLAN 2.4G	
Frequency Band	2400MHz ~ 2483.5MHz	
Operation Frequency	2412MHz ~ 2462MHz	
Output Power (Average)	IEEE 802.11b:12.70dBm; IEEE 802.11g:14.65dBm;	
Output I ower (Average)	IEEE 802.11n(HT20):9.18dBm; IEEE 802.11n(HT40):8.99dBm	
Output Power (Peak)	IEEE 802.11b:15.23dBm; IEEE 802.11g:16.90dBm;	
Output Fower (Feak)	IEEE 802.11n(HT20):16.63dBm; IEEE 802.11n(HT40):16.26dBm	
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS	
iviodulation	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM	
	802.11b:1/2/5.5/11Mbps	
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps	
	802.11n: up to 300Mbps	
Number of channels	11	
Hardware Version	V1.2	
Software Version	V1.0.2	
Antenna Designation	FPC Antenna	
Antenna Gain	4.67dBi	
Power Supply	DC 14.8V by battery or DC 18V/3.6A by adapter	



Page 7 of 91

## 2.2 Table of Carrier Frequency For 2412-2462MHz:

## 11 channels are provided for 802.11b/g/n (HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

## 7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



Page 8 of 91

#### 2.3 IEEE 802.11n Modulation Scheme

MCS				N <sub>CBPS</sub>		$N_{DBPS}$		Data Rate(Mbps)		
Index	Nss	Modulation	R	N <sub>BPSC</sub>	0	DF3	1,10062		800nsGI	
Паох					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 9 of 91

## 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2BCRN-BREAKX2, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

## 2.5 Test Methodology

The tests were performed according to following standards:

N	lo.	o. Identity Document Title	
	1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
	2	FCC 47 CFR Part 15	Radio Frequency Devices
;	3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

## 2.6 Special Accessories

Refer to section 4.4.

## 2.7 Equipment Modifications

Not available for this EUT intended for grant.

## 2.8 Antenna Requirement

## **Standard Requirement**

## 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 4.67dBi.



## 2.9 Description of Test Software

#### For IEEE 802.11 mode:

## Software Setting Diagram

```
*** 管理点: C:\Windows\System32\cmd.exe - adb shell

ttwpriv_arm64 wlan0 mp_bandwidth 40M=0, shortGI=0

ttwpriv_arm64 wlan0 mp_tapower patha=49, pathb=0

ttwpriv_arm64 wlan0 mp_txpower patha=49, pathb=0

ttwpriv_arm64 wlan0 mp_ctx background, pktrtwpriv_arm64 wlan0 mp_start

ttwpriv_arm64 wlan0 mp_ctx background, pktrtwpriv_arm64 wlan0 mp_start

ttwpriv_arm64 wlan0 mp_ctame1 36

k3568_t:/ # rtwpriv_arm64 wlan0 mp_start

vlan0 mp_start:mp_start ok

k3568_t:/ # rtwpriv_arm64 wlan0 mp_ant_tx a

vlan0 mp_channe1:Change channe1 149 to channe1 36

k3568_t:/ # rtwpriv_arm64 wlan0 mp_ant_tx a

vlan0 mp_ant_tx:switch Tx antenna to a

k3568_t:/ # rtwpriv_arm64 wlan0 mp_randwidth 40M=0, shortGI=0

vlan0 mp_bandwidth:No change current BW 0

k3568_t:/ # rtwpriv_arm64 wlan0 mp_rate 128

vlan0 mp_rate:Set data rate to 128 index 12

k3568_t:/ # rtwpriv_arm64 wlan0 mp_rate 128

vlan0 mp_txpower:patha=49, pathb=0

k3568_t:/ # rtwpriv_arm64 wlan0 mp_ctx background, pkt

vlan0 mp_ctx:

Start continuous DA=ffffffffffff len=1500 count=0

k3568_t:/ # rtwpriv_arm64 wlan0 mp_ctx stop

rtwpriv_arm64 wlan0 mp_ctx stop

vlan0 mp_ctx:Stop continuous Tx

k3568_t:/ #

***Countinuous Da=ffffffffffff len=1500 count=0
```

Test Mode	Channel	Power Index
802.11b	L/M/H	49
802.11g	L/M/H	49
802.11n-HT20	L/M/H	49
802.11n-HT40	L/M/H	49



Page 11 of 91

#### 3. Test Environment

## 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

## CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

## IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 12 of 91


## 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

## 3.4 Measurement Uncertainty

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %





## 3.5 List of Equipment Used


• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
$\boxtimes$	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17		
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11		
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22		
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-11-13	2024-11-12		
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
$\boxtimes$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

<ul><li>A</li></ul>	AC Power Line Conducted Emission								
Used	Used I Eduloment No. I. Test Eduloment I Manufacturer I. Model No. I. Serial No. I.				Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02		
AGC-EM-A130 6dB Attenuator Eeatsheep LM-XX-6-5W DC-6GZ 2023-06-09 2024-06-08  Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection"									

Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





• Tes	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



Page 15 of 91

## **4.System Test Configuration**


## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

## 4.3 Configuration of Tested System

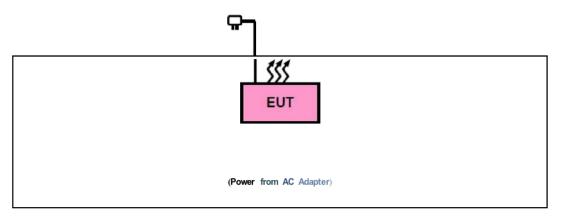

## 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Xiaomi Phone	MI 10	Xiaomi	<del></del>	

#### 

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter 1	CW1803600	Shenzhen Cenwell Technology Co., Ltd.	Input:100-240V, 50/60Hz, 2.0A Output: 18.0V, 3.6A, 64.8W	
2	Adapter 2	MSA65ED-18036001	Shenzhen JingQuanHua & Everrise Intelligent Elactric Co., Ltd	Input:100-240V, 50/60Hz, 1.5A Output: 18.0V, 3.6A, 65W	



Page 16 of 91

## 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



Page 17 of 91

## 5. Description of Test Modes

Summary table of Test Cases					
	Data Rate / Modulation				
Test Item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)				
Radiated & Conducted Test Cases	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(Battery powered or AC/DC adapter) Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(Battery powered or AC/DC adapter) Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(Battery powered or AC/DC adapter) Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(Battery powered or AC/DC adapter) Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(Battery powered or AC/DC adapter) Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps (Battery powered or AC/DC adapter) Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(Battery powered or AC/DC adapter) Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter)  Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter)  Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps(Battery powered or AC/DC adapter)  Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter)  Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps(Battery powered or AC/DC adapter)				
AC Conducted Emission	• /				

## Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



Page 18 of 91


## 6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	99.64	0.02	0.12	-0.03
IEEE 802.11g	6	97.00	0.13	0.72	-0.26
IEEE 802.11n-HT20	MCS0	97.14	0.13	0.77	-0.25
IEEE 802.11n-HT40	MCS0	93.49	0.29	1.83	-0.58


#### Remark:

- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. Average factor = 20 log10 Duty Cycle
- 3. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.





## The test plots as follows:

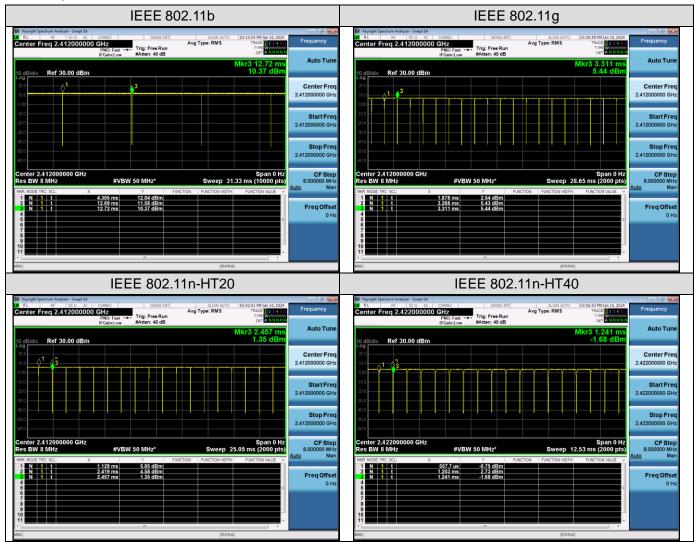



Page 20 of 91

## 7. RF Output Power Measurement

## 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

#### 7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- The maximum peak conducted output power may be measured using a broadband peak RF power meter.
   The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

#### 7.3 Measurement Setup (Block Diagram of Configuration)

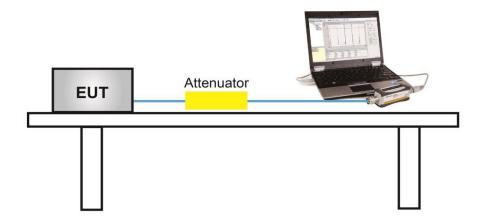



Page 21 of 91

#### 7.4 Measurement Result

	Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2412	12.70	15.23	≤30	Pass			
802.11b	2437	10.90	13.59	≤30	Pass			
	2462	10.44	12.92	≤30	Pass			
	2412	9.41	16.90	≤30	Pass			
802.11g	2437	14.65	16.18	≤30	Pass			
	2462	13.94	15.63	≤30	Pass			
	2412	8.55	15.96	≤30	Pass			
802.11n20	2437	8.74	16.13	≤30	Pass			
	2462	9.18	16.63	≤30	Pass			
	2422	8.99	16.26	≤30	Pass			
802.11n40	2437	8.67	16.24	≤30	Pass			
	2452	8.59	16.26	≤30	Pass			



Page 22 of 91

#### 8. 6dB Bandwidth Measurement

#### 8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

#### **8.2 Measurement Procedure**

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss
  was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

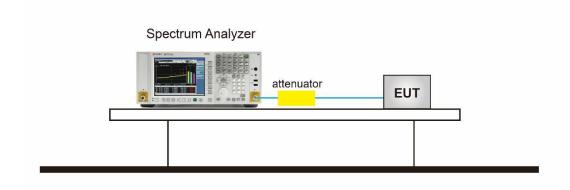




Page 23 of 91


#### 8.4 Measurement Result

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail
802.11b	2412	12.760	8.063	≥0.5	Pass
	2437	13.637	8.546	≥0.5	Pass
	2462	12.908	8.082	≥0.5	Pass
802.11g	2412	16.409	15.095	≥0.5	Pass
	2437	16.580	15.136	≥0.5	Pass
	2462	16.381	15.049	≥0.5	Pass
802.11n20	2412	17.456	15.094	≥0.5	Pass
	2437	17.585	15.456	≥0.5	Pass
	2462	17.431	15.095	≥0.5	Pass
802.11n40	2422	35.597	30.039	≥0.5	Pass
	2437	36.173	35.338	≥0.5	Pass
	2452	35.864	35.080	≥0.5	Pass






## Test Graphs of Occupied Bandwidth

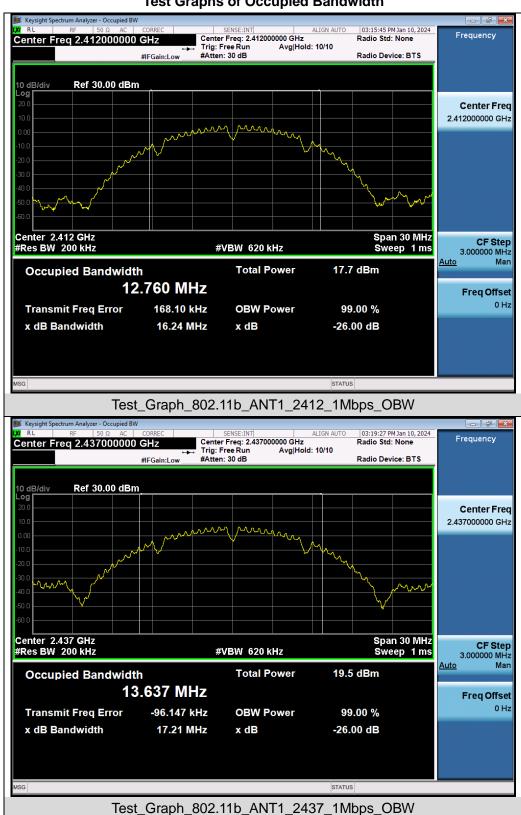



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/






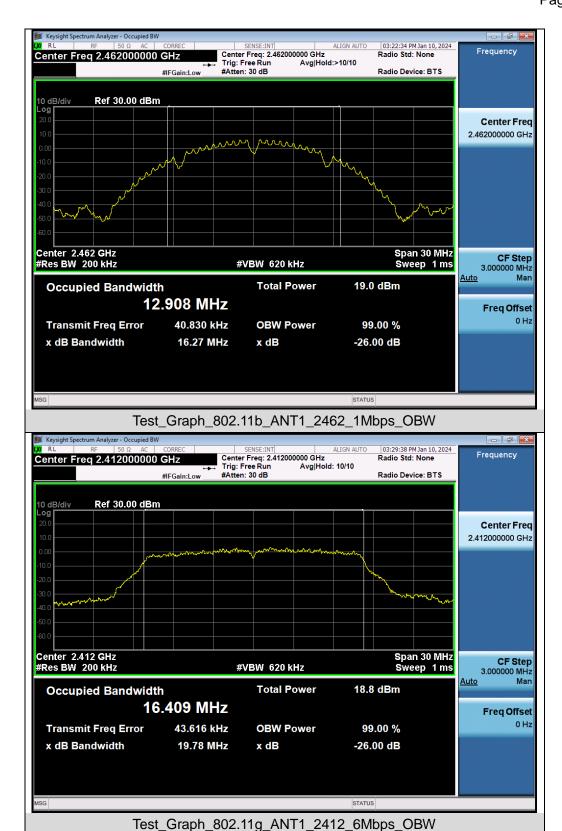




























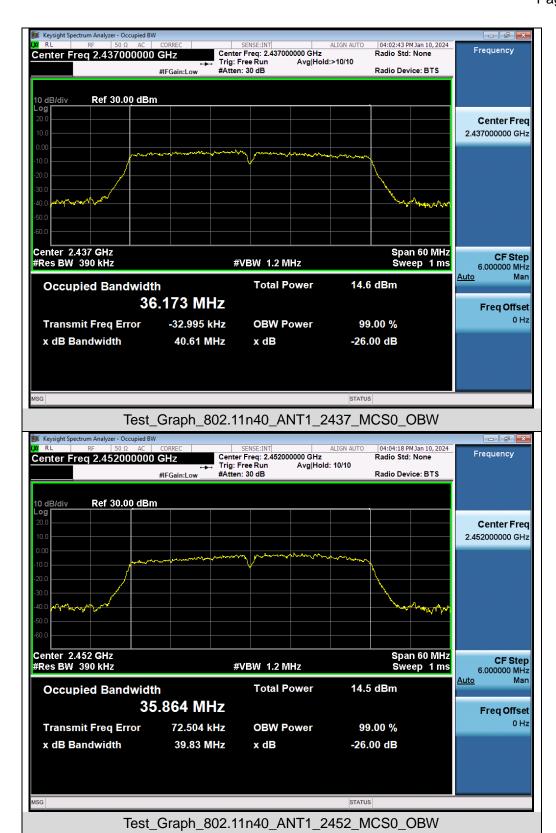






## **Test Graphs of DTS Bandwidth**

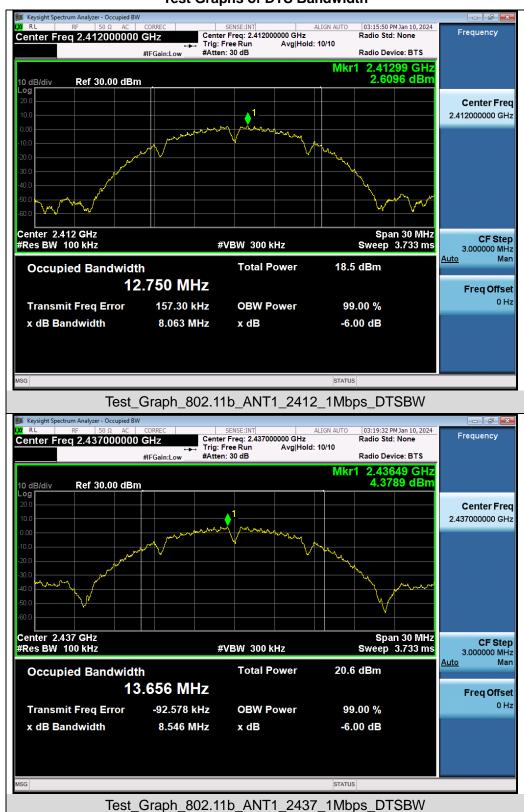

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/








Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_DTSBW














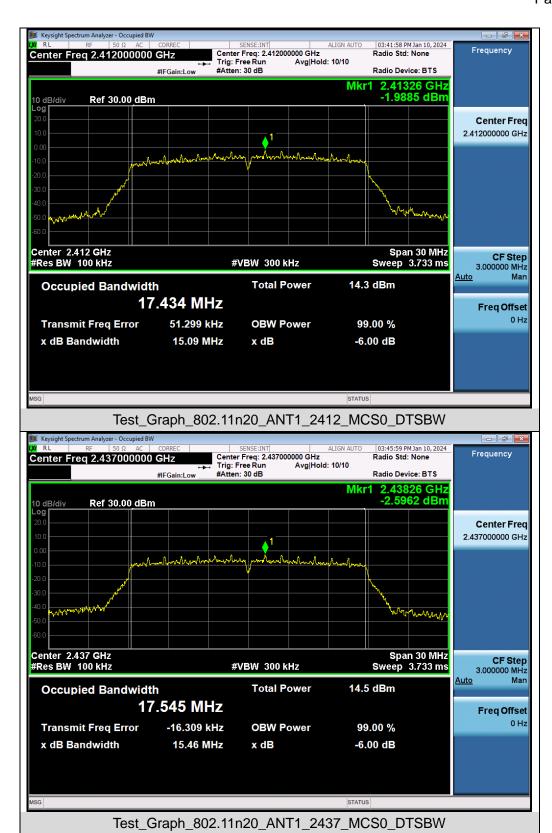







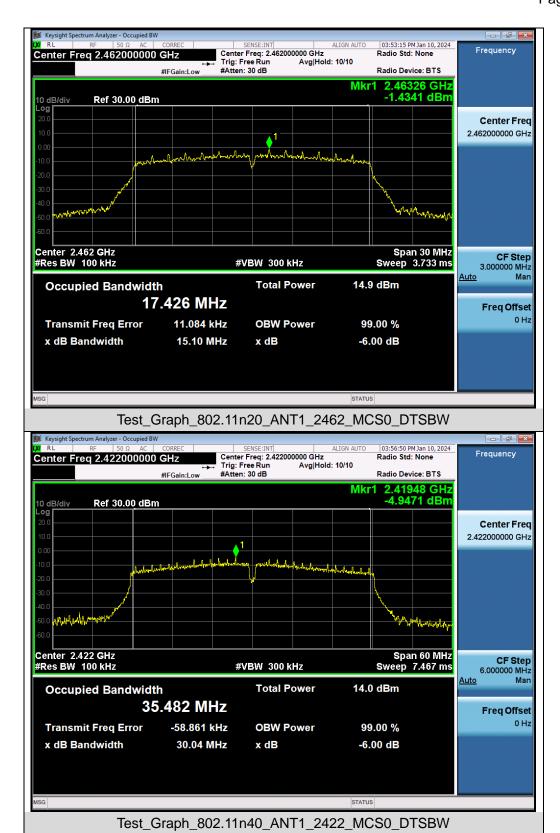

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





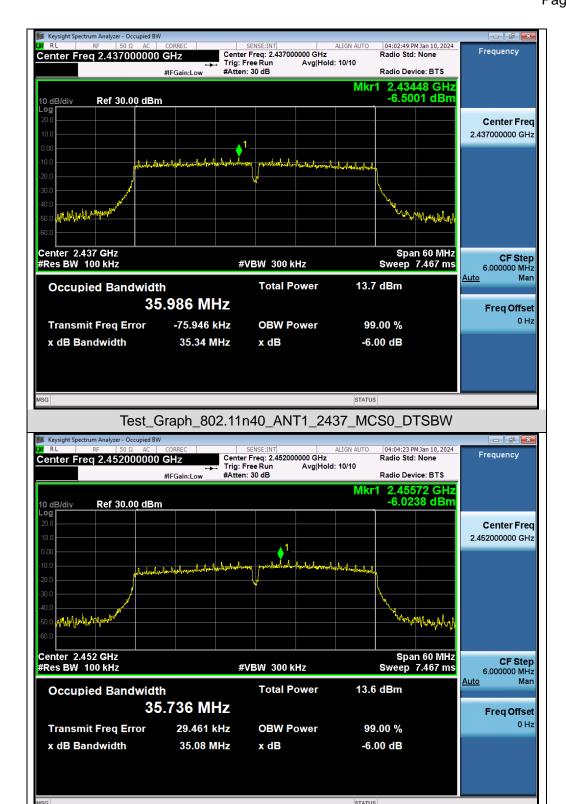

Test Graph 802.11n40 ANT1 2452 MCS0 DTSBW

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 36 of 91

## 9. Power Spectral Density Measurement

## 9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure


⊠For Peak power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW  $\geq$  [3 × RBW].
- 5. Set the Span ≥ [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10\*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power spectral density test:
- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz ≤ RBW ≤ 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10\*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




Page 37 of 91

# 9.3 Measurement Setup (Block Diagram of Configuration)

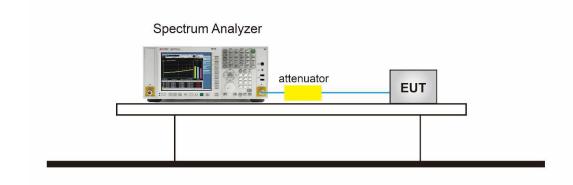


#### 9.4 Measurement Result


	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/20kHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail			
	2412	-2.387	-10.626	≤8	Pass			
802.11b	2437	-0.559	-8.798	≪8	Pass			
	2462	-4.657	-12.896	≤8	Pass			
	2412	-4.685	-12.924	≪8	Pass			
802.11g	2437	-9.378	-17.617	≪8	Pass			
	2462	-9.269	-17.508	≤8	Pass			
	2412	-7.794	-16.033	≪8	Pass			
802.11n20	2437	-7.437	-15.676	≪8	Pass			
	2462	-6.516	-14.755	≪8	Pass			
	2422	-10.699	-18.938	≪8	Pass			
802.11n40	2437	-11.631	-19.87	≪8	Pass			
	2452	-11.152	-19.391	≪8	Pass			






### **Test Graphs of Conducted Output Power Spectral Density**

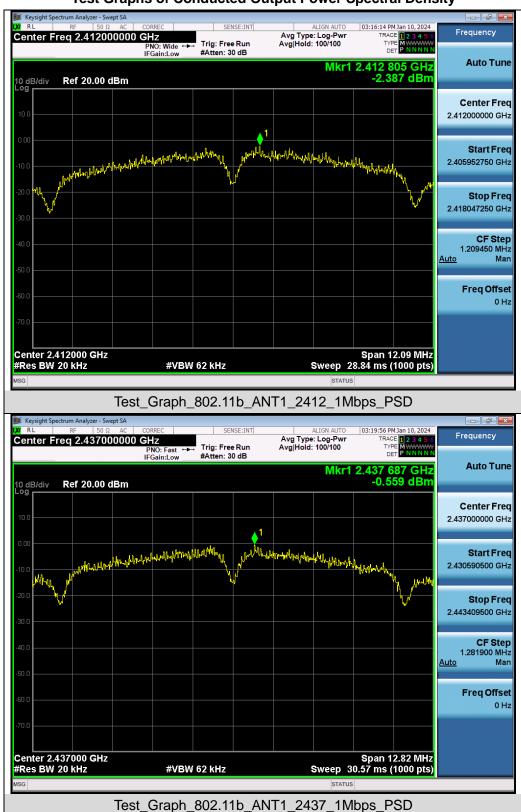







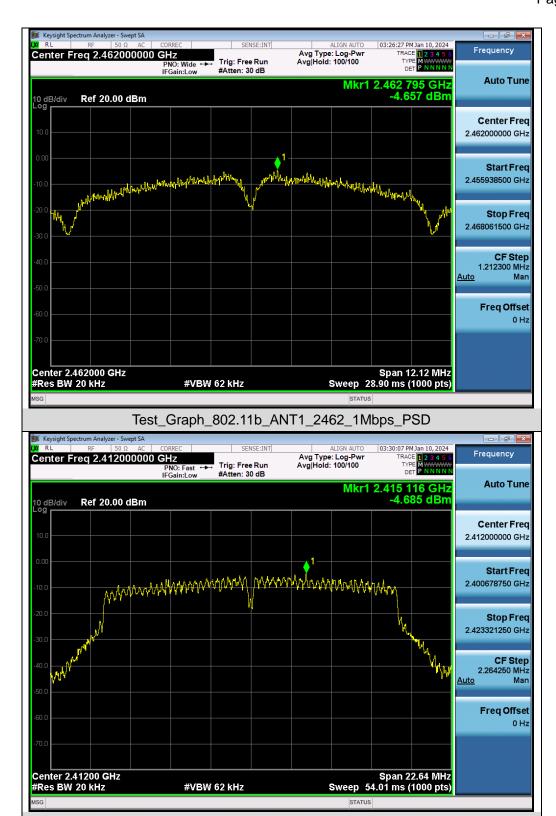


Test\_Graph\_802.11g\_ANT1\_2412\_6Mbps\_PSD






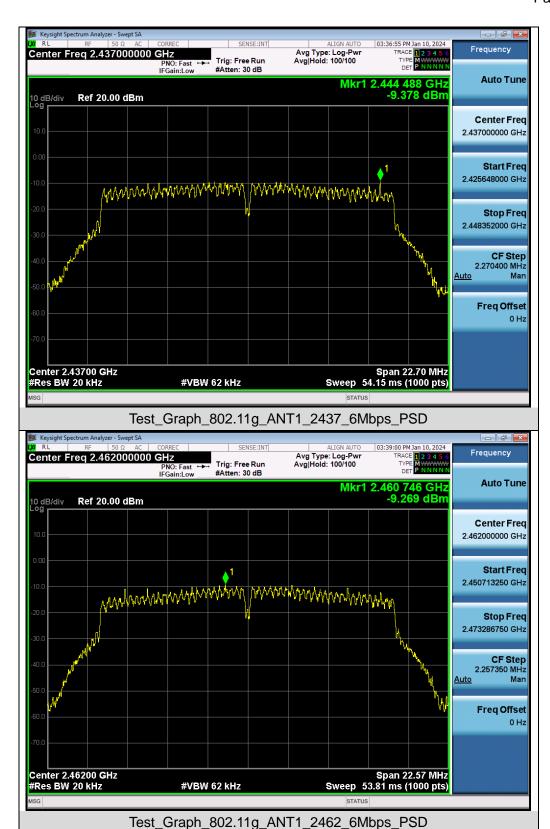







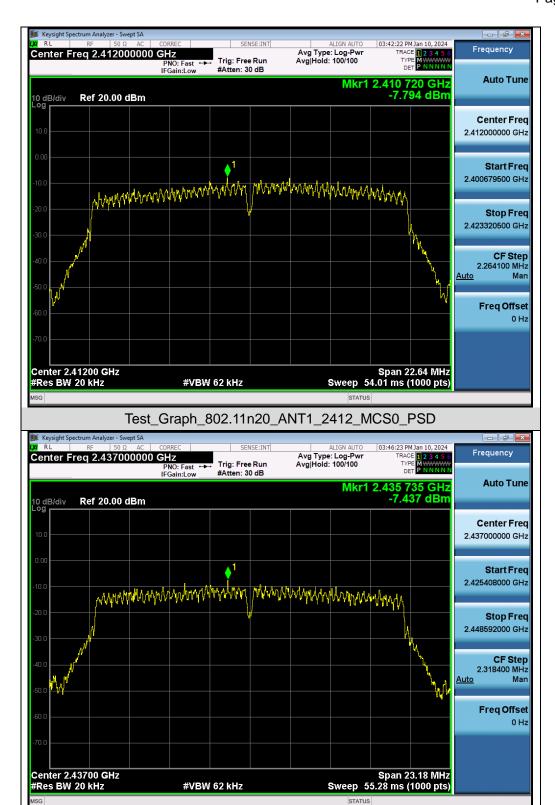


Test\_Graph\_802.11n20\_ANT1\_2437\_MCS0\_PSD






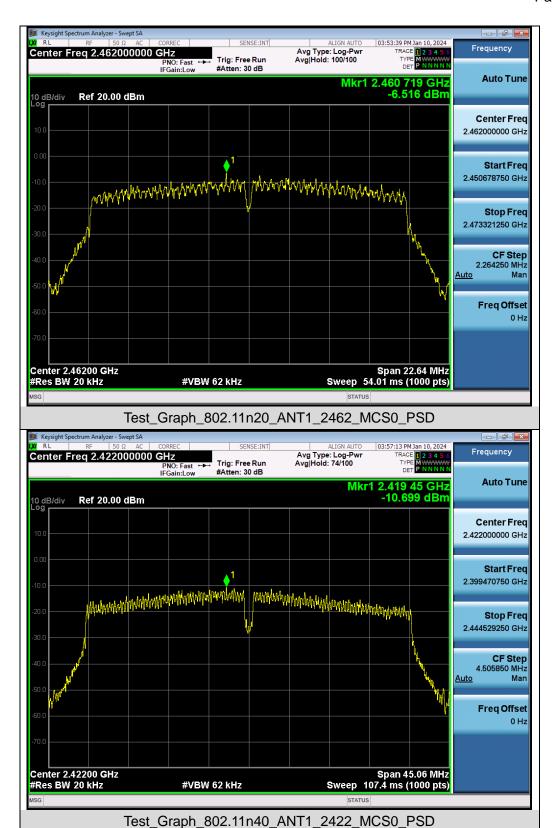





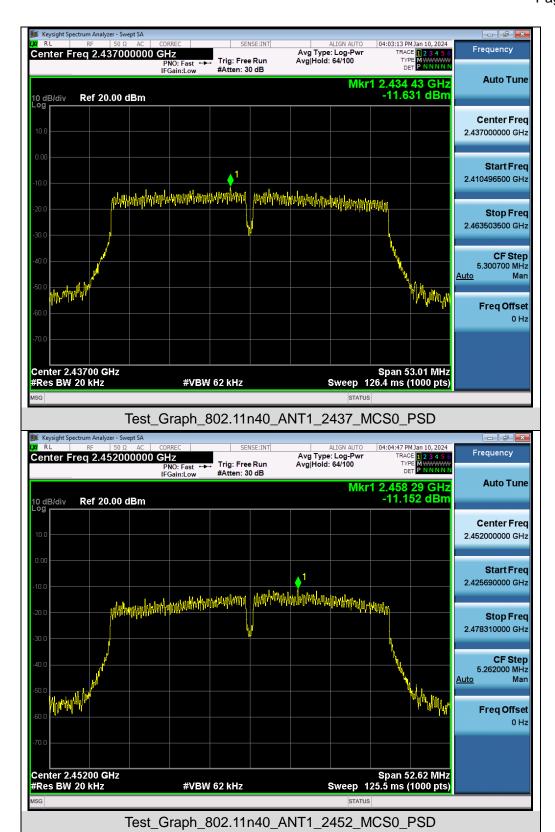



# 10. Conducted Band Edge and Out-of-Band Emissions

#### 10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

#### 10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
  - 1. Set instrument center frequency to DTS channel center frequency.
  - 2. Set the span to ≥ 1.5 times the DTS bandwidth.
  - 3. Set the RBW = 100 kHz.
  - 4. Set the VBW  $\geq$  3 x RBW.
  - 5. Detector = peak.
  - 6. Sweep time = auto couple.
  - 7. Trace mode = max hold.
  - 8. Allow trace to fully stabilize.
  - 9. Use the peak marker function to determine the maximum PSD level.
  - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure Out of Band Emission
  - 1. Set RBW = 100 kHz.
  - 2. Set VBW ≥ 300 kHz.
  - 3. Detector = peak.
  - 4. Sweep = auto couple.
  - 5. Trace Mode = max hold.
  - 6. Allow trace to fully stabilize.
  - 7. Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

### 10.3 Measurement Setup (Block Diagram of Configuration)

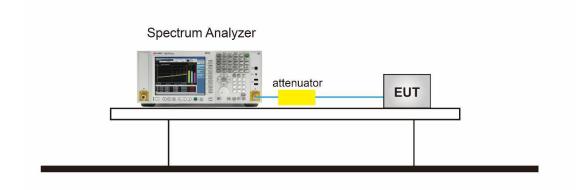




Page 45 of 91

### 10.4 Measurement Result


Test Mode	Test Frequency (MHz)	Reference level (dBm)	-20dB Limits (dBm)
	2412	2.6096	-17.39
IEEE 802.11b	2437	4.3789	-15.62
	2462	3.8515	-16.15
	2412	1.8622	-18.14
IEEE 802.11g	2437	-0.31515	-20.32
	2462	-2.4678	-22.47
	2412	-1.9885	-21.99
IEEE 802.11n-HT20	2437	-2.5962	-22.60
	2462	-1.4341	-21.43
	2422	-4.9471	-24.95
IEEE 802.11n-HT40	2437	-6.5001	-26.50
	2452	-6.0238	-26.02


Note: The reference level please see the power of DTS Bandwidth.






### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

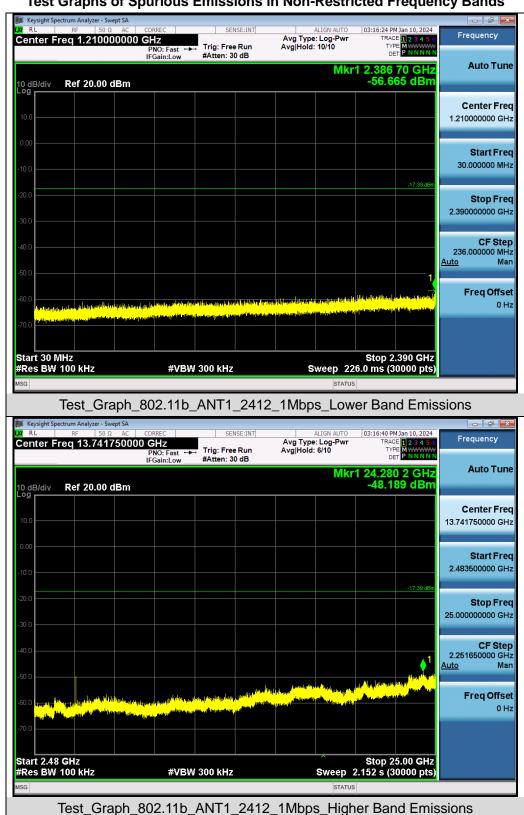






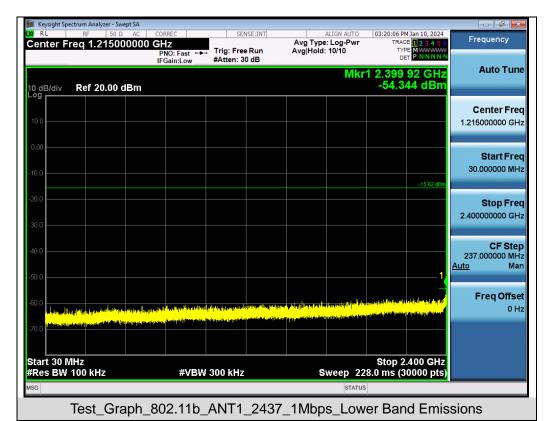





Test\_Graph\_802.11b\_ANT1\_2437\_1Mbps\_Higher Band Emissions






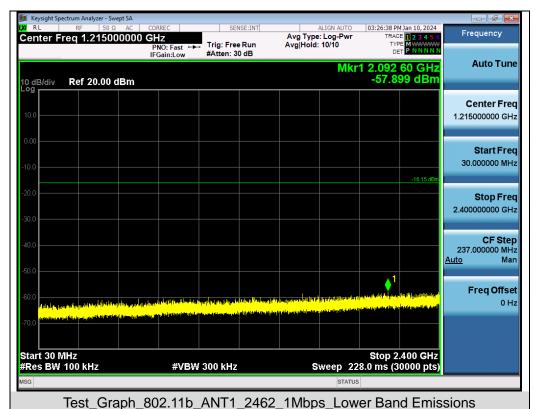









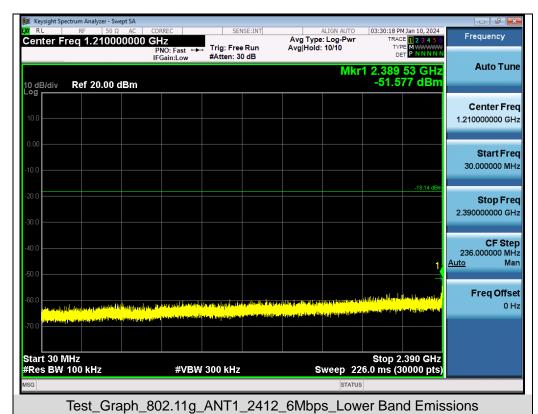









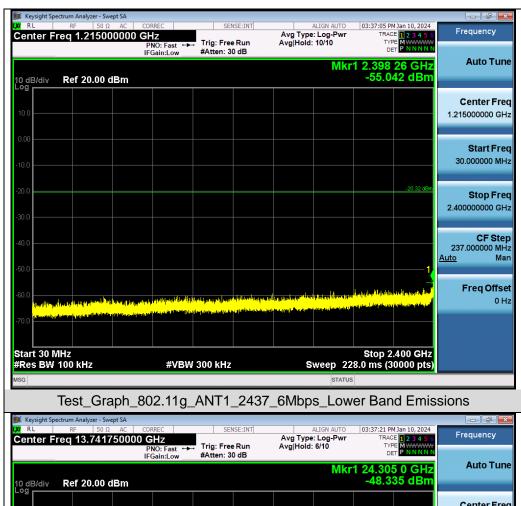


| Center Freq | 13.741750000 GHz | Start Freq | 2.483500000 GHz | Stop Freq | 25.000000000 GHz | CF Step | 2.251650000 GHz | Start Z.48 GHz | Freq Offset | O Hz | O Hz | Freq Offset | O Hz |






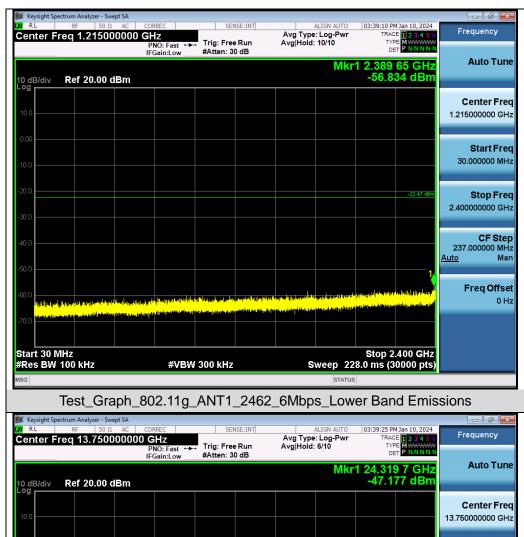







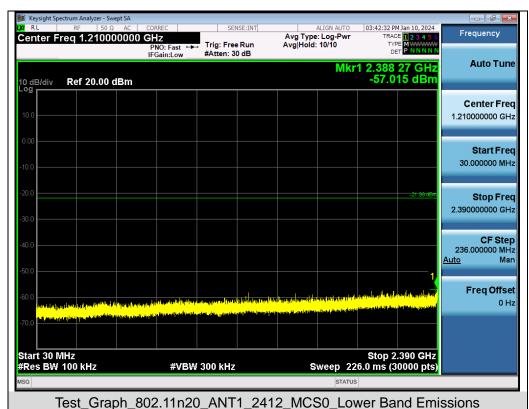








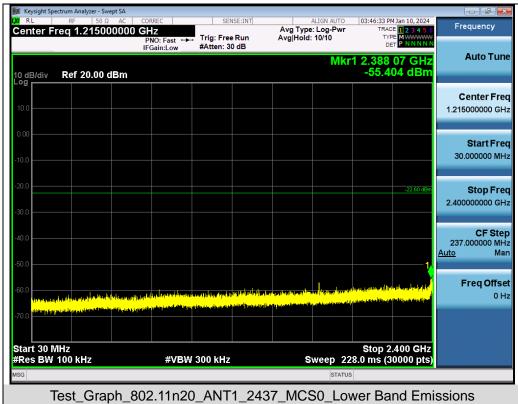






<u>Auto</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts) Freq Offset 0 Hz



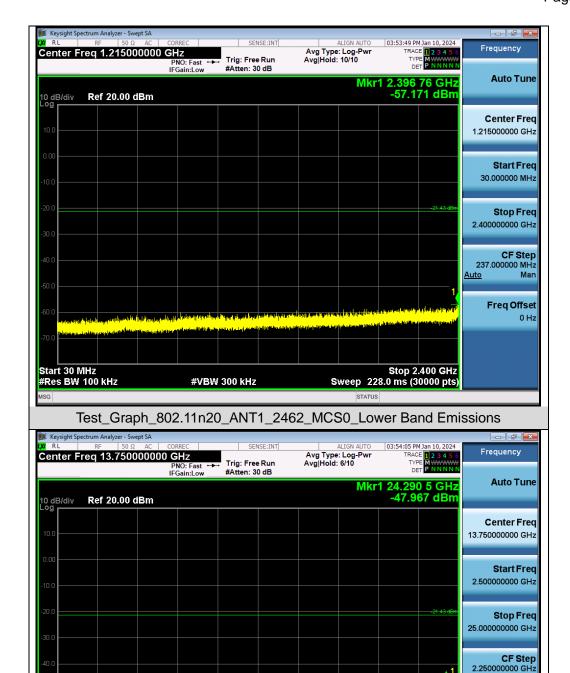


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_802.11n20\_ANT1\_2462\_MCS0\_Higher Band Emissions

#VBW 300 kHz

Start 2.50 GHz #Res BW 100 kHz



25.000000000 GHz


<u>Auto</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts) **CF Step** 2.251650000 GHz

Freq Offset 0 Hz

Mar



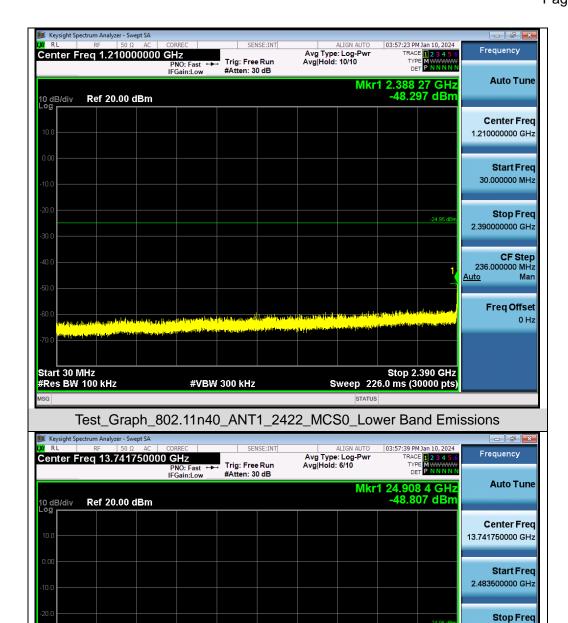


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_802.11n40\_ANT1\_2422\_MCS0\_Higher Band Emissions

#VBW 300 kHz


Start 2.48 GHz #Res BW 100 kHz






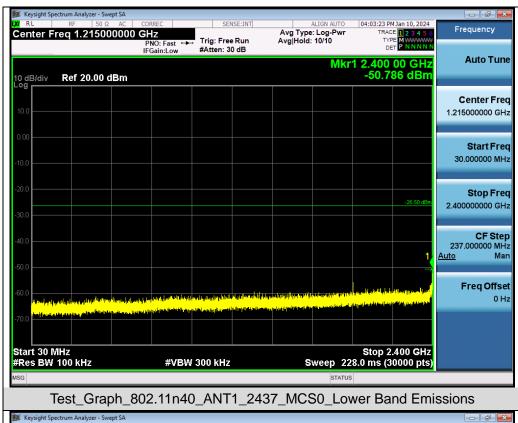









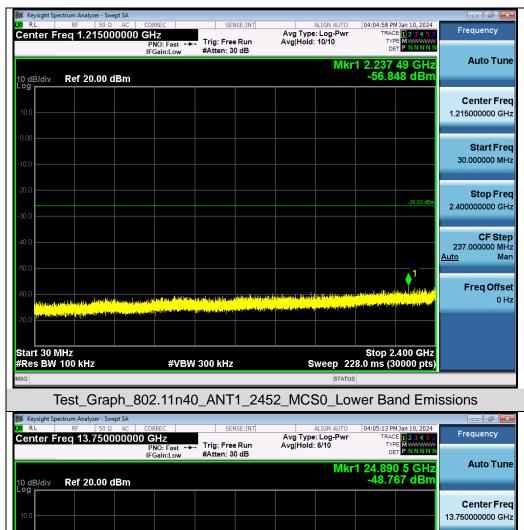







### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

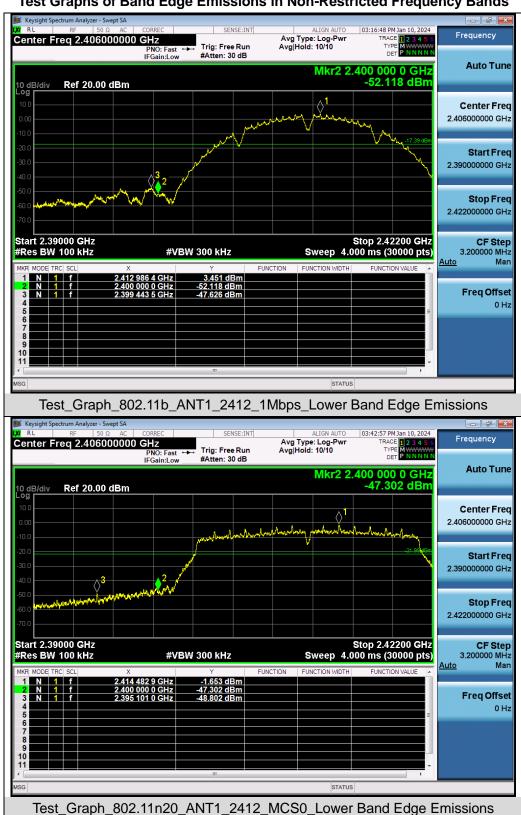





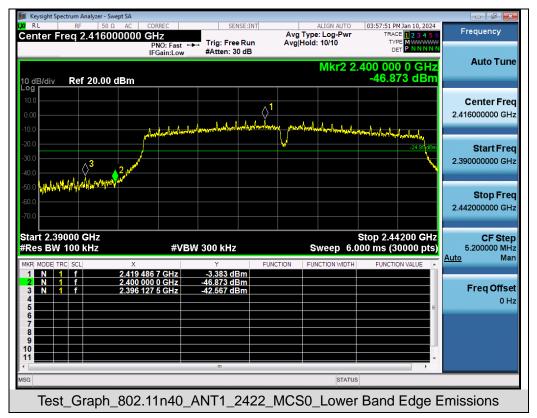

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 60 of 91

# 11. Radiated Spurious Emission

#### 11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any reposphang alternative (provided the transmitter aloperates a for i longer hand) on the sample of pincases in where in the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 61 of 91

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start Stan Fraguency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 62 of 91

#### Quasi-Peak Measurements below 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### • Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold






# 11.3 Measurement Setup (Block Diagram of Configuration)


# Radiated Emission Test Setup 9kHz-30MHz

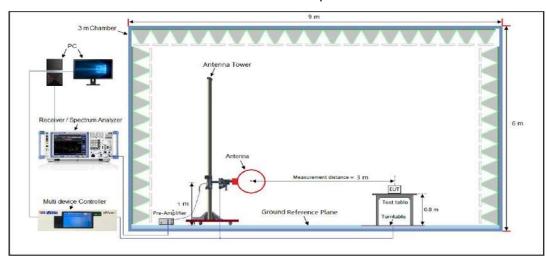

### Radiated Emission Test Setup 30MHz-1000MHz

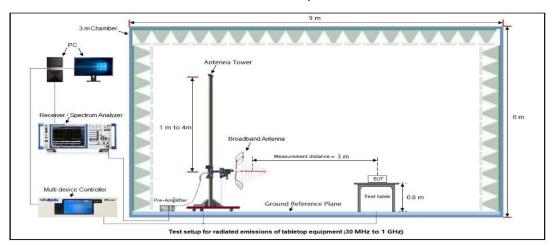

### Radiated Emission Test Setup Above 1000MHz

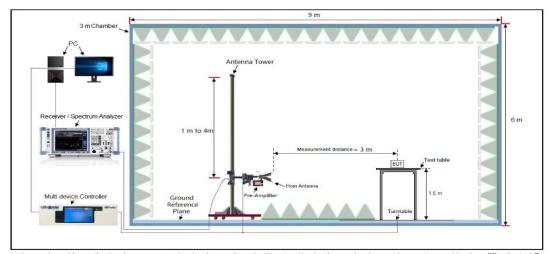

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




#### 11.4 Measurement Result

#### Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Farmer and the second s						
Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Smart Karaoke Machine	Model Name	BREAK X2			
Temperature	22.9°C	Relative Humidity	57.4%			
Pressure	960hPa	Test Voltage	DC 14.8V by battery			
Test Mode	Mode 5	Antenna Polarity	Horizontal			

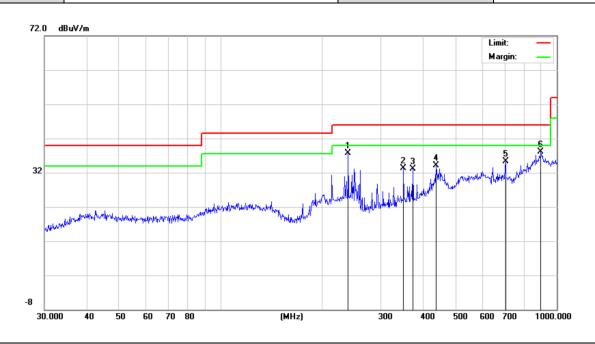

Final D	Final Data List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	239.9874	37.64	15.40	46.00	8.36	100	214	Horizontal
2	350.4768	33.26	17.36	46.00	12.74	100	135	Horizontal
3	373.3112	33.02	18.00	46.00	12.98	100	49	Horizontal
4	437.1199	34.04	24.48	46.00	11.96	100	201	Horizontal
5	704.2260	35.35	24.25	46.00	10.65	100	184	Horizontal
6	896.9965	38.13	31.42	46.00	7.87	100	158	Horizontal



Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	Smart Karaoke Machine	Model Name	BREAK X2			
Temperature	22.9°C	Relative Humidity	57.4%			
Pressure	960hPa	Test Voltage	DC 14.8V by battery			
Test Mode	Mode 5	Antenna Polarity	Vertical			

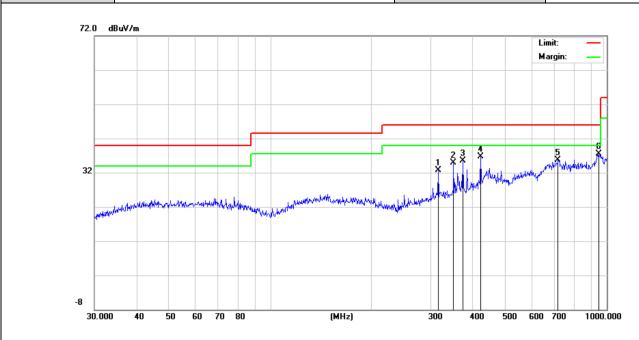

Final D	ata List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	315.4808	32.64	19.98	46.00	13.36	100	214	Vertical
2	350.4768	34.95	20.44	46.00	11.05	100	135	Vertical
3	373.3112	35.53	21.33	46.00	10.47	100	49	Vertical
4	422.0577	36.76	23.23	46.00	9.24	100	201	Vertical
5	716.6820	35.68	28.68	46.00	10.32	100	184	Vertical
6	945.4399	37.48	30.78	46.00	8.52	100	158	Vertical

# **RESULT: Pass**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



Page 66 of 91

#### **Radiated Emissions Test Results above 1 GHz**

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9℃	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.52	0.08	47.6	74	-26.4	peak
4804.000	38.42	0.08	38.5	54	-15.5	AVG
7206.000	41.26	2.21	43.47	74	-30.53	peak
7206.000	30.69	2.21	32.9	54	-21.1	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9°C	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.15	0.08	47.23	74	-26.77	peak
4804.000	38.49	0.08	38.57	54	-15.43	AVG
7206.000	42.37	2.21	44.58	74	-29.42	peak
7206.000	41.24	2.21	43.45	54	-10.55	AVG
Remark:	!		1		!	<u> </u>

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

### **RESULT: Pass**



Page 67 of 91

#### **Radiated Emissions Test Results above 1GHz**

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9°C	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	48.62	0.14	48.76	74	-25.24	peak
4882.000	38.24	0.14	38.38	54	-15.62	AVG
7323.000	42.05	2.36	44.41	74	-29.59	peak
7323.000	31.69	2.36	34.05	54	-19.95	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9°C	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 5	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.29	0.14	46.43	74	-27.57	peak
4882.000	38.42	0.14	38.56	54	-15.44	AVG
7323.000	40.24	2.36	42.6	74	-31.4	peak
7323.000	31.57	2.36	33.93	54	-20.07	AVG
_						
Dama anto						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

# **RESULT: Pass**



Page 68 of 91

#### Radiated Emissions Test Results above 1GHz

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9°C	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	48.62	0.22	48.84	74	-25.16	peak
4960.000	38.21	0.22	38.43	54	-15.57	AVG
7440.000	42.15	2.64	44.79	74	-29.21	peak
7440.000	31.56	2.64	34.2	54	-19.8	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	22.9°C	Relative Humidity	57.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	48.62	0.22	48.84	74	-25.16	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.61	2.64	45.25	74	-28.75	peak
7440.000	31.64	2.64	34.28	54	-19.72	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

### **RESULT: Pass**

#### Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



### **Band Edge Emission Test Results for Restricted Bands**

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

#### Test Graph for Peak Measurement

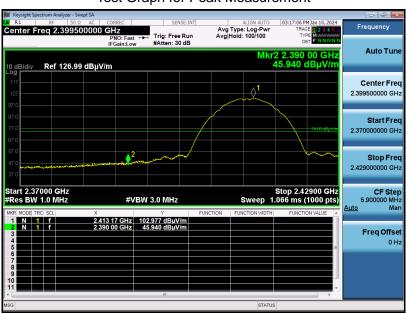

Test Graph for Average Measurement




#### **RESULT: Pass**




### **Band Edge Emission Test Results for Restricted Bands**

EUT Name	Smart Karaoke Machine	Model Name	BREAK X2
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 14.8V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

#### Test Graph for Peak Measurement

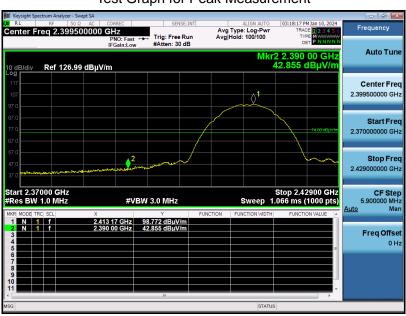

Test Graph for Average Measurement

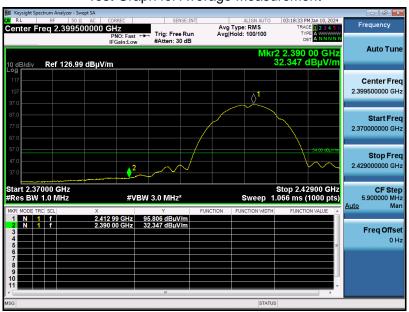

#### **RESULT: Pass**