

TEST REPORT

Applicant Name: Fanvil Link Technology Co.,LTD
Address: Room 1517, Building G, Hualian City Panorama.27 Region,
Bao'an District;Shenzhen,China
Report Number: SZ1240307-11374E-SA
FCC ID: 2BCUQ-W611WV2

Test Standard (s)

FCC 47 CFR part 2.1093

Sample Description

Product Type: Portable Wi-Fi Phone
Model No.: W611W
Multiple Model(s) No.: N/A
Trade Mark: **LINKVIL**
Serial Number: 2IGQ-1
Date Received: 2024/03/12
Date of Test: 2024/04/15~2024/04/17
Issue Date: 2024/05/29

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Sid Luo

Sid Luo
SAR Engineer

Approved By:

Luke Jiang

Luke Jiang
SAR Engineer

Note: The information marked*is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018Fax: +86-755-33320008www.baclcorp.com.cn

| Attestation of Test Results | | |
|--|--|-------------|
| Frequency Band | Max. SAR Level(s) Reported(W/kg) | Limit(W/Kg) |
| WLAN 2.4G ANT2 | 0.12 W/kg 1g Head SAR 0.22 W/kg 1g Body SAR | 1.6 |
| WLAN 2.4G ANT1 | 0.15 W/kg 1g Head SAR 0.28 W/kg 1g Body SAR | |
| WLAN 5.2G ANT2 | 0.14 W/kg 1g Head SAR 0.02 W/kg 1g Body SAR | |
| WLAN 5.2G ANT1 | 0.19 W/kg 1g Head SAR 0.36 W/kg 1g Body SAR | |
| WLAN 5.8G ANT2 | 0.11 W/kg 1g Head SAR 0.02 W/kg 1g Body SAR | |
| WLAN 5.8G ANT1 | 0.08 W/kg 1g Head SAR 0.31 W/kg 1g Body SAR | |
| Simultaneous(tx) | 0.33 W/kg 1g Head SAR 0.50 W/kg 1g Body SAR | |
| Applicable Standards | FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices | |
| | RF Exposure Procedures: TCB Workshop April 2019 | |
| | IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques | |
| | KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 248227 D01 802.11 Wi-Fi SAR v02r02 | |
| <p>Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated.</p> | | |

TABLE OF CONTENTS

| | |
|--|------------|
| DOCUMENT REVISION HISTORY | 4 |
| EUT DESCRIPTION | 5 |
| TECHNICAL SPECIFICATION..... | 5 |
| REFERENCE, STANDARDS, AND GUIDELINES | 6 |
| SAR LIMITS | 6 |
| FACILITIES | 7 |
| DESCRIPTION OF TEST SYSTEM | 8 |
| EQUIPMENT LIST AND CALIBRATION | 15 |
| EQUIPMENT’S LIST & CALIBRATION INFORMATION | 15 |
| SAR MEASUREMENT SYSTEM VERIFICATION | 16 |
| LIQUID VERIFICATION..... | 16 |
| SYSTEM ACCURACY VERIFICATION | 17 |
| SAR SYSTEM VALIDATION DATA | 18 |
| EUT TEST STRATEGY AND METHODOLOGY | 21 |
| TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR | 21 |
| CHEEK/TOUCH POSITION | 22 |
| EAR/TILT POSITION..... | 22 |
| TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS | 23 |
| TEST DISTANCE FOR SAR EVALUATION | 23 |
| SAR EVALUATION PROCEDURE | 24 |
| CONDUCTED OUTPUT POWER MEASUREMENT | 25 |
| TEST PROCEDURE..... | 25 |
| MAXIMUM TARGET OUTPUT POWER..... | 26 |
| TEST RESULTS..... | 27 |
| STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 30 |
| ANTENNAS LOCATION: | 30 |
| STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 31 |
| STANDALONE SAR ESTIMATION: | 32 |
| SAR MEASUREMENT RESULTS | 33 |
| TEST RESULTS:..... | 33 |
| SAR MEASUREMENT VARIABILITY | 40 |
| SAR SIMULTANEOUS TRANSMISSION DESCRIPTION | 41 |
| SAR PLOTS | 42 |
| APPENDIX A MEASUREMENT UNCERTAINTY | 78 |
| APPENDIX B EUT TEST POSITION PHOTOS | 79 |
| LIQUID DEPTH ≥ 15CM..... | 79 |
| HEAD LEFT CHEEK SETUP PHOTO (0 MM) | 80 |
| HEAD LEFT TILT SETUP PHOTO (0 MM)..... | 80 |
| HEAD RIGHT CHEEK SETUP PHOTO (0 MM)..... | 81 |
| HEAD RIGHT TILT SETUP PHOTO (0 MM)..... | 81 |
| BODY FRONT SETUP PHOTO (5 MM) | 82 |
| BODY BACK SETUP PHOTO (5 MM) | 82 |
| APPENDIX C PROBE CALIBRATION CERTIFICATES | 83 |
| APPENDIX C CALIBRATION CERTIFICATES | 92 |
| APPENDIX E RETURN LOSS&IMPEDANCE MEASUREMENT | 106 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|---------------------|-------------------------|------------------|
| 0 | SZ1240307-11374E-SA | Original Report | 2024/05/29 |

EUT DESCRIPTION

This report has been prepared on behalf of **Fanvil Link Technology Co.,LTD** and their product **Portable Wi-Fi Phone** , Model: **W611W**, FCC ID: **2BCUQ-W611WV2** or the EUT (Equipment under Test) as referred to in the rest of this report.

**All measurement and test data in this report was gathered from production sample serial number:2IGQ-1(Assigned by BACL, Shenzhen).The EUT supplied by the applicant was received on 2024-03-12.*

Technical Specification

| | |
|-------------------------------|---|
| Product Type: | Portable |
| Exposure Category: | Population / Uncontrolled |
| Antenna Type(s): | Internal Antenna |
| Body-Worn Accessories: | None |
| Operation modes: | WLAN, Bluetooth |
| Frequency Band: | WLAN 2.4G: 2412-2462 MHz (TX/RX) WLAN 5.2G: 5150 -5250 MHz(TX/RX) WLAN 5.8G: 5725-5850 MHz(TX/RX) Bluetooth: 2402-2480MHz(TX/RX) |
| Dimensions (L*W*H): | 160*54*22mm |
| Rated Input Voltage: | DC3.8V from Rechargeable Battery |
| Normal Operation: | Head and Body Worn |

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit(1g Tissue)

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|--|--|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average (averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak (averaged over any 1 g of tissue) | 1.6 | 8.0 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.0 | 20.0 |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that maybe incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g SAR applied to the EUT.

FACILITIES


The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 715558, the FCC Designation No.: CN5045.

Each test item follows test standards and with no deviation.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

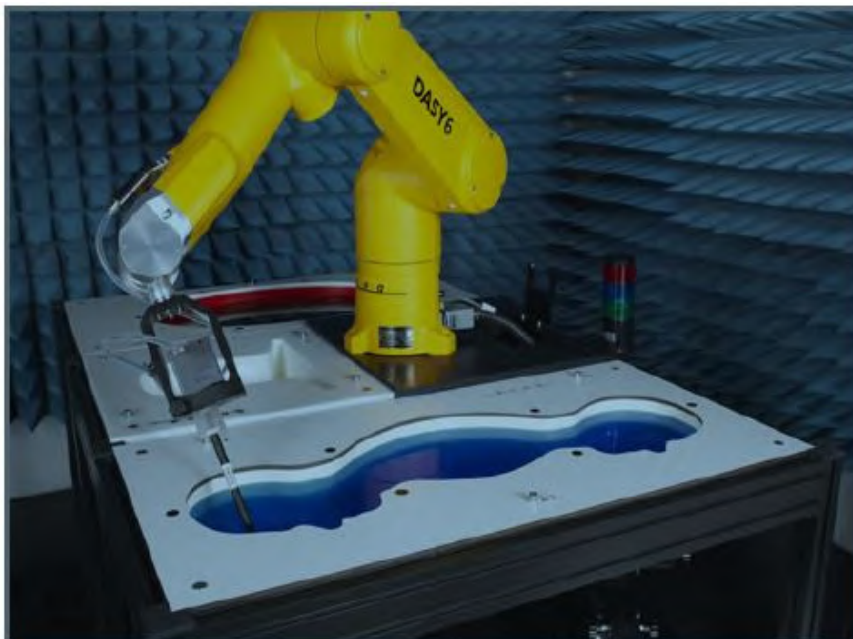

DASY6 System Description

The DASY6 system for performing compliance tests consists of the following items:

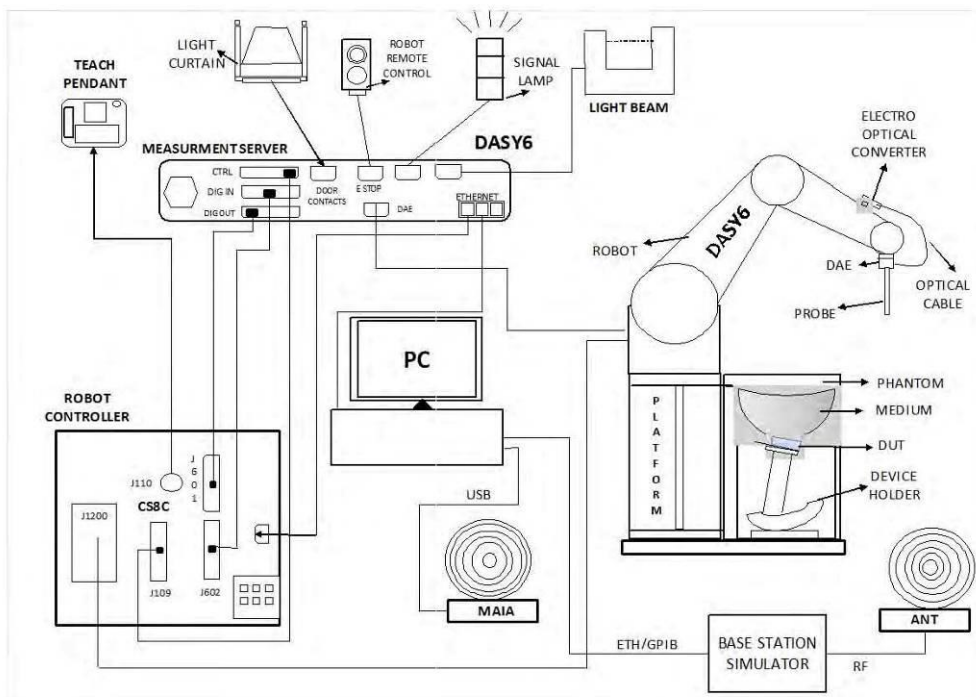

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

| | |
|----------------------|---|
| Frequency | 4 MHz to >10 GHz Linearity: ± 0.2 dB (30 MHz to 10 GHz) |
| Directivity | ± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis) |
| Dynamic Range | 10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g) |
| Dimensions | Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |
| Application | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |
| Compatibility | DASY3, DASY4, DASY52 SAR and higher, EASY6, EASY4/MRI |

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the


Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

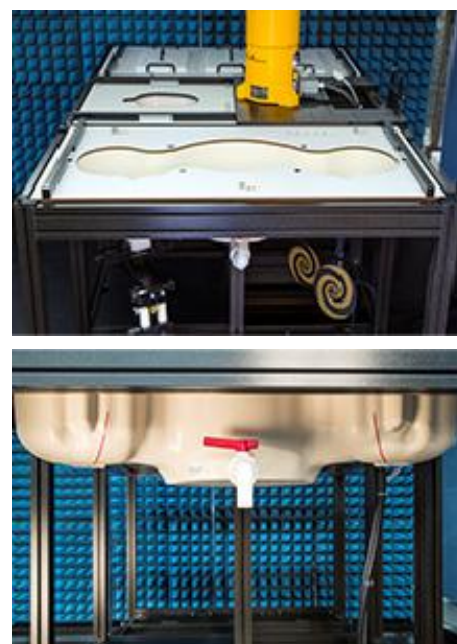

ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEEE1528 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.


Approximately 25 liters of liquid is required to fill the ELI phantom.

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

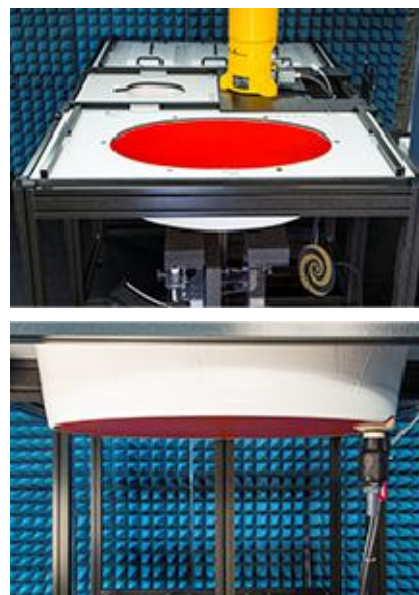

Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7382 Calibrated: 2023/09/27

| Calibration Frequency Point(MHz) | Frequency Range(MHz) | | Conversion Factor | | |
|----------------------------------|----------------------|------|-------------------|-------|-------|
| | From | To | X | Y | Z |
| 750 Head | 650 | 850 | 10.65 | 10.65 | 10.65 |
| 900 Head | 850 | 1000 | 10.19 | 10.19 | 10.19 |
| 1750 Head | 1650 | 1850 | 8.60 | 8.60 | 8.60 |
| 1900 Head | 1850 | 2000 | 8.30 | 8.30 | 8.30 |
| 2300 Head | 2200 | 2400 | 8.16 | 8.16 | 8.16 |
| 2450 Head | 2400 | 2550 | 7.89 | 7.89 | 7.89 |
| 2600 Head | 2550 | 2700 | 7.65 | 7.65 | 7.65 |
| 3300 Head | 3200 | 3400 | 7.39 | 7.39 | 7.39 |
| 3500 Head | 3400 | 3600 | 7.24 | 7.24 | 7.24 |
| 3700 Head | 3600 | 3800 | 7.10 | 7.10 | 7.10 |
| 3900 Head | 3800 | 4000 | 6.98 | 6.98 | 6.98 |
| 5250 Head | 5140 | 5360 | 5.62 | 5.62 | 5.62 |
| 5500 Head | 5390 | 5610 | 5.10 | 5.10 | 5.10 |
| 5750 Head | 5640 | 5860 | 5.08 | 5.08 | 5.08 |

SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm² step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | ≤ 3 GHz | > 3 GHz |
|--|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location | 30° ± 1° | 20° ± 1° |
| Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area} | ≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm | 3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm |
| | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. | |

Step 3: Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 5mm, with the side length of the 10g cube is 21.5mm.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| | | | |
|--|------------------------------------|--|---|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$ | | ≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm* | 3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface | uniform grid: $\Delta z_{Zoom}(n)$ | ≤ 5 mm | 3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm |
| | graded grid | $\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface | ≤ 4 mm |
| | | $\Delta z_{Zoom}(n>1)$: between subsequent points | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm |
| Minimum zoom scan volume | x, y, z | ≥ 30 mm | 3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm |
| <p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p> | | | |

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

| Frequency MHz | Relative permittivity ϵ_r | Conductivity (σ) S/m |
|------------------|---------------------------------------|----------------------------------|
| 300 | 45,3 | 0,87 |
| 450 | 43,5 | 0,87 |
| <i>750</i> | <i>41,9</i> | <i>0,89</i> |
| 835 | 41,5 | 0,90 |
| 900 | 41,5 | 0,97 |
| 1 450 | 40,5 | 1,20 |
| <i>1 500</i> | <i>40,4</i> | <i>1,23</i> |
| <i>1 640</i> | <i>40,2</i> | <i>1,31</i> |
| <i>1 750</i> | <i>40,1</i> | <i>1,37</i> |
| 1 800 | 40,0 | 1,40 |
| 1 900 | 40,0 | 1,40 |
| 2 000 | 40,0 | 1,40 |
| <i>2 100</i> | <i>39,8</i> | <i>1,49</i> |
| <i>2 300</i> | <i>39,5</i> | <i>1,67</i> |
| 2 450 | 39,2 | 1,80 |
| <i>2 600</i> | <i>39,0</i> | <i>1,96</i> |
| 3 000 | 38,5 | 2,40 |
| <i>3 500</i> | <i>37,9</i> | <i>2,91</i> |
| <i>4 000</i> | <i>37,4</i> | <i>3,43</i> |
| <i>4 500</i> | <i>36,8</i> | <i>3,94</i> |
| <i>5 000</i> | <i>36,2</i> | <i>4,45</i> |
| <i>5 200</i> | <i>36,0</i> | <i>4,66</i> |
| <i>5 400</i> | <i>35,8</i> | <i>4,86</i> |
| <i>5 600</i> | <i>35,5</i> | <i>5,07</i> |
| <i>5 800</i> | <i>35,3</i> | <i>5,27</i> |
| <i>6 000</i> | <i>35,1</i> | <i>5,48</i> |

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

EQUIPMENT LIST AND CALIBRATION


Equipment's List & Calibration Information

| Equipment | Model | S/N | Calibration Date | Calibration Due Date |
|-------------------------------------|-----------------|----------------|------------------|----------------------|
| DASY5 Test Software | DASY52 52.10.2 | N/A | NCR | NCR |
| DASY6 Measurement Server | DASY6 6.0.31 | N/A | NCR | NCR |
| Data Acquisition Electronics | DAE4 | 1325 | 2023/09/27 | 2024/09/26 |
| E-Field Probe | EX3DV4 | 7382 | 2023/09/27 | 2024/09/26 |
| Mounting Device | MD4HHTV5 | SD 000 H01 KA | NCR | NCR |
| SAM Twin Phantom | SAM-Twin V8.0 | 1962 | NCR | NCR |
| Dipole, 2450MHz | D2450V2 | 1103 | 2023/03/27 | 2026/03/26 |
| Dipole,5GHz | D5GHzV2 | 1374 | 2023/03/27 | 2026/03/26 |
| Simulated Tissue Liquid Head | HBBL600-10000V6 | 2200808-2 | Each Time | / |
| Network Analyzer | E5071C | SER MY46519680 | 2023/06/08 | 2024/06/07 |
| Dielectric Assessment Kit | DAK-3.5 | 1248 | NCR | NCR |
| MXG Analog Signal Generator | N5181A | MY48180408 | 2024/01/16 | 2025/01/15 |
| USB wideband power sensor | U2021XA | MY52350001 | 2023/06/08 | 2024/06/07 |
| Directional Coupler | 855673 | 3307 | NCR | NCR |
| 20dB Attenuator | 2 | BH9879 | NCR | NCR |
| RF Power Amplifier | 5205FE | 1014 | NCR | NCR |
| Amplifier | ZVE-8G+ | 558401902 | NCR | NCR |
| Wideband Radio Communication Tester | CMW500 | 146520 | 2023/06/08 | 2024/06/07 |
| Microwave peak power sensor | MA24418A | 12622 | 2023/08/08 | 2024/08/07 |
| Signal and Spectrum Analyzer | FSV40 | 101473 | 2024/01/16 | 2025/01/15 |
| Temperature & Humidity Meter | 10316377 | N/A | 2024/01/17 | 2025/01/16 |
| Thermometer | DTM3000 | N/A | 2024/01/16 | 2025/01/15 |

NCR: No Calibration Required.

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

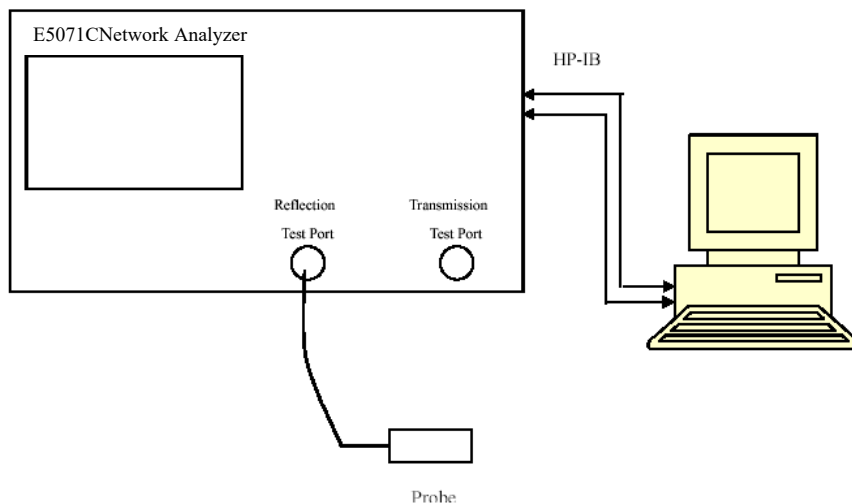

Liquid Verification Setup Block Diagram

Liquid Verification Results

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 2412 | Simulated Tissue Liquid Head | 38.519 | 1.731 | 39.28 | 1.77 | -1.94 | -2.20 | ± 5 |
| 2437 | Simulated Tissue Liquid Head | 38.448 | 1.763 | 39.23 | 1.79 | -1.99 | -1.51 | ± 5 |
| 2450 | Simulated Tissue Liquid Head | 38.410 | 1.780 | 39.20 | 1.80 | -2.02 | -1.11 | ± 5 |

*Liquid Verification above was performed on 2024/04/15.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 5180 | Simulated Tissue Liquid Head | 35.014 | 4.594 | 36.02 | 4.64 | -2.79 | -0.99 | ± 5 |
| 5250 | Simulated Tissue Liquid Head | 34.968 | 4.655 | 35.95 | 4.71 | -2.73 | -1.17 | ± 5 |

*Liquid Verification above was performed on 2024/04/16.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 5785 | Simulated Tissue Liquid Head | 35.359 | 5.212 | 35.32 | 5.26 | 0.11 | -0.91 | ± 5 |
| 5800 | Simulated Tissue Liquid Head | 35.350 | 5.220 | 35.30 | 5.27 | 0.14 | -0.95 | ± 5 |

*Liquid Verification above was performed on 2024/04/17.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1 \text{ 000 MHz}$;
- b) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1 \text{ 000 MHz} < f \leq 3 \text{ 000 MHz}$;
- c) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3 \text{ 000 MHz} < f \leq 6 \text{ 000 MHz}$.

System Verification Setup Block Diagram

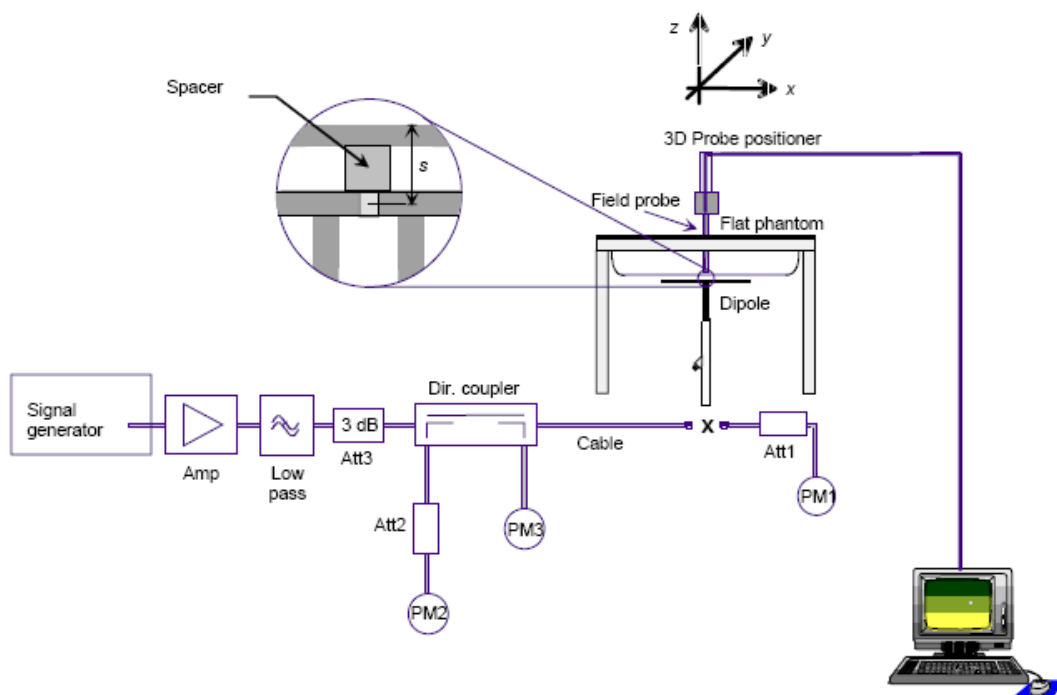

System Accuracy Check Results

| Date | Frequency Band (MHz) | Liquid Type | Input Power (mW) | Measured SAR (W/kg) | Normalized to 1W (W/kg) | Target Value (W/Kg) | Delta (%) | Tolerance (%) |
|------------|----------------------|-------------|------------------|---------------------|-------------------------|---------------------|-----------|---------------|
| 2024/04/15 | 2450 | Head | 100 | 1g 5.63 | 56.3 | 51.7 | 8.897 | ± 10 |
| 2024/04/16 | 5250 | Head | 100 | 1g 8.17 | 81.7 | 80.1 | 1.998 | ± 10 |
| 2024/04/17 | 5800 | Head | 100 | 1g 8.03 | 80.3 | 81.4 | -1.351 | ± 10 |

Note:
All the SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 2450 MHz Head (Date 2024/04/15)

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 1103

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.78 \text{ S/m}$; $\epsilon_r = 38.41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2450 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Configuration/Head 2450MHz Pin=100mW/Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.58 W/kg

Configuration/Head 2450MHz Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=5mm

Reference Value = 62.00 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.63 W/kg; SAR(10 g) = 2.69 W/kg

Maximum value of SAR (measured) = 9.18 W/kg

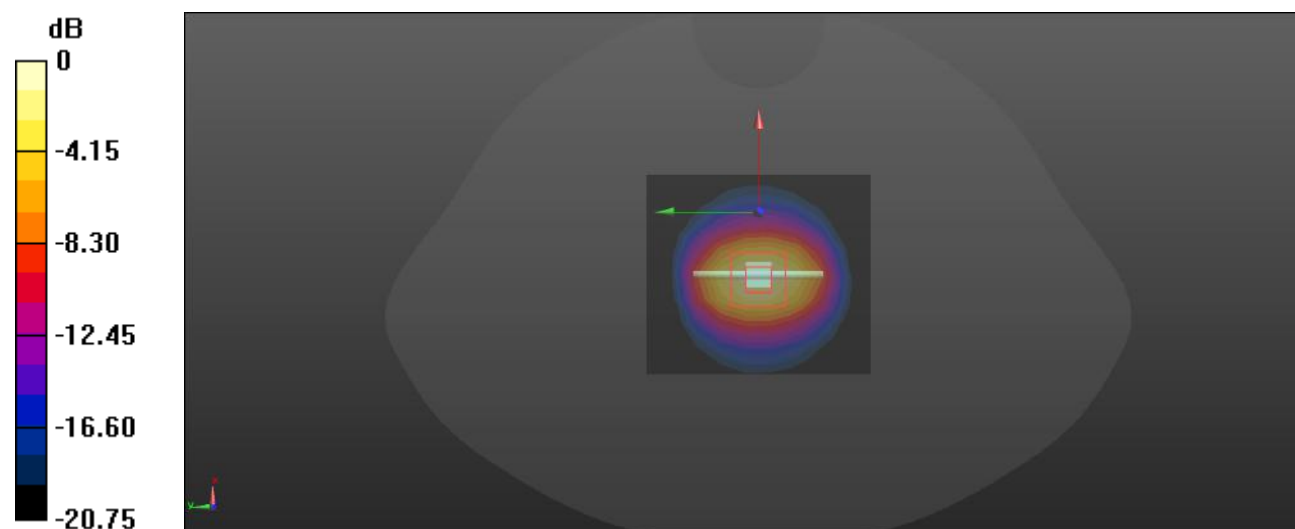

0 dB = 9.18 W/kg = 9.63 dBW/kg

System Performance 5250 MHz Head (Date 2024/04/16)

DUT: Dipole D5GHz; Type: D5GHzV2; Serial: 1374

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.655 \text{ S/m}$; $\epsilon_r = 34.968$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5250 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Configuration/Head 5250MHz Pin=100mW/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 19.5 W/kg


Configuration/Head 5250MHz Pin=100mW/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 46.81 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 17.8 W/kg

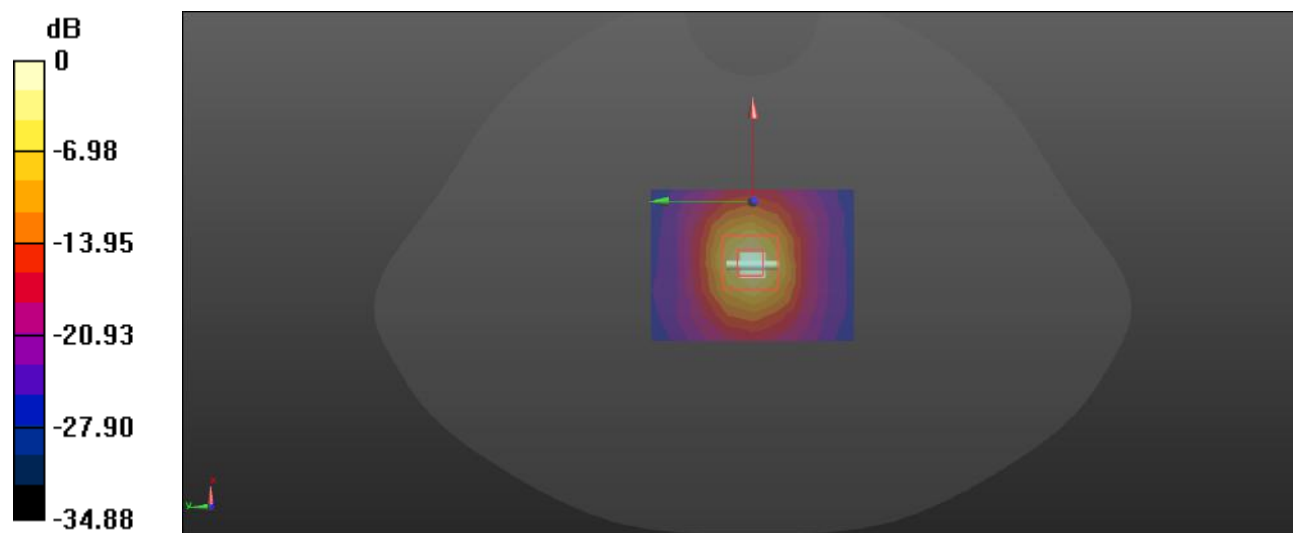

0 dB = 17.8 W/kg = 12.50 dBW/kg

System Performance 5800 MHz Head (Date 2024/04/17)

DUT: Dipole D5GHz; Type: D5GHzV2; Serial: 1374


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 35.35$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5800 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Configuration/Head 5800MHz Pin=100mW/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 19.4 W/kg

Configuration/Head 5800MHz Pin=100mW/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 42.49 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 30.3 W/kg
SAR(1 g) = 8.03 W/kg; SAR(10 g) = 2.36 W/kg
Maximum value of SAR (measured) = 19.3 W/kg

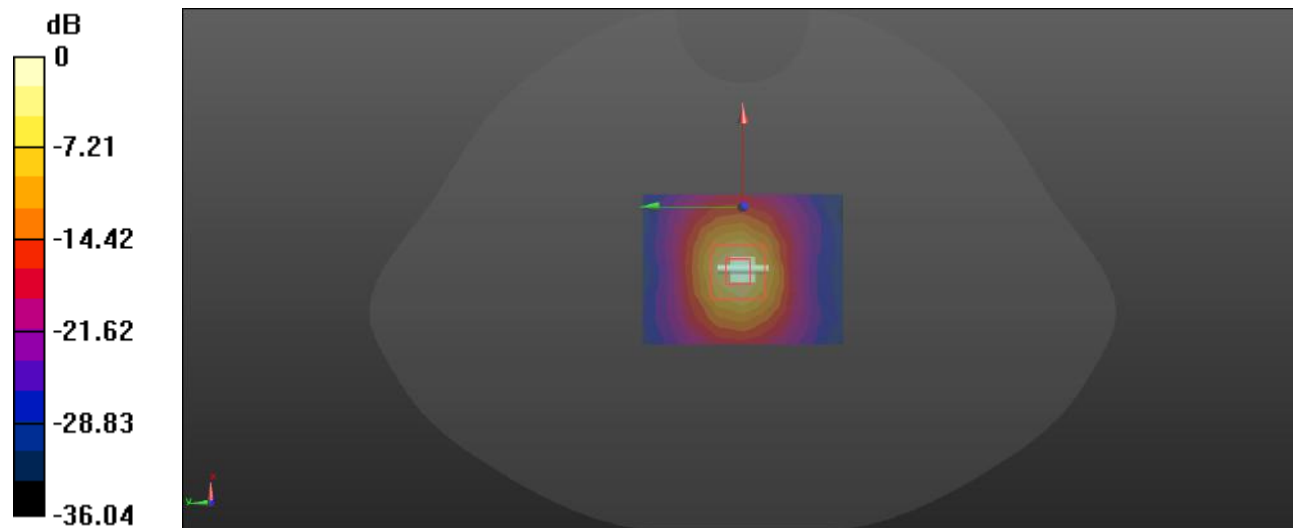



0 dB = 19.3 W/kg = 12.86 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

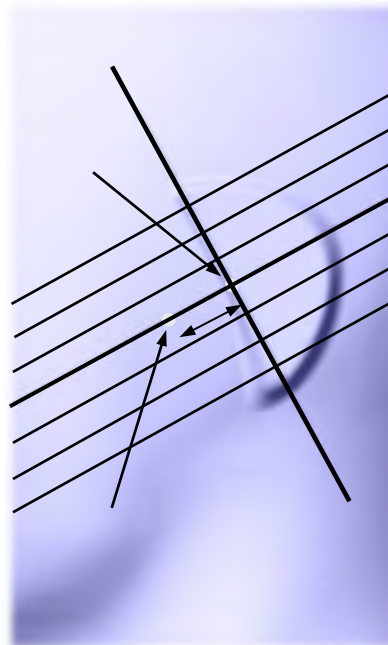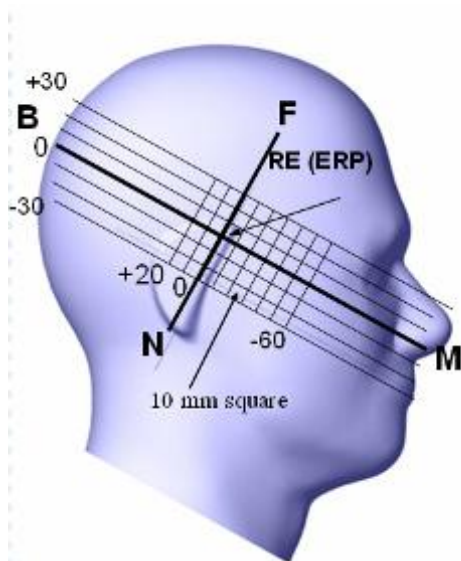

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

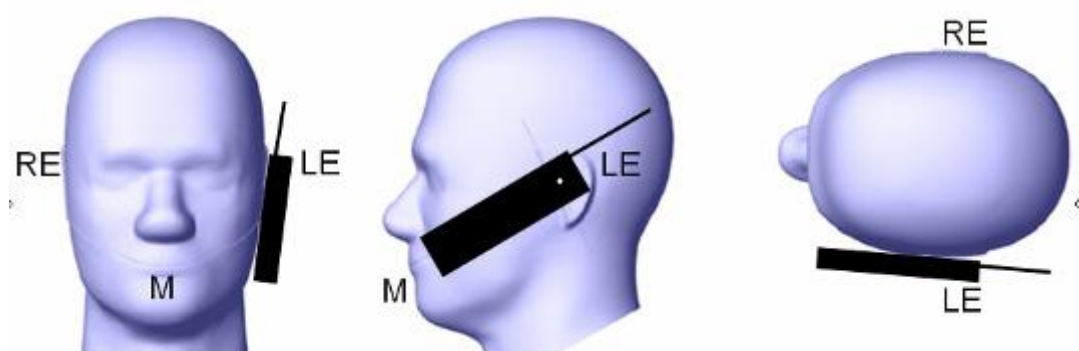

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

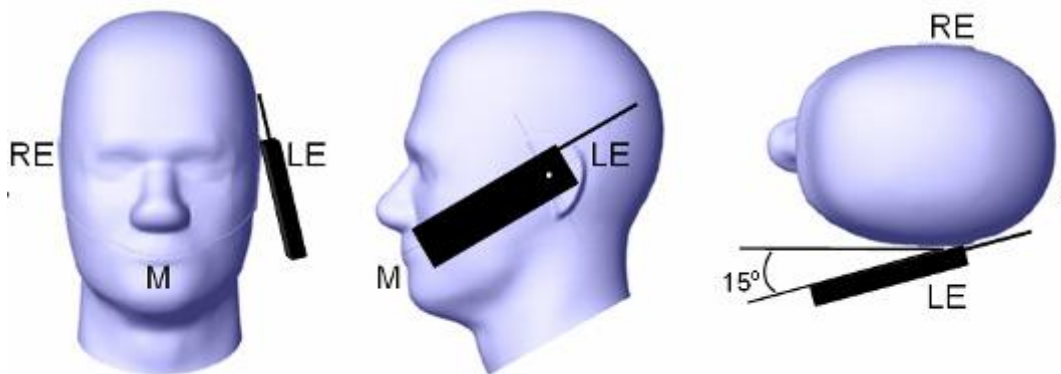

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

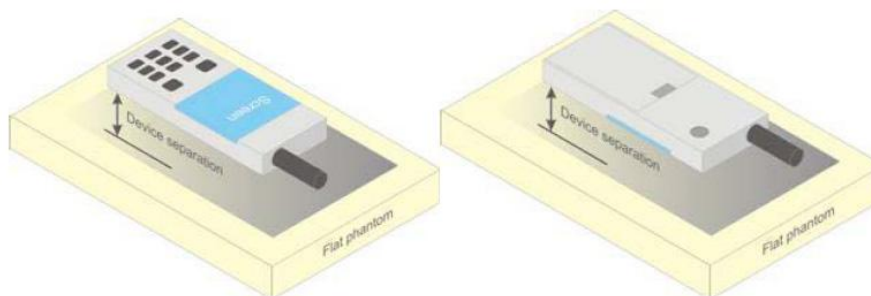


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the EUT (Equipment Under Test) is set 5mm away from the phantom, the test distance is 5mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum Measured value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were Measured to calculate the averages.



All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

CONDUCTED OUTPUT POWER MEASUREMENT

Test Procedure

The RF output of the transmitter was connected to the input port of the Spectrum Analyzer through Connector.

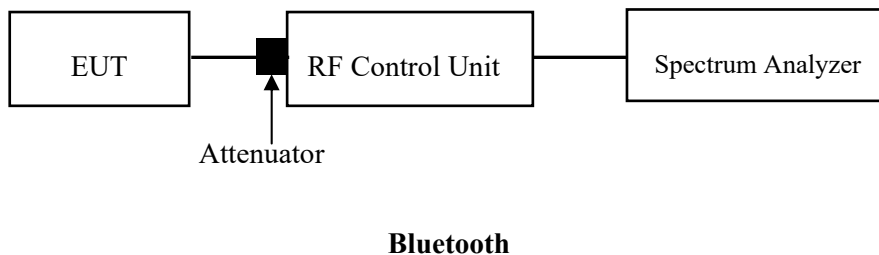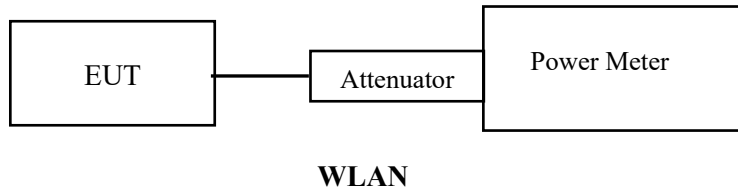

Maximum Target Output Power

| Mode/Band | Max Target Power(dBm) | | |
|----------------------------|-----------------------|--------|------|
| | Channel | | |
| | Low | Middle | High |
| WLAN 2.4G ANT1(802.11b) | 11.0 | 11.0 | 10.5 |
| WLAN 2.4G ANT2(802.11b) | 10.0 | 10.0 | 9.5 |
| WLAN 2.4G ANT1(802.11g) | 7.0 | 6.5 | 6.0 |
| WLAN 2.4G ANT2(802.11g) | 5.0 | 5.5 | 5.5 |
| WLAN 2.4G ANT1(802.11n20) | 7.0 | 6.5 | 6.5 |
| WLAN 2.4G ANT2(802.11n20) | 6.0 | 5.8 | 5.8 |
| WLAN 2.4G ANT1(802.11ax20) | 7.0 | 6.5 | 6.5 |
| WLAN 2.4G ANT2(802.11ax20) | 5.5 | 6.0 | 6.0 |
| WLAN 5.2G ANT1(802.11a) | 12.8 | 12.5 | 12.0 |
| WLAN 5.2G ANT2(802.11a) | 12.0 | 11.8 | 11.8 |
| WLAN 5.2G ANT1(802.11ac20) | 12.0 | 11.8 | 11.5 |
| WLAN 5.2G ANT2(802.11ac20) | 12.3 | 12.0 | 11.5 |
| WLAN 5.2G ANT1(802.11ac40) | 11.5 | / | 11.2 |
| WLAN 5.2G ANT2(802.11ac40) | 11.8 | / | 11.5 |
| WLAN 5.2G ANT1(802.11ac80) | / | 11.0 | / |
| WLAN 5.2G ANT2(802.11ac80) | / | 11.5 | / |
| WLAN 5.2G ANT1(802.11ax20) | 12.3 | 11.5 | 11.8 |
| WLAN 5.2G ANT2(802.11ax20) | 12.4 | 12.4 | 11.5 |
| WLAN 5.2G ANT1(802.11ax40) | 11.5 | / | 11.5 |
| WLAN 5.2G ANT2(802.11ax40) | 11.8 | / | 11.5 |
| WLAN 5.2G ANT1(802.11ax80) | / | 11.5 | / |
| WLAN 5.2G ANT2(802.11ax80) | / | 11.5 | / |
| WLAN 5.8G ANT1(802.11a) | 10.0 | 10.5 | 10.2 |
| WLAN 5.8G ANT2(802.11a) | 10.5 | 10.8 | 10.5 |
| WLAN 5.8G ANT1(802.11ac20) | 11.0 | 11.0 | 11.0 |
| WLAN 5.8G ANT2(802.11ac20) | 8.5 | 9.0 | 8.5 |
| WLAN 5.8G ANT1(802.11ac40) | 10.0 | / | 10.5 |
| WLAN 5.8G ANT2(802.11ac40) | 8.5 | / | 9.0 |
| WLAN 5.8G ANT1(802.11ac80) | / | 10.5 | / |
| WLAN 5.8G ANT2(802.11ac80) | / | 9.0 | / |
| WLAN 5.8G ANT1(802.11ax20) | 11.0 | 11.4 | 10.8 |
| WLAN 5.8G ANT2(802.11ax20) | 8.5 | 9.0 | 8.5 |
| WLAN 5.8G ANT1(802.11ax40) | 10.5 | / | 10.5 |
| WLAN 5.8G ANT2(802.11ax40) | 8.5 | / | 8.5 |
| WLAN 5.8G ANT1(802.11ax80) | / | 10.5 | / |
| WLAN 5.8G ANT2(802.11ax80) | / | 8.5 | / |
| Bluetooth | -3.5 | -3.0 | -1.0 |
| BLE | 9.7 | 9.5 | 9.5 |

Test Results

WLAN 2.4G:

| Mode | Channel Frequency (MHz) | Data Rate | RF Average Output Power (dBm) | | |
|-------------|-------------------------|-----------|-------------------------------|------|-------|
| | | | ANT1 | ANT2 | Total |
| 802.11b | 2412 | 6Mbps | 10.95 | 9.65 | / |
| | 2437 | | 10.49 | 9.76 | / |
| | 2462 | | 10.42 | 9.15 | / |
| 802.11g | 2412 | MCS8 | 6.57 | 4.89 | 8.82 |
| | 2437 | | 6.31 | 5.36 | 8.87 |
| | 2462 | | 5.70 | 5.33 | 8.53 |
| 802.11 n20 | 2412 | MCS8 | 6.72 | 5.60 | 9.21 |
| | 2437 | | 6.12 | 5.48 | 8.82 |
| | 2462 | | 6.01 | 5.49 | 8.77 |
| 802.11 ax20 | 2412 | MCS8 | 6.95 | 5.33 | 9.23 |
| | 2437 | | 6.39 | 5.67 | 9.06 |
| | 2462 | | 6.21 | 5.79 | 9.02 |

Duty Cycle:

| Mode | Channel Frequency (MHz) | Duty Cycle | |
|-------------|-------------------------|------------|-------|
| | | ANT1 | ANT2 |
| 802.11b | 2412 | 98.94 | 98.94 |
| | 2437 | 98.94 | 98.94 |
| | 2462 | 98.94 | 98.94 |
| 802.11g | 2412 | 99.04 | 99.52 |
| | 2437 | 99.04 | 99.04 |
| | 2462 | 99.04 | 99.04 |
| 802.11 n20 | 2412 | 98.97 | 98.96 |
| | 2437 | 98.97 | 98.96 |
| | 2462 | 98.97 | 98.96 |
| 802.11 ax20 | 2412 | 91.07 | 91.07 |
| | 2437 | 91.07 | 91.15 |
| | 2462 | 91.96 | 91.07 |

Note: Duty cycle was from Radio report

WLAN 5.2G:

| Mode | Channel Frequency (MHz) | Data Rate | Duty Cycle [%] | RF Average Output Power (dBm) | | |
|-------------|-------------------------|-----------|----------------|-------------------------------|-------|-------|
| | | | | ANT1 | ANT2 | Total |
| 802.11a | 5180 | 6Mbps | 93.29 | 12.40 | 11.80 | 15.12 |
| | 5200 | | | 12.22 | 11.54 | 14.90 |
| | 5240 | | | 11.68 | 11.51 | 14.61 |
| 802.11 ac20 | 5180 | MCS8 | 92.91 | 11.72 | 12.10 | 14.92 |
| | 5200 | | | 11.51 | 11.75 | 14.64 |
| | 5240 | | | 11.37 | 11.37 | 14.38 |
| 802.11 ac40 | 5190 | MCS8 | 86.67 | 11.31 | 11.51 | 14.42 |
| | 5230 | | | 10.99 | 11.09 | 14.05 |
| 802.11 ac80 | 5210 | MCS8 | 76.19 | 10.93 | 11.10 | 14.03 |
| 802.11 ax20 | 5180 | MCS8 | 91.07 | 12.04 | 12.25 | 15.16 |
| | 5200 | | | 11.69 | 12.04 | 14.88 |
| | 5240 | | | 11.63 | 11.41 | 14.53 |
| 802.11 ax40 | 5190 | MCS8 | 84.38 | 11.39 | 11.58 | 14.50 |
| | 5230 | | | 11.28 | 11.17 | 14.24 |
| 802.11 ax80 | 5210 | MCS8 | 74.36 | 11.19 | 11.13 | 14.17 |

Note: Duty cycle was from Radio report

WLAN 5.8G:

| Mode | Channel Frequency (MHz) | Data Rate | Duty Cycle [%] | RF Average Output Power (dBm) | | |
|-------------|-------------------------|-----------|----------------|-------------------------------|-------|-------|
| | | | | ANT1 | ANT2 | Total |
| 802.11a | 5745 | 6Mbps | 93.29 | 9.73 | 10.42 | 13.10 |
| | 5785 | | | 10.15 | 10.75 | 13.47 |
| | 5825 | | | 9.96 | 10.21 | 13.10 |
| 802.11 ac20 | 5745 | MCS8 | 92.91 | 10.53 | 8.38 | 12.60 |
| | 5785 | | | 10.91 | 8.69 | 12.95 |
| | 5825 | | | 10.62 | 8.17 | 12.58 |
| 802.11 ac40 | 5755 | MCS8 | 86.67 | 9.94 | 8.42 | 12.26 |
| | 5795 | | | 10.45 | 8.68 | 12.66 |
| 802.11 ac80 | 5775 | MCS8 | 76.19 | 10.18 | 8.62 | 12.48 |
| 802.11 ax20 | 5745 | MCS8 | 91.07 | 10.62 | 8.28 | 12.62 |
| | 5785 | | | 11.30 | 8.69 | 13.20 |
| | 5825 | | | 10.61 | 8.05 | 12.53 |
| 802.11 ax40 | 5755 | MCS8 | 84.38 | 10.05 | 8.08 | 12.19 |
| | 5795 | | | 10.48 | 8.24 | 12.51 |
| 802.11 ax80 | 5775 | MCS8 | 74.36 | 10.31 | 8.40 | 12.47 |

Note: Duty cycle was from Radio report


Bluetooth:

| Mode | Channel frequency (MHz) | Duty cycle (%) | RF Output Power (dBm) | |
|--------|-------------------------|----------------|-----------------------|------|
| DH1 | 2402 | / | -3.64 | |
| | 2441 | | -3.08 | |
| | 2480 | | -2.09 | |
| 2DH1 | 2402 | | -4.08 | |
| | 2441 | | -3.71 | |
| | 2480 | | -2.07 | |
| 3DH1 | 2402 | | -3.57 | |
| | 2441 | | -3.09 | |
| | 2480 | | -1.37 | |
| BLE 1M | 2402 | | 59.68 | 9.44 |
| | 2440 | | | 9.16 |
| | 2480 | | | 9.17 |
| BLE 2M | 2402 | 30.16 | 9.63 | |
| | 2440 | | 9.39 | |
| | 2480 | | 9.08 | |

Note: Duty cycle was from Radio report

STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

Antennas Location:

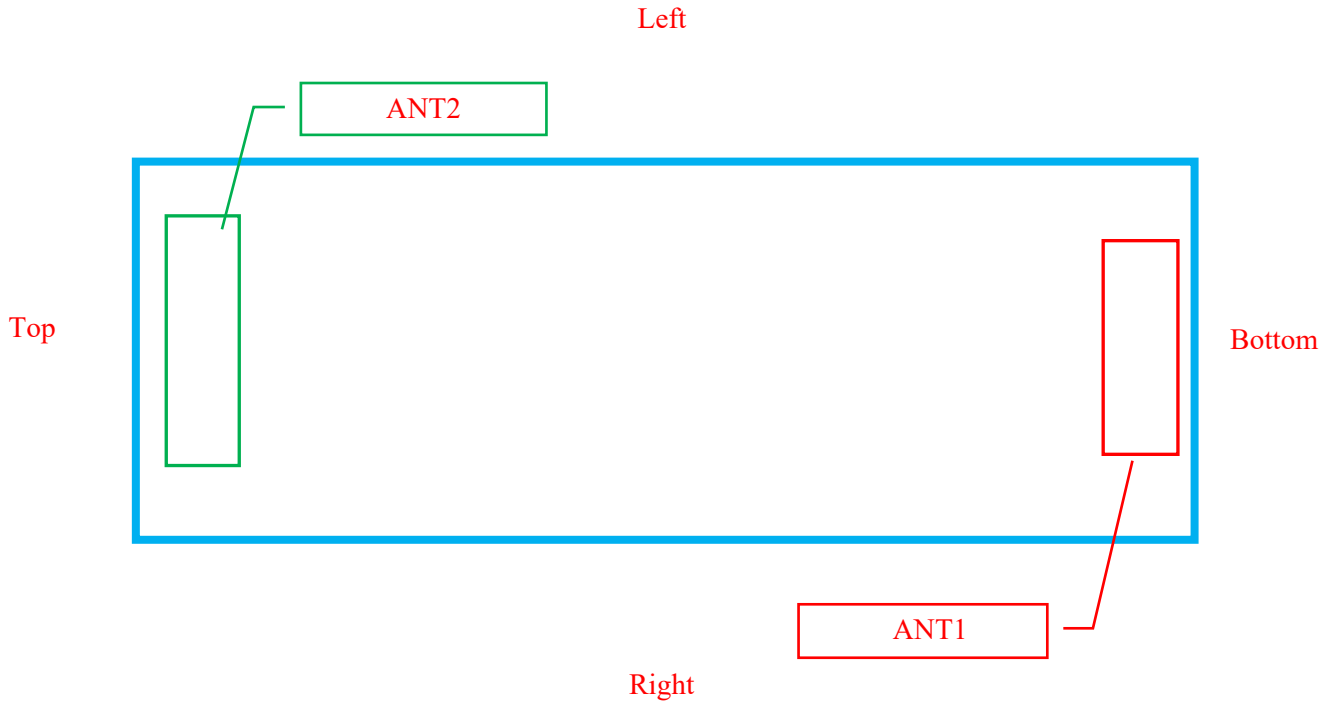

EUT Back View

| Antenna | Description |
|---------|------------------------|
| Ant 1 | WIFI 2.4/5G, Bluetooth |
| Ant 2 | WIFI 2.4/5G |

Note: The above statistics only include antennas with transmitting

Standalone SAR test exclusion considerations

| Mode | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Distance (mm) | Calculated value | Threshold (1-g) | SAR Test Exclusion |
|----------------|-----------------|--------------------|-------------------|---------------|------------------|-----------------|--------------------|
| WLAN 2.4G ANT1 | 2462 | 11.0 | 12.59 | 0 | 4.0 | 3.0 | No |
| WLAN 2.4G ANT2 | 2462 | 10.0 | 10.00 | 0 | 3.1 | 3.0 | No |
| WLAN 5.2G ANT1 | 5240 | 12.8 | 19.05 | 0 | 8.7 | 3.0 | No |
| WLAN 5.2G ANT2 | 5240 | 12.4 | 17.38 | 0 | 8.0 | 3.0 | No |
| WLAN 5.8G ANT1 | 5825 | 11.4 | 13.80 | 0 | 6.7 | 3.0 | No |
| WLAN 5.8G ANT2 | 5825 | 10.8 | 12.02 | 0 | 5.8 | 3.0 | No |
| Bluetooth | 2480 | 9.7 | 9.33 | 0 | 2.9 | 3.0 | YES |

Note: The Wi-Fi based average power for calculation, The Bluetooth based peak power for calculation.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

According to KDB 447498 D01 General RF Exposure Guidance v06, clause 4.3. General SAR test exclusion guidance:

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz.

Standalone SAR estimation:

| Mode | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Distance (mm) | Estimated 1-g (W/kg) |
|---------|-----------------|--------------------|-------------------|---------------|----------------------|
| BT Head | 2480 | 9.7 | 9.33 | 0 | 0.39 |
| BT Body | 2480 | 9.7 | 9.33 | 5 | 0.39 |

Note: The Bluetooth based peak power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance , mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

Test Results:

Environmental Conditions:

| | | | |
|---------------------------|-------------|-------------|-------------|
| Temperature: | 21.6~22.3°C | 22.2~23.7°C | 23.1~23.8°C |
| Relative Humidity: | 49 ~ 58% | 43 ~ 52% | 44 ~ 58% |
| ATM Pressure: | 101.3 kPa | 101.3 kPa | 101.3 kPa |
| Test Date: | 2024/04/15 | 2024/04/16 | 2024/04/17 |

* Testing was performed by Bob Lu, Calvin Li and Sid Luo.

WLAN 2.4G ANT2:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.097 | 0.10 | 1# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Left Tilt | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.079 | 0.08 | 2# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Right Cheek | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.114 | 0.12 | 3# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Right Tilt | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.092 | 0.10 | 4# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Body Front (5mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.204 | 0.22 | 5# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Body Back (5mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.76 | 10.0 | 1.057 | 1.011 | 0.055 | 0.06 | 6# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |

The data above was performed on 2024/04/15.

Note:

1. When the 1-g SAR is $\leq 0.8W/kg$, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WLAN 2.4G ANT1:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Check | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.148 | 0.15 | 7# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Left Tilt | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.041 | 0.04 | 8# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Right Check | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.051 | 0.05 | 9# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Head Right Tilt | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.046 | 0.05 | 10# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Body Front (5mm) | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.275 | 0.28 | 11# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Body Back (5mm) | 2412 | 802.11b | 10.95 | 11.0 | 1.012 | 1.011 | 0.277 | 0.28 | 12# |
| | 2437 | 802.11b | / | / | / | / | / | / | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |

The data above was performed on 2024/04/15.

Note:

1. When the 1-g SAR is $\leq 0.8W/kg$, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WLAN 5.2G ANT2:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-------------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.056 | 0.06 | 13# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Left Tilt | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.037 | 0.04 | 14# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Right Cheek | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.126 | 0.14 | 15# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Right Tilt | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.021 | 0.02 | 16# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |
| Body Front (5mm) | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.017 | 0.02 | 17# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |
| Body Back (5mm) | 5180 | 802.11 ax20 | 12.25 | 12.4 | 1.035 | 1.098 | 0.014 | 0.02 | 18# |
| | 5200 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5240 | 802.11 ax20 | / | / | / | / | / | / | / |

The data above was performed on 2024/04/16.

Note:

1. When the 1-g SAR is ≤ 0.8W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ax20 mode power is the largest among 802.11a/ac20/ac40/ac80/ax40/ax80, 802.11ax20 mode as initial test configuration is selected to test.

WLAN 5.2G ANT1:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.165 | 0.19 | 19# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Head Left Tilt | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.022 | 0.03 | 20# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Head Right Cheek | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.050 | 0.06 | 21# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Head Right Tilt | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.037 | 0.04 | 22# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Body Front (5mm) | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.240 | 0.28 | 23# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Body Back (5mm) | 5180 | 802.11a | 12.40 | 12.8 | 1.096 | 1.072 | 0.304 | 0.36 | 24# |
| | 5200 | 802.11a | / | / | / | / | / | / | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |

The data above was performed on 2024/04/16.

Note:

1. When the 1-g SAR is ≤ 0.8W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11ac20/ac40/ac80/ax20/ax40/ax80, 802.11a mode as initial test configuration is selected to test.

WLAN 5.8G ANT2:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.072 | 0.08 | 25# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |
| Head Left Tilt | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.082 | 0.09 | 26# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |
| Head Right Cheek | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.101 | 0.11 | 27# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |
| Head Right Tilt | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.091 | 0.10 | 28# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |
| Body Front (5mm) | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.022 | 0.02 | 29# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |
| Body Back (5mm) | 5745 | 802.11a | / | / | / | / | / | / | / |
| | 5785 | 802.11a | 10.75 | 10.8 | 1.012 | 1.072 | 0.016 | 0.02 | 30# |
| | 5825 | 802.11a | / | / | / | / | / | / | / |

The data above was performed on 2024/04/17.

Note:

1. When the 1-g SAR is ≤ 0.8W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11ac20/ac40/ac80/ax20/ax40/ax80, 802.11a mode as initial test configuration is selected to test.

WLAN 5.8G ANT1:

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|------------------|-----------------|-------------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Head Left Cheek | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.071 | 0.08 | 31# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Left Tilt | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.005 | 0.01 | 32# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Right Cheek | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.060 | 0.07 | 33# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |
| Head Right Tilt | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.009 | 0.01 | 34# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |
| Body Front (5mm) | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.081 | 0.09 | 35# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |
| Body Back (5mm) | 5745 | 802.11 ax20 | / | / | / | / | / | / | / |
| | 5785 | 802.11 ax20 | 11.30 | 11.4 | 1.023 | 1.098 | 0.274 | 0.31 | 36# |
| | 5825 | 802.11 ax20 | / | / | / | / | / | / | / |

The data above was performed on 2024/04/17.

Note:

1. When the 1-g SAR is $\leq 0.8W/kg$, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11ax20 mode power is the largest among 802.11a/ac20/ac40/ac80/ax40/ax80, 802.11ax20 mode as initial test configuration is selected to test.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results:

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The Highest Measured SAR Configuration in Each Frequency Band

Head

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) | | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
| | | | | Original | Repeated | |
| / | / | / | / | / | / | / |

Body

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) | | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
| | | | | Original | Repeated | |
| / | / | / | / | / | / | / |

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

| Description of Simultaneous Transmit Capabilities | | |
|---|---------------|----------|
| Transmitter Combination | Simultaneous? | Hotspot? |
| WLAN 2.4G ANT1+ WLAN 2.4G ANT2 | √ | × |
| WLAN 5G ANT1 + WLAN 5G ANT2 | √ | × |
| WLAN 2.4G ANT1 + WLAN 5G ANT1 | × | × |
| WLAN 2.4G ANT2 + WLAN 5G ANT2 | × | × |
| Bluetooth + WLAN ANT1 | × | × |
| Bluetooth + WLAN 2.4G ANT2 | × | × |
| Bluetooth + WLAN 5G ANT2 | × | × |

Simultaneous SAR test exclusion considerations:

| Mode(SAR1+SAR2) | Position | Reported SAR(W/kg) | | ΣSAR < 1.6W/kg |
|------------------------------|----------|--------------------|------|----------------|
| | | SAR1 | SAR2 | |
| WLAN2.4G ANT1+ WLAN2.4G ANT2 | Head | 0.15 | 0.12 | 0.27 |
| | Body | 0.28 | 0.22 | 0.50 |
| WLAN5G ANT1+ WLAN5G ANT2 | Head | 0.19 | 0.14 | 0.33 |
| | Body | 0.36 | 0.02 | 0.38 |

Conclusion:

Sum of SAR: $\Sigma\text{SAR} \leq 1.6 \text{ W/kg}$ therefore simultaneous transmission SAR with Volume Scans is **not required**.

SAR Plots

Plot: 1#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 38.448$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.147 W/kg


Head Left Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.565 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

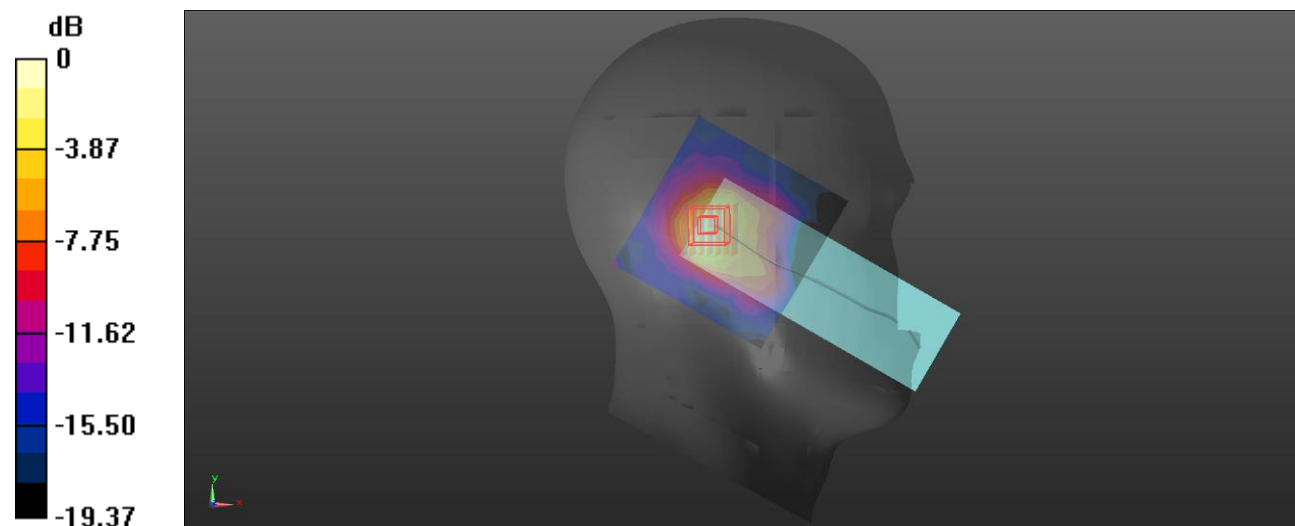

0 dB = 0.154 W/kg = -8.12 dBW/kg

Plot: 2#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.448$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.116 W/kg


Head Left Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.664 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

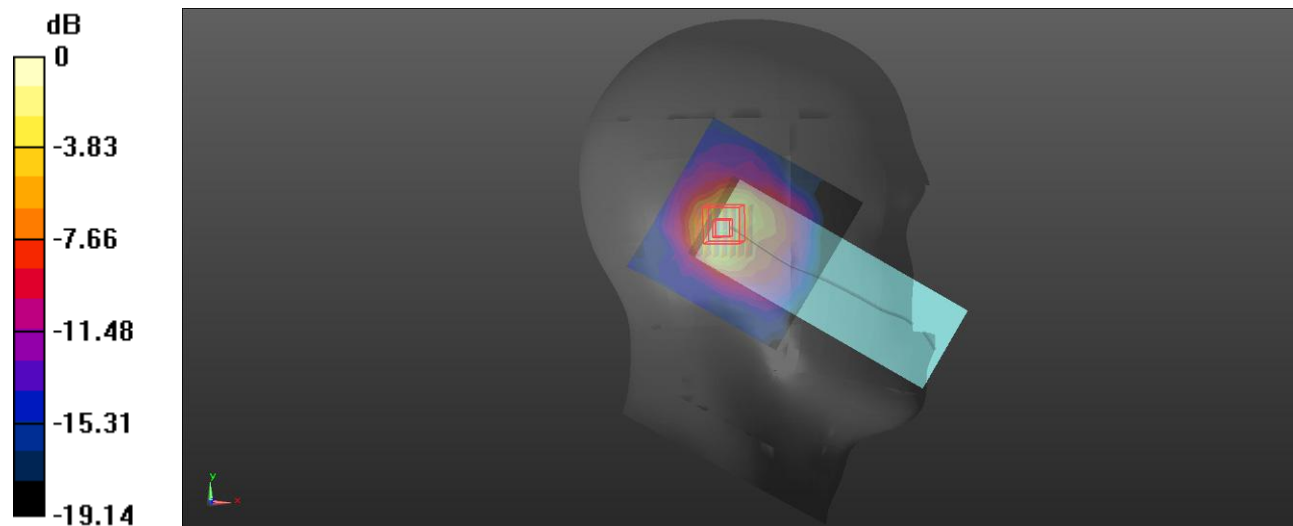

0 dB = 0.122 W/kg = -9.14 dBW/kg

Plot: 3#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1.011

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.763$ S/m; $\epsilon_r = 38.448$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.170 W/kg



Head Right Cheek/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.127 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.198 W/kg

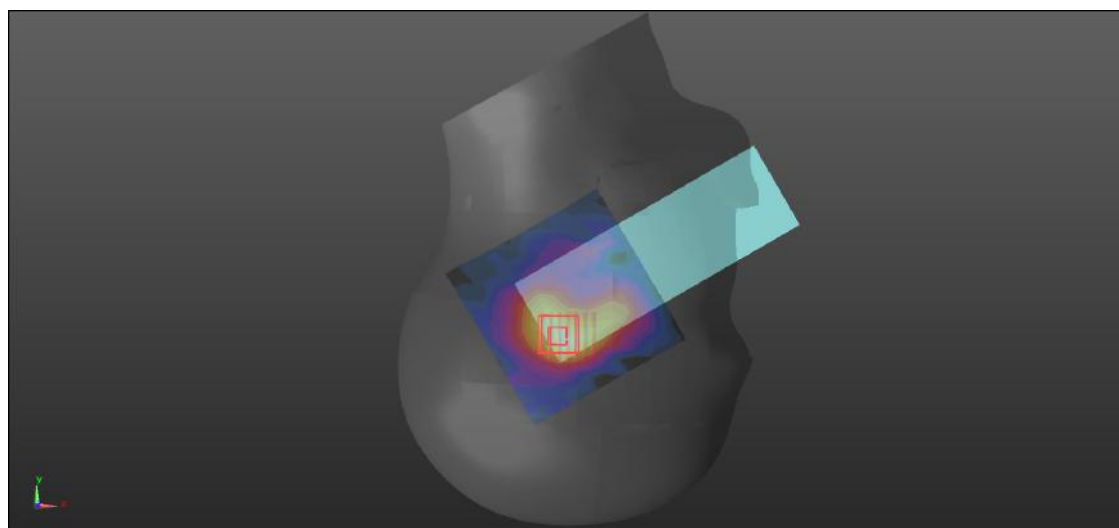

0 dB = 0.198 W/kg = -7.03 dBW/kg

Plot: 4#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.448$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.123 W/kg


Head Right Tilt/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.666 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

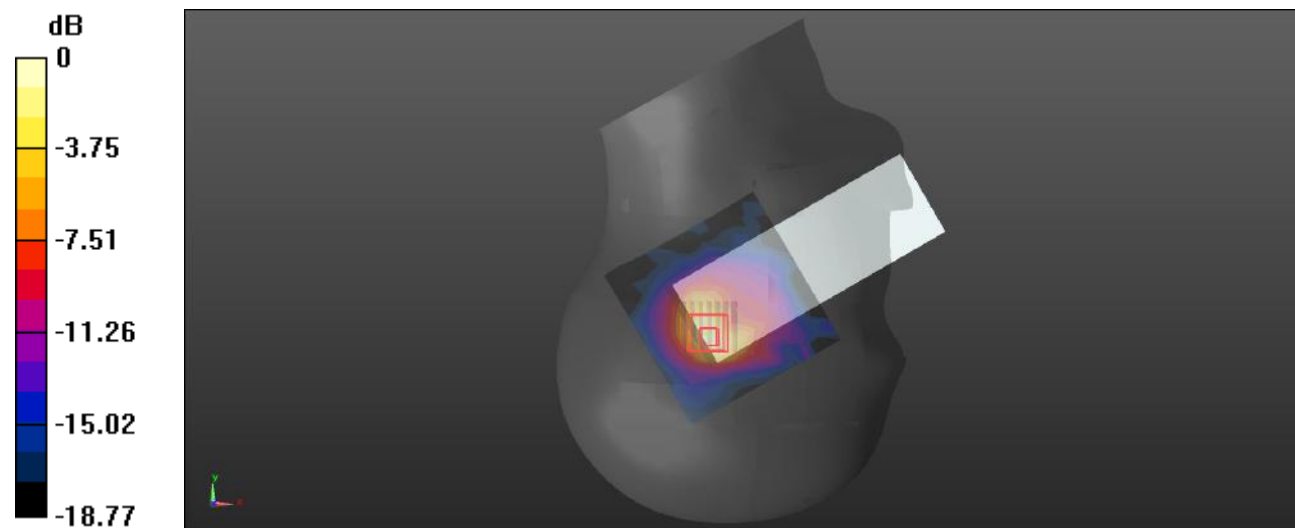

0 dB = 0.154 W/kg = -8.12 dBW/kg

Plot: 5#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.448$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.339 W/kg


Body Front/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.38 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.426 W/kg

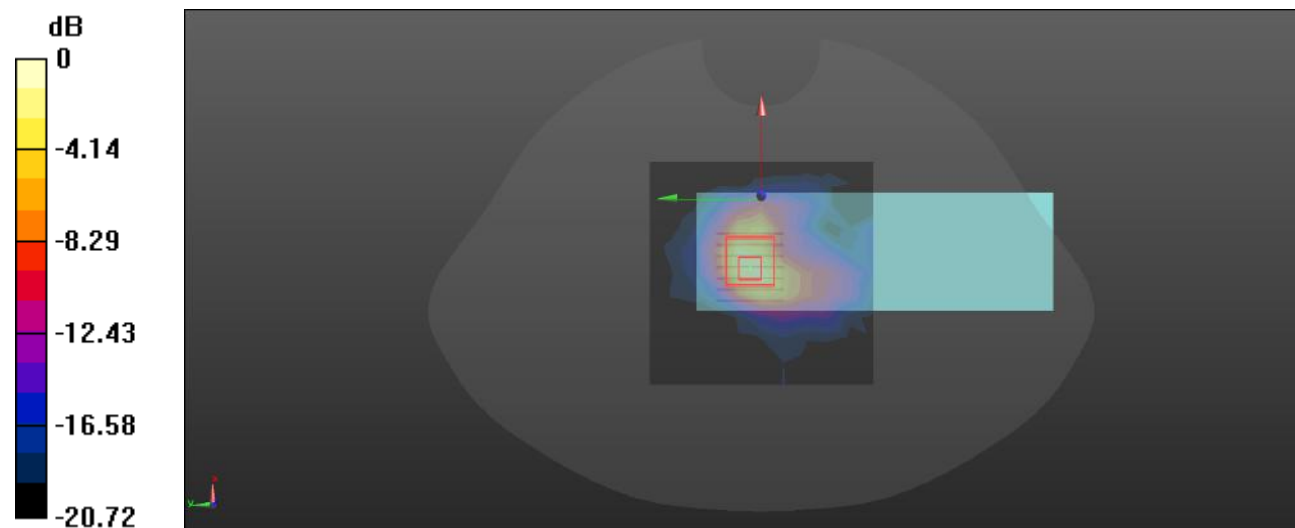

0 dB = 0.426 W/kg = -3.71 dBW/kg

Plot: 6#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.763 \text{ S/m}$; $\epsilon_r = 38.448$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2437 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.105 W/kg


Body Back/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.970 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.103 W/kg

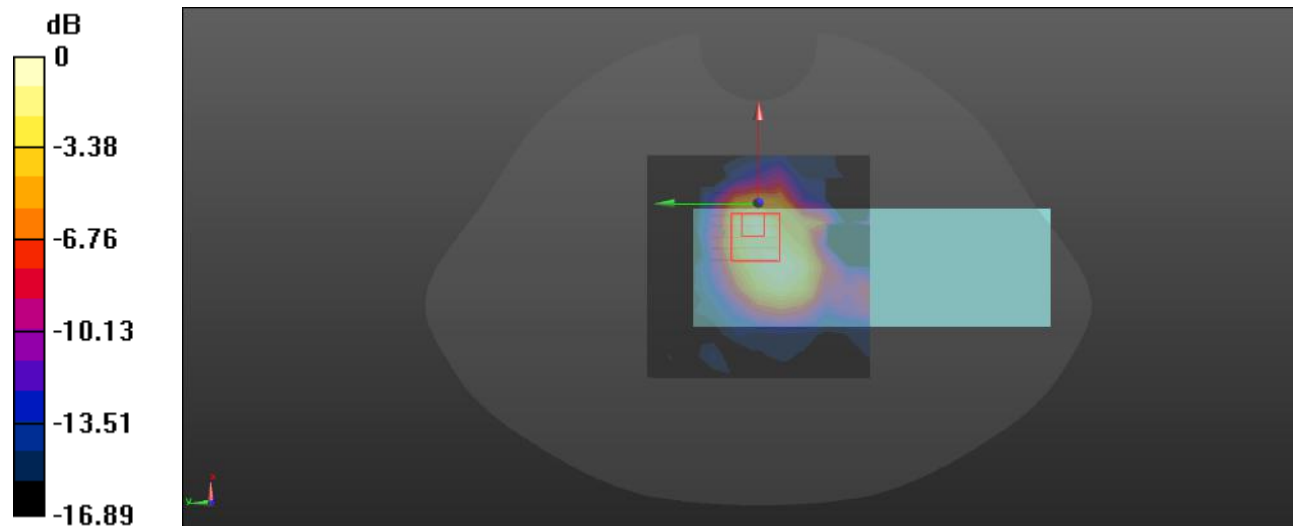

0 dB = 0.103 W/kg = -9.87 dBW/kg

Plot: 7#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.731$ S/m; $\epsilon_r = 38.519$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.218 W/kg


Head Left Cheek/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.111 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

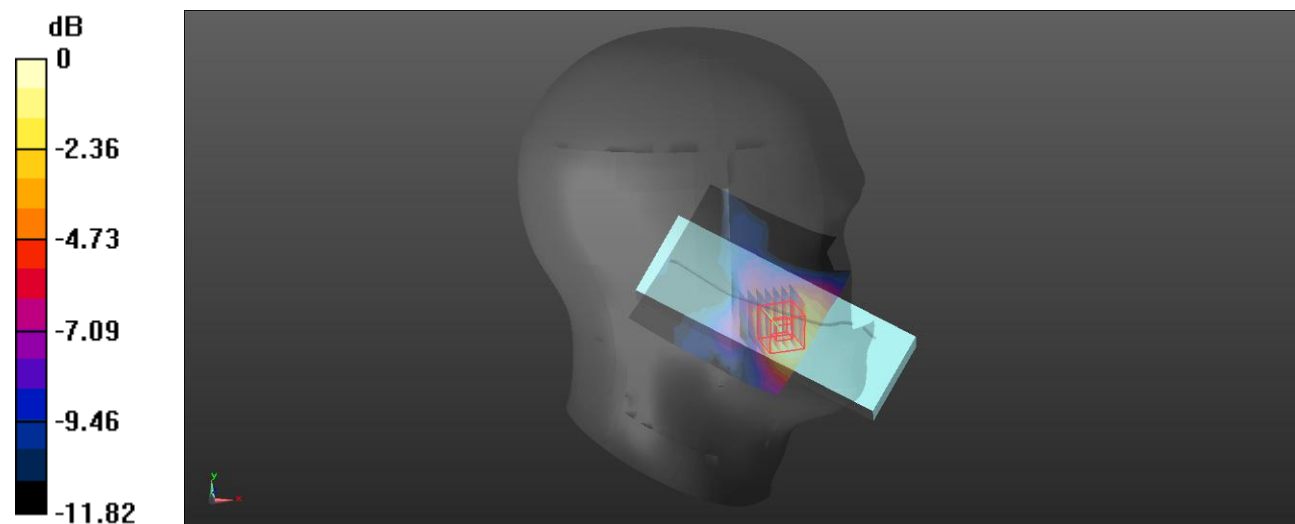

0 dB = 0.212 W/kg = -6.74 dBW/kg

Plot: 8#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.731 \text{ S/m}$; $\epsilon_r = 38.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0611 W/kg


Head Left Tilt/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.304 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0575 W/kg

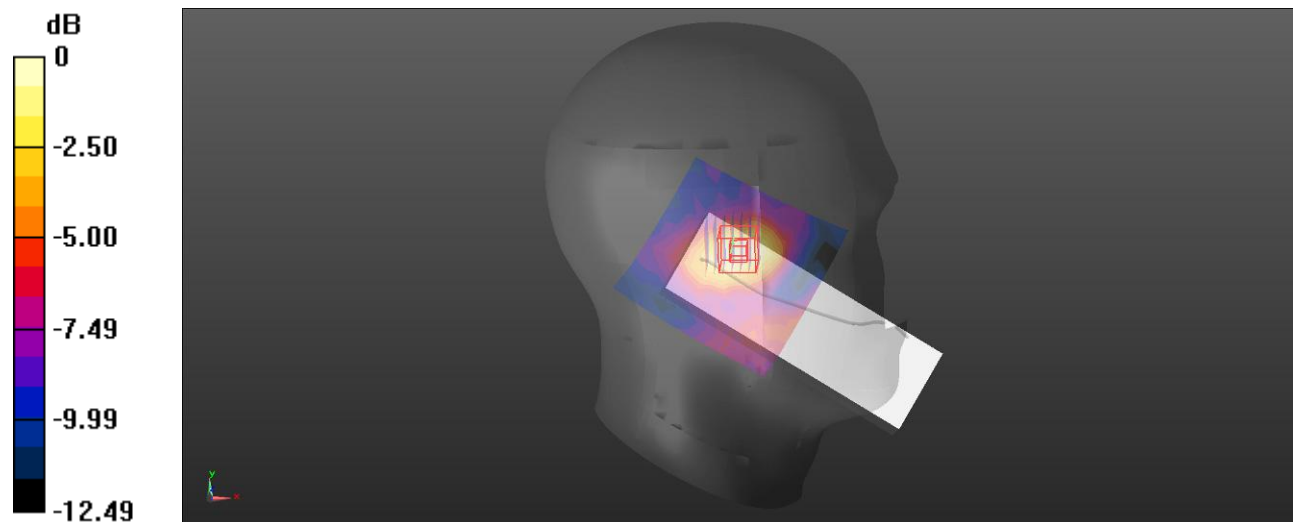

0 dB = 0.0575 W/kg = -12.40 dBW/kg

Plot: 9#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.731$ S/m; $\epsilon_r = 38.519$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0714 W/kg


Head Right Cheek/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.272 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0733 W/kg

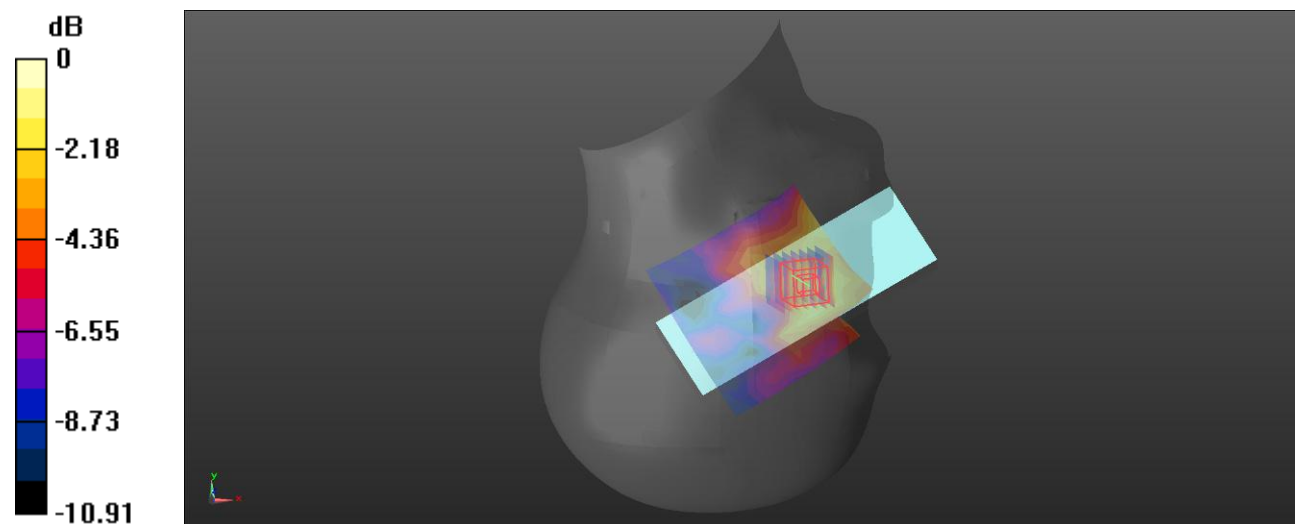

0 dB = 0.0733 W/kg = -11.35 dBW/kg

Plot: 10#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.731$ S/m; $\epsilon_r = 38.519$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0691 W/kg



Head Right Tilt/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.344 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0674 W/kg

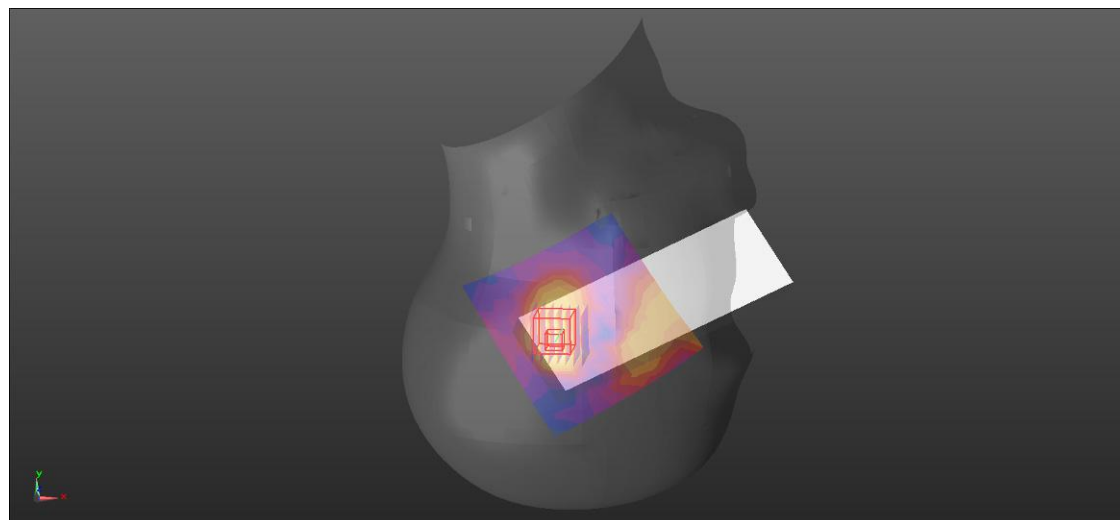

0 dB = 0.0674 W/kg = -11.71 dBW/kg

Plot: 11#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.731 \text{ S/m}$; $\epsilon_r = 38.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.404 W/kg


Body Front/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.18 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.482 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

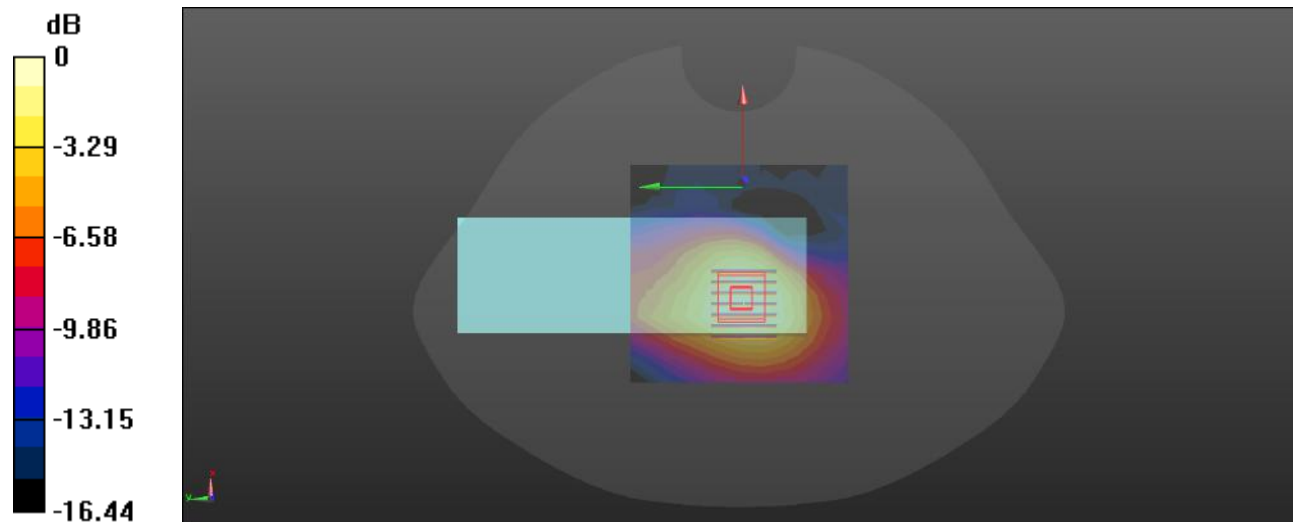

0 dB = 0.405 W/kg = -3.93 dBW/kg

Plot: 12#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 2.4G WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1.011

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.731 \text{ S/m}$; $\epsilon_r = 38.519$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(7.89, 7.89, 7.89) @ 2412 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.450 W/kg


Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.05 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.443 W/kg

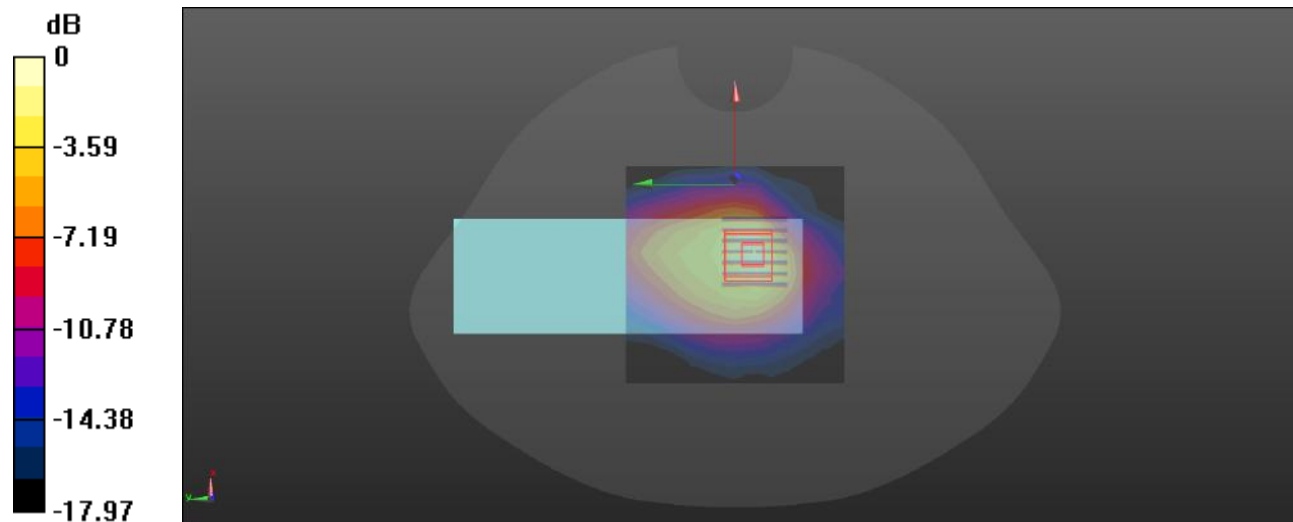

0 dB = 0.443 W/kg = -3.54 dBW/kg

Plot: 13#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.104 W/kg

Head Left Cheek/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 4.150 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

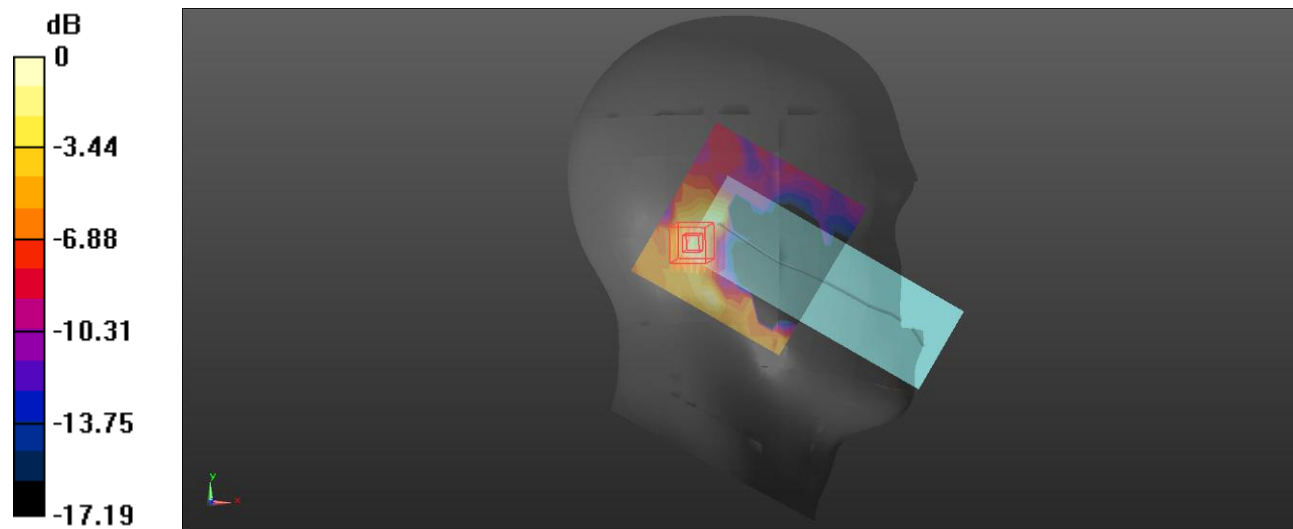

0 dB = 0.105 W/kg = -9.79 dBW/kg

Plot: 14#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.594$ S/m; $\epsilon_r = 35.014$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0954 W/kg


Head Left Tilt/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.107 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.00994 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

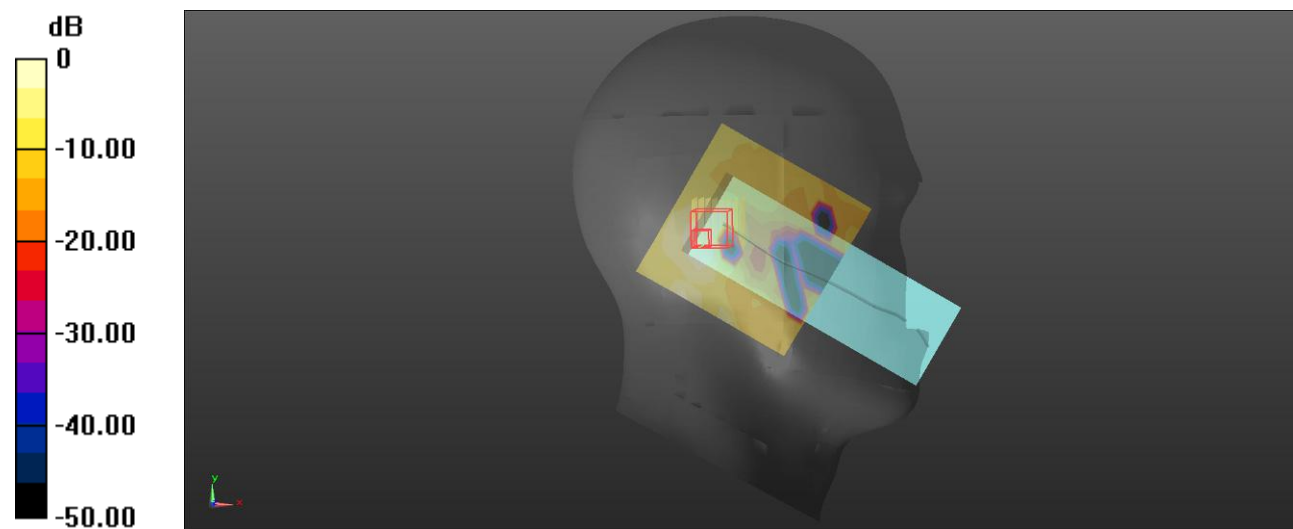

0 dB = 0.101 W/kg = -9.96 dBW/kg

Plot: 15#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.196 W/kg



Head Right Cheek/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.575 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

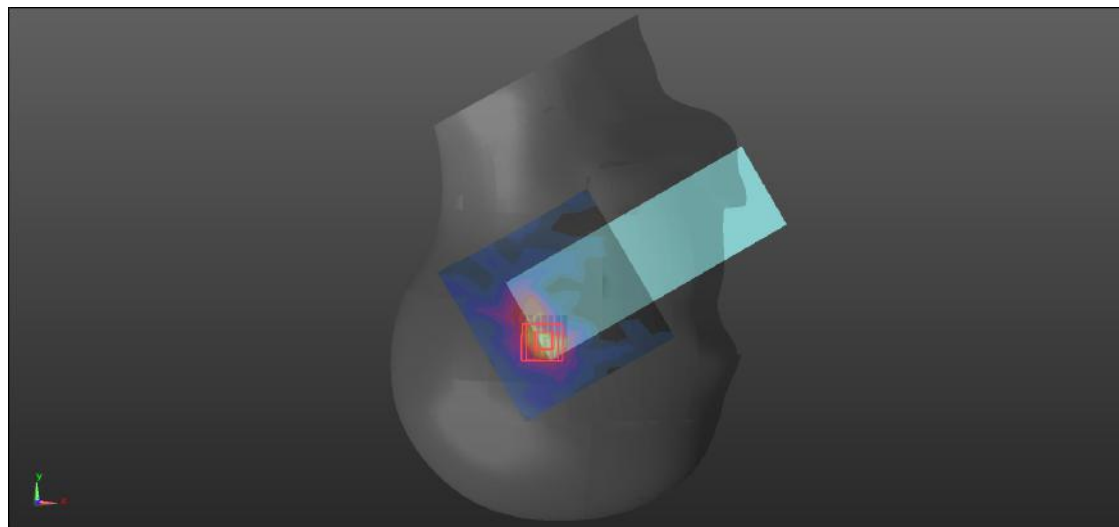

0 dB = 0.237 W/kg = -6.25 dBW/kg

Plot: 16#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.594$ S/m; $\epsilon_r = 35.014$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.142 W/kg


Head Right Tilt/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.892 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.00253 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

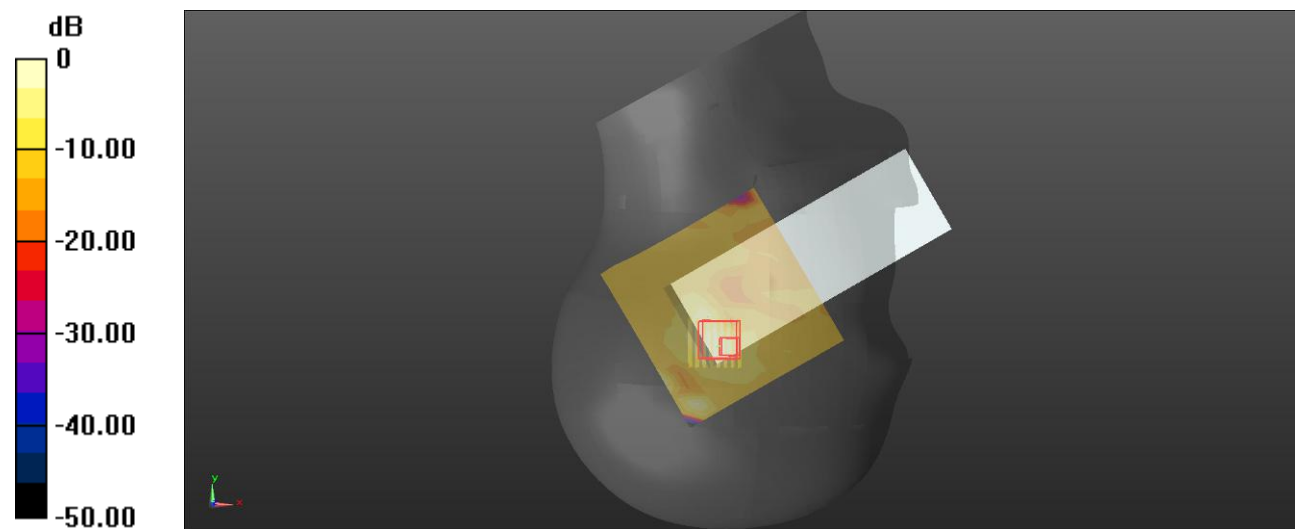

0 dB = 0.175 W/kg = -7.57 dBW/kg

Plot: 17#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0349 W/kg


Body Front/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.710 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00672 W/kg

Maximum value of SAR (measured) = 0.0389 W/kg

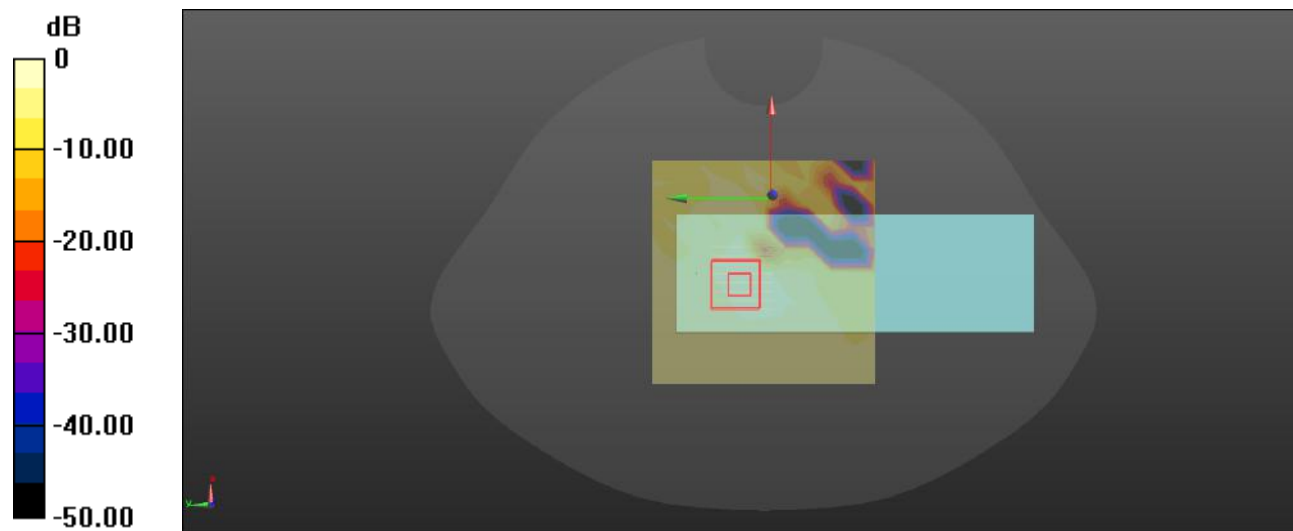

0 dB = 0.0389 W/kg = -14.10 dBW/kg

Plot: 18#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11 ax20 Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0386 W/kg


Body Back/WLAN 5.2G 802.11 ax20 Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.347 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00341 W/kg

Maximum value of SAR (measured) = 0.0424 W/kg

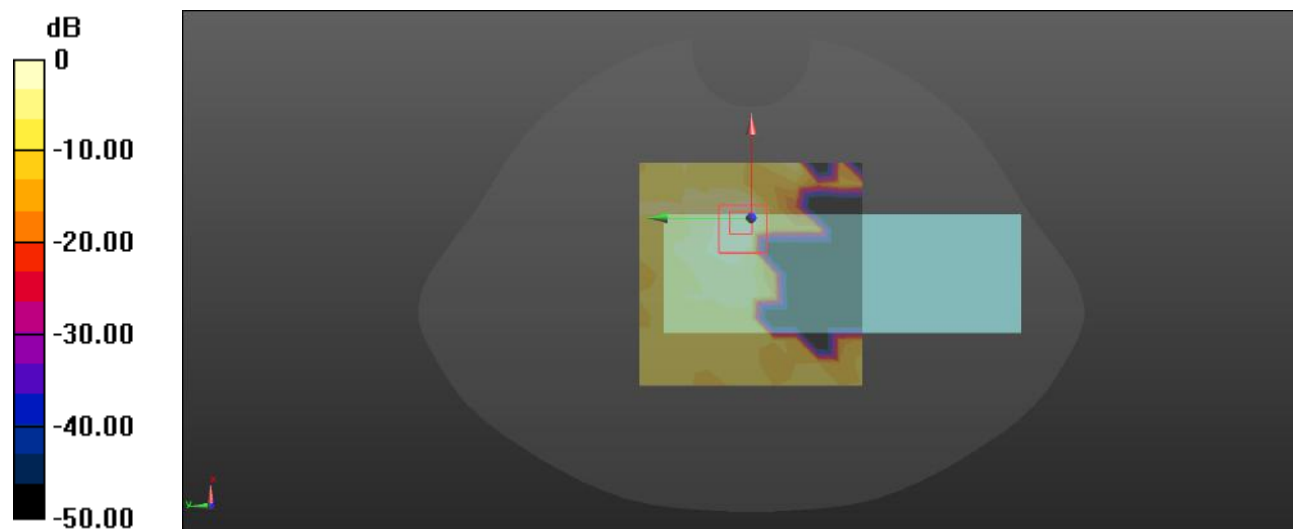

0 dB = 0.0424 W/kg = -13.73 dBW/kg

Plot: 19#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.594$ S/m; $\epsilon_r = 35.014$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.244 W/kg


Head Left Cheek/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.163 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.353 W/kg

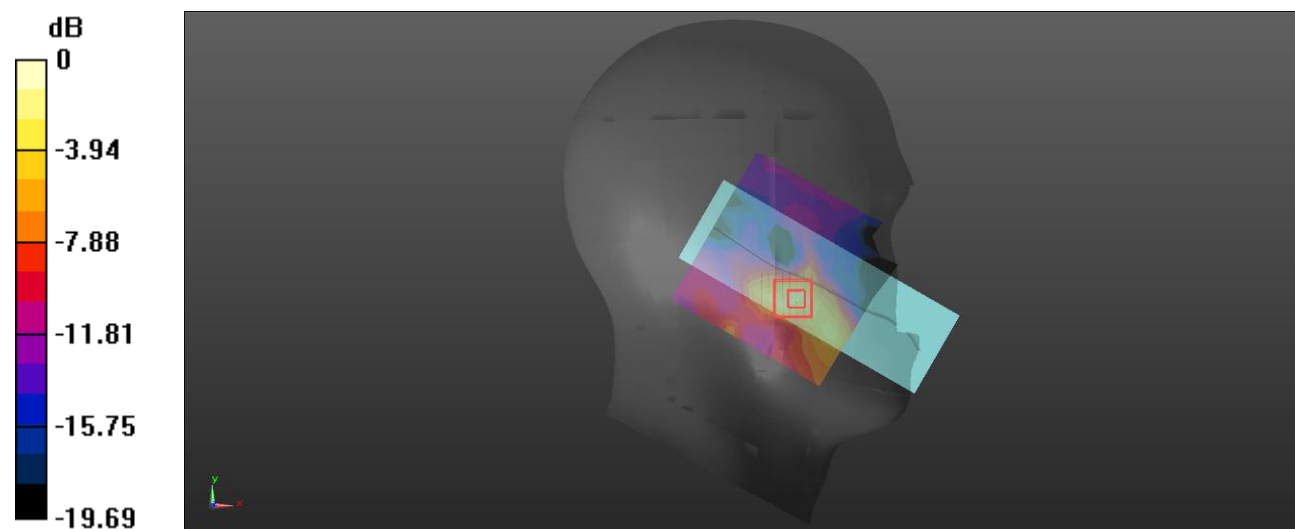

0 dB = 0.353 W/kg = -4.52 dBW/kg

Plot: 20#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0511 W/kg


Head Left Tilt/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 5.886 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.184 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0521 W/kg

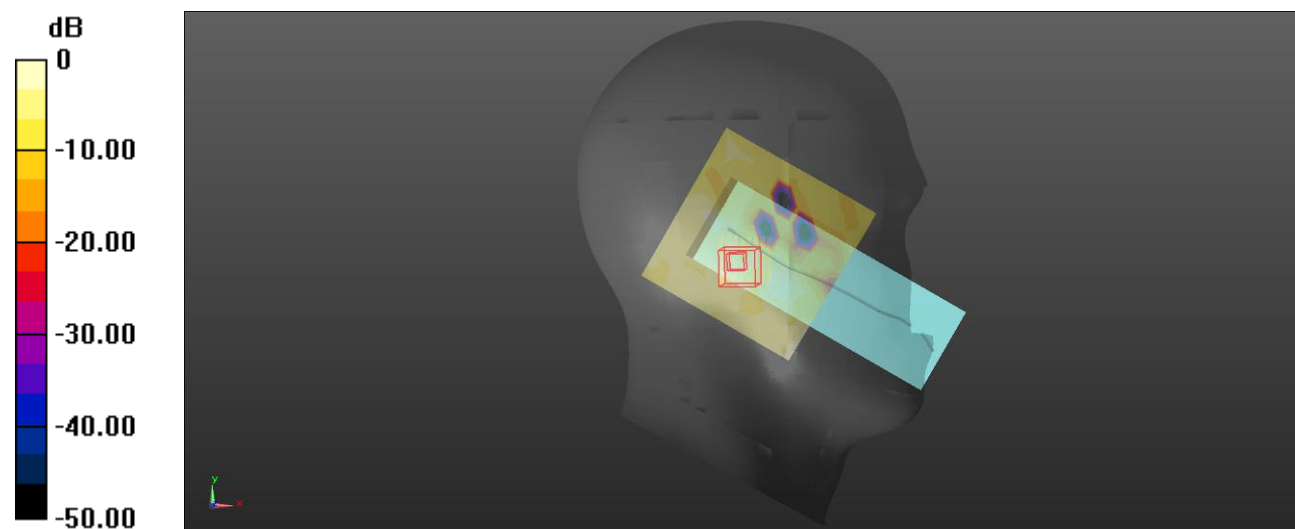

0 dB = 0.0521 W/kg = -12.83 dBW/kg

Plot: 21#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.222 W/kg


Head Right Cheek/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.471 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.366 W/kg

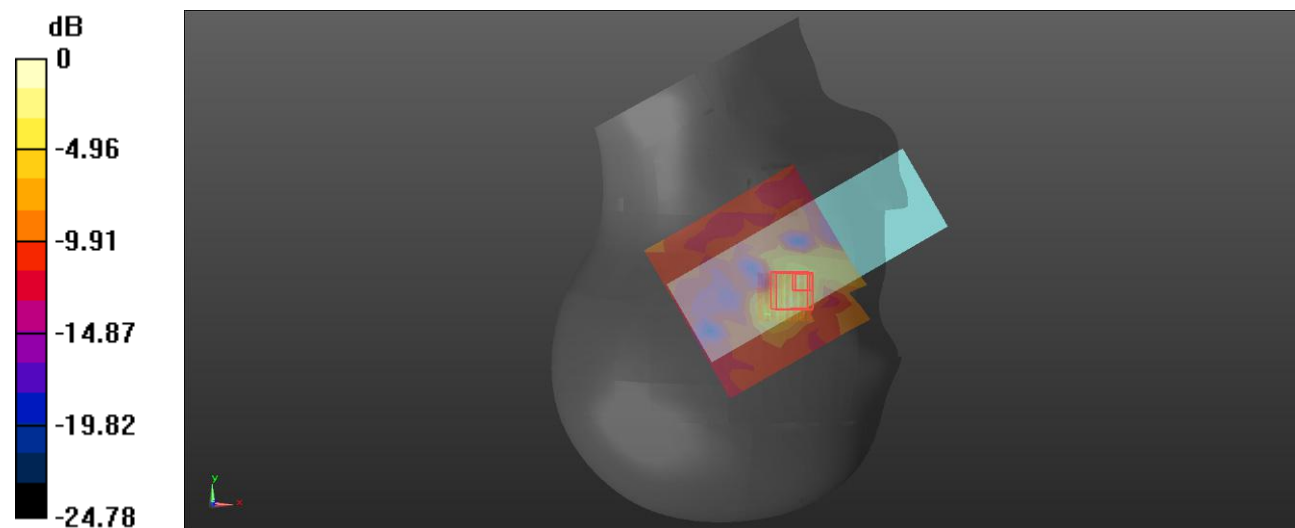

0 dB = 0.366 W/kg = -4.37 dBW/kg

Plot: 22#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.104 W/kg


Head Right Tilt/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.567 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.00706 W/kg

Maximum value of SAR (measured) = 0.0937 W/kg

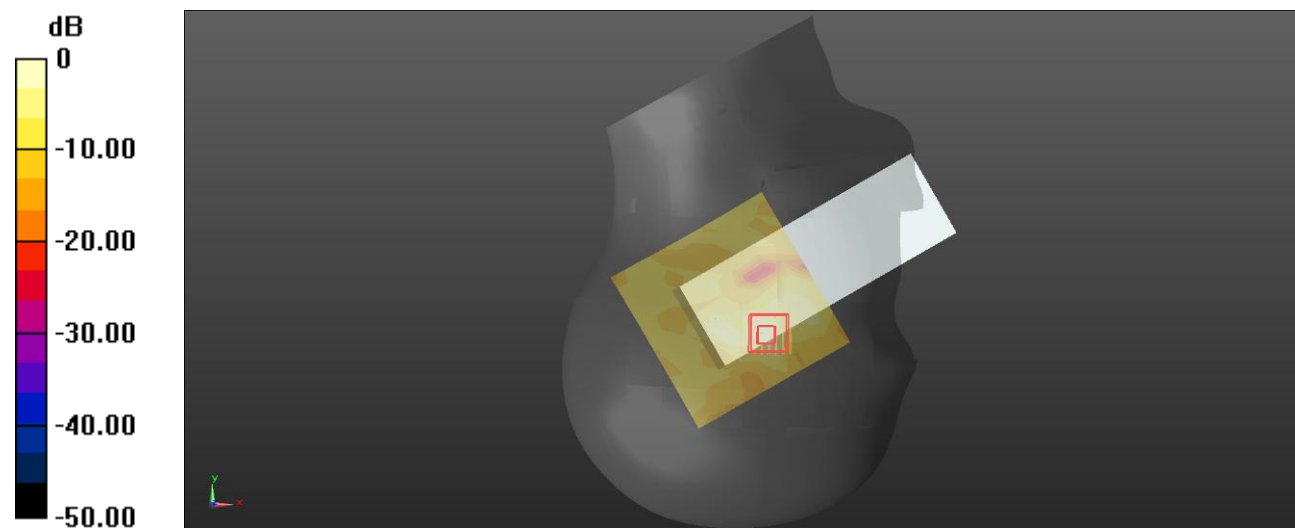

0 dB = 0.0937 W/kg = -10.28 dBW/kg

Plot: 23#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.594$ S/m; $\epsilon_r = 35.014$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.397 W/kg


Body Front/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.283 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

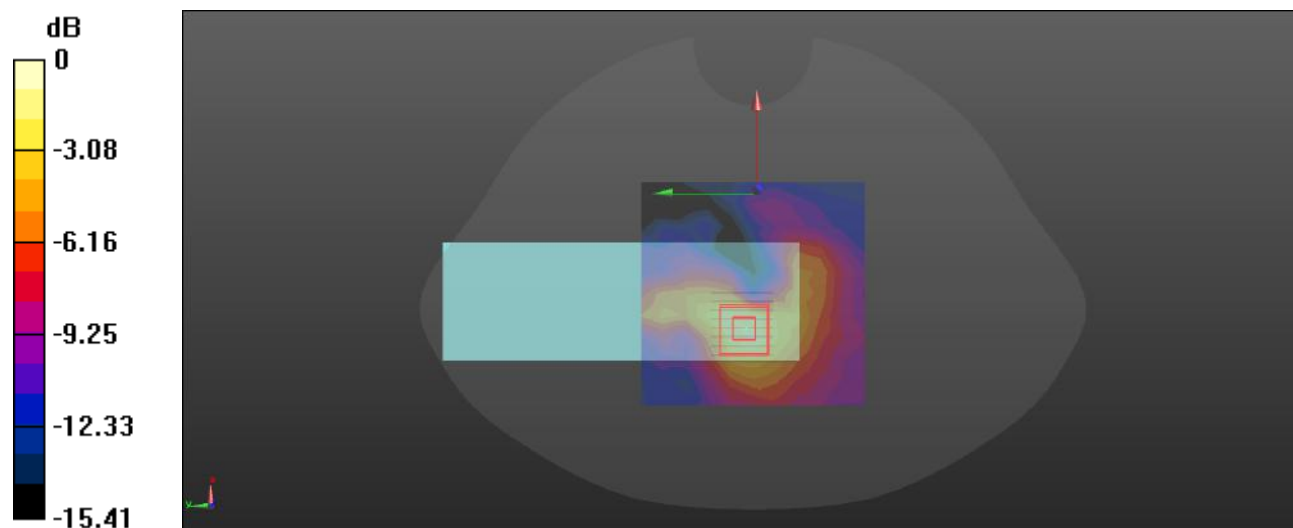

0 dB = 0.482 W/kg = -3.17 dBW/kg

Plot: 24#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.594 \text{ S/m}$; $\epsilon_r = 35.014$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.62, 5.62, 5.62) @ 5180 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.556 W/kg


Body Back/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 7.379 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.304 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

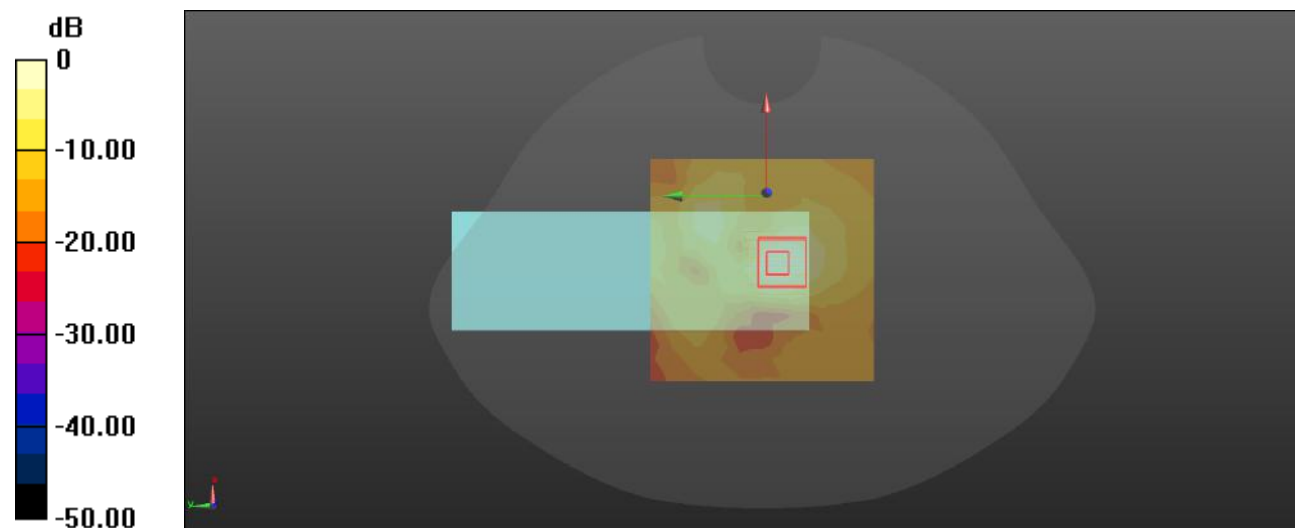

0 dB = 0.630 W/kg = -2.01 dBW/kg

Plot: 25#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.359$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.168 W/kg


Head Left Cheek/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.057 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

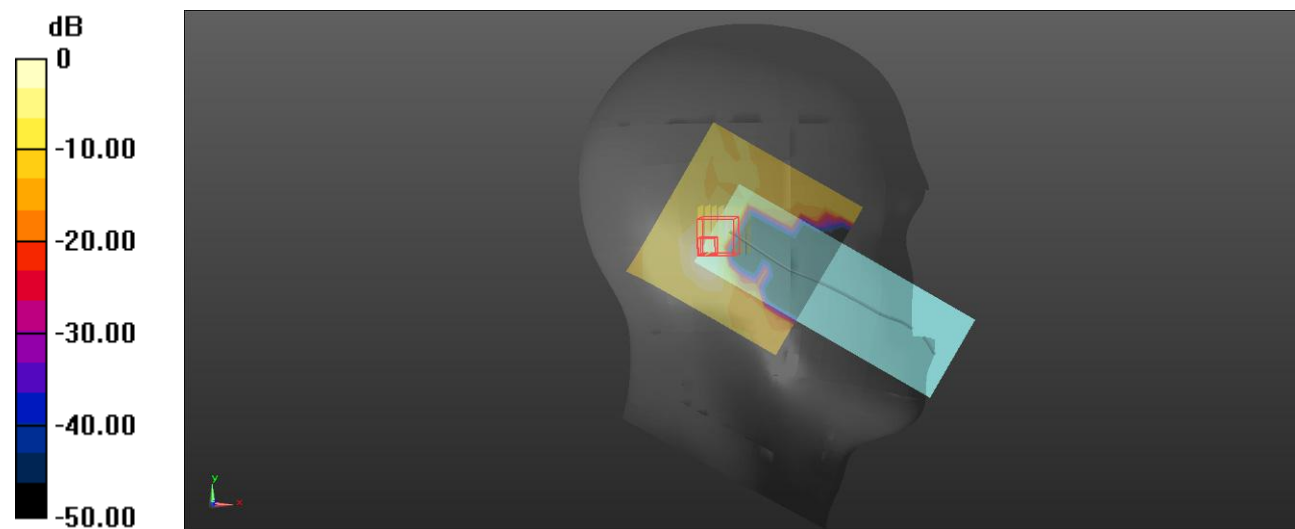

0 dB = 0.176 W/kg = -7.54 dBW/kg

Plot: 26#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.198 W/kg


Head Left Tilt/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.258 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

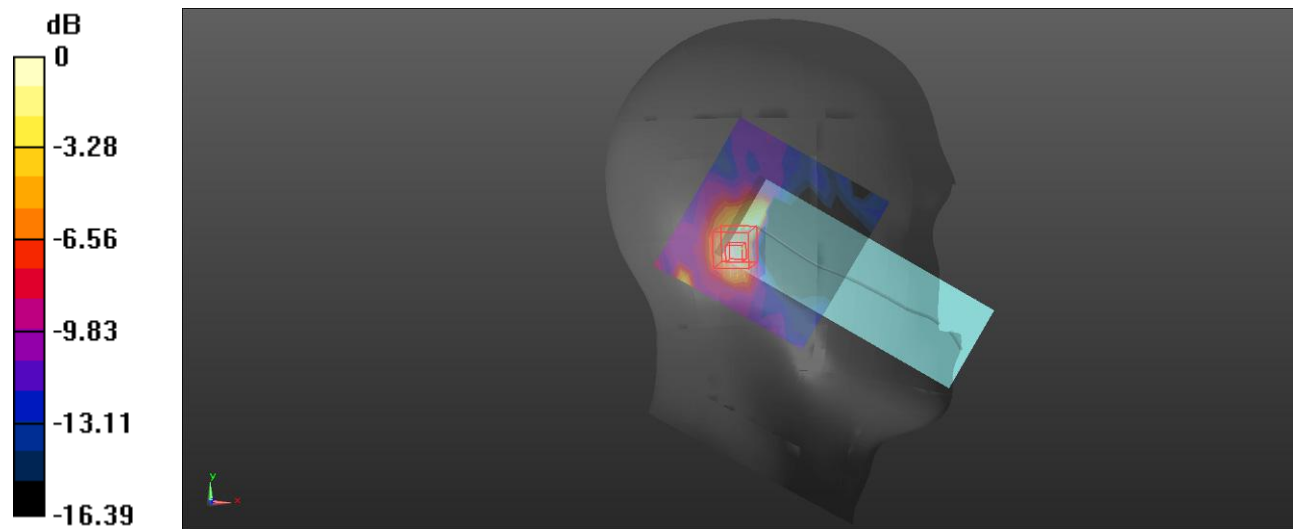

0 dB = 0.173 W/kg = -7.62 dBW/kg

Plot: 27#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.235 W/kg


Head Right Cheek/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.407 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.644 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

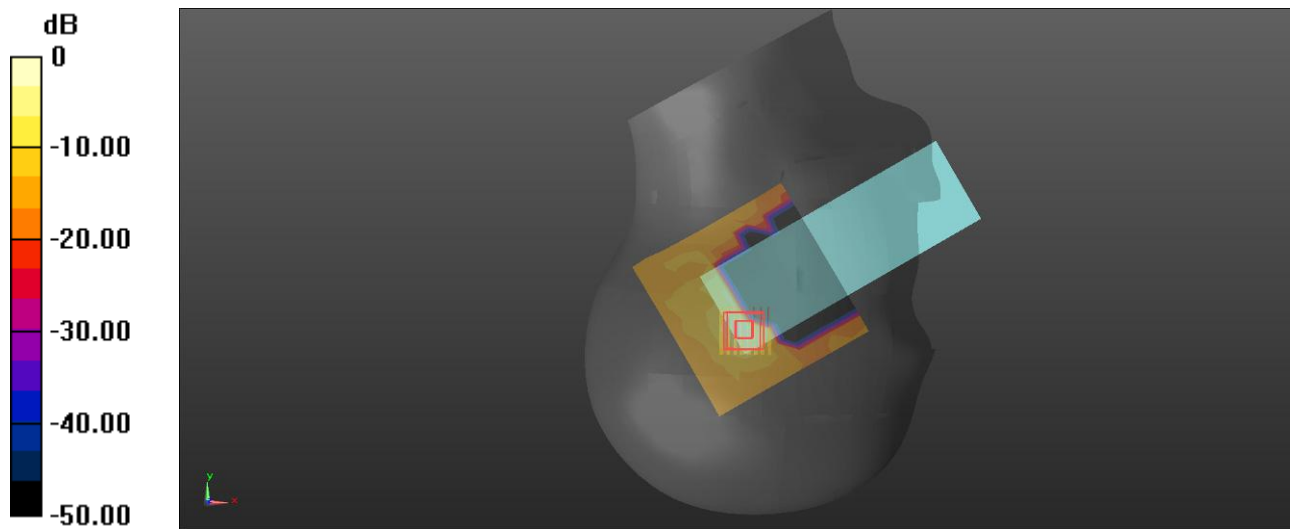

0 dB = 0.319 W/kg = -4.96 dBW/kg

Plot: 28#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.257 W/kg


Head Right Tilt/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.743 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

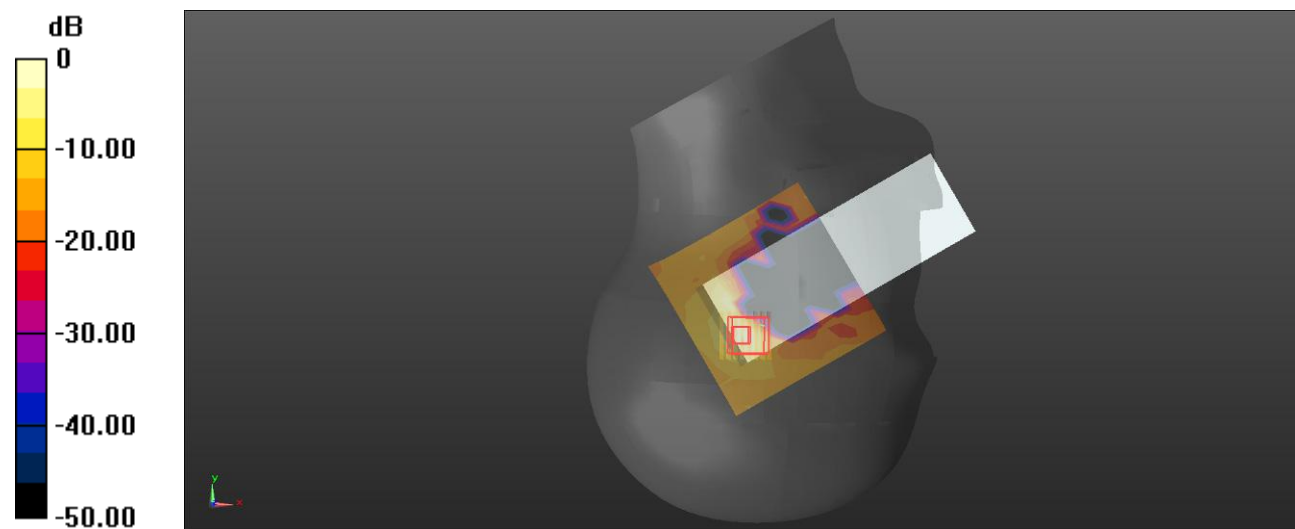

0 dB = 0.332 W/kg = -4.79 dBW/kg

Plot: 29#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.359$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0607 W/kg


Body Front/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.075 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.00403 W/kg

Maximum value of SAR (measured) = 0.0653 W/kg

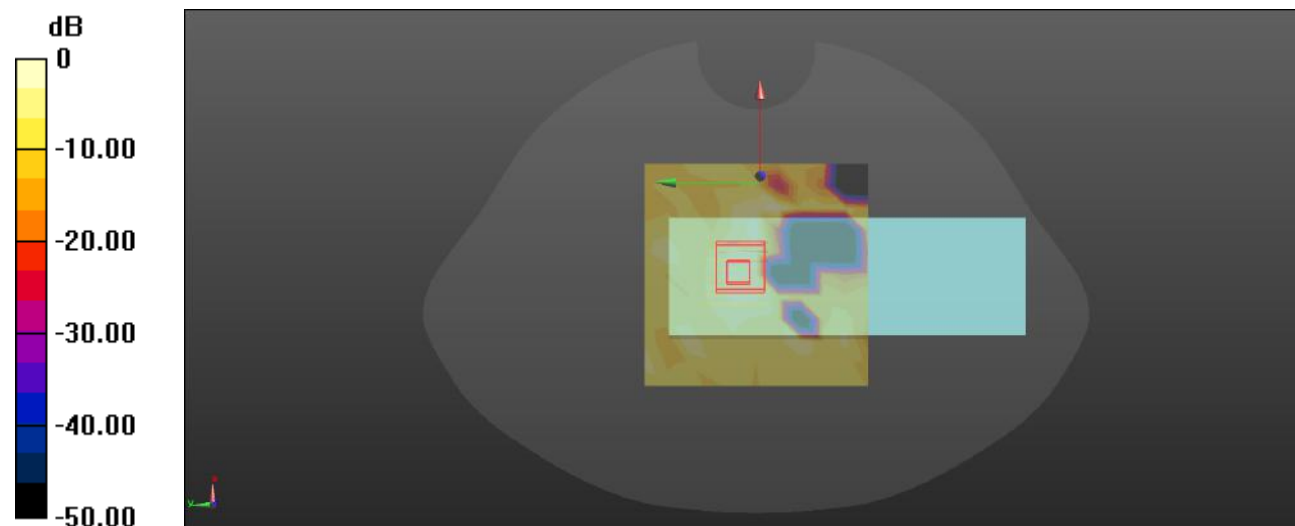

0 dB = 0.0653 W/kg = -11.85 dBW/kg

Plot: 30#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.072

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0382 W/kg


Body Back/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.780 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00565 W/kg

Maximum value of SAR (measured) = 0.0421 W/kg

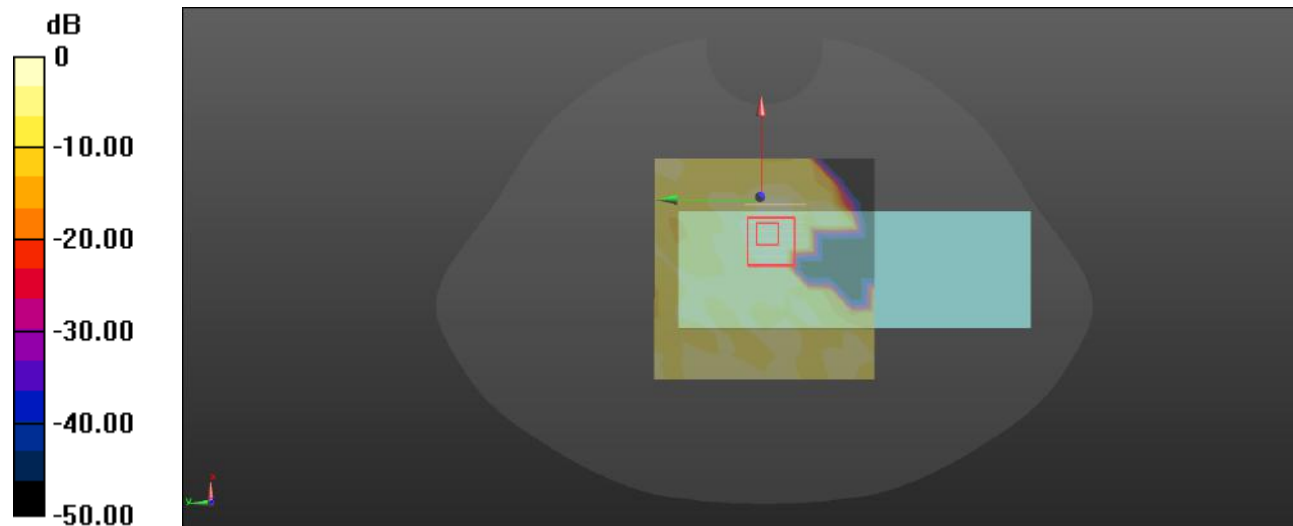

0 dB = 0.0421 W/kg = -13.76 dBW/kg

Plot: 31#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.359$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.139 W/kg


Head Left Cheek/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.455 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.159 W/kg

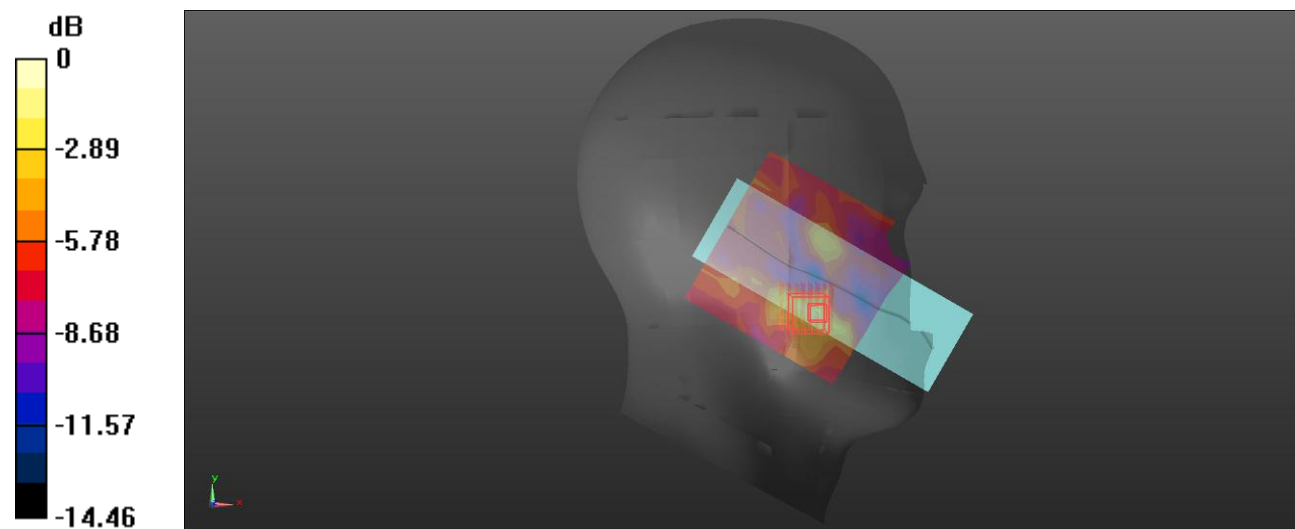

0 dB = 0.159 W/kg = -7.99 dBW/kg

Plot: 32#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.359$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Tilt/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0319 W/kg


Head Left Tilt/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.203 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.00526 W/kg; SAR(10 g) = 0.000939 W/kg

Maximum value of SAR (measured) = 0.0328 W/kg

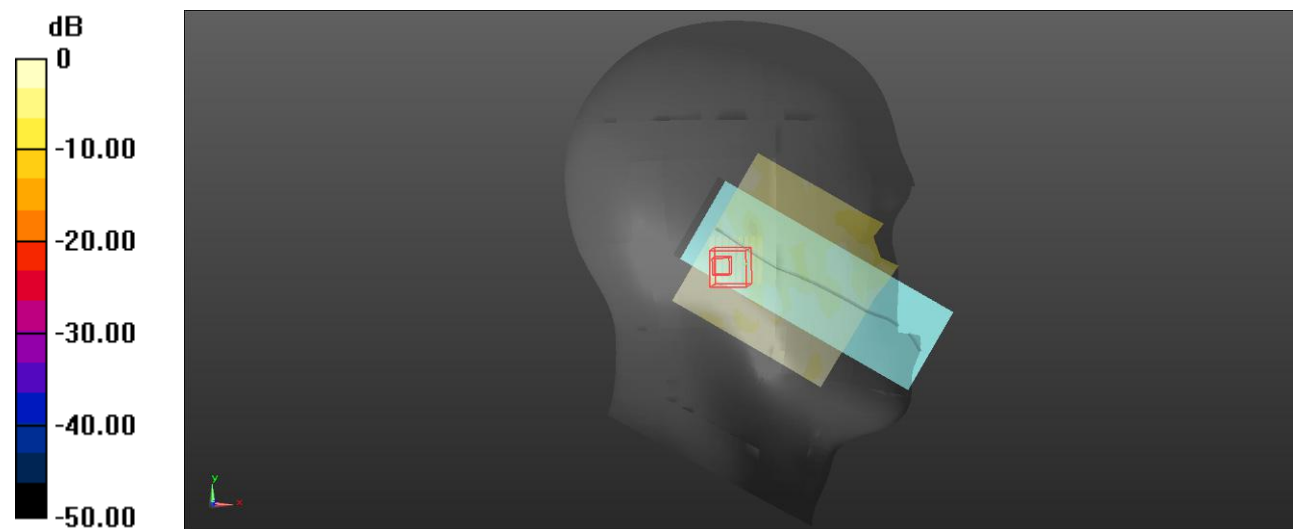

0 dB = 0.0328 W/kg = -14.84 dBW/kg

Plot: 33#**DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.212$ S/m; $\epsilon_r = 35.359$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0868 W/kg


Head Right Cheek/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.882 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0935 W/kg

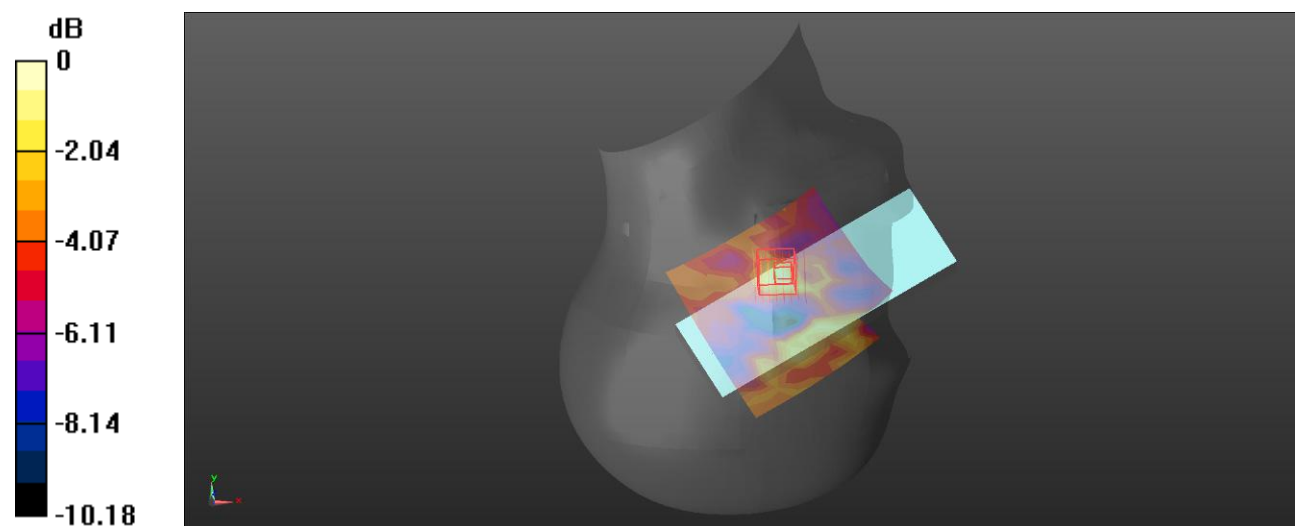

0 dB = 0.0935 W/kg = -10.29 dBW/kg

Plot: 34#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Tilt/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0599 W/kg


Head Right Tilt/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.313 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.00876 W/kg; SAR(10 g) = 0.00233 W/kg

Maximum value of SAR (measured) = 0.0496 W/kg

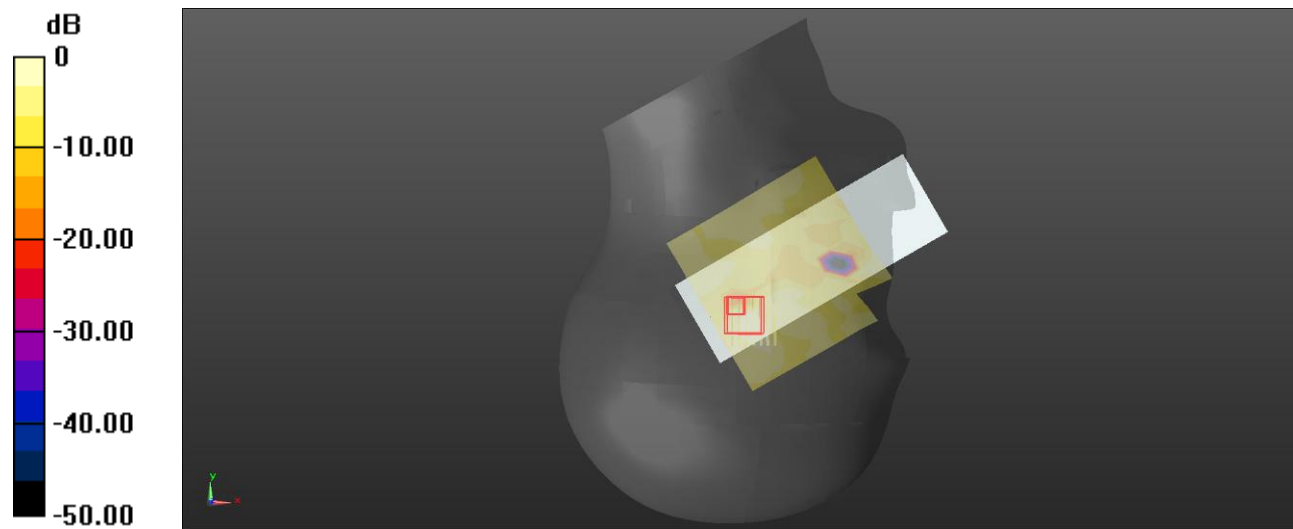

0 dB = 0.0496 W/kg = -13.05 dBW/kg

Plot: 35#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Front/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.173 W/kg


Body Front/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.008 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.173 W/kg

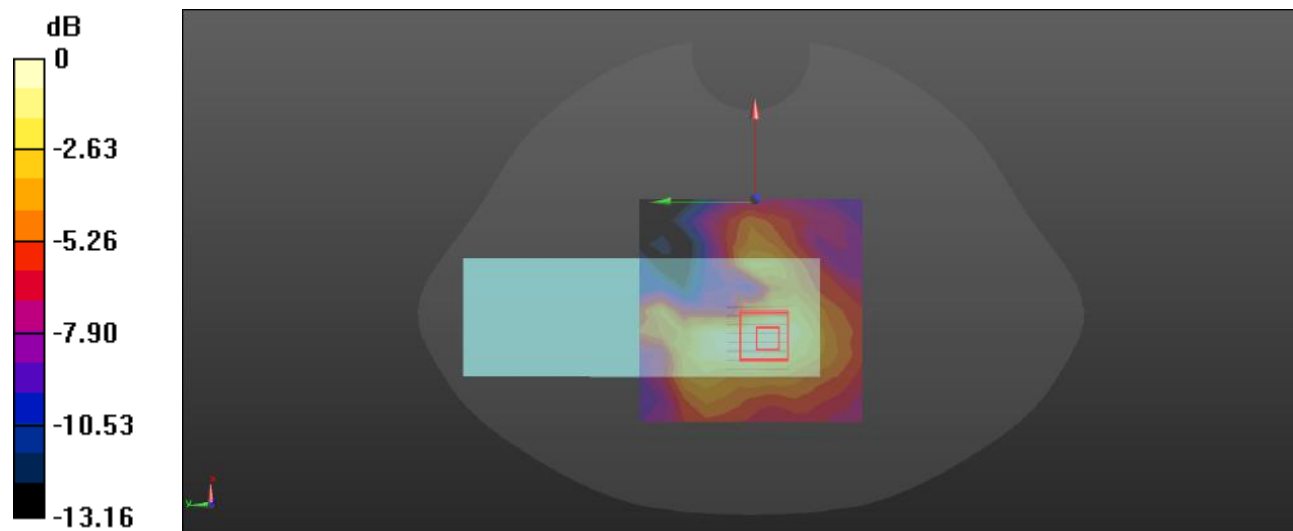

0 dB = 0.173 W/kg = -7.62 dBW/kg

Plot: 36#

DUT: Portable Wi-Fi Phone ; Type: W611W; Serial: 2IGQ-1

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.098

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.212 \text{ S/m}$; $\epsilon_r = 35.359$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7382; ConvF(5.08, 5.08, 5.08) @ 5785 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 9/27/2023
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WLAN 5.8G 802.11 ax20 Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.622 W/kg


Body Back/WLAN 5.8G 802.11 ax20 Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.677 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.092 W/kg

Maximum value of SAR (measured) = 0.607 W/kg

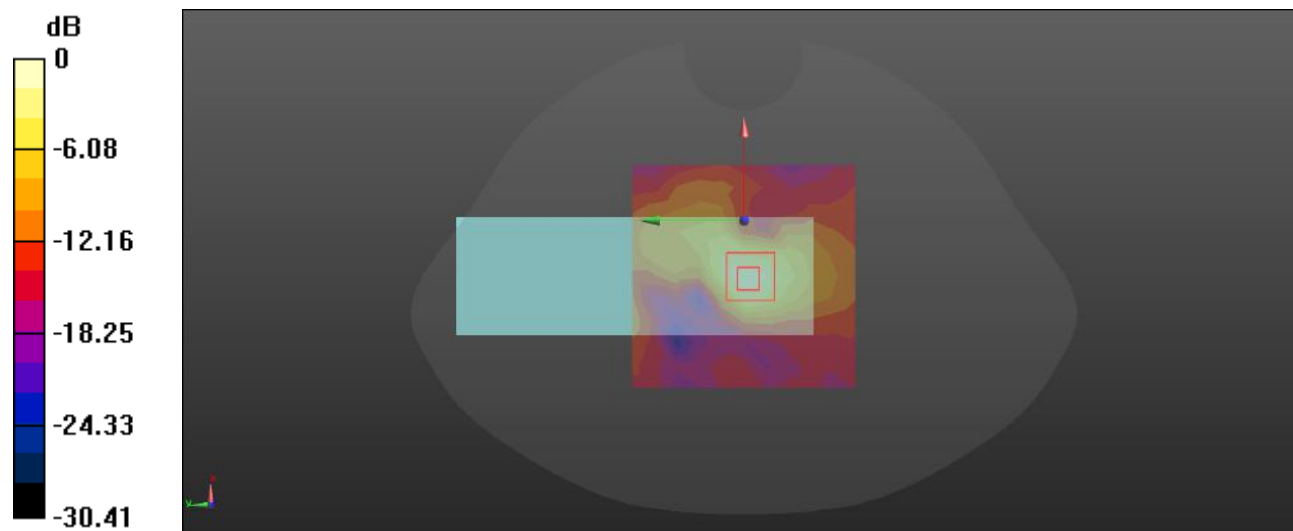

0 dB = 0.607 W/kg = -2.17 dBW/kg

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.


Measurement uncertainty evaluation for IEEE1528-2013 SAR test

| Source of uncertainty | Tolerance/uncertainty ± % | Probability distribution | Divisor | ci (1 g) | ci (10 g) | Standard uncertainty ± %, (1 g) | Standard uncertainty ± %, (10 g) |
|---|---------------------------|--------------------------|---------|----------|-----------|---------------------------------|----------------------------------|
| Measurement system | | | | | | | |
| Probe calibration | 13.9 | N | 1 | 1 | 1 | 13.9 | 13.9 |
| Axial Isotropy | 4.7 | R | √3 | 1 | 1 | 2.7 | 2.7 |
| Hemispherical Isotropy | 9.6 | R | √3 | 0 | 0 | 0.0 | 0.0 |
| Boundary effect | 1.0 | R | √3 | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | R | √3 | 1 | 1 | 2.7 | 2.7 |
| Detection limits | 1.0 | R | √3 | 1 | 1 | 0.6 | 0.6 |
| Modulation response | 4.0 | R | √3 | 1 | 1 | 2.3 | 2.3 |
| Readout electronics | 0.3 | N | 1 | 1 | 1 | 0.3 | 0.3 |
| Response time | 0.0 | R | √3 | 1 | 1 | 0.0 | 0.0 |
| Integration time | 0.0 | R | √3 | 1 | 1 | 0.0 | 0.0 |
| RF ambient conditions – noise | 1.0 | R | √3 | 1 | 1 | 0.6 | 0.6 |
| RF ambient conditions–reflections | 1.0 | R | √3 | 1 | 1 | 0.6 | 0.6 |
| Probe positioner mech. Restrictions | 0.8 | R | √3 | 1 | 1 | 0.5 | 0.5 |
| Probe positioning with respect to phantom shell | 6.7 | R | √3 | 1 | 1 | 3.9 | 3.9 |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | 3.9 | R | √3 | 1 | 1 | 2.3 | 2.3 |
| Test sample related | | | | | | | |
| Test sample positioning | 2.8 | N | 1 | 1 | 1 | 2.8 | 2.8 |
| Device holder uncertainty | 6.3 | N | 1 | 1 | 1 | 6.3 | 6.3 |
| Drift of output power | 5.0 | R | √3 | 1 | 1 | 2.9 | 2.9 |
| SAR scaling | 2.0 | R | √3 | 1 | 1 | 1.2 | 1.2 |
| Phantom and tissue parameters | | | | | | | |
| Phantom uncertainty (shape and thickness tolerances) | 4.0 | R | √3 | 1 | 1 | 2.3 | 2.3 |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | 1.9 | N | 1 | 1 | 0.84 | 1.9 | 1.6 |
| Liquid conductivity measurement | 5.5 | N | 1 | 0.78 | 0.71 | 4.3 | 3.9 |
| Liquid permittivity measurement | 2.9 | N | 1 | 0.23 | 0.26 | 0.7 | 0.8 |
| Liquid conductivity—temperature uncertainty | 1.7 | R | √3 | 0.78 | 0.71 | 0.8 | 0.7 |
| Liquid permittivity—temperature uncertainty | 2.7 | R | √3 | 0.23 | 0.26 | 0.4 | 0.4 |
| Combined standard uncertainty | | RSS | | | | 12.2 | 12.0 |
| Expanded uncertainty 95 % confidence interval) | | | | | | 24.3 | 23.9 |


APPENDIX B EUT TEST POSITION PHOTOS

Liquid depth $\geq 15\text{cm}$


Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962

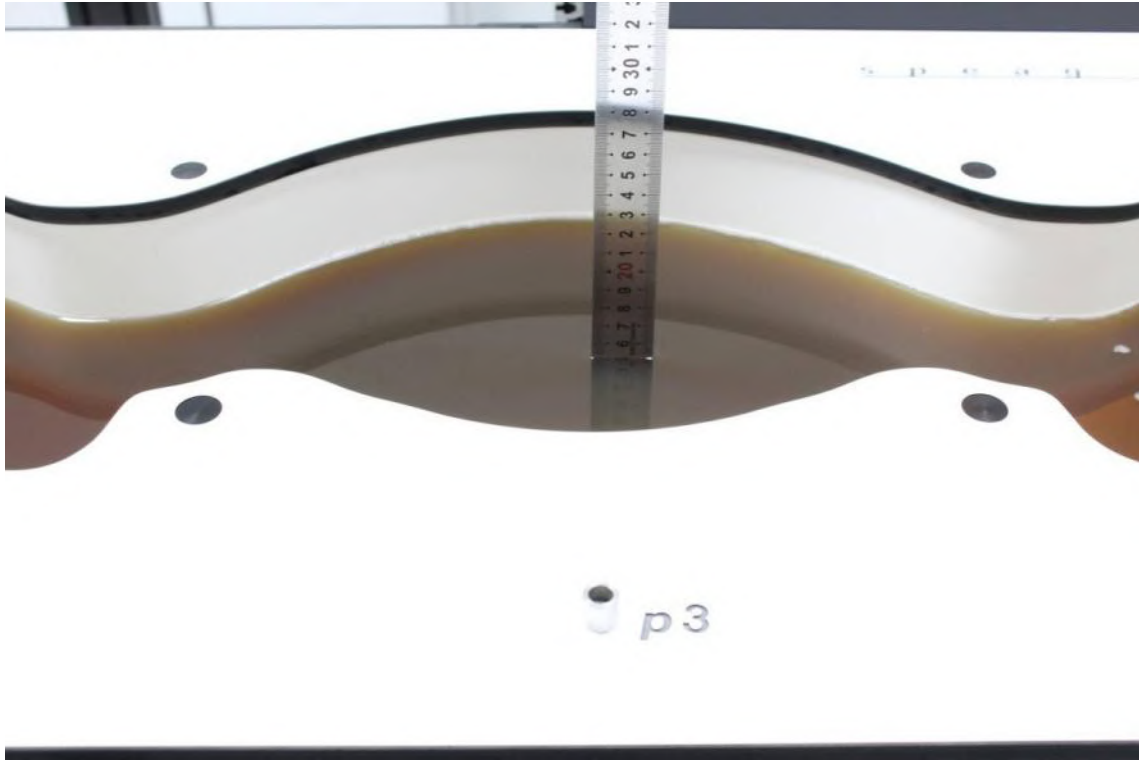

Head Left Cheek Setup Photo (0 mm)

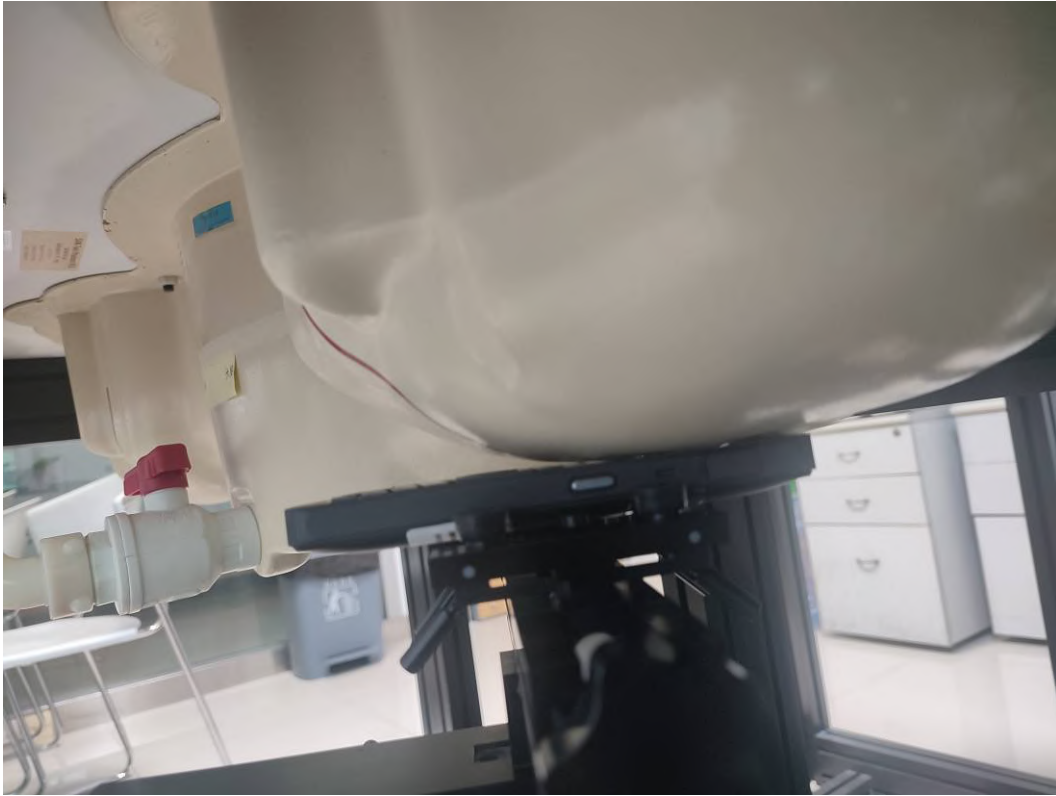

Head Left Tilt Setup Photo (0 mm)

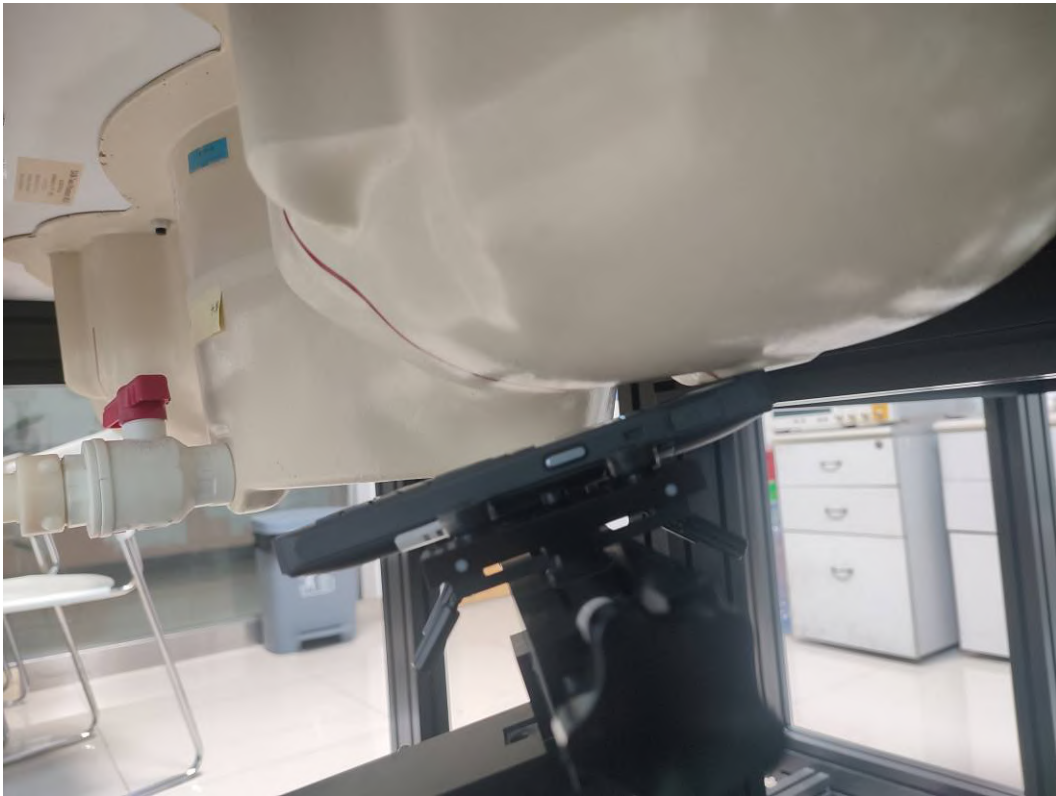

Head Right Cheek Setup Photo (0 mm)



Head Right Tilt Setup Photo (0 mm)



Body Front Setup Photo (5 mm)



Body Back Setup Photo (5 mm)



APPENDIX C PROBE CALIBRATION CERTIFICATES



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Client **BACL**

Certificate No: **J23Z60359**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 7382**

Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes

Calibration date: **September 27, 2023**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|--------------------------|-------------|--|-----------------------|
| Power Meter NRP2 | 101919 | 12-Jun-23(CTTL, No.J23X05435) | Jun-24 |
| Power sensor NRP-Z91 | 101547 | 12-Jun-23(CTTL, No.J23X05435) | Jun-24 |
| Power sensor NRP-Z91 | 101548 | 12-Jun-23(CTTL, No.J23X05435) | Jun-24 |
| Reference 10dBAttenuator | 18N50W-10dB | 19-Jan-23(CTTL, No.J23X00212) | Jan-25 |
| Reference 20dBAttenuator | 18N50W-20dB | 19-Jan-23(CTTL, No.J23X00211) | Jan-25 |
| Reference Probe EX3DV4 | SN 3846 | 31-May-23(SPEAG, No.EX-3846_May23) | May-24 |
| DAE4 | SN 1555 | 24-Aug-23(SPEAG, No.DAE4-1555_Aug23) | Aug-24 |
| DAE4 | SN 549 | 24-Jan-23(SPEAG, No.DAE4-549_Jan23) | Jan-24 |
| Secondary Standards | ID # | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
| SignalGenerator MG3700A | 6201052605 | 12-Jun-23(CTTL, No.J23X05434) | Jun-24 |
| Network Analyzer E5071C | MY46110673 | 10-Jan-23(CTTL, No.J23X00104) | Jan-24 |
| Reference 10dBAttenuator | BT0520 | 11-May-23(CTTL, No.J23X04061) | May-25 |
| Reference 20dBAttenuator | BT0267 | 11-May-23(CTTL, No.J23X04062) | May-25 |
| OCP DAK-3.5 | SN 1040 | 18-Jan-23(SPEAG, No.OCP-DAK3.5-1040_Jan23) | Jan-24 |

| | Name | Function | Signature |
|----------------|-------------|--------------------|-----------|
| Calibrated by: | Yu Zongying | SAR Test Engineer | |
| Reviewed by: | Lin Hao | SAR Test Engineer | |
| Approved by: | Qi Dianyuan | SAR Project Leader | |

Issued: October 05, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with
s p e a g
CALIBRATION LABORATORY



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Glossary:

| | |
|-----------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A,B,C,D | modulation dependent linearization parameters |
| Polarization Φ | Φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis |

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}:** A,B,C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7382

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--------------------------------------|----------|----------|----------|-----------|
| Norm($\mu V/(V/m)^2$) ^A | 0.42 | 0.42 | 0.47 | ±10.0% |
| DCP(mV) ^B | 100.8 | 101.0 | 103.5 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu V}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|------|---------------------|-----|------|-------|------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 160.9 | ±2.0% |
| | | Y | 0.0 | 0.0 | 1.0 | | 159.5 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 178.1 | |

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).
^B Numerical linearization parameter: uncertainty not required.
^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7382

Calibration Parameter Determined in Head Tissue Simulating Media

| f [MHz] ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unct. (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-------------|
| 750 | 41.9 | 0.89 | 10.65 | 10.65 | 10.65 | 0.17 | 1.24 | ±12.7% |
| 900 | 41.5 | 0.97 | 10.19 | 10.19 | 10.19 | 0.20 | 1.15 | ±12.7% |
| 1750 | 40.1 | 1.37 | 8.60 | 8.60 | 8.60 | 0.26 | 0.97 | ±12.7% |
| 1900 | 40.0 | 1.40 | 8.30 | 8.30 | 8.30 | 0.25 | 1.01 | ±12.7% |
| 2300 | 39.5 | 1.67 | 8.16 | 8.16 | 8.16 | 0.60 | 0.68 | ±12.7% |
| 2450 | 39.2 | 1.80 | 7.89 | 7.89 | 7.89 | 0.45 | 0.86 | ±12.7% |
| 2600 | 39.0 | 1.96 | 7.65 | 7.65 | 7.65 | 0.53 | 0.77 | ±12.7% |
| 3300 | 38.2 | 2.71 | 7.39 | 7.39 | 7.39 | 0.49 | 0.86 | ±13.9% |
| 3500 | 37.9 | 2.91 | 7.24 | 7.24 | 7.24 | 0.41 | 1.03 | ±13.9% |
| 3700 | 37.7 | 3.12 | 7.10 | 7.10 | 7.10 | 0.43 | 1.03 | ±13.9% |
| 3900 | 37.5 | 3.32 | 6.98 | 6.98 | 6.98 | 0.40 | 1.25 | ±13.9% |
| 5250 | 35.9 | 4.71 | 5.62 | 5.62 | 5.62 | 0.50 | 1.25 | ±13.9% |
| 5500 | 35.6 | 4.96 | 5.10 | 5.10 | 5.10 | 0.40 | 1.50 | ±13.9% |
| 5750 | 35.4 | 5.22 | 5.08 | 5.08 | 5.08 | 0.40 | 1.52 | ±13.9% |

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequency up to 6 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

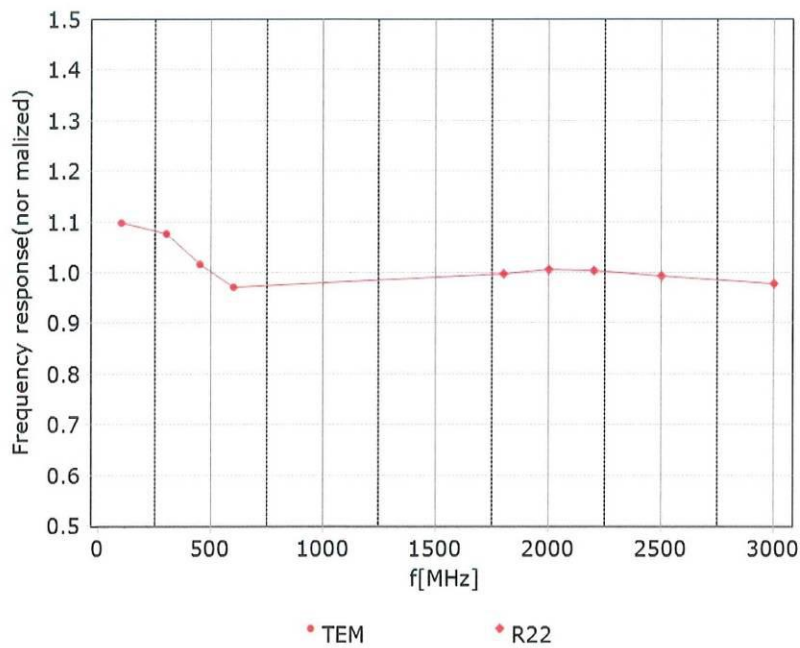

Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Receiving Pattern (Φ), $\theta=0^\circ$


f=600 MHz, TEM

f=1800 MHz, R22

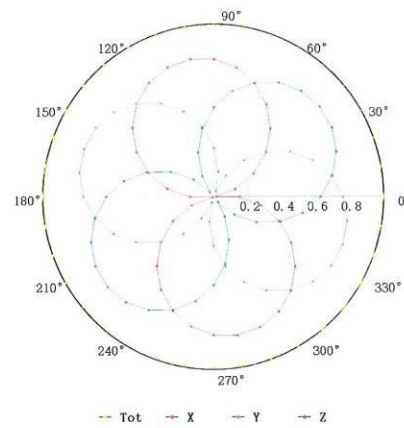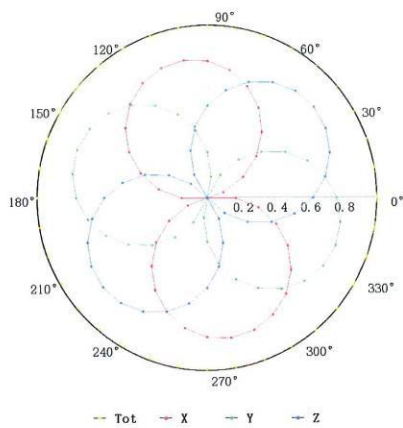

--- Tot -X -Y -Z

--- Tot -X -Y -Z


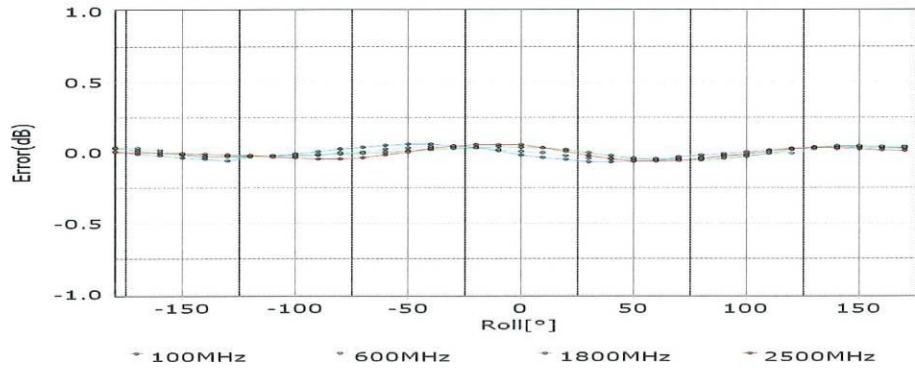


Uncertainty of Axial Isotropy Assessment: $\pm 1.2\%$ ($k=2$)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

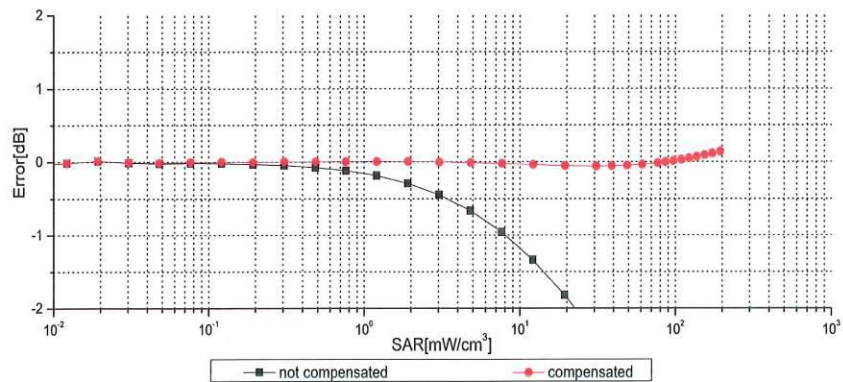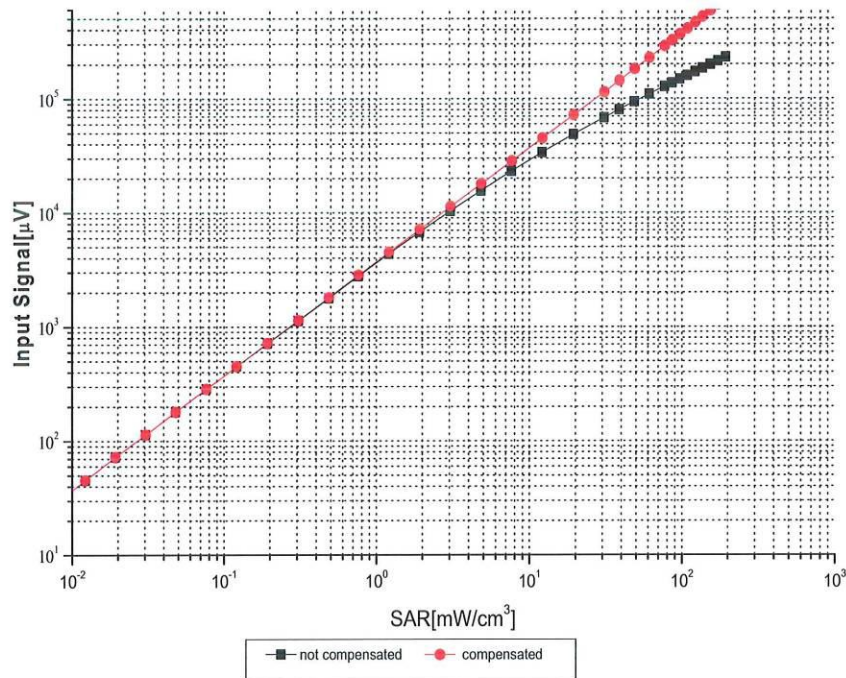

Uncertainty of Linearity Assessment: ±0.9% (k=2)





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn


Conversion Factor Assessment

f=750 MHz,WGLS R9(H_convF)

f=1750 MHz,WGLS R22(H_convF)

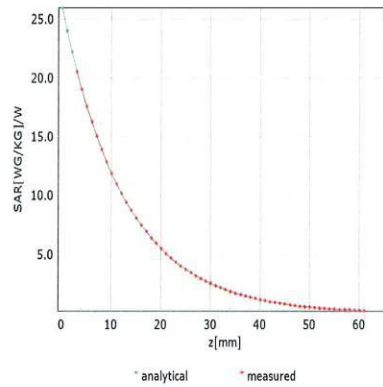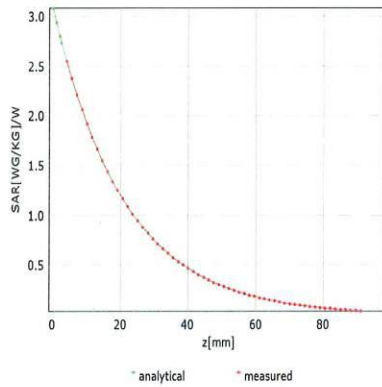

Deviation from Isotropy in Liquid

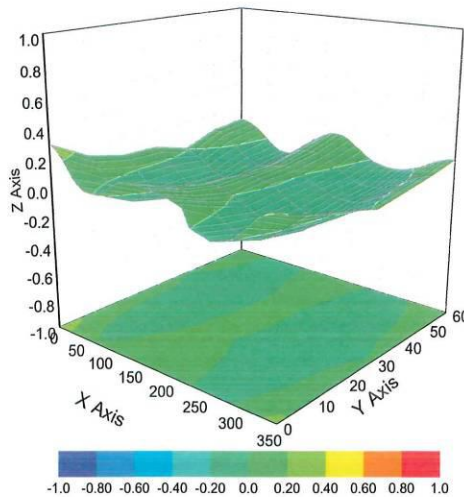

Uncertainty of Spherical Isotropy Assessment: ±3.2% (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2117
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN:7382

Other Probe Parameters

| | |
|--|-------------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 65.4 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disable |
| Probe Overall Length | 337mm |
| Probe Body Diameter | 10mm |
| Tip Length | 9mm |
| Tip Diameter | 2.5mm |
| Probe Tip to Sensor X Calibration Point | 1mm |
| Probe Tip to Sensor Y Calibration Point | 1mm |
| Probe Tip to Sensor Z Calibration Point | 1mm |
| Recommended Measurement Distance from Surface | 1.4mm |

APPENDIX C CALIBRATION CERTIFICATES

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **BACL**
Sunnyvale, USA

Certificate No. **D2450V2-1103_Mar23**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:1103**

Calibration procedure(s): **QA CAL-05.v12
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **March 27, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 04-Apr-22 (No. 217-03525/03524) | Apr-23 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-22 (No. 217-03524) | Apr-23 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-22 (No. 217-03525) | Apr-23 |
| Reference 20 dB Attenuator | SN: BH9394 (20k) | 04-Apr-22 (No. 217-03527) | Apr-23 |
| Type-N mismatch combination | SN: 310982 / 06327 | 04-Apr-22 (No. 217-03528) | Apr-23 |
| Reference Probe EX3DV4 | SN: 7349 | 10-Jan-23 (No. EX3-7349_Jan23) | Jan-24 |
| DAE4 | SN: 601 | 19-Dec-22 (No. DAE4-601_Dec22) | Dec-23 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter E4419B | SN: GB39512475 | 30-Oct-14 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A | SN: MY41093315 | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-22) | In house check: Oct-24 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-22) | In house check: Oct-24 |

| | Name | Function | Signature |
|----------------|---------------|-----------------------|--------------------|
| Calibrated by: | Jelon Kastali | Laboratory Technician | <i>[Signature]</i> |
| Approved by: | Sven Kühn | Technical Manager | <i>[Signature]</i> |

Issued: March 27, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accreditation No.: **SCS 0108**

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|------------------------|-------------|
| DASY Version | DASY52 | V52.10.4 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 2450 MHz ± 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 39.2 | 1.80 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 38.0 ± 6 % | 1.81 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | --- | --- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 13.1 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 51.7 W/kg ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|--------------------------|
| SAR measured | 250 mW input power | 6.10 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 24.2 W/kg ± 16.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------|
| Impedance, transformed to feed point | 53.5 Ω + 5.4 jΩ |
| Return Loss | - 24.2 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.151 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

DASY5 Validation Report for Head TSL

Date: 27.03.2023

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:1103


Communication System: UID 0 - CW; Frequency: 2450 MHz
 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88) @ 2450 MHz; Calibrated: 10.01.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)


Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 114.9 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 25.3 W/kg
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.10 W/kg
 Smallest distance from peaks to all points 3 dB below = 9 mm
 Ratio of SAR at M2 to SAR at M1 = 51.3%
 Maximum value of SAR (measured) = 21.2 W/kg

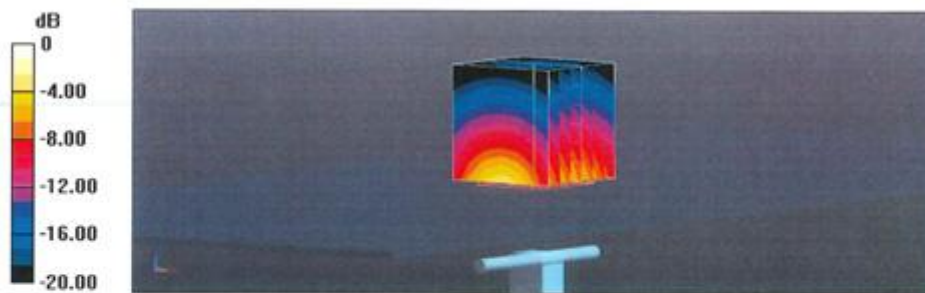

0 dB = 21.2 W/kg = 13.27 dBW/kg

Impedance Measurement Plot for Head TSL

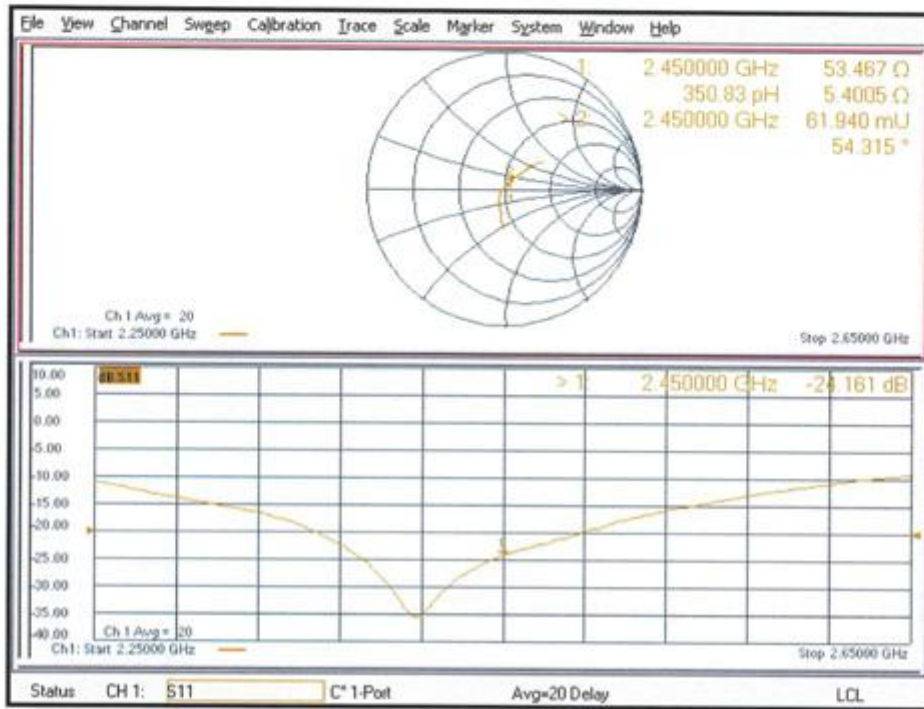

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **BACL**
Sunnyvale USA

Certificate No. **D5GHzV2-1374_Mar23**

CALIBRATION CERTIFICATE

Object: **D5GHzV2 - SN:1374**

Calibration procedure(s): **QA CAL-22.v7
Calibration Procedure for SAR Validation Sources between 3-10 GHz**

Calibration date: **March 27, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP | SN: 104778 | 04-Apr-22 (No. 217-03525/03524) | Apr-23 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-22 (No. 217-03524) | Apr-23 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-22 (No. 217-03525) | Apr-23 |
| Reference 20 dB Attenuator | SN: BH9394 (20k) | 04-Apr-22 (No. 217-03527) | Apr-23 |
| Type-N mismatch combination | SN: 310982 / 06327 | 04-Apr-22 (No. 217-03528) | Apr-23 |
| Reference Probe EX3DV4 | SN: 3503 | 07-Mar-23 (No. EX3-3503_Mar23) | Mar-24 |
| DAE4 | SN: 601 | 19-Dec-22 (No. DAE4-601_Dec22) | Dec-23 |

| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter E4419B | SN: GB39512475 | 30-Oct-14 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A | SN: US37292783 | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| Power sensor HP 8481A | SN: MY41093315 | 07-Oct-15 (in house check Oct-22) | In house check: Oct-24 |
| RF generator R&S SMT-06 | SN: 100972 | 15-Jun-15 (in house check Oct-22) | In house check: Oct-24 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-22) | In house check: Oct-24 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Sven Kühn | Technical Manager | |

Issued: March 29, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The source is mounted in a touch configuration below the center marking of the flat phantom.
- *Return Loss:* This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|--|----------------------------------|
| DASY Version | DASY52 | V52.10.4 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Zoom Scan Resolution | dx, dy = 4.0 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| Frequency | 5250 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz | |

Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.9 | 4.71 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.8 ± 6 % | 4.71 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL at 5250 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.01 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 80.1 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.31 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.1 W/kg ± 19.5 % (k=2) |

Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.5 | 5.07 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.6 ± 6 % | 5.09 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL at 5600 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.35 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 83.6 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.38 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.8 W/kg ± 19.5 % (k=2) |

Head TSL parameters at 5800 MHz

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|---|-----------------|--------------|------------------|
| Nominal Head TSL parameters | 22.0 °C | 35.3 | 5.27 mho/m |
| Measured Head TSL parameters | (22.0 ± 0.2) °C | 35.3 ± 6 % | 5.24 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C | ---- | ---- |

SAR result with Head TSL at 5800 MHz

| SAR averaged over 1 cm ³ (1 g) of Head TSL | Condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 8.14 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 81.4 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | condition | |
|---|--------------------|---------------------------------|
| SAR measured | 100 mW input power | 2.30 W/kg |
| SAR for nominal Head TSL parameters | normalized to 1W | 23.0 W/kg ± 19.5 % (k=2) |

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL at 5250 MHz

| | |
|--------------------------------------|-----------------|
| Impedance, transformed to feed point | 45.8 Ω - 4.5 jΩ |
| Return Loss | - 23.8 dB |

Antenna Parameters with Head TSL at 5600 MHz

| | |
|--------------------------------------|-----------------|
| Impedance, transformed to feed point | 49.4 Ω + 1.5 jΩ |
| Return Loss | - 35.9 dB |

Antenna Parameters with Head TSL at 5800 MHz

| | |
|--------------------------------------|-----------------|
| Impedance, transformed to feed point | 54.2 Ω + 1.5 jΩ |
| Return Loss | - 27.3 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.189 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

DASY5 Validation Report for Head TSL

Date: 27.03.2023

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1374

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5800 MHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 35.8$; $\rho = 1000$ kg/m³Medium parameters used: $f = 5600$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 35.6$; $\rho = 1000$ kg/m³Medium parameters used: $f = 5800$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.5, 5.5, 5.5) @ 5250 MHz, ConvF(5.1, 5.1, 5.1) @ 5600 MHz, ConvF(5.01, 5.01, 5.01) @ 5800 MHz; Calibrated: 07.03.2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 19.12.2022
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan,**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 76.14 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.4%

Maximum value of SAR (measured) = 17.8 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan,**dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.28 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 30.3 W/kg


SAR(1 g) = 8.35 W/kg; SAR(10 g) = 2.38 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm


Ratio of SAR at M2 to SAR at M1 = 68.8%

Maximum value of SAR (measured) = 19.2 W/kg

Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 73.43 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 31.6 W/kg
SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.3 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 66.5%
Maximum value of SAR (measured) = 19.3 W/kg

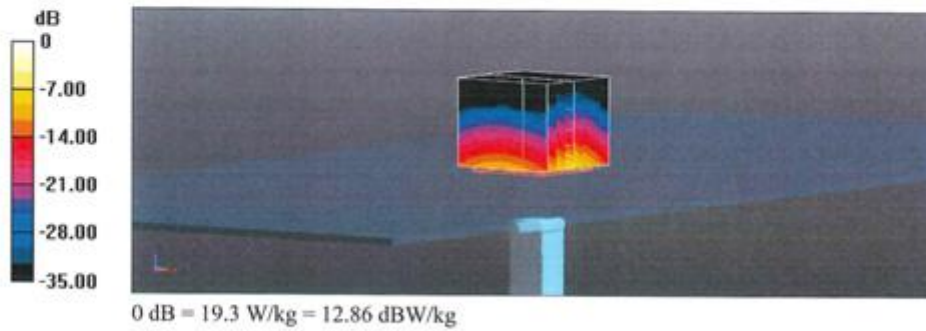

Impedance Measurement Plot for Head TSL

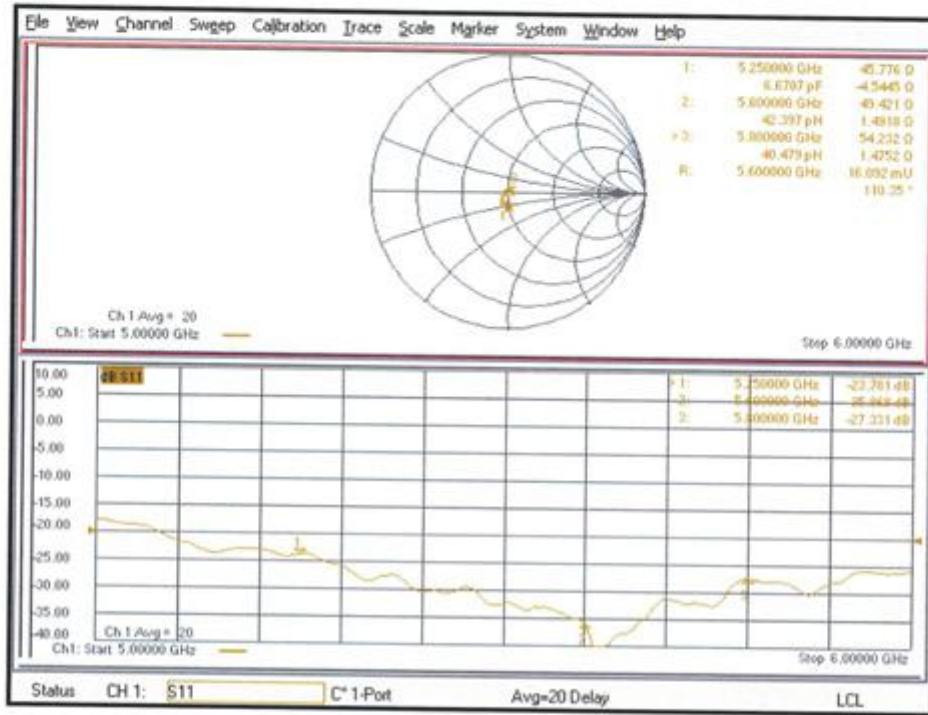

APPENDIX E RETURN LOSS&IMPEDANCE MEASUREMENT

Equipment Details:

Description: Dipole
 Manufacturer: Speag
 Model Number: D2450V2
 Serial Number: 1103
 Calibration Date: 2024/03/26
 Calibrated By: Bob Lu
 Signature: Bob Lu

All Calibration have been conducted in the closed laboratory facility: Lab Temperature 18°C-25°C and humidity < 70%

The calibration methods and procedures used were as detailed in:

KDB Publication Number: “KDB865664 D01 SAR Measurement 100 MHz to 6 GHz”

- 1.The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
- 2.The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

Calibrated Equipment:



| Equipment | Model | S/N | Calibration Date | Calibration Due Date |
|----------------------------------|-----------------|----------------|------------------|----------------------|
| Simulated Tissue Liquid Head | HBBL600-10000V6 | 2200808-2 | Each Time | |
| SAM Twin Phantom | SAM-Twin V8.0 | 1962 | NCR | NCR |
| Network Analyzer | E5071C | SER MY46519680 | 2023/06/08 | 2024/06/07 |
| Network Analyzer Calibration Kit | 50 Ω | 51026 | NCR | NCR |

Test Data:

| Frequency (MHz) | Simulated Liquid | Parameter | Measured Value | Target Value | Deviation | Reference Range | Results |
|-----------------|------------------|---------------------|----------------|--------------|-----------|-----------------|---------|
| 2450 | Head | Return Loss | 25.308 dB | 24.161 dB | 4.747 % | ±20%; > 20dB | Pass |
| | | Real Impedance | 56.592 Ω | 53.467 Ω | 3.125 Ω | ≤ 5 Ω | Pass |
| | | Imaginary Impedance | 0.829 Ω | 5.400 Ω | -4.571 Ω | ≤ 5 Ω | Pass |

Note: Return Loss Deviation = (Measured-Target)/Target×100%

Dipole, 2450MHz, 1103

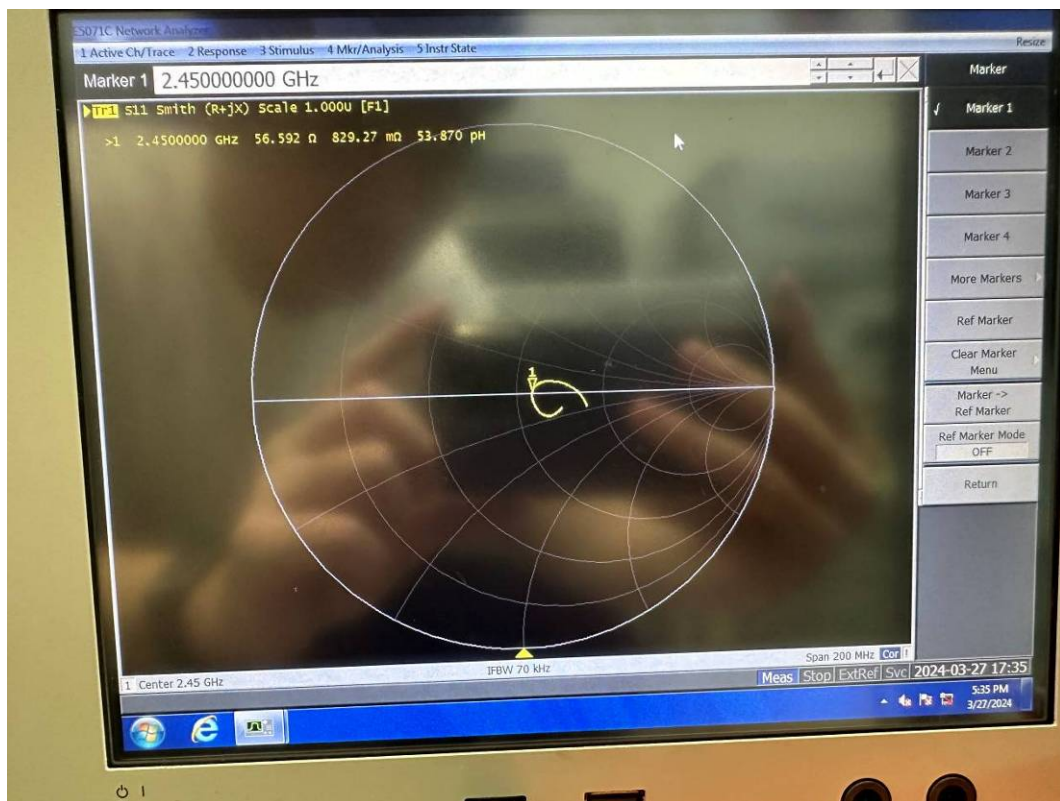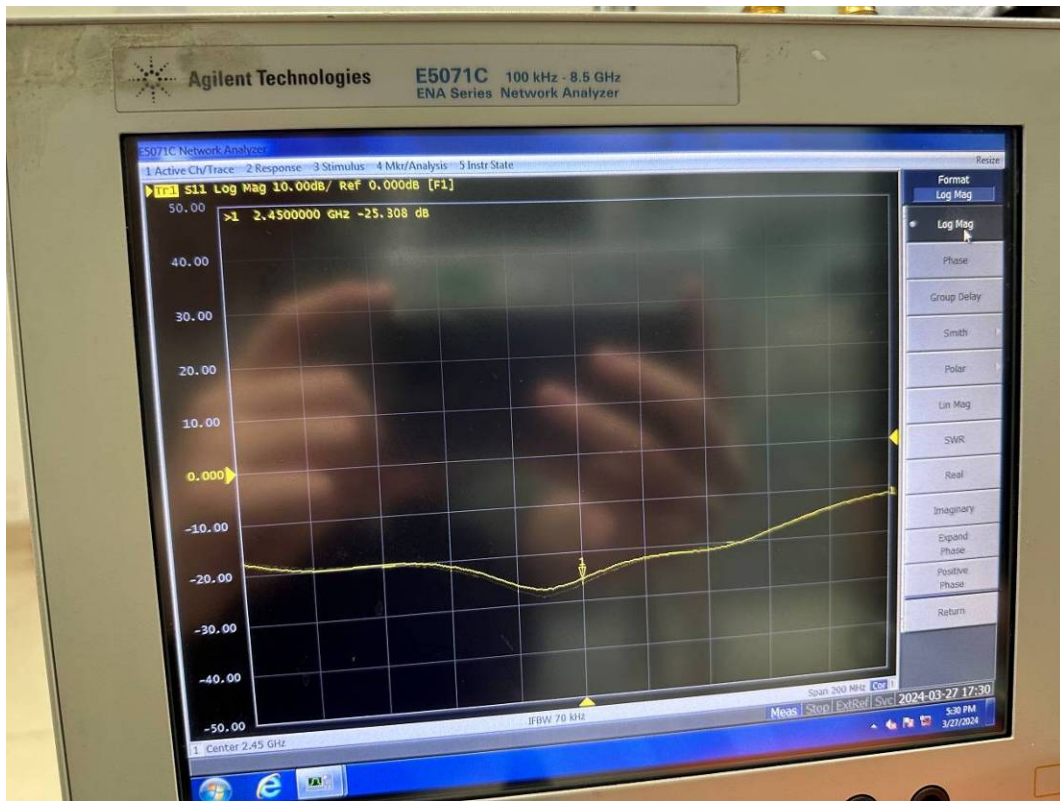

Equipment Details:

Description: Dipole
 Manufacturer: Speag
 Model Number: D5GHzV2
 Serial Number: 1374
 Calibration Date: 2024/03/26
 Calibrated By: Bob Lu
 Signature: Bob Lu

All Calibration have been conducted in the closed laboratory facility: Lab Temperature 18°C-25°C and humidity < 70%

The calibration methods and procedures used were as detailed in:

KDB Publication Number: “KDB865664 D01 SAR Measurement 100 MHz to 6 GHz”

- 1.The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
- 2.The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

Calibrated Equipment:



| Equipment | Model | S/N | Calibration Date | Calibration Due Date |
|----------------------------------|-----------------|----------------|------------------|----------------------|
| Simulated Tissue Liquid Head | HBBL600-10000V6 | 2200808-2 | Each Time | |
| SAM Twin Phantom | SAM-Twin V8.0 | 1962 | NCR | NCR |
| Network Analyzer | E5071C | SER MY46519680 | 2023/06/08 | 2024/06/07 |
| Network Analyzer Calibration Kit | 50 Ω | 51026 | NCR | NCR |

Test Data:



| Frequency (MHz) | Simulated Liquid | Parameter | Measured Value | Target Value | Deviation | Reference Range | Results |
|-----------------|------------------|---------------------|----------------|--------------|-----------|-----------------|---------|
| 5250 | Head | Return Loss | 22.303 dB | 23.781 dB | -6.215 % | ±20%; > 20dB | Pass |
| | | Real Impedance | 44.252 Ω | 45.776 Ω | 1.524 Ω | ≤ 5 Ω | Pass |
| | | Imaginary Impedance | -2.702 Ω | -4.545 Ω | 1.843 Ω | ≤ 5 Ω | Pass |
| 5800 | Head | Return Loss | 29.943 dB | 27.331 dB | 9.557 % | ±20%; > 20dB | Pass |
| | | Real Impedance | 50.363 Ω | 54.232 Ω | -3.869 Ω | ≤ 5 Ω | Pass |
| | | Imaginary Impedance | -2.534 Ω | 1.475 Ω | -4.009 Ω | ≤ 5 Ω | Pass |

Note: Return Loss Deviation = (Measured-Target)/Target×100%

Dipole, 5250MHz, 1374

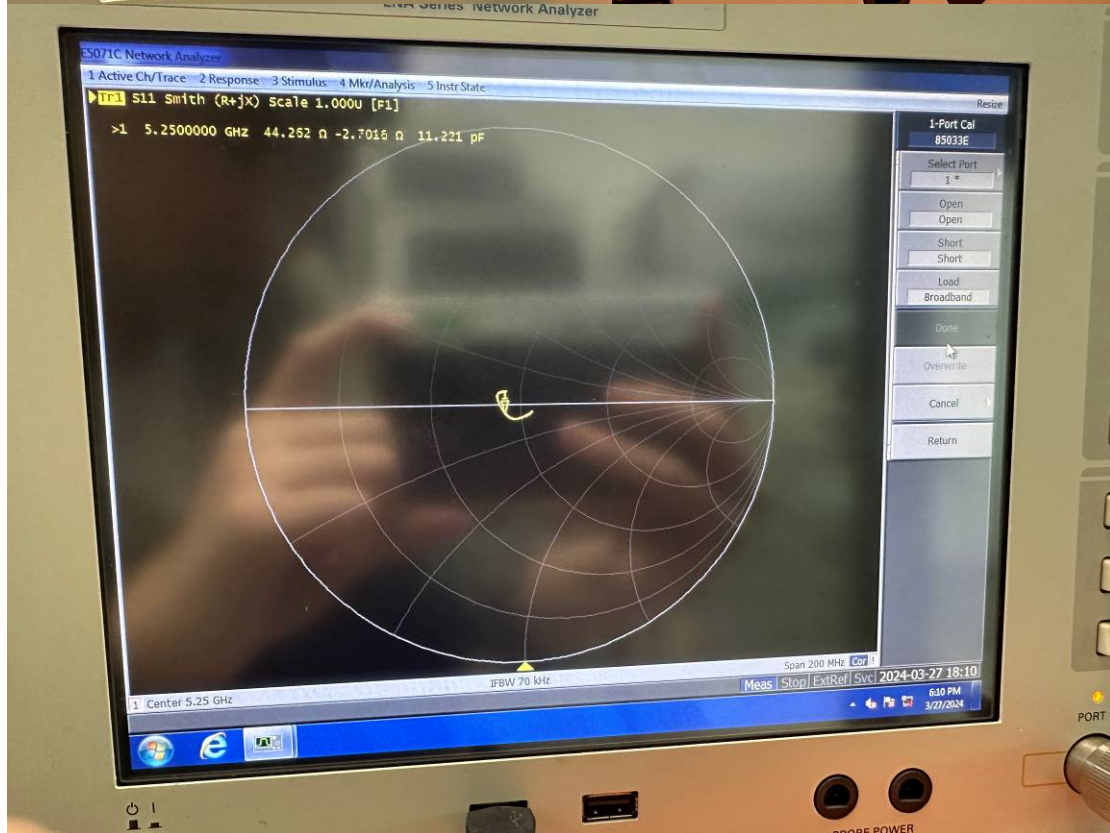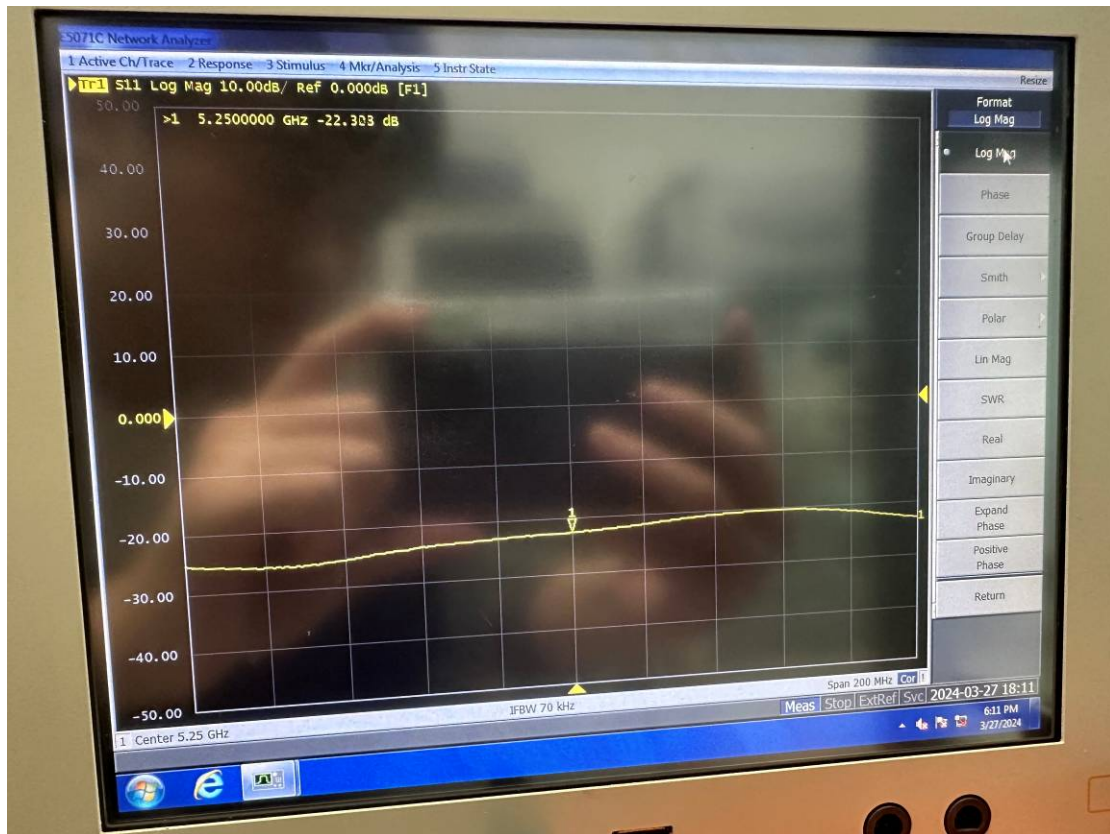

Dipole, 5800MHz, 1374

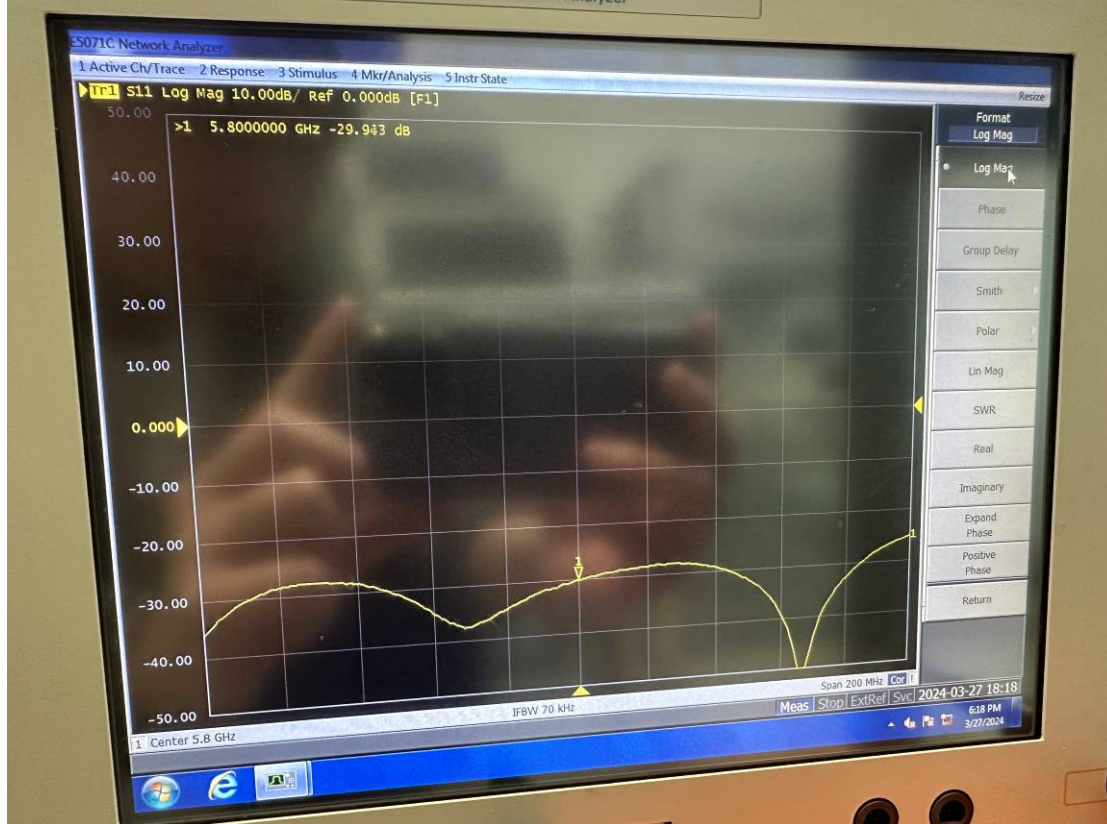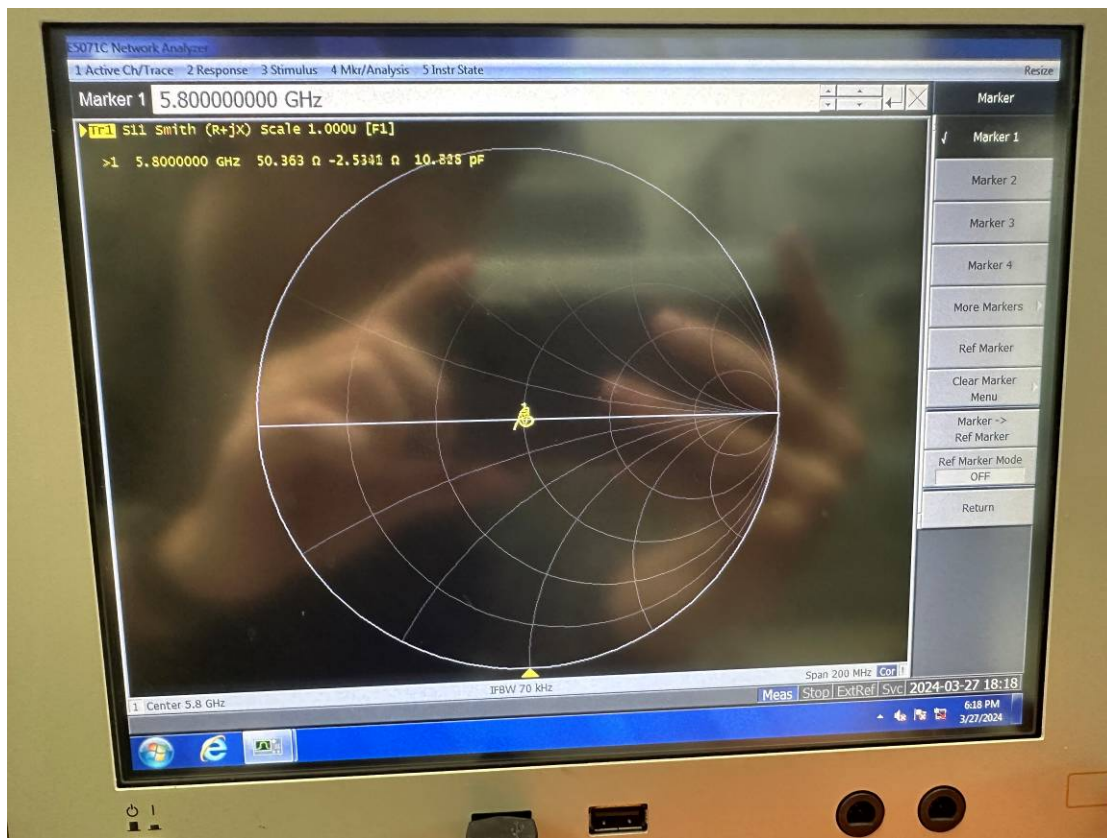

***** END OF REPORT *****